

TEST REPORT

REPORT NUMBER: 25B02W000005-002

ON

Type of Equipment: Barcode Reader

Type of Designation: DLMKWF

Brand Name: DATALOGIC

Manufacturer: Datalogic S.r.l.

FCC ID: U4G-DLMKWF

IC: 3862E-DLMKWF

ACCORDING TO

FCC CFR47 Part 2, FCC CFR47 Part 15C, RSS-210 Issue 11, RSS-Gen Issue 5, ANSI C63.10-2013

Chongqing Academy of Information and Communications Technology

Month date, year

Apr.21st, 2025

Signature

Zhou Jin

Director

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of Chongqing Academy of Information and Communications Technology.

Revision Version

Report Number	Revision	Date
25B02W000005-002	00	2025-04-21

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

CONTENTS

1.	Test Laboratory	4
1.1.	Testing Location	4
1.2.	Testing Environment	4
1.3.	Project data	4
1.4.	Signature	4
2.	Client Information	5
2.1.	Applicant Information	5
2.2.	Manufacturer Information	5
3.	Equipment under Test (EUT) and Ancillary Equipment (AE)	6
3.1.	About EUT	6
3.2.	Internal Identification of EUT used during the test	6
3.3.	Internal Identification of AE used during the test	6
4.	Reference Documents	8
4.1.	Reference Documents for testing	8
5.	Test Equipments Utilized	9
6.	Test Results	10
6.1.	Summary of Test Results	10
7.	Test Results	11
7.1.	20 dB bandwidth	11
7.2.	Frequency Stability	13
7.3.	Radiated Emission	16
7.4.	Conducted Emission	25
7.5.	Occupied bandwidth	28
	Annex A EUT Photos	31
	Annex B Deviations from Prescribed Test Methods	32

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

1. Test Laboratory

1.1. Testing Location

Name:	Chongqing Academy of Information and Communications Technology
FCC Registration Number:	CN1239
Address:	No.19 EastRoad,Xiantao Big-data Valley,Yubei District, Chongqing,People's Republic of China
Postal Code:	401336
Telephone:	0086-23-88069965
Fax:	0086-23-88608777

1.2. Testing Environment

Normal Temperature:	15-35°C
Relative Humidity:	25-75%RH

1.3. Project data

Testing Start Date:	2025-04-03
Testing End Date:	2025-04-03

1.4. Signature

2025-04-21

Li Runhao
(Prepared this test report)

Date

2025-04-21

Xiao Yu
(Reviewed this test report)

Date

2025-04-21

Zhou Jin
Director of the laboratory
(Approved this test report)

Date

Chongqing Academy of Information and Communications Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

2. Client Information

2.1. Applicant Information

Company Name:	Datalogic S.r.l.
Address /Post:	Via San Vitalino no.13, Calderara di Reno -40012(BO)-Italy
City:	Calderara di Reno
Country:	Italy
Telephone:	+39 051 3147 393
Fax:	N/A
Email:	Ruggero.Cacioppo@datalogic.com
Contact Person:	Ruggero Cacioppo

2.2. Manufacturer Information

Company Name:	Datalogic S.r.l.
Address /Post:	Via San Vitalino no.13, Calderara di Reno -40012(BO)-Italy
City:	Calderara di Reno
Country:	Italy
Telephone:	+39 051 3147 393
Fax:	N/A
Email:	Ruggero.Cacioppo@datalogic.com
Contact Person:	Ruggero Cacioppo

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Barcode Reader
Model name	DLMKWF
Brand name	DATALOGIC
Power Rating	DC 12V from Adapter, DC 3.85V from Battery
Modulation Type	ASK
Operating Frequency	13.56MHz
Supported Radio Technology and Bands	2.4G WLAN 802.11b,g,n 5G WLAN 802.11a,n,ac BT5.2 BR/EDR/BLE GPS/GLONASS/Galileo/BDS NFC
HVIN number	DLMKWF

Note: Photographs of EUT are shown in ANNEX B of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID	SN or IMEI	HW Version	SW Version	Date of receipt
25B02W000005#S07	S25CC0873	V00	0.00.01.20250311	2025-03-20

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Note
AE1	Adapter	Model: 2ACP0183C OUTPUT: 5V 3A/9V 2A/12V 1.5A
AE2	USB Cable	N/A

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965
FAX: 0086-23-88608777

AE3	Battery	Model: MK2-BY-202 3.85V 4850mAh
AE4	Type-A Card	N/A
AE5	NFC Test Software	NFC Polling Monitor

*AE ID: is used to identify the test sample in the lab internally.

AE Information is provided by the customer.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC CFR47 Part 2	Frequency allocations and radio treaty matters; general rules and regulations	--
FCC CFR47 Part 15C	Radio Frequency Devices-Intentional Radiators	--
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
RSS-210	License-Exempt Radio Apparatus: Category I Equipment	2024
RSS-Gen	General Requirements for Compliance of Radio Apparatus	2021
Note:FCC CFR47 Part 2 is not A2LA certified.		

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

5. Test Equipments Utilized

No.	Equipment	Model	SN	HW Version	SW Version	Manufacture	Cal.Due Date
1	Test Receiver	ESR 3	101382	03	3.48 SP2	R&S	2025-06-28
2	Test Receiver	ESW 26	101382	00	1.50 SP1	R&S	2025-06-28
3	Ultra-wideband Log Periodic Antenna	VULB9163	9163-586	--	--	Schwarzb eck	2026-10-28
4	Double Ridged Guide Antenna	9120D	1083	--	--	R&S	2026-11-08
5	2-Line V-Network	ENV216	102368	--	--	R&S	2025-05-16
6	Test Receiver	ESU 40	100350	01	4.43 SP3	R&S	2025-06-28
7	Loop Antenna	6502	00213256	--	--	ETS	2026-09-04
8	Spectrum analyzer	FSQ 26	201137	--	--	R&S	2025-06-28

Test software

No.	Name	version	SN	Manufacture
1	EMC32	V10.40.10	--	R&S
2	EMC32	V10.20.01	--	R&S

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6. Test Results

6.1. Summary of Test Results

FCC Rules	Name of Test	Result
15.215(c) / RSS-Gen 6.7	20 dB bandwidth	Pass
15.225(e) / RSS-210 B.6.b	Frequency Stability	Pass
15.225 (a) (b) (c) (d) and 15.209 / RSS-210 B.6.a (i , ii , iii , iv)	Radiated Emission	Pass
15.207 / RSS-Gen 8.8	Conducted Emissions	Pass
2.1049 / RSS-Gen 6.7	Occupied bandwidth	Pass
15.203/15.247(c) RSS Gen 6.8, RSS-247 5.4	Antenna requirement	Pass ^{Note 2}
Note1:The DLMKWF, manufactured by Datalogic S.r.l. is a new product for testing. Note2: The EUT has an internal loop antenna for NFC (13.56MHz) function, so this EUT complies with the RSS Gen 6.8 and RSS-247 5.4 antenna requirements, please refer to the internal photos.		

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX:0086-23-88608777


7. Test Results

7.1. 20 dB bandwidth

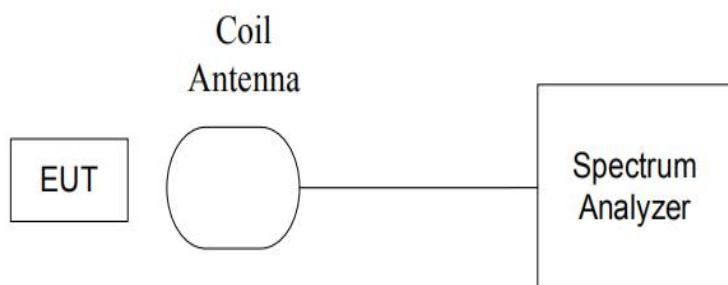
Specifications:	15.215(c) / RSS-Gen 6.7
DUT Serial Number:	S25CC0873
Date of Tests	2025-04-03
Test conditions:	Ambient Temperature:23.5°C Relative Humidity:36.5% Air pressure: 101.8kPa
Operation Mode	Mode 1: TX mode+ AE3+ AE4+ AE5
Test Results:	Pass

Limit/Criterion:

N/A

EUT Setup:

Mode 1

EUT Connection Diagram of Test System**Test Method:**

- The transmitter output signal was picked up by coil antenna to the spectrum analyzer.
- The transmitter output signal was picked up by coil antenna connected to the spectrum analyzer.
- The bandwidth of the center frequency was measured with 200Hz RBW, 500Hz VBW and 14kHz span.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Uncertainty Measurement:

The measurement uncertainty is 92.1Hz (k=2)

Test Condition:

The measurement of EUT is carried out under the transmit state of NFC and without modulation.

EUT had been not connected to a travel adapter.

During the measurements, the ambient temperature is in the range of 15~25°C.

Test Result:

Carrier frequency (MHz)	20dB Bandwidth (kHz)	Test Results	Conclusion
13.56	0.561	See Figure 7.1.1	Pass

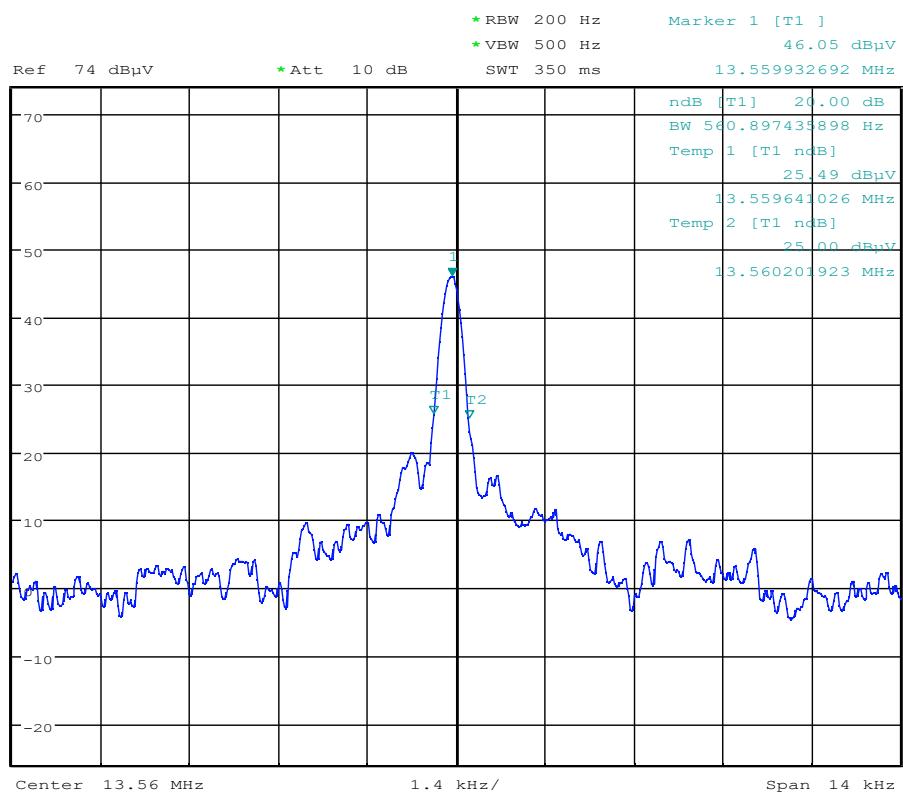


Figure 7.1.1 Mode 1 20dB Bandwidth

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777


7.2. Frequency Stability

Specifications:	15.225(e) / RSS-210 B.6.b
DUT Serial Number:	S25CC0873
Date of Tests	2025-04-03
Test conditions:	Ambient Temperature:23.5°C Relative Humidity:36.5% Air pressure: 101.8kPa
Operation Mode	Mode 1: TX mode+ AE3+ AE4+ AE5
Test Results:	Pass

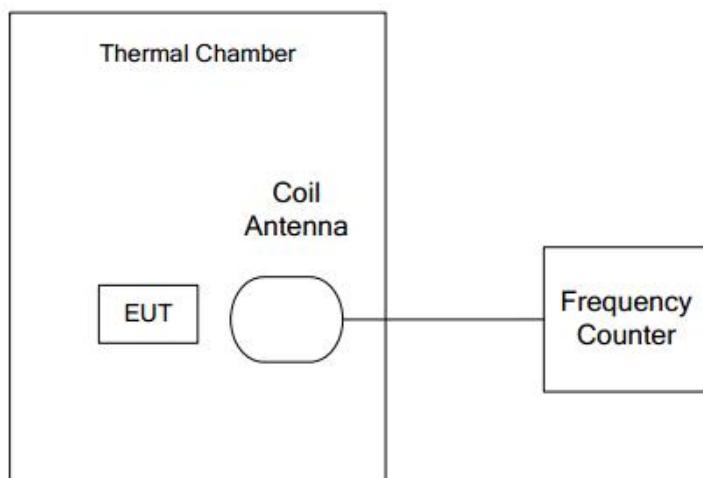
Limit/Criterion:

15.225(e): The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

RSS-210 B.6.b: The frequency tolerance of the carrier signal shall be maintained within ± 100 ppm of the operating frequency.

EUT Setup:

Mode 1

EUT Connection Diagram of Test System**Chongqing Academy of Information and Communications Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Test Method:

The transmitter output single was picked up by coil antenna connected to the frequency counter. The center frequency was measured with 30Hz RBW and 1kHz span.

During the test, the EUT was placed in a thermal chamber until thermal balance and lasting appropriate time.

Uncertainty Measurement:

The measurement uncertainty $U=2.12\text{Hz}(k=2)$.

Test Condition:

The measurement of EUT is carried out under the transmit state of without modulation, EUT1 had been not connected to a travel adapter.

Operation Temperature: -20°C, -10°C, 0°C, 10°C, 20°C, 30°C, 40°C, 50°C

Operation Voltage: $V_{\min}=3.6\text{V}$, $V_{\max}=4.4\text{V}$, and $T_{\text{nom}}=3.85\text{V}$.

Test Result:

Temperature	Voltage	Frequency Error (MHz)			
		Startup	2Min Later	5Min Later	10Min Later
-20°C	3.85V	13.559946	13.560029	13.560723	13.560178
-10°C		13.559882	13.560192	13.560316	13.560317
0°C		13.559991	13.560099	13.560615	13.560568
20°C		13.559899	13.560152	13.560832	13.560227
30°C		13.559913	13.560242	13.560218	13.560175
40°C		13.559922	13.559991	13.559984	13.560217
50°C		13.559993	13.560175	13.560943	13.560841
20°C	3.6V	13.559929	13.560723	13.560736	13.559929
20°C	4.4V	13.559947	13.560323	13.559347	13.559947
Temperature	Voltage	Frequency Error (%)			

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

-20°C	3.85V	0.000096	0.000708	0.005826	0.001807
-10°C		-0.000376	0.001910	0.002824	0.002832
0°C		0.000428	0.001224	0.005030	0.004683
20°C		-0.000251	0.001615	0.006630	0.002168
30°C		-0.000147	0.002279	0.002102	0.001785
40°C		-0.000081	0.000428	0.000376	0.002094
50°C		0.000442	0.001785	0.007448	0.006696
20°C	3.6V	-0.000029	0.005826	0.005922	-0.000029
20°C	4.4V	0.000103	0.002876	-0.004320	0.000103
Temperature	Voltage	Frequency Error (ppm)			
-20°C	3.85V	0.958706802	7.079681	58.25987	18.06794
-10°C		-3.76108053	19.10039	28.24498	28.31872
0°C		4.27730727	12.24195	50.29523	46.82914
20°C		-2.50738702	16.15052	66.29826	21.68152
30°C		-1.474933541	22.78772	21.0178	17.8467
40°C		-0.811213448	4.277307	3.761081	20.94406
50°C		4.424800624	17.8467	74.48414	66.96198
20°C	3.6V	-0.294986708	58.25987	59.21858	-0.29499
20°C	4.4V	1.032453479	28.7612	-43.2156	1.032453

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 086-23-88069965 FAX: 086-23-88608777

7.3. Radiated Emission

7.3.1 Electric Field Strength of Fundamental Emissions

Specifications:	15.225 (a) (b) (c) (d) and 15.209 / RSS-210 B.6.a (i , ii , iii , iv)
DUT Serial Number:	S25CC0873
Date of Tests	2025-04-03
Test conditions:	Ambient Temperature:23.5°C Relative Humidity:36.5% Air pressure: 101.8kPa
Operation Mode	Mode 1: TX mode+ AE3+ AE4+ AE5
Test Results:	Pass

Limit/Criterion:

Clause 15.225(a) / B.6.a (i) the field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Clause 15.225(b) / B.6.a (ii) within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.


Clause 15.225(c) / B.6.a (iii) within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Frequency Range (MHz)	E-field Strength Limit @30m (uV/m)	E-field Strength Limit @3m (dBuV/m)
13.560 ± 0.007	15848	124
13.410 to 13.553 13.567 to 13.710	334	90
13.110 to 13.410 13.710 to 14.010	106	81
Outside the band 13.110-14.010	Based on 15.225.d, the limit of this range see section 6.3.2.4 Base on RSS-210 B.6.a.iv, the limit of this range reference RSS-Gen 8.9	

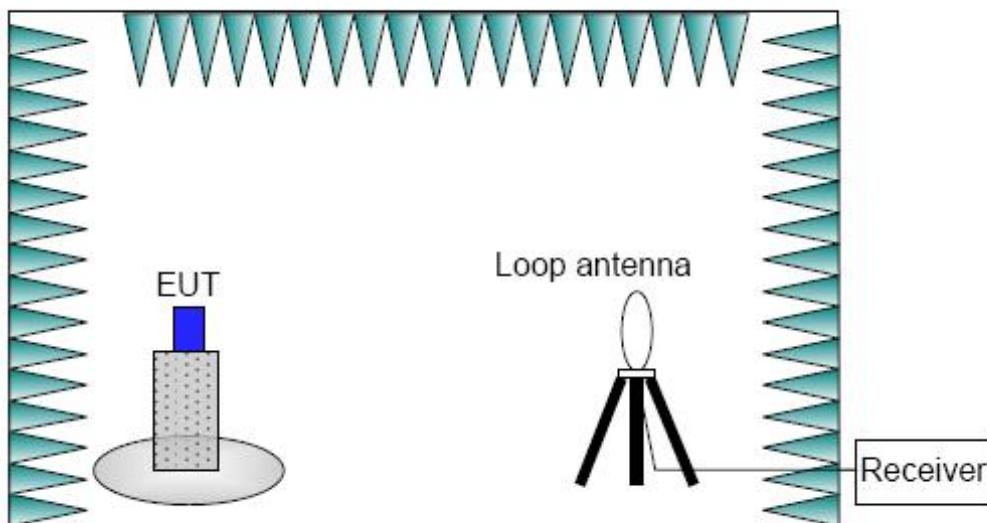
Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:
Extrapolation (dB) = 40log10 (Measurement Distance / Specification Distance)

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 086-23-88069965 FAX: 086-23-88608777

EUT Setup:

Mode 1

EUT Connection Diagram of Test System**Test Method:**

- a. The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The transmitter carrier output levels (E-Field) from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.
- b. Loop Antenna was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Uncertainty Measurement:

The measurement uncertainty $U=4.30\text{dB}(k=2)$.

Test Condition:

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
13.11-14.00	10kHz/30kHz	AUTO

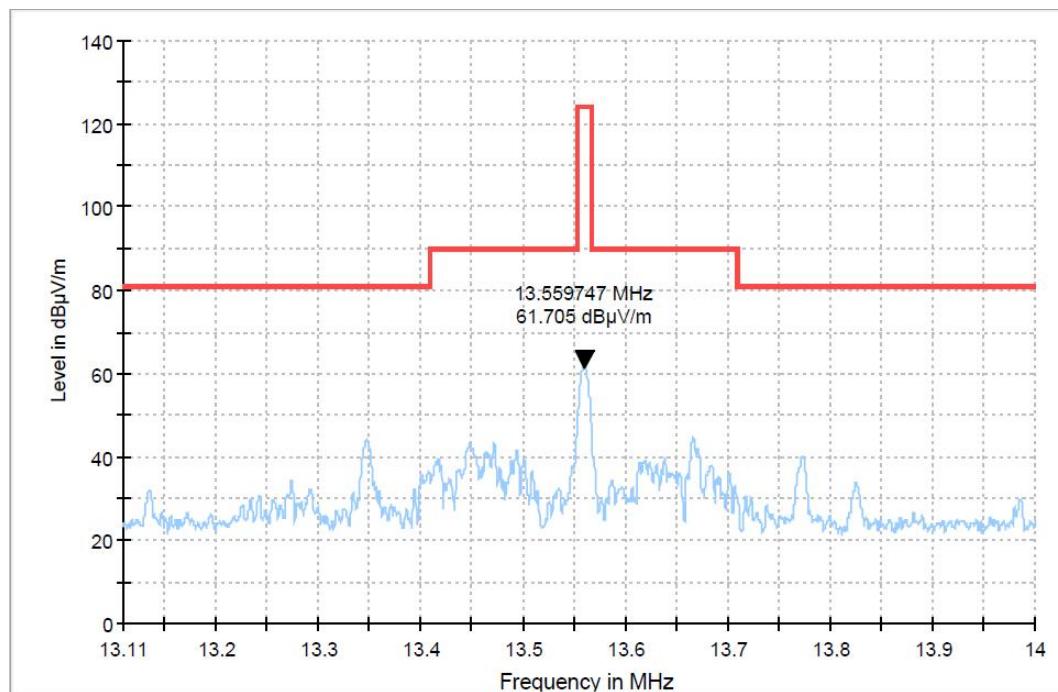
Test Result:

Figure 7.3.1-1 Mode 1 Electric Field Strength of Fundamental Emissions

7.3.2 Electric Field Radiated Emissions (Below 30MHz)

Specifications:	15.225 (a) (b) (c) (d) and 15.209 / RSS-210 B.6.a (i , ii , iii , iv)
DUT Serial Number:	S25CC0873
Date of Tests	2025-04-03
Test conditions:	Ambient Temperature:23.5°C Relative Humidity:36.5% Air pressure: 101.8kPa
Operation Mode	Mode 1: TX mode+ AE3+ AE4+ AE5
Test Results:	Pass

Limit/Criterion:


Frequency Range (MHz)	E-field Strength Limit (Uv/m)	E-field Strength Limit @3m (dBuV/m)
0.009-0490	2400/F (kHz) @300m	129-94
0.490-1.705	24000/F (kHz) @30m	74-63
1.705-30	30 @30m	70

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

Extrapolation (dB) = 40log10(Measurement Distance / Specification Distance)

$\text{dBuA/m} = \text{dBuV/m} / 120\pi$

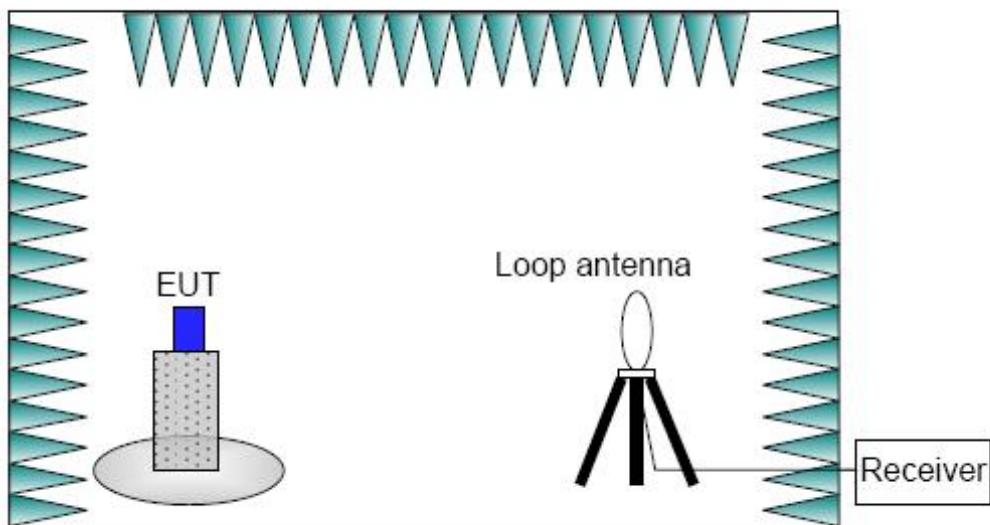
Based on RSS-Gen Table 5, the ISED limit is the same as above.

EUT Setup:

Mode 1

EUT Connection Diagram of Test System**Chongqing Academy of Information and Communications Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

**Test Method:**

- The electric field radiated emissions from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. The measurements were performed with the peak detector and if required, the quasi-peak detector.
- Loop Antenna was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

Uncertainty Measurement:

The measurement uncertainty $U=4.30\text{dB}(k=2)$.

Test Condition:

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
0.009-30	10kHz/30kHz	AUTO

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

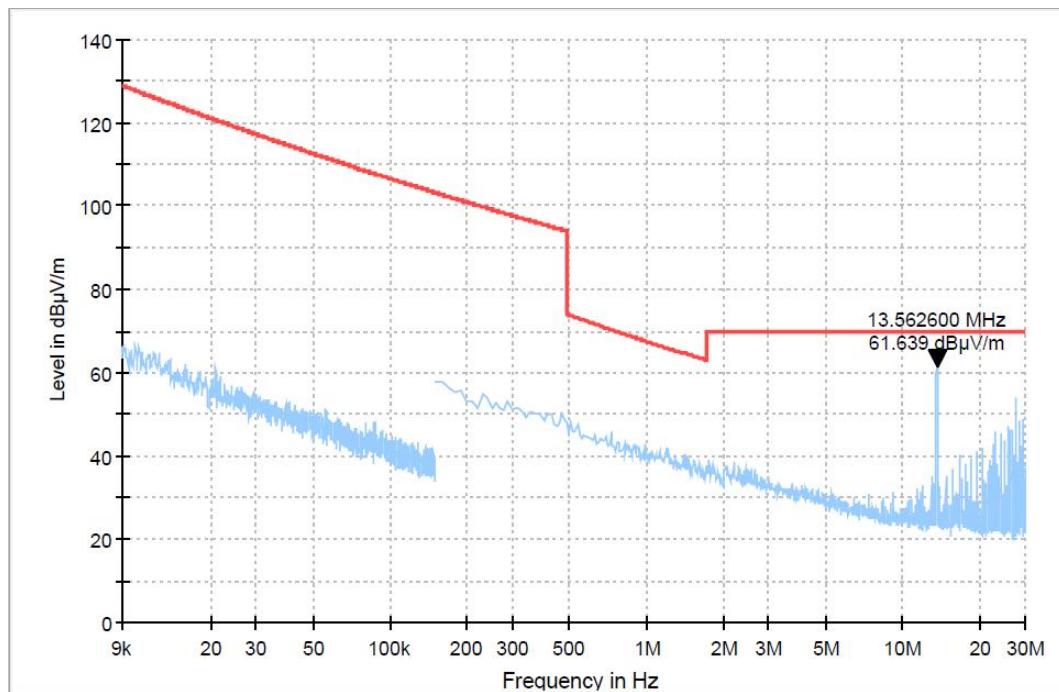
Test Result:

Figure 7.3.2-1 Mode 1 Electric Field Radiated Emissions (Below 30MHz)

7.3.3 Electric Field Radiated Emissions (Above 30MHz)

Specifications:	15.225 (a) (b) (c) (d) and 15.209 / RSS-210 B.6.a (i , ii , iii , iv)
DUT Serial Number:	S25CC0873
Date of Tests	2025-04-03
Test conditions:	Ambient Temperature:23.5°C Relative Humidity:36.5% Air pressure: 101.8kPa
Operation Mode	Mode 1: TX mode+ AE3+ AE4+ AE5
Test Results:	Pass


Limit/Criterion:

Frequency Range (MHz)	Quasi-Peak (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)
30-88	40	N/A	N/A
88-216	43.5	N/A	N/A
216-960	46	N/A	N/A
Above 960	54	N/A	N/A
Above 1000	N/A	74	54

ISED Limit:

Frequency Range (MHz)	Field Strength (μ V/m at 3 metres)	Field Strength (dB μ V/m at 3 metres)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Note: dB μ V/m = 20 log Uv/m

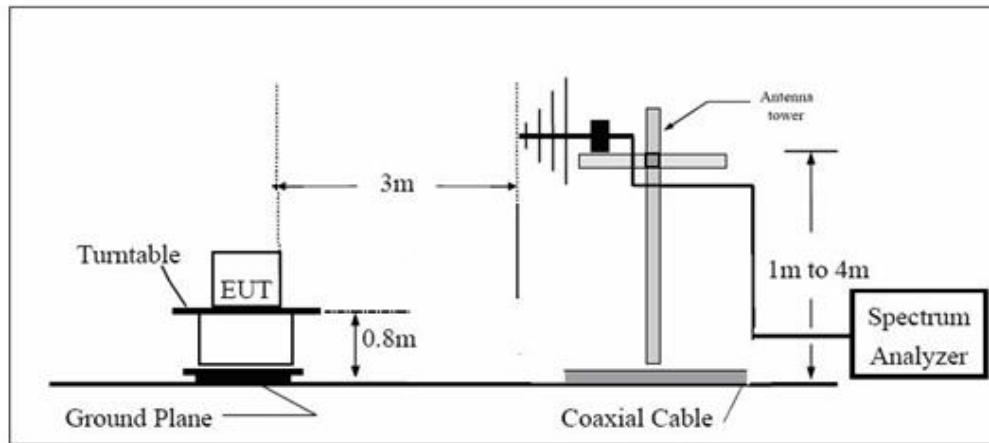
EUT Setup:


Mode 1

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

EUT Connection Diagram of Test System



Test Method:

- The electric field radiated emissions from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. Both horizontal and vertical polarizations of the antenna were set during the measurement. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.
- The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

Uncertainty Measurement:

The measurement uncertainty $U=4.09\text{dB}(k=2)$.

Test Condition:

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120 kHz / 300kHz	AUTO

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

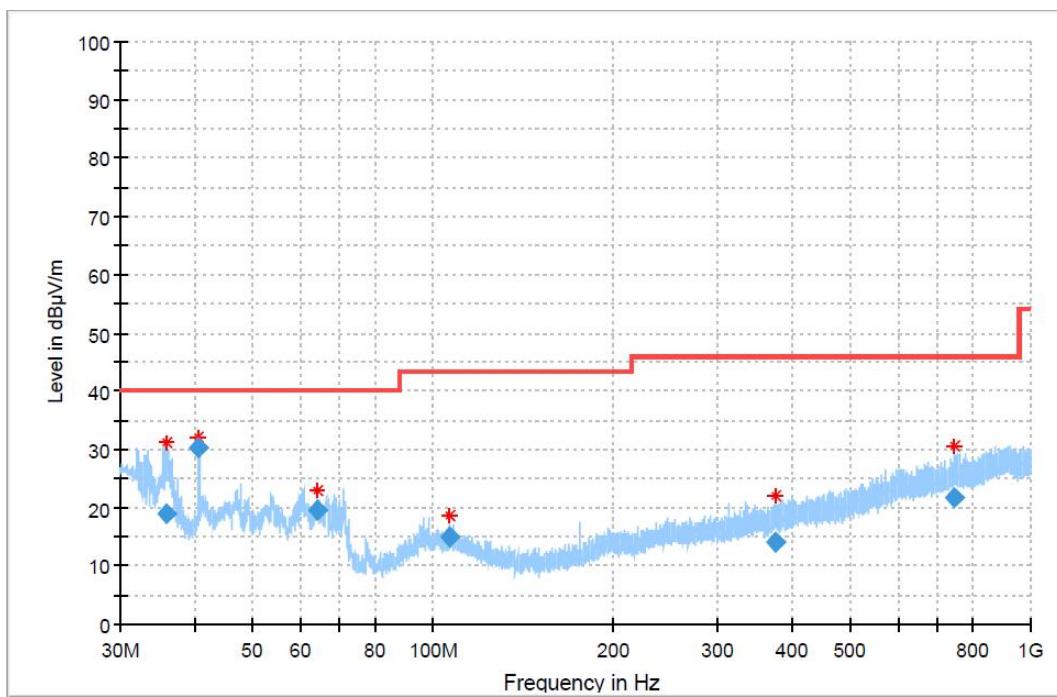
Test Result:

Figure 7.3.3-1 Mode 1 Electric Field Radiated Emissions (Above 30MHz)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.791672	19.11	40.00	20.89	100.0	V	-15.0	-14
40.683464	30.37	40.00	9.63	100.0	V	83.0	-13
64.221709	19.42	40.00	20.58	225.0	V	207.0	-14
106.474643	15.03	43.50	28.47	100.0	V	111.0	-13
375.530989	14.16	46.00	31.84	125.0	V	80.0	-8
743.930421	21.77	46.00	24.23	125.0	V	338.0	-1

Chongqing Academy of Information and Communications TechnologyAddress: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

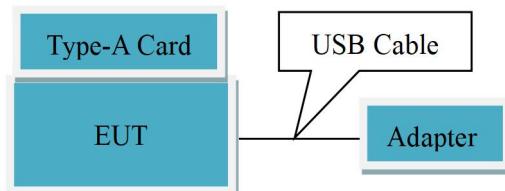
7.4. Conducted Emission

Specifications:	15.207 / RSS-Gen 8.8
DUT Serial Number:	S25CC0873
Date of Tests	2025-04-03
Test conditions:	Ambient Temperature:23.5°C Relative Humidity:36.5% Air pressure: 101.8kPa
Operation Mode	Mode 2: TX mode+ AE1+ AE2+ AE3+ AE4+ AE5
Test Results:	Pass

Limit Level Construction:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

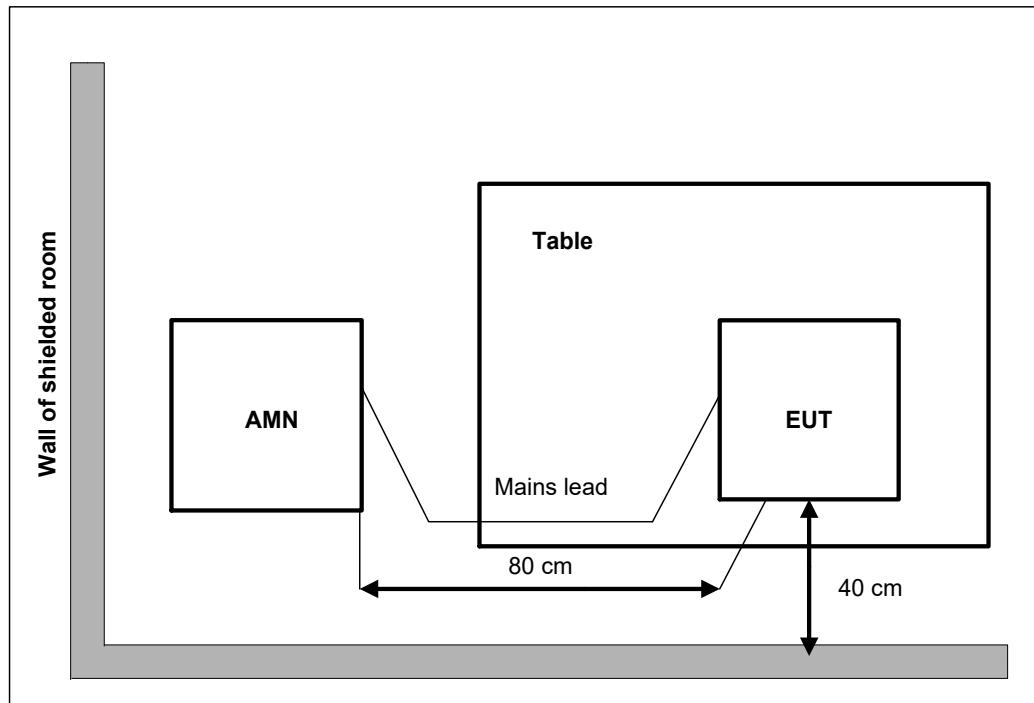
*Decreases with the logarithm of the frequency

EUT Setup:

Mode 2

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

**Test Method:**

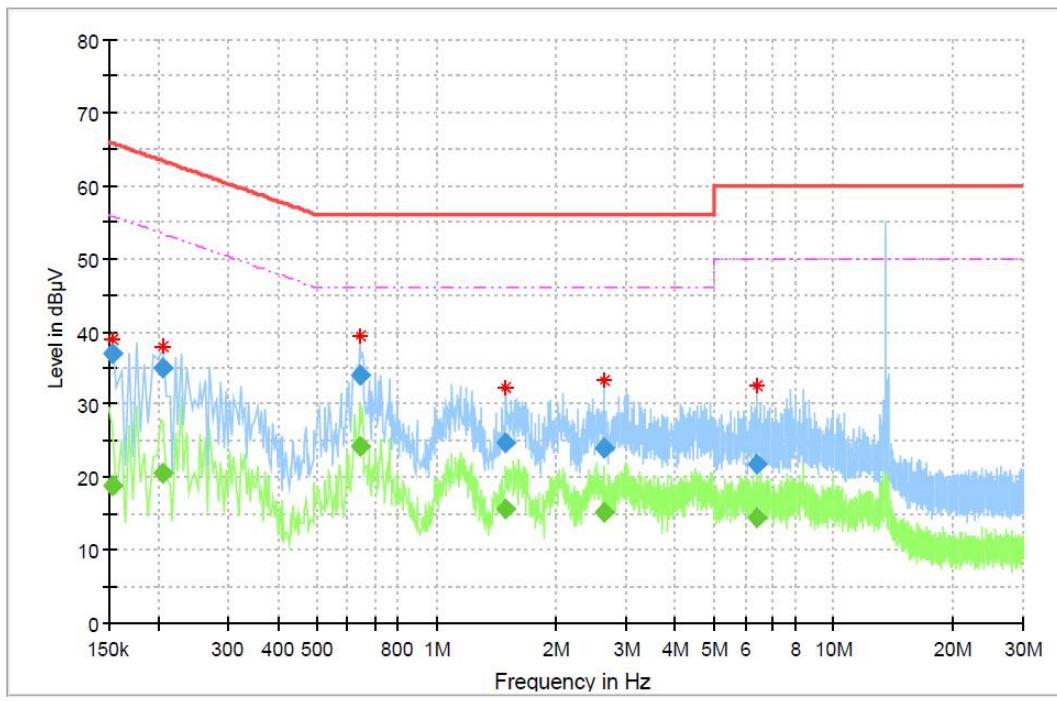
The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector. Tested in accordance with the procedures of ANSI C63.10-2013 / RSS-Gen Issue 5.

Uncertainty Measurement:

The measurement uncertainty (150kHz-30MHz) is 1.97 dB (k=2).

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Test Result:

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.153731	36.87	---	15000	9.000	N	ON	10.1	28.92	65.80
0.153731	---	18.76	15000	9.000	N	ON	10.1	37.04	55.80
0.205969	34.93	---	15000	9.000	N	ON	10.2	28.44	63.37
0.205969	---	20.65	15000	9.000	N	ON	10.2	32.71	53.37
0.642525	33.99	---	15000	9.000	N	ON	10.1	22.01	56.00
0.642525	---	24.19	15000	9.000	N	ON	10.1	21.81	46.00
1.500713	24.72	---	15000	9.000	N	ON	9.9	31.28	56.00
1.500713	---	15.66	15000	9.000	N	ON	9.9	30.34	46.00
2.649938	---	15.24	15000	9.000	L1	ON	9.8	30.76	46.00
2.649938	24.06	---	15000	9.000	L1	ON	9.8	31.94	56.00
6.384919	---	14.37	15000	9.000	L1	ON	9.7	35.63	50.00
6.384919	21.79	---	15000	9.000	L1	ON	9.7	38.21	60.00

L1 and N is all have tested, the result of them is synthesized in the above data diagram.

Emission level(quasi-peak or Average peak) (dB μ V) = Raw value by receiver(dB μ V) + Corr (Insertion loss+ cable loss) (dB)

The raw value is used to calculate by software which is not shown in the sheet.

Margin (dB) =limit value (dB μ V) – emission level (dB μ V).


Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

7.5. Occupied bandwidth

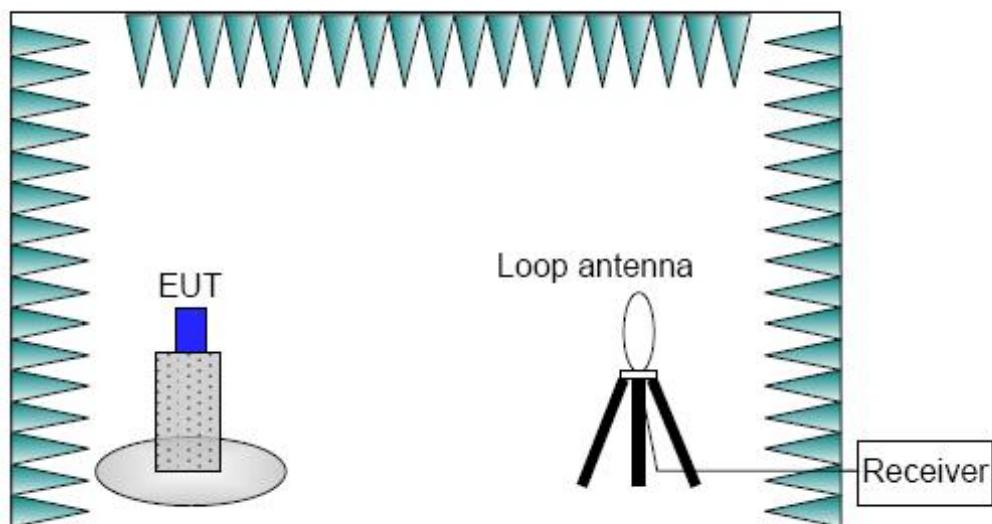
Specifications:	2.1049 / RSS-Gen 6.7
DUT Serial Number:	S25CC0873
Date of Tests	2025-04-03
Test conditions:	Ambient Temperature:23.5°C Relative Humidity:36.5% Air pressure: 101.8kPa
Operation Mode	Mode 1: TX mode+ AE3+ AE4+ AE5
Test Results:	Pass

EUT Setup:



Mode 1

EUT Connection Diagram of Test System



Test Method:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

power of the fundamental transmitted emission is contained.

The following conditions shall be observed for measuring the occupied bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x Db bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x Db bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement. The EUT was placed on the axis of X, Y and Z respectively for testing. Only the worst direction data is represented in the report.

Uncertainty Measurement:

The measurement uncertainty is 92.1kHz (k=2)

Test Result

Center Freq. (MHz)	f _L (MHz)	f _H (MHz)	OBW (Hz)
13.559933	13.559596	13.560202	605.769

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

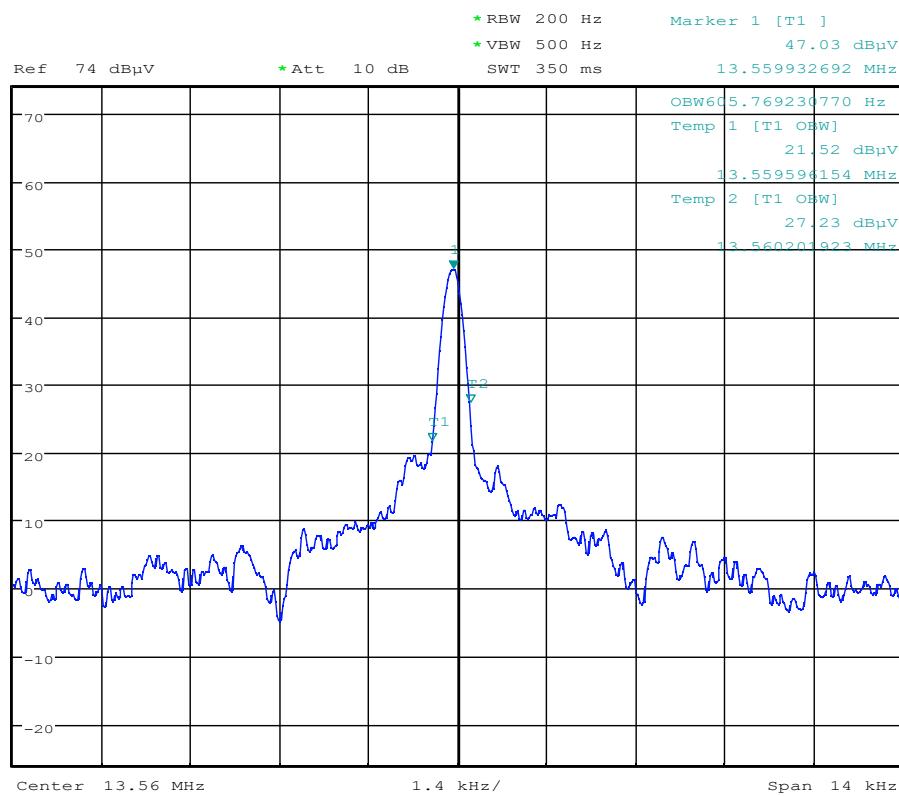


Figure 7.5.1 Mode 1 Occupied bandwidth

Annex A EUT Photos

See the document "25B02W000005-External Photos".

See the document "25B02W000005-Internal Photos".

Test photo See the document "25B02W000005_NFC Test Setup Photos".

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336

Tel: 0086-23-88069965

FAX: 0086-23-88608777

Annex B Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

END OF REPORT

Chongqing Academy of Information and Communications Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777