

Appendix A. Test Setup Photos

The equipment under test was placed on a desk inside of shield room. The isotropic field probe was used to measure the field strength for 6 EUT surfaces, RF exposure evaluation at 5 cm surrounding the device and 5cm away from the surface, the separation distance is maintained between EUT and the center of the field probe. (The Probe to shell is 8 mm)




Front at 5 cm separation distance



Back at 5 cm separation distance



Left Side at 5 cm separation distance

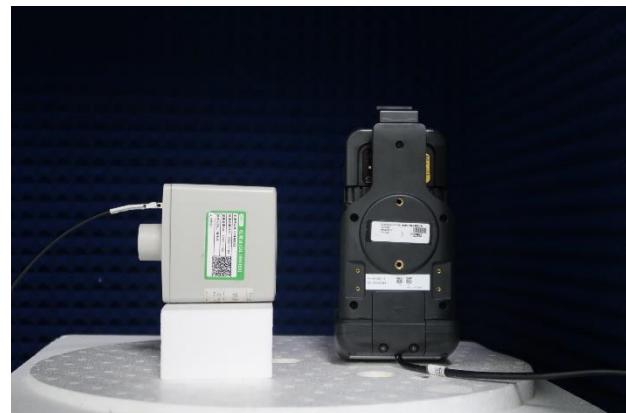

Right Side at 5 cm separation distance



Top Side at 5 cm separation distance



Bottom Side at 5 cm separation distance