



*Full*

# TEST REPORT

**No. I18D00022-SRD02**

*For*

**Client : Datalogic S.r.l.**

**Production : Smartphone**

**Model Name : MEMOR 10**

**FCC ID : U4GDL35US**

**IC ID: 3862E-DL35US**

**Hardware Version: V00 (US)**

**Software Version: 0.02.06D.20180716-userdebug-customer1**

**Issued date: 2018-11-14**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)



## RF Test Report

Report No.: I18D00022-SRD02

### Revision Version

Report Number	Revision	Date	Memo
I18D00022-SRD02	00	2018-10-22	Initial creation of test report
I18D00022-SRD02	01	2018-11-14	Second creation of test report

## CONTENTS

1. TEST LABORATORY.....	5
1.1. TESTING LOCATION.....	5
1.2. TESTING ENVIRONMENT.....	5
1.3. PROJECT DATA .....	5
1.4. SIGNATURE .....	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	7
4. REFERENCE DOCUMENTS .....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. SUMMARY OF TEST RESULTS.....	9
5.1. NOTES.....	10
5.2. STATEMENTS .....	10
6. TEST RESULT.....	11
6.1. PEAK OUTPUT POWER-CONDUCTED .....	11
6.2. PEAK POWER SPECTRAL DENSITY .....	13
6.3. 6DB BANDWIDTH.....	15
6.4. FREQUENCY BAND EDGES-CONDUCTED.....	18
6.5. CONDUCTED EMISSION .....	20
6.6. RADIATED EMISSION.....	25
6.7. AC POWERLINE CONDUCTED EMISSION.....	34



6.8. 99% BANDWIDTH.....	36
7. TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS .....	39
8. TEST ENVIRONMENT .....	40
9. MEASUREMENT UNCERTAINTY .....	41
ANNEX A. DEVIATIONS FROM PRESCRIBED TEST METHODS .....	42
ANNEX B. ACCREDITATION CERTIFICATE.....	43

## 1. Test Laboratory

### 1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
FCC registration No	958356

### 1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-30/+50°C
Relative Humidity:	20-75%


### 1.3. Project data

Project Leader:	Yu Anlu
Testing Start Date:	2018-07-12
Testing End Date:	2018-10-22


### 1.4. Signature



Yang Dejun  
(Prepared this test report)



Shi Hongqi  
(Reviewed this test report)



Zheng Zhongbin  
(Approved this test report)

## 2. Client Information

### 2.1. Applicant Information

Company Name: Datalogic S.r.l.  
Address: Via San Vitalino no. 13, Calderara di Reno – 40012 (BO) - Italy  
Telephone: +39 051 314 72 16  
Postcode: /

### 2.2. Manufacturer Information

Company Name: Datalogic S.r.l.  
Address: Via San Vitalino no. 13, Calderara di Reno – 40012 (BO) - Italy  
Telephone: +39 051 314 72 16  
Postcode: /

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

EUT Description	Smartphone
Model name	MEMOR 10
BLE Frequency	2402MHz-2480MHz
BLE Channel	Channel0-Channel39
BLE Modulation	GFSK;
GSM Frequency Band	GSM850/GSM900/GSM1800/GSM1900
UMTS Frequency Band	Band I /Band II /Band IV /Band V /Band VIII
CDMA Frequency Band	BC0/BC1
LTE Frequency Band	LTE 2/4/5/7/12/13/17/25/26
Additional Communication Function	BT4.2,BLE; WiFi 802.11a,b,g,n,ac;NFC, GPS; GLONASS; WLC, Beidou.
Extreme Temperature	-30/+50°C
Nominal Voltage	3.8V
Extreme High Voltage	4.35V
Extreme Low Voltage	3.6V

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	Model Name	SN or IMEI	HW Version	SW Version	Date of receipt
N15	MEMOR 10	35973709020 3499	V00 (US)	0.02.06D.20180 716-userdebug-customer1	2018-07-04
N16	MEMOR 10	35973709020 4109	V00 (US)	0.02.06D.20180 716-userdebug-customer1	2018-07-04

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

\*AE ID: is used to identify the test sample in the lab internally.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2017/10/1
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
RSS-247	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2017/2
RSS-Gen	General Requirements for Compliance of Radio Apparatus	2018/4

## 5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(b)	RSS-247 5.4	P
Peak Power Spectral Density	15.247(e)	RSS-247 5.2	P
6dB Occupied Bandwidth	15.247(a)	RSS-247 5.2	P
Band Edges Compliance	15.247(d)	RSS-247 5.5	P
Transmitter Spurious Emission-Conducted	15.247	RSS-247 5.5	P
Transmitter Spurious Emission-Radiated	15.247	RSS-247 5.5	P
AC Powerline Conducted Emission	15.107,15.207	RSS-247 Gen 3.2	P

Please refer to part 5 for detail.

The measurements are according to ANSI C63.10.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

T <sub>nom</sub>	Normal Temperature
T <sub>min</sub>	Low Temperature
T <sub>max</sub>	High Temperature
V <sub>nom</sub>	Normal Voltage
V <sub>min</sub>	Low Voltage
V <sub>max</sub>	High Voltage
H <sub>nom</sub>	Norm Humidity
A <sub>nom</sub>	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T <sub>nom</sub>	25°C
Voltage	V <sub>nom</sub>	3.8
Humidity	H <sub>nom</sub>	48%
Air Pressure	A <sub>nom</sub>	1010hPa

**Note:**

- a. All the test data for each data were verified, but only the worst case was reported.
- b. The GFSK was set in DH1.
- c. The DC and low frequency voltages' measurement uncertainty is ±2%.

## 5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

## 5.2. Statements

The MEMOR 10, supporting  
GSM/GPRS/EDGE/WCDMA/LTE/CDMA/BT/BLE/NFC/WLAN, manufactured by Datalogic S.r.l., which is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

## 6. Test result

### 6.1. Peak Output Power-Conducted

#### 6.1.1 Measurement Limit

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

#### 6.1.2 Test Condition:

DTS procedure	RBW	VBW	Span	Sweptime
BT-LE	3MHz	10MHz	9MHz	Auto

#### 6.1.3 Test procedure

The measurement is according to ANSI C63.10 clause 11.9.1

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq$  [3  $\times$  RBW].
- c) Set span  $\geq$  [3  $\times$  RBW].
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


#### 6.1.4 Measurement Results:

##### For GFSK

Channel	Ch0 2402 MHz	Ch19 2440 MHz	CH39 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	2.014	1.289	0.381	P
	Fig.1	Fig.2	Fig.3	


**Conclusion: PASS**

**Test graphs an below**

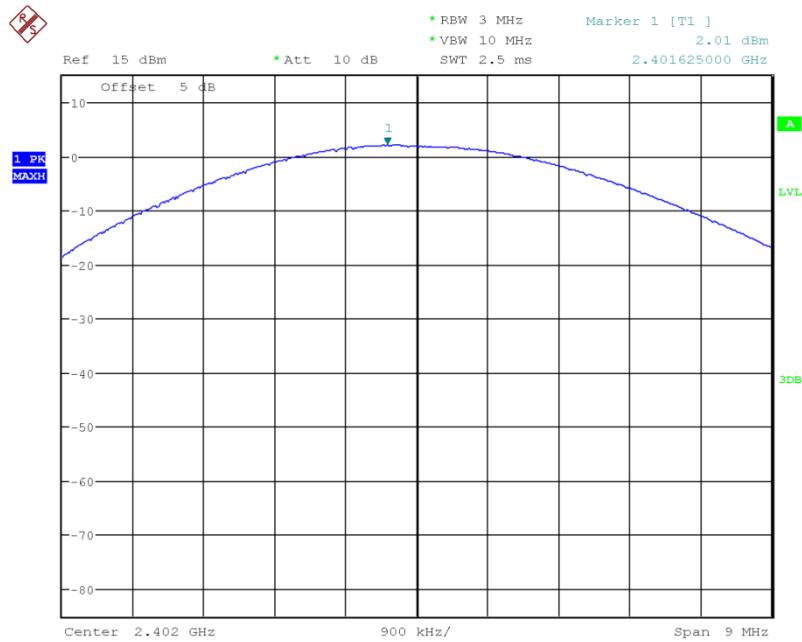


Date: 20.OCT.2018 05:40:08

Fig.1 Peak Conducted Output Power CH0, DH1

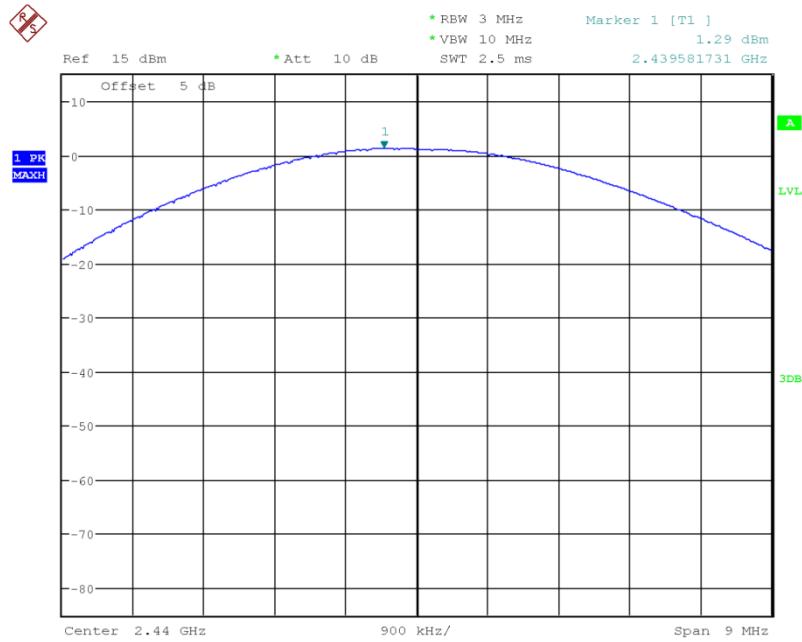

Date: 20.OCT.2018 05:40:26

Fig.2 Peak Conducted Output Power CH19, DH1

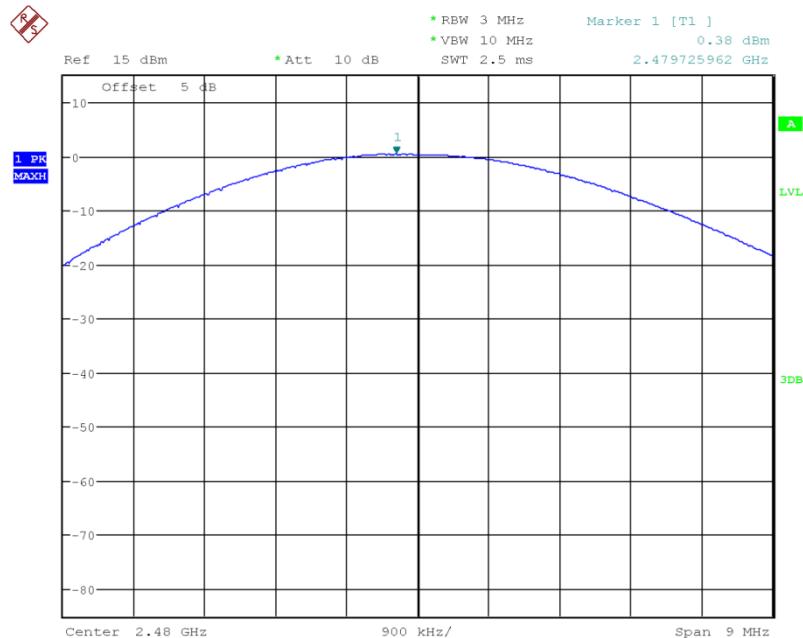

Date: 20.OCT.2018 05:40:46

Fig.3 Peak Conducted Output Power CH39, DH

## 6.2. Peak Power Spectral Density

### 6.2.1 Measurement Limit:

Standard	Limit
FCC CFR Part 15.247(e)	< 8dBm/3 KHz

### 6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.10.


1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.

12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 6.2.3 Measurement Results:

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
BT-LE	0	Fig.4	-14.586	P
	19	Fig.5	-15.125	P
	39	Fig.6	-15.997	P

Test figure as below:

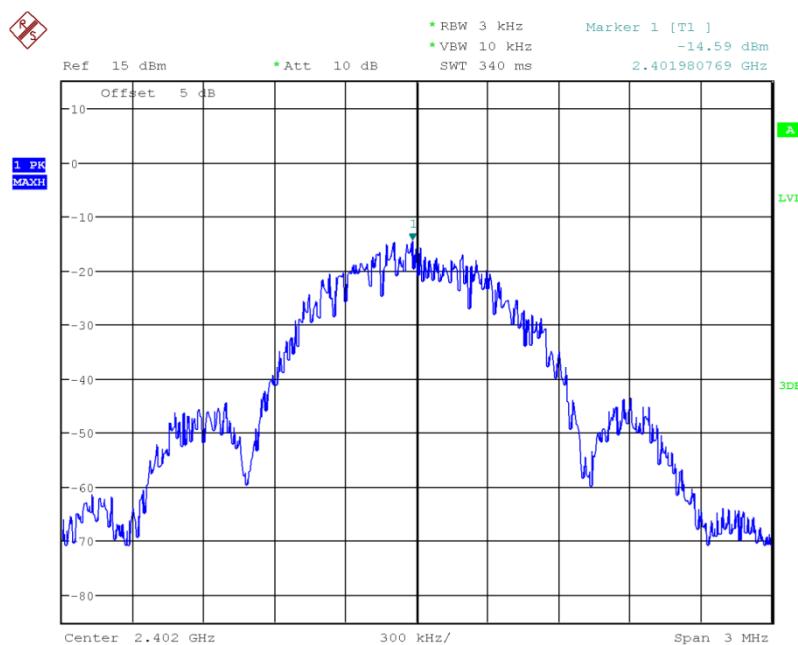

Date: 20.OCT.2018 09:32:21

Fig.4 Power spectral density: CH0

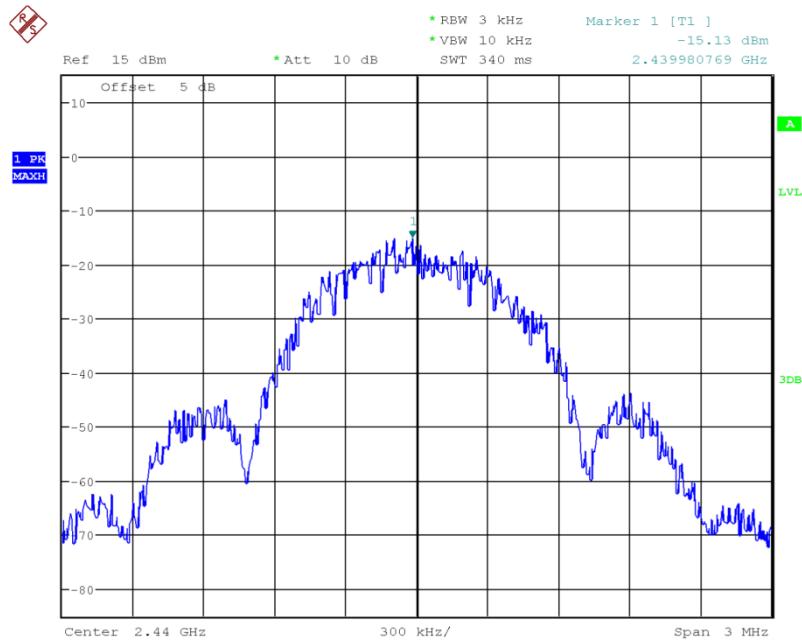


Fig.5 Power spectral density: CH19

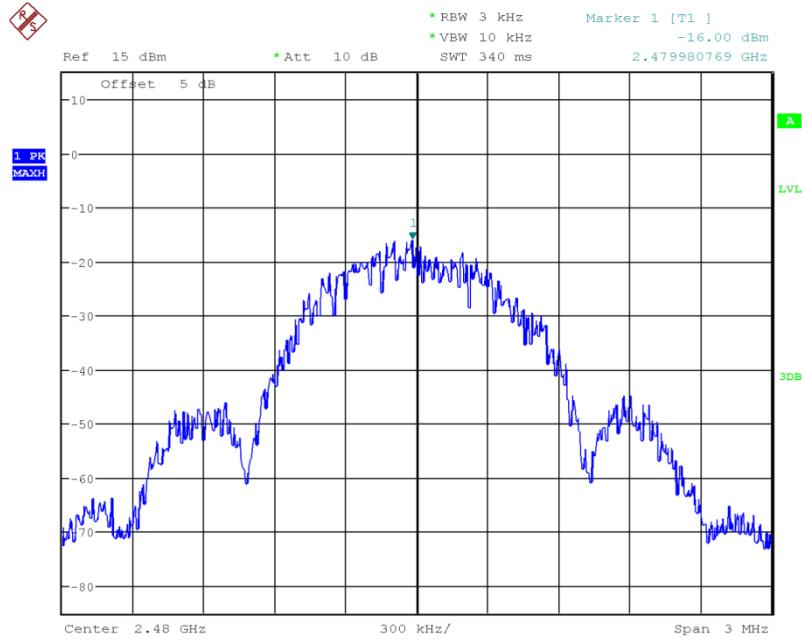


Fig.6 Power spectral density: CH39

### 6.3. 6dB Bandwidth

#### 6.3.1 Measurement Limit:



Standard	Limit
FCC 47 CFR Part 15.247 (a) (1)	$\geq 500k$

**6.3.2 Test procedures**


The measurement is according to ANSI C63.10 clause 11.8.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Result:****For GFSK**


Channel	6dB Bandwidth (KHz)		Conclusion
0	Fig.7	707	P
19	Fig.8	707	P
39	Fig.9	712	P

**Conclusion: PASS****Test graphs as below:**

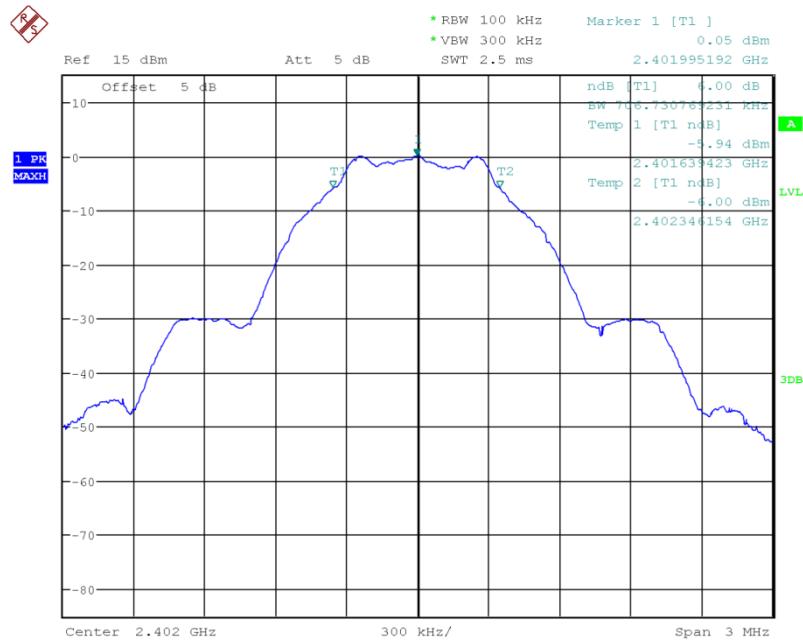


Date: 20.OCT.2018 09:38:53

Fig.7 6dB Bandwidth: Ch0

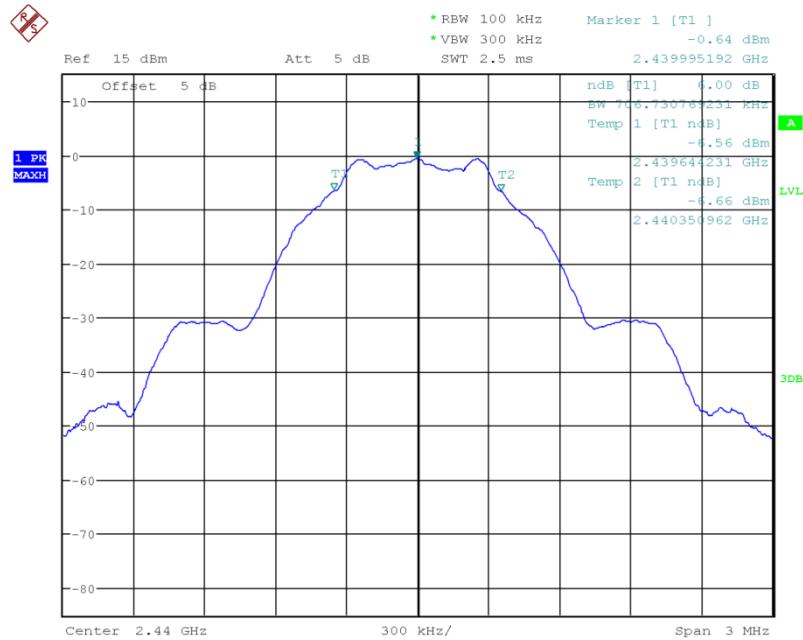

Date: 20.OCT.2018 09:40:06

Fig.8 6dB Bandwidth: Ch19

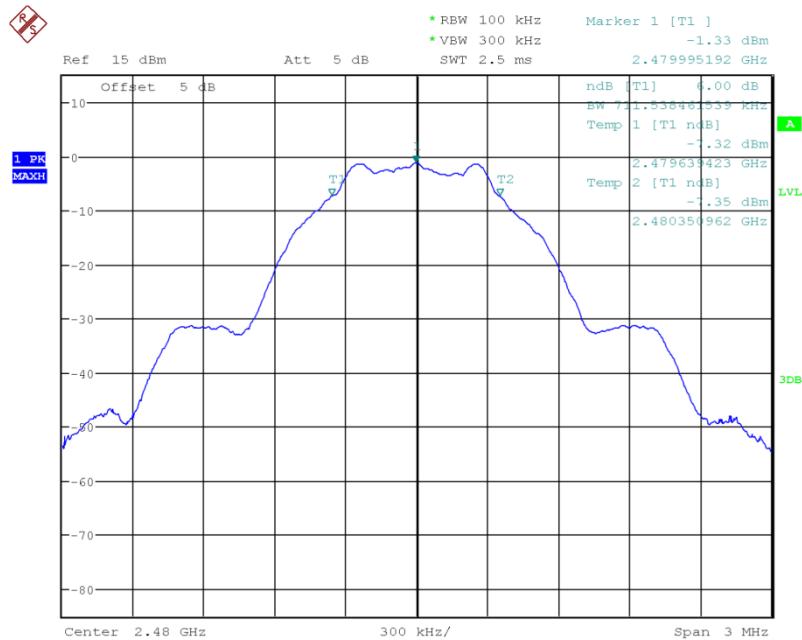

Date: 20.OCT.2018 09:40:30

Fig.9 6dB Bandwidth: Ch39

## 6.4. Frequency Band Edges-Conducted

### 6.4.1 Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20


### 6.4.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.13.2

- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) Resolution bandwidth: 100 kHz.
- 6) Video bandwidth: 300 kHz.
- 7) Detector: Peak.
- 8) Trace: Max hold..


**6.4.3 Measurement results**
**For GFSK**

Channel	Band Edge Power (dBc)	Conclusion
0	Fig.10	P
39	Fig.11	P

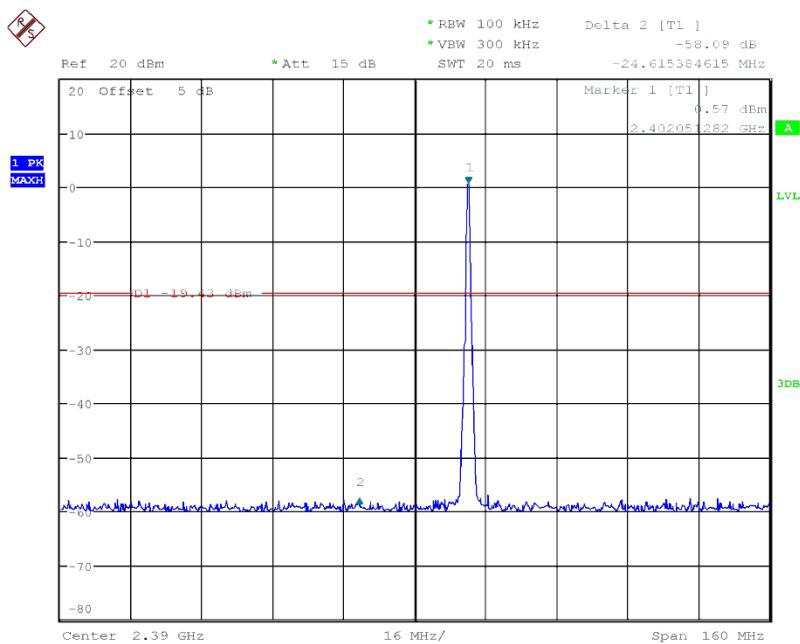**Conclusion: PASS**
**Test graphs an below**


Date: 22.OCT.2018 04:10:39

**Fig.10 Frequency Band Edge: GFSK, Ch0, Hopping OFF**

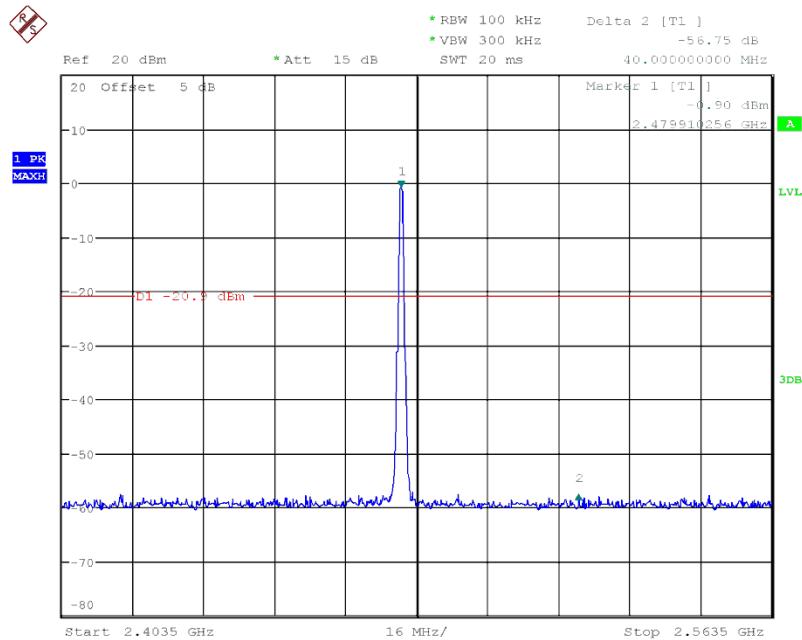

Date: 22.OCT.2018 04:15:43

Fig.11 Frequency Band Edge: GFSK, Ch39, Hopping OFF

## 6.5. Conducted Emission

### 6.5.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part15.247 (d)	20dB below peak output power in 100KHz bandwidth

### 6.5.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Reference level measurement
4. Set instrument center frequency to DTS channel center frequency.
5. Set the span to  $\geq 1.5$  times the DTS bandwidth.
6. Set the RBW = 100 kHz.
7. Set the VBW  $\geq [3 \times \text{RBW}]$ .
8. Set the detector = peak.
9. Set the sweep time = auto couple.
10. Set the trace mode = max hold.
11. Allow trace to fully stabilize.
12. Use the peak marker function to determine the maximum PSD level.

Emission level measurement


12. Set the center frequency and span to encompass frequency range to be measured.
13. Set the RBW = 100 kHz.
14. Set the VBW  $\geq [3 \times \text{RBW}]$ .
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

#### 6.5.3 Measurement Results:

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	Center Freq.	Fig.12	P
	30MHz~26.5GHz	Fig.13	P
Ch19 2440MHz	Center Freq.	Fig.14	P
	30MHz~26.5GHz	Fig.15	P
Ch39 2480MHz	Center Freq.	Fig.16	P
	30MHz~26.5GHz	Fig.17	P


**Conclusion: PASS**

**Test graphs as below**

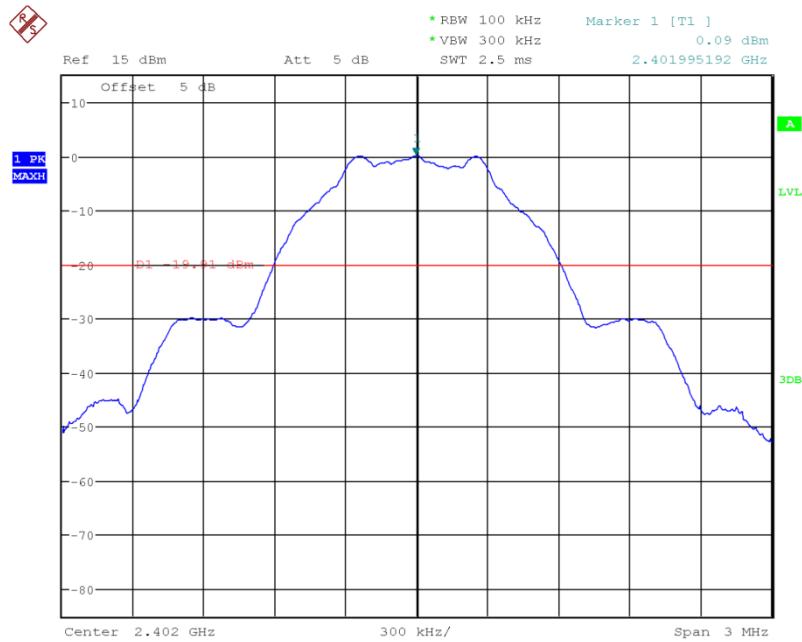


Date: 20.OCT.2018 09:34:36

Fig.12 Conducted spurious emission: Ch0, 2402MHz

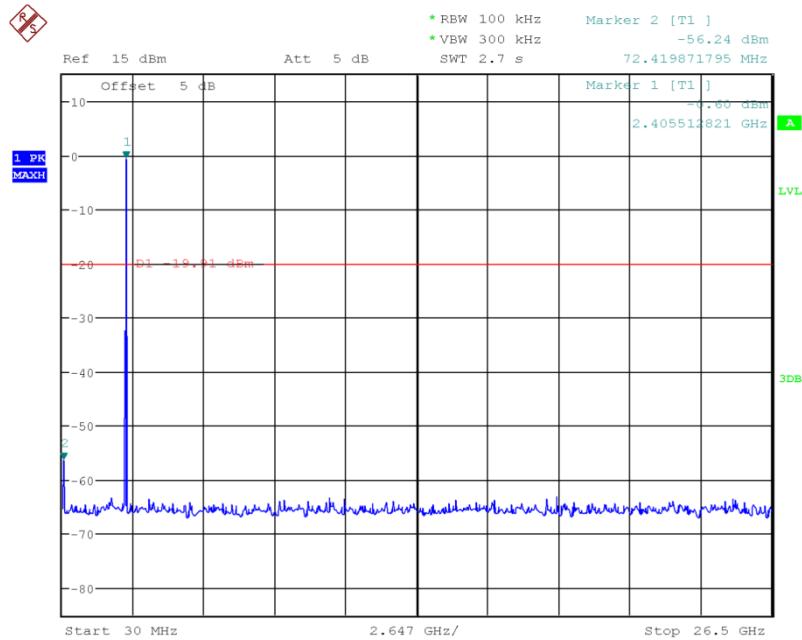


Date: 20.OCT.2018 09:35:00

Fig.13 Conducted spurious emission: Ch0, 30MHz~26GHz

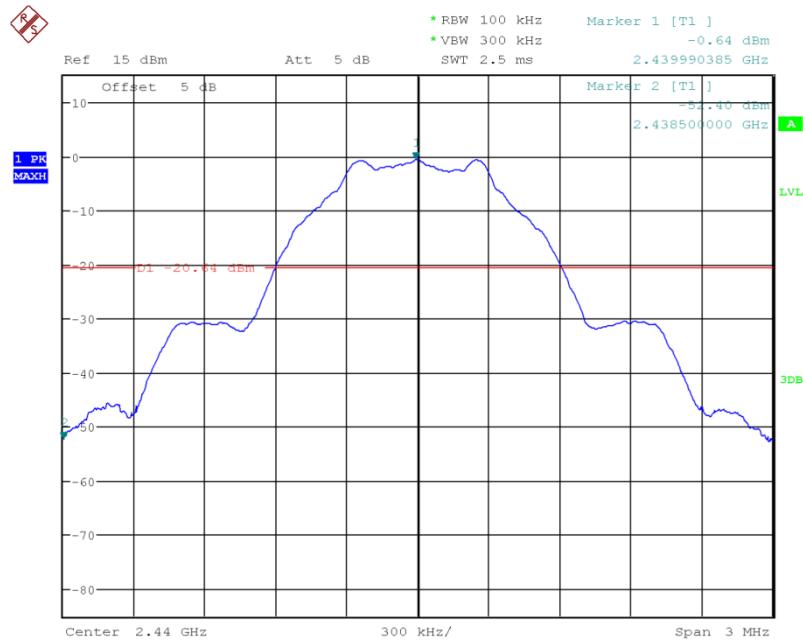


Date: 20.OCT.2018 09:35:33

Fig.14 Conducted spurious emission: Ch19, 2440MHz

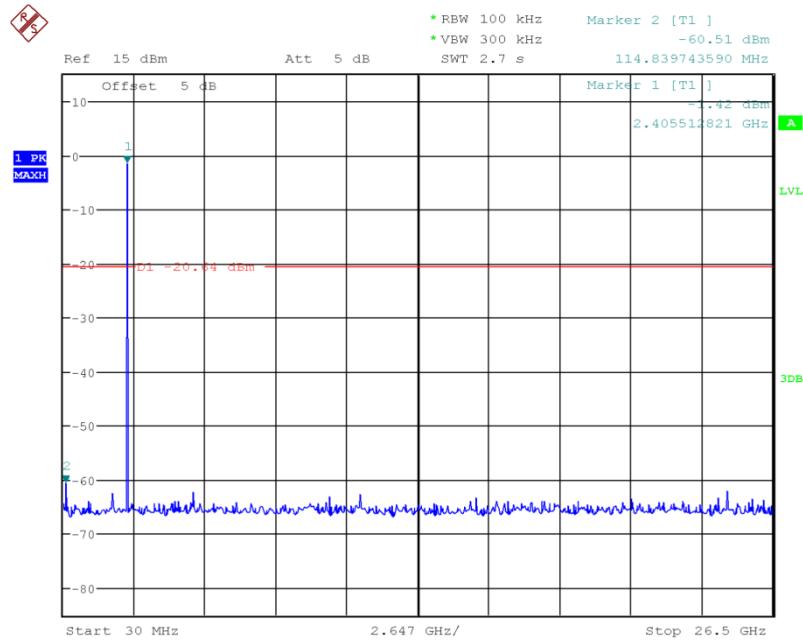


Date: 20.OCT.2018 09:35:56

Fig.15 Conducted spurious emission: Ch19, 30MHz~26GHz

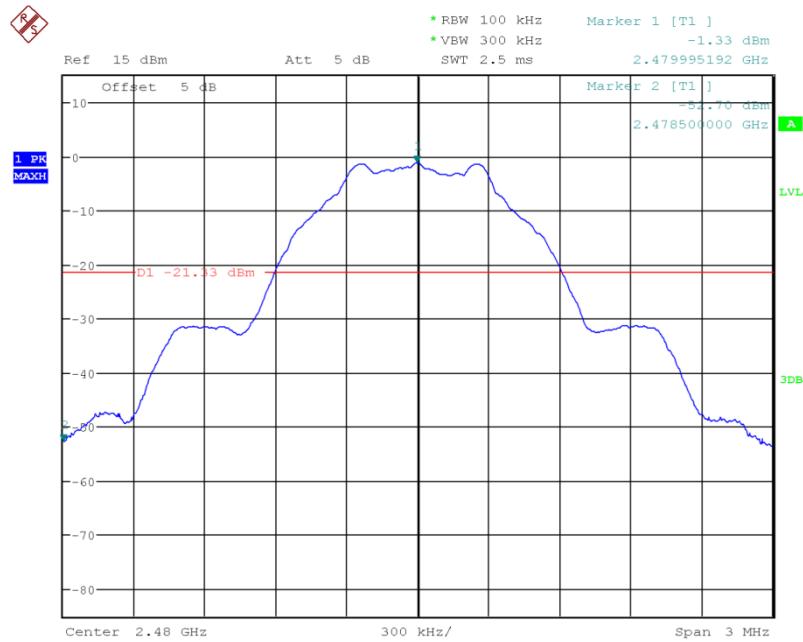

Date: 20.OCT.2018 09:36:25

Fig.16 Conducted spurious emission: Ch39, 2480MHz

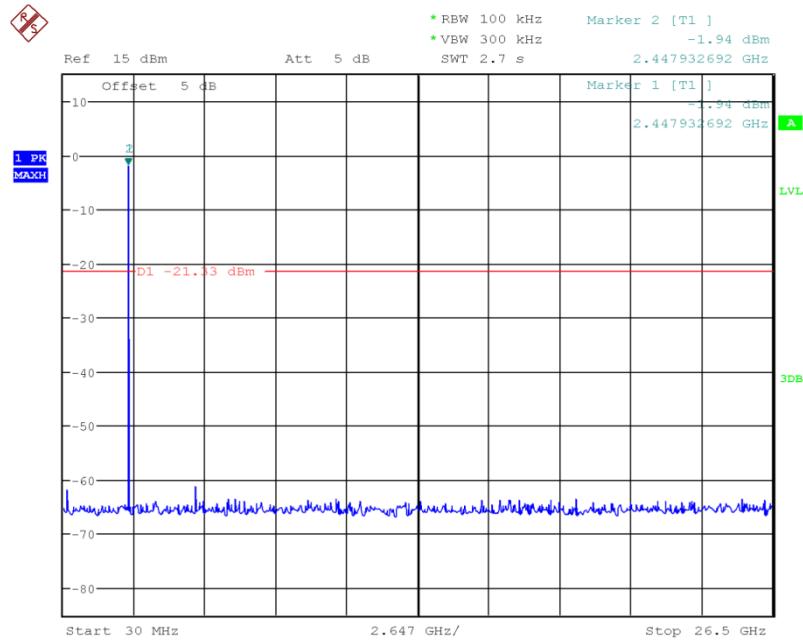

Date: 20.OCT.2018 09:36:48

Fig.17 Conducted spurious emission: Ch39, 30MHz~26GHz

## 6.6. Radiated Emission

### 6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)).

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

### 6.6.2 Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15



## RF Test Report

Report No.: I18D00022-SRD02

4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

### 6.6.3 Measurement Results:

A “reference path loss” is established and  $A_{Rpi}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$A_{Rpi}$  = Cable loss + Antenna Gain-Preamplifier gain

Result =  $P_{Mea}$  +  $A_{Rpi}$

Channel	Frequency Range	Test Results	Conclusion
Ch0 2402MHz	30MHz~1GHz	Fig.18	P
	1GHz~3GHz	Fig.19	P
	3GHz~18GHz	Fig.20	P

Channel	Frequency Range	Test Results	Conclusion
Ch39 2480MHz	30MHz~1GHz	Fig.21	P
	1GHz~3GHz	Fig.22	P
	3GHz~18GHz	Fig.23	P

#### Ch0 30MHz-1GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity
34.4	12.12	-22	34.12	V
35.4	13.05	-21.8	34.85	V
36.6	13.99	-21.5	35.49	V
45.4	11.43	-20.2	31.63	H
156.7	5.15	-27.3	32.45	H
790.8	21.21	-11	32.21	H

#### Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity



## RF Test Report

Report No.: I18D00022-SRD02

2626.7	54.12	7.5	46.62	V
2680.4	54.01	7.8	46.21	H
2739.6	56.58	7.7	48.88	V
2879.6	55.47	8.7	46.77	V
2923.7	55.33	8.8	46.53	H
2971.0	55.15	8.8	46.35	V

### Ch0 1GHz-3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2626.7	41.92	7.5	34.42	V
2680.4	42.24	7.8	34.44	H
2739.6	42.29	7.7	34.59	V
2879.6	43.12	8.7	34.42	V
2923.7	43.29	8.8	34.49	H
2971.0	43.17	8.8	34.37	V

### Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
15402.2	56.29	22.8	33.49	H
15716.3	57.07	23.2	33.87	V
16014.7	59.05	25.3	33.75	V
16297.8	58.58	25.8	32.78	H
16864.8	59.7	27.4	32.3	V
17187.4	60.69	27.3	33.39	V

### Ch0 3GHz-18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
15402.2	43.95	22.8	21.15	H
15716.3	44.87	23.2	21.67	V

**RF Test Report**

Report No.: I18D00022-SRD02

16014.7	47.07	25.3	21.77	V
16297.8	46.77	25.8	20.97	H
16864.8	48.14	27.4	20.74	V
17187.4	48.16	27.3	20.86	V

**Ch39 30MHz-1GHz (Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.2	12.22	-22	34.22	V
34.8	12.67	-21.9	34.57	V
36.3	12.12	-21.6	33.72	V
44.3	11.58	-20.3	31.88	V
220.9	14.08	-24	38.08	V
801.6	21.21	-11	32.21	V

**Ch39 1GHz-3GHz (Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2594.9	53.7	7.3	46.4	H
2656.9	54.25	7.7	46.55	H
2717.7	53.78	7.8	45.98	V
2782.5	54.36	7.8	46.56	V
2887.6	55.15	8.7	46.45	V
2965.6	55.25	8.8	46.45	V

**Ch39 1GHz-3GHz (Average)**


Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2656.9	42.31	7.7	34.61	H
2782.5	42.27	7.8	34.47	V
2887.6	43.15	8.7	34.45	V
2965.6	43.09	8.8	34.29	V


**Ch39 3GHz-18GHz (Peak)**

Frequency(MHz)	Result(dBuV/m)	ARPl (dB)	PMea(dBuV/m)	Polarity
13773.9	54.12	18.3	35.82	V
14304.1	55.49	20.8	34.69	H
15099.6	55.47	21.3	34.17	H
15733.7	57.14	23.2	33.94	H
16072.2	58.92	25	33.92	H
16801.6	59.84	27.2	32.64	H

**Ch39 3GHz-18GHz (Average)**

Frequency(MHz)	Result(dBuV/m)	ARPl (dB)	PMea(dBuV/m)	Polarity
13773.9	42.17	18.3	23.87	V
14304.1	43.12	20.8	22.32	H
15099.6	42.83	21.3	21.53	H
15733.7	44.87	23.2	21.67	H
16072.2	46.63	25	21.63	H
16801.6	47.87	27.2	20.67	H

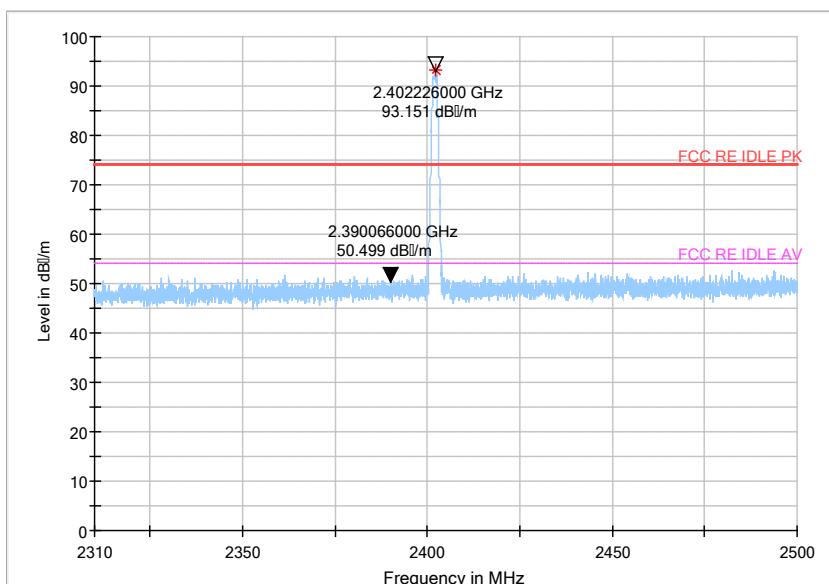**Note: Only the worst case is written in the report.**
**Conclusion: PASS**
**Test graphs as below:**

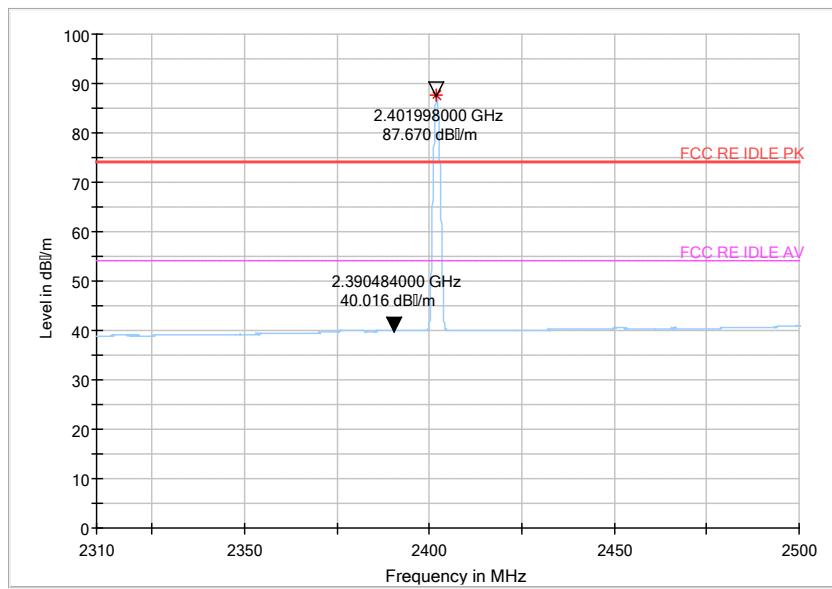


Bandedge: CH0

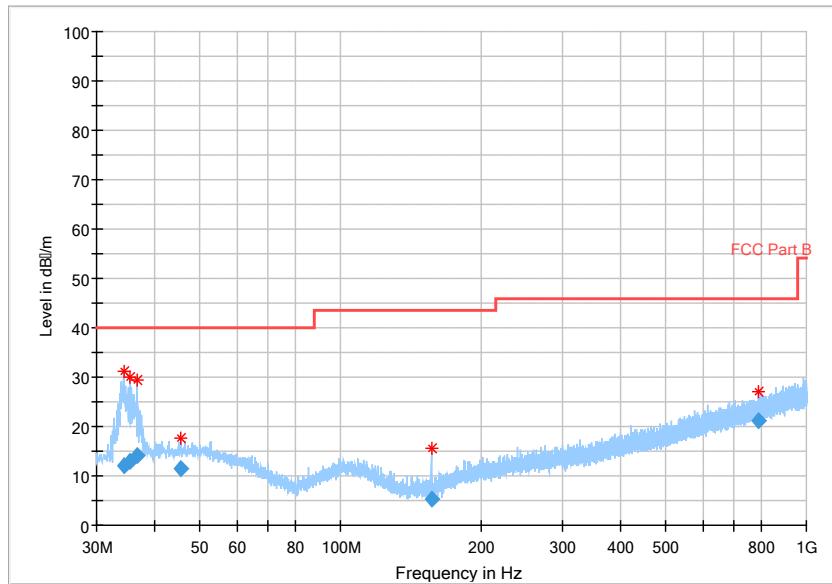


Fig.18 Radiated emission: CH0, 30MHz~1GHz

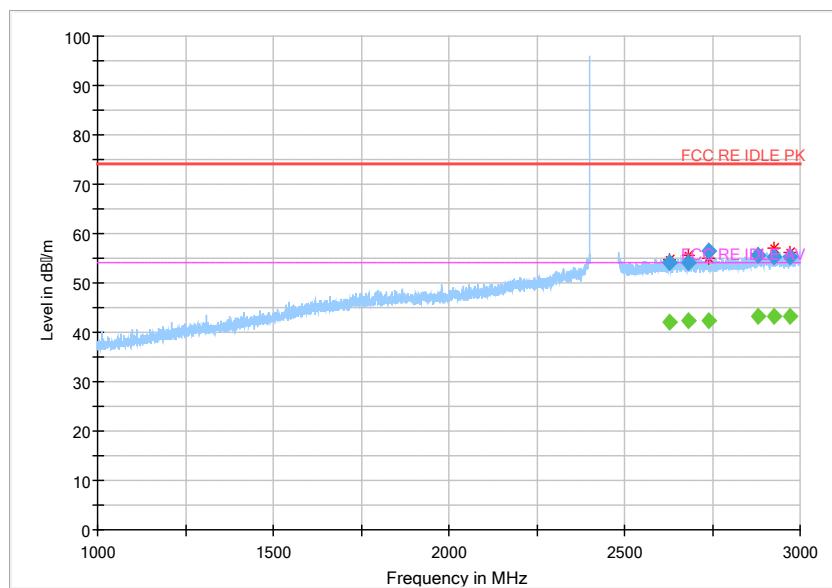


Fig.19 Radiated emission: CH0, 1GHz~3GHz



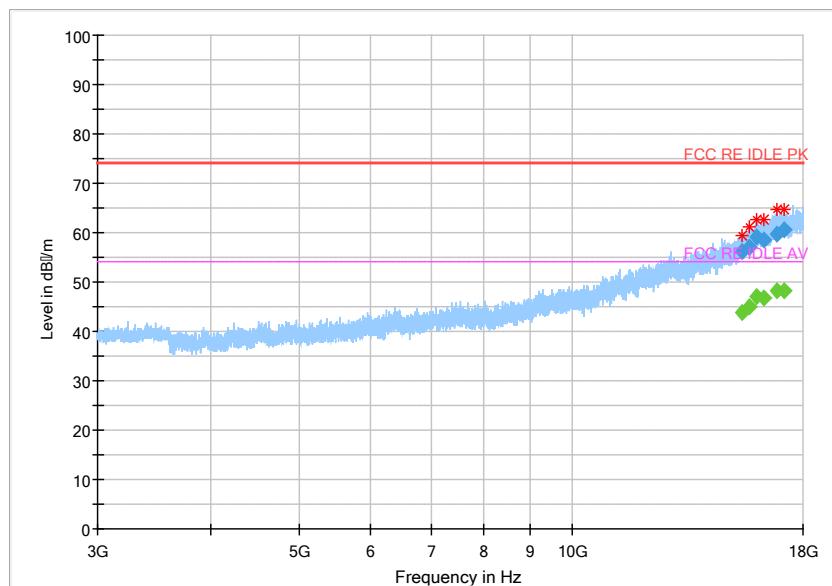


Fig.20 Radiated emission: CH0, 3GHz~18GHz

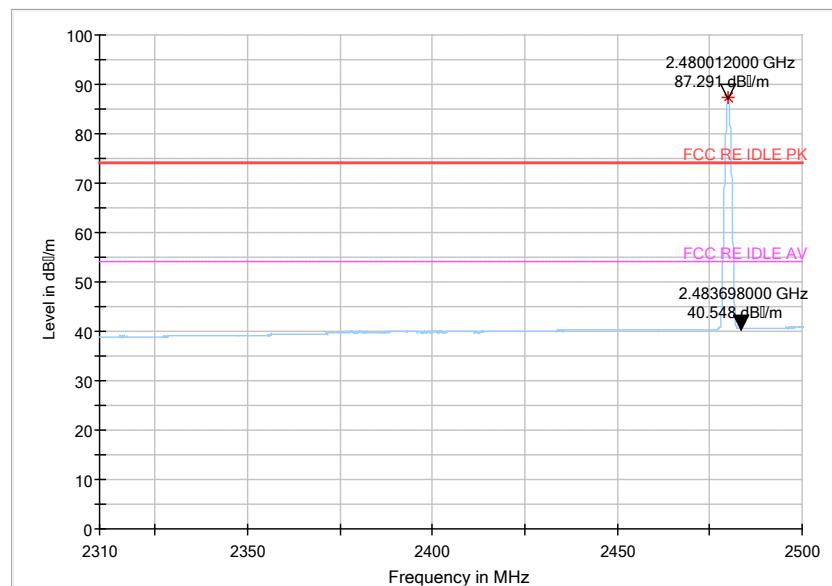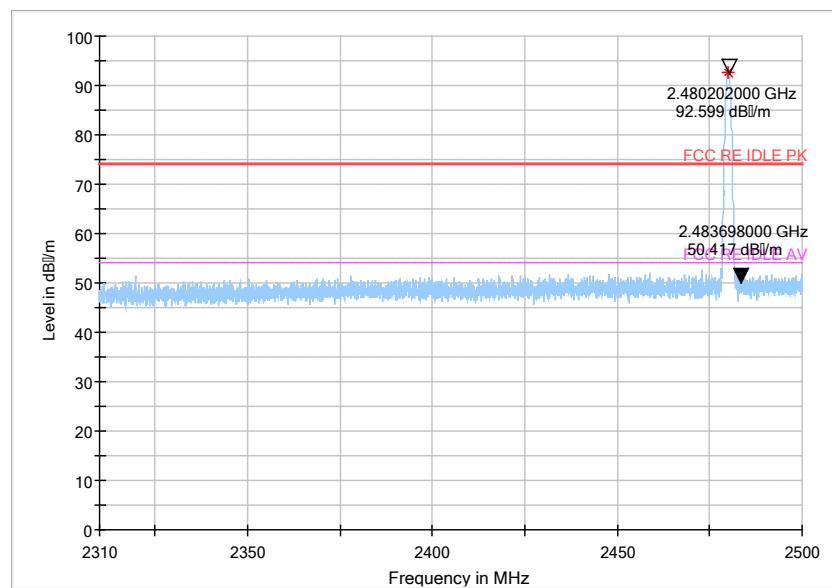

Bandedge:CH39

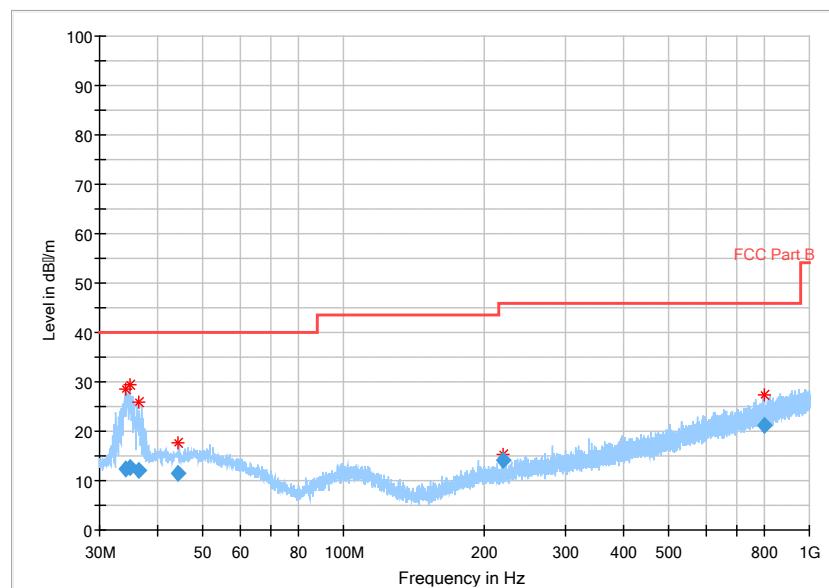


Fig.21 Radiated emission: CH39, 30MHz~1GHz

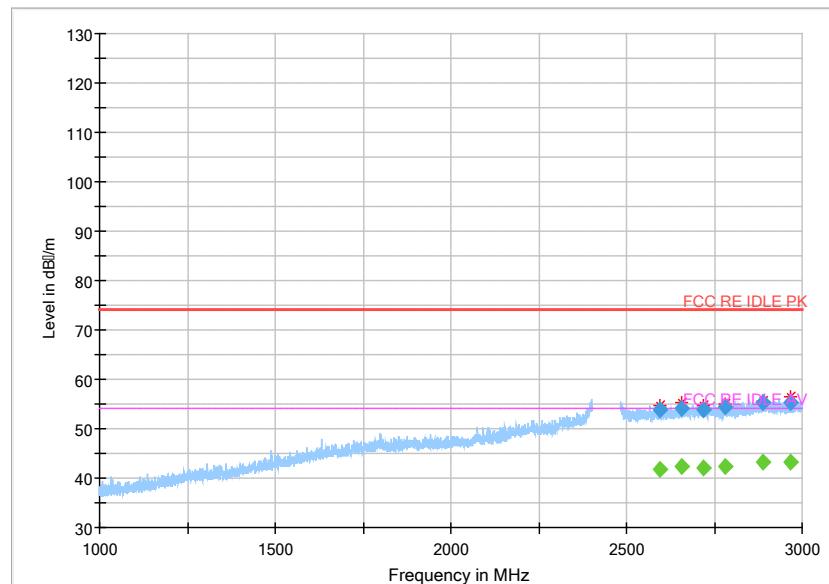


Fig.22 Radiated emission: CH39, 1GHz~3GHz


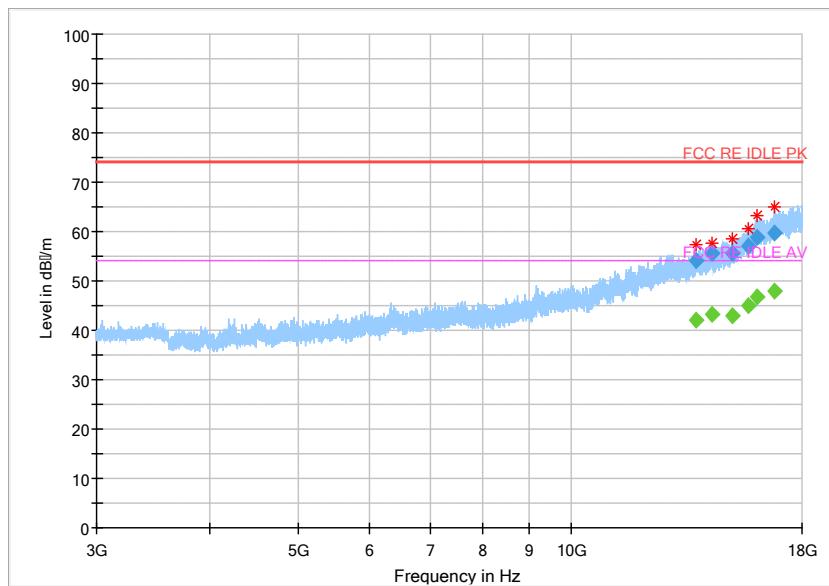


Fig.23 Radiated emission: CH39, 3GHz~18GHz

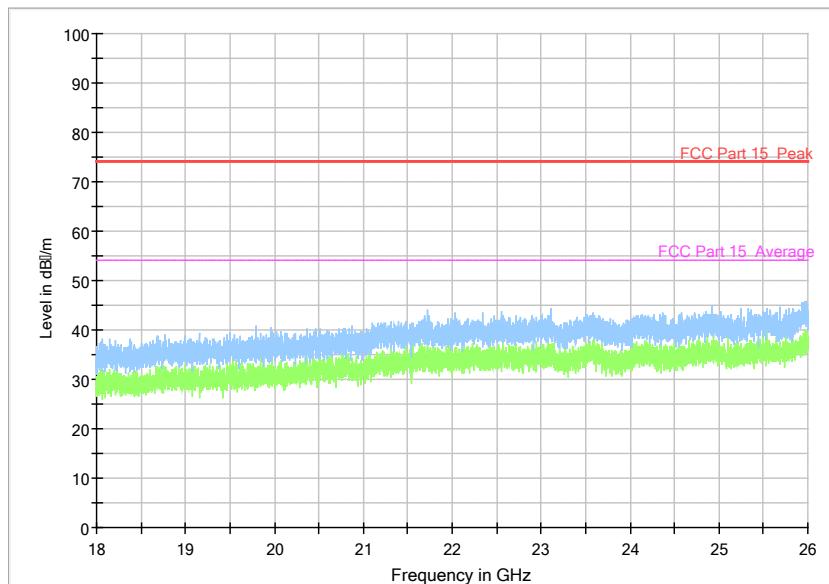

ALL Channel 18GHz~26GHz

## 6.7. AC Powerline Conducted Emission

### Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line

conducted emission measurements are performed.

3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.

4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

**Test Condition:**

Voltage (V)	Frequency (Hz)
120	60


**Measurement Result and limit:**

(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			With charger	
			BLE	
0.15 to 0.5	66 to 56	56 to 46	Fig.24	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**

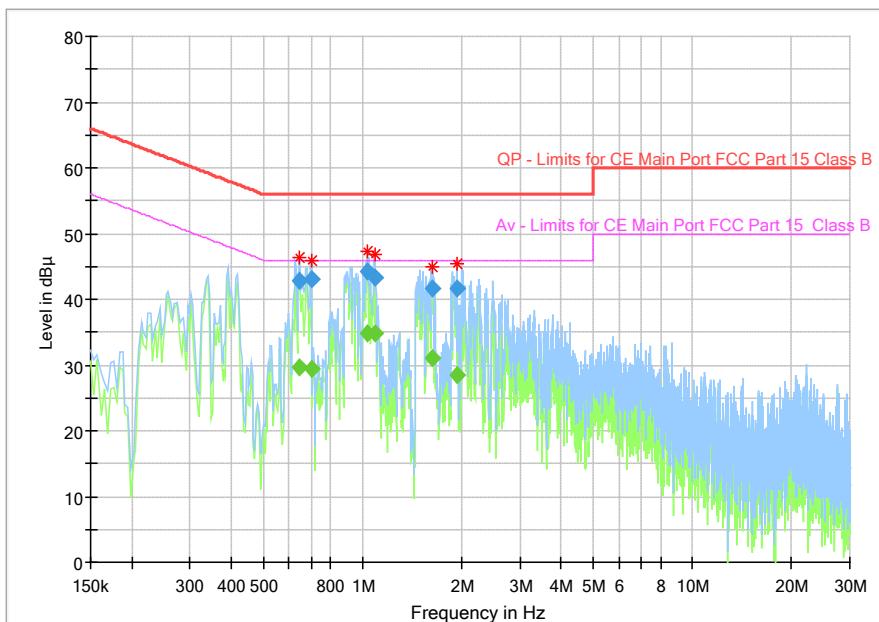
**Fig.24 AC Powerline Conducted Emission**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ )	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.646256	---	29.57	46.00	16.43	1000.0	9.000	N	ON	9.7
0.646256	42.90	---	56.00	13.10	1000.0	9.000	N	ON	9.7
0.698494	---	29.43	46.00	16.57	1000.0	9.000	N	ON	9.7
0.698494	43.08	---	56.00	12.92	1000.0	9.000	N	ON	9.7
1.038038	---	34.89	46.00	11.11	1000.0	9.000	L1	ON	9.7
1.038038	44.23	---	56.00	11.77	1000.0	9.000	L1	ON	9.7
1.090275	43.24	---	56.00	12.76	1000.0	9.000	L1	ON	9.7
1.090275	---	34.71	46.00	11.29	1000.0	9.000	L1	ON	9.7
1.635038	41.68	---	56.00	14.32	1000.0	9.000	L1	ON	9.7
1.635038	---	31.16	46.00	14.84	1000.0	9.000	L1	ON	9.7
1.926075	---	28.48	46.00	17.52	1000.0	9.000	N	ON	9.7
1.926075	41.70	---	56.00	14.30	1000.0	9.000	N	ON	9.7

## 6.8. 99% Bandwidth

### 6.8.1 Measurement Limit:

Standard	Limit
RSS-Gen	$\geq 500k$

### 6.8.2 Test procedures

The measurement is according to RSS-GEN clause 6.7

1. The EUT output RF connector was connected with a short cable to the spectrum

analyzer.

2. Enable EUT transmit in fixed channel as center frequency of spectrum analyzer.
3. Setting spectrum analyzer as below, RBW : ~1% of the span without going below 1%; VBW: 3RBW; SPAN: Lowest frequency separation that is used within the Hopping sequence; Detector mode: RMS; Trace mode: MAX Hold; Sweep time:1s
4. Use the 99 % bandwidth function of the spectrum analyzer to measure the Occupied Channel Bandwidth of the EUT.
5. This value shall be recorded.


### Measurement Result:

For GFSK

Channel	99% Bandwidth (MHz)		Conclusion
0	Fig.25	1.03	P
19	Fig.26	1.03	P
39	Fig.27	1.03	P


**Conclusion: PASS**

**Test graphs as below:**

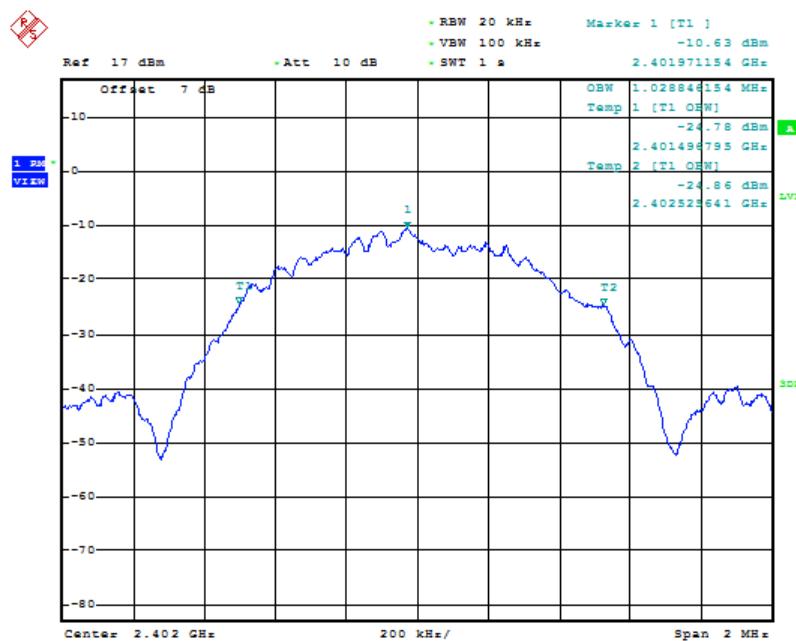


Date: 22.OCT.2018 13:23:06

Fig.25 99% Bandwidth: Ch0

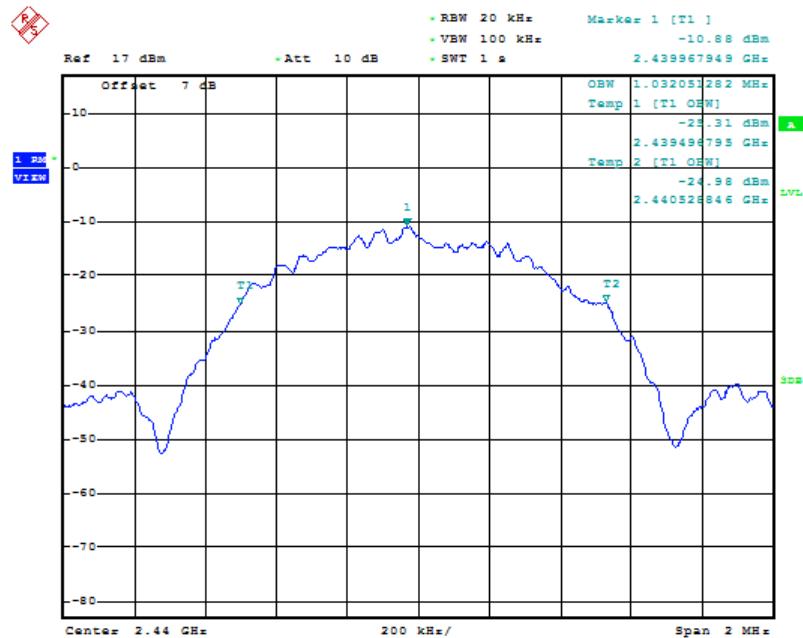

Date: 22.OCT.2018 13:23:45

Fig.26 99% Bandwidth: Ch19

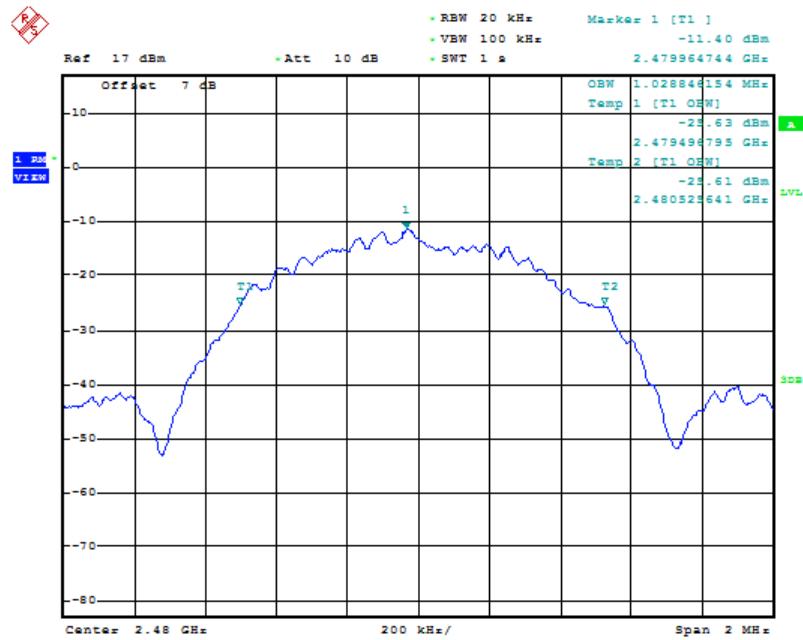

Date: 22.OCT.2018 13:24:18

Fig.27 99% Bandwidth: Ch39

## 7. Test Equipment and Ancillaries Used For Tests

The test equipment and ancillaries used are as follows.

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Vector Signal Analyzer	FSQ26	101096	Rohde&Schwarz	2018-05-11	1 Year
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2018-05-11	1 Year

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2018-05-11	1 Year
2	EMI Test Receiver	ESU40	100307	R&S	2018-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double-ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2018-05-11	1 Year

### Anechoic chamber

Fully anechoic chamber by Frankonia German.

## 8. Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

## 9. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents. The detailed measurement uncertainty to see the column, k=2

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Maximum Peak Output Power	30MHz-3600MHz	95%	±0.88db
EBW and VBW	30MHz-3600MHz	95%	±0.031MHz
Transmitter Spurious Emission-Conducted	9KHz-10000MHz	95%	±4.56db
Transmitter Spurious Emission-Conducted	10000 MHz -40000MHz	95%	±5.34db
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	±5.66db
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	±4.98db
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	±5.06db
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	±5.20db
AC Power line Conducted Emission	0.15MHz-30MHz	95%	±5.66 db
Peak Power Spectral Density	2000MHz-3600MHz	95%	±0.86db

**ANNEX A. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

**ANNEX B. Accreditation Certificate****Accredited Laboratory**

A2LA has accredited

**EAST CHINA INSTITUTE OF TELECOMMUNICATIONS**

Shanghai, People's Republic of China

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005  
General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates  
technical competence for a defined scope and the operation of a laboratory quality management system  
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 15<sup>th</sup> day of March 2017.

President and CEO  
For the Accreditation Council  
Certificate Number 3682.01  
Valid to February 28, 2019

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

**\*\*\*\*\*END OF REPORT\*\*\*\*\***