



TEST REPORT

No. I19D00091-SRD06

For

Client : Datalogic S.r.l.

Production : Smartphone

Model Name : MEMOR 10

Brand Name : Datalogic

FCC ID : U4GDL35US

Hardware Version : V00 (US)

Software Version : 2.00.05.20190726

Issued : 2019-08-06

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of East China Institute of Telecommunications.
3. KDB 971168 D01 has not been accredited by A2LA.
4. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

Test Laboratory:

East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: +86 21 63843300

FAX: +86 21 63843301

E-Mail: welcome@ecit.org.cn

Revision Version

| Report Number | Revision | Date | Memo |
|----------------------|-----------------|-------------|---------------------------------|
| I19D00091-SRD06 | 00 | 2019-08-06 | Initial creation of test report |

CONTENTS

| | |
|---|-----------|
| 1. TEST LABORATORY | 5 |
| 1.1. TESTING LOCATION | 5 |
| 1.2. TESTING ENVIRONMENT | 5 |
| 1.3. PROJECT DATA | 5 |
| 1.4. SIGNATURE | 5 |
| 2. CLIENT INFORMATION | 6 |
| 2.1. APPLICANT INFORMATION | 6 |
| 2.2. MANUFACTURER INFORMATION | 6 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 7 |
| 3.1. ABOUT EUT | 7 |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 7 |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST | 7 |
| 4. REFERENCE DOCUMENTS..... | 8 |
| 4.1. REFERENCE DOCUMENTS FOR TESTING | 8 |
| 5. TEST RESULTS..... | 9 |
| 5.1. SUMMARY OF TEST RESULTS..... | 9 |
| 5.2. STATEMENTS..... | 11 |
| 6. TEST EQUIPMENT UTILIZED | 12 |
| 7. TEST ENVIRONMENT | 14 |
| 8. MEASUREMENT UNCERTAINTY | 15 |
| ANNEX A. MEASUREMENT RESULTS..... | 16 |
| ANNEX A.1. OUTPUT POWER | 16 |
| ANNEX A.2. EMISSION LIMT | 21 |
| ANNEX B. ACCREDITATION CERTIFICATE..... | 24 |

1. Test Laboratory

1.1. Testing Location

| | |
|---------------------|--|
| Company Name: | ECIT Shanghai, East China Institute of Telecommunications |
| Address: | 7-8/F., Area G, No.668, Beijing East Road, Shanghai, China |
| Postal Code: | 200001 |
| Telephone: | (+86)-021-63843300 |
| Fax: | (+86)-021-63843301 |
| FCC registration No | 958356 |

1.2. Testing Environment

| | |
|---------------------|-----------|
| Normal Temperature: | 15°C-35°C |
| Relative Humidity: | 25%-75% |

1.3. Project data

| | |
|---------------------|------------|
| Project Leader: | Yu Anlu |
| Testing Start Date: | 2019-06-22 |
| Testing End Date: | 2019-06-24 |


1.4. Signature



Wang Liang
(Prepared this test report)



Fan Songyan
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Client Information

2.1. Applicant Information

| | |
|--------------|---|
| Company Name | Datalogic S.r.l. |
| Address | Via San Vitalino no. 13, Calderara di Reno – 40012 (BO) - Italy |
| Telephone | +39 051 314 72 16 |
| Postcode | / |

2.2. Manufacturer Information

| | |
|--------------|---|
| Company Name | Datalogic S.r.l. |
| Address | Via San Vitalino no. 13, Calderara di Reno – 40012 (BO) - Italy |
| Telephone | +39 051 314 72 16 |
| Postcode | / |

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|----------------------|--|
| Production | Smartphone |
| Model name | MEMOR 10 |
| GSM Frequency Band | GSM850/GSM900/GSM1800/GSM1900 |
| UMTS Frequency Band | Band I /Band II /Band IV/Band V /Band VIII |
| CDMA Frequency Band | BC0/BC1 |
| LTE Frequency Band | LTE2/4/5/7/12/13/17/25/26 |
| Extreme Temperature | -30/+50°C |
| Nominal Voltage | 3.8V |
| Extreme High Voltage | 4.35V |
| Extreme Low Voltage | 3.6V |

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

3.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version | Date of receipt |
|---------|-----------------|------------|------------------|-----------------|
| N01 | 359737090067954 | V00 (US) | 2.00.05.20190726 | 2019-06-18 |
| N03 | 359737090067947 | V00 (US) | 2.00.05.20190726 | 2019-06-18 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

| AE ID* | Description | SN |
|--------|-------------|-----|
| AE1 | RF cable | --- |

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|----------------|---|------------|
| FCC Part 2 | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS | 2018-10-01 |
| FCC Part 22 | PUBLIC MOBILE SERVICES | 2018-10-01 |
| FCC Part 24 | PERSONAL COMMUNICATIONS SERVICES | 2018-10-01 |
| FCC Part 27 | MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES | 2018-10-01 |
| FCC Part 90 | PRIVATE LAND MOBILE RADIO SERVICES | 2018-10-01 |
| ANSI/TIA-603-E | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards | 2016 |
| ANSI C63.26 | American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio | 2015 |
| KDB 971168 D01 | Measurement Guidance for Certification of Licensed Digital Transmitters | v03r01 |

5. Test Results

5.1. Summary of Test Results

LTE Band 2

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|----------------------|------------------------|---------|
| 1 | Output Power | 24.232(c) | A.1 | P |
| 2 | Emission Limit | 24.238(a), 2.1051 | A.2 | P |

LTE Band 4

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|---------------------|------------------------|---------|
| 1 | Output Power | 27.50(d)(4) | A.1 | P |
| 2 | Emission Limit | 27.53(h), 2.1051 | A.2 | P |

LTE Band 5

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|--------------------------|------------------------|---------|
| 1 | Output Power | §2.1046(a), 22.913(a) | A.1 | P |
| 2 | Emission Limit | 22.917, 2.1051 | A.2 | P |

LTE Band 7

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|---------------------|------------------------|---------|
| 1 | Output Power | 27.50(h)(2) | A.1 | P |
| 2 | Emission Limit | 27.53(m), 2.1051 | A.2 | P |

LTE Band 12

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|---------------------|------------------------|---------|
| 1 | Output Power | 27.50(c)(10) | A.1 | P |
| 2 | Emission Limit | 27.53(g), 2.1051 | A.2 | P |

LTE Band 13

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|---------------------|------------------------|---------|
| 1 | Output Power | 27.50(b)(10) | A.1 | P |
| 2 | Emission Limit | 27.53(c), 2.1051 | A.2 | P |

LTE Band 17

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|---------------------|------------------------|---------|
| 1 | Output Power | 27.50(c)(10) | A.1 | P |
| 2 | Emission Limit | 27.53(g), 2.1051 | A.2 | P |

LTE Band 25

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|----------------|---------------------|------------------------|---------|
| 1 | Output Power | 27.50(c)(10) | A.1 | P |
| 2 | Emission Limit | 27.53(g), 2.1051 | A.2 | P |

LTE Band 26

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|---|---------------------|------------------------|---------|
| 1 | Equivalent Isotropically Radiated Power | 2.1046/90.1321 | A.1 | P |
| 2 | Peak EIRP Power Density | 2.1046/90.1321 | A.2 | P |

The following terms are used in the above table.

| | |
|----|--|
| P | Pass, the EUT complies with the essential requirements in the standard. |
| NM | Not measure, the test was not measured by ECIT. |
| NA | Not applicable, the test was not applicable. |
| F | Fail, the EUT does not comply with the essential requirements in the standard. |

5.2. Statements

The MEMOR 10, supporting GSM/WCDMA/LTE.etc, manufactured by Datalogic S.r.l. is a variant product for testing. ECIT only performed test cases which identified with Pass/Fail/Inc result in section 5.

ECIT has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

Note: This project is a variant of I18D00022-SRD06 original report. We only retest and report the EIRP and radiation test data. For other information, please refer to the original report.

6. Test Equipment Utilized

Climate chamber

| No. | Equipment | Model | SN | Manufacturer | Cal.date | Cal.interval |
|-----|-----------------|--------|----------|--------------|------------|--------------|
| 1 | Climate chamber | SH-641 | 92012011 | ESPEC | 2017-12-25 | 2 years |

Radiated emission test system

The test equipment and ancillaries used are as follows.

| No. | Equipment | Model | SN | Manufacturer | Cal.date | Cal.interval |
|-----|--------------------------------------|-----------|---------------|--------------|------------|--------------|
| 1 | Universal Radio Communication Tester | CMW500 | 104178 | R&S | 2019-05-10 | 1 year |
| 2 | Test Receiver | ESU40 | 100307 | R&S | 2019-05-10 | 1 year |
| 3 | TRILOG Broadband Antenna | VULB916 3 | VULB9163 -515 | Schwarzbeck | 2017-02-25 | 3 years |
| 4 | Double Ridged Guide Antenna | ETS-311 7 | 135890 | ETS | 2017-01-11 | 3 years |
| 5 | 2-Line V-Network | ENV216 | 101380 | R&S | 2019-05-10 | 1 year |
| 6 | Substitution Antenna | ETS-311 7 | 00135890 | ETS | 2017-01-11 | 3 years |
| 7 | RF Signal Generator | SMF100 A | 102314 | R&S | 2019-05-10 | 1 year |
| 8 | Substitution Antenna | VUBA911 7 | 9117-266 | Schwarzbeck | 2017-11-18 | 3 years |
| 9 | Amplifier | SCU08 | 10146 | R&S | 2019-05-10 | 1 year |

Conducted test system

| No. | Equipment | Model | SN | Manufacturer | Cal.date | Cal.interval |
|-----|---|----------|--------------------------|--------------|------------|--------------|
| 1 | Vector Signal Analyser | FSQ40 | 200063 | R&S | 2019-05-10 | 1 year |
| 2 | Wireless communication comprehensive tester | CMW500 | 148904 | R&S | 2019-05-10 | 1 year |
| 3 | DC Power Supply | ZUP60-14 | LOC-220Z 006 -0007 | TDL-Lambda | 2019-05-10 | 1 year |

Software

| Name | Version |
|--------------------------------|---------|
| Eagle FCC LTE auto test system | V3.0 |
| EMC32 | V9.15 |

7. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 20%, Max. = 75 % |
| Shielding effectiveness | > 100 dB |
| Ground system resistance | < 0.5 Ω |

Control room did not exceed following limits along the EMC testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 25 %, Max. = 75 % |
| Shielding effectiveness | > 100 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

| | |
|------------------------------|--|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 25 %, Max. = 75 % |
| Shielding effectiveness | > 100 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |
| VSWR | Between 0 and 6 dB, from 1GHz to 18GHz |
| Site Attenuation Deviation | Between -4 and 4 dB, 30MHz to 1GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80MHz to 3000 MHz |

8. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents. The detailed measurement uncertainty to see the column, k=2

| Measurement Items | Range | Confidence Level | Calculated Uncertainty |
|---|--------------------|------------------|------------------------|
| Maximum Peak Output Power | 30MHz-3600MHz | 95% | $\pm 0.544\text{dB}$ |
| EBW and VBW | 30MHz-3600MHz | 95% | $\pm 62.04\text{Hz}$ |
| Transmitter Spurious Emission-Conducted | 30MHz-2GHz | 95% | $\pm 0.90\text{dB}$ |
| Transmitter Spurious Emission-Conducted | 2GHz-3.6GHz | 95% | $\pm 0.88\text{dB}$ |
| Transmitter Spurious Emission-Conducted | 3.6GHz-8GHz | 95% | $\pm 0.96\text{dB}$ |
| Transmitter Spurious Emission-Conducted | 8GHz-20GHz | 95% | $\pm 0.94\text{dB}$ |
| Transmitter Spurious Emission-Radiated | 9KHz-30MHz | 95% | $\pm 5.66\text{dB}$ |
| Transmitter Spurious Emission-Radiated | 30MHz-1000MHz | 95% | $\pm 4.98\text{dB}$ |
| Transmitter Spurious Emission-Radiated | 1000MHz -18000MHz | 95% | $\pm 5.06\text{dB}$ |
| Transmitter Spurious Emission-Radiated | 18000MHz -40000MHz | 95% | $\pm 5.20\text{dB}$ |
| Frequency stability | 1MHz-16GHz | 95% | $\pm 62.04\text{Hz}$ |

ANNEX A. MEASUREMENT RESULTS

ANNEX A.1. OUTPUT POWER

A.1.1. Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

CMW500 setting:

1: CMW500 is connected to the DUT

2; Set RX Expected PEP to 30 dbm

A.1.2 Radiated

A.1.2.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP."

Rule Part 27.50(c) specifies "Portable stations (hand-held devices) are limited to 3 watts ERP".


A.1.2.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

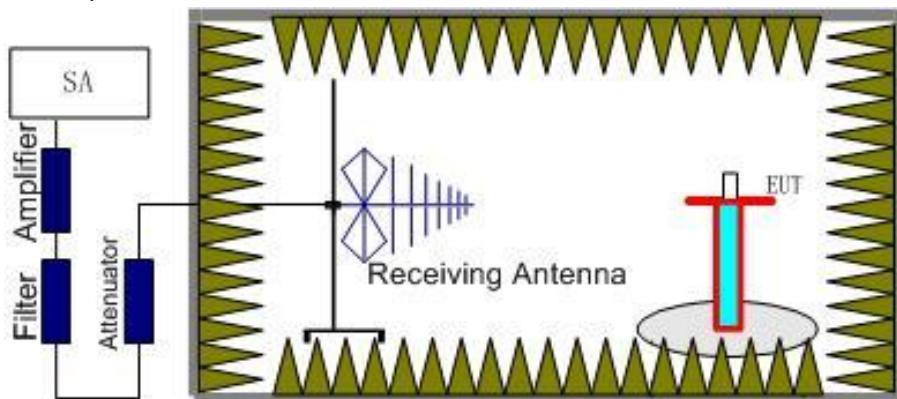

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

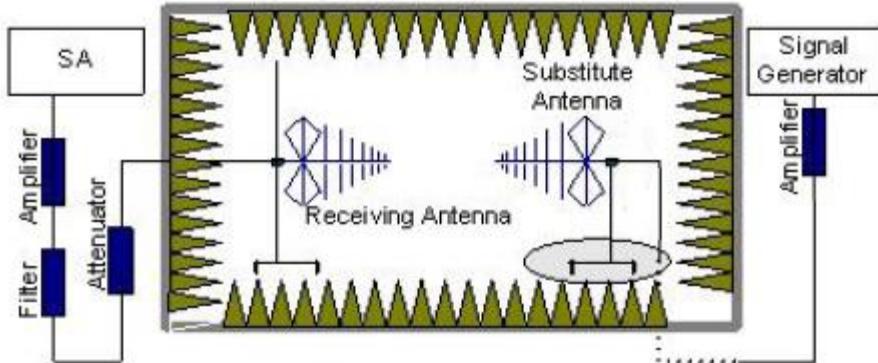

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna. The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

A.1.2.3 Measurement result

LTE Band 2- EIRP 24. 232(b)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2_3MHz_QPSK

| Frequency (MHz) | P_{Mea} (dBm) | P_{cl} (dB) | P_{Ag} (dB) | G_a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|---------------|-------------------------|------------|-------------|-------------|--------------|
| 1908.5 | -13.21 | 4.7 | 35.9 | 2.8 | 21.29 | 33.00 | 6.99 | H |

LTE Band 2_20MHz_16QAM

| Frequency (MHz) | P_{Mea} (dBm) | P_{cl} (dB) | P_{Ag} (dB) | G_a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|---------------|-------------------------|------------|-------------|-------------|--------------|
| 1900 | -12.03 | 4.7 | 36.4 | 2.8 | 21.97 | 33.00 | 7.01 | H |

Peak EIRP(dBm) = $P_{\text{Mea}}(-13.21\text{dBm}) - G_a(2.8\text{dBi}) - P_{\text{Ag}}(36.4\text{dB}) - P_{\text{cl}}(4.7\text{dB}) = 21.97\text{dBm}$

LTE Band 4- EIRP 27.50(d)

Limits: $\leq 30\text{m (1W)}$

LTE Band 4_20MHz_QPSK

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | PAg (dB) | Ga Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|----------------------|------------|-------------|-------------|--------------|
| 1720 | -11.43 | 4.4 | 36.2 | 3 | 23.37 | 30.00 | 4.26 | H |

LTE Band 4_3MHz_16QAM

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | PAg (dB) | Ga Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|----------------------|------------|-------------|-------------|--------------|
| 1711.5 | -11.31 | 4.4 | 36.2 | 3 | 23.49 | 30.00 | 4.15 | H |

Peak EIRP(dBm) = $P_{\text{Mea}}(-11.31\text{dBm}) - G_a(2.9\text{dBi}) - P_{\text{Ag}}(35.8\text{dB}) - P_{\text{cl}}(4.5\text{dB}) = 23.49\text{dBm}$

LTE Band5-EIRP 27.50(d)

Limits: $\leq 33\text{Bm (2W)}$

LTE Band 5_3MHz_QPSK

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | PAg (dB) | Ga Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|----------------------|------------|-------------|-------------|--------------|
| 825.50 | -9.21 | 3.1 | 36.9 | -2.87 | 21.72 | 38.45 | 15.26 | H |

LTE Band 5_3MHz_16QAM

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | PAg (dB) | Ga Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|----------------------|------------|-------------|-------------|--------------|
| 825.50 | -9.24 | 3.1 | 36.9 | -2.87 | 21.69 | 38.45 | 15.44 | H |

Peak ERP(dBm)= $P_{\text{Mea}}(-9.21\text{Bm})-G_a(-3.11\text{dBi})-P_{\text{Ag}}(36.9\text{dB})-P_{\text{cl}}(3.1\text{dB})-2.15\text{dB} = 21.72\text{Bm}$

LTE Band 7- EIRP 27.50(h)(2)

Limits: $\leq 33 \text{ dBm (2W)}$

LTE Band 7_15MHz_QPSK

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | PAg (dB) | Ga Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|----------------------|------------|-------------|-------------|--------------|
| 2562.50 | -9.86 | 5.4 | 34.8 | 3.8 | 23.34 | 33.00 | 9.38 | H |

LTE Band 7_20MHz_16QAM

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | PAg (dB) | Ga Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|----------|----------------------|------------|-------------|-------------|--------------|
| 2510.00 | -8.41 | 5.4 | 34.7 | 3.7 | 24.59 | 33.00 | 9.68 | H |

Peak EIRP(dBm) = $P_{\text{Mea}}(-8.41\text{dBm}) - G_a(3.8\text{dBi}) - P_{\text{Ag}}(34.8\text{dB}) - P_{\text{cl}}(5.4\text{dB}) = 24.59\text{dBm}$

LTE Band 12 - EIRP 27.50(c)(10)

Limits: ≤34.77dBm (3W)

LTE Band 12_1.4MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------------------|------------|-------------|-------------|--------------|
| 715.30 | -17.3 | 2.8 | 37.3 | 4.5 | 21.7 | 34.77 | 12.04 | H |

LTE Band 12_1.4MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------------------|------------|-------------|-------------|--------------|
| 715.30 | -17.11 | 2.8 | 37.3 | 4.5 | 21.89 | 34.77 | 12.14 | H |

Peak EIRP(dBm) = P_{Mea}(-17.11dBm) - G_a (3.8dBi) - P_{Ag} (34.8dB) - P_{cl} (5.4dB) = 21.89dBm

LTE Band 13 - EIRP 27.50(c)(10)

Limits: ≤34.77dBm (3W)

LTE Band 13_10MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------------------|------------|-------------|-------------|--------------|
| 782 | -18.72 | 2.8 | 37.1 | 4.7 | 20.28 | 34.77 | 12.92 | H |

LTE Band 13_10MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------------------|------------|-------------|-------------|--------------|
| 782 | -18.84 | 2.8 | 37.1 | 4.7 | 20.16 | 34.77 | 12.95 | H |

Peak EIRP(dBm) = P_{Mea}(-18.72dBm) - G_a (3.8dBi) - P_{Ag} (34.8dB) - P_{cl} (5.4dB) = 20.28dBm

LTE Band 17- EIRP 27.50(c)(10)

Limits: ≤34.77dBm (3W)

LTE Band 17_5MHz_QPSK

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------------------|------------|-------------|-------------|--------------|
| 713.50 | -17.08 | 2.8 | 37.1 | 4.5 | 21.72 | 34.77 | 12.23 | H |

LTE Band 17_5MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|----------------------|----------------------------------|------------|-------------|-------------|--------------|
| 713.50 | -17.12 | 2.8 | 37.1 | 4.5 | 21.68 | 34.77 | 12.09 | H |

Peak EIRP(dBm)=P_{Mea}(-17.08dBm)+G_a(4.5dBi)+P_{Ag}(37.1dB)-P_{cl} (2.8dB)-2.15dB=21.72dBm

LTE Band 25 - ERP 27.50(c)(10)**Limits:** $\leq 34.77 \text{ dBm}$ (3W)**LTE Band 25_3MHz_QPSK**

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polariza- tion |
|--------------------|---------------------------|-------------------------|-------------------------|-------------------------------------|---------------|----------------|----------------|-------------------|
| 1913.5 | -11.88 | 4.7 | 35.9 | 2.8 | 22.12 | 34.77 | 11.77 | H |

LTE Band 25_3MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarizati- on |
|--------------------|---------------------------|-------------------------|-------------------------|-------------------------------------|---------------|----------------|----------------|-------------------|
| 1913.5 | -11.9 | 4.7 | 35.9 | 2.8 | 22.1 | 34.77 | 11.5 | H |

Peak ERP(dBm)=P_{Mea}(-11.88m)-G_a(2.8dB)-P_{Ag}(35.9dB)-P_{cl}(4.7dB)-2.15dB = 22.12dBm**LTE Band 26 - ERP 27.50(c)(10)****Limits:** $\leq 34.77 \text{ dBm}$ (3W)**LTE Band 26_3MHz_QPSK**

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polariza- tion |
|--------------------|---------------------------|-------------------------|-------------------------|-------------------------------------|---------------|----------------|----------------|-------------------|
| 815.5 | -16.07 | 3.0 | 36.9 | 4.7 | 22.53 | 34.77 | 11.24 | H |

LTE Band 26_3MHz_16QAM

| Frequency (MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dBi) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polariza- tion |
|--------------------|---------------------------|-------------------------|-------------------------|-------------------------------------|---------------|----------------|----------------|-------------------|
| 815.5 | -16.02 | 3.0 | 36.9 | 4.7 | 22.58 | 34.77 | 11.06 | H |

Peak ERP(dBm)=P_{Mea}(-16.02dBm)-G_a(4.5dB)-P_{Ag}(36.9dB)-P_{cl}(3.1dB)-2.15dB = 22.58dBm**ANALYZER SETTINGS:**

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

ANNEX A.2. EMISSION LIMT

Reference

FCC: CFR 2.1051, 22.917,24.238(a), 27.53(g), 27.53(h) , 27.53(m).


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917,Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Band 12.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

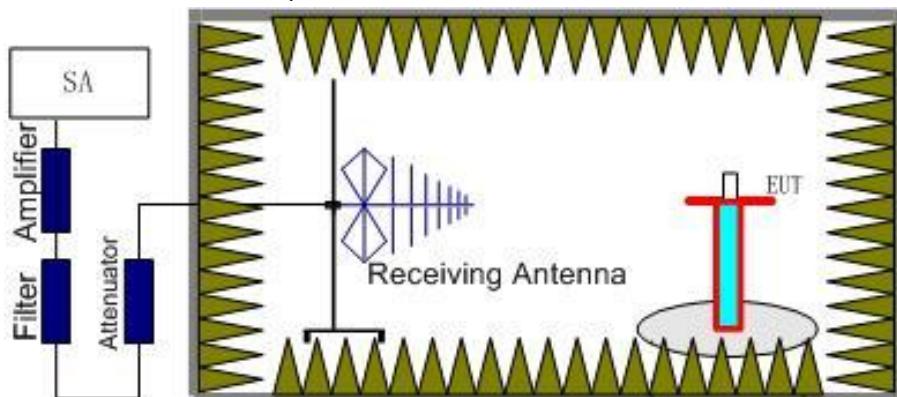

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

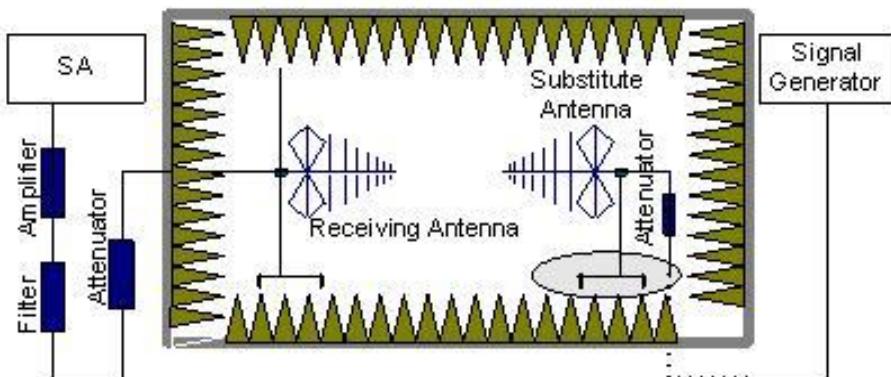

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dB$.

A.2.2 Measurement Limit

Part 22.917, Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

7. Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 12. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Band 12 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

LTE Band 12, 10 MHz, QPSK, Channel 20775

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBd) | Peak ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|----------------|-------------|--------------|
| 1278.6 | -48.12 | 3.9 | 2.0 | -50.02 | -13 | H |
| 2123.8 | -34.21 | 4.9 | 2.8 | -36.31 | -13 | H |
| 3541.6 | -47.02 | 6.4 | 4.7 | -48.72 | -13 | V |
| 4580.4 | -51.19 | 7.4 | 7.3 | -51.29 | -13 | H |
| 6034.0 | -52.56 | 8.6 | 10.4 | -50.76 | -13 | V |
| 7983.1 | -55 | 9.9 | 16.6 | -48.3 | -13 | V |

LTE Band 12, 10 MHz, QPSK, Channel 21100

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBd) | Peak ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|----------------|-------------|--------------|
| 1673.6 | -42.02 | 4.3 | 2.9 | -43.42 | -13 | H |
| 2544.6 | -36.07 | 5.4 | 3.7 | -37.77 | -13 | V |
| 3687.7 | -49.37 | 6.6 | 7.7 | -48.27 | -13 | V |
| 5468.1 | -49.37 | 8.1 | 9.5 | -47.97 | -13 | V |
| 6269.2 | -49.08 | 8.8 | 10.8 | -47.08 | -13 | H |
| 6936.9 | -50.07 | 9.3 | 12.9 | -46.47 | -13 | H |

LTE Band 12, 5 MHz, QPSK, Channel 21425

| Frequency (MHz) | PMea (dBm) | Pcl (dBm) | Ga (dBd) | Peak ERP (dBm) | Limit (dBm) | Polarization |
|-----------------|------------|-----------|----------|----------------|-------------|--------------|
| 2145.4 | -35.67 | 5.0 | 3.3 | -37.37 | -13 | H |
| 2960.0 | -35.53 | 5.8 | 4.7 | -36.63 | -13 | H |
| 3576.4 | -40.95 | 6.5 | 4.7 | -42.75 | -13 | V |
| 4567.6 | -51.29 | 7.4 | 7.3 | -51.39 | -13 | H |
| 5964.0 | -52.97 | 8.5 | 10.4 | -51.07 | -13 | V |
| 7870.9 | -53.11 | 9.9 | 15.3 | -47.71 | -13 | V |

ANNEX B. Accreditation Certificate**Accredited Laboratory**

A2LA has accredited

EAST CHINA INSTITUTE OF TELECOMMUNICATIONS

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017
General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates
technical competence for a defined scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 6th day of May 2019.

A blue ink signature of a person's name, which is the Vice President of Accreditation Services.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****