



RF MEASUREMENT REPORT

FCC ID: U4GDL36LT
Applicant: Datalogic S.r.l.
Product: Barcode Reader
Model No.: DL36LT
Brand Name: DATALOGIC
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2025-01-13
Test Date: 2025-04-06 ~ 2025-04-11

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1004041-U202	V01	Initial Report	2025-05-08	Valid

Note: This product has got FCC approval (FCC ID: U4GDL36LT, Original Report No.: 2209RSU001-U2), now it has been replaced with 2.4/5G Wi-Fi FEM (pin-for-pin compatible) and reduced Wi-Fi conducted power via software, no other change. Based on the above changes, we did some spot-check tests for partial items.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	7
1.6. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode.....	8
2.2. Test System Connection Diagram.....	8
2.3. Test Software	9
2.4. Applied Standards.....	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty	12
6. Test Result.....	13
6.1. Summary	13
6.2. Output Power Measurement	14
6.2.1. Test Limit	14
6.2.2. Test Procedure	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Radiated Spurious Emission Measurement.....	15
6.3.1. Test Limit	15
6.3.2. Test Procedure	15
6.3.3. Test Setting	15
6.3.4. Test Setup	17
6.3.5. Test Result	18
6.4. Radiated Restricted Band Edge Measurement	19
6.4.1. Test Limit	19
6.4.2. Test Procedure	20

6.4.3.	Test Setting	20
6.4.4.	Test Setup	21
6.4.5.	Test Result	22
Appendix A - Test Result.....		23
A.1	Output Power Test Result	23
A.2	Radiated Spurious Emission Test Result.....	24
A.3	Radiated Restricted Band Edge Test Result.....	27
Appendix B - Test Setup Photograph		44
Appendix C - EUT Photograph		45

1. General Information

1.1. Applicant

Datalogic S.r.l.

Via San Vitalino no.13, Calderara di Reno -40012(BO)-Italy

1.2. Manufacturer

Datalogic S.r.l.

Via San Vitalino no.13, Calderara di Reno -40012(BO)-Italy

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Barcode Reader
Model No.	DL36LT
EUT Identification No.	20250305Sample#01 (Conducted) 20250113Sample#02 (Radiated)
NFC Specification	13.56MHz
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Specification	v5.2 dual mode
WPT Specification	119-140kHz, WPT client type
GNSS Specification	GPS/GNSS/Beidou/Galileo/SBAS
3GPP Specification	GSM 850/1900 WCDMA Band 2/4/5 LTE Band 2/4/5/7/12/13/17/25/26
Operating Temp.	-20 ~ 50°C
Power Type	3.60 ~ 4.35Vdc, typical 3.8Vdc
Accessories	
AC Adapter	Model: S008ACM0500200 Input: 100-240V ~ 50/60Hz, 0.3A Output: 5V, 2A, 10W
Rechargeable Li-ion Battery 1#	Model No.: BTDL36 Rated Voltage: 3.8V Rated Capacity: 3980mAh/15.1Wh Limited Charge Voltage: 4.35V
Rechargeable Li-ion Battery 2#	Model No.: BTDL35 Rated Voltage: 3.8V Rated Capacity: 3980mAh/15.1Wh Limited Charge Voltage: 4.35V
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Bluetooth Frequency	2402 ~ 2480MHz
Channel Number	40
Type of modulation	GFSK
Data Rate	1Mbps & 2Mbps
Antenna Type	PIFA
Antenna Gain	0.46 dBi

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by BLE-1Mbps
Mode 2: Transmit by BLE-2Mbps

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

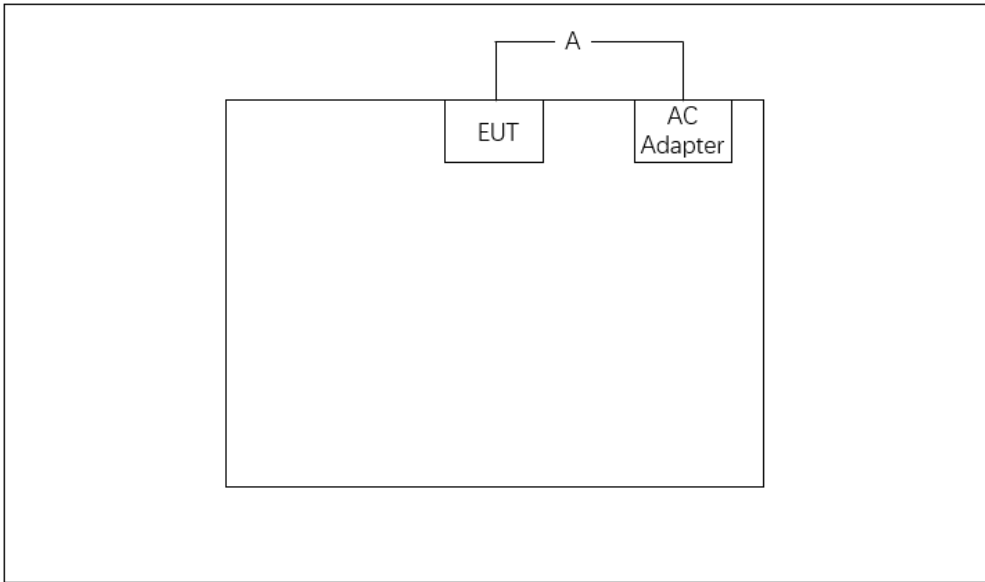Connection Diagram		
 <pre> graph TD A --- EUT A --- ACAdapter[AC Adapter] </pre>		
Cable Type	Cable Description	
A	Power Cable	Shielded, 1.1m

2.3. Test Software

Type the code `***#05740574***` to enter engineer mode to implement continuous transmit.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2026-01-04	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2025-05-08 2026-04-26	WZ-AC2
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2026-03-22	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2025-09-23	WZ-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06987	1 year	2025-09-06	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2025-11-03	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2026-01-09	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2025-10-13	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2026-04-17	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2025-10-16	WZ-AC2
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2025-09-03	WJ-SR3
Shielding Room	TDK	WJ-SR3	MRTSUE07125	N/A	N/A	WJ-SR3
USB Power Sensor	Keysight	U2021XA	MRTSUE07143	1 year	2026-03-15	WJ-SR3
Thermohygrometer	testo	608-H1	MRTSUE11331	1 year	2025-06-24	WJ-SR3

Software	Version	Function
e3	230711	RE & CE
Agilent Power Panel	V 3.9	Power
Controller_MF 7802	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.35dB Coplanar: 9kHz~30MHz: 2.37dB Horizontal: 30MHz~200MHz: 3.47dB 200MHz~1GHz: 4.17dB 1GHz~40GHz: 4.97dB Vertical: 30MHz~200MHz: 4.07dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.84dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.5dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.5dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.2%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(b)(3)	Output Power	Conducted	Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. Output Power Measurement

6.2.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.1.3

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.2.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.2.4. Test Setup

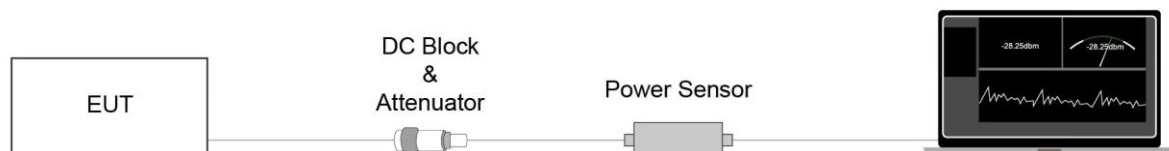

6.2.5. Test Result

Refer to Appendix A.1.

6.3. Radiated Spurious Emission Measurement

6.3.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.3.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.3.4. Test Setup


Below 30MHz Test Setup:

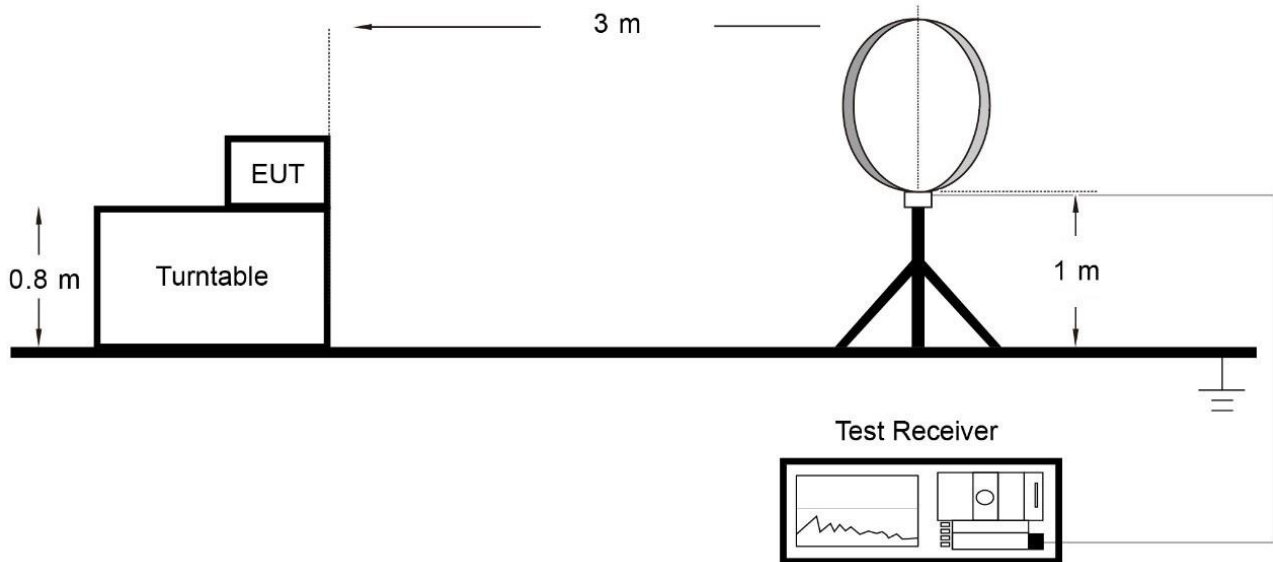

Below 1GHz Test Setup:

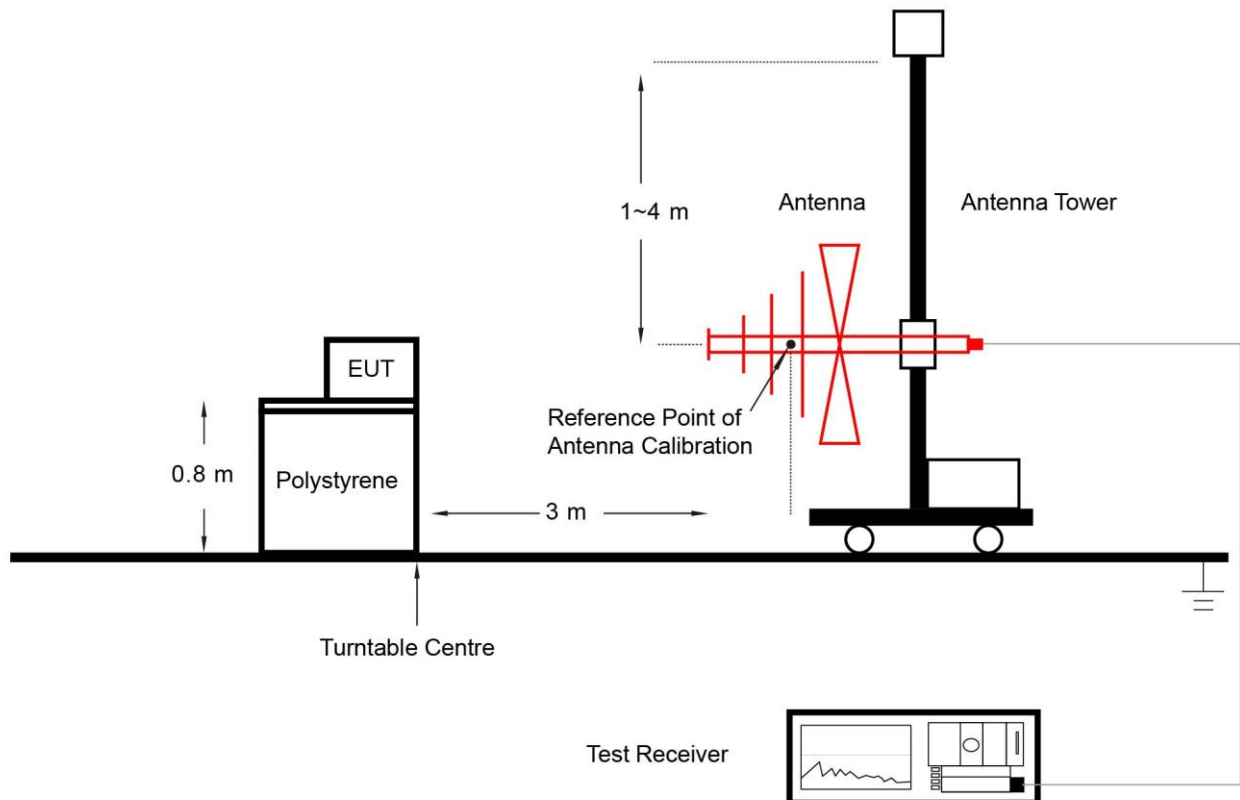

Above 1GHz Test Setup:

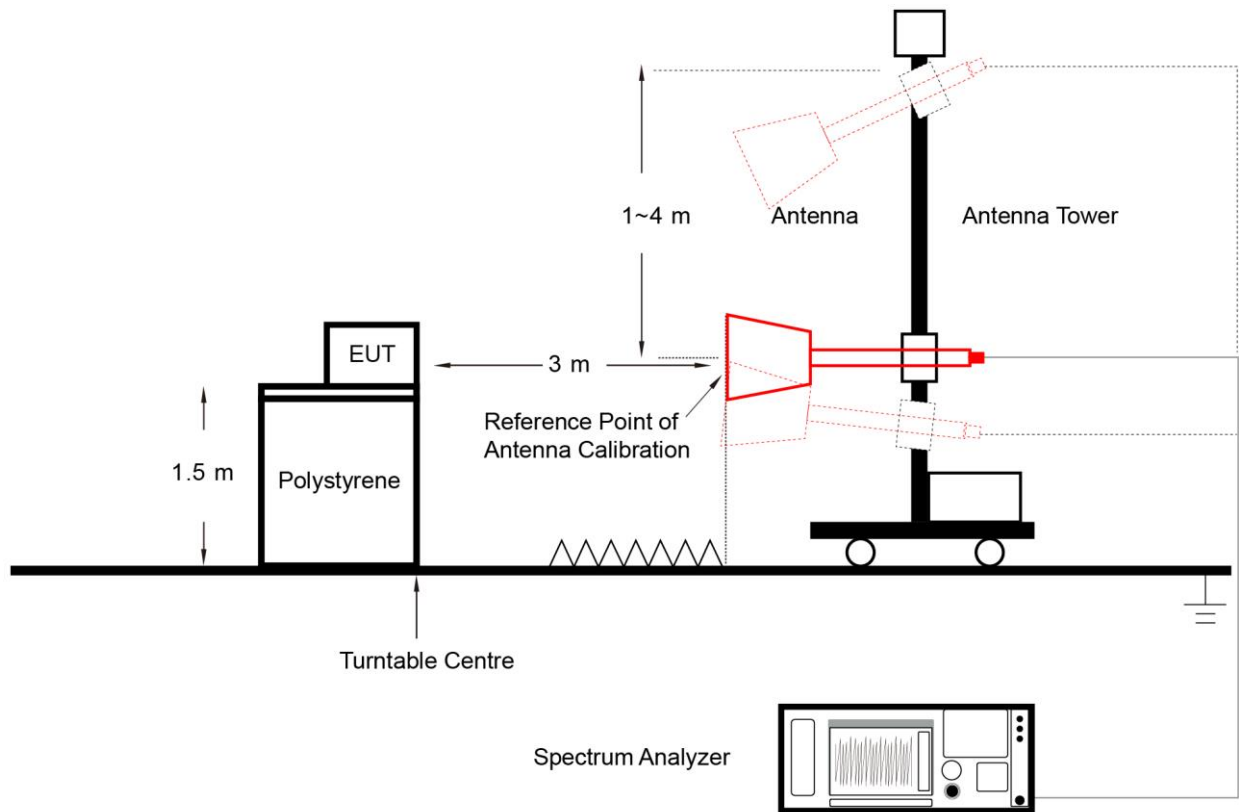

6.3.5. Test Result

Refer to Appendix A.2.

6.4. Radiated Restricted Band Edge Measurement

6.4.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.4.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.4.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.4.4. Test Setup

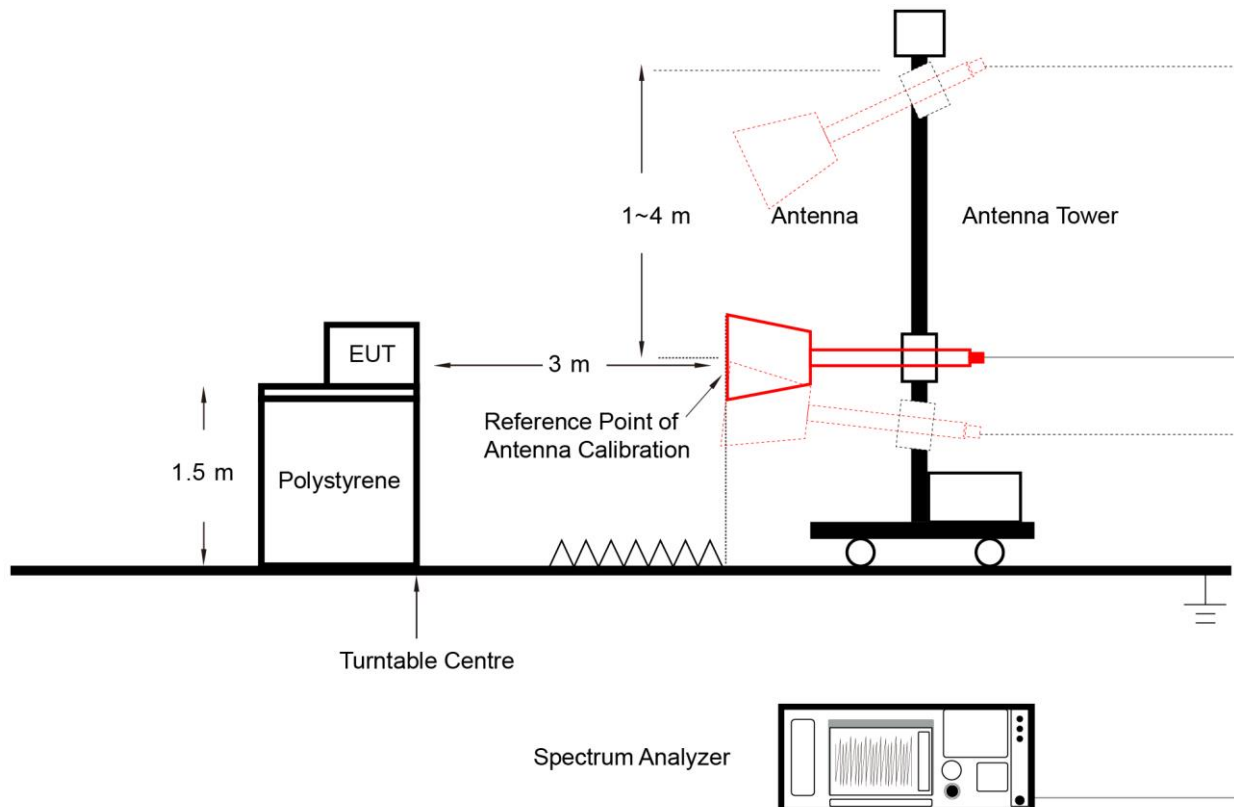

6.4.5. Test Result

Refer to Appendix A.3.

Appendix A - Test Result

A.1 Output Power Test Result

Test Site	WJ-SR3	Test Engineer	Jake Lan
Test Date	2025-04-10		

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	-0.78	≤ 30.00	Pass
BLE	1Mbps	19	2440	-0.18	≤ 30.00	Pass
BLE	1Mbps	39	2480	-0.80	≤ 30.00	Pass
BLE	2Mbps	00	2402	-0.72	≤ 30.00	Pass
BLE	2Mbps	19	2440	-0.24	≤ 30.00	Pass
BLE	2Mbps	39	2480	-0.68	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	-3.75	≤ 30.00	Pass
BLE	1Mbps	19	2440	-2.98	≤ 30.00	Pass
BLE	1Mbps	39	2480	-4.15	≤ 30.00	Pass
BLE	2Mbps	00	2402	-3.75	≤ 30.00	Pass
BLE	2Mbps	19	2440	-2.92	≤ 30.00	Pass
BLE	2Mbps	39	2480	-4.04	≤ 30.00	Pass


A.2 Radiated Spurious Emission Test Result

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-04-11	Test Mode:	BLE-1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
19	4291.2	34.9	1.3	36.2	74.0	-37.8	Peak	Horizontal
	10948.4	31.1	15.9	47.0	74.0	-27.0	Peak	Horizontal
	17955.8	18.6	28.5	47.1	54.0	-6.9	Average	Horizontal
	17955.8	30.5	28.5	59.0	74.0	-15.0	Peak	Horizontal
	3818.6	36.8	-0.5	36.3	74.0	-37.7	Peak	Vertical
	10946.7	30.8	15.9	46.7	74.0	-27.3	Peak	Vertical
	17940.5	18.4	28.6	47.0	54.0	-7.0	Average	Vertical
	17940.5	31.3	28.6	59.9	74.0	-14.1	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission below 1GHz:

Site	WZ-AC2	Test Date	2025-04-10
Temperature	28.9 °C	Humidity	41.1 %
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Dick Shen
Factor	VULB 9162_00047	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2440MHz		

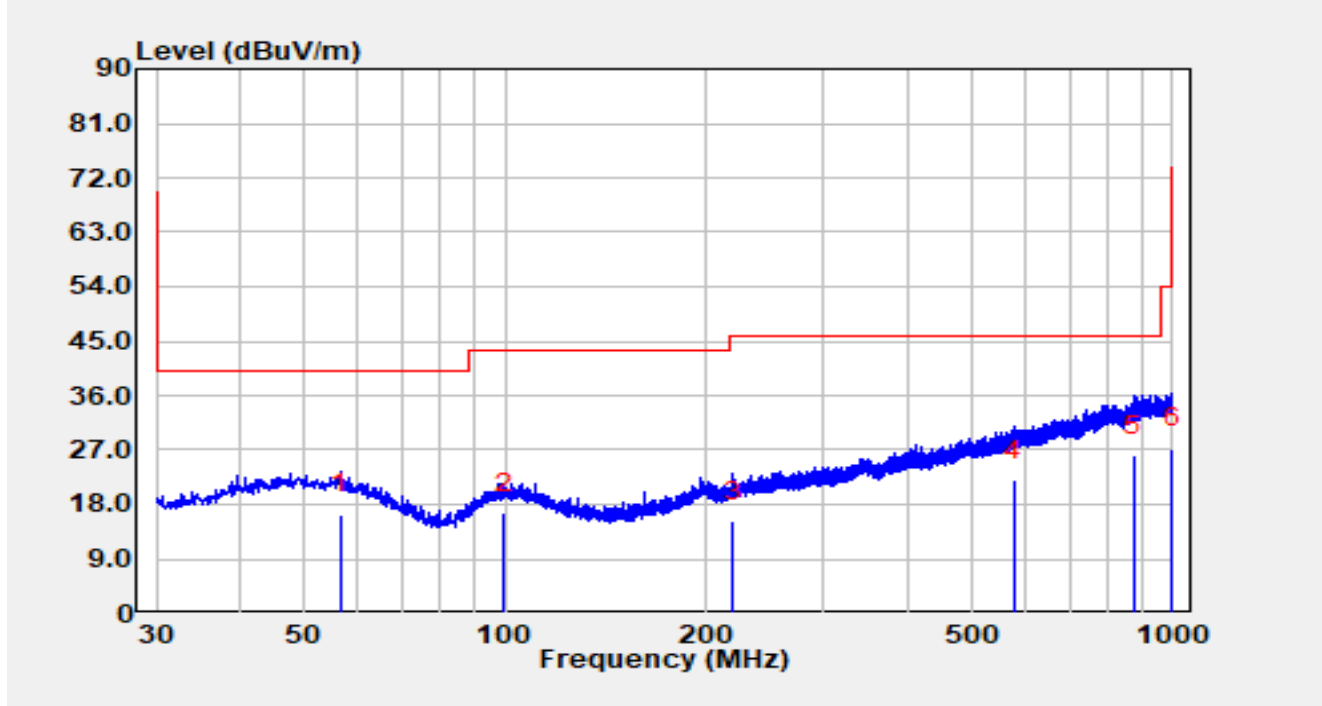


No	Mark	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Detector
1		56.48	-3.58	20.01	16.43	-23.57	40.00	QP
2		99.55	-2.16	18.67	16.51	-26.99	43.50	QP
3		219.05	-3.61	18.81	15.20	-30.80	46.00	QP
4		579.21	-4.99	26.96	21.97	-24.03	46.00	QP
5	*	873.61	-4.87	30.85	25.98	-20.02	46.00	QP
6		997.96	-4.93	32.22	27.29	-26.71	54.00	QP

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi)
- Measurement (dBm) = Reading (dBm) + C.F (dB).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC2	Test Date	2025-04-10
Temperature	28.9 °C	Humidity	41.1 %
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Dick Shen
Factor	VULB 9162_00047	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2440MHz		

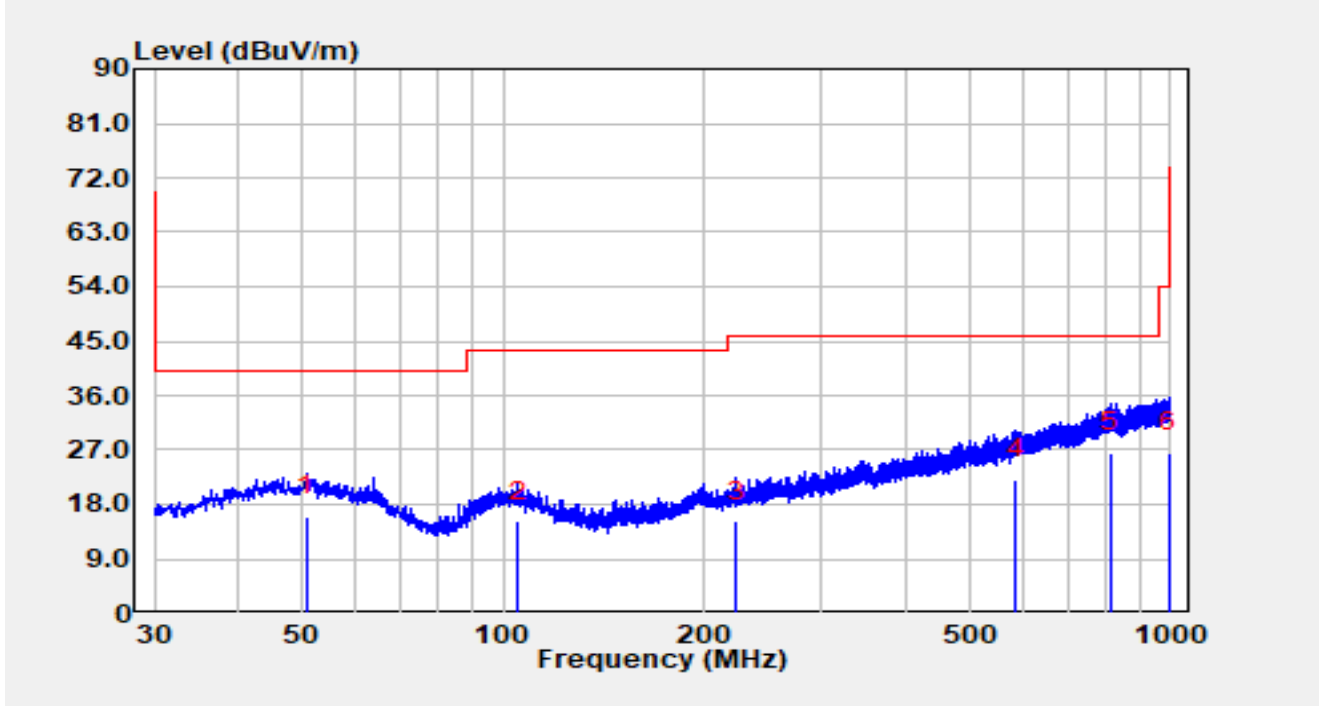


No	Mark	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Detector
1		50.76	-4.41	20.50	16.09	-23.91	40.00	QP
2		105.37	-3.46	18.74	15.28	-28.22	43.50	QP
3		223.13	-3.78	19.05	15.27	-30.73	46.00	QP
4		586.20	-5.07	27.22	22.14	-23.86	46.00	QP
5	*	811.92	-4.25	30.84	26.59	-19.41	46.00	QP
6		994.96	-5.60	32.25	26.65	-27.35	54.00	QP

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi)
- Measurement (dBm) = Reading (dBm) + C.F (dB).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.3 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2402MHz		

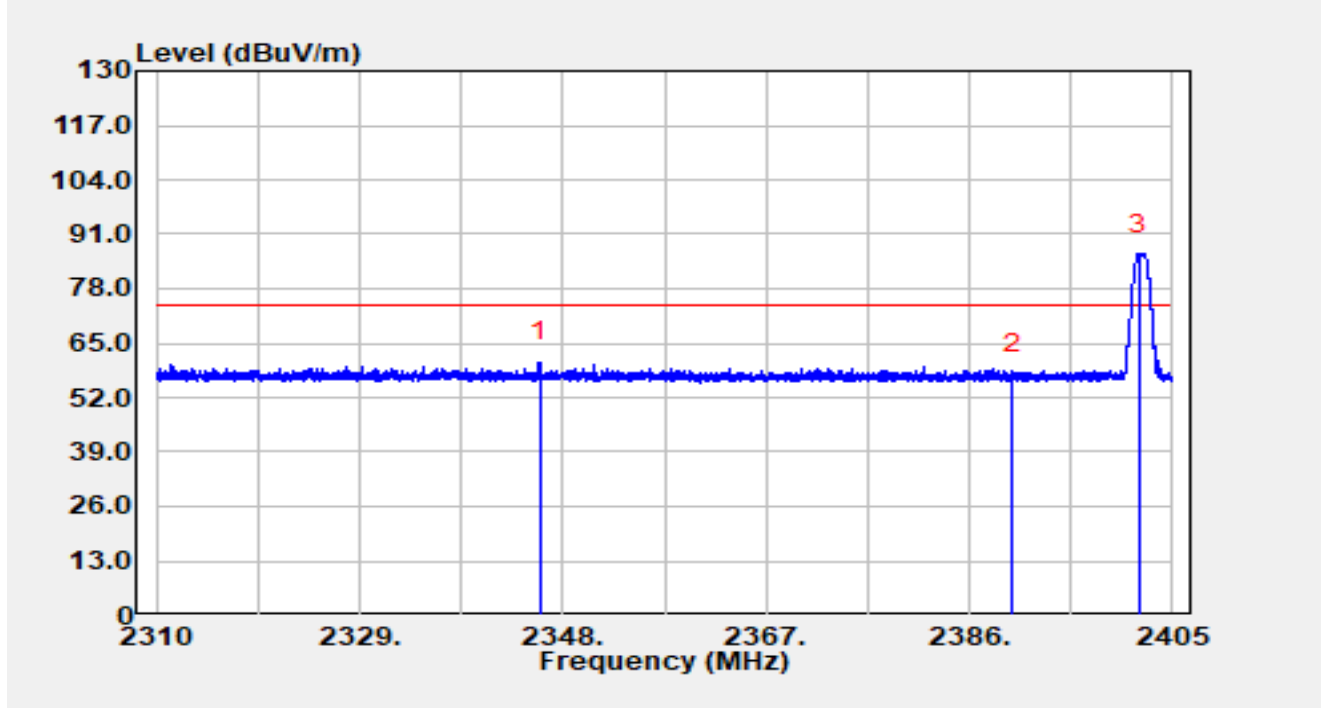


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2345.82	27.81	32.75	60.56	-13.44	74.00	Peak
2		2390.00	24.98	32.52	57.50	-16.50	74.00	Peak
3		2401.85	53.80	32.49	86.29	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2402MHz		

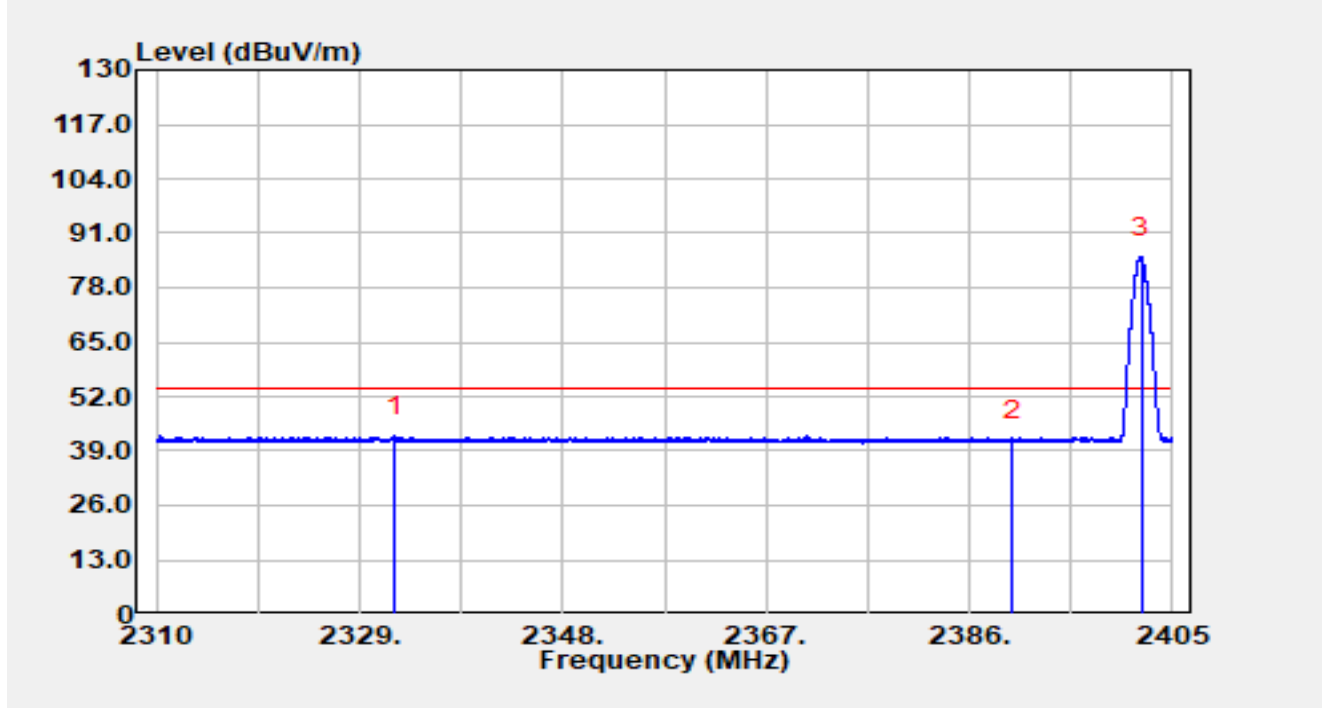


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2332.25	9.87	32.75	42.62	-11.38	54.00	Average
2		2390.00	8.89	32.52	41.41	-12.59	54.00	Average
3		2402.06	52.66	32.49	85.16	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2402MHz		

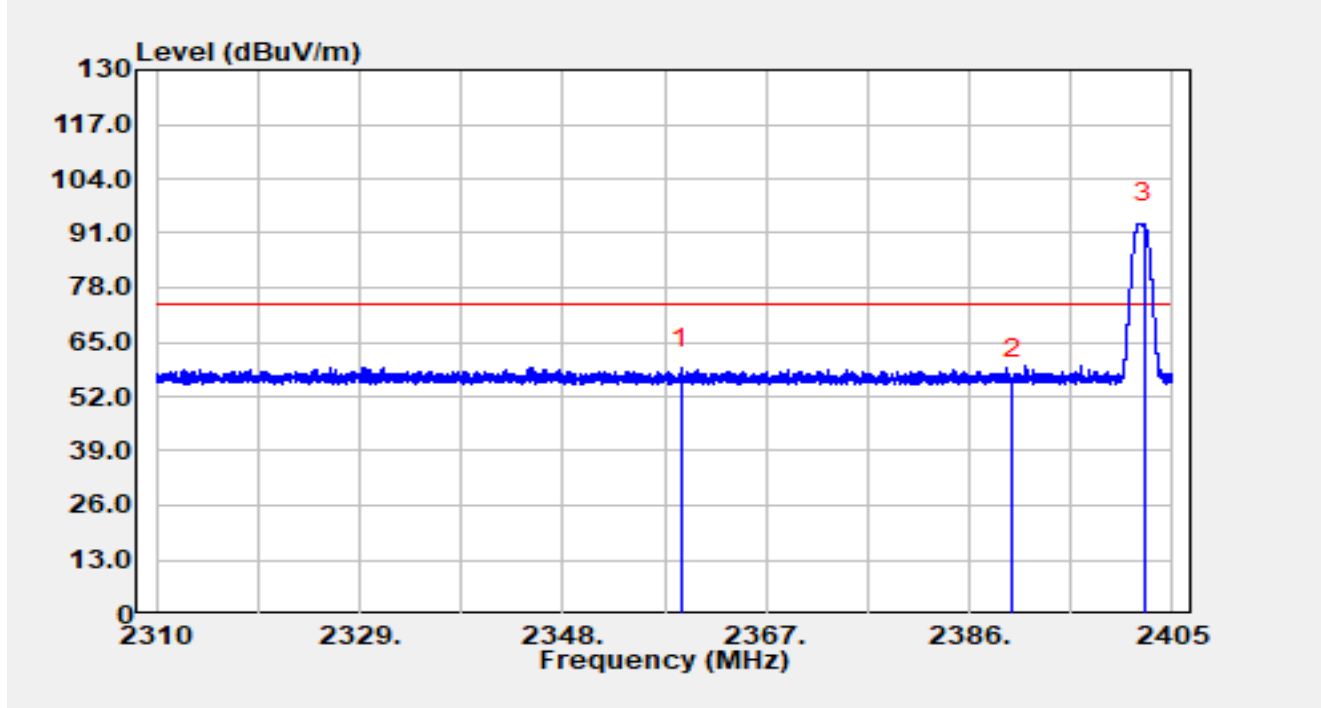


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2359.09	26.07	32.67	58.74	-15.26	74.00	Peak
2		2390.00	23.76	32.52	56.28	-17.72	74.00	Peak
3		2402.34	60.77	32.49	93.26	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2402MHz		

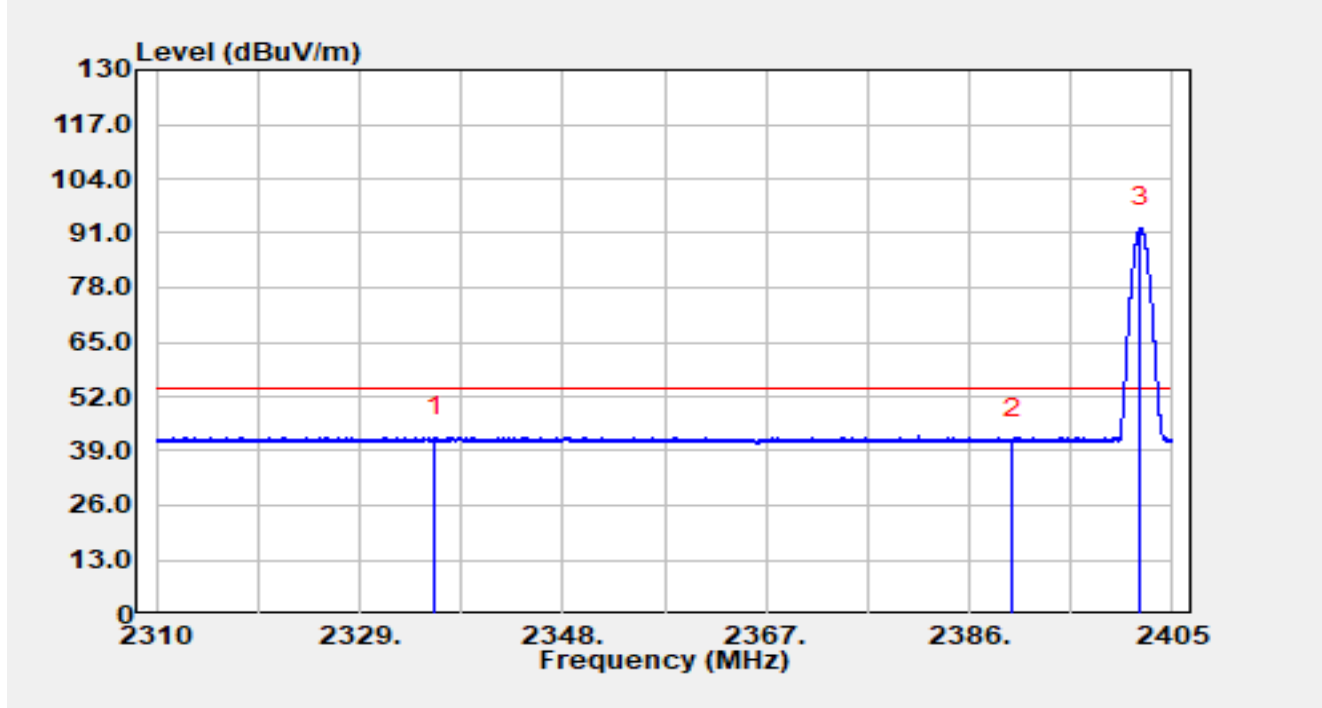


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2336.00	9.57	32.75	42.32	-11.68	54.00	Average
2		2390.00	9.27	32.52	41.79	-12.21	54.00	Average
3		2402.00	59.92	32.49	92.41	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2480MHz		

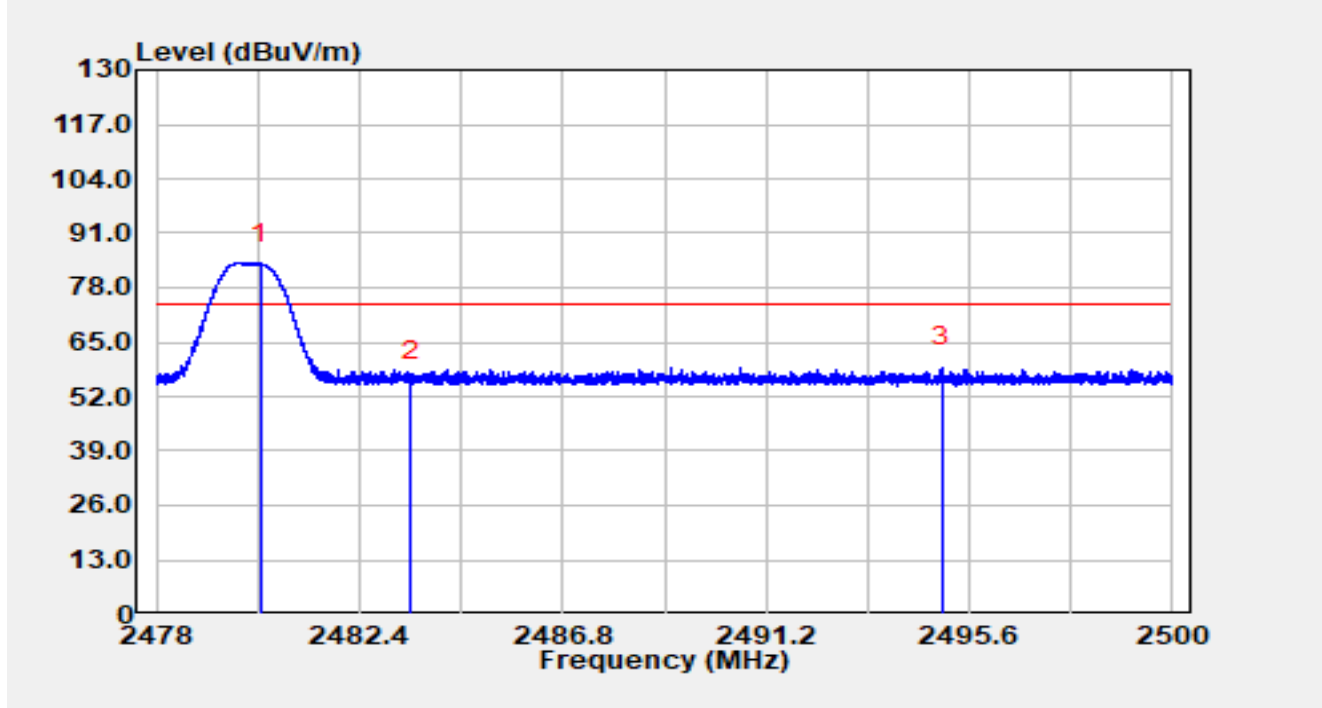


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.25	51.44	32.40	83.85	N/A	N/A	Peak
2		2483.50	23.33	32.40	55.73	-18.27	74.00	Peak
3	*	2495.00	26.48	32.39	58.87	-15.13	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2480MHz		

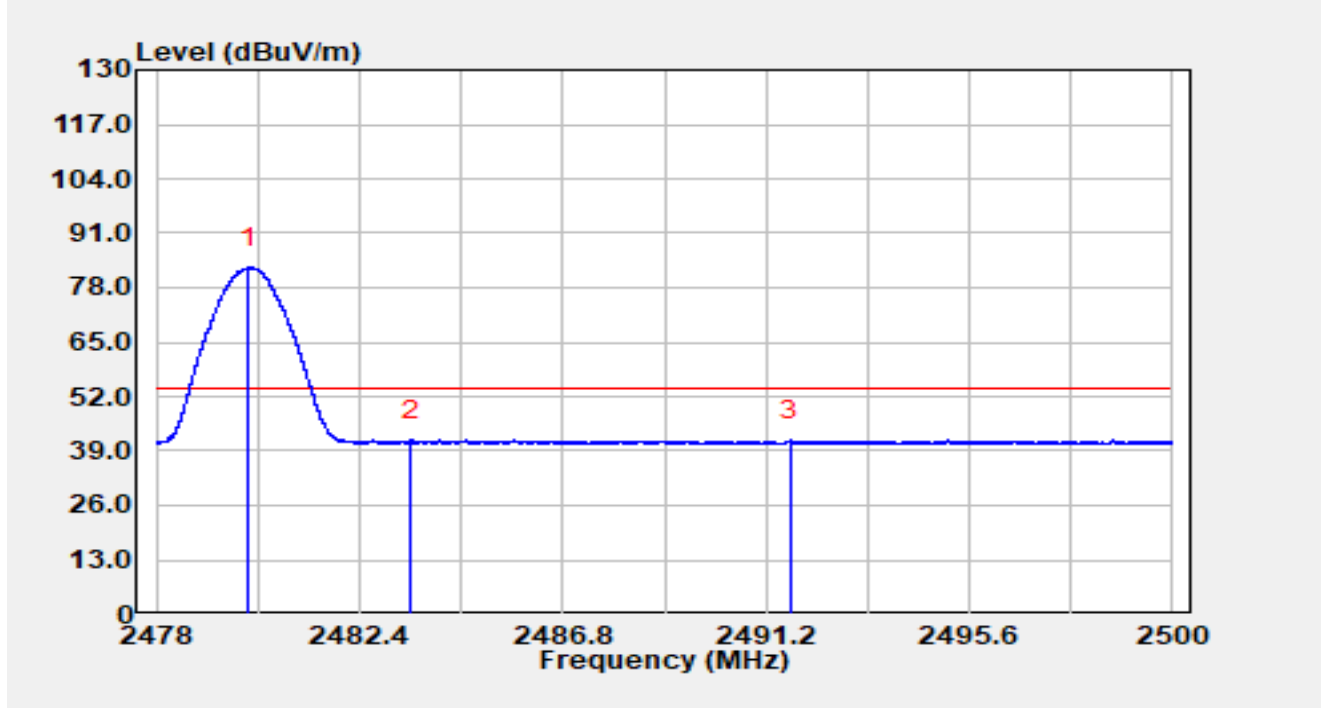


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.01	50.27	32.40	82.68	N/A	N/A	Average
2	*	2483.50	9.07	32.40	41.47	-12.53	54.00	Average
3		2491.73	9.07	32.39	41.46	-12.54	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2480MHz		

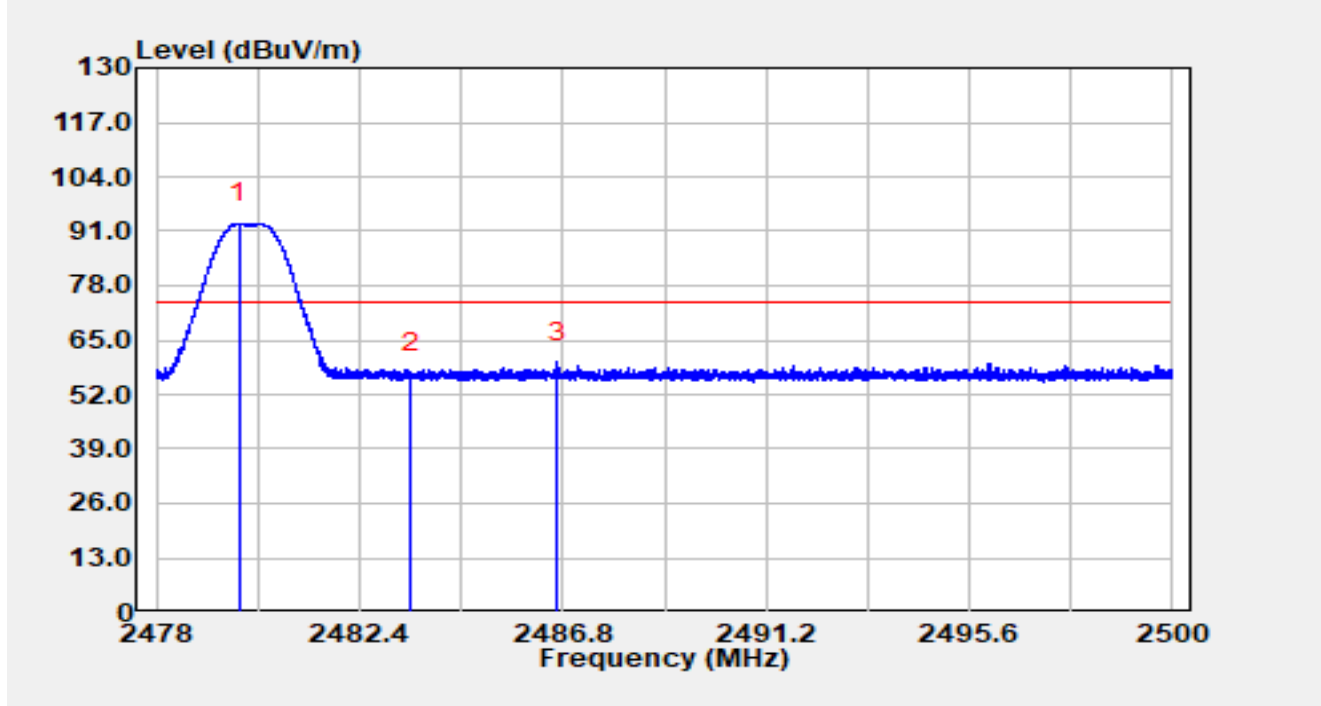


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.78	60.32	32.40	92.72	N/A	N/A	Peak
2		2483.50	24.75	32.40	57.15	-16.85	74.00	Peak
3	*	2486.67	27.32	32.39	59.71	-14.29	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-1M at 2480MHz		

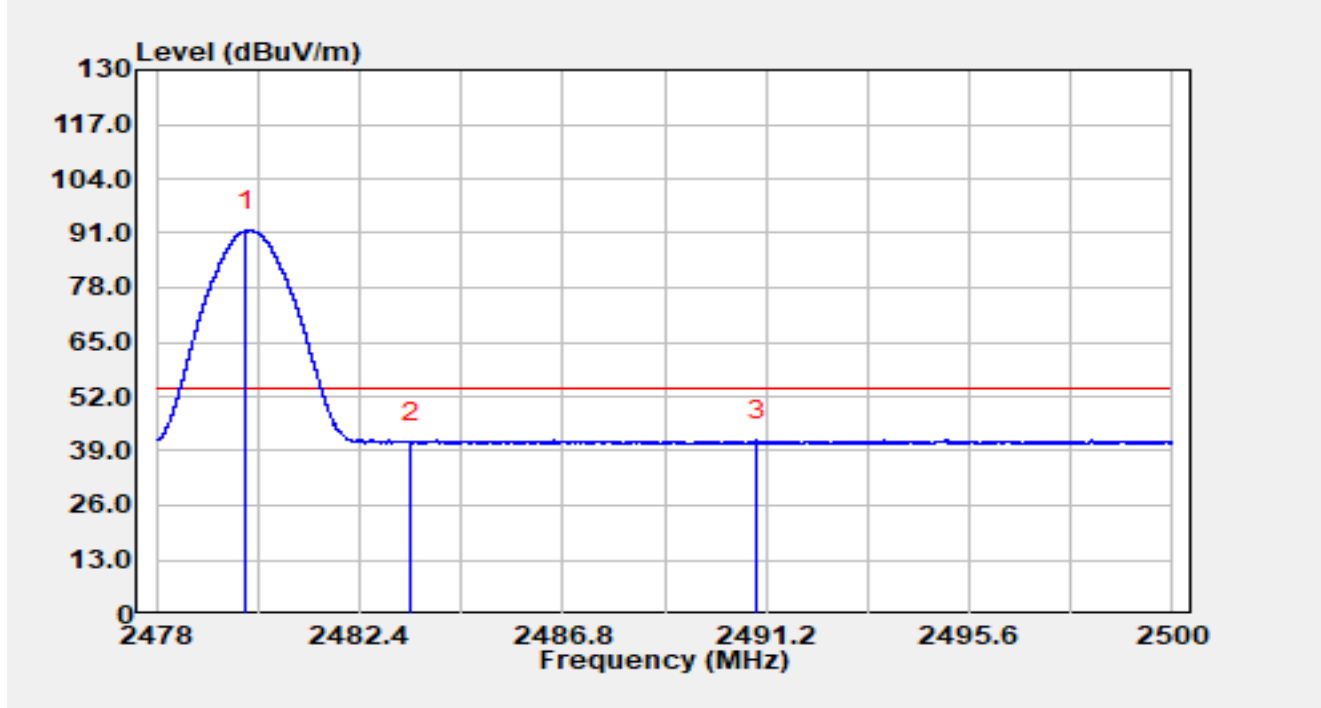


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.95	59.30	32.40	91.71	N/A	N/A	Average
2		2483.50	8.68	32.40	41.08	-12.92	54.00	Average
3	*	2491.01	9.07	32.39	41.46	-12.54	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2402MHz		

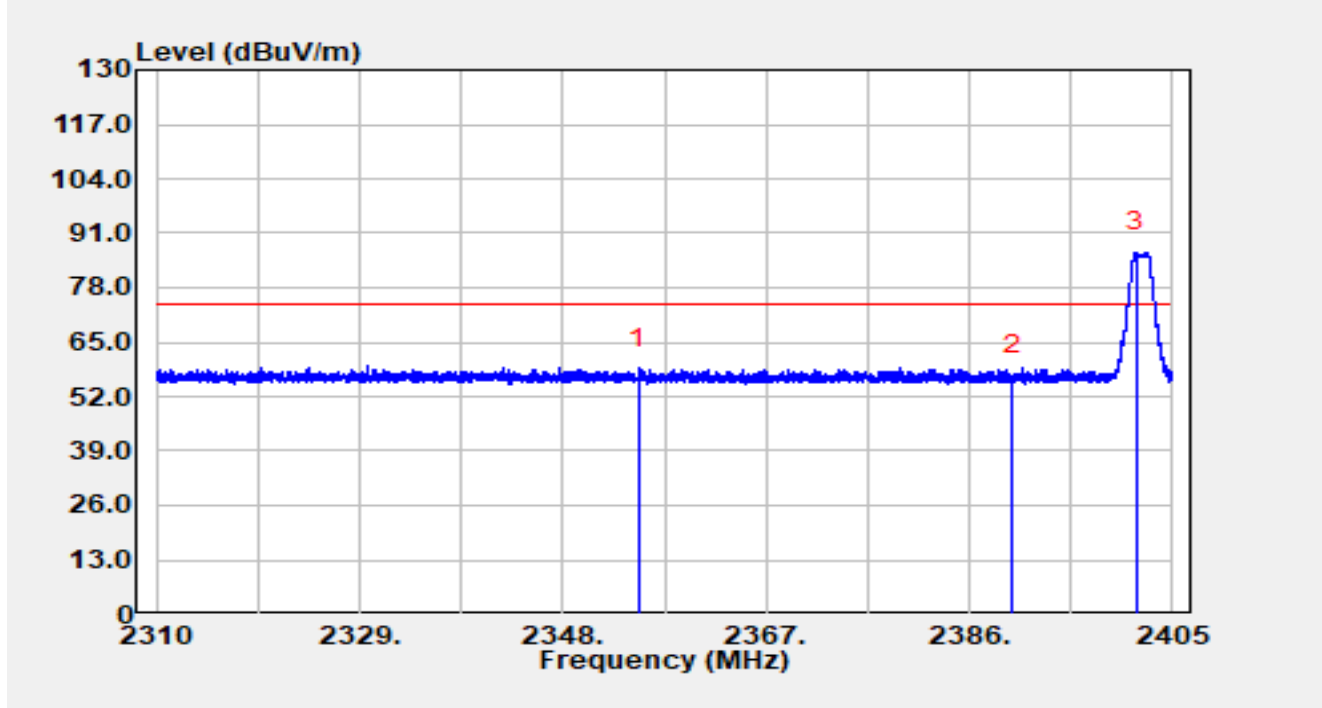


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2355.06	25.93	32.70	58.63	-15.37	74.00	Peak
2		2390.00	24.57	32.52	57.09	-16.91	74.00	Peak
3		2401.61	53.88	32.49	86.38	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2402MHz		

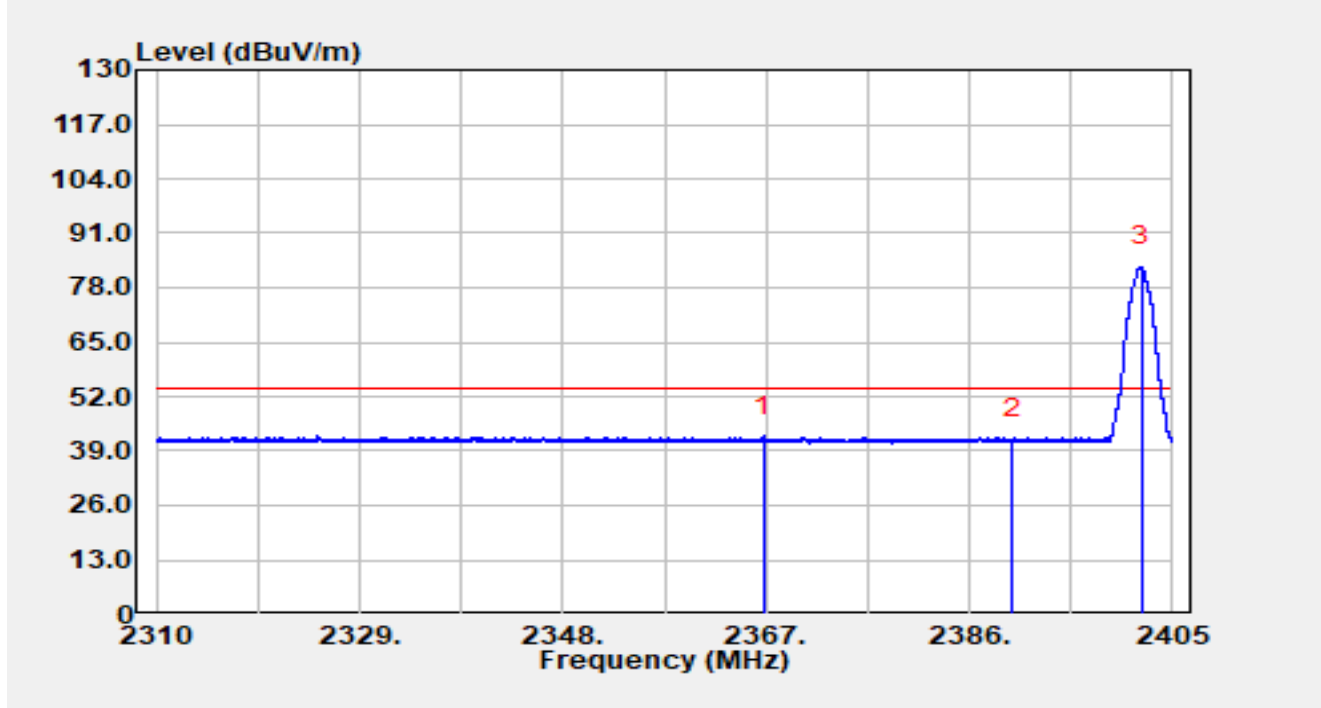


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2366.78	9.85	32.61	42.46	-11.54	54.00	Average
2		2390.00	9.28	32.52	41.80	-12.20	54.00	Average
3		2402.17	50.64	32.49	83.13	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2402MHz		

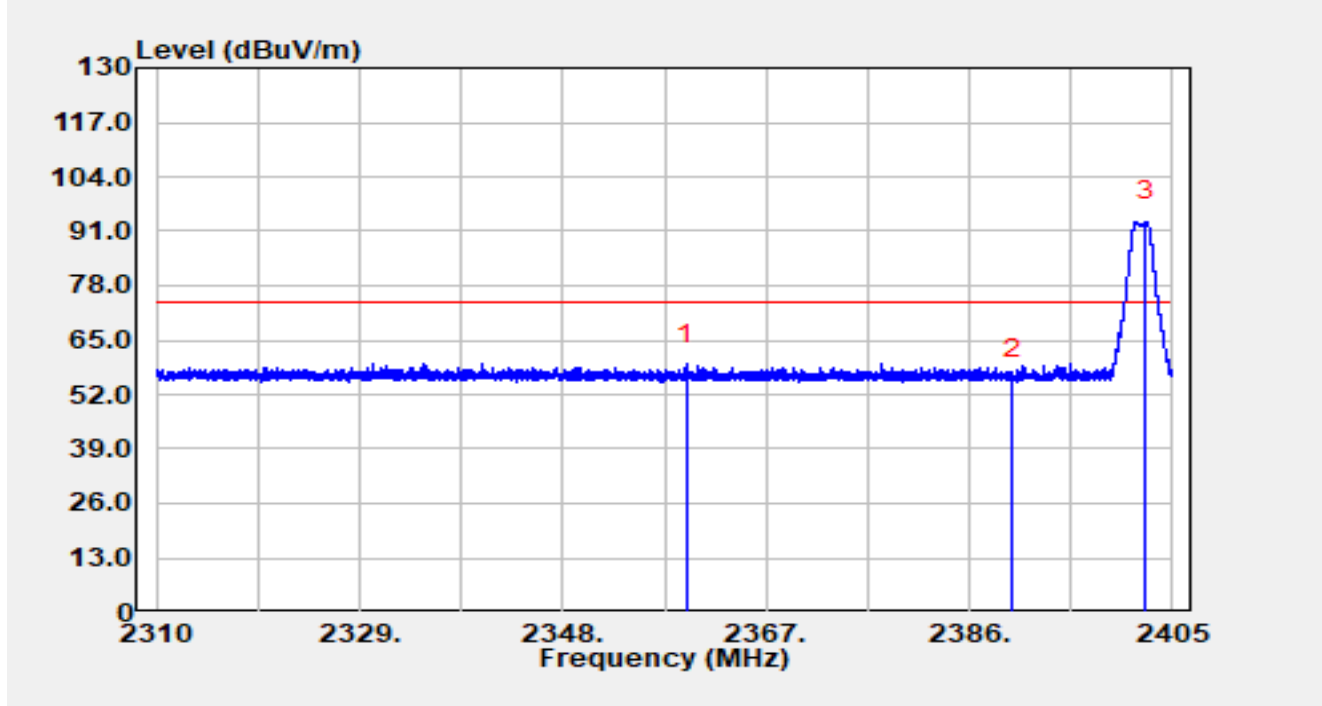


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2359.57	26.59	32.66	59.26	-14.74	74.00	Peak
2		2390.00	23.19	32.52	55.70	-18.30	74.00	Peak
3		2402.54	60.89	32.49	93.38	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2402MHz		

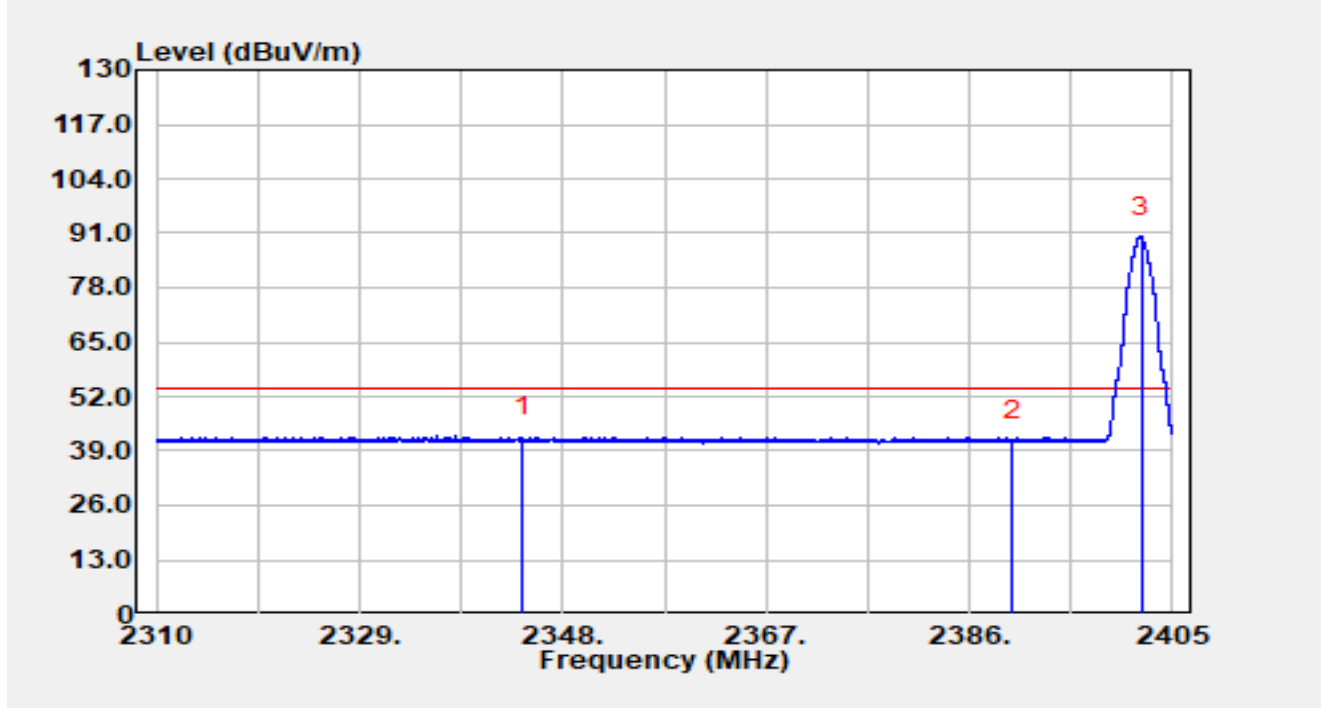


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2344.22	9.60	32.75	42.35	-11.65	54.00	Average
2		2390.00	8.90	32.52	41.42	-12.58	54.00	Average
3		2402.09	57.73	32.49	90.22	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2480MHz		

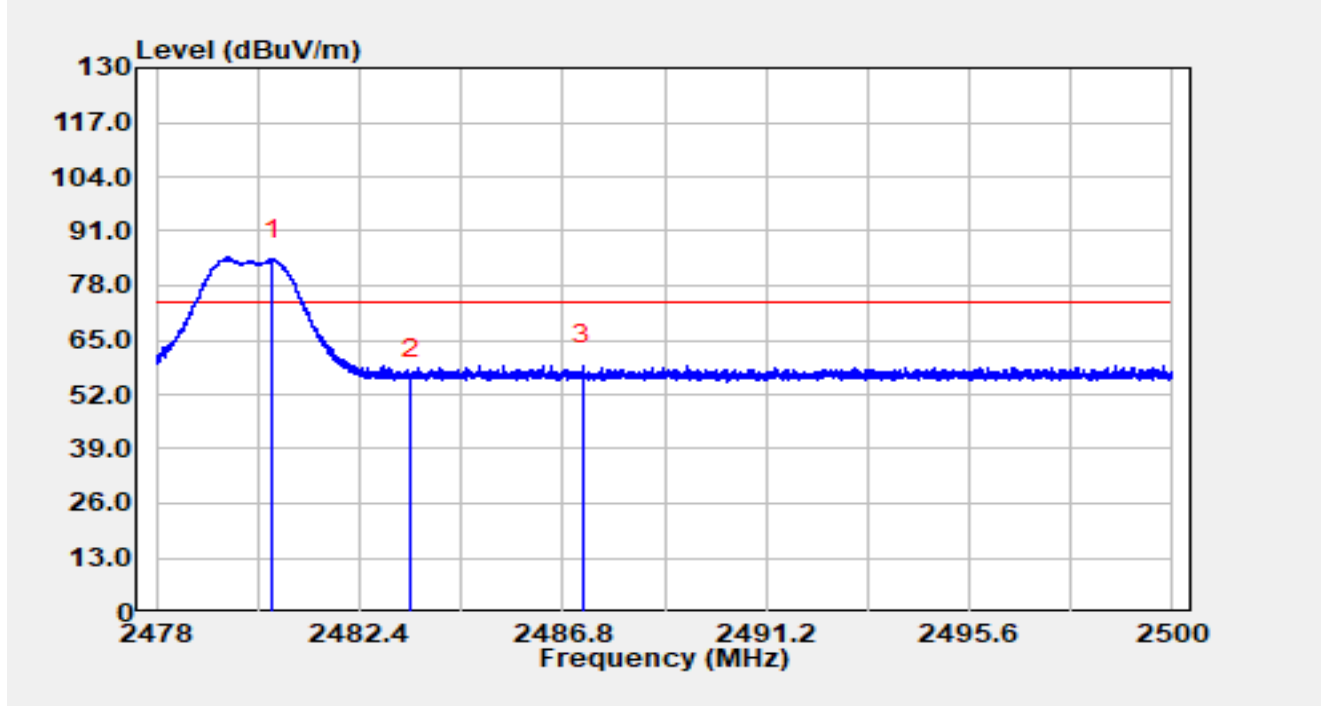


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.52	51.93	32.40	84.33	N/A	N/A	Peak
2		2483.50	23.21	32.40	55.61	-18.39	74.00	Peak
3	*	2487.22	26.61	32.39	59.00	-15.00	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2480MHz		

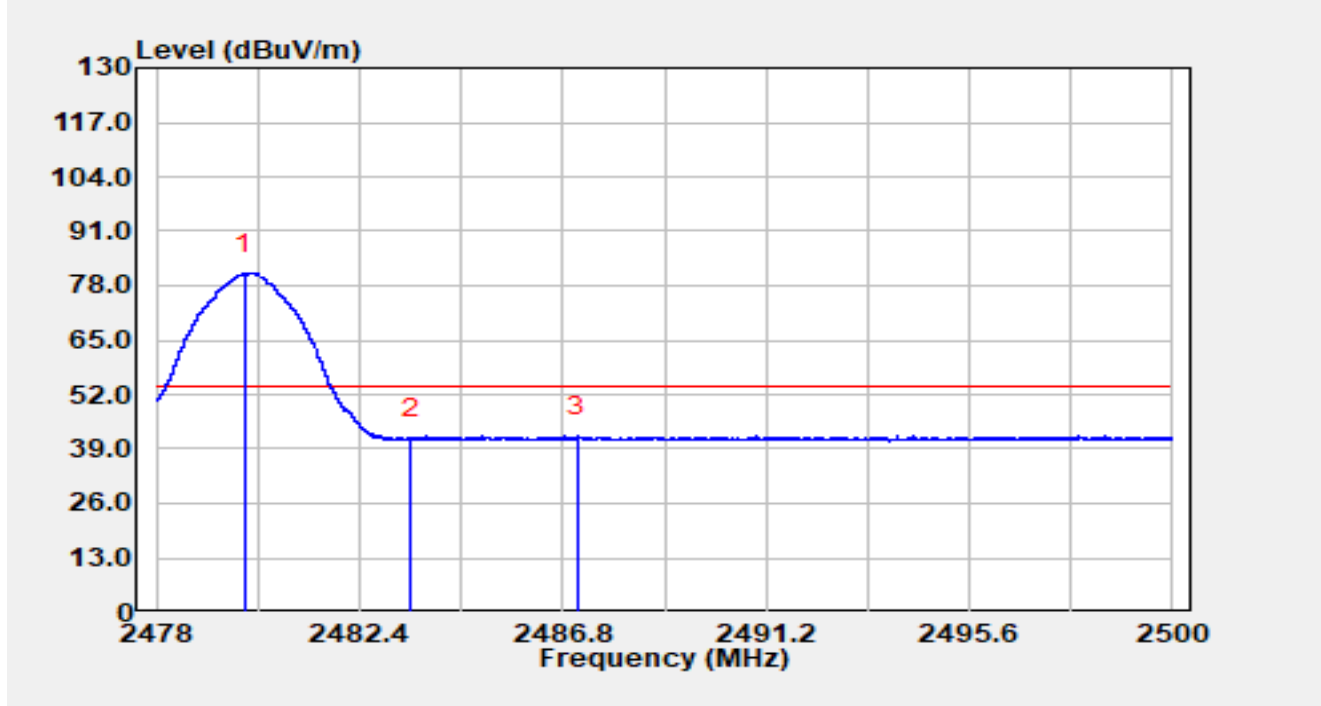


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.92	48.50	32.40	80.90	N/A	N/A	Average
2		2483.50	8.84	32.40	41.24	-12.76	54.00	Average
3	*	2487.12	9.67	32.39	42.06	-11.94	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2480MHz		

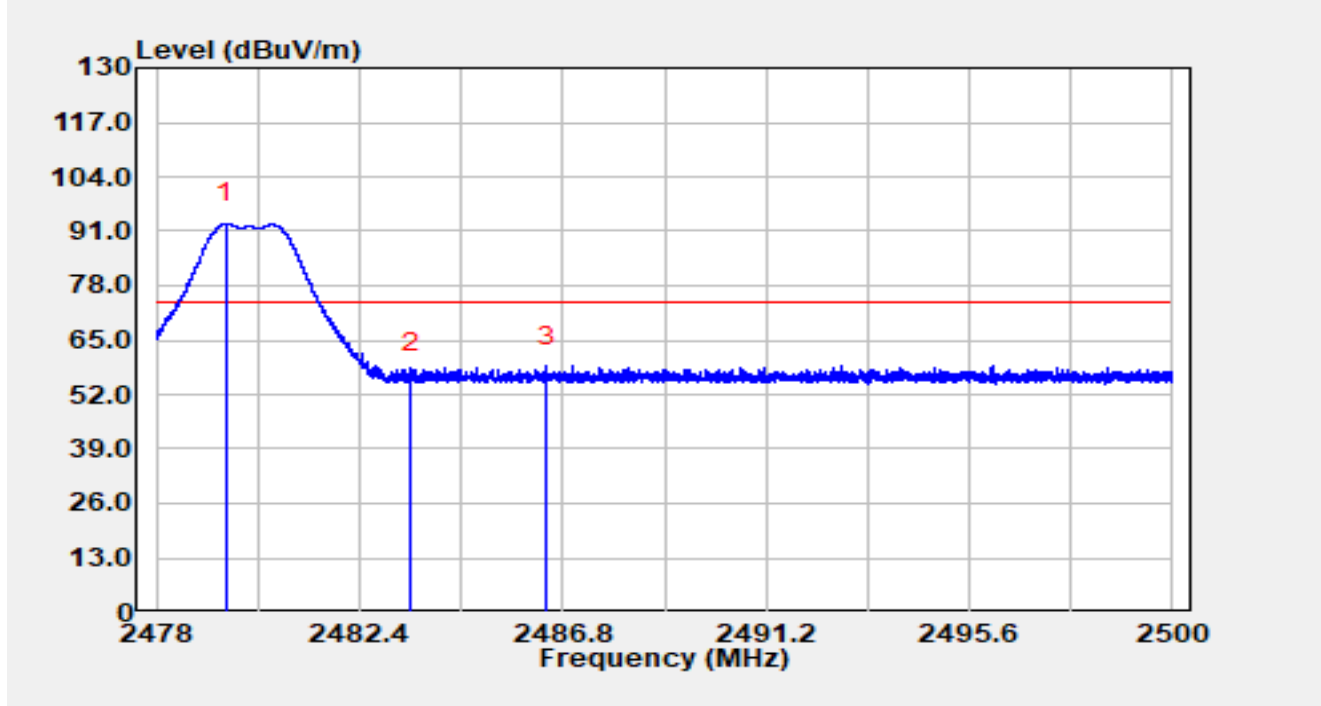


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.49	60.42	32.40	92.83	N/A	N/A	Peak
2		2483.50	24.89	32.40	57.29	-16.71	74.00	Peak
3	*	2486.44	26.38	32.39	58.78	-15.22	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-04-06
Temperature	25.2 °C	Humidity	38.5 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Barcode Reader	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE-2M at 2480MHz		

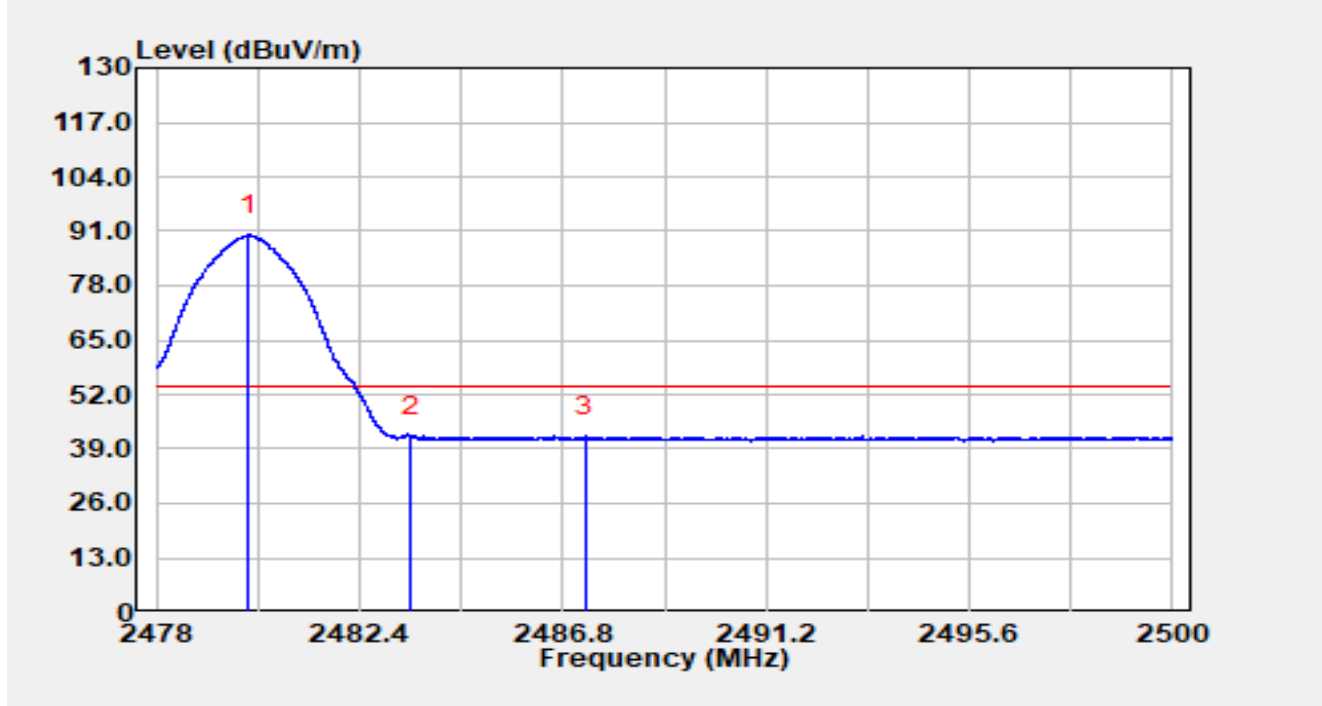

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.99	57.66	32.40	90.06	N/A	N/A	Average
2	*	2483.50	9.74	32.40	42.14	-11.86	54.00	Average
3		2487.30	9.71	32.39	42.11	-11.89	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Appendix B - Test Setup Photograph

Refer to “R25S1004041-UT” file.

Appendix C - EUT Photograph

Refer to "R25S1004041-UE" file.