

Page: 1 of 129

# SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Personal Device Assistant **Equipment Under Test** 

Datalogic **Brand Name DL-Axist** Model No.

types with WLAN/BT/NFC **TYPE** 

Datalogic ADC S.r.l. **Company Name** 

Via San Vitalino no. 13, Calderara di Reno - 40012 **Company Address** 

(Bologna) - Italy

IEEE /ANSI C95.1, C95.3, IEEE 1528, **Standards** 

> KDB248227D01v02r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB648474D04v01r03,

KDB447498D01v06,

**FCC ID** U4GDLNFCR1 **Date of Receipt** Nov. 24, 2015

Date of Test(s) Dec. 28, 2015 ~ Jan. 05, 2016

**Date of Issue** Mar. 11. 2016

In the configuration tested, the EUT complied with the standards specified above.

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

# Signed on behalf of SGS

Date: Mar. 11, 2016

**Asst. Supervisor** Sr. Engineer

ason Wu John Yeh

Date: Mar. 11, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 2 of 129

# **Revision History**

Report Number	Revision	Description	Issue Date
E5/2015/B0015	Rev.00	Initial creation of document	Jan. 11, 2015
E5/2015/B0015	Rev.01	1 <sup>st</sup> modification	Jan. 20, 2015
E5/2015/B0015	Rev.02	2 <sup>nd</sup> modification	Feb. 04, 2016
E5/2015/B0015	Rev.03	3 <sup>rd</sup> modification	Feb. 26, 2016
E5/2015/B0015	Rev.04	4 <sup>th</sup> modification	Mar. 11, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 3 of 129

# **Contents**

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	5
1.4 Test Environment	18
1.5 Operation Description	18
1.6 Positioning Procedure	20
1.7 Evaluation Procedures	21
1.8 Probe Calibration Procedures	23
1.9 The SAR Measurement System	26
1.10 System Components	28
1.11 SAR System Verification	30
1.12 Tissue Simulant Fluid for the Frequency Band	32
1.13 Test Standards and Limits	34
2. Summary of Results	36
3. Simultaneous Transmission Analysis	42
3.1 Estimated SAR calculation	43
3.2 SPLSR evaluation and analysis	43
4. Instruments List	47
5. Measurements	48
6. SAR System Performance Verification	
7. DAE & Probe Calibration Certificate	
8. Uncertainty Budget	
9. Phantom Description	
10. System Validation from Original Equipment Supplier	
To. System vanuation from Original Equipment Supplier	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 4 of 129

# 1. General Information

### 1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory					
No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan					
Tel	+886-2-2299-3279				
Fax	+886-2-2298-0488				
Internet	http://www.tw.sgs.com/				

# 1.2 Details of Applicant

Company Name	Datalogic ADC S.r.l.			
Company Address	Via San Vitalino no. 13, Calderara di Reno - 40012 (Bologna) - Italy			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 5 of 129

# 1.3 Description of EUT

Equipment Under Test	Personal Device Assistant								
Brand Name	Datalogic								
Model No.	DL-Axist								
TYPE	types with WLAN/BT/NFC	types with WLAN/BT/NFC							
FCC ID	U4GDLNFCR1								
Mode of Operation	⊠WLAN802.11 a/b/g/n(20M/40M)	⊠Bluet	ooth						
Duty Cycle	WLAN 802.11 a/b/g/n(20M/40M)		1						
Duty Cycle	Bluetooth		1						
	WLAN 802.11 b/g/n(20M)	2412	_	2462					
	WLAN 802.11 n(40M)	2422	_	2452					
	WLAN802.11 a/n(20M) 5.2G	5180	_	5240					
	WLAN802.11 a/n(20M) 5.3G	5260	_	5320					
	WLAN802.11 a/n(20M) 5.5G	5500	_	5700					
TX Frequency Range (MHz)	WLAN802.11 a/n(20M) 5.8G	5745	_	5825					
(1411 12)	WLAN802.11 n(40M) 5.2G	5190	_	5230					
	WLAN802.11 n(40M) 5.3G	5270	_	5310					
	WLAN802.11 n(40M) 5.5G	5510	_	5670					
	WLAN802.11 n(40M) 5.8G	5755	_	5795					
	Bluetooth	2402	_	2480					
	WLAN 802.11 b/g/n(20M)	1	_	11					
	WLAN 802.11 n(40M)	3	_	9					
Channel Number (ARFCN)	WLAN802.11 a/n(20M) 5.2G	36	_	48					
	WLAN802.11 a/n(20M) 5.3G	52	_	64					
	WLAN802.11 a/n(20M)5.6G	100	_	140					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 6 of 129

	WLAN802.11 a/n(20M)5.8G	149	_	165
	WLAN802.11 n(40M) 5.2G	38	_	46
Channel Number	WLAN802.11 n(40M) 5.3G	54	_	62
(ARFCN)	WLAN802.11 n(40M) 5.6G	102	_	134
	WLAN802.11 n(40M) 5.8G	151	_	159
	Bluetooth	0	_	78

	Max. SAR (1 g) (Unit: W/Kg)						
Antenna	Mode	Band	Measured	Reported	Position / Channel		
		WLAN802.11 b	0.093	0.095	□Left ⊠Right ⊠Cheek □Tilt <u>1</u> Channel		
		WLAN802.11 a 5.2G	0.316	0.322	□Left ⊠Right □Cheek ⊠Tilt <u>40</u> Channel		
Main	Head	Head	Head	WLAN802.11 a 5.3G	0.399	0.432	□Left ⊠Right □Cheek ⊠Tilt 56 Channel
	WLAN802.11 n(40M) 5.6G	0.096	0.104	□Left ⊠Right ⊠Cheek □Tilt 102 Channel			
		WLAN802.11 a 5.8G	0.201	0.216	□Left ⊠Right □Cheek ⊠Tilt 149 Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 7 of 129

Max. SAR (1 g) (Unit: W/Kg)						
Antenna	Mode	Band	Measured	Reported	Position / Channel	
		WLAN802.11 b	0.032	0.033	☐Front ☐Back 1Channel	
		WLAN802.11 a 5.2G	0.049	0.050	⊠Front □Back 40 Channel	
Main	Body- worn	WLAN802.11 a 5.3G	0.062	0.067	⊠Front □Back <u>56</u> Channel	
	WLAN802.11 n(40M) 5.6G	0.020	0.022	⊠Front □Back 102 Channel		
		WLAN802.11 a 5.8G	0.027	0.029	⊠Front □Back 149 Channel	

	Max. SAR (10 g) (Unit: W/Kg)						
Antenna	Mode	Band	Measured	Reported	Position / Channel		
	WLAN802.11 b	0.278	0.283	☐Front ☐Back ☐Bottom ☐Top ☑Left ☐RightChannel			
		WLAN802.11 a 5.2G	0.297	0.303	☐Front ☐Back ☐Bottom ☐Top ☑Left ☐Right <u>40</u> Channel		
Main	Hand	WLAN802.11 a 5.3G	0.404	0.438	☐Front ☐Back ☐Bottom ☐Top ☐Left ☐Right56 _Channel		
	WLAN802.11 n(40M) 5.6G	0.188	0.204	☐Front ☐Back ☐Bottom ☐Top ☐Left ☐RightChannel			
		WLAN802.11 a 5.8G	0.260	0.279	☐Front ☐Back ☐Bottom ☐Top ☑Left ☐Right <u>149</u> Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 8 of 129

Max. SAR (1 g) (Unit: W/Kg)						
Antenna	Mode	Band	Measured	Reported	Position / Channel	
		WLAN802.11 b	0.015	0.015	□Left ⊠Right ⊠Cheek □Tilt 1 Channel	
	WLAN802.11 a 5.2G	0.027	0.029	☐Left ☐Right ☐Cheek ☐Tilt ☐ 40 ☐ Channel		
Aux	Head	WLAN802.11 a 5.3G	0.075	0.082	□Left ⊠Right ⊠Cheek □Tilt56 _Channel	
		WLAN802.11 n(40M) 5.6G	0.0070	0.103	<ul><li>☑Left ☐Right</li><li>☑Cheek ☐Tilt</li><li>134 Channel</li></ul>	
		WLAN802.11 a 5.8G	0.054	0.063	□Left ⊠Right ⊠Cheek □Tilt149 _Channel	

Max. SAR (1 g) (Unit: W/Kg)						
Antenna	Mode	Band	Measured	Reported	Position / Channel	
		WLAN802.11 b	0.036	0.036	☐Front ⊠Back 1Channel	
	Aux Body- worn	WLAN802.11 a 5.2G	0.043	0.046	☐Front ☐Back 40 Channel	
Aux		WLAN802.11 a 5.3G	0.031	0.034	⊠Front □Back <u>56</u> Channel	
	WLAN802.11 n(40M) 5.6G	0.046	0.068	☐Front ☐Back 134 Channel		
		WLAN802.11 a 5.8G	0.039	0.045	⊠Front □Back <u>149</u> Channel	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 9 of 129

	Max. SAR (10 g) (Unit: W/Kg)						
Antenna	Mode	Band	Measured	Reported	Position / Channel		
	WLAN802.11 b	0.136	0.137	☐Front ☐Back ☐Bottom ☐Top ☐Left ☐Right1 _Channel			
		WLAN802.11 a 5.2G	0.137	0.147	<pre></pre>		
Aux	Hand	WLAN802.11 a 5.3G	0.136	0.149	<pre></pre>		
	WLAN802.11 n(40M) 5.6G	0.196	0.289				
		WLAN802.11 a 5.8G	0.167	0.194			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 129

# WLAN802.11 a/b/g/n (20M/40M) conducted power table:

Antenna	SI	SO	MIMO
Band	Chain 0	Chain 1	Chain0+1
WLAN802.11b	V	V	_
WLAN802.11g	V	V	-
WLAN802.11n(20M)	V	V	V
WLAN802.11n(40M)	V	V	-
WLAN802.11a	V	V	
WLAN802.11n(20M) 5G	V	V	_
WLAN802.11n(40M) 5G	V	V	_

Main (CH0)

11131111	<del></del>		
	802.11 b	Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
Сп	(MHz)	Tolerance (dBm)	1
1	2412	14.5	14.42
6	2437	14.5	14.16
11	2462	14.5	13.92

	802.11 g	Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)	Tolerance (dBm)	6
1	2412	11.5	11.25
6	2437	11.5	11.14
11	2462	11.5	10.67

802	2.11 n(20M)	Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)	Tolerance (dBm)	6.5
1	2412	13	11.98
6	2437	13	11.64
11	2462	13	11.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 129

# Main (CH0)

802.11 n(40M)		Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)	Tolerance (dBm)	13.5
3	2422	10	9.61
6	2437	11.5	10.15
9	2452	10	9.15

8	302.11 a		Average Dower Output(dPm)
5.2/5.3/5.6/5.8G		Max. Rated Avg. Power + Max.	Average Power Output(dBm)
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)
СП	(MHz)		6
36	5180	11.5	11.12
40	5200	11.5	11.42
44	5220	11.5	10.97
48	5240	11.5	10.95
52	5260	11.5	10.51
56	5280	11.5	11.15
60	5300	11.5	10.65
64	5320	11.5	11.13
100	5500	10	9.13
116	5580	10	9.49
120	5600	10	10.00
140	5700	10	8.71
149	5745	9	8.69
157	5785	9	8.47
165	5825	9	8.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 12 of 129

### Main (CH0)

·пи)		
.11 n(20M)		Average Power Output(dBm)
5.3/5.6/5.8G	Max. Rated Avg.	Average i ower output(ubili)
Frequency	Tolerance (dBm)	Data Rate (Mbps)
(MHz)		6.5
5180	11.5	11.10
5200	11.5	11.43
5220	11.5	11.50
5240	11.5	11.49
5260	11.5	10.69
5280	11.5	11.37
5300	11.5	10.67
5320	11.5	10.66
5500	10	9.31
5580	10	9.54
5600	10	9.98
5700	10	8.82
5745	9	8.79
5785	9	8.57
5825	9	8.29
	5.3/5.6/5.8G  Frequency (MHz)  5180  5200  5220  5240  5260  5280  5300  5320  5500  5580  5600  5700  5745  5785	5.3/5.6/5.8G       Max. Rated Avg. Power + Max. Tolerance (dBm)         5180       11.5         5200       11.5         5220       11.5         5240       11.5         5280       11.5         5300       11.5         5320       11.5         5500       10         5580       10         5600       10         5700       10         5745       9         5785       9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 129

# Main (CH0)

IVIAIII (C	мані (CHU)			
802	.11 n(40M)		Average Dower Output(dPm)	
5.2/5.3/5.6/5.8G		Max. Rated Avg.	Average Power Output(dBm)	
CLI	Frequency	Power + Max. Tolerance (dBm)	Data Rate (Mbps)	
СН	(MHz)	, , ,	13.5	
38	5190	10.5	10.50	
46	5230	10.5	10.31	
54	5270	10.5	10.05	
62	5310	10.5	10.12	
102	5510	11	10.65	
110	5550	11	10.95	
118	5590	11	9.47	
126	5630	11	9.28	
134	5670	11	9.68	
151	5755	8	7.21	
159	5795	8	6.77	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 14 of 129

# Aux (CH1)

Aux (O	· · · · <i>)</i>		
	802.11 b	Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)	Tolerance (dBm)	1
1	2412	14.5	14.46
6	2437	14.5	14.21
11	2462	14.5	13.99

	802.11 g	Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)	Tolerance (dBm)	6
1	2412	11.5	11.3
6	2437	11.5	11.19
11	2462	11.5	10.76

802	2.11 n(20M)	Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)	Tolerance (dBm)	6.5
1	2412	13	11.99
6	2437	13	11.68
11	2462	13	11.29

802	2.11 n(40M)	Max. Rated Avg.	Average Power Output (dBm)
СН	Frequency	Power + Max.	Data Rate (Mbps)
СП	(MHz)	Tolerance (dBm)	13.5
3	2422	10	9.65
6	2437	11.5	11.23
9	2452	10	9.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 129

# Aux (CH1)

8	302.11 a		Average Device Output/dDm	
5.2/5.3/5.6/5.8G		Max. Rated Avg. Power + Max.	Average Power Output(dBm)	
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)	
OH	(MHz)		6	
36	5180	11.5	10.74	
40	5200	11.5	11.20	
44	5220	11.5	10.54	
48	5240	11.5	10.91	
52	5260	11.5	10.48	
56	5280	11.5	11.10	
60	5300	11.5	10.51	
64	5320	11.5	10.45	
100	5500	10	8.81	
116	5580	10	9.41	
120	5600	10	9.67	
140	5700	10	8.31	
149	5745	9	8.35	
157	5785	9	8.34	
165	5825	9	8.04	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 16 of 129

# Aux (CH1)

Aux (Ch1)							
802	.11 n(20M)		Average Power Output(dBm)				
5.2/5	5.3/5.6/5.8G	Max. Rated Avg. Power + Max.	Average i ower output(dbiii)				
	Frequency	Tolerance (dBm)	Data Rate (Mbps)				
СН	(MHz)		6.5				
36	5180	11.5	11.05				
40	5200	11.5	11.39				
44	5220	11.5	11.35				
48	5240	11.5 11.5	11.48				
52	5260		10.64				
56	5280	11.5	11.32				
60	5300	11.5	10.51				
64	5320	11.5	10.52				
100	5500	10	9.05				
116	5580	10	9.44				
120	5600	10	9.57				
140	5700	10	8.38				
149	5745	9	8.49				
157	5785	9	8.31				
165	5825	9	8.21				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 17 of 129

# Aux (CH1)

Aux (Ci	Aux (CH1)								
802	.11 n(40M)		Average Power Output(dBm)						
5.2/5.3/5.6/5.8G		Max. Rated Avg. Power + Max.	Average i ower Odiput(dbiii)						
СН	Frequency	Tolerance (dBm)	Data Rate (Mbps)						
СП	(MHz)		13.5						
38	5190	10.5	10.40						
46	5230	10.5	10.21						
54	5270	10.5	9.73						
62	5310	10.5	10.03						
102	5510	11	9.10						
110	5550	11	10.51						
118	5590	11	9.15						
126	5630	11	9.08						
134	5670	11	9.31						
151	5755	8	7.14						
159	5795	8	6.60						

#### MIMO (CH0 + CH1)

	WLAN802.1	1 n (20M)	Average Power Output (dBm)					
	_	Max. Rated Avg.	Data Rate					
СН	Frequency (MHz)	Power + Max. Tolerance (dBm)	HT8					
			ch 0	ch 1	ch 0+1			
1	2412	16	12.80	12.05	15.45			
6	2437	16	13.20	12.20	15.74			
11	2462	16	13.05	12.61	15.85			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 18 of 129

#### 1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

# 1.5 Operation Description

- 1. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- 2. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- 3. Testing head SAR at lowest, middle and highest channel for all bands with Left Tilt /Left Cheek/Right Tilt/Right Cheek conditions.
- 4. Testing body-worn SAR for front and backside by separating the EUT and the phantom 15mm.
- 5. Since an overall diagonal dimension of the device > 16.0 cm, the phablet procedures are applied to evaluate SAR compliance for each applicable wireless mode and frequency band. Testing SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR.
- 6. According to KDB447498D01v06 The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by: [(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-q SAR, SAR evaluation is not required.

			front/back sides			
Mode	Maximum power (dBm)	Maximum power(mW)	test separation distance (mm)	Exclusion threshold	Require SAR testing?	
ВТ	4.5	2.818	15	0.296	NO	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 19 of 129

# 802.11b DSSS SAR Test Requirements:

- 7. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 8. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

### 802.11g/n OFDM SAR Test Exclusion Requirements:

 SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

#### Initial Test Configuration:

- 10. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- 11. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 12.BT and Main use the same antenna path and Bluetooth can't transmit simultaneously with Main.
- 13. For the 2<sup>nd</sup> battery, the highest reported SAR for each wireless technology, frequency band, and applicable exposure condition must be repeated with the additional battery.
- 14. According to KDB447498D01v05r02, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is  $\leq$  0.8 W/kg, when the transmission band is  $\leq$  100 MHz.
- 15. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


\*\*SGS Taiwan Ltd.\*\*

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號




Page: 20 of 129

# 1.6 Positioning Procedure

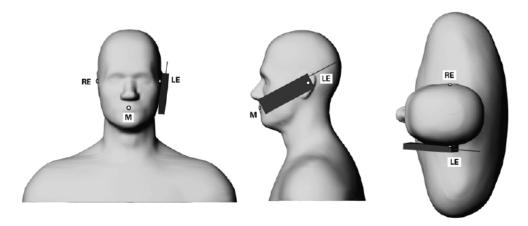

Phone position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

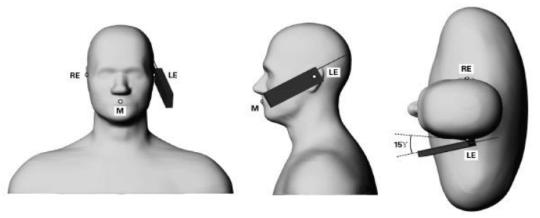

Phone position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

#### Cheek/Touch Position:

The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

### Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 129

#### 1.7 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- 3. The generation of a high-resolution mesh within the measured volume.
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid.
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 22 of 129

placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 23 of 129

#### 1.8 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

### 1.8.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ( $\delta T / \delta t$ ) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

Whereby  $\sigma$  is the conductivity,  $\rho$  the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 24 of 129

thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- 2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- 3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about  $\pm 10\%$  (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is  $\pm 5\%$  (RSS) when the same liquid is used for the calibration and for actual measurements and  $\pm 7$ -9% (RSS) when not, which is in good agreement with the estimates given in [2].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The



Page: 25 of 129

# 1.8.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power).

This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- 2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- 3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

#### References

- [1] N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- [2] K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- [3] K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 26 of 129

# 1.9 The SAR Measurement System

A block diagram of the SAR measurement system is given in Fig. a. This SAR measurement system uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). Model EX3DV4 field probes are used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  (|Ei|2)/  $\rho$ where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

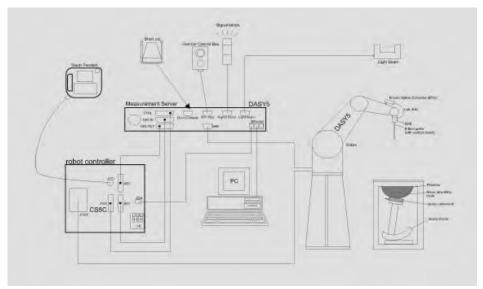


Fig. a A block diagram of the SAR measurement system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 27 of 129

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows7
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones. 11.
- 12. Tissue simulating liquid mixed according to the given recipes.
- 13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 28 of 129

# 1.10 System Components

#### **EX3DV4 E-Field Probe**

Symmetrical design with triangular core					
Built-in shielding against static charges					
PEEK enclosure material (resistant to					
organic solvents, e.g., DGBE)					
Basic Broad Band Calibration in air					
Conversion Factors (CF) for					
HSL2450/5200/5300/5600/5800 MHz					
Additional CF for other liquids and					
frequencies upon request					
10 MHz to > 6 GHz, Linearity: ± 0.6 dB					
± 0.3 dB in HSL (rotation around probe axis)					
± 0.5 dB in tissue material (rotation normal to probe axis)					
$10 \mu W/g \text{ to > } 100 \text{ mW/g}$					
Linearity: ± 0.2 dB (noise: typically < 1 μW/g)					
ensions Tip diameter: 2.5 mm					
High precision dosimetric measurements in any exposure scenario					
(e.g., very strong gradient fields). Only probe which enables					
compliance testing for frequencies up to 6 GHz with precision of					
better 30%.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 29 of 129

### SAM DHANTOM VA OC

SAM PHANTO	OM V4.0C					
Construction:	The shell corresponds to the spec	The shell corresponds to the specifications of the Specific				
	Anthropomorphic Mannequin (SAI	M) phantom defined in IEEE 1528				
	and IEC 62209.					
	It enables the dosimetric evaluation	on of left and right hand phone				
	usage as well as body mounted us	sage at the flat phantom region. A				
	cover prevents evaporation of the	liquid. Reference markings on the				
	phantom allow the complete setup	o of all predefined phantom				
	positions and measurement grids	by manually teaching three points				
	with the robot.					
Shell	2 ± 0.2 mm					
Thickness:		The state of				
Filling	Approx. 25 liters	1				
Volume:						
Dimensions:	Height: 850 mm;					
	Length: 1000 mm;					
	Width: 500 mm					

# **DEVICE HOLDER**

Construction	In combination with the Twin SAM Phantom	
	V4.0/V4.0C or Twin SAM, the Mounting	
	Device (made from POM) enables the	
	rotation of the mounted transmitter in	
	spherical coordinates, whereby the rotation	
	point is the ear opening. The devices can	
	be easily and accurately positioned	
	according to IEC, IEEE, CENELEC, FCC or	
	other specifications. The device holder can	
	be locked at different phantom locations	

(left head, right head, flat phantom).



**Device Holder** 

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 30 of 129

# 1.11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% (according to KDB865664D01v01r04) from the target SAR values.

These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the ambient temperature of the laboratory was  $21.7^{\circ}$ C, the relative humidity was 62% and the liquid depth above the ear reference points was above 15 cm ( $\leq 3G$ ) or 10 cm (>3G) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

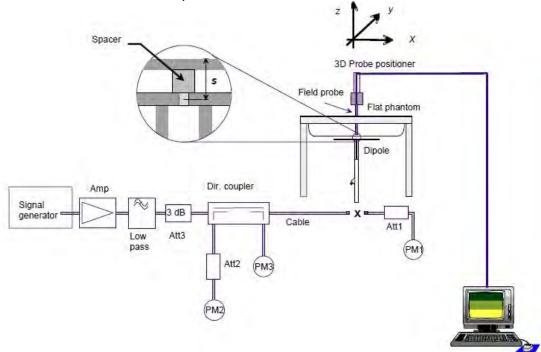


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 31 of 129

Validation Kit	S/N	Frequ (MI	,	1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	727	2450	Head	52	13.2	52.8	1.54%	Dec. 28, 2015
D2430 V Z	121	2430	Body	51	12.9	51.6	1.18%	Dec. 29, 2015
		5200	Head	77.9	7.99	79.9	2.57%	Dec. 30, 2015
	1023		Body	73.5	7.29	72.9	-0.82%	Jan. 02, 2016
		5300	Head	81.7	8.12	81.2	-0.61%	Dec. 30, 2015
D5GHzV2			Body	74.6	7.5	75	0.54%	Jan. 03, 2016
DOGHZVZ	1023	5600	Head	81.4	8.01	80.1	-1.60%	Dec. 31, 2015
		5600	Body	77.9	8.07	80.7	3.59%	Jan. 04, 2016
		5800	Head	78.2	8.05	80.5	2.94%	Jan. 01, 2016
			Body	75.6	7.42	74.2	-1.85%	Jan. 05, 2016

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 32 of 129

# 1.12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was at least 15 cm (≤3G) or 10 cm (>3G) during all tests. (Appendix Fig. 2)

Tissue Type	Measured Frequency (MHz)	Target Dielectric Constant, Er	Target Conductivity, σ (S/m)	Measured Dielectric Constant, Er	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Measurement Date
	2412	39.268	1.766	39.473	1.792	-0.52%	-1.47%	Dec. 28, 2015
	2450	39.200	1.800	39.283	1.839	-0.21%	-2.17%	Dec. 26, 2015
	5200	35.986	4.655	36.541	4.672	-1.54%	-0.37%	Dec. 30, 2015
	5280	35.894	4.737	36.199	4.784	-0.85%	-0.99%	Dec. 30, 2015
Head	5300	35.871	4.758	36.142	4.808	-0.76%	-1.05%	Dec. 30, 2015
Heau	5510	35.631	4.973	35.748	5.108	-0.33%	-2.71%	
	5600	35.494	5.096	35.552	5.216	-0.16%	-2.35%	Dec. 31, 2015
	5670	35.449	5.137	35.437	5.265	0.03%	-2.49%	
	5745	35.363	5.214	35.336	5.385	0.08%	-3.28%	Jan. 01, 2016
	5800	35.300	5.270	35.203	5.459	0.27%	-3.59%	Jan. 01, 2016
	2412	52.751	1.914	53.004	1.903	-0.48%	0.57%	Dec. 29, 2015
	2450	52.700	1.950	52.813	1.956	-0.21%	-0.31%	Dec. 29, 2015
	5200	49.014	5.299	47.530	5.195	3.03%	1.96%	Jan. 02, 2016
	5280	48.906	5.393	47.320	5.339	3.24%	1.00%	Jan. 03, 2016
Body	5300	48.879	5.416	47.298	5.356	3.23%	1.11%	Jan. 03, 2010
Войу	5510	48.594	5.661	47.023	5.772	3.23%	-1.96%	
	5600	48.431	5.801	46.863	5.852	3.24%	-0.88%	Jan. 04, 2016
	5670	48.376	5.848	46.793	5.904	3.27%	-0.96%	
	5745	48.275	5.936	46.650	6.160	3.37%	-3.77%	Jan. 05, 2016
	5800	48.200	6.000	46.520	6.246	3.49%	-4.10%	Jan. 03, 2010

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 33 of 129

# The composition of the tissue simulating liquid:

			1 0 1					
				Ing	redient			Tatal
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount
0.450	Head	550ml	450ml	_	_	_	-	1.0L(Kg)
2450	Body	301.7ml	698.3ml	_	_	_	_	1.0L(Kg)

# Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt		
(% by weight)	60-80	20-40	0-1.5		

Table 3. Recipes for tissue simulating liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 34 of 129

### 1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 35 of 129

Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .6)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table 4. RF exposure limits

#### Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 36 of 129

# 2. Summary of Results

#### WLAN802.11 b

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dRm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page	
									Measured	Reported		
Main B		RE Cheek	-	1	2412	14.5	14.42	1.86%	0.093	0.095	48	
	Head	RE Tilt	-	1	2412	14.5	14.42	1.86%	0.076	0.077	-	
	пеац	LE Cheek	-	1	2412	14.5	14.42	1.86%	0.075	0.076	-	
			LE Tilt	-	1	2412	14.5	14.42	1.86%	0.056	0.057	-
	Body- worn	Front side	15	1	2412	14.5	14.42	1.86%	0.027	0.028	-	
		Back side	15	1	2412	14.5	14.42	1.86%	0.032	0.033	49	

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dRm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 10g (W/kg)		Plot page
									Measured	Reported	
Main	Hand	Front side	0	1	2412	14.5	14.42	1.86%	0.044	0.045	-
		Back side	0	1	2412	14.5	14.42	1.86%	0.081	0.083	-
		Top side	0	1	2412	14.5	14.42	1.86%	0.058	0.059	-
		Left side	0	1	2412	14.5	14.42	1.86%	0.278	0.283	50

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dRm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page	
			,						Measured	Reported		
Aux	Head	RE Cheek	-	1	2412	14.5	14.46	0.93%	0.015	0.015	51	
		RE Tilt	-	1	2412	14.5	14.46	0.93%	0.00446	0.005	-	
		LE Cheek	-	1	2412	14.5	14.46	0.93%	0.011	0.011	-	
				LE Tilt	-	1	2412	14.5	14.46	0.93%	0.00615	0.006
	Body- worn	Front side	15	1	2412	14.5	14.46	0.93%	0.018	0.018	-	
		Back side	15	1	2412	14.5	14.46	0.93%	0.036	0.036	52	

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 10g (W/kg)		Plot page
									Measured	Reported	
		Front side	0	1	2412	14.5	14.46	0.93%	0.081	0.082	-
		Back side	0	1	2412	14.5	14.46	0.93%	0.129	0.130	-
Aux	Hand	Bottom side	0	1	2412	14.5	14.46	0.93%	0.136 0.13	0.137	53
		Right side	0	1	2412	14.5	14.46	0.93%	0.087	0.088	-
		Left side	0	1	2412	14.5	14.46	0.93%	0.016	0.016	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 37 of 129

#### WLAN802.11 a 5.2G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	U	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
	Head	RE Cheek	-	40	5200	11.5	11.42	1.86%	0.243	0.248	-
		RE Tilt	-	40	5200	11.5	11.42	1.86%	0.316	0.322	54
Main	пеац	LE Cheek	-	40	5200	11.5	11.42	1.86%	0.113	0.115	-
IVIAIII		LE Tilt	-	40	5200	11.5	11.42	1.86%	0.111	0.113	-
	Body-	Front side	15	40	5200	11.5	11.42	1.86%	0.049	0.050	55
	worn	Back side	15	40	5200	11.5	11.42	1.86%	0.027	0.028	-

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
			, ,			Tolerance (dBm)	(dBm)		Measured	Reported	
		Front side	0	40	5200	11.5	11.42	1.86%	0.109	0.111	-
Main	Hand	Back side	0	40	5200	11.5	11.42	1.86%	0.078	0.079	-
IVIAIII	Hand -	Top side	0	40	5200	11.5	11.42	1.86%	0.155	0.158	-
		Left side	0	40	5200	11.5	11.42	1.86%	0.297	0.303	56

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	_	Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
	Head	RE Cheek	-	40	5200	11.5	11.20	7.15%	0.027	0.029	57
		RE Tilt	-	40	5200	11.5	11.20	7.15%	0.0048	0.005	-
Aux	Heau	LE Cheek	-	40	5200	11.5	11.20	7.15%	0.026	0.028	-
Aux	-	LE Tilt	-	40	5200	11.5	11.20	7.15%	0.00291	0.003	-
	Body- worn	Front side	15	40	5200	11.5	11.20	7.15%	0.032	0.034	-
		Back side	15	40	5200	11.5	11.20	7.15%	0.043	0.046	58

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
		Front side	0	40	5200	11.5	11.20	7.15%	0.137	0.147	59
		Back side	0	40	5200	11.5	11.20	7.15%	0.019	0.020	-
Aux	Hand	Bottom side	0	40	5200	11.5	11.20	7.15%	0.039	0.042	-
		Right side	0	40	5200	11.5	11.20	7.15%	0.056	0.060	-
		Left side	0	40	5200	11.5	11.20	7.15%	0.00279	0.003	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 129

#### WLAN802.11 a 5.3G

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
	Head	RE Cheek	-	56	5280	11.5	11.15	8.39%	0.320	0.347	-
		RE Tilt	-	56	5280	11.5	11.15	8.39%	0.399	0.432	60
Main	Heau	LE Cheek	-	56	5280	11.5	11.15	8.39%	0.141	0.153	-
iviaiii	-	LE Tilt	-	56	5280	11.5	11.15	8.39%	0.123	0.133	-
	Body-	Front side	15	56	5280	11.5	11.15	8.39%	0.062	0.067	61
	worn	Back side	15	56	5280	11.5	11.15	8.39%	0.031	0.034	-

Antenna	Mode	e Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
		Front side	0	56	5280	11.5	11.15	8.39%	0.141	0.153	-
Main	Hand	Back side	0	56	5280	11.5	11.15	8.39%	0.088	0.095	-
IVIAIII	Tianu	Top side	0	56	5280	11.5	11.15	8.39%	0.230	0.249	-
		Left side	0	56	5280	11.5	11.15	8.39%	0.404	0.438	62

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	_	Plot page
			, ,		,	Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	56	5280	11.5	11.10	9.65%	0.075	0.082	63
	Head	RE Tilt	-	56	5280	11.5	11.10	9.65%	0.00195	0.002	-
Aux	Heau	LE Cheek	-	56	5280	11.5	11.10	9.65%	0.046	0.050	-
Aux	-	LE Tilt	-	56	5280	11.5	11.10	9.65%	0.00633	0.007	-
	Body-	Front side	15	56	5280	11.5	11.10	9.65%	0.031	0.034	64
	worn	Back side	15	56	5280	11.5	11.10	9.65%	0.028	0.031	-

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
		Eropt side	,			Tolerance (dBm)	(dBm)		Measured	Reported	
		Front side	0	56	5280	11.5	11.10	9.65%	0.136	0.149	65
		Back side	0	56	5280	11.5	11.10	9.65%	0.080	0.088	-
Aux	Hand	Bottom side	0	56	5280	11.5	11.10	9.65%	0.030	0.033	-
		Right side	0	56	5280	11.5	11.10	9.65%	0.034	0.037	-
		Left side	0	56	5280	11.5	11.10	9.65%	0.00608	0.007	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

 SGS Taiwan Ltd.
 No.134,Wu Kung Road, N

 台灣檢驗科技股份有限公司
 t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 39 of 129

### WLAN802.11 n(40M) 5.6G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
	Head	RE Cheek	-	102	5510	11	10.65	8.39%	0.096	0.104	66
		RE Tilt	-	102	5510	11	10.65	8.39%	0.093	0.101	-
Main	пеац	LE Cheek	-	102	5510	11	10.65	8.39%	0.047	0.051	-
IVIAIII	-	LE Tilt	-	102	5510	11	10.65	8.39%	0.042	0.046	-
	Body-	Front side	15	102	5510	11	10.65	8.39%	0.020	0.022	67
	worn	Back side	15	102	5510	11	10.65	8.39%	0.00977	0.011	-

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
		Front side	0	102	5510	11	10.65	8.39%	0.043	0.047	-
Main	Hand	Back side	0	102	5510	11	10.65	8.39%	0.023	0.025	-
iviaiii	Hand –	Top side	0	102	5510	11	10.65	8.39%	0.061	0.066	-
		Left side	0	102	5510	11	10.65	8.39%	0.188	0.204	68

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	•	Plot page
			,			Tolerance (dBm)	(dBm)		Measured	Reported	. 0
	Head	RE Cheek	-	134	5670	11	9.31	47.57%	0.068	0.100	-
		RE Tilt	-	134	5670	11	9.31	47.57%	0.00537	0.008	-
Aux	Heau	LE Cheek	-	134	5670	11	9.31	47.57%	0.070	0.103	69
Aux	-	LE Tilt	-	134	5670	11	9.31	47.57%	0.00124	0.002	-
	Body- worn	Front side	15	134	5670	11	9.31	47.57%	0.045	0.066	-
		Back side	15	134	5670	11	9.31	47.57%	0.046	0.068	70

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
					, ,	Tolerance (dBm)	(dBm)		Measured	Reported	
		Front side	0	134	5670	11	9.31	47.57%	0.196	0.289	71
		Back side	0	134	5670	11	9.31	47.57%	0.057	0.084	-
Aux	Hand	Bottom side	0	134	5670	11	9.31	47.57%	0.027	0.040	-
		Right side	0	134	5670	11	9.31	47.57%	0.056	0.083	-
		Left side	0	134	5670	11	9.31	47.57%	0.00796	0.012	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 40 of 129

#### WLAN802.11 a 5.8G

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Avg. Power + Max.	Measured Avg. Power	Scaling	(VV/Kg)		Plot page
		DE 01			. ,	Tolerance (dRm)	(dBm)		Measured	Reported	
		RE Cheek	-	149	5745	9	8.69	7.40%	0.160	0.172	-
	Head	RE Tilt	-	149	5745	9	8.69	7.40%	0.201	0.216	72
Main	Heau	LE Cheek	-	149	5745	9	8.69	7.40%	0.088	0.095	-
IVIAIII		LE Tilt	-	149	5745	9	8.69	7.40%	0.080	0.086	-
	Body-	Front side	15	149	5745	9	8.69	7.40%	0.027	0.029	73
	worn	Back side	15	149	5745	9	8.69	7.40%	0.00980	0.011	-

Antenna	Mode	e Position	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
			, ,		, ,	Tolerance (dBm)	(dBm)		Measured	Reported		
		Front side	0	149	5745	9	8.69	7.40%	0.056	0.060	-	
Main	Hand	Back side	0	149	5745	9	8.69	7.40%	0.013	0.014	-	
ivialii	Tiallu	Top side	0	149	5745	9	8.69	7.40%	0.079	0.085	-	
		Left side	0	149	5745	9	8.69	7.40%	0.260	0.279	74	

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max.	Measured Avg. Power	Scaling			Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	149	5745	9	8.35	16.14%	0.054	0.063	75
	Head	RE Tilt	-	149	5745	9	8.35	16.14%	0.000865	0.001	-
Aux	пеац	LE Cheek	-	149	5745	9	8.35	16.14%	0.014	ed Reported 0.063 0.001 0.016 7 0.008	-
Aux		LE Tilt	-	149	5745	9	8.35	16.14%	0.00717	0.008	-
	Body- worn	Front side	15	149	5745	9	8.35	16.14%	0.039	0.045	76
		Back side	15	149	5745	9	8.35	16.14%	0.037	0.043	-

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
					` ,	Tolerance (dBm)	(dBm)		Measured	Reported	. 3
		Front side	0	149	5745	9	8.35	16.14%	0.167	0.194	77
		Back side	0	149	5745	9	8.35	16.14%	0.105	0.122	-
Aux	Hand	Bottom side	0	149	5745	9	8.35	16.14%	0.0065	0.0075	-
		Right side	0	149	5745	9	8.35	16.14%	0.089	0.103	-
		Left side	0	149	5745	9	8.35	16.14%	0.018	0.021	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 41 of 129

#### 2nd Battery

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
Main						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	1	2412	14.5	14.42	1.86%	0.082	0.084	-
ı		RE Tilt	-	40	5200	11.5	11.42	1.86%	0.276	0.281	-
Main		RE Tilt	-	56	5280	11.5	11.15	8.39%	0.375	0.406	-
		RE Cheek	-	102	5510	11	10.65	8.39%	0.085	0.092	-
	Head	RE Tilt	-	149	5745	9	8.69	7.40%	0.193	0.207	-
	Heau	RE Cheek	-	1	2412	14.5	14.46	0.93%	0.012	0.012	-
		RE Cheek	-	40	5200	11.5	11.20	7.15%	0.023	0.025	-
Aux		RE Cheek	-	56	5280	11.5	11.10	9.65%	0.068	0.075	-
		LE Cheek	-	134	5670	11	9.31	47.57%	0.063	0.093	-
		RE Cheek	-	149	5745	9	8.35	16.14%	0.046	0.053	-
		Back side	15	1	2412	14.5	14.42	1.86%	0.021	0.021	-
		Front side	15	40	5200	11.5	11.42	1.86%	0.046	0.047	-
Main		Front side	15	56	5280	11.5	11.15	8.39%	0.056	0.061	-
		Front side	15	102	5510	11	10.65	8.39%	0.018	0.020	-
	Body-	Front side	15	149	5745	9	8.69	7.40%	0.023	0.025	-
	worn	Back side	15	1	2412	14.5	14.46	0.93%	0.023	0.023	-
		Back side	15	40	5200	11.5	11.20	7.15%	0.028	0.030	-
Aux		Front side	15	56	5280	11.5	11.10	9.65%	0.029	0.032	-
		Back side	15	134	5670	11	9.31	47.57%	0.029	0.043	-
		Front side	15	149	5745	9	8.35	16.14%	0.036	0.042	-

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/	)g	Plot page
					, ,	Tolerance (dBm)	(dBm)		Measured	Reported	. •
		Left side	0	1	2412	14.5	14.42	1.86%	0.252	0.257	-
		Left side	0	40	5200	11.5	11.42	1.86%	0.273	0.278	-
Main		Left side	0	56	5280	11.5	11.15	8.39%	0.372	0.403	-
		Left side	0	102	5510	11	10.65	8.39%	0.167	0.181	-
	Hand	Left side	0	149	5745	9	8.69	7.40%	0.231	0.248	-
	Папи	Bottom side	0	1	2412	14.5	14.46	0.93%	0.128	0.129	-
		Front side	0	40	5200	11.5	11.20	7.15%	0.131	0.140	-
Aux		Front side	0	56	5280	11.5	11.10	9.65%	0.129	0.141	-
		Front side	0	134	5670	11	9.31	47.57%	0.186	0.274	-
	-	Front side	0	149	5745	9	8.35	16.14%	0.162	0.188	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 129

## 3. Simultaneous Transmission Analysis

#### **Simultaneous Transmission Scenarios:**

Simultaneous Transmit Configurations	Head	Body-Worn	Hand
2.4GHz Wi-Fi MIMO	Yes	Yes	Yes
BT + 2.4GHz Aux	NA	Yes	Yes
BT + 5GHz Aux	NA	Yes	Yes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 43 of 129

#### 3.1 Estimated SAR calculation

According to KDB447498 D01v05 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR = 
$$\frac{\text{Max.tune up power(mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(GHz)}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

Mode	Frequency (MHz)	Maximum Power (dBm)	Separation Distance (Body) (mm)	Estimated SAR 1g (Body) (W/kg)
Bluetooth	2480	4.5	15	0.039

Mode	Frequency (MHz)	Maximum Power (dBm)	Separation Distance (Hand) (mm)	Estimated SAR 10g (Hand) (W/kg)
Bluetooth	2480	4.5	5	0.047

#### 3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 (0.1) for all antenna pairs in the configuration to qualify for 1-g (10-g) SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 44 of 129

#### **Simultaneous Transmission Combination**

		reported SAF	R WLAN 2.4	GHz, ΣSAR	evaluation		
Frequency	Position		reported SAR / W/kg		ΣSAR	Calculated	SPLSR
band	Г	OSITION	Main	Aux	Aux <1.6W/kg distance (mi		(≦0.04)
	Head	Right cheek	0.095	0.015	0.110	-	-
WLAN802.11 b		Right tilt	0.077	0.005	0.082	-	1
WLANOUZ.11 D		Left cheek	0.076	0.011	0.087	1	-
		Left tilt	0.057	0.006	0.063	-	1
W/I ANRO2 11 h	Body-	Front	0.028	0.018	0.046	1	-
WLAN802.11 b	worn	Back	0.033	0.036	0.069	-	1

	reported SAR WLAN and Bluetooth, ΣSAR evaluation											
Frequency	Position		reported	SAR / W/kg	ΣSAR	Calculated	SPLSR					
band			Aux	Bluetooth	<1.6W/kg	distance (mm)	(≦0.04)					
WLAN802.11 b	Body-	Front	0.018	0.039	0.057	-	-					
WLANOUZ.II D	Worn	Back	0.036	0.039	0.075	-	-					
WLAN802.11 a	Body-	Front	0.034	0.039	0.073	-	-					
5.2G	Worn	Back	0.046	0.039	0.085	-	-					
WLAN802.11 a	Body-	Front	0.034	0.039	0.073	-	-					
5.3G	Worn	Back	0.031	0.039	0.07	-	-					
WLAN802.11	Body-	Front	0.066	0.039	0.105	-	-					
n(40M) 5.6G	Worn	Back	0.068	0.039	0.107	-	-					
WLAN802.11 a	Body-	Front	0.045	0.039	0.084	-	_					
5.8G	Worn	Back	0.043	0.039	0.082	-	-					

	reported SAR WLAN 2.4GHz, ΣSAR evaluation												
Frequency	Position		reported SAR / W/kg			Calculated	SPLSR						
band	Р	OSILION	Main	Aux	Aux <4.0W/kg distance		(≦0.1)						
	Hand	Front side	0.045	0.082	0.127	-	-						
		Back side	0.083	0.130	0.213	1	-						
WLAN802.11 b		Top side	0.059	1	-	ī	1						
WLANOUZ.II D		Hand	Bottom side	1	0.137	-	1	-					
		Left side	0.283	0.016	0.299	ī	1						
		Right side	-	0.088	-	-	-						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 129

reported SAR WLAN and Bluetooth, ΣSAR evaluation									
Frequency	D	osition	reported SAR / W/kg		ΣSAR	Calculated	SPLSR		
band	Ρ	OSILIOTI	Aux	Bluetooth	<4.0W/kg	distance (mm)	(≦0.1)		
	Hand	Front side	0.082	0.047	0.129	-	-		
		Back side	0.130	0.047	0.177	-	-		
WLAN802.11 b		Top side	1	0.047	1	-	1		
WLANOUZ.IID		Bottom side	0.137	0.047	0.184	-	-		
		Left side	0.016	0.047	0.063	-	1		
		Right side	0.088	0.047	0.135	-	-		

reported SAR WLAN and Bluetooth, ΣSAR evaluation									
Frequency band	Desition		reported SAR / W/kg		ΣSAR	Calculated	SPLSR		
	٢	Position		Bluetooth	<4.0W/kg	distance (mm)	(≦0.1)		
	Hand	Front side	0.147	0.047	0.194	-	-		
		Back side	0.020	0.047	0.067	-	-		
WLAN802.11 a		Top side	-	0.047	-	-	-		
5.2G		Bottom side	0.042	0.047	0.089	-	-		
		Left side	0.003	0.047	0.050	-	-		
		Right side	0.060	0.047	0.107	-	-		

reported SAR WLAN and Bluetooth, ΣSAR evaluation									
Frequency	Position		reported SAR / W/kg		ΣSAR	Calculated	SPLSR		
band	r	Position		Bluetooth	<4.0W/kg	distance (mm)	(≦0.1)		
	Hand	Front side	0.149	0.047	0.196	-	-		
		Back side	0.088	0.047	0.135	-	-		
WLAN802.11 a		Top side	-	0.047	-	-	-		
5.3G		Bottom side	0.033	0.047	0.080	-	-		
		Left side	0.007	0.047	0.054	-	-		
		Right side	0.037	0.047	0.084	-	-		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 46 of 129

reported SAR WLAN and Bluetooth, ΣSAR evaluation									
Frequency	Frequency		reported SAR / W/kg		ΣSAR	Calculated	SPLSR		
band	Г	osition	Aux	Bluetooth	<4.0W/kg	distance (mm)	(≦0.1)		
	Hand	Front side	0.289	0.047	0.336	-	-		
		Back side	0.084	0.047	0.131	-	-		
WLAN802.11		Top side	1	0.047	-	-	-		
n(40M) 5.6G		Bottom side	0.040	0.047	0.087	-	-		
		Left side	0.083	0.047	0.130	-	-		
		Right side	0.012	0.047	0.059	-	-		

reported SAR WLAN and Bluetooth, ΣSAR evaluation									
Frequency		osition	reported SAR / W/kg		ΣSAR	Calculated	SPLSR		
band	Р	OSILION	Aux	Bluetooth	<4.0W/kg	distance (mm)	(≦0.1)		
	Hand	Front side	0.194	0.047	0.241	-	-		
		Back side	0.122	0.047	0.169	-	-		
WLAN802.11 a		Top side	-	0.047	-	-	-		
5.8G		Bottom side	0.008	0.047	0.055	-	-		
		Left side	0.021	0.047	0.068	-	-		
		Right side	0.103	0.047	0.150	-	-		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 47 of 129

## 4. Instruments List

	<u> </u>				
Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4	3938	Oct.01,2015	Sep.30,2016
Schmid & Partner	System Validation	D2450V2	727	Apr.22,2015	Apr.21,2016
Engineering AG	Dipole	D5GHzV2	1023	Jan.29,2015	Jan.29,2016
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	1260	Sep.24,2015	Sep.23,2016
Schmid & Partner Engineering AG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration not required	Calibration not required
Network Analyzer	Agilent	E5071C	MY461075302	Jan.27,2015	Jan.26,2016
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional	777D	MY46151242	Feb.11,2015	Feb.10,2016
Aglient	coupler	772D	MY52180142	Feb.11,2015	Feb.00,2016
Agilent	RF Signal Generator	N5181A	MY50145142	Feb.06.2015	Feb.05.2016
Agilent	Power Meter	E4417A	MY52240003	Jul.15,2015	Jul.14,2016
Agilent	Power Sensor	E9301H	MY52200004	Jul.15,2015	Jul.14,2016
TECPEL	Digital thermometer	DTM-303A	TP130075	Mar.27,2015	Mar.26,2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 48 of 129

### 5. Measurements

Date: 2015/12/28

#### WLAN 802.11b Head Re Cheek CH 1 Main

Communication System: WLAN 2.45G; Frequency: 2412 MHz

Medium parameters used: f = 2412 MHz;  $\sigma = 1.792 \text{ S/m}$ ;  $\epsilon_r = 39.473$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.11, 7.11, 7.11); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (91x171x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 0.126 W/kg

## Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 6.356 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.132 W/kg





0 dB = 0.132 W/kg = -8.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 49 of 129

Date: 2015/12/29

## WLAN 802.11b\_Body-worn\_Back side\_CH 1\_Main\_15mm

Communication System: WLAN 2.45G; Frequency: 2412 MHz

Medium parameters used: f = 2412 MHz;  $\sigma = 1.903 \text{ S/m}$ ;  $\varepsilon_r = 53.004$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.17, 7.17, 7.17); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (101x171x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0463 W/kg

### Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 1.097 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0452 W/kg



0 dB = 0.0452 W/kg = -13.45 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 50 of 129

Date: 2015/12/29

### WLAN 802.11b Hand Left side CH 1 Main 0mm

Communication System: WLAN 2.45G; Frequency: 2412 MHz

Medium parameters used: f = 2412 MHz;  $\sigma = 1.903$  S/m;  $\varepsilon_r = 53.004$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.17, 7.17, 7.17); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (51x171x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 4.309 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 1.05 W/kg



0 dB = 1.05 W/kg = 0.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 51 of 129

Date: 2015/12/28

#### WLAN 802.11b Head Re Cheek CH 1 Aux

Communication System: WLAN(2.45G); Frequency: 2412 MHz

Medium parameters used: f = 2412 MHz;  $\sigma = 1.792 \text{ S/m}$ ;  $\varepsilon_r = 39.473$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.11, 7.11, 7.11); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (101x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0215 W/kg

## Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm


Reference Value = 2.225 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0610 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0183 W/kg





0 dB = 0.0183 W/kg = -17.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 52 of 129

Date: 2015/12/29

## WLAN 802.11b\_Body-worn\_Back side\_CH 1\_Aux\_15mm

Communication System: WLAN(2.45G); Frequency: 2412 MHz

Medium parameters used: f = 2412 MHz;  $\sigma = 1.903 \text{ S/m}$ ;  $\varepsilon_r = 53.004$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.17, 7.17, 7.17); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Body/Area Scan (121x191x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0486 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 2.280 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0507 W/kg



0 dB = 0.0507 W/kg = -12.95 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 53 of 129

Date: 2015/12/29

### WLAN 802.11b Hand Bottom side CH 1 Aux 0mm

Communication System: WLAN(2.45G); Frequency: 2412 MHz

Medium parameters used: f = 2412 MHz;  $\sigma = 1.903 \text{ S/m}$ ;  $\varepsilon_r = 53.004$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(7.17, 7.17, 7.17); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (81x101x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 0.493 W/kg

## Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm, dz=5mm

Reference Value = 3.864 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.518 W/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 129

Date: 2015/12/30

#### WLAN 802.11a 5.2G Head Re Tilt CH 40 Main

Communication System: WLAN 5G; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 4.672 \text{ S/m}$ ;  $\epsilon_r = 36.541$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.9, 4.9, 4.9); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (111x201x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.725 W/kg

### Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 1.014 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.648 W/kg





0 dB = 0.648 W/kg = -1.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 129

Date: 2016/1/2

## WLAN 802.11a 5.2G\_Body-worn\_Front side\_CH 40\_Main\_15mm

Communication System: WLAN 5G; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.195 \text{ S/m}$ ;  $\varepsilon_r = 47.53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.19, 4.19, 4.19); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (121x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0889 W/kg

### Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.7100 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0842 W/kg





0 dB = 0.0842 W/kg = -10.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 56 of 129

Date: 2016/1/2

### WLAN 802.11a 5.2G Hand Left side CH 40 Main 0mm

Communication System: WLAN 5G; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.195 \text{ S/m}$ ;  $\varepsilon_r = 47.53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.19, 4.19, 4.19); Calibrated: 2015/10/1;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x201x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 2.44 W/kg


## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 1.216 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 5.46 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.297 W/kg





0 dB = 2.45 W/kg = 3.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 57 of 129

Date: 2015/12/30

#### WLAN 802.11a 5.2G Head Re Cheek CH 40 Aux

Communication System: WLAN(5G); Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 4.672 \text{ S/m}$ ;  $\varepsilon_r = 36.541$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.9, 4.9, 4.9); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- · Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (121x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0603 W/kg

### Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.7070 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0517 W/kg





0 dB = 0.0517 W/kg = -12.87 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 58 of 129

Date: 2016/1/2

## WLAN 802.11a 5.2G\_Body-worn\_Back side\_CH 40\_Aux\_15mm

Communication System: WLAN(5G); Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.195 \text{ S/m}$ ;  $\varepsilon_r = 47.53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.19, 4.19, 4.19); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (141x241x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0754 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.466 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0831 W/kg





0 dB = 0.0831 W/kg = -10.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 59 of 129

Date: 2016/1/2

### WLAN 802.11a 5.2G\_Hand\_Front side\_CH 40\_Aux\_0mm

Communication System: WLAN(5G); Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.195 \text{ S/m}$ ;  $\varepsilon_r = 47.53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.19, 4.19, 4.19); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (161x241x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.284 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 3.948 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.380 W/kg





0 dB = 0.380 W/kg = -4.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 60 of 129

Date: 2015/12/30

#### WLAN 802.11a 5.3G Head Re Tilt CH 56 Main

Communication System: WLAN 5G; Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 4.784 \text{ S/m}$ ;  $\varepsilon_r = 36.199$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.81, 4.81, 4.81); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (111x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.916 W/kg

## Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 1.071 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.842 W/kg





0 dB = 0.842 W/kg = -0.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 61 of 129

Date: 2016/1/3

## WLAN 802.11a 5.3G Body-worn Front side CH 56 Main 15mm

Communication System: WLAN 5G; Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 5.339 \text{ S/m}$ ;  $\varepsilon_r = 47.32$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.09, 4.09, 4.09); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (121x201x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.108 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 1.075 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.111 W/kg





0 dB = 0.111 W/kg = -9.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 62 of 129

Date: 2016/1/3

### WLAN 802.11a 5.3G Hand Left side CH 56 Main 0mm

Communication System: WLAN 5G; Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 5.339 \text{ S/m}$ ;  $\varepsilon_r = 47.32$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.09, 4.09, 4.09); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x201x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 3.14 W/kg


## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.719 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 7.05 W/kg

SAR(1 g) = 1.51 W/kg; SAR(10 g) = 0.404 W/kg





0 dB = 3.19 W/kg = 5.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 63 of 129

Date: 2015/12/30

#### WLAN 802.11a 5.3G Head Re Cheek CH 56 Aux

Communication System: WLAN(5G); Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 4.784 \text{ S/m}$ ;  $\varepsilon_r = 36.199$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.81, 4.81, 4.81); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (121x191x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.0902 W/kg

## Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 3.350 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.144 W/kg





0 dB = 0.144 W/kg = -8.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 64 of 129

Date: 2016/1/3

## WLAN 802.11a 5.3G Body-worn Front side CH 56 Aux 15mm

Communication System: WLAN(5G); Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 5.339 \text{ S/m}$ ;  $\varepsilon_r = 47.32$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.09, 4.09, 4.09); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (141x241x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.0977 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 1.861 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.116 W/kg





0 dB = 0.116 W/kg = -9.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 65 of 129

Date: 2016/1/3

### WLAN 802.11a 5.3G Hand Front side CH 56 Aux 0mm

Communication System: WLAN(5G); Frequency: 5280 MHz

Medium parameters used: f = 5280 MHz;  $\sigma = 5.339 \text{ S/m}$ ;  $\varepsilon_r = 47.32$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.09, 4.09, 4.09); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (141x211x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.272 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 3.954 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.522 W/kg





0 dB = 0.522 W/kg = -2.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 66 of 129

Date: 2015/12/31

## WLAN 802.11n(40M) 5.6G\_Head\_Re Cheek\_CH 102\_Main

Communication System: WLAN 5G; Frequency: 5510 MHz

Medium parameters used: f = 5510 MHz;  $\sigma = 5.108 \text{ S/m}$ ;  $\varepsilon_r = 34.748$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.28, 4.28, 4.28); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (111x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.324 W/kg

## Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.5370 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.213 W/kg





0 dB = 0.213 W/kg = -6.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 67 of 129

Date: 2016/1/4

## WLAN 802.11n 5.6G(40M) Body-worn Front side CH 102 Main 15mm

Communication System: WLAN 5G; Frequency: 5510 MHz

Medium parameters used: f = 5510 MHz;  $\sigma = 5.772 \text{ S/m}$ ;  $\varepsilon_r = 47.023$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.66, 3.66, 3.66); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (121x201x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.0381 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.4300 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00793 W/kg

Maximum value of SAR (measured) = 0.0348 W/kg



0 dB = 0.0348 W/kg = -14.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 68 of 129

Date: 2016/1/4

## WLAN 802.11n 5.6G(40M)\_Hand\_Left side\_CH 102\_Main\_0mm

Communication System: WLAN 5G; Frequency: 5510 MHz

Medium parameters used: f = 5510 MHz;  $\sigma = 5.772 \text{ S/m}$ ;  $\varepsilon_r = 47.023$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.66, 3.66, 3.66); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 0.7050 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 1.53 W/kg





0 dB = 1.53 W/kg = 1.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 69 of 129

Date: 2015/12/31

## WLAN 802.11n 5.6G(40M) Head Le Cheek CH 134 Aux

Communication System: WLAN(5G); Frequency: 5670 MHz

Medium parameters used: f = 5670 MHz;  $\sigma = 5.265 \text{ S/m}$ ;  $\varepsilon_r = 35.437$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.28, 4.28, 4.28); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (151x191x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.128 W/kg

## Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 3.074 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.136 W/kg





0 dB = 0.136 W/kg = -8.66 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 70 of 129

Date: 2016/1/4

## WLAN 802.11n 5.6G(40M)\_Body-worn\_Back side\_CH 134\_Aux\_15mm

Communication System: WLAN(5G); Frequency: 5670 MHz

Medium parameters used: f = 5670 MHz;  $\sigma = 5.904 \text{ S/m}$ ;  $\varepsilon_r = 46.793$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.66, 3.66, 3.66); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (121x241x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.102 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 2.280 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.174 W/kg





0 dB = 0.174 W/kg = -7.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 71 of 129

Date: 2016/1/4

## WLAN 802.11n 5.6G(40M)\_Hand\_Front side\_CH 134\_Aux\_0mm

Communication System: WLAN(5G); Frequency: 5670 MHz

Medium parameters used: f = 5670 MHz;  $\sigma = 5.904 \text{ S/m}$ ;  $\epsilon_r = 46.793$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.66, 3.66, 3.66); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (131x211x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.433 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 5.341 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.429 W/kg





0 dB = 0.429 W/kg = -3.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 72 of 129

Date: 2016/1/1

### WLAN 802.11a 5.8G\_Head\_Re Tilt\_CH 149\_Main

Communication System: WLAN 5G; Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz;  $\sigma = 5.385 \text{ S/m}$ ;  $\varepsilon_r = 35.336$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.41, 4.41, 4.41); Calibrated: 2015/10/1;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (111x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.554 W/kg

## Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.7000 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.432 W/kg





0 dB = 0.432 W/kg = -3.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 73 of 129

Date: 2016/1/5

## WLAN 802.11a 5.8G Body-worn Front side CH 149 Main 15mm

Communication System: WLAN 5G; Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz;  $\sigma = 6.16 \text{ S/m}$ ;  $\varepsilon_r = 46.65$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.87, 3.87, 3.87); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (121x201x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.0524 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 0.6550 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0518 W/kg





0 dB = 0.0518 W/kg = -12.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 74 of 129

Date: 2016/1/5

### WLAN 802.11a 5.8G Hand Left side CH 149 Main 0mm

Communication System: WLAN 5G; Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz;  $\sigma = 6.16 \text{ S/m}$ ;  $\varepsilon_r = 46.65$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.87, 3.87, 3.87); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (61x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.91 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 1.379 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.50 W/kg

SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.99 W/kg





0 dB = 1.99 W/kg = 2.98 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 75 of 129

Date: 2016/1/1

### WLAN 802.11a 5.8G Head Re Cheek CH 149 Aux

Communication System: WLAN(5G); Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz;  $\sigma = 5.385$  S/m;  $\varepsilon_r = 35.336$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(4.41, 4.41, 4.41); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Head
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Head/Area Scan (141x191x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.129 W/kg

### Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm


Reference Value = 2.448 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.115 W/kg





0 dB = 0.115 W/kg = -9.39 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 76 of 129

Date: 2016/1/5

## WLAN 802.11a 5.8G\_Body-worn\_Front side\_CH 149\_Aux\_15mm

Communication System: WLAN(5G); Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz;  $\sigma = 6.16 \text{ S/m}$ ;  $\varepsilon_r = 46.65$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.87, 3.87, 3.87); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (121x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.186 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 1.936 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.178 W/kg



0 dB = 0.178 W/kg = -7.50 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 77 of 129

Date: 2016/1/5

### WLAN 802.11a 5.8G Hand Front side CH 149 Aux 0mm

Communication System: WLAN(5G); Frequency: 5745 MHz

Medium parameters used: f = 5745 MHz;  $\sigma = 6.16 \text{ S/m}$ ;  $\varepsilon_r = 46.65$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN3938; ConvF(3.87, 3.87, 3.87); Calibrated: 2015/10/1;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2015/9/24
- Phantom: Body
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Body/Area Scan (141x201x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.382 W/kg

## Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 4.864 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.390 W/kg





0 dB = 0.390 W/kg = -4.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 78 of 129

## 6. SAR System Performance Verification

Date: 2015/12/28

Dipole 2450 MHz\_SN:727\_Head

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.839 \text{ S/m}$ ;  $\varepsilon_r = 39.283$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(7.11, 7.11, 7.11); Calibrated: 2015/10/1;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Pin=250mW/Area Scan (51x81x1): Interpolated grid: dx=12 mm,

Maximum value of SAR (interpolated) = 21.4 W/kg


## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.5 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.04 W/kgMaximum value of SAR (measured) = 20.4 W/kg





0 dB = 20.4 W/kg = 13.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 79 of 129

Date: 2015/12/29

## Dipole 2450 MHz\_SN:727\_Body

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.956 \text{ S/m}$ ;  $\varepsilon_r = 52.813$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(7.17, 7.17, 7.17); Calibrated: 2015/10/1;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=250mW/Area Scan (51x81x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 21.6 W/kg


## Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.1 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.22 W/kg Maximum value of SAR (measured) = 20.9 W/kg





0 dB = 20.9 W/kg = 13.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 80 of 129

Date: 2015/12/30

### Dipole 5200 MHz\_SN:1023\_Head

Communication System: CW; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 4.672 \text{ S/m}$ ;  $\varepsilon_r = 36.541$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.9, 4.9, 4.9); Calibrated: 2015/10/1;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.0 W/kg


## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.34 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.28 W/kg Maximum value of SAR (measured) = 16.8 W/kg





0 dB = 16.8 W/kg = 12.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 81 of 129

Date: 2016/1/2

## Dipole 5200 MHz\_SN:1023\_Body

Communication System: CW; Frequency: 5200 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.195 \text{ S/m}$ ;  $\varepsilon_r = 47.53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.19, 4.19, 4.19); Calibrated: 2015/10/1;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Pin=100mW/Area Scan (61x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.1 W/kg


## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.11 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 7.29 W/kg; SAR(10 g) = 2.12 W/kg Maximum value of SAR (measured) = 14.9 W/kg





0 dB = 14.9 W/kg = 11.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 82 of 129

Date: 2015/12/30

## Dipole 5300 MHz SN:1023 Head

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: f = 5300 MHz;  $\sigma = 4.808 \text{ S/m}$ ;  $\varepsilon_r = 36.142$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.81, 4.81, 4.81); Calibrated: 2015/10/1;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 18.5 W/kg


## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.67 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 35.9 W/kg

SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.3 W/kgMaximum value of SAR (measured) = 17.1 W/kg





0 dB = 17.1 W/kg = 12.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 83 of 129

Date: 2016/1/3

## Dipole 5300 MHz SN:1023 Body

Communication System: CW; Frequency: 5300 MHz

Medium parameters used: f = 5300 MHz;  $\sigma = 5.356 \text{ S/m}$ ;  $\varepsilon_r = 47.298$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.09, 4.09, 4.09); Calibrated: 2015/10/1;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Configuration/Pin=100mW/Area Scan (61x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.7 W/kg


## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.48 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.17 W/kgMaximum value of SAR (measured) = 15.5 W/kg





0 dB = 15.5 W/kg = 11.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 84 of 129

Date: 2015/12/31

### Dipole 5600 MHz\_SN:1023\_Head

Communication System: CW; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz;  $\sigma = 5.216 \text{ S/m}$ ;  $\varepsilon_r = 35.552$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.28, 4.28, 4.28); Calibrated: 2015/10/1;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.8 W/kg


## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.54 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 35.5 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.26 W/kg Maximum value of SAR (measured) = 17.1 W/kg





0 dB = 17.1 W/kg = 12.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 85 of 129

Date: 2016/1/4

## Dipole 5600 MHz\_SN:1023\_Body

Communication System: CW; Frequency: 5600 MHz

Medium parameters used: f = 5600 MHz;  $\sigma = 5.852 \text{ S/m}$ ;  $\varepsilon_r = 46.863$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(3.66, 3.66, 3.66); Calibrated: 2015/10/1;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (61x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.5 W/kg


## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.75 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.26 W/kg Maximum value of SAR (measured) = 17.4 W/kg



0 dB = 17.4 W/kg = 12.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 86 of 129

Date: 2016/1/1

## Dipole 5800 MHz\_SN:1023\_Head

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: f = 5800 MHz;  $\sigma = 5.459 \text{ S/m}$ ;  $\varepsilon_r = 35.203$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.41, 4.41, 4.41); Calibrated: 2015/10/1;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Head

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 18.7 W/kg


## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.64 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 37.3 W/kg

SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.27 W/kg Maximum value of SAR (measured) = 17.2 W/kg





0 dB = 17.2 W/kg = 12.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 87 of 129

Date: 2016/1/5

## Dipole 5800 MHz\_SN:1023\_Body

Communication System: CW; Frequency: 5800 MHz

Medium parameters used: f = 5800 MHz;  $\sigma = 6.246 \text{ S/m}$ ;  $\varepsilon_r = 46.52$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN3938; ConvF(3.87, 3.87, 3.87); Calibrated: 2015/10/1;

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2015/9/24

Phantom: Body

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Configuration/Pin=100mW/Area Scan (61x101x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.8 W/kg

## Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.05 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 7.42 W/kg; SAR(10 g) = 2.1 W/kg Maximum value of SAR (measured) = 15.8 W/kg



0 dB = 15.8 W/kg = 11.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 88 of 129

## 7. DAE & Probe Calibration Certificate

Calibration Laboratory of Schmid & Partner Engineering AG Zeughnuserrases 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst. Service suisse d'étalonnage Servizio svizzero di faratura. Swiss Calibration Service

Accreditation No.: SCS 0108

According by the Swise Accordington Swince (SAS)

The Swise Accordination Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS - TW (Auden)

Object	DAE4 - SD 000 D	04 BM - SN: 1260	
Cathranan proowitamen)	QA CAL-06.v29 Calibration process	dure for the data acquisition electr	onics (DAE)
Calibration data:	September 24, 20	115	
The measurements and the unce	utainties with confidence pro	nal standards, which reelize the physical units chapitity are given on the tollowing pages and r bothlis; environment temperature (82 ± 3)°C	are part of the certificate.
Calibration Equipment used (M&		and the second	4.00
Primary Standards	ID # SN: 0810278	Cal Date (Certificate No.) 09-Sep-15 (No:17153)	Scheduled Calibration Sep-16
Primary Standards Keimley Multimeter Type 2001	ID # SN: 0810278	09-Sep-15 (Nox17153)	Sep-16
Primary Standards	ID #	D6-Sep-15 (Not17153)  Check Date (in house) D6-Jan-15 (in house check)	
Frimary Standards Kathley Multimeter Type 2001 Secondary Standards Auto D&E Calibration Unit	ID # SN: 0810278 ID # SE UWS 063 AA 1001	D6-Sep-15 (Not17153)  Check Date (in house) D6-Jan-15 (in house check)	Sep-16 Scheduled Check In house check: Jan-16

Certificate No: DAE4-1260\_Sep15 Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 89 of 129

#### Calibration Laboratory of Schmid & Partner

Engineering AG Zeognauostrasse 45, 8004 Zurien, Switzenland





S Schwenterischer Keitmerniens C Service autose d'étationnage Service sylizzero di taratura S Swiss Calibration Service

Accrecitation No.: SCS 0108

Accommodity the Swee Acceptance Service (SAS)

The Swise Appreciation Service is one of the signaturies to the EA

Publisheral Agreement for the recognition of calibration certificates

#### Glossary

DAE data acquisition electronics

Connector angle Information used in DASY system to slign probe sensor X to the robot

coordinate system.

#### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltineter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a loof inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage, influence of offset voltage is included in this measurement.
  - Cammon mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted: Values on the Internal AD converter corresponding to zero input voltage
  - Input Offset Measurement, Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage: Typical value (or information. Below this voltage, a pattery alarm signal is generated.
  - Power consumption: Typical value for information. Supply currents in various operating modes.

Compound No: DAE4-1280 Sept.5

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 90 of 129

#### DC Voltage Measurement

A/D - Converter Resolution nominal High Range: 1LSB = full range = -100...+300 mV full range = -1......+3mV 6.1µV, Low Range: 1LSB = 61nV DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	x	Υ	z
High Range	406.043 ± 0.02% (k=2)	405.010 ± 0.02% (k=2)	405.577 ± 0.02% (k=2)
Low Range	3.95755 ± 1.50% (k=2)	4.01958 ± 1.50% (k=2)	4.00483 ± 1.50% (k=2)

#### Connector Angle

Connector Angle to be used in DASY system	84.5°±1°

Certificate No: DAE4-1260\_Sep15

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 91 of 129

#### Appendix (Additional assessments outside the scope of SCS0108)

#### 1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	199996.71	-0.71	-0.00
Channel X + Input	20003.42	1.97	0.01
Channel X - Input	-19997.29	3.64	-0.02
Channel Y + Input	199997.03	-0.74	-0.00
Channel Y + Input	20002.19	0.75	0.00
Channel Y - Input	-20000.85	-0.08	0.00
Channel Z + Input	199995.02	-2.52	-0.00
Channel Z + Input	20000.79	-0.63	-0.00
Channel Z - Input	-20001.97	-1.09	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2001.31	0.02	0.00
Channel X + Input	201.74	0.05	0.03
Channel X - Input	-197.79	0.49	-0.25
Channel Y + Input	2001.47	0.11	0.01
Channel Y + Input	201.57	-0.09	-0.04
Channel Y - Input	-198.16	0.02	-0.01
Channel Z + Input	2001.06	-0.19	-0.01
Channel Z + Input	200.35	-1.16	-0.58
Channel Z - Input	-199.72	-1.47	0.74

#### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	1.97	-0.02
	-200	0.99	-1.30
Channel Y	200	13.29	13.11
	- 200	-13.69	-13.98
Channel Z	200	-0.48	-0.25
	- 200	-1.06	-1.87

#### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200		5.95	-2.35
Channel Y	200	9.12		6.99
Channel Z	200	9.45	7.26	

Certificate No: DAE4-1260\_Sep15

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 92 of 129

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15911	14818
Channel Y	15818	16372
Channel Z	16044	16664

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	-0.60	-1.69	0.60	0.44
Channel Y	-0.89	-3.18	0.27	0.50
Channel Z	-1.05	-1.97	0.26	0.49

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9	
Supply (- Vcc)	-7.6	

Power Consumption (Typical values for information)

Ottor Corrottingtion (Typical Values for Information)							
Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)				
Supply (+ Vcc)	+0.01	+6	+14				
Supply (- Vcc)	-0.01	-8	-9				

Certificate No: DAE4-1260\_Sep15

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sas.com



Page: 93 of 129

Calibration Laboratory of Schmid & Partner Engineering AG suphausstrasse 43, 8084 Zurich, Switzerland





Schweizerischer Kalibriordienst S Service suisse d'étalonnage C Servizio sylzzoro di tarutura S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signaturies to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Accreditation No.: SCS 0108

Certificate No: EX3-3938 Oct15

#### CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3938

California procedure(s)

QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Collegation door

October 1, 2015

This currency conflictive documents the proposity to reduced alancards, which recize the physical units of executionants (51) The measurements and the propriative with confidence probability are given on the lokewing pages and are part of the certificate

All perbrations have been conducted in the conset laboratory facility: unincomment temperature CI2 ± 3/°C and numbers < 70%.

Calcinor Engineer used (M&TE critical for calibration)

Primary Standards	10	Cat Date (Cartificate No.)	Scheduled Caldratins
Power mater E1419ii	Q841293874	CI-Apr-15 (No. 217-02128)	Mar/VB
Power apreor 64412A	MY4149B087	Ot-Api-15 (No. 217-02125)	Mar 16
Reference 3 dB Attenuator	SN: 65054 (3b)	OLApr 15 (No. 217-02129)	Mar-16
Relevents 20 dB Attenuator	SN: 55277 (204)	Ot+Ap+15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: 55129 (30b)	01-Apr-16 (No. 217-02133)	Mar-16
Palesence Prote EBXDV2	SN: 3013	30-Dec-14 (No. ES3-3013, Dec14)	Oec-15
DAE4	SN: 660	14 Jun-15 (No. DAE4-680_Jamn5)	Jan-16
Secondary Standards	ID.	Check Date (in horse)	Schedyled Check
RF generator HP 8648C.	LIS3642U01700	4-Aug-59 (in house court Acr-13)	in house check: Agr-16
Network Analyzer HP 8753E	USS7390585	13-Oct-01 (in house steek Oct-14)	In house sheds; Oct-15

Function Lasponenty Teichnician втам Ейгарыл Californiad by Approved by Karja Pokovići Technical Manager Report October 2, 2015

This calibration partificate shall not be reproduced except in full without written approve of the laboratory

Page 1.0111 Cartificate No: EX3-0938 Oct15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 94 of 129

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zougnammande 43, 8004 Zinnch, Switzerland





Schweimersper Kalibrientienst Service suites d'été C Survizio avizzero di taratura Swiss Calibration Service

Accreditation No.I. SCS 0108 According to the Sweet Accres to two Service (IAS)

The Swins Accreditation Service is one of the agreement to the EA Mulliawral Agrament for the racognition of uniformion nedification

#### Glossary:

biupil pritelumie euzeli. TSL NORME W. sensitivity in free space amsilivity in TSL / NORMo, y, z diode compression point Cary DCP

crest factor (1/duty, syste) of the RF signal modulation depandent linearization parameters ire A, B, C. D

Poarcalinn in is milation around probe axis.

Polarization 6 a regular around an usis that is in the plane normal to probe axis (a) measurement center),

i.e., if = 0 is normal to probe axis

information used in DASY system to align probe sensor \$ 10 the rooot coordinate system. Connector Angle

#### Calibration is Performed According to the Following Standards:

 iEEE 3rd 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques', June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-hald devices used to close

proximity to the ear (frequency range of 300 MHz to 3 GHz)". February 2005
IEC 02209-2: "Procedure to determine the Specific Absorption Rate (SAR) for wheless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010.

ti) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Methods Applied and Interpretation of Parameters:

NORMs,y,z: Assessed for E-field polarization (i = 0) (f < 900 MHz in TEM-cell: f > 1900 MHz; R22 waveguide). NORMx.y.z are only intermediate values. i.e., the uncertainties of NORMx.y.z does not affect the E\*-field uncertainty heads TSL (see below ConvF).

NORMINAY.x = NORMAY.x.\* requency\_response (see Frequency Response Charl). This Inservation is implemented in DASY4 software virisions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.

DCPx,v.z. DCP are numerical linearization parameters assessed based on the data of power-sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor made.

PAR. PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal

 $AX_iy_i Z_iBX_iy_i Z_iQX_iy_i Z_iQX_iy_i Z_iA_iB_iC_iD$  are numerical insortiation parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency run

the data of power sweep for specific modulation signal. The parameters do not depend on frequency normalization range expressed in RMS voltage across the diode.

GarwF and Boundary Effect Parameters: Assessed in Rat phantom using E-field (or Temperature Transfer Standard for till 800 MHz) and inside waveguide using analytical field distributions based on power measurements for till 800 MHz. The same sature are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMs, y, z \*\* ConvF\* whereby the uncertainty corresponds to that given for ConvF\*. A frequency dependent ConvF\* is used in DASY version 4 4 and higher which allows extending the valinity from ± 50 MHz to ± 100 MHz. MHz.

Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat chuntom syposed by a patch anterna-

Sensor Offset. The sensor offset corresponds to the offset of virtual measurement center from the probe to (on probe axis). No tolerance required.

Connector Angle: The angle is assessed using the information pained by determining the NORMs (no uncertainty required).

Cortificate No: EXX-3938 Oct 10.

Page 9 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 95 of 129

EX3DV4 - SN:3938

October 1, 2015

## Probe EX3DV4

SN:3938

Manufactured: Calibrated:

May 2, 2013 October 1, 2015

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: EX3-3938\_Oct15

Page 3 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 96 of 129

EX3DV4-SN:3938

October 1, 2015

### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.52	0.57	0.34	± 10.1 %
DCP (mV) <sup>8</sup>	100.8	99.7	104.1	

#### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>t</sup> (k=2)
0	CW	×	0.0	0.0	1.0	0.00	141.3	±2.7 %
		Y	0.0	0.0	1.0		147.2	
		Z	0.0	0.0	1.0		128.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-3938\_Oct15

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

<sup>\*</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

\*Numerical invariantion parameter: uncertainty not required.

\*Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the equare of the



Page: 97 of 129

EX3DV4- SN:3938

October 1, 2015

#### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### Calibration Parameter Determined in Head Tissue Simulating Media

Cambration	Parameter De	eterminea in	riead lis	sue anni	ulaung me	eula		
f (MHz) <sup>c</sup>	Relative Permittivity <sup>r</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>q</sup>	Depth <sup>6</sup> (mm)	Unc (k=2)
750	41.9	0.89	9.69	9.69	9.69	0.19	1.67	± 12.0 %
835	41.5	0.90	9.35	9.35	9.35	0.26	1.23	± 12.0 %
900	41.5	0.97	9.15	9.15	9.15	0.18	1.86	± 12.0 %
1450	40.5	1.20	7.86	7.86	7.86	0.13	2.63	± 12.0 %
1750	40.1	1.37	8.17	8.17	8.17	0.36	0.80	± 12.0 %
1900	40.0	1.40	7.89	7.89	7.89	0.32	0.80	± 12.0 %
2000	40.0	1.40	7.89	7.89	7.89	0.36	0.75	± 12.0 %_
2300	39.5	1.67	7.46	7.46	7.46	0.34	88.0	± 12.0 %
2450	39.2	1.80	7.11	7.11	7.11	0.32	0.94	± 12.0 %
2600	39.0	1.96	6.79	6.79	6.79	0.24	1.23	± 12.0 %
5250	35.9	4.71	4.90	4.90	4.90	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.81	4.81	4.81	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.28	4.28	4.28	0.50	1.80	± 13.1 %
5750	35.4	5.22	4.41	4.41	4.41	0.50	1.80	± 13.1 %

<sup>&</sup>lt;sup>6</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The sucertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments of 30, 64, 120, 150 and 220 MHz respectively. Above 5 GHz frequency validity and be extended to ± 110 MHz.
<sup>8</sup> At frequencies below 3 GHz, the validity of tissue parameters (e and e) can be released to ± 10% if liquid compensation formula is applied to

Certificate No: EX3-3938\_Oct15

Page 5 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.

ne requirement server of care, the validity of tissue parameters (a and o) can be related to ± 10% it require compensation formula its appeted to measured SAR values. A frequencies above 3 GHz, the validity of issue parameters (a and o) is restricted to ± 5%. The uncertainty for indicated target tissue parameters, and the compensation of the compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-8 GHz at any distance larger than half the probe tip diameter from the boundary.



Page: 98 of 129

EX3DV4- SN:3938 October 1, 2015

#### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity	Conductivity (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
750	55.5	0.96	9.50	9.50	9.50	0.31	1.13	± 12.0 %
835	55.2	0.97	9.30	9.30	9.30	0.28	1.26	± 12.0 %
900	55.0	1.05	9.22	9.22	9.22	0.34	1.05	± 12.0 %
1450	54.0	1.30	7.96	7.96	7.96	0.16	2.05	± 12.0 %
1750	53.4	1.49	7.73	7.73	7.73	0.42	0.80	± 12.0 %
1900	53.3	1.52	7.41	7.41	7.41	0.32	0.90	± 12.0 %
2000	53.3	1.52	7.55	7.55	7.55	0.26	1.05	± 12.0 %
2300	52.9	1.81	7,27	7.27	7.27	0.36	0.84	± 12.0 %
2450	52.7	1.95	7.17	7.17	7.17	0.37	0.85	± 12.0 %
2600	52.5	2.16	6.90	6.90	6.90	0.33	0.90	± 12.0 %
5250	48.9	5.36	4.19	4.19	4.19	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.09	4,09	4.09	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.66	3.66	3.66	0.55	1.90	±13.1 %
5750	48.3	5.94	3.87	3,87	3.87	0.55	1.90	± 13.1 %

<sup>&</sup>lt;sup>6</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

Certificate No: EX3-3938\_Oct15 Page 6 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

validity can be extended to ± 110 MHz.

\*At frequencies below 3 GHz, the validity of tissue parameters (a and a) can be relaxed to ± 15% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (a and a) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

\*Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip.

diameter from the boundary




Page: 99 of 129

EX3DV4-SN:3938 October 1, 2015

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

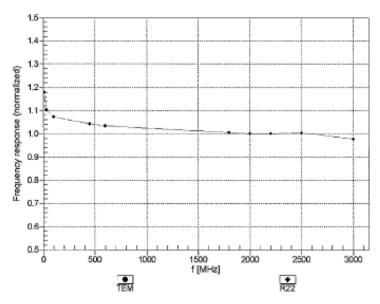

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3938 Oct15 Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.




Page: 100 of 129

EX3DV4-SN:3938 October 1, 2015

## Receiving Pattern (6), 9 = 0°

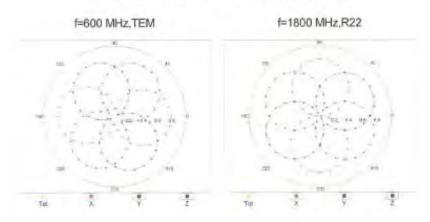

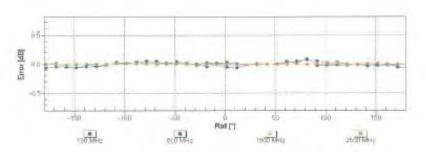

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3938, Oct15

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 101 of 129

EX3DV4- SN:3938

October 1, 2015

#### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3938\_Oct15

Page 9 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 102 of 129


October 1, 2015 EX3DV4-SN:3938

#### Conversion Factor Assessment

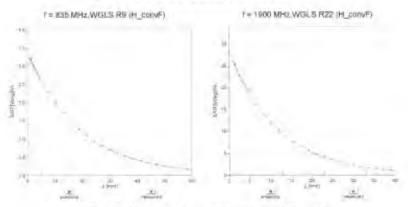

### Deviation from Isotropy in Liquid

Error (¢, 9), f = 900 MHz



Certificate No. EX3-3838\_Oct15

Page 10 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 103 of 129

EX3DV4- SN:3938

October 1, 2015

#### DASY/EASY - Parameters of Probe: EX3DV4 - SN:3938

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (*)	-28.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Certificate No: EX3-3938\_Oct15

Page 11 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 104 of 129

## 8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

Α	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition -	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Deviation from reference liquid target ε 'r(Body)	3.49%	N	1	1	0.64	0.43	2.23%	1.50%	М
Deviation from reference liquid target σ (Body)	4.10%	N	1	1	0.6	0.49	2.46%	2.01%	М
Combined standard uncertainty		RSS					12.10%	11.89%	
Expant uncertainty (95% confidence							24.19%	23.78%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 105 of 129

#### Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	8
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	8
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	8
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	8
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	8
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	8
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	
Deviation from reference liquid target ε 'r(Body)	0.52%	N	1	1	0.64	0.43	0.33%	0.22%	М
Deviation from reference liquid target σ (Body)	2.17%	N	1	1	0.6	0.49	1.30%	1.06%	М
Combined standard uncertainty		RSS					11.41%	11.37%	
Expant uncertainty (95% confidence							22.82%	22.75%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 106 of 129

## 9. Phantom Description

Schmid & Partner Engineering AG Zeughausstrases 42, 8004 Zurich, Switzerland Phone +41 1 245 9700, Fax +41 1 245 9779 Certificate of Conformity / First Article Inspection AM Twin Phantom V4.0 QD 000 P40 C TP-1150 and higher Type No eries No Manufacturer SPEAG Zeughausstrasse 43 CH-8004 Zürich Switzerland Tests The series production process used allows the limitation to test of first articles.

Complete tests were made on the pre-series Type No. QD 000 P40 AA. Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series items (called samples) or are tested at each item. Requirement Units tested Details IT'IS CAD File (\*) Compliant with the geometry according to the CAD model First article, Samples 2mm +/- 0.2mm in flat Material thickness Compilant with the requirer according to the standards First article, Samples. and specific areas of head section 6mm +/- 0.2mm at ERP TP-1314 ff. Material thickness Compliant with the requirements First article. at ERP Materio according to the standards Dielectric parameters for required All Hems 300 MHz - 0 GHz: Moterial Relative permittivity < 5. Loss tangent < 0.05 DEGMBE based parameters frequencies samples The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned Material resistivity Pre-series. First article, simulating liquids Material according to the instructions. samples

Sagging

- CENELEC EN 50361 IEEE Std 1528-2003
- (EC 62209 Part )
- FCC OET Builetin 65, Supplement C, Edition 01-01
  The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards [1] to [4]

Signature / Stamp

07.07.2005

Observe technical Note for material compatibility Compliant with the requirements

Sagging of the flat section when filled

according to the standards.

with tissue simulating fiquid

Salget & Pagner Engineering AQ Engineerings at 43, 8004 Zurich, Switzerland Pole Sales 97, 3 as 9700 Facilities 245 9779 Pole Sales 97, 245 9770 Facilities 245 9779

< 1% typical < 0.8% if Blied with 155mm of HSL900 and without

DUT below

Doc Ho Mit - QD 000 PAD C - =

Photo

Prototypes.

Sample

testing

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 107 of 129

## 10. System Validation from Original Equipment Supplier

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura S

Swiss Calibration Service Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: D2450V2-727\_Apr15

Object	D2450V2 - SN: 7	27	
Calibration procedure(s)	QA CAL-05.v9		
	Calibration proce	dure for dipole validation kits abo	ve 700 MHz
Calibration date:	April 22, 2015		
anoration date:	April 22, 2015		
This calibration certificate docum	ents the traceability to nation	onal standards, which realize the physical uni	its of measurements (SI).
		robability are given on the following pages an	
Ill calibrations have been conduc	cted in the closed laborator	ry facility: environment temperature (22 ± 3)°C	3 and humidity < 70%.
Calibration Equipment used (M&	TE critical for calibration)		
	TE critical for calibration)	Cal Date (Certificate No.)	Scheduled Calibration
Primary Standards		Cal Date (Certificate No.) 07-Oct-14 (No. 217-02020)	Scheduled Calibration Oct-15
Primary Standards Power meter EPM-442A	ID#		The state of the s
Primary Standards Power meter EPM-442A Power sensor HP 8481A	ID# GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A	ID # GB37480704 US37292783	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020)	Oct-15 Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator	ID # GB37480704 US37292783 MY41092317	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021)	Oct-15 Oct-15 Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k)	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131)	Oct-15 Oct-15 Oct-15 Mar-16
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16
Primary Standards Power meter EPM-442A Power sensor HP 98481A Power sensor HP 9481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ESS-3205_Dec14) 18-Aug-14 (No. DAE4-601_Aug14)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-15 Scheduled Check
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards RF generator R&S SMT-06	ID #  GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14) 18-Aug-14 (No. DAE4-601_Aug14) Check Date (in house)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-15 Scheduled Check In house check: Oct-16
Calibration Equipment used (M& Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards RF generator R&S SMT-06 Network Analyzer HP 8753E	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 100005	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14) 18-Aug-14 (No. DAE4-601_Aug14) Check Date (in house)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-15 Scheduled Check In house check: Oct-16 In house check: Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Recondary Standards RF generator R&S SMT-06 Network Analyzer HP 8753E	ID # GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601 ID # 100005 US37390585 S4206	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02031) 01-Apr-15 (No. 217-02131) 30-Dec-14 (No. E53-3205_Dec14) 18-Aug-14 (No. DAE4-601_Aug14) Check Date (in house) 04-Aug-99 (in house check Oct-13) 18-Oct-01 (in house check Oct-14)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-15 Scheduled Check In house check: Oct-16 In house check: Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 9481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4  Secondary Standards RF generator R&S SMT-06 Network Analyzer HP 8753E	ID #  GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #  100005 US37390585 S4206	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14) 18-Aug-14 (No. DAE4-801_Aug14) Check Date (in house) 04-Aug-99 (in house check Oct-13) 18-Oct-01 (in house check Oct-14)	Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-15 Scheduled Check In house check: Oct-16 In house check: Oct-15
Primary Standards Power meter EPM-442A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attenuator Type-N mismatch combination Reference Probe ES3DV3 DAE4 Secondary Standards RF generator R&S SMT-06	ID #  GB37480704 US37292783 MY41092317 SN: 5058 (20k) SN: 5047.2 / 06327 SN: 3205 SN: 601  ID #  100005 US37390585 S4206	07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 07-Oct-14 (No. 217-02021) 01-Apr-15 (No. 217-02131) 01-Apr-15 (No. 217-02134) 30-Dec-14 (No. ES3-3205_Dec14) 18-Aug-14 (No. DAE4-801_Aug14) Check Date (in house) 04-Aug-99 (in house check Oct-13) 18-Oct-01 (in house check Oct-14)	Oct-15 Oct-15 Oct-15 Oct-15 Mar-16 Mar-16 Dec-15 Aug-15 Scheduled Check In house check: Oct-16 In house check: Oct-15

Certificate No: D2450V2-727 Apr15

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 108 of 129

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized; SAR as measured, normalized to an input power of 1 W at the antenna
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2450V2-727 Apr15

Page 2 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 109 of 129

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

### **Head TSL parameters**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.6 ± 6 %	1.82 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg ± 16.5 % (k=2)

### **Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.6 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

### SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.0 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-727\_Apr15 Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 110 of 129

### Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.2 Ω + 1.3 jΩ
Return Loss	- 24.6 dB

# Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.8 Ω + 3.3 jΩ
Return Loss	- 28.6 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### **Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Certificate No: D2450V2-727\_Apr15 Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 111 of 129

### **DASY5 Validation Report for Head TSL**

Date: 22.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.82 \text{ S/m}$ ;  $\varepsilon_r = 37.6$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: ES3DV3 SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


# Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.5 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.1 W/kgMaximum value of SAR (measured) = 17.5 W/kg

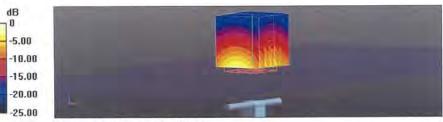

0 dB = 17.5 W/kg = 12.43 dBW/kg

Certificate No: D2450V2-727\_Apr15

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 112 of 129

### Impedance Measurement Plot for Head TSL

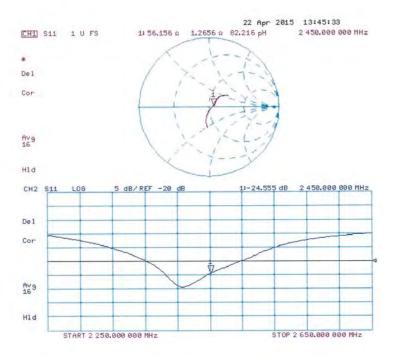

Certificate No: D2450V2-727\_Apr15

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 113 of 129

### **DASY5 Validation Report for Body TSL**

Date: 22.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 2.02$  S/m;  $\varepsilon_r = 50.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 18.08.2014

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

# Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 95.54 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.1 W/kgMaximum value of SAR (measured) = 17.4 W/kg



0 dB = 17.4 W/kg = 12.41 dBW/kg

Page 7 of 8 Certificate No: D2450V2-727 Apr15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 114 of 129

### Impedance Measurement Plot for Body TSL

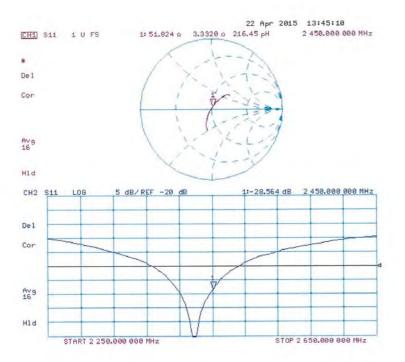

Certificate No: D2450V2-727\_Apr15 Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 115 of 129

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst S Service suisse d'étalonnage C Servizio svizzero di taratura 5 **Swiss Calibration Service** 

Accidented by the Swiss Accordination Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Appreditation No.: SCS 0108

Certificate No: D5GHzV2-1023\_Jan15

Direct	D5GHzV2 - SNt1	023	
albration procedure(s)	QA CAL-22.v2 Calibration proce	dure for dipole validation kits bet	ween 3-6 GHz
calibration date:	January 29, 2015		
A STATE OF THE PARTY OF THE PAR	minimum title delitioning by	robability are given on the following pages an	er am ham as ma chinerago
nibration Equipment used (M8	TE orkeal for callmitter)	ry facility environment temperatura (22 ± 3)°	G gold lumidity < 70%
alibration Equipment used (NAS	TE critical for californium)	Call Dage (Certificate No.)	Scheduled Celbration
Micelitrations have been cond. Calibration Equipment used (IAS Pennary Standerds Power meter EPM-462A Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A Reference 20 dB Attanuator Type-N mismadict combination Reference Probe EX30V4 DAE4	TE orkeal for callmitter)		
Calibration Equipment used (M8 Primary Standercle Power meter EPM-442A Power sensor HP 8481 A Power HP 8	TE critical for calimitative  [D A]  [B37480704  [B37992783  MY41092317  SN: 5058 (204)  SN: 5047 2 / 06327  SN: 3503  SN: 601	Gal Pare (Certificate No.) 97-Oct-14 (No. 217-02020) 97-Oct-14 (No. 217-02020) 97-Oct-14 (No. 217-02021) 93-Apr-14 (No. 217-01916) 93-Apr-14 (No. 217-01916) 93-Dec-14 (No. EX3-3503 Dec14) 18-Aug-14 (No. DAE4-601 Aug)14)	Schaduled Cathranon Oct-15 Oct-15 Oct-10 Apr-15 Apr-15 Doc-15 Aug-18
Calibration Equipment used (MS Primary Standercle Power mater EPM-442A Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A Polemence 20 dB Attanuator Type-N mismatch combinision Helicence Pmbe EXIDV4	TE critical for calimatur)  ID A  GB37480794  US37292783  MY41032317  SN: 5058 (306)  SN: 51647 2 / 05327  SN: 3503	Gai Date (Certificate No.) 07-Oct-14 (No. 217-02020) 07-Oct-14 (No. 217-02021) 07-Oct-14 (No. 217-02021) 03-Apr-14 (No. 217-01021) 30-Oct-14 (No. 217-01021) 30-Oct-14 (No. 217-01021)	Scheduled Celbranon Oct-15 Oct-15 Oct-15 Apr-15 Apr-15 Dec-15
Calibration Equipment used (MS Primary Standercle Power meter EPM-142A Power sensor HP 8481A Power Standards Power Stand	TE critical for callminum)  ID A  GB37480704  US37292783  MY41002317  SN: 508 (204)  SN: 5047 2 / 06327  SN: 3503  SN: 601  ID A  100005  US37350305 S4200  Name	Cali Dase (Certificate No.)  97-Oct-14 (No. 217-02020)  97-Oct-14 (No. 217-02020)  97-Oct-14 (No. 217-02021)  93-Apr-14 (No. 217-01916)  93-Apr-14 (No. 217-01921)  90-Dep-14 (No. EX3-3903_Dep14)  18-Aug-14 (No. EX3-3903_Dep14)  18-Aug-14 (No. EX3-3903_Dep14)  Gheck Linte (in house)  94-Aug-39 (in house check Opt-13)  (9-Oct-01 (In house check Opt-14).	Scheduled Celbranon Oct-15 Oct-15 Oct-15 Apr-15 Dec-15 Apr-15 Dec-15 Aug-15 Scheduled Check In house check: Oct-16
Calibration Equipment used (MS Pennary Standercia Power meter EPM-462A Power nensor HP 8481 A Power sensor HP 8481 A Power Standards Power Standards Power Standards Power Standards Power Standards	TE critical for callminum)  ID A  GB37460794  US37292783  MY41082317  SN: 5058 (204)  SN: 8047 2 / 05327  SN: 3503  SN: 601  ID A  100005  US37390080 54206	Call Date (Certificate No.)  07-Oct-14 (No. 217-02020)  07-Oct-14 (No. 217-02020)  07-Oct-14 (No. 217-02021)  03-Apr-14 (No. 217-03021)  03-Apr-14 (No. 217-03021)  03-Dep-14 (No. 217-03021)  03-Dep-14 (No. EX3-3503, Dec14)  18-Aug-14 (No. EX8-3503, Dec14)  18-Aug-14 (No. EX8-3503, Dec14)  Ott-Aug-98 (in house prices Out-13)  18-Oct-01 (In house check Oct-14)	Scheduled Calibration Oct-15 Oct-15 Oct-15 Apr-15 Apr-15 Dec-15 Aug-15 Scheduled Check In house check: Oct-15 In house check: Oct-15

Certificate No: D5GHzV2-1023\_Jan 15

Page 1 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 116 of 129

### Calibration Laboratory of

Schmid & Partner Engineering AG astresse 43, 8004 Zurich, Switzerland





Schwingerincher Kallprimpungt Service surse of state anage Servizio evizzero di taratora Swiss Calibration Service

Accomplisation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Mullitatera Agreement for the recognition of calibration certitioning

### Glossary:

tissue simulating liquid TSL ConvF sensitivity in TSL / NORM x,y.z not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures": Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters",
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- c) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques\*, June 2013

### Additional Documentation:

d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Certificate No. 05GHzV2-1023\_Jun15

Page 2 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 117 of 129

### Measurement Conditions

DASY Version	DASYS	V52.6.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Specer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5600 MHz ± 1 MHz	

### Head TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mhorm
Measured Head TSL parameters	[22,0±02] ℃	36.3±0 %	4.56 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	_	

### SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm² (1 g) of Hend TSL	Condition	
SAR measured	100 mW Input power	7.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.9 W/kg = 19.9 % (k=2)

SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW Input power	2:32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.2 W/kg = 19.5 % (k=2)

Carilliane No. 05GHzV2-1023 Jan 15

Parter of rel 1 to

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 118 of 129

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35,9	4.75 mha/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	361 + 6 %	4.66 mho/m = 6 %
Head TSL temperature change during lest	<0.5 °C	-	-

### SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Heart TSL	Condition	
BAR measured	100 mW inpul power	6.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.7 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAH for nominal Head TSL parameters	nomalized to 1W	23.4 W/kg ± 19.5 % (km2)

### Head TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	S5'0, C	35.5	5.07 mha/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.7 ± 6.%	4.97 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	-

### SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Hoad TSL parameters	WI al besilamon	81.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Certificate No: DSGHzV2-1023 Jan 15

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 119 of 129

# Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Naminal Head TSL parameters	22.0 C	35.3	5.27 mholm
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 = 6.16	5.18 mho/m = 6 %
Head TSL temperature change during test	€0.5°C	_	_

### SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>5</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Certificate No. DSGHzV2-1023 Jan 15

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 5 til 15

SGS Taiwan Ltd.



Page: 120 of 129

### Body TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49,0	5,30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.4 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	<0.5°C		-

## SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7,33 W/kg
SAR for nominal Body TSL parameters.	normalized to 1W	73.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2,04 W/kg
SAR for nominal Body TSL parameters	normalized to TW	20.5 W/kg = 19.5 % (k=2)

### Body TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	492=619	5.55 mho/m = 8.%
Body TSL temperature change during lest	< 0.5°C	_	100

### SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAR massurija	100 mW input power	7.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm² (10 g) of Body TSL	gondition	
SAR measured	100 mW input power	2.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.8 W/kg = 19.5 % (k=2)

Sertificate No: D5GHzV2-1023 Jan 15

Page 5 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 121 of 129

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	.82.0 °C	48.5	5.77 mholm
Mnasured Body TSL parameters	(22,0 ± 0.2) °C	48.7 ± 6 %.	5.96 mho/m ± 6 %
Body TSL temperature change during test	≤05°C	-	

### SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW (rgul power	7.77 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.5 W/kg = 19.9 % (k=2)

SAR averaged over 10 cm <sup>2</sup> (16 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAFI for nominal Body TSL parameters	normalized to 1W	21.6 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0°C	48.2	5,00 mno/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.4 ± 6.5 <sub>6</sub>	6.25 mhg/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

### SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.54 W/kg
SAFI for nominal Body TSL parameters	normalized to tW	75,5 W/kg ± 19,9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	30.7 W/kg = 19.5 % (k=2)

Certificate No: D5GHzV2-1823\_Jan 15

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 122 of 129

# Appendix (Additional assessments outside the scope of SCS0108)

### Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to leed point	49.2 (2 - 8,5 (4)	
Return Loss	-21.4 dB	

### Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to leed point	116E-11016
Hourn Loss	-2E2 aB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to lead point	53.4 (1 - 2.7 )(1	
Return Loss	- 27.5 dB	

### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.5 (2 + 1.0 )()
Return Loss	- 25.4 dB

### Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	-49.0 Ω - 7.1 jū	
Return Lass	- 22.8 dB	

# Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	51.5 Q - 2.2 JQ
Return Loss	-31.7 dB

### Antenna Parameters with Body TSL at 5600 MHz

impedance, transformed to feed point	54.6 Q - 1.5 M	
Return Loss	-26.8 dB	

Certificate No. D50HzV2-1023\_Jan (4)

Page 6 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 123 of 129

### Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	55.G CT + 2:B jCl	
Retirm Loss	24.5 (6)	

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 hs

After lang term use with 100W radiated power, only a slight-warming of the dipole near the feedpoint can be messured.

The dipole is made of standard seminigid coaxial cable. The center conductor of the feeding line is directly committed to the second arm of the dipole. The amenina is therefore short-circulted for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the 'Measurement Conditions' paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be gamaged.

### Additional EUT Data

Manufactined by	SPEAG	
Manufactured on	February 05, 2004	

Certificate No. D9GHzV2-1023\_Jan 15

Paye 9 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 124 of 129

### DASY5 Validation Report for Head TSL

Date: 28.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type; D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW: Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Prequency: 5800 MHz

Medium parameters used: f=5200 MHz;  $\sigma=4.56$  S/m;  $\epsilon_r=36.3$ ;  $\rho=1000$  kg/m³. Medium parameters used: f=5300 MHz;  $\sigma=4.66$  S/m;  $\epsilon_r=36.1$ ;  $\rho=1000$  kg/m³. Medium parameters used: f=5000 MHz;  $\sigma=4.97$  S/m;  $\epsilon_r=35.7$ ;  $\rho=1000$  kg/m³. Medium parameters used: f=5800 MHz;  $\sigma=5.18$  S/m;  $\epsilon_r=35.4$ ;  $\rho=1000$  kg/m³.

1000 kg/m² Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63,19-2011)

### DASY52 Configuration.

- Probe: EX3DV4 SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2014, ConvF(5.21, 5.21, 5.21); Calibrated: 30.12.2014, ConvF(4.92, 4.92, 4.92); Calibrated: 30.12.2014, ConvF(4.9, 4.9, 4.9); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64:14 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid. dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.47 V/m; Power Drill = 0.05 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.34 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.68 V/m, Power Drift = 0.08 dB

Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

Certificate No. D5GHzV2-1023\_Jan 15

Page 10 or 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 125 of 129

# Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 61.76 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 32.0 W/kg SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.23 W/kg Maximum value of SAR (measured) = 18.4 W/kg



0 dB = 17.8 W/kg = 12.50 dBW/kg

Cartificate No: D5GHzV2-1023\_Jan 15

Page 11 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 126 of 129

### Impedance Measurement Plot for Head TSL

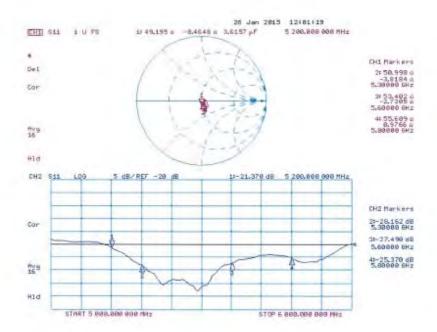

Certificate No: D5GHzV2-1023 Jan 15

Page 12 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 127 of 129

### DASY5 Validation Report for Body TSL

Date: 29.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW: Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600

MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz;  $\sigma = 5.42 \text{ S/m}$ ;  $v_s = 49.4$ ;  $\rho = 1000 \text{ kg/m}^3$ . Medium parameters used: l = 5300 MHz;  $\alpha = 5.55$  S/m;  $\kappa = 49.2$ ;  $\rho = 1000$  kg/m $^{\circ}$ , Medium parameters used: l = 5600 MHz;  $\alpha = 1000$  kg/m $^{\circ}$ ,  $\alpha = 10000$  kg/m $^{\circ}$ ,  $\alpha = 1000$ 5.96 S/m;  $\epsilon_c = 48.7$ ;  $\rho = 1000 \text{ kg/m}^3$ . Medium parameters used: f = 5800 MHz;  $\sigma = 6.25 \text{ S/m}$ ;  $\epsilon_c = 48.4$ ;  $\rho = 6.25 \text{ S/m}$ ;  $\epsilon_c = 48.4$ ;  $\rho = 6.25 \text{ S/m}$ ;  $\epsilon_c = 6.25 \text{ S/m$ 1000 kg/m3

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY 52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(4.95, 4.95, 4.95); Calibrated: 30.12.2014, ConvF(4.76, 4.78, 4.78); Calibrated: 30.12.2014, ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2014, ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014,
- Sensor-Surface: L4mm (Mechanical Surface Detection)
- . Electronics: DAE4 Sn601 Calibrated, 18:08:2014
- Flanton: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 57.97 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 7.33 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (measured) = 17.3 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.58 V/m. Power Drift = -0.06 (B)

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 7.45 W/kg; SAR(10 g) = 2.07 W/kg.

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.88 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 34.4 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 19.3 W/kg.

Certificate No. D6GHzV2-1022 Jan15

Page 18 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號


www.tw.sas.com



Page: 128 of 129

# Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 55.10 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 35.2 W/kg SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 19.1 W/kg



0 dB = 17.3 W/kg = 12.38 dBW/kg

Certificate No: D5GHzV2-1023\_Jan15

Page 14 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 129 of 129

### Impedance Measurement Plot for Body TSL

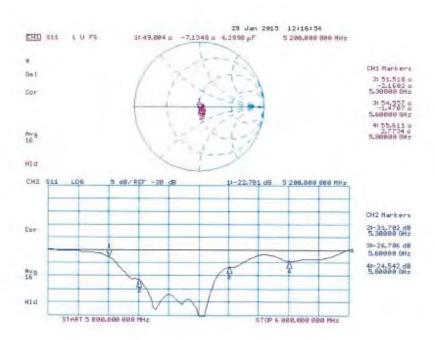

Certificate No: D5GHzV2-1023\_Jan15

Page 15 of 15

# - End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留<sup>90</sup>天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.