

PARTIAL TEST REPORT

No.: 2-20842790-15-9a

According to: FCC Regulations Part 15.247 Part 15.207

IC-Regulations RSS-Gen, Issue 4 RSS-247, Issue 1

for Datalogic ADC S.r.l.

JOYA TOUCH Type:P00AN04HL0HT0W7-GR0 FCC-ID: U4GJNGWB

FCC-ID: U4GJNGWB IC: 3862E-JNGWB PMN: JOYA TOUCH HVIN: JNG P HH

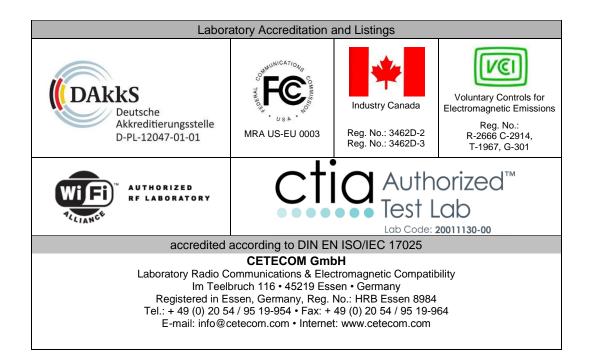




Table of contents

1. SUMMARY OF TEST RESULTS	3
1.1. Tests overview of US eCFR (FCC) Title 47, Subpart 15C and Canada IC (RSS) Standards	3
2. ADMINISTRATIVE DATA	5
2.1. Identification of the testing laboratory	
2.2. Test location	
2.4. Applicant's details	5
2.5. Manufacturer's details	
3. EQUIPMENT UNDER TEST (EUT)	6
3.1. TECHNICAL DATA OF MAIN EUT DECLARED BY APPLICANT	
3.2. IEEE 802.11 OVERVIEW: MODULATION AND DATA RATES	
3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	
3.5. EUT set-ups	
3.6. EUT operating modes	
3.8. Configuration of cables used for testing	
4. DESCRIPTION OF TEST SYSTEM SET-UP'S	9
4.1. Conducted Set-up (W-LAN)	9
4.2. Test system set-up for radiated magnetic field measurements below 30 MHz	11
4.3. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz	
5. MEASUREMENTS	
5.1. Duty-Cycle	
5.2. Maximum peak conducted output power	
5.3. RF-Parameter - Power Spectral Density	
5.4. General Limit - Radiated field strength emissions below 30 MHz	
5.6. General Limit - Radiated emissions, above 1 GHz	
5.7. RF-Parameter - Radiated Band Edge compliance measurements	25
5.8. Measurement uncertainties	
6. ABBREVIATIONS USED IN THIS REPORT	
7. ACCREDITATION DETAILS OF CETECOM'S LABORATORIES AND TEST SITES	
8. INSTRUMENTS AND ANCILLARY	
8.1. Used equipment "CTC"	
9. VERSIONS OF TEST REPORTS (CHANGE HISTORY)	32
Table of annex The listed attachments are an integral part of this report	Total pages
Annex 1: Test result diagrams (separate document) TR2-20842790-15-9a-A1	24
Annex 2: External photographs of EUT (separate document) TR2-20842790-15-9a-A2	5
Annex 3: Internal photographs of EUT (separate document) TR2-20842790-15-9a-A3	13
Annex 4: Test set-up photographs (separate document) TR2-20842790-15-9a-A4	10
Tune-up procedure for SSD45_JOYA TOUCH Plus_rev20160621(supplied by applicant)	3
JOYANG_TEST-TOOLS_QUICK_START_INSTRUCTIONS_REV20160530 (supplied by applicant)	41
JOYANG_ WLAN Antenna Final Report (22-Feb-2016) (supplied by applicant)	11
Operational Description, IOVA TOUCH, 20160530, rev05 (supplied by applicant)	10



1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests. Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The presented Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies with WLAN technology and operating frequency range at 2.412 to 2.462 GHz according to IEE 802.11 b/g/n. Other implemented wireless technologies were not considered within this test report.

The build-in W-LAN module is already approved with FCC ID: SQG-SSD45N and IC:3147A-SSD45N.

Following test cases have been performed to show compliance with valid Part15.209/15.247 of the FCC CFR Title 47 Rules, Edition 4th November 2015 and IC RSS-247 Issue 1/RSS-Gen Issue 4 standards.

1.1. Tests overview of US eCFR (FCC) Title 47, Subpart 15C and Canada IC (RSS) Standards

			References & Lin	nits		EUT	Result
Test cases	Port	FCC Standard	RSS Section	Test Limit	EUT set-up	opera- ting mode	
			Transmitter Mo	de			
Timing of transmitter (pulsed operation)	Antenna Terminal or enclosure	§15.35	RSS-Gen, Issue 4, Chapter 6.10		2	1	for information only
6 dB bandwidth	Antenna terminal (conducted)	§15.247(a)(2)	RSS-247, Issue $\geq 500 \text{ kHz for}$ Chapter 5.2(1) $\geq 500 \text{ kHz for}$ DTS systems			1	Remark 1.)
99% occupied bandwidth	* torminol [CCIIA /			-1	Not tested		
Transmitter Peak output power	Antenna terminal (conducted)	§15.247(b)(3)	RSS-247, Issue 1 Chapter 5.4(4)	1 Watt Peak	2	1	Pass Remark 3.)
Transmitter Peak output power radiated	Cabinet (radiated)	§15.247(b)(4)	RSS-247, Issue		1	1	Pass
Out-Of-Band RF- emissions Band-Edge emissions	Antenna terminal (conducted)	§15.247 (d)	RSS-Gen, Issue 4, Chapter 8.9	, 20 dBc			Remark 1.)
Power spectral density	Antenna terminal (conducted)	§15.247(e)	RSS-247, Issue 1 Chapter 5.2(2)	8dBm in any 3 kHz band	2	1	Pass Remark 3.)



Transmitter frequency stability	Antenna terminal (conducted)		RSS-Gen, Issue 4, Chapter 8.11	Operation within designated operational band			Remark 1.)
General field strength emissions + restricted bands	Cabinet + Inter- connecting cables (radiated)	§15.247 (d) §15.205 §15.209	RSS-247, Issue 1, Chapter 5.5 RSS-Gen: Issue 4: §8.9 Table 4+5+6	Emissions in restricted bands must meet the general field-strength radiated limits	1	1	Pass
AC-Power Lines Conducted Emissions	AC-Power lines	§15.207	RSS-Gen, Issue 4: Chapter 8.8 Table 3	FCC §15.107 class B limits §15.207 limits IC: Table 4, Chapter 7.2.4	-1		Remark 2.)

Remark: 1.) Please refer integrated SSD45N W-LAN Module's reports
FCC ID: SQG-SSD45N Report No.FR442904AC Version Rev.01, issued May 13, 2014 IC:3147A-SSD45N Report No.CR442904-02AC Version Rev.01, issued Nov. 03, 2015

2.) Please refer separate test report TR2-20842790-15-10d and corresponding annexes

3.) Tests performed only on Worst-Case JOYA TOUCH Variant

Type: P00AN04HL0GT0W7-GRR (see test report TR2-20842790-15-10a)

RF-E	RF-Exposure Evaluation (separation distance user to RF-radiating element greater 20cm)						
			References & Lin	mits	EUT	EUT opera-	
Test cases	Port	FCC Standard	RSS Section	Test Limit	set-up	ting mode	Result
Radio frequency radiation exposure requirements	Cabinet + Inter- connecting cables (radiated)	§1.1310(b) §2.1091 §2.1093	RSS-102 Issue 5	RF-Field Strength Limits: FCC: "general population/ uncontrolled" environment Table 1 IC: Table 4	1	1	See separate test report 1-1858_16- 01-05

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

Dipl.-Ing. Rachid Acharkaoui Responsible for test section

Dipl.-Ing. Christian Lorenz Responsible for test report

.....



2. Administrative Data

2.1. Identification of the testing laboratory

Company name: CETECOM GmbH Address: Im Teelbruch 116

45219 Essen - Kettwig

Germany

Responsible for testing laboratory: Dipl.-Ing. Rachid Acharkaoui

Deputy: Dipl.-Ing. Niels Jeß

2.2. Test location

2.2.1. Test laboratory "CTC"

Company name: see chapter 2.1. Identification of the testing laboratory

2.3. Organizational items

Responsible for test report : Dipl.-Ing. Christian Lorenz

Project leader: Dipl.-Ing. V. Krueger

Receipt of EUT: 2016-02-29

Date(s) of test: 2016-03-16 to 2016-10-10

Date of report: 2016-10-12

Version of template: 13.02

2.4. Applicant's details

Applicant's name: Datalogic ADC S.r.l.

Address: Via S. Vitalino, 13

40012, Lippo di Calderara di Reno (BO)

ITALY

Contact person: Mr. Eucarpio Guarisco

2.5. Manufacturer's details

Manufacturer's name: please see Applicant's details

Address: please see Applicant's details



3. Equipment under test (EUT)

3.1. TECHNICAL DATA OF MAIN EUT DECLARED BY APPLICANT

Main function	Mobile computer with integrat	Mobile computer with integrated IEEE 802.11b/g/n W-LAN Transceiver				
Туре	Portable shopping application	& general purpose mob	ile computer			
Frequency range	■ 2412 MHz (Channel 1) to 2	462 MHz (Channel 11)	for 20MHz BW			
(US/Canada -bands)	☐ 2422 MHz (Channel 3) to 2	☐ 2422 MHz (Channel 3) to 2452 MHZ (channel 9) for 40MHz BW				
Type of modulation	See chapter 3.2	See chapter 3.2				
Number of channels (USA/Canada -bands)	1 to 11					
Antenna Type	☑ Integrated	S .				
	☐ External, no RF- connector					
	☐ External, separate RF-connector					
Antenna Gain	Max. + 0.57 dBi gain according applicants information in 2.4 GHz band					
MAX Field strength (radiated):	102.2 dBμV/m@3m distance on nominal 2462 MHz					
Installed options	■ W-LAN 5 GHz (not tested	within this test report)				
	■ Bluetooth [©] (not tested with	in this test report)				
	■ NFC (not tested within this	test report)				
	■ battery charging option (W.	PC) (not tested within the	nis test report)			
Power supply	☑ Internal battery Li-Io 3.41V DC to 4.35 V DC (nominal 3.75 V DC)					
Special EMI components						
EUT sample type	☐ Production	☑ Pre-Production	☐ Engineering			
FCC label attached	⊻ yes	□ no				

3.2. IEEE 802.11 OVERVIEW: MODULATION AND DATA RATES

The modulations and data rates defined for 802.11 b/g/n transmitters are identified in the table below. Also it shows which operational mode is possible for the device under test (EUT) according applicant's information.

802.11 b -Mode (DSSS System)					
Data rate [MBps]	Supported by EUT				
1	DBPSK (Differential binary phase shift keying)	Yes			
2	DQPSK (Differential quadrature phase shift keying)	Yes			
5.5 / 11	CCK/PBCC (8-chip complementary code keying)	Yes			
22	ERP-PBCC (Packet binary convolutional coding)	Yes			

802.11g-Mode (OFDM system)				
Brutto data rate [MBps]	Supported by EUT			
6/9	BPSK	Yes		
12 /18	QPSK	Yes		
24 / 36	16-QAM	Yes		
48 / 54	64-QAM	Yes		

Remark: 52 sub-carriers which can be modulated at different data-rates.

802.11 n -Mode (OFDM)				
Brutto data rate [MBps]	Modulation type	Supported by EUT		
7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps	HT20 (MCS0MCS7)	Yes		
14.444/28.889/43.333/57.778/86.667/	HT20 (MCS8MCS15)	No		
115.556/130/144.444 Mbps		NO		
15/30/45/60/90/120/135/150 Mbps	HT40 (MCS0MCS7)	No		
30/60/90/120/180/240/270/300 Mbps	HT40 (MCS8MCS15)	No		



3.3. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Туре	S/N serial number	HW hardware status	SW software status
EUT A	JOYA TOUCH	P00AN04HL0HT0W7 -GR0	Z16P00043	Beta HW Version P/N: 911350015	SW Version:WEC7 Firmware Version: 2.16

^{*)} EUT short description is used to simplify the identification of the EUT in this test report.

3.4. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

sh desc	AE lort crip- n *)	Auxiliary Equipment	Туре	S/N serial number	HW hardware status	SW software status
AI	E 1					

^{*)} AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.5. EUT set-ups

EUT set-up no.*)	Combination of EUT and AE	Remarks
set. 1	EUT A	Radiated measurements Set-up
set. 2	EUT A + Cable 1	Conducted measurements Set-up

^{*)} EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.6. EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
op. 1	TX- Mode	With help of installed Datalogic test firmware version 2.16 a continuous TX-b/g/n(HT20) Mode can be established on -desired channels, modulation data rates in LRU Application

^{*)} EUT operating mode no. is used to simplify the test report.



3.7. EUT power level configurations

EUT operating mode no.*)	Description of operating modes	Power level information
op. 1	TX- Mode	With help of installed Datalogic test firmware version 2.16 maximum 90% power level in LMU application is configured for all measurements included in this report. This Power level will now be considered as a Nominal Power level throughout this report & shall be used for compliance purposes.

3.8. Configuration of cables used for testing

Cable number	Item	Туре	S/N serial number	HW hardware status	Cable length
Cable 1	RF –SMA Cable		-		



4. Description of test system set-up's


4.1. Conducted Set-up (W-LAN)

W-LAN conducted RF-Setup 1 (W1 Set-up)

General description:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to the power meter (3) for conducted power measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings.

Schematic:

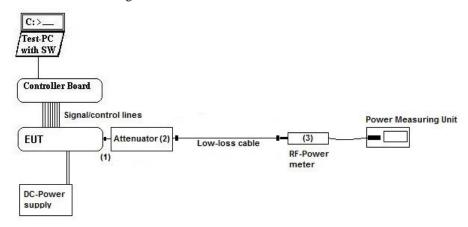

Testing method:

ANSI C63.10:2013, KDB 558074 D01 DTS Meas.Guidance v03r05

Used Equipment

Passive Elements

Test Equipment

Remark:

≥ 20 dB Attenuator

☒ Power Meter

See List of equipment under each test

■ Low loss RF-

■ DC-Power Supply

case and chapter 8 for calibration info

cables

×

■ Spectrum-Analyser

Measurement uncertainty

See chapter 5.8




Conducted Set-up W2

W-LAN conducted RF-Setup 2 (W2 Set-up)

General description:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

Schematic:

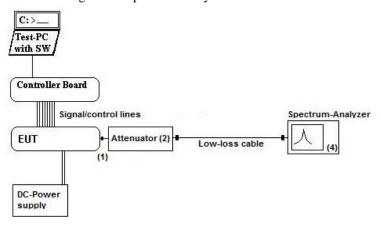

ANSI C63.10:2013, KDB 558074 D01 DTS Meas.Guidance v03r05 **Testing method:**

Used Equipment Passive Elements Test Equipment Remark:

≥ 20 dB Attenuator **☒** Power Meter See List of equipment under each test **■** Low loss RFcase and chapter 8 for calibration info **■** DC-Power Supply

cables ■ Spectrum-Analyser

See chapter 5.8 Measurement uncertainty

Testing method for DTS-ANSI C63.10: 2013 Chapter 11.9.2.3.1+ FCC KDB DTS558074 latest version from

devices: April 8, 2016



4.2. Test system set-up for radiated magnetic field measurements below 30 MHz


Specification: ANSI C63.10-2013 chapter 6.4 (§6.4.4.2)

General Description:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

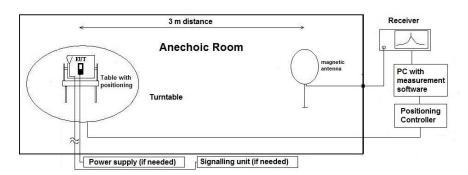

Testing method:

Exploratory, preliminary measurement

The EUT and it's associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90° , range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Formula:

 $M = L_T - E_C$

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

 $E_C = E_R + AF + C_L + D_F - G_A$

AF = Antenna factor

 $C_L = Cable loss$

D_F= Distance correction factor

 E_C = Electrical field – corrected value

 E_R = Receiver reading

G_A= Gain of pre-amplifier (if used)

 $L_T = Limit$ M = Margin

All units are dB-units, positive margin means value is below limit.

Distance correction:

Reference for applied correction (extrapolating) factors due to reduced measurement distance:

ANSI C63.10:2013, $\S6.4.4.2$ - Equations (2) + (3) + (4)



4.3. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz


Specification: ANSI C63.4-2014 chapter 8.2.3, ANSI C63.10-2013 chapter 6.5

General Description: Evaluating the field emissions have to be done first by an exploratory emissions

measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the

regulatory commissions.

Schematic:

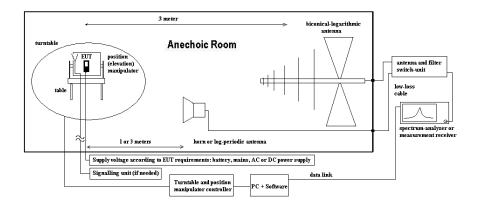

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of $0.8\,$ m height which is placed on the turntable. By rotating the turntable (range 0° to 360° , step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$
 (1)

$$M = L_T - E_C \tag{2}$$

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

AF = Antenna factor

 $C_L = Cable loss$

 D_F = Distance correction factor (if used)

 E_C = Electrical field – corrected value

 E_R = Receiver reading

 $G_A = Gain of pre-amplifier (if used)$

 $L_T = Limit$

M = Margin

All units are dB-units, positive margin means value is below limit.




4.4. Test system set-up for radiated electric field measurement above 1 GHz

Specification: ANSI C63.4-2014 chapter 8.3, ANSI C63.10-2013 chapter 6.6.3.3 & 6.6.4

General Description:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

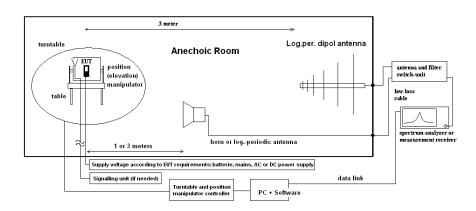

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$
 (1)

$$M = L_T - E_C \tag{2}$$

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out. On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

 E_C = Electrical field – corrected value

 E_R = Receiver reading

M = Margin

 $L_T = Limit$

AF = Antenna factor

 $C_L = Cable loss$

 D_F = Distance correction factor (if used)

 $G_A = Gain of pre-amplifier (if used)$

All units are dB-units, positive margin means value is below limit.



5. Measurements

5.1. Duty-Cycle

5.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

Ambient Clima	tic conditions	Temperatu	ıre: (22±2)°C	Rel. humidity: (45±1	5)%	
test site	☐ 441 EMI SAR	□ 348 EMI cond.	□ 443 EMI FAR	■ 347 Radio.lab.	□ 337 OATS	
equipment	□ 331 HC 4055					
spectr. analys.	№ 683 FSU26	□ 120 FSEM	□ 264 FSEK			
power meter	□ 262 NRV-S	□ 266 NRV-Z31	□ 265 NRV-Z33	□ 261 NRV-Z55	□ 356 NRV-Z1	
multimeter	☐ 341 Fluke 112					
DC power	□ 086 LNG50-10	□ 087 EA3013	☐ 354 NGPE 40	☐ 349 car battery	☐ 350 Car battery	¥ 463 HP3245A
line voltage	□ 230 V 50 Hz via j	public mains	■ 4.35 V DC (full)	y charged internal batt	tery)	
otherwise	⊠ K4 Cable		≥ 530 Attenuator 1	10dB		

Method of measurement:

☑ conducted
☐ radiated

A special firmware program is used for test purposes. In opposite to normal operating mode a higher duty-cycle is set in order to facilitate the measurements. This is maximized at the extent possible.

The necessary duty-cycle correction factor is determined on nominal conditions on middle channel only. It is assumed that no noticeable changes occur when tested on other channels or climatic conditions. The Duty-Cycle was constant, means without variations. Minimum and maximum modulation index was tested, the duty cycle is to be found therefore between a minimum and maximum values.

Results:

WLAN-	Marker 1 [BTS ON']	Marker 2 [BTS ON']	TX on	TX off	Converted to	10log(1/DC)
Modes	us	us	us	us	DC	
	-		b-Mode			
1 MBit	1487.247000	1565.250000	1487.24700	78.00300	0.95017	0.22201
11MBit	509.682692	540.865385	509.68269	31.18269	0.94235	0.25789
			a-Mode			
6MBit	159.682692	190.865385	159.68269	31.18269	0.8366	0.7747
54MBit	123.016026	156.698718	123.01603	33.68269	0.7850	1.0510
	n-Mode (HT20)					
MCS0	235.195513	273.365385	235.19551	38.16987	0.8604	0.6531
MCS7	278.076923	311.153846	278.07692	33.07692	0.8937	0.4881

Remark:

1.)Tests performed only on Worst-Case JOYA TOUCH Variant Type: P00AN04HL0GT0W7-GRR (see test report TR2-20842790-15-10a)

Calculated with following formulas:

Duty cycle: $x = \frac{Tx_{on}}{Tx_{on} + Tx_{off}}$	Duty cycle factor [dB]:	$10\log\left(\frac{1}{x}\right)$
--	-------------------------	----------------------------------

The results were corrected in order to evaluate for worst-case result each time when average values are necessary for example average radiated emissions or similar.



5.2. Maximum peak conducted output power

5.2.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	□ CETECOM Essei	,	☐ 443 System CTC	'-FAR-FMI-	☐ Please see Chapt	,
		\ 1 /		-1 AK-LWII-	☐ Trease see Chapt	C1. 2.2.3
test site	☐ 441 EMI SAR	☐ 487 SAR NSA	■ 347 Radio.lab.			
receiver	□ 377 ESCS30	□ 001 ESS	□ 489 ESU 40			
spectr. analys.	□ 584 FSU	□ 120 FSEM	□ 264 FSEK	□ 489 ESU 40		
antenna	□ 574 BTA-L	☐ 133 EMCO3115	□ 302 BBHA9170	□ 289 CBL 6141	□ 030 HFH-Z2	□ 477 GPS
signaling	□ 392 MT8820A	□ 436 CMU	□ 547 CMU			
otherwise	≥ 266 NRV-Z31	№ 600 NRVD	□ 110 USB LWL	☐ 482 Filter Matrix	☐ 378 RadiSense	□ 693 TS8997
DC power	□ 456 EA 3013A		□ 459 EA 2032-50	□ 268 EA- 3050	□ 494 AG6632A	☐ 498 NGPE 40
otherwise	□ 331 HC 4055	□ 248 6 dB Attenuator	□ 529 Power divider	□ - cable OTA20		
	≥ 613 20dB Attenua	tor	■ K 4 Cable kit			
line voltage	□ 230 V 50 Hz via	oublic mains	■ 4.35 V DC (fully charged internal battery)			

5.2.2. Reference

FCC	☑ §15.247(b) (3) + KDB 558074 D01 DTS Meas Guidance v03r05
IC	☑ RSS-247, Chapter 5.4(4)
ANSI	☑ ANSI 63.10:2013
Specification	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

5.2.3. EUT settings:

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions. Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

5.2.4. Test condition and measurement test set-up

Signal ink to test system (if used):	□ air link	☐ cable connection	☑ none	
EUT-grounding	⋈ none	☐ with power supply	☐ additional connection	
Equipment set up	☑ table top 1.5m height		☐ floor standing	
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%	
General measurement procedures	Please see cha	pter "Test system set-up	for conducted RF-measurement at antenna Port" (W1	
	Set-up)			



5.2.5. Measurement method and analyzer settings:

The measurement was performed in non-hopping transmission mode with the carrier set to lowest/middle and highest channel. The power was also checked for different data rates, modulation scheme or packet types if applicable.

MEASUREMENT METHOD/ SPECTRUM-ANALYZER SETTINGS:

VIENDUKENIENI WIET.	HOD/ SI EC	TRUM-ANALIZER SETTINGS.			
Measurement Method 1.)	§15.247(b)	1.) □ PK1-Method (§5.2.1.1): RBW > 6dB-bandwidth of the signal, ANSI 63.10:			
	(3)	2009, chapter 6.10.2.1a			
	Maximum	2.) \square PK2-Method (§5.2.1.2): Channel integration method (ANSI 63.10:2009)			
	Peak	3.) 🗷 PK1-Method (§9.1.2 KDB): Peak Power Meter Method			
		,			
	§15.247(b)	4.) □ AVG1 - power averaging over EBW + integrated band power			
	(3)	measurement			
	Maximum	5.) □ AVG2 - trace averaging over EBW + integrated band power			
	Average	measurement			
		6.) ☐ RMS power meter method			
	MIMO	7.) Method as described in Chapter 3.8 was used for measurements on two			
		available RF-Antenna ports.			
Center Frequency		Nominal channel frequency			
Span		30% higher than the EBW measured before			
Resolution Bandwidth (RI	3W)	1MHz			
Video Bandwidth (VBW)		3MHz			
Sweep time		coupled			
Detector		Peak, Max hold mode for method PK1/PK2 or RMS and trace average for method			
		AVG1/AVG2			
Sweep Mode		Repetitive mode, allow trace to stabilize			
Analyzer-Mode		■ normal			
		☐ activated channel integration method with limits set to the EBW of the signal			

Remark 1: guidance 558074 D01 measurement DTS guidance V03r05

5.2.6. RESULTS

APLICANT'S DECLARED ANTENNA CHARACTERISTICS:

🗷 Directional Gain < 6 dBi (measured: difference between measured conducted and radiated eirp. power)

☐ Directional Gain > 6 dBi (measured / applicant's declaration) -> conducted power reduction necessary

• Maximum declared antenna gain [isotropic]: + 0.57 dBi for WLAN 2.4 GHz band

Different modulation types and data rates were tested in order to find the maximum peak conducted output power. **Enclosed are only the maximum values for each modulation format**, pls. compare separate document A1 for all results.

	Max. Peak power (conducted) [dBm]							
Set-up no: 2	Low channel = 1	Middle channel = 6	High channel = 11					
Op-Mode: 1	(2412 MHz)	(2437 MHz)	(2462 MHz)					
Measured Level	14.36	14.27	13.66					
b-Mode	(@1Mbps) & (@11Mbps)	(@1Mbps) & (@2Mbps)	(@1Mbps)					
Measured Level	13.71	15.98	12.56					
g-Mode	(@9Mbps)	(@24Mbps)	(@24Mbps)					
Measured Level	12.69	12.95	12.65					
n-Mode HT20	(@MCS0)	(@MCS0) (@MCS1)						
Limit		1 Watt (30dBm) Peak						

Remark:

- 1.) Only maximum values among all data rates and modulations are given above. For other data rates please refer diagrams in separate annex A1
- 2.) Tests performed only on Worst-Case JOYA TOUCH Variant Type: P00AN04HL0GT0W7-GRR (see test report TR2-20842790-15-10a)

5.2.6.1. VERDICT: Maximum value of 15.98 dBm Peak (39.62 mW) -> **Pass**



5.3. RF-Parameter - Power Spectral Density

5.3.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	▼ CETECOM Esser	n (Chapter. 2.2.1)	☐ Please see Chapte	er. 2.2.2	☐ Please see Chap	ter. 2.2.3
test site	☐ 441 EMI SAR	□ 487 SAR NSA	□ 337 OATS	■ 347 Radio.lab.		
receiver	□ 377 ESCS30	□ 001 ESS	□ 489 ESU	≥ 683 FSU26		
spectr. analys.	□ 489 ESU	□ 120 FSEM	□ 264 FSEK			
power supply	¥ 463 HP3245A	□ 457 EA 3013A	□ 463	□ 268 EA- 3050	□ 494 AG6632A	☐ 498 NGPE 40
	■ 4.35 V DC (fully charged internal battery)		□ 060 110 V 60 Hz via PAS 5000			
otherwise	≥ 613 20dB Attenua	tor		区 cable K4		

5.3.2. REFERENCES: §15.247(e), RSS-247, Chapter 5.2(2)

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.3.3. TEST CONDITION AND MEASUREMENT TEST SET-UP

Signal ink to test system (if used):	☐ air link	☐ cable connection	⋈ none
EUT-grounding	≥ none	☐ with power supply	□ additional connection
Equipment set up	■ table top		☐ floor standing
Climatic conditions	Temperature:	(22±3°C)	Rel. humidity: (40±20)%
General measurement procedures	Please see cha	pter "Test system set-up	for conducted RF-measurement at antenna Port" (W2
	Set-up)		

5.3.4. EUT SETTINGS:

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions. Different modulation characteristics have been checked, e.g. data rates which EUT can operate.

5.3.5. MEASUREMENT METHOD/ SPECTRUM-ANALYZER SETTINGS

	-				
Measurement Method	☐ ANSI 63.10:2009				
	☐ AVGPSD Method				
	☑ guidance 558074 D01 measurement DTS guidance v03r05				
Center Frequency	Nominal channel frequency				
Span	530% higher than the EBW measured before				
Resolution Bandwidth (RBW)	> 3 kHz (at least 3 times RBW) - pls. see diagram				
Video Bandwidth (VBW)	> 10 kHz - pls. see diagram				
Sweep time	coupled				
Detector	Peak, Max hold mode for method PKPSD or RMS method AVGPSD				
Sweep Mode	Repetitive mode, allow trace to stabilize (PKPSD) or single (AVGPSD)				
Addition of correction factors	external measuring set-up path-loss				

Remarks:--



5.3.6. RESULTS

	POWER SPECTRAL DENSITY [dBm/3 kHz]						
Set-up no.: 2 Op. Mode: 1	Low channel = 1 (2412 MHz)	Middle channel = 6 (2437 MHz)	High channel = 11 (2462 MHz)				
Measured Level	-0.06	-2.84	-2.99				
b-Mode	(@11Mbps)	(@1Mbps)	(@1Mbps)				
Measured Level	-5.56	-3.32	-6.31				
g-Mode	(@9Mbps)	(@24Mbps)	(@6Mbps)				
Measured Level	-6.10	-4.23	-7.22				
n-Mode	(@MCS0)	(@MCS0)	(@MCS0)				
Limit		< 8dBm/3 kHz					

Remark: 1.) Only maximum values among all data rates and modulations are given above.

For other data rates please refer diagrams in separate annex A1 2.)Tests performed only on Worst-Case JOYA TOUCH Variant

Type: P00AN04HL0GT0W7-GRR (see test report TR2-20842790-15-10a)

5.3.7. VERDICT: Pass



5.4. General Limit - Radiated field strength emissions below 30 MHz

5.4.1. Test location and equipment

test location	■ CETECOM Esser	n (Chapter. 2.2.1)	☐ Please see Chapte	r. 2.2.2	☐ Please see Chapter. 2.2.3		
test site	■ 441 EMI SAR	□ 487 SAR NSA	☐ 347 Radio.lab.				
receiver	□ 377 ESCS30	≥ 001 ESS					
spectr. analys.	□ 584 FSU	□ 120 FSEM	□ 264 FSEK				
antenna	□ 574 BTA-L	☐ 133 EMCO3115	□ 302 BBHA9170	□ 289 CBL 6141	■ 030 HFH-Z2	□ 477 GPS	
signaling	□ 392 MT8820A	□ 371 CBT32	□ 547 CMU	□ 594 CMW			
otherwise	☐ 400 FTC40x15E	□ 401 FTC40x15E	□ 110 USB LWL	☐ 482 Filter Matrix	☐ 378 RadiSense		
DC power	□ 456 EA 3013A	□ 457 EA 3013A	□ 459 EA 2032-50	□ 268 EA- 3050	□ 494 AG6632A	☐ 498 NGPE 40	
line voltage	□ 230 V 50 Hz via p	oublic mains	■ 4.35 V DC (fully	charged internal batte	ry)		

5.4.2. Requirements

FCC	Part 15, Subpart 0	Part 15, Subpart C, §15.205 & §15.209											
IC	RSS-Gen: Issue 4	RSS-Gen: Issue 4: §8.9 Table 5											
ANSI	C63.10-2013	C63.10-2013											
Frequency [MHz]	Field [[Field strength limit Distance $\mu V/m$ $[dB\mu V/m]$ $[m]$ Remarks											
0.009 - 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used due to measurement distance of 3 m									
0.490 - 1.705	24000/f (kHz)	87.6 – 20Log(f) (kHz)	30	Correction factor used due to measurement distance of 3 m									
1.705 – 30	30	29.5	30	Correction factor used due to measurement distance of 3 m									

5.4.3. Test condition and test set-up

211101 2 001 00110	Ho. Test condition and test set up						
Signal link to test s	Signal link to test system (if used):		☐ cable connection	x none			
EUT-grounding		≥ none	☐ with power supply	□ additional connection			
Equipment set up		■ table top		☐ floor standing			
Climatic conditions	3	Temperature: ((22±3°C)	Rel. humidity: (40±20)%			
		≥ 9 – 150 kHz	z RBW/VBW =	200 Hz Scan step = 80 Hz			
	Scan data	№ 150 kHz – 3	RBW/VBW = RBW/VBW	9 kHz Scan step = 4 kHz			
		☐ other:					
EMI-Receiver or	Scan-Mode		■ 6 dB EMI-Receiver Mode □ 3dB Spectrum analyser Mode				
Analyzer Settings	Detector	Peak (pre-measurement) and Quasi-PK/Average (final if applicable)					
	Mode:	Repetitive-Sca	n, max-hold				
	Sweep-Time	Coupled – calibrated display if continuous signal otherwise adapted to EUT's individual					
		transmission duty-cycle					
General measureme	nt procedures	Please see chapter "Test system set-up radiated magnetic field measurements below 30 MHz"					

5.4.4. Measurement Results

The results are presented below in summary form only. For more information please consult the diagrams included in annex 1.

The EUT is put on operation on middle channel only. If critical peaks are found (Margin <10 dB) the lowest and highest channels will be performed too. For more information please see the diagrams.

Table of measurement results:

Diagra No.	ım Cı	arrier nannel No.	Frequency range	Set- up no.	OP- mode no.	Remark	Use PK	ed dete	ector QP	Result
2.01	High	11	9 kHz-30 MHz	1	1	b-Mode,1Mbit	×			Pass

Remark: 1.) For further details please refer diagrams in separate annex A1

2.) Tests performed only on Worst-Case Channels of JOYA TOUCH Variant

Type: P00AN04HL0GT0W7-GRR (see test report TR2-20842790-15-10a)



5.4.5. Correction factors due to reduced meas. distance (f< 30 MHz)

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

Frequency -Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas< D _{near-field})	2'te Condition (Limit distance bigger d _{near-field})	Distance Correction accord. Formula
kHz	9,00E+03 33333,33 5305,17 1,00E+04 30000,00 4774,65 2,00E+04 15000,00 2387,33 3,00E+04 10000,00 1591,55 4,00E+04 7500,00 1193,66 5,00E+04 6000,00 954,93 6,00E+04 5000,00 795,78 7,00E+04 4285,71 682,09 8,00E+04 3750,00 596,83 9,00E+04 3333,33 530,52 1,00E+05 3000,00 477,47		300	fulfilled	not fulfilled	-80,00 -80,00 -80,00 -80,00 -80,00 -80,00 -80,00 -80,00 -80,00 -80,00	
	1,25E+05 2,00E+05 3,00E+05 4,00E+05 4,90E+05 5,00E+05 6,00E+05 7,00E+05 9,00E+05	2400,00 1500,00 1000,00 750,00 612,24 600,00 500,00 428,57 375,00 333,33	381,97 238,73 159,16 119,37 97,44 95,49 79,58 68,21 59,68 53,05		fulfilled	not fulfilled fulfilled fulfilled fulfilled fulfilled fulfilled not fulfilled not fulfilled not fulfilled not fulfilled not fulfilled not fulfilled	-80,00 -78,02 -74,49 -72,00 -70,23 -40,00 -40,00 -40,00 -40,00 -40,00
MHz	1,00 1,59 2,00 3,00 4,00 5,00 6,00 7,00 8,00 9,00 10,60 11,00 12,00 13,56 15,00 15,92 17,00 18,00 20,00 21,00 23,00 25,00 27,00 29,00 30,00	300,00 188,50 150,00 100,00 75,00 60,00 50,00 42,86 37,50 33,33 30,00 28,30 27,27 25,00 22,12 20,00 18,85 17,65 16,67 15,00 14,29 13,04 12,00 11,11 10,34 10,00	3.83 47,75 30,00 23,87 15,92 11,94 9,55 7,96 6,82 5,97 5,31 4,77 4,50 4,34 3,98 3,52 3,18 3,00 2,81 2,65 2,39 2,27 2,08 1,91 1,77 1,65 1,59	30	fulfilled not fulfilled	not fulfilled not fulfilled	-40,00 -40,00 -38,02 -34,49 -32,00 -30,06 -28,47 -27,13 -25,97 -24,95 -24,04 -23,53 -23,21 -22,45 -21,39 -20,51 -20,00



5.5. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz

5.5.1. Test location and equipment

test location	▼ CETECOM Esser	n (Chapter. 2.2.1)	☐ Please see Chapte	er. 2.2.2	☐ Please see Chapter. 2.2.3					
test site										
receiver	□ 377 ESCS30	■ 001 ESS	□ 489 ESU 40	□ 620 ESU 26						
spectr. analys.	□ 584 FSU	□ 120 FSEM	□ 264 FSEK							
antenna	≥ 574 BTA-L	☐ 133 EMCO3115	□ 302 BBHA9170	□ 289 CBL 6141	□ 030 HFH-Z2	□ 477 GPS				
signaling	□ 392 MT8820A	□ 371 CBT32	□ 547 CMU	□ 594 CMW						
otherwise	☐ 400 FTC40x15E	□ 401 FTC40x15E	□ 110 USB LWL	■ 482 Filter Matrix						
DC power	□ 456 EA 3013A	□ 457 EA 3013A	□ 459 EA 2032-50	□ 268 EA- 3050	□ 494 AG6632A	☐ 498 NGPE				
line voltage	□ 230 V 50 Hz via j	oublic mains	■ 4.35 V DC (fully charged internal battery)							

5.5.2. Requirements/Limits

3.2. Requirements/Limits									
	FCC	☐ Part 15 Subpart B, §15.109, class B ☑ Part 15 Subpart C, §15.209 @ frequencies defined in §15.205							
	IC	 ☑ RSS-Gen., Issue 4, Chapter 8.9, Table 4+6 (licence-exempt radio apparatus) ☐ RSS-Gen., Issue 4, Chapter 7.1.2, Table 2 (receiver) ☐ ICES-003, Issue 6, Table 5 (Class B) ☐ RSS-247, Issue 1, Chapter 5 							
	ANSI	☐ C63.4-2014 ☑ C63.10-2013							
	Enggueney [MHz]	Radiated emissions limits, 3 meters							
	Frequency [MHz]	QUASI Peak [μV/m]	QUASI-Peak [dBμV/m]						
Limit	30 - 88	100 40.0							
88 - 216		150	43.5						
	216 - 960	200	46.0						
	above 960	500	54.0						

5.5.3. Restricted bands of operation (FCC §15.205/ RSS-Gen, Issue 4 Chapter 8.9, Table 4)

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.20725-4.20775	37.5-38.25	1645.5-1646.5	9.3-9.5
6.215-6.218	73-74.6	1660-1710	10.6-12.7
6.26775-6.26825	74.8-75.2	1718.8-1722.2	13.25-13.4
6.31175-6.31225	108-121.94	2200-2300	14.47-14.5
8.291-8.294	123-138	2310-2390	15.35-16.2
8.362-8.366	149.9-150.05	2483.5-2500	17.7-21.4
8.37625-8.38675	156.52475-156.52525	2690-2900	22.01-23.12
8.41425-8.41475	156.7-156.9	3260-3267	23.6-24.0
12.29-12.293	162.0125-167.17	3332-3339	31.2-31.8
12.51975-12.52025	167.72-173.2	3345.8-3358	36.43-36.5
12.57675-12.57725	240-285	3600-4400	
13.36-13.41	322-335.4		
Remark: only spurious emissions	are allowed within these frequency b	ands not exceeding the limits per §1	5.209



5.5.4. Test condition and measurement test set-up

·····									
Signal link to test sy	stem (if used):	☐ air link	☐ cable connection	⋈ none					
EUT-grounding		≥ none	☐ none ☐ with power supply ☐ additional connection						
Equipment set up		table top 0.8 table top 0.8 table top 0.8	3m height	☐ floor standing					
Climatic conditions		Temperature: ((22±3°C)	Rel. humidity: (40±20)%					
EMI-Receiver	Scan frequency range:	≥ 30 − 1000 M	IHz □ other:						
(Analyzer) Settings	Scan-Mode	🗷 6 dB EMI-R	eceiver Mode 🗆 3 dB sp	ectrum analyser mode					
	Detector	Peak / Quasi-pe	Peak / Quasi-peak						
	RBW/VBW	100 kHz/300 kHz							
	Mode:	Repetitive-Sca	Repetitive-Scan, max-hold						
	Scan step	80 kHz							
	Sweep-Time	Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT's individual							
		duty-cycle							
General measureme	ent procedures	Please see chapter "Test system set-up for electric field measurement in the range 30 MHz							
		to 1 GHz"							

5.5.5. MEASUREMENT RESULTS

The results are presented below in summary form only. For more information please consult the diagrams included in annex 1.

Table of measurement results:

Dia- gram no.	Carrier (Channel	Frequency range	Set- up no.	OP- mode no.	Remark	Use	d detec	ctor	Result
no.	Range	No.		no.	110.		PK	AV	QP	
3.01	High	11	30 MHz – 1 GHz	1	1	b-Mode,1Mbit	×		×	Pass

Remark: 1.) For further details please refer diagrams in separate annex A1

2.) Tests performed only on Worst-Case Channels of JOYA TOUCH Variant Type: P00AN04HL0GT0W7-GRR (see test report TR2-20842790-15-10a)



${\bf 5.6.\ General\ Limit\ -\ Radiated\ emissions,\ above\ 1\ GHz}$

5.6.1. Test location and equipment FAR

	· · · · · · · · · · · · · · · · · · ·								
test site	□441 EMI SAR	□ 348 EMI cond.	■ 443 EMI FAR	☐ 347 Radio.lab.	□337 OATS				
spectr. analys.	□584 FSU	□ 120 FSEM	□ 264 FSEK	¥ 489 ESU 40					
antenna meas	□574 BTA-L	□ 289 CBL 6141	□ 608 HL 562	■ 549 HL025	■ 302 BBHA9170	□ 477 GPS			
antenna meas	□123 HUF-Z2	□ 132 HUF-Z3	□ 030 HFH-Z2	□ 376 BBHA9120E	3				
antenna subst	□071 HUF-Z2	□ 020 EMCO3115	□ 063 LP 3146	□ 303 BBHA9170					
multimeter	□341 Fluke 112								
signaling	□392 MT8820A	□371 CBT32	□ 547 CMU	□ 594 CMW					
DCpower	□086 LNG50-10	□ 087 EA3013	☐ 354 NGPE 40	☐ 349 car battery	□350 Car battery				
line voltage	□ 230 V 50 Hz via	public mains	■ 4.35 V DC (fully charged internal battery)						

5.6.2. Requirements/Limits (CLASS B equipment)

0.2. Requirements/Emitts (CLASS B equipment)								
FCC	□ Part 15 Subpart B, §15.109 class B E Part 15 Subpart C, §15.209 for frequencies defined in §15.205 □ Part 15 Subpart C, §15.407(b)(1)(2)(3) 9							
IC	 ■ RSS-Gen., Issue 4, Chapter 8.9, Table 4+6 (transmitter licence exempt) □ RSS-Gen., Issue 4, Chapter 8.9, Table 2 (receiver) □ RSS-247, Issue 1, Chapter 6 							
ANSI	☐ C63.4-2014 ☑ C63.10-2013							
		Limits	s					
Frequency [MHz]	AV [μV/m]	AV [dBμV/m]	Peak [μV/m]	Peak [dBμV/m] or [dBm/MHz]				
above 1 GHz for frequencies as defined in \$15.205 or RSS-Gen., Issue 4, §8.10 - Table 6	500	54.0	5000	74.0 dBμV/m				

5.6.3. Test condition and measurement test set-up

3.0.3. I CS	.o.s. Test condition and measurement test set-up								
Signal link	to test system (if used):	☐ air link	☐ cable connection	⊠none					
EUT-groun	ding	≥ none	☐ with power supply	☐ additional connection					
Equipment	set up	table top 1.5 table top 1.5 table top 1.5	5m height	☐ floor standing					
Climatic co	nditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%					
Spectrum-	Scan frequency range:	■ 1 – 18 GHz	– 40 GHz □ other:						
Analyzer	Scan-Mode	■ 6 dB EMI-Receiver Mode □ 3 dB Spectrum analyser Mode							
settings	Detector	Peak and Average							
	RBW/VBW	1 MHz / 3 MHz							
	Mode:	Repetitive-Sca	n, max-hold						
	Scan step	400 kHz							
	Sweep-Time	Coupled – calibrated display if CW signal otherwise adapted to EUT's individual duty-cycle							
General mea	surement procedures	Please see chapter "Test system set-up for radiated electric field measurements above 1 GHz"							



5.6.4. Measurement Results

The results are presented below in summary form only. For more information please consult the diagrams included in annex 1.

Dia- gram no.	Carrier (Channel	Frequency range	Set- up no.	OP- mode no.	Remark	Use	d detec	op	Result
4.01	High	11	1-18 GHz	1	1	b-Mode,1Mbit	×	×		Pass
4.01a	High	11	18-25 GHz	1	1	b-Mode,1Mbit	×	×		Pass

Remark: 1.) For further details please refer diagrams in separate annex A1

2.) Tests performed only on Worst-Case Channels of JOYA TOUCH Variant Type: P00AN04HL0GT0W7-GRR (see test report TR2-20842790-15-10a)



5.7. RF-Parameter - Radiated Band Edge compliance measurements

5.7.1. Test location and equipment FAR

test site	□441 EMI SAR	☐ 348 EMI cond.	¥ 443 EMI FAR	☐ 347 Radio.lab.	□ 337 OATS		
spectr. analys.	□584 FSU	☐ 120 FSEM	□ 264 FSEK	489 ESU 40			
antenna meas	□574 BTA-L	☐ 289 CBL 6141	□ 608 HL 562	区 549 HL025	□ 302 BBHA9170	□ 477 GPS	
antenna meas	□123 HUF-Z2	☐ 132 HUF-Z3	□ 030 HFH-Z2				
antenna subst	□071 HUF-Z2	☐ 020 EMCO3115	□ 063 LP 3146	□ 303 BBHA9170			
multimeter	□341 Fluke 112						
signaling	□392 MT8820A	□ 371 CBT32	□ 547 CMU	□ 594 CMW			
DC power	□086 LNG50-10	■ 087 EA3013	☐ 354 NGPE 40	☐ 349 car battery	☐ 350 Car battery		
line voltage	■ 4.35 V DC (fully	charged internal batte	ery)	□ 060 120 V 60 Hz via PAS 5000			

5.7.2. Requirements/Limits

FCC	☐ Part 15 Subpart B, §15.109 class B ☑ Part 15 subpart C, §15.209 @ frequencies defined in §15.205
IC	□ RSS-210, Issue 8, Annex 8 ☑ RSS-247, Issue 1, Chapter 5.5 ☑ RSS-Gen: Issue 4: §8.9, Table 4+6
ANSI	□ C63.4-2009 □ C63.4-2014 □ C63.10-2009 ☑ C63.10-2013, Chapter 6.10.6

5.7.3. Test condition and measurement test set-up

	······································							
Signal ink t	to test system (if used):	□ air link □ cable connection		⋈ none				
EUT-groun	EUT-grounding		☐ with power supply	□ additional connection				
Equipment	set up	table top 1.5	5m height	☐ floor standing				
Climatic co	onditions	Temperature: ((22±3°C)	Rel. humidity: (40±20)%				
Spectrum-	Scan frequency range:	□ 1 – 18 GHz	□ 18 – 25 GHz □ 18 -	- 40 GHz other: see diagrams				
Analyzer	Scan-Mode	☐ 6 dB EMI-Receiver Mode 🗷 3 dB Spectrum analyser Mode						
settings	Detector	Peak and Average						
	RBW/VBW	Left band-edge: 100kHz/300kHz						
		Right band-edg	ge: 1 MHz/3 MHz					
	Mode:	Repetitive-Sca	n, max-hold					
	Scan step	40kHz or 400	kHz					
	Sweep-Time	Coupled – calibrated display if CW signal otherwise adapted to EUT's individual duty-cycle						
General mea	asurement procedures	Please see chapter "Test system set-up for radiated electric field measurements above 1 GHz"						
	-	for general measurements procedures in anechoic chamber.						

5.7.4. Measurement Method

For <u>uncritical results</u> where a measurement resolution bandwidth of 1MHz can clearly show the compliance without influencing the results, a field strength measurement was performed to show compliance.

For <u>critical results</u> a Marker-Delta marker method was used for showing compliance to restricted bands. The method is according ANSI C63.10:2013, Chapter 6.10.6 "Marker-Delta method",. The method consists of three independent steps:

- **1. Step:** Prior to the measurement the fundamental radiated In-Band field strength was performed. The determined value is used as reference value.
- **2. Step**: Second step consist of finding the relative attenuation between the fundamental emission and the maximum local out-of-band emission (within 2 MHz range around the band edge either on the band-edge directly or some modulation product if the level is greater than that on the band-edge) when measured with lower resolution bandwidth.
- **3. Step:** The delta value recorded in step 2 will be subtracted from value recorded in step 1, thus giving the required field strength at the band-edge. This value must fulfil the requirements for radiated spurious emissions in restricted bands in FCC §15.205 or RSS-Gen, Issue 4, Chapter 8.10, Table 6 with the general limits of FCC §15.209 or RSS-Gen, Issue 4 Chapter 8.9, Table 4.

5.7.5. EUT settings

The EUT was instructed to send with maximum power (if adjustable) according to applicants instructions.



5.7.6. Results: for non-restricted bands near-by

5.7.6.1. Non-restricted bands near-by - limits according FCC §15.407 and RSS-247, Issue 1, Chapter 5.5

Diagram No.	Channel	Restricted	Fundamental Value [dBuV/m]		Peak-Value at Band-Edge	Difference	Limit	Margin	Verdict	Remark:	
Diagram No.	no.	band?	Peak-Value Average-Value [dBuV/m] [dB] [dB]		[dBc]	[dB]	verdict	Noman.			
9.01	1	no	94,76	88,14	56,49	38,27	20	18,27	PASS	TX_b-mode_BW 20 MHz_1Mbps Power Value= Nominal Power	
9.03	1	no	90,16	81,57	56,46	33,70	20	13,7	PASS	TX_g-mode_BW 20 MHz_6Mbps Power Value= Nominal Power	
9.05	1	no	90,11	80,95	54,10	36,01	20	16,01	PASS	TX_n-mode_BW 20 MHz_MCS0 Power Value= Nominal Power	

Remark: Refer chapter 5.1 for applicable duty-cycle correction factor for AV value maximum 1.05 dB additional to be considered on g-Mode modulation

5.7.6.2. Restricted bands near-by

(§15.205 with limits accord. FCC §15.209) and (RSS-Gen, Issue4, Chapter 8.10)

Diagram No.	Channel	Restricted band?		ental Value uV/m]	Value at Ba [dBu\		Lin [dBu	nits V/m]	Margin [dB]				Verdict	Remark:
	no.	band?	Peak-Value	Average-Value	Peak -Value	Average -Value	Peak -Value	Average -Value	Peak	Average				
9.02	11	yes	102,2	100,02	58,49	46,14	74	54	15,51	7,86	PASS	TX_b-mode_BW 20 MHz_1Mbps Power Value= Nominal Power		
9.04	11	yes	98,27	89,84	58,18	47,17	74	54	15,82	6,83	PASS	TX_g-mode_BW 20 MHz_6Mbps Power Value= Nominal Power		
9.06	11	yes	98,88	89,25	57,85	47,04	74	54	16,15	6,96	PASS	TX_n-mode_BW 20 MHz_MCS0 Power Value= Nominal Power		

Remark: Refer chapter 5.1 for applicable duty-cycle correction factor for AV value maximum 1.05 dB additional to be considered on g-Mode modulation

5.7.7. Verdict: Pass



5.8. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor \mathbf{k} , such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Ca	lculate confi	ı a	Remarks			
Conducted emissions (U CISPR)	CISPR 16-2-1	9 kHz - 150 kHz 150 kHz - 30 MHz	3.6 dE	4.0 dB 3.6 dB				-	
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz 1 GHz - 18 GHz	4.2 dE 5.1 dE						E-Field
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-						-
Power Output radiated	-	30 MHz - 4 GHz	3.17 d	3.17 dB					Substitution method
Demon Outout and docted		Set-up No.	Cel- C1	Cel- C2	BT1	W1	W2		
Power Output conducted	-	9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A		-
		12.75 - 26.5GHz	N/A	0.82		N/A	N/A		
Conducted emissions	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69		N/A - not
on RF-port		2.8 GHz - 12.75GHz	1.48	N/A	1.51	N/A	1.43		applicable
		12.75 GHz - 18GHz	1.81	N/A	1.83	N/A	1.77]
		18 GHz - 26.5GHz	1.83	N/A	1.85	N/A	1.79		
			0.1272	2 ppm (Delta N	Marker)	1		Frequency
Occupied bandwidth	-	9 kHz - 4 GHz							error
			1.0 dB						Power
	-		0.1272	2 ppm (Delta N	Marker)	1		Frequency
Emission bandwidth		9 kHz - 4 GHz	~ 1		5 0 15				error
	-			ove: 0.	70 dB				Power
Frequency stability	-	9 kHz - 20 GHz	0.0636						-
Radiated emissions Enclosure	-	150 kHz - 30 MHz 30 MHz - 1 GHz 1 GHz - 20 GHz	5.0 dB 4.2 dB 3.17 dB		Magnetic field E-field				
									Substitution

Table: measurement uncertainties, valid for conducted/radiated measurements



6. Abbreviations used in this report

The abbreviation	S
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

7. Accreditation details of CETECOM's laboratories and test sites

Ref No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL- 12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkkS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	(MRA US-EU 0003)	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurem.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurem.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan
OATS	S = Open Area Te	est Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room	



8. Instruments and Ancillary

31. Jul. 15

8.1. Used equipment "CTC"

The "Ref.-No" in the left column of the following tables allows the clear identification of the laboratory equipment.

8.1.1. Test software and firmware of equipment

RefNo.	Equipment	Туре	Serial-No.	Version of Firmware or Software during the test		
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21, OTP=2.0, GRA=2.0		
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02		
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51		
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99		
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3		
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG		
140	Signal Generator	SMHU	831314/006	Firm.= 3.21		
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B		
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6		
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21		
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02		
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used		
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99		
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52		
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99		
355	Power Meter	URV 5	891310/027	Firm.= 1.31		
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08		
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10		
371	Bluetooth Tester	CBT32	100153	CBT V5,30+ SW-Option K55, K57		
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36		
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13		
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)		
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002		
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band		
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52		
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40		
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI- RSE	-	Spuri 7.2.5 or EMC 32 Ver. 9.15.00		
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00		
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,		
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00		
491	ESD Simulator dito	ESD dito	dito307022	V 2.30		
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01		
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32		
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43		
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01		
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used		
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14		
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3		
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= μP1=V.850		
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2		
620	EMI Test Receiver	ESU 26	100362	4.43_SP3		
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20		
670	Univ. Radio Communication Tester	CMU 200	106833	μ P1 =V8.50, Firmware = V.20		
689	Vector Signal Generator	SMU200	100970	02.20.360.142		
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)		



8.1.2. Single instruments and test systems

					J L		
RefNo.	Equipment	Туре	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	30.05.2017
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	30.05.2017
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	30.05.2017
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	30.04.2017
	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	30.05.2019
	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.03.2017
	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.04.2018
	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	30.04.2018
	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	30.04.2017
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40- 10EEK	5	Wainwright GmbH	12 M	1g	30.06.2016
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.04.2018
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.04.2018
	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	30.05.2019
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	30.04.2018
140 248	Signal Generator attenuator	SMHU SMA 6dB 2W	831314/006	Rohde & Schwarz Radiall	24 M	2	30.05.2018
			-		pre-m		
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
	hybrid	4031C	04491	Narda	pre-m	2	
	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	30.05.2018
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	30.05.2018
263 265	Signal Generator	SMP 04	826190/0007 840414/009	Rohde & Schwarz	36 M 24 M	-	30.05.2019
266	peak power sensor Peak Power Sensor	NRV-Z33, Model 04 NRV-Z31, Model 04	843383/016	Rohde & Schwarz Rohde & Schwarz	24 M	-	30.05.2018 30.05.2018
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH		2	30.03.2016
270	termination		BB6935	Weinschel	pre-m	2	
		1418 N			pre-m		
271	termination (20.1D) 50 W	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.06.2017
	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.06.2017
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	30.05.2017
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	21.02.50:5
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	31.03.2017
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	2	31.03.2017
331 341	Climatic Test Chamber -40/+80 Grad Digital Multimeter	HC 4055 Fluke 112	43146 81650455	Heraeus Vötsch Fluke	Pre-m 24 M	-	30.05.2018
341	Digital Multimeter Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	H	30.05.2018
347	laboratory site	radio lab.	- 10 433+00	- Voitcraft	24 M	5	JU.04.201/
	laboratory site	EMI conducted	-	-	<u> </u>	5	
354	DC - Power Supply 40A	NGPE 40/40	448		nro	2	
	Power Meter			Rohde & Schwarz Rohde & Schwarz	pre-m 24 M		20.05.2019
355 357	Power Meter power sensor	URV 5 NRV-Z1	891310/027 861761/002	Rohde & Schwarz Rohde & Schwarz	24 M	-	30.05.2018 30.04.2017
371	Bluetooth Tester	CBT32	100153	R&S	36 M	<u> </u>	30.04.2017
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100133	Rohde & Schwarz	12 M	-	30.05.2017
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	30.05.2017
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	30.04.2017
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	30.05.2017
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	30.04.2017
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	_	31.03.2017
		System CTC-FAR-EMI-	T '	ETS-Lindgren /			
443	CTC-FAR-EMI-RSE	RSE	-	CETECOM	12 M	5	30.06.2017



RefNo.	Equipment	Туре	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40- 8SSK	1	Wainwright	12 M	1c	30.06.2017
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A, 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	30.04.2017
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	30.05.2018
467	Digital Multimeter Digital Multimeter	Fluke 112 Fluke 112	89680306 90090455	Fluke USA Fluke USA	36 M	-	30.04.2018 30.04.2018
477	ReRadiating GPS-System	AS-47	90090433	Automotive Cons. Fink	30 WI	3	30.04.2018
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	30.04.2017
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25- 10P	1244554	Miteq	12 M	-	30.06.2017
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	31.07.2017
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	30.05.2017
502	band reject filter	WRCG 1709/1786- 1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
	,	WRCA 800/960-02/40-			•		20.06.2017
512	notch filter GSM 850 relais switch matrix	6EEK HF Relais Box Keithley	SN 24 SE 04	Wainwrght	12 M	1c	30.06.2017
523	Digital Multimeter	L4411A	MY46000154	Keithley Agilent	pre-m 24 M	-	30.04.2017
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	50.01.2017
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.05.2017
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	30.04.2017
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.07.2018
550	System CTC S-VSWR Verification SAR- EMI	System EMI Field SAR S- VSWR	-	ETS Lindgren/CETECOM	24 M	-	31.07.2017
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	30.06.2017
557	System CTC-OTA-2	R&S TS8991	-	Rohde & Schwarz	12 M	5	30.09.2016
558	System CTC FAR S-VSWR	System CTC FAR S- VSWR	-	CTC	24 M	-	19.04.2017
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2019
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	20.04.2017
594 597	Wideband Radio Communication Tester Univ. Radio Communication Tester	CMW 500 CMU 200	101757 100347	Rohde & Schwarz Rohde & Schwarz	12 M	-	30.04.2017
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Rohde & Schwarz	pre-m 24 M	-	30.04.2017
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	30.04.2017
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	30.04.2017
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	30.05.2018
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	30.05.2017
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB data logger	Generic Test Load USB OPUS 1	201.0999.9302.6.4.1.4	CETECOM G. Lufft GmbH	24 M	2	30.04.2017
634	Spectrum Analyzer	FSM (HF-Unit)	3 826188/010	Rohde & Schwarz	pre-m	2	
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet	-	KogiLink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	20.05.5010
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	30.05.2018
671	DC-power supply 0-5 A	EA-3013S	101629	Elektro Automatik	pre-m	2	
678	Power Meter Spectrum Analyzer	NRP FSU 26	101638 200571	Rohde&Schwarz Rohde & Schwarz	pre-m 12 M	-	30.05.2017
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test	24 M	-	30.03.2017
687	Signal Generator	SMF 100A	102073	Solutions Rohde&Schwarz	12 M	 	30.05.2017
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	50.05.2017
690	Spectrum Analyzer	FSU	100302/026	Rohde&Schwarz	12 M	-	30.05.2017
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	36 M	-	31.03.2017



RefNo.	Equipment	Туре	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	

8.1.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (RefNo. 442)
	1b	System-CTC-EMS-Conducted (RefNo. 335)
	1c	System CTC-FAR-EMI-RSE (RefNo . 443)
	1d	System CTC-SAR-EMI (RefNo . 441)
	1e	System CTC-OATS (EMI radiated) (RefNo. 337)
	1 f	System CTC-CTIA-OTA (RefNo . 420)
	1 g	System CTC-FAR-EMS (RefNo . 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
24/12 M Calibration every 24 months, between this every 12 months internal		Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

9. Versions of test reports (change history)

Version	Version Applied changes			
	Inital release	2016-10-12		