

Königswinkel 10
32825 Blomberg
Germany
Phone +49 5235 9500-0
Fax +49 5235 9500-10

TEST REPORT

Test Report Reference: R70363FCC 2nd version

Equipment under Test: DETECTOR III

FCC ID: U5G-DETECT3

Serial Number: 720355/F3

Applicant: FAG Industrial Services GmbH

Manufacturer: FAG Industrial Services GmbH

**Test Laboratory
(CAB)**

**accredited by DATech GmbH
in compliance with DIN EN ISO/IEC 17025
under the Reg. No. DAT-P-105/99-21,**

**recognized by Bundesnetzagentur
under the Reg.-No. BNetzA-CAB-02/21-104/1,**

CAB Designation Number DE0004,

**listed by
FCC 31040/SIT1300F2**

TEST REPORT REFERENCE: R70363FCC 2nd version

Contents:	Page
1 IDENTIFICATION	3
1.1 APPLICANT	3
1.2 MANUFACTURER	3
1.3 DATES	3
1.4 TEST LABORATORY	4
1.5 RESERVATION	4
1.6 NORMATIVE REFERENCES	4
1.7 TEST RESULTS	4
2 TECHNICAL DATA OF EQUIPMENT	5
2.1 DEVICE UNDER TEST	5
2.2 PERIPHERY DEVICES	5
2.3 SPECIAL EMC MEASURES	5
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	6
4 LIST OF TEST MODULES	7
4.1 EMISSION	7
5 METHOD OF MEASUREMENT	8
5.1 RADIATED EMISSIONS 9 kHz to 30 MHz	8
5.2 RADIATED EMISSIONS 30 MHz to 1 GHz	10
5.3 SPECTRUM MASK AND OCCUPIED BANDWIDTH	12
5.4 FREQUENCY TOLERANCE	13
6 TEST RESULTS EMISSION TEST	14
6.1 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 30 MHz)	14
6.2 PRELIMINARY RADIATED EMISSION TEST (30 MHz to 1 GHz)	16
6.3 FINAL RADIATED EMISSION TEST (9 kHz to 30 MHz)	18
6.4 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz)	19
6.5 SPECTRUM MASK	21
6.6 20 dB-BANDWIDTH	22
6.7 FREQUENCY TOLERANCE	23
7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	24
8 LIST OF ANNEXES	28

TEST REPORT REFERENCE: R70363FCC 2nd version

1 IDENTIFICATION

1.1 APPLICANT

Name:	FAG Industrial Services GmbH
Address:	Kaiserstr. 100 D-52134 Herzogenrath
Country:	Germany
Name for contact purposes:	Mr. Luc Hamers
Tel:	+49-(0)-2407-9149-53
Fax:	+49-(0)-2407-9149-59
e-mail address:	Hamers_L@fis-services.de

1.2 MANUFACTURER

Name:	FAG Industrial Services GmbH
Address:	Kaiserstr. 100 D-52134 Herzogenrath
Country:	Germany
Name for contact purposes:	Mr. Luc Hamers
Tel:	+49-(0)-2407-9149-53
Fax:	+49-(0)-2407-9149-59
e-mail address:	Hamers_L@fis-services.de

1.3 DATES

Date of receipt of test sample:	12 April 2007
Start of test:	12 June 2007
Finish of test:	29 June 2007

TEST REPORT REFERENCE: R70363FCC 2nd version

1.4 TEST LABORATORY

The tests were carried out at:

PHOENIX TESTLAB GmbH
Königswinkel 10
D-32825 Blomberg
Germany

Phone: +49 (0) 52 35 / 95 00-0
Fax: +49 (0) 52 35 / 95 00-10

Test engineer:

Raimund BLASK



05 July 2007

Name

Date

Test report checked by:

Bernd STEINER



05 July 2007

Name

Date

Phoenix TEST-LAB GmbH
Königswinkel 10
32825 Blomberg
Tel. 0 52 35 / 95 00-0
Fax 0 52 35 / 95 00-10

Stamp

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory
PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

[1] **ANSI C63.4:2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

[2] **FCC 47 CFR Part 2** General Rules and Regulations

[3] **FCC 47 CFR Part 15** Radio Frequency Devices (Subpart B)

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: R70363FCC 2nd version

2 TECHNICAL DATA OF EQUIPMENT

2.1 DEVICE UNDER TEST

Type of equipment:	13.560 MHz Reader
Type designation:	DETECTOR III
FCC ID:	U5G-DETECT3
Serial No.:	720355/F3
Lowest internal frequency:	10 kHz
Highest internal frequency:	26.21 MHz
Antenna type:	Integral
Supply Voltage:	6 V DC (internal accumulator)

The following external I/O cables were used:

Cable	Connector	Shielding	Length
Trigger line	Customized	No	1.5 m
Sensor line	BNC	Yes	1.5 m

*: Length during the test

2.2 PERIPHERY DEVICES

None

2.3 SPECIAL EMC MEASURES

To fulfil the requirements "Radiated emissions, FCC 47 CFR Part 15 section 15.209 [3]" an external Ferrite Clamp "Type Kitagawa RFC-8" is necessary (at each Sensor-Line) and a Ferrite Clamp "Type MEC MSFC 5" on the Trigger line

TEST REPORT REFERENCE: R70363FCC 2nd version

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

With a special firmware the equipment under test was set into an operation mode where the RFID unit was permanently in operation. Furthermore the measuring function and calculation function was in operation too.

The device is powered by the internal batteries. If it is connected to the charger, the internal functions are out of function.

During all tests except the frequency tolerance measurement the EUT was supplied with an internal fully charged accumulator.

If a variation of the supply voltage was necessary, it was done in the range 5.1 V DC to 6.9 V DC. This range was declared by the applicant as extreme supply voltage range.


During the measurement of occupied bandwidth a 13.56 MHz card was presented in the front of the EUT.

For the whole frequency range a preliminary measurement in a fully anechoic chamber with a measuring distance of 3 m was carried out to determine the frequencies, which were radiated by the EUT.

The final measurements on the detected frequencies were carried out on an outdoor test site without ground plane (for the frequency range 9 kHz to 30 MHz) and on an open area test site with ground plane (for the frequency range 30 MHz to 1 GHz).

During the tests, the EUT was not sealed or labelled with a FCC-label.

The physical boundaries of the Equipment Under Test are shown below.

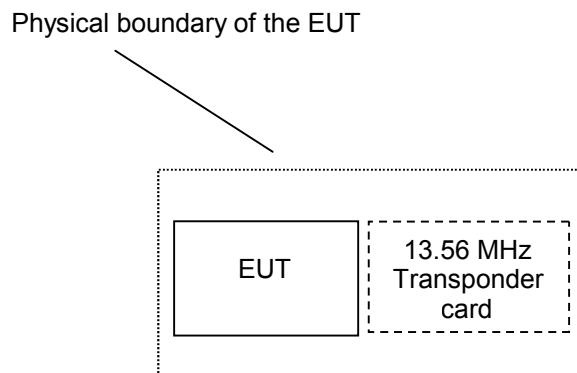

TEST REPORT REFERENCE: R70363FCC 2nd version

4 LIST OF TEST MODULES

4.1 EMISSION

Conducted emissions FCC 47 CFR Part 15 section 15.207 (a)[3]					
Application	Frequency range	Limits	Reference standard	Remark	Status
On AC supply line	0.15 to 0.5 MHz 0.5 to 5 MHz 5 to 30 MHz	66 to 56 dB μ V (QP) * 56 to 46 dB μ V (AV) * 56 dB μ V (QP) 46 dB μ V (AV) 60 dB μ V (QP) 50 dB μ V (AV)	ANSI C63.4 (2003)	-	Not performed because of battery powered EUT
*: Decreases with the logarithm of the frequency					
Radiated emissions FCC 47 CFR Part 15 section 15.209 [3]					
Application	Frequency range	Limits (microvolts/meter)	Reference standard	Remark	Status
Intentional radiator	0.009 to 0.49 MHz 0.490 to 1.705 MHz 1.705 to 30.0 MHz 30 to 88 MHz 88 to 216 MHz 216 to 960 MHz 960 to 1000 MHz	2400/f(kHz) at 300 m 24000/f(kHz) at 30 m 30.0 dB μ V/m at 30 m 40.0 dB μ V/m at 3 m 43.5 dB μ V/m at 3 m 46.0 dB μ V/m at 3 m 54.0 dB μ V/m at 3 m	ANSI C63.4 (2003);	-	Passed
Radiated emissions FCC 47 CFR Part 15 section 15.225 (a)[3]					
	Frequency range	Limits (microvolts/meter)	Reference standard	Remark	Status
Operation with in the band 13.553 – 13.567 MHz	13.553 to 13.567 MHz	15,848 at 30 m	ANSI C63.4 (2003);	-	Passed
Frequency tolerance over temperature and supply voltage FCC 47 CFR Part 15 section 15.225 (e)[3]					
Application	Limits	Reference standard	Remark	Status	
Temperature range -20°C to +50°C and supply voltage 85 to 115 % or new battery	0.01 %	ANSI C63.4 (2003);	-	Passed	

TEST REPORT REFERENCE: R70363FCC 2nd version

5 METHOD OF MEASUREMENT

5.1 RADIATED EMISSIONS 9 kHz to 30 MHz

The radiated emission measurement is divided into two stages.


Preliminary measurement:

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

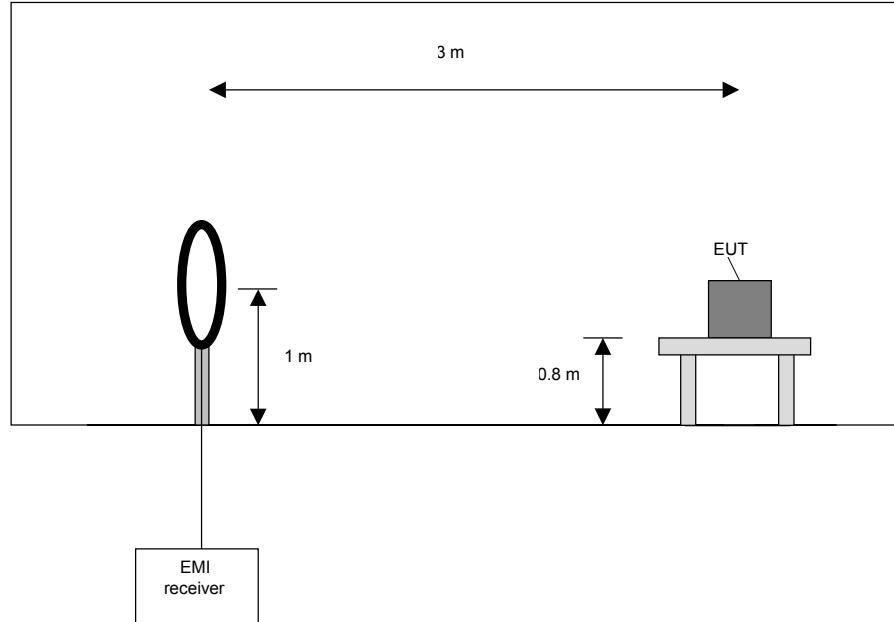

TEST REPORT REFERENCE: R70363FCC 2nd version

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 4) with the other orthogonal axes of the EUT.
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement:

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

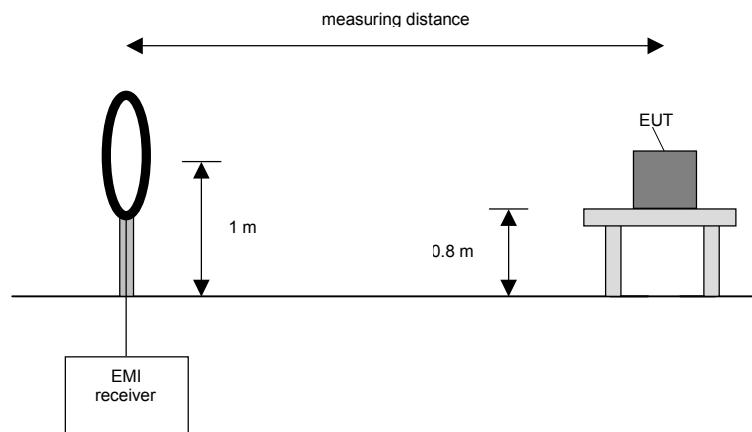

TEST REPORT REFERENCE: R70363FCC 2nd version

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT if applicable (handheld equipment).

5.2 RADIATED EMISSIONS 30 MHz to 1 GHz

The radiated emission measurement is divided into two stages.


Preliminary measurement:

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	100 kHz

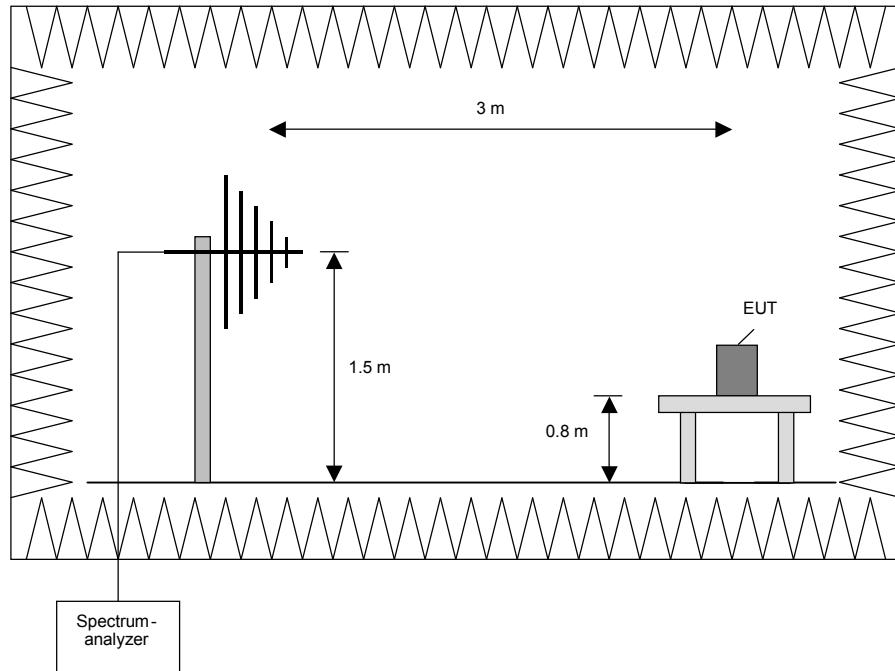

TEST REPORT REFERENCE: R70363FCC 2nd version

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz. The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of 3 highest detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat steps 1) to 4) with the other orthogonal axes of the EUT.
7. Repeat steps 1) to 5) with the vertical polarisation of the measuring antenna.

Final Measurement:

In the second stage a final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

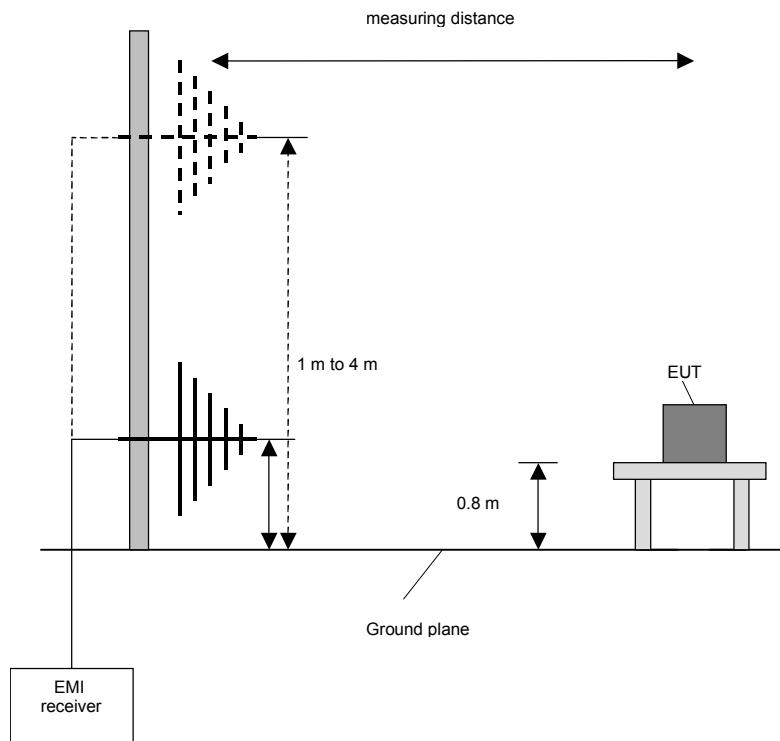


TEST REPORT REFERENCE: R70363FCC 2nd version

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP or AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT if handheld equipment.

5.3 SPECTRUM MASK AND OCCUPIED BANDWIDTH

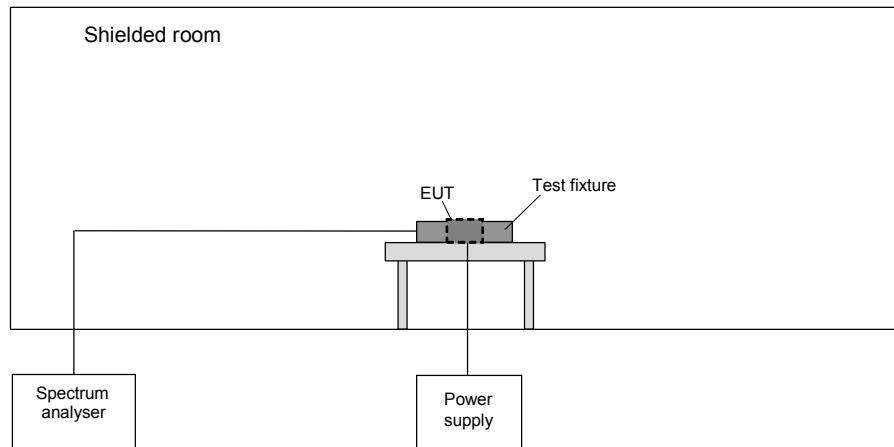

The following procedure will be used for the spectrum mask measurement:


- 1) Place the EUT in the test fixture and switch it on.
- 2) Use the following spectrum analyser settings: RWB = VBW = 1 kHz, Span = wide enough to capture the whole 13 MHz band including the frequency ranges where the 15.209 limit applies, Trace mode = MaxHold, select the limit line 15225spc
- 3) After trace stabilisation, set the marker to the signal peak.
- 4) The Reference level will be calculated by the amount of the margin of the wanted signal to its 30 m emission limit plus the marker value.
- 5) The whole signal trace has to be below the limit line.

TEST REPORT REFERENCE: R70363FCC 2nd version

The following procedure will be used for the occupied bandwidth measurement:

- 1) Place the EUT in the test fixture and switch it on.
- 2) Use the following spectrum analyser settings: RWB = VBW = 10 kHz, Span = wide enough to capture app. 1.5 times the 20 dB bandwidth, Trace mode = MaxHold.
- 3) After trace stabilisation, set the first marker and the first display line to the signal peak. Set the second display line 20 dB below the first display line. The second marker and its delta marker shall be set to cross points of the spectrum line and the second display line and note these frequencies.
- 4) Alternatively the 20 dB down function of the analyser could be used, if this function will be applicable to the displayed spectrum.

5.4 FREQUENCY TOLERANCE

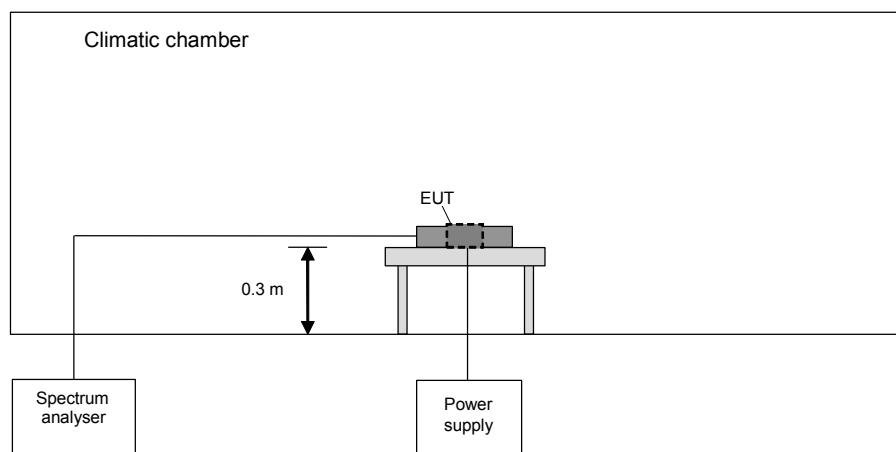

The following procedure will be used:

- 1) Place the EUT in the climatic chamber.
- 2) Switch on the EUT and check the correct function and the settings of the spectrum analyser.
- 3) Switch off the EUT and tune the climatic chamber to a temperature of 50 °C. Wait until the thermal balance is obtained.
- 4) Switch the EUT on and record the frequencies at start-up and 2, 5 and 10 minutes after powering on.
- 5) Repeat 4) with the minimum and the maximum of the supply voltage.
- 6) Switch off the EUT and tune the climatic chamber to a temperature range of 50 °C to –20 °C to in ten-degree steps. Wait until the thermal balance is obtained for every step.
- 7) Switch the EUT on and record the frequencies at start-up and 2, 5 and 10 minutes after powering on.
- 8) Repeat 7) with the minimum and the maximum of the supply voltage at 20 °C.
- 9) Repeat 6) with the next temperature step until –20 °C were reached.

TEST REPORT REFERENCE: R70363FCC 2nd version

6 TEST RESULTS EMISSION TEST

6.1 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 30 MHz)


Ambient temperature:	20 °C	Relative humidity:	45 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in normal operation mode of the EUT (without reading a TAG). All results are shown in the following.

Supply voltage: 6 V DC (internal battery).

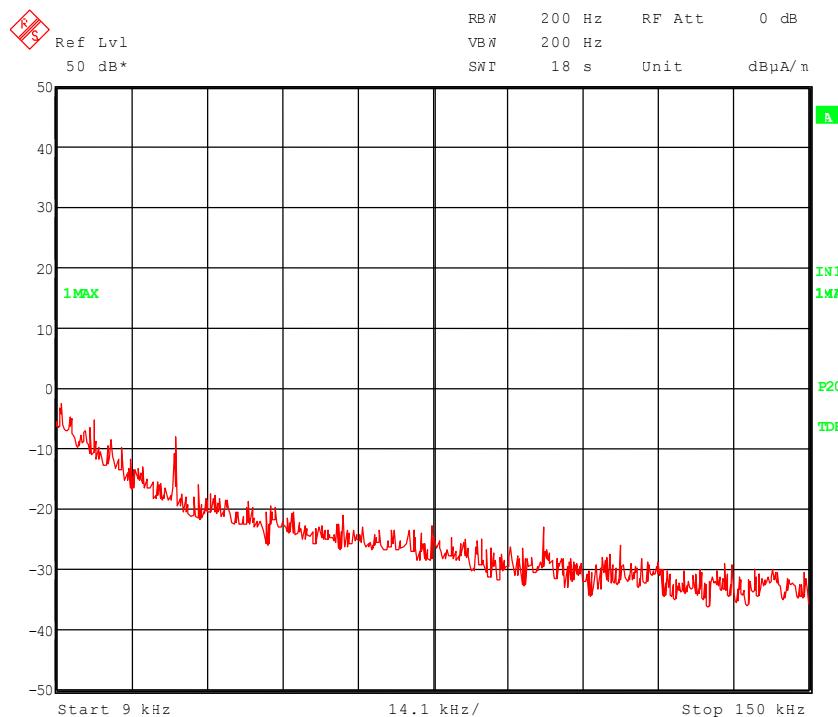


70363H1.wmf: 9 kHz to 150 kHz

TEST EQUIPMENT USED THE TEST:

29, 31 – 33, 56

TEST REPORT REFERENCE: R70363FCC 2nd version

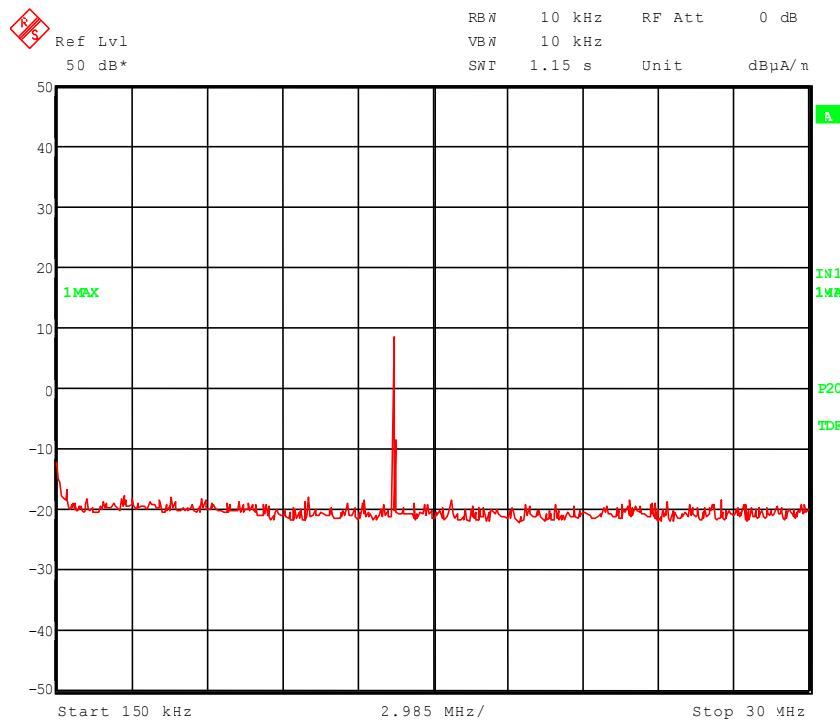

70363H2.wmf: 150 kHz to 30 MHz

The following emission was found according to FCC 47 CFR Part 15 section 15.209 (a).

No significant frequency found.

The following frequency was found inside the 13.533 to 13.567 MHz band according to FCC 47 CFR Part 15 section 15.225 [3]:

13.560 MHz.

This frequency have to be measured on the outdoor test site. The result of this final measurement is shown in subclause 6.4 of this test report.

TEST REPORT REFERENCE: R70363FCC 2nd version

6.2 PRELIMINARY RADIATED EMISSION TEST (30 MHz to 1 GHz)


Ambient temperature:	21 °C	Relative humidity:	45 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in normal operation mode of the EUT (without reading a TAG). All results are shown in the following.

Supply voltage: 6 V DC (internal battery).

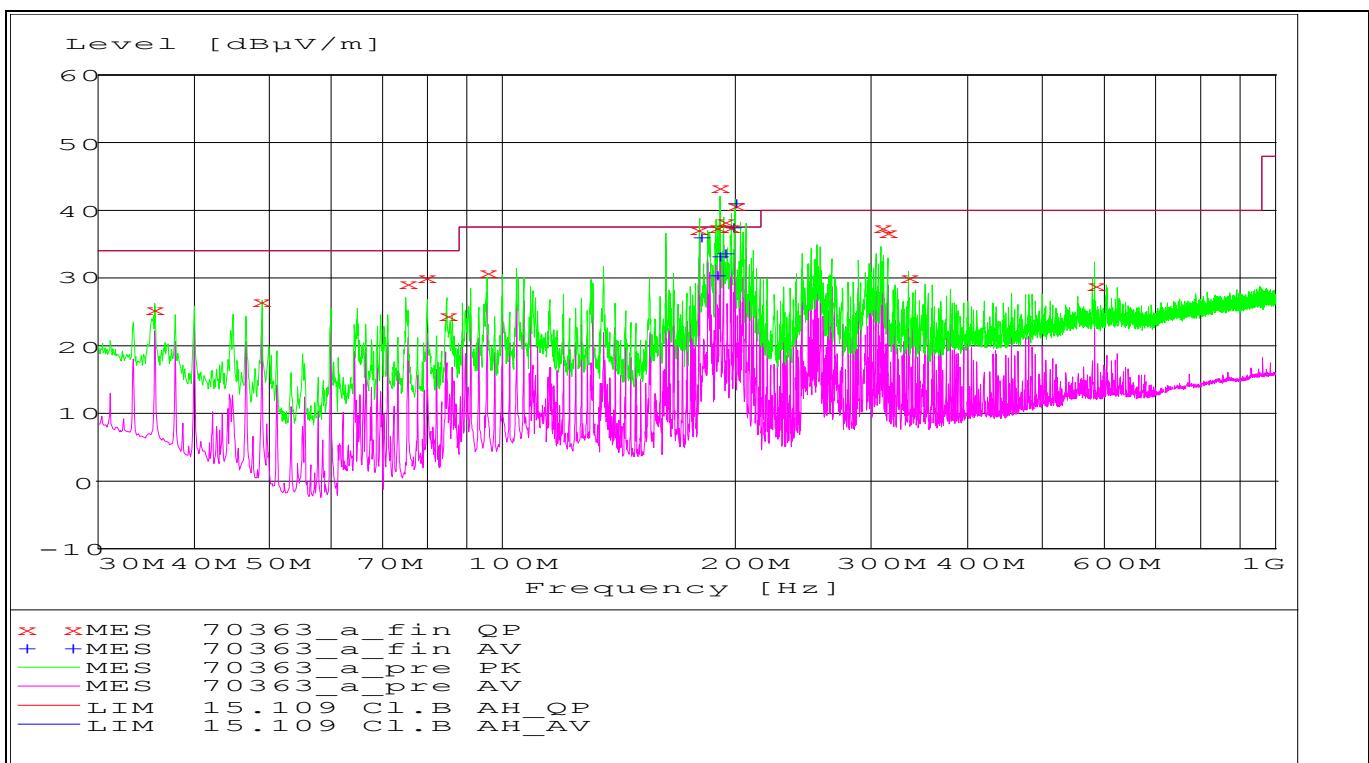

Data record name: 70363_a

of 28 June 2007

TEST REPORT REFERENCE: R70363FCC 2nd version

In this case it was necessary to carry out subsequent measurements because at some frequency points a value was above the Qualify limit curve during the preliminary measurements. The results from the standard subsequent measurements on the open area test site are presented in the following.

The following frequencies were found during the preliminary radiated emission test:

35.544 MHz, 48.876 MHz, 75.192 MHz, 79.980 MHz, 84.804, 95.556 MHz, 179.952, 188.880 MHz, 191.088 MHz, 193.322 MHz, 197.750 MHz, 199.992 MHz, 315.528 MHz, 335.524 MHz, 583.080 MHz

These frequencies have to be measured on the open area test site. The results of this final measurement are shown in subclause 6.5 of this test report.

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 35, 43, 54

TEST REPORT REFERENCE: R70363FCC 2nd version

6.3 FINAL RADIATED EMISSION TEST (9 kHz to 30 MHz)

Ambient temperature:	10 °C	Relative humidity:	50 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m, 10 m and 30 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in normal operation mode of the EUT (without reading a TAG). All results are shown in the following.

Supply voltage: The EUT was supplied with 6 V DC, because no difference was noticeable with supply voltages from 5.1 V DC to 6.9 V DC.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{antenna factor [dB/m]}$$

Results with measuring distance of 3 m						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
13.561 MHz	64.0	124.0	60.0	QP	44.0	20.0
Results with measuring distance of 10 m						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
13.561 MHz	43.0	104.0	61	QP	23.0	20.0
Results with measuring distance of 30 m						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
13.561 MHz	-	84.0	-	QP	15.0	20.0
Measurement uncertainty		+2.2 dB / -3.6 dB				

*: Cable loss included

**: Noise level of the measuring system.

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

54 – 57

TEST REPORT REFERENCE: R70363FCC 2nd version

6.4 FINAL RADIATED EMISSION TEST (30 MHz to 1 GHz)

Ambient temperature:	19 °C	Relative humidity:	40 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.


Test record: The test was carried out in normal operation mode of the EUT (without reading a TAG). All results are shown in the following.

Supply voltage: The EUT was supplied with 6 V DC, because no difference was noticeable with supply voltages from 5.1 V DC to 6.9 V DC.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with x are the measured results of the standard final measurement on the open area test site.

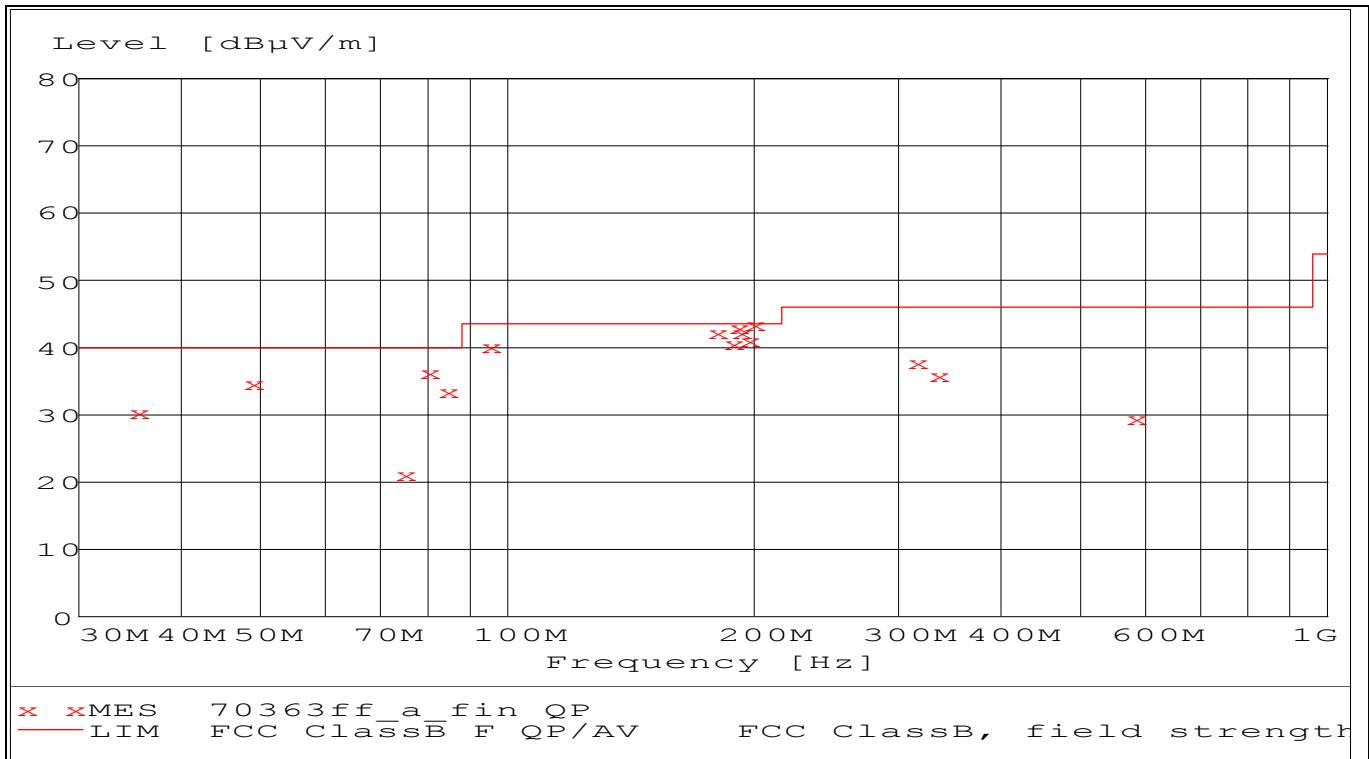

Data record name: 70363ff_a

of 28. June 2007

TEST REPORT REFERENCE: R70363FCC 2nd version

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

Result measured with the quasipeak detector:

(These values are marked in the above diagram by x)

Frequency MHz	Level dB μ V/m	Transducer dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
35.544000	30.60	18.0	40.0	9.4	125.0	45.00	VERTICAL
48.876000	34.80	10.5	40.0	5.2	100.0	33.00	VERTICAL
75.192000	21.40	8.4	40.0	18.6	181.0	250.00	VERTICAL
79.980000	36.20	9.2	40.0	3.8	110.0	48.00	VERTICAL
84.804000	33.50	9.9	40.0	6.5	135.0	259.00	VERTICAL
95.556000	40.30	11.6	43.5	3.2	338.0	315.00	HORIZONTAL
179.952000	42.30	10.9	43.5	1.2	180.0	180.00	HORIZONTAL
188.880000	40.80	10.6	43.5	2.7	125.0	182.00	HORIZONTAL
191.088000	43.20	10.5	43.5	0.3	125.0	180.00	HORIZONTAL
193.322000	42.20	10.5	43.5	1.3	125.0	180.00	HORIZONTAL
197.750000	41.10	10.4	43.5	2.4	105.0	181.00	HORIZONTAL
199.992000	43.40	10.4	43.5	0.1	109.0	181.00	HORIZONTAL
315.528000	38.10	15.0	46.0	7.9	125.0	23.00	HORIZONTAL
335.524000	35.80	15.8	46.0	10.2	125.0	22.00	HORIZONTAL
583.080000	29.50	21.8	46.0	16.5	131.0	25.00	HORIZONTAL

Data record name: 70363ff_a_fin QP

of 28. June 2007

The measurement time with the quasi-peak measuring detector is 1 second.

The test results were calculated with the following formula:

Result [dB μ V/m] = reading [dB μ V] + Transducer [dB/m]

(With Transducer = cable loss [dB] + antenna factor [dB/m])

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

14 – 20

TEST REPORT REFERENCE: R70363FCC 2nd version

6.5 SPECTRUM MASK

Ambient temperature:	20 °C	Relative humidity:	45 %
----------------------	-------	--------------------	------


Supply voltage: The EUT was supplied with 6 V DC.

Test record: The test was carried out while the EUT was reading a TAG.

The Reference level in the plot below was calculated with the following formula:

$$\text{Reflevel} = (\text{Limit}_{\text{OATS}} - \text{Level}_{\text{OATS}}) + \text{Marker value}$$

Where $\text{Limit}_{\text{OATS}} = 84.0 \text{ dB}\mu\text{V/m}$, $\text{Level}_{\text{OATS}} = 24.0 \text{ dB}\mu\text{V/m}$ and Marker value = 95.6 dB μ V.

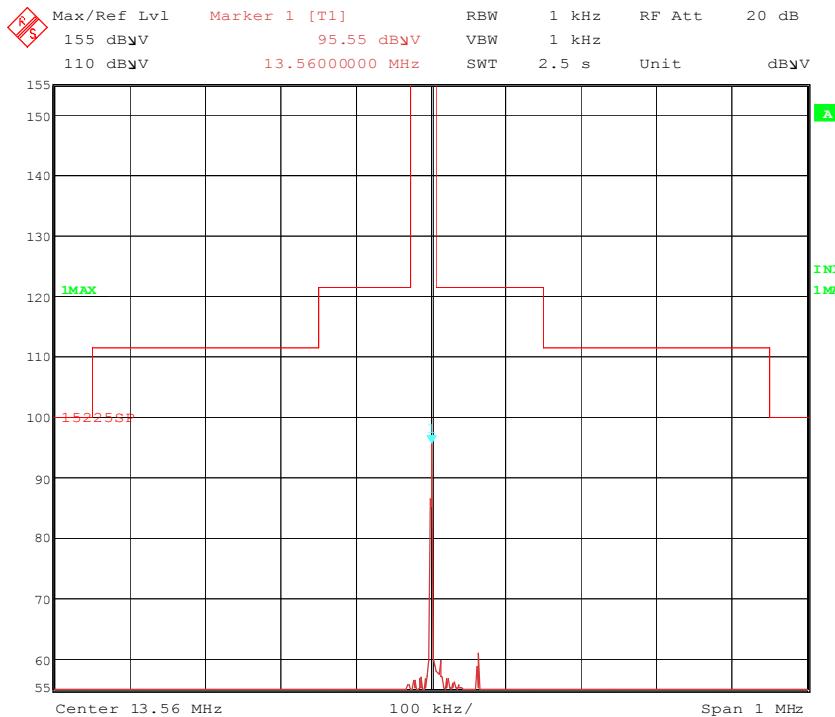

70363spec.wmf: Spectrum mask at 13.561 MHz

Test result: Passed

TEST EQUIPMENT USED THE TEST:

22, 54, 58, 59

TEST REPORT REFERENCE: R70363FCC 2nd version


6.6 20 dB-BANDWIDTH

Ambient temperature:	20 °C
----------------------	-------

Relative humidity:	45 %
--------------------	------

Supply voltage: The EUT was supplied with 6 V DC.

Test record: The test was carried out while the EUT was reading a TAG.

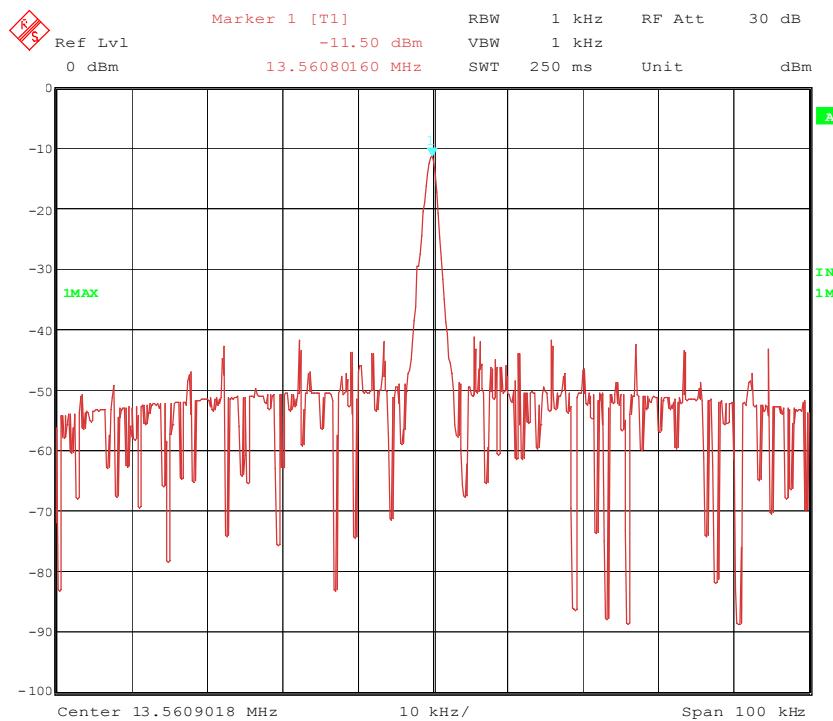

70363obw.wmf: 20dB at 13.561 MHz:

F_L	F_U	20 dB-Bandwidth ($F_U - F_L$)
13.55940 MHz	13.56260 MHz	3.200 kHz
Measurement uncertainty		$< \pm 1 \cdot 10^{-7}$

TEST EQUIPMENT USED THE TEST:

22, 54, 58, 59

TEST REPORT REFERENCE: R70363FCC 2nd version

6.7 FREQUENCY TOLERANCE

Ambient temperature	21 °C	Relative humidity	35 %
---------------------	-------	-------------------	------

Test set-up: For this test the EUT was fixed on a wooden table inside the climatic chamber.

Cable guide: For further information of the cable guide refer to the pictures in annex A of this test report.

Temperature	Supply voltage	Minutes after switch on	Frequency [MHz]	Allowed tolerance	Measured tolerance	Result
50 °C	6 V DC	0	13.560981	±1.356 kHz	+58 Hz	Passed
	6 V DC	2	13.560983	±1.356 kHz	+60 Hz	Passed
	6 V DC	5	13.560984	±1.356 kHz	+61 Hz	Passed
	6 V DC	10	13.560984	±1.356 kHz	+61 Hz	Passed
40 °C	6 V DC	0	13.560966	±1.356 kHz	+43 Hz	Passed
	6 V DC	2	13.560971	±1.356 kHz	+48 Hz	Passed
	6 V DC	5	13.560972	±1.356 kHz	+49 Hz	Passed
	6 V DC	10	13.560972	±1.356 kHz	+49 Hz	Passed
30 °C	6 V DC	0	13.560946	±1.356 kHz	+23 Hz	Passed
	6 V DC	2	13.560951	±1.356 kHz	+28 Hz	Passed
	6 V DC	5	13.560952	±1.356 kHz	+29 Hz	Passed
	6 V DC	10	13.560952	±1.356 kHz	+29 Hz	Passed
20 °C	5.1 V DC (U _{min})	0	13.560921	±1.356 kHz	-2 Hz	Passed
	6.0 V DC (U _{nom})		13.560921	±1.356 kHz	-2 Hz	Passed
	6.9 V DC (U _{max})		13.560922	±1.356 kHz	-1 Hz	Passed
	5.1 V DC (U _{min})	2	13.560922	±1.356 kHz	-1 Hz	Passed
	6.0 V DC (U _{nom})		13.560923	±1.356 kHz	±0 Hz	Passed
	6.9 V DC (U _{max})		13.560923	±1.356 kHz	±0 Hz	Passed
	5.1 V DC (U _{min})	5	13.560922	±1.356 kHz	-1 Hz	Passed
	6.0 V DC (U _{nom})		13.560923	±1.356 kHz	±0 Hz	Passed
	6.9 V DC (U _{max})		13.560923	±1.356 kHz	±0 Hz	Passed
	5.1 V DC (U _{min})	10	13.560923	±1.356 kHz	±0 Hz	Passed
	6.0 V DC (U _{nom})		13.560923	-	-	Reference
	6.9 V DC (U _{max})		13.560923	±1.356 kHz	±0 Hz	Passed
10 °C	6 V DC	0	13.560911	±1.356 kHz	-12 Hz	Passed
	6 V DC	2	13.560916	±1.356 kHz	-7 Hz	Passed
	6 V DC	5	13.560916	±1.356 kHz	-7 Hz	Passed
	6 V DC	10	13.560918	±1.356 kHz	-5 Hz	Passed
0 °C	6 V DC	0	13.560890	±1.356 kHz	-33 Hz	Passed
	6 V DC	2	13.560896	±1.356 kHz	-27 Hz	Passed
	6 V DC	5	13.560896	±1.356 kHz	-27 Hz	Passed
	6 V DC	10	13.560897	±1.356 kHz	-26 Hz	Passed
-10 °C	6 V DC	0	13.560870	±1.356 kHz	-53 Hz	Passed
	6 V DC	2	13.560870	±1.356 kHz	-53 Hz	Passed
	6 V DC	5	13.560871	±1.356 kHz	-52 Hz	Passed
	6 V DC	10	13.560872	±1.356 kHz	-51 Hz	Passed
- 20 °C	6 V DC	0	13.560851	±1.356 kHz	-72 Hz	Passed
	6 V DC	2	13.560854	±1.356 kHz	-69 Hz	Passed
	6 V DC	5	13.560855	±1.356 kHz	-68 Hz	Passed
	6 V DC	10	13.560855	±1.356 kHz	-68 Hz	Passed
Measurement uncertainty				< ± 1*10 ⁻⁷		

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

22, 54, 58, 59, 61

TEST REPORT REFERENCE: R70363FCC 2nd version

7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

TEST REPORT REFERENCE: R70363FCC 2nd version

Emission measurement at AC mains and DC in / out ports at M4					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
1	Shielded chamber M4	-	Siemens	B83117S1-X158	480088
2	Measuring receiver	ESAI	Rohde & Schwarz	831953/001 833181/018	480025 480026
3	LISN	NSLK8128	Schwarzbeck	8128155	480058
4	LISN	NSLK 8128-	Schwarzbeck	8128161	480138
5	AC-filter	B84299-D87-E3	Siemens	930262292	480097
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M5					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
7	Fully anechoic chamber M5	-	Siemens	B83177-S1-X156	480073
8	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
9	Controller	HD100	Deisel	100/324	480067
10	Antenna support	MA240	Deisel	228/314	480069
11	Turntable	DS412	Deisel	412/317	480070
12	Antenna	CBL6112C	Chase	2689	480327
13	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M6					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
14	Open area test site	-	Phoenix Test-Lab	-	480085
15	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
16	Controller	HD100	Deisel	100/670	480139
17	Turntable	DS420HE	Deisel	420/620/80	480087
18	Antenna support	AS615P	Deisel	615/310	480086
19	Antenna	CBL6111 A	Chase	1643	480147
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111

TEST REPORT REFERENCE: R70363FCC 2nd version

Radiated emission measurement at M8					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
21	Fully anechoic chamber M8	-	Siemens	B83117-E7019-T231	480190
22	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
23	Measuring receiver	ESCS 30	Rohde & Schwarz	828985/014	480270
24	Controller	HD100	Deisel	100/427	480181
25	Turntable	DS420	Deisel	420/435/97	480186
26	Antenna support	AS615P	Deisel	615/310	480187
27	Antenna	CBL6112 A	Chase	2034	480185
28	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M20					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303
30	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355
32	Controller	HD100	Deisel	100/670	480326
33	Turntable	DS420HE	Deisel	420/620/80	480315
34	Antenna support	AS615P	Deisel	615/310	480187
35	Antenna	CBL6112 B	Chase	2688	480328
36	Antenna	3115 A	EMCO	9609-4918	480183
37	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	483	480294
38	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	482	480295
39	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	411	480297
40	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	410	480296
41	Standard Gain Horn 26.4 GHz – 40.1 GHz	22240-20	Flann Microwave	469	480299

TEST REPORT REFERENCE: R70363FCC 2nd version

No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
42	Standard Gain Horn 26.4 GHz – 40.1 GHz	22240-20	Flann Microwave	468	480298
43	RF-cable No. 30	RTK 081	Rosenberger	-	410141
44	RF-cable No. 31	RTK 081	Rosenberger	-	410142
45	RF-cable 1m	KPS-1533-400-KPS	Insulated Wire	-	480300
46	RF-cable 1m	KPS-1533-400-KPS	Insulated Wire	-	480301
47	RF-cable 2m	KPS-1533-400-KPS	Insulated Wire	-	480302
48	RF-cable No. 5	RTK 081	Rosenberger		410097
49	Preamplifier	JS3-00101200-23-5A	Miteq	681851	480337
50	Preamplifier	JS3-12001800-16-5A	Miteq	571667	480343
51	Preamplifier	JS3-18002600-20-5A	Miteq	658697	480342
52	Preamplifier	JS3-26004000-25-5A	Miteq	563593	480344
53	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Ancillary equipment used for testing					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
54	Power supply	TOE 8852	Toellner	51712	480233
55	Outdoor test site	-	Phoenix Test-Lab	-	480293
56	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059
57	EMI test receiver	ESPC	Rohde & Schwarz	843756/006	480150
58	Loop Antenna Ø = 225 mm	-	Phoenix Test-Lab	-	410085
59	RF-cable No. 10	RG223	Phoenix-Test-Lab	-	410102
60	AC power source / analyser	6813A	Hewlett Packard	3524A-00484	480155
61	Climatic chamber	MK 240	BINDER	05-79022	480462

All used measurement equipment was calibrated (if necessary). The calibration intervals and the calibration history will be given out on request.

TEST REPORT REFERENCE: R70363FCC 2nd version

8 LIST OF ANNEXES

ANNEX A	PHOTOGRAPHS OF THE TEST SET-UPS:	5 pages
	Test set-up preliminary radiated emission (H-Field)	70363emi41.jpg
	Test set-up preliminary radiated emisission (E-Field)	70363emi22.jpg
	Test set-up final radiated emission (H-Field)	70363emi_ff9.jpg
	Test set-up final radiated emisission (E-Field)	70363emi_24.jpg
	Test set-up climatic chamber	70363clima2.jpg
ANNEX B	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	6 pages
	EUT, whole system	70363eut19.jpg
	EUT, front view	70363eut1.jpg
	EUT, rear view	70363eut4.jpg
	EUT, 3D view	70363eut14.jpg
	EUT, 3D view	70363eut13.jpg
	EUT, label	70363eut12.jpg
ANNEX C	INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	10 pages
	Main-PCB, top view	70363eut8.jpg
	Main-PCB, bottom view	70363eut21.jpg
	Sub board, top view	70363eut24.jpg
	Sub board, bottom view	70363eut25.jpg
	RF-PCB, top view	70363eut8.jpg
	RF-PCB, bottom view	70363eut27.jpg
	RF-PCB, detail view	70363eut28.jpg
	Connection board, top view	70363eut30.jpg
	Connection board, bottom view	70363eut31.jpg
	Connection board, bottom view detail	70363eut32.jpg
ANNEX D	ADDITIONAL RESULTS FOR IC CANADA	2 pages
ANNEX E	FCC / IC Canada Crossreference	1 pages