FCC CERTIFICATION On Behalf of Primo International Co., Ltd.

Transmitter
Model No.: DP-115/053

FCC ID: U5WDP115T

Prepared for : Primo International Co., Ltd.

Address : Room 2509, Ginza International Building, 7008 Shennan

Road, Shenzhen, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD

Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

Tel: (0755) 26503290 Fax: (0755) 26503396

Report Number : ATE20070597
Date of Test : March 12, 2007
Date of Report : March 16, 2007

TABLE OF CONTENTS

D	escri	iption	Page
Te	est R	Report Certification	
1.	Gl	ENERAL INFORMATION	4
	1.1.	Description of Device (EUT)	4
	1.2.	Description of Test Facility	
	1.3.	Measurement Uncertainty	4
2.	\mathbf{M}	EASURING DEVICE AND TEST EQUIPMENT	5
3.		ADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)	
	3.1.	Block Diagram of Test Setup	6
	3.2.	The Emission Limit for section 15.239(c)	6
	3.3.	Configuration of EUT on Measurement	
	3.4.	Operating Condition of EUT	
	3.5.	Test Procedure	
	3.6.	The Field Strength of Radiation Emission Measurement Results	
4.	FU	UNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.2	239(B)11
	4.1.	Block Diagram of Test Setup	11
	4.2.	The Emission Limit For Section 15.239(b)	
	4.3.	EUT Configuration on Measurement	
	4.4.	Operating Condition of EUT	
	4.5.	Test Procedure	
	4.6.	The Emission Measurement Result	
5.	O	CCUPIED BANDWIDTH FOR FCC PART 15 SECTION 15.239(A)	
	5.1.	The Requirement For Section 15.239(a)	
	5.2.	EUT Configuration on Measurement	
	5.3.	Operating Condition of EUT	
	5.4.	Test Procedure	
	5.5.	Test Result	
6.		UNING RANGE	
	6.1.	The Requirement For Section 15.239	
	6.2.	EUT Configuration on Measurement	
	6.3.	Operating Condition of EUT	
	6.4.	Test Procedure	
	6.5.	Test Result	17
	Al	PPENDIX I (TEST CURVES) (6pages)	

Test Report Certification

Applicant : Primo International Co., Ltd.

Manufacturer : Shenzhen Acadia Electronic Co., Ltd.

EUT Description: Transmitter

(A) MODEL NO.: DP-115/053

(B) SERIAL NO.: N/A

(C) POWER SUPPLY: DC 3.0V (AAA Battery ×2)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.239: 2006

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section15.239 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test :	March 12, 2007
Prepared by :	sky Long
	(Engineer)
Reviewer:	Searle)
	(Quality Manager)
Approved & Authorized Signer :	Martinh
	(Manager)

1. GENERAL INFORMATION

1.1.Description of Device (EUT)

EUT : Transmitter
Model Number : DP-115/053

Power Supply : DC 3.0V (AAA Battery ×2)
Operate Frequency : CH1: 88.5MHz, CH2: 89.5MHz

Channel : 2

iPod : Manufacturer: Apple

M/N: A1136

S/N: JO543GF9SZA

Applicant : Primo International Co., Ltd.

Address : Room 2509, Ginza International Building, 7008 Shennan

Road, Shenzhen, China

Manufacturer : Shenzhen Acadia Electronic Co., Ltd.

Address : B39 Building, Industry Zone Tanglang Xili Lake

Shenzhen, China

Date of sample received: March 05, 2007 Date of Test: March 12, 2007

1.2.Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004

Accredited by FCC, May 10, 2004

The Certificate Registration Number is 253065

Accredited by Industry Canada, May 18, 2004 The Certificate Registration Number is IC 5077

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 4.12dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT


Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Туре	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.31.2008
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.24.2008
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2008
Bilog Antenna	Chase	CBL6112B	2591	03.31.2008
Horn Antenna	Rohde&Schwarz	HF906	100013	01.24.2008
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.31.2008
Pre-Amplifier	Agilent	8447D	2944A10619	03.31.2008
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100305	03.31.2008
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100310	03.31.2008

3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)


3.1.Block Diagram of Test Setup

3.1.1.Block diagram of connection between the EUT and simulators



(EUT: Transmitter)

3.1.2. Anechoic Chamber Test Setup Diagram

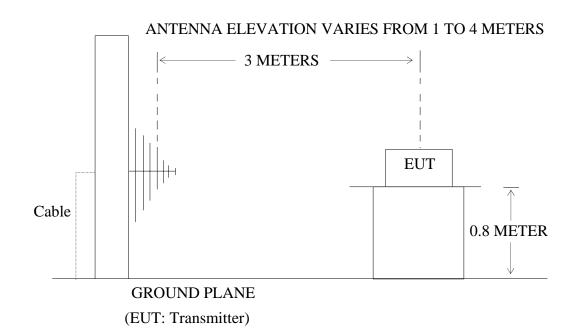

3.2. The Emission Limit for section 15.239(c)

3.2.1 The field strength of any emissions radiated on any frequency outside of the specified 200kHz band shall not exceed the general radiated emission limits in section 15.209

Radiation Emission Measurement Limits According to Section 15.209

							
	Limit,						
Frequency (MHz)	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBµV/m)	The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is				
30 - 88	100	40	performed with				
88 - 216	150	43.5	Average detector. Except those frequency bands				

216 - 960	200	46	mention above, the final measurement for
Above 960	500	54	frequencies below 1000MHz is performed with Quasi Peak detector.

3.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1.Transmitter (EUT)

Model Number : DP-115/053

Serial Number : N/A

Manufacturer : Shenzhen Acadia Electronic Co., Ltd.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

Let the EUT work in TX CH1modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Let the EUT work in TX CH2modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESCS30) is set at 120KHz in 30-1000MHz; Set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 1000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

3.6. The Field Strength of Radiation Emission Measurement Results **PASS.**

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:March 12, 2007Temperature:24°CEUT:TransmitterHumidity:55%Model No.:DP-115/053Power Supply:DC 3.0V (AAA Battery ×2)Test Mode:TX CH1Test Engineer:Andy

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBµV/m) QP	Limits(dBµV/m) QP	Margin(dBμV/m) QP
Horizontal	177.105	31.1	8.0	39.1	43.5	4.4
Horizontal	265.535	30.3	10.9	41.2	46.0	4.8
Horizontal	354.120	21.1	13.9	35.0	46.0	11.0
Horizontal	442.631	18.1	15.9	34.0	46.0	12.0
Horizontal	531.112	14.4	17.5	31.9	46.0	14.1
Horizontal	619.550	12.4	18.8	31.2	46.0	14.8
Vertical	177.105	26.9	8.4	35.3	43.5	8.2
Vertical	265.540	27.6	9.9	37.5	46.0	8.5
Vertical	354.120	19.8	13.9	33.7	46.0	12.3
Vertical	442.625	20.1	16.3	36.4	46.0	9.6
Vertical	531.152	13.7	18.3	32.0	46.0	14.0
Vertical	619.560	11.1	19.9	31.0	46.0	15.0

The spectral diagrams in appendix I display the measurement of peak values with corrected factor.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain

Date of Test:March 12, 2007Temperature:24°CEUT:TransmitterHumidity:55%Model No.:DP-115/053Power Supply:DC 3.0V (AAA Battery ×2)Test Mode:TX CH2Test Engineer:Andy

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBµV/m) QP	Margin(dBμV/m) QP
Horizontal	179.472	30.3	8.3	38.6	43.5	4.9
Horizontal	269.214	28.7	11.0	39.7	46.0	6.3
Horizontal	358.956	22.5	14.1	36.6	46.0	9.4
Horizontal	448.704	18.7	16.0	34.7	46.0	11.3
Horizontal	538.414	14.0	17.6	31.6	46.0	14.4
Horizontal	628.174	12.8	19.0	31.8	46.0	14.2
Vertical	179.550	27.6	8.6	36.2	43.5	7.3
Vertical	269.193	29.2	10.4	39.6	46.0	6.4
Vertical	358.890	18.1	14.1	32.2	46.0	13.8
Vertical	448.586	19.8	16.5	36.3	46.0	9.7
Vertical	538.401	13.6	18.5	32.1	46.0	13.9
Vertical	628.159	12.2	20.1	32.3	46.0	13.7

The spectral diagrams in appendix I display the measurement of peak values with corrected factor.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor


Where Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain

Reviewer:	50ml -)	
110 / 10 / / 01 0	Com C	

4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(B)

4.1.Block Diagram of Test Setup


4.1.1.Block diagram of connection between the EUT and simulators



(EUT: Transmitter)

4.1.2. Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

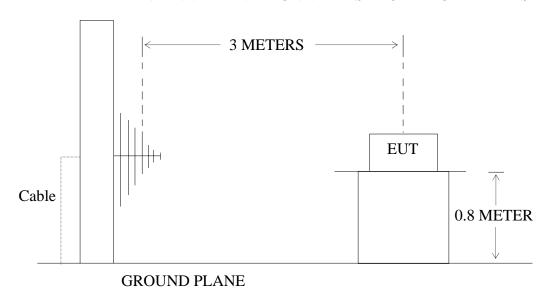

(EUT: Transmitter)

4.2. The Emission Limit For Section 15.239(b)

4.2.1 The field strength of any emission within the permitted 200kHz band shall not exceed 250microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1.Transmitter (EUT)

Model Number : DP-115/053

Serial Number : N/A

Manufacturer : Shenzhen Acadia Electronic Co., Ltd.

4.4.Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

Let the EUT work in TX CH1modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Let the EUT work in TX CH2modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

4.6. The Emission Measurement Result

PASS.

Date of Test:	March 12, 2007	Temperature:	24°C
EUT:	Transmitter	Humidity:	55%
Model No.:	DP-115/053	Power Supply:	DC 3.0V (AAA Battery \times 2)
Test Mode:	TX CH1	Test Engineer:	Andy

Fundamental Radiated Emissions

Frequency Reading(dBµV/m)		Factor(dB)	Result(dBµV/m)		Limit(dBµV/m)		Margin(dBµV/m)		Polarizati	
(MHz)	AV	PEAK	Corr.	AV	PEAK	AV	PEAK	AV	PEAK	on
88.5	34.1	37.3	6.3	40.4	43.6	48	68	7.6	24.4	Vertical
88.5	32.8	36.3	8.5	41.3	44.8	48	68	6.7	23.2	Horizontal

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain

Date of Test:	March 12, 2007	Temperature:	24°C
EUT:	Transmitter	Humidity:	55%
Model No.:	DP-115/053	Power Supply:	DC 3.0V (AAA Battery ×2)
Test Mode:	TX CH2	Test Engineer:	Andy

Fundamental Radiated Emissions

Frequency	Frequency Reading(dB\(\mu\begin{align*} R/m \end{align*}		Factor(dB)	Result(dBµV/m)		Limit(dBµV/m)		Margin(dBµV/m)		Polarizati
(MHz)	AV	PEAK	Corr.	AV	PEAK	AV	PEAK	AV	PEAK	on
89.5	35.1	38.4	6.3	41.4	44.7	48	68	6.6	23.3	Vertical
89.5	33.0	36.4	8.4	41.4	44.8	48	68	6.6	23.2	Horizontal

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION

15.239(A)

5.1. The Requirement For Section 15.239(a)

5.1.1. Emission from the device shall be confined within a band 200kHz wide centered on the operating frequency. The 200kHz band shall lie wholly within the frequency range of 88-108MHz.

5.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.2.1.Transmitter (EUT)

Model Number : DP-115/053

Serial Number : N/A

Manufacturer : Shenzhen Acadia Electronic Co., Ltd.

5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 4.1.

5.3.2. Turn on the power of all equipment.

Let the EUT work in TX CH1modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Let the EUT work in TX CH2modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

5.4. Test Procedure

- 5.4.1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 5.4.2. Set EUT as normal operation. Playing MP3.(the volume control of iPod was set to maximum.)
- 5.4.3. Set EMI test receiver Center Frequency = fundamental frequency, RBW, VBW= 3kHz, Span=300kHz.
- 5.4.4. Set EMI test receiver Max hold. Mark peak, -26dB.

5.5.Test Result

The EUT does meet the FCC requirement.

Input signal: play typical audio signal(music song)

FM 88.5MHz

-26dB bandwidth = 146.4kHz

FM 89.5 MHz

-26dB bandwidth = 151.2kHz

6. TUNING RANGE

6.1. The Requirement For Section 15.239

88-108MHz

6.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.2.1.Transmitter (EUT)

Model Number : DP-115/053

Serial Number : N/A

Manufacturer : Shenzhen Acadia Electronic Co., Ltd.

6.3. Operating Condition of EUT

- 6.3.1. Setup the EUT and simulator as shown as Section 4.1.
- 6.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes

6.4. Test Procedure

- 6.4.1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 6.4.2. Set the EUT working on the working frequency.
- 6.4.3. Set EMI test receiver center frequency = working frequency, RBW, VBW= 3kHz, Span=300kHz.
- 6.4.4. Measuring the working frequency.
- 6.4.5. The working frequency should be inside 88-108MHz.


6.5.Test Result

The EUT does meet the FCC requirement.

CH1 Working Frequency= 88.4996MHz CH2 Working Frequency= 89.5006MHz

The working frequency can not to be displayed on EUT. The EUT have two working frequency.


APPENDIX I (Test Curves)

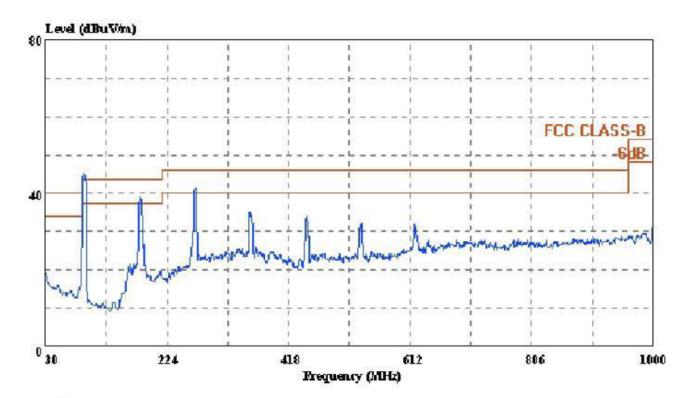

Condition: FCC CLASS-B 3m ATC VULB9163 (NEW) HORIZONTAL

eut : TRANSMITTER M/N:DP-115/053


power : DC 3.0V memo : CH1 manuf : Primo sample no.: 070696

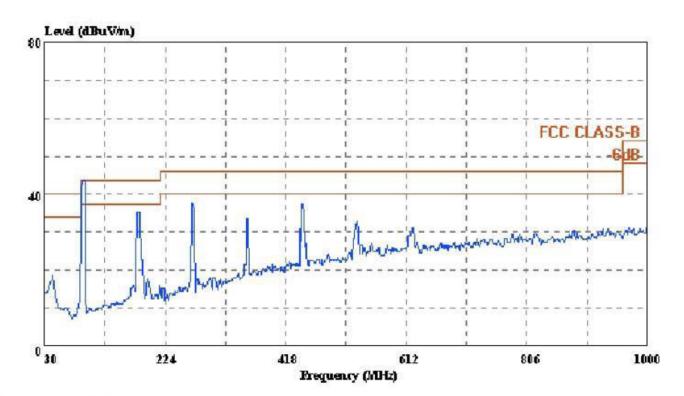

Condition: FCC CLASS-B 3m ATC VULB9163(NEW) VERTICAL

eut : TRANSMITTER M/N:DP-115/053


power : DC 3.0V memo : CH1 manuf : Primo sample no.: 070696

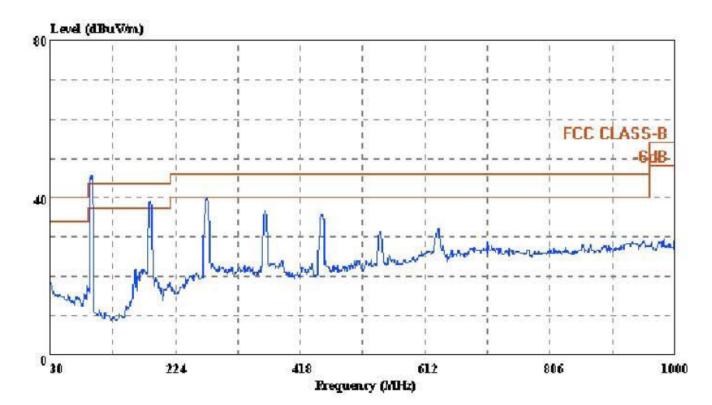

Condition: FCC CLASS-B 3m ATC VULB9163(NEW) HORIZONTAL

eut : TRANSMITTER M/N:DP-115/053

power : DC 3.0V memo : CH2 manuf : Primo sample no.: 070696

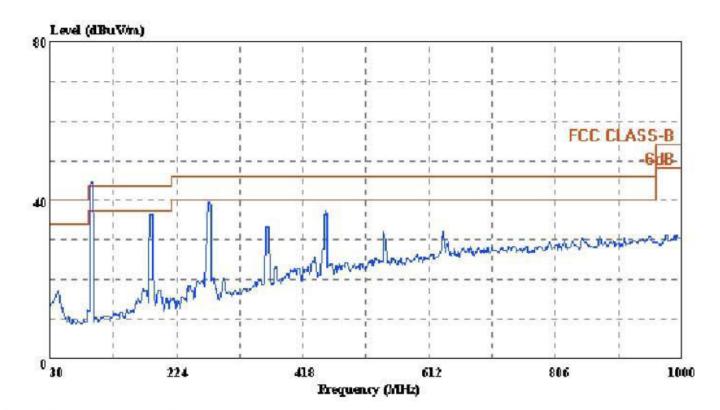

Condition: FCC CLASS-B 3m ATC VULB9163(NEW) VERTICAL

eut : TRANSMITTER M/N:DP-115/053

power : DC 3.0V memo : CH2 manuf : Primo sample no.: 070696

