



Engineering Solutions & Electromagnetic Compatibility Services

FCC Part 15.231 Test Data

319.5 MHz Flood

Model: 56-0077-01 RevD01

for

**Resolution Engineering, Inc.
1402 Heggen Street
Hudson, WI 54016
Contact: Josh Gathje**

Testing Conducted By:

**Rhein Tech Laboratories, Inc.
360 Herndon Parkway, Suite 1400
Herndon, VA 20170
RTL Test Engineer: Jon Wilson**

RTL Project/Report Number: 2016183

August 1, 2016

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Resolution Engineering. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB.
Refer to certificate and scope of accreditation AT-1445.

Testing Represented in Report

The data and limits presented in this report are for radiated emissions per 15.231(b)(2) which references 15.35(b), and peak limiting for restricted bands per 15.209(e), which again references 15.35(b)(2), as procured by Resolution Engineering. No average data is presented in this report. Data is also presented for spurious, non-harmonic radiated emissions per 15.209. The Equipment Under Test (EUT) was the **319.5 MHz Flood (RTL Bar Code 22096)**.

Test Procedure

Radiated fundamental and spurious emissions were tested at three meters. The EUT was tested in the three orthogonal planes with the receive antenna in both polarities. The emissions were maximized; that is, the measurement antenna height was varied between 1 and 4 m, and the EUT was rotated through 360° on a rotating turntable until the maximum emissions were found. Both horizontal and vertical measurement antenna polarizations were used. A resolution bandwidth of 120 kHz was used for frequencies less than 1000 MHz, and a resolution bandwidth of 1 MHz was used for frequencies greater than or equal to 1000 MHz. The video bandwidth was set to a value at least three times greater than the resolution bandwidth.

EUT Disposition

The EUT was adapted to continuously transmit for testing purposes.

15.231 Radiated Spurious Harmonics Emissions Test Data – Peak

| Emission Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Analyzer Reading (dBuV) | Site Correction Factor (dB/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pass/Fail |
|--------------------------|---------------|------------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|-----------|
| 319.523 | Peak | H | 76.8 | 14.6 | 91.4 | 95.9 | -4.5 | Pass |
| 639.046 | Peak | H | 48.9 | -5.2 | 43.7 | 75.9 | -32.2 | Pass |
| 958.569 | Peak | V | 45.3 | -1.9 | 43.4 | 75.9 | -32.5 | Pass |
| 1278.092 | Peak | H | 43.4 | 2.0 | 45.4 | 74.0 | -28.6 | Pass |
| 1597.615 | Peak | V | 40.6 | 3.6 | 44.2 | 74.0 | -29.8 | Pass |
| 1917.138 | Peak | H | 55.0 | 5.6 | 60.6 | 75.9 | -15.3 | Pass |
| 2236.661 | Peak | V | 70.9 | -15.7 | 55.2 | 74.0 | -18.8 | Pass |
| 2556.184 | Peak | V | 59.8 | -14.9 | 44.9 | 75.9 | -31.0 | Pass |
| 2875.707 | Peak | V | 39.4 | -14.9 | 24.5 | 74.0 | -49.5 | Pass |
| 3195.230 | Peak | V | 47.6 | -14.2 | 33.4 | 75.9 | -42.5 | Pass |

All spurious emissions in the applicable frequency range were investigated; only harmonic emissions were present as noted above.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway, Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Resolution Engineering
Model: Model: 56-0077-01 RevD01
Standards: FCC Parts 2, 15
Report #: 2016183

Radiated Emissions Test Equipment

| RTL Bar Code | Manufacturer | Model | Part Type | Serial Number | Calibration Due Date |
|--------------|-------------------------------|----------|-------------------------------------|---------------|----------------------|
| 900930 | Hewlett Packard | 85662A | Spectrum Analyzer Display | 3144A20839 | 4/21/17 |
| 900931 | Hewlett Packard | 8566B | Spectrum Analyzer (100 Hz – 22 GHz) | 3138A07771 | 4/21/17 |
| 900905 | Rhein Tech Laboratories, Inc. | PR-1040 | Amplifier (20 MHz – 2 GHz) | 900905 | 9/11/16 |
| 901683 | Com-Power Corp. | PAM-118A | Preamplifier (500 MHz – 18 GHz) | 551076 | 4/13/17 |
| 900791 | Chase | CBL6112 | Antenna (30 MHz – 2 GHz) | 2099 | 6/11/17 |
| 900772 | EMCO | 3161-02 | Horn Antenna 2 - 4 GHz | 9804-1044 | 4/9/18 |

Test Personnel:

| | | |
|---------------|---|---------------|
| Jon Wilson |  | July 29, 2016 |
| Test Engineer | Signature | Date of Test |


FCC/IC Cross Reference

| | |
|------------------|-----------------------|
| FCC 15.231(b)(2) | RSS-210 Issue 8 A1.1 |
| FCC 15.35(b) | RSS-Gen Issue 3 7.2.3 |
| FCC 15.205 | RSS-Gen Issue 3 7.2.2 |
| FCC 15.209 | RSS-Gen Issue 3 7.2.5 |

Rhein Tech Laboratories, Inc.
360 Herndon Parkway, Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Resolution Engineering
Model: Model: 56-0077-01 RevD01
Standards: FCC Parts 2, 15
Report #: 2016183


Appendix A: Test Configuration Photographs

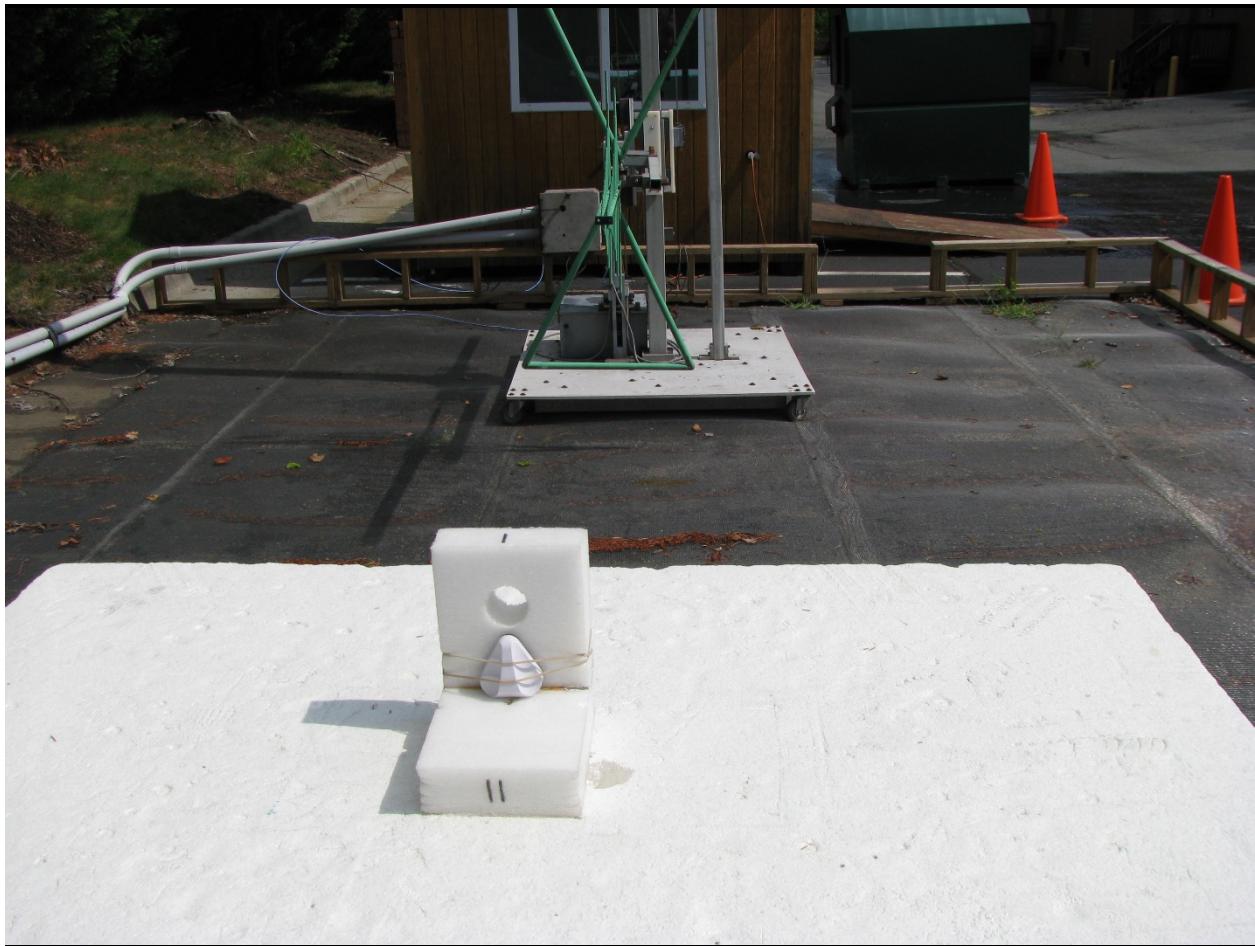

Radiated Emissions (Less Than 1 GHz)

Rhein Tech Laboratories, Inc.
360 Herndon Parkway, Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Resolution Engineering
Model: Model: 56-0077-01 RevD01
Standards: FCC Parts 2, 15
Report #: 2016183

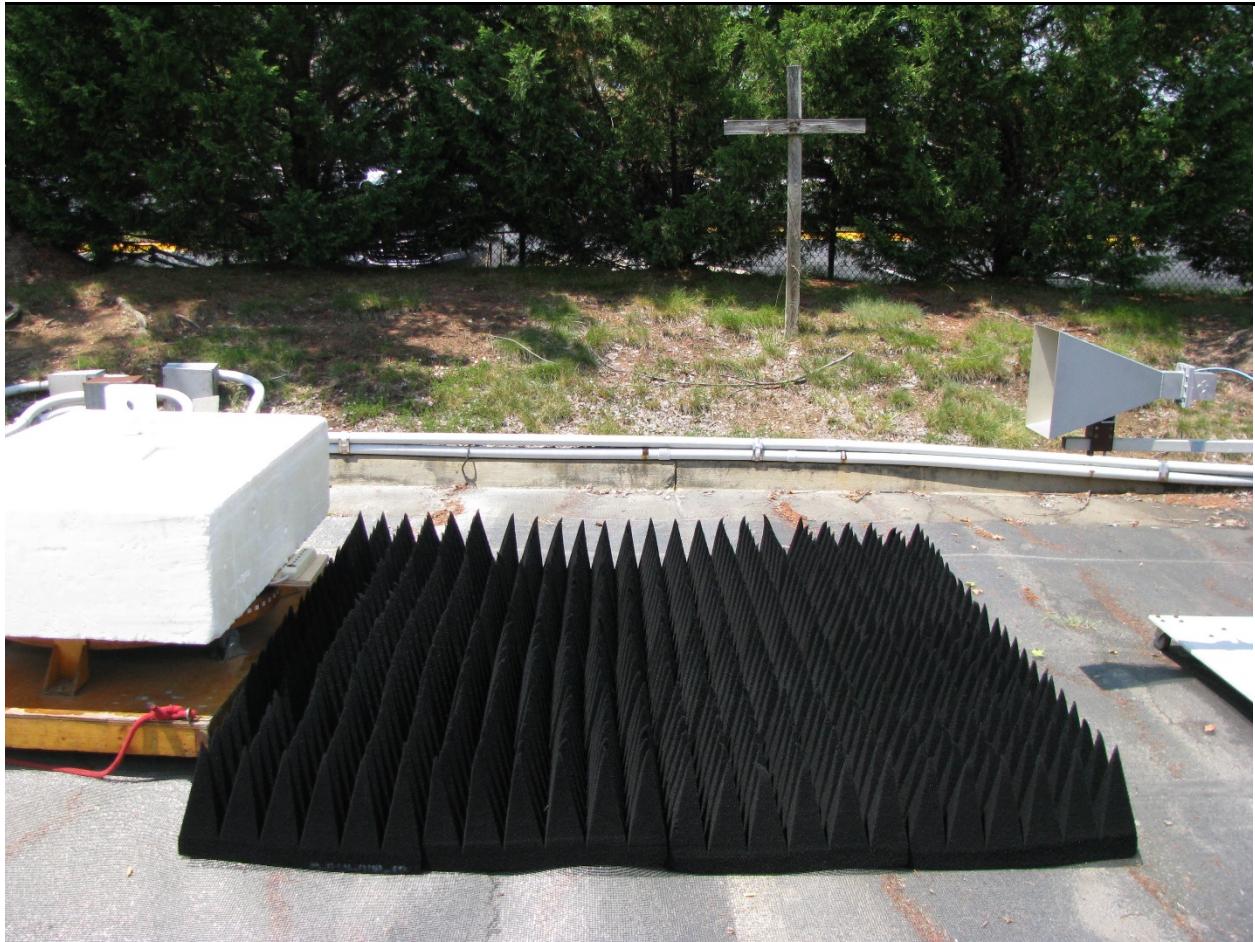


Radiated Emissions (Greater Than 1 GHz)

Rhein Tech Laboratories, Inc.
360 Herndon Parkway, Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Resolution Engineering
Model: Model: 56-0077-01 RevD01
Standards: FCC Parts 2, 15
Report #: 2016183

Appendix B: EUT Photographs

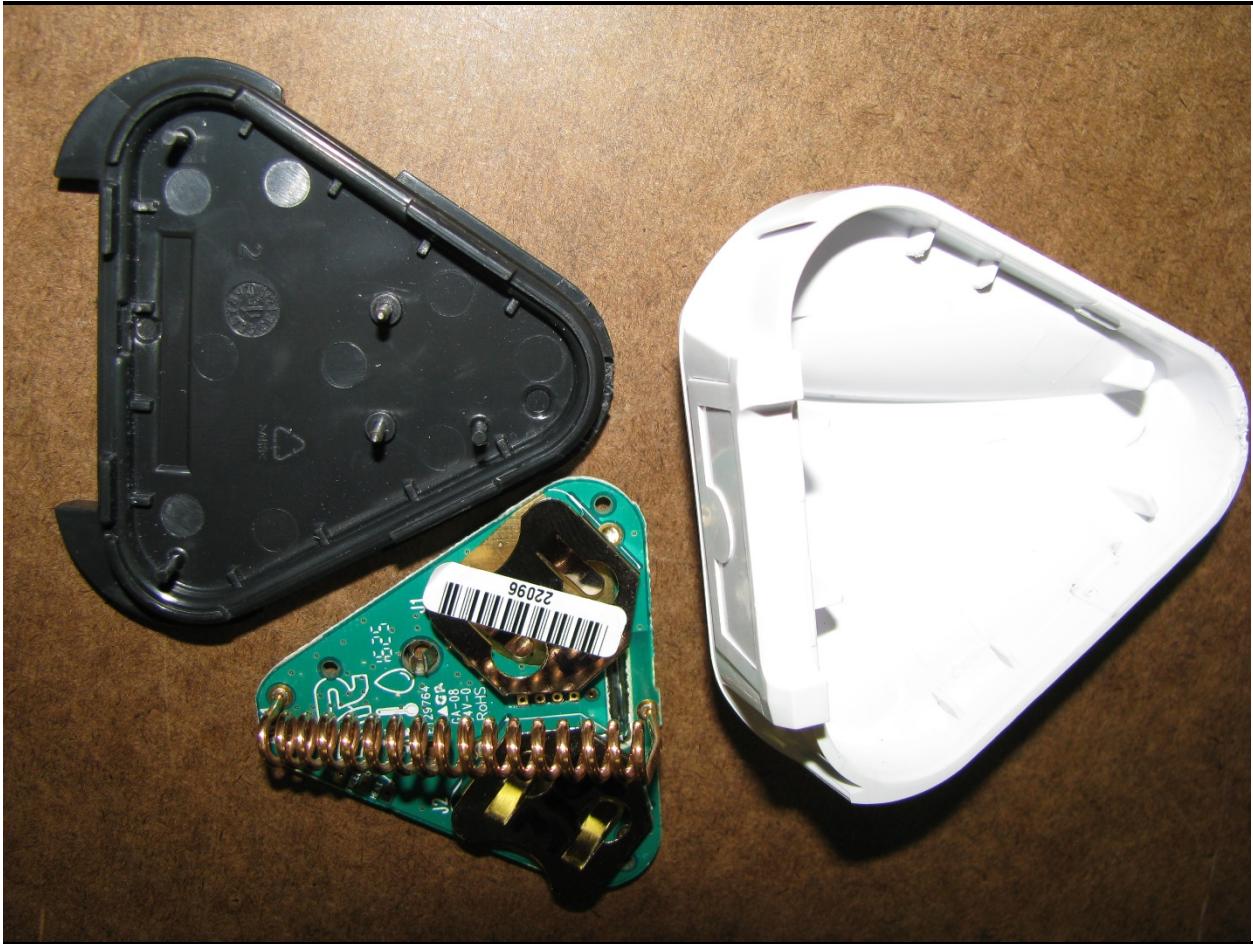

Rhein Tech Laboratories, Inc.
360 Herndon Parkway, Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Resolution Engineering
Model: Model: 56-0077-01 RevD01
Standards: FCC Parts 2, 15
Report #: 2016183

