



# FCC TEST REPORT

for

Wireless LAN Access Point

MODEL: H3C WA2110-AG

Test Report Number:  
**KS071115A01-RP**

Issued for

**Hangzhou H3C Technologies Co., Ltd**  
310 Liuhe Road, Zhijiang Science Park,  
Hangzhou 310053, P.R.China

Issued by:

**Compliance Certification Services Inc.**  
**Kun shan Laboratory**  
**No.10 Weiye Rd, Innovation park, Eco&Tec,**  
**Development Zone, Kunshan City, Jiangsu, P.R.O.C**  
**TEL: 86-512-57355888**  
**FAX: 86-512-57370818**

**Issued Date: November 16,2007**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 16,2007	Initial Issue	ALL	Miro chueh



## TABLE OF CONTENTS

<b>1 TEST CERTIFICATION .....</b>	<b>4</b>
<b>2 TEST RESULT SUMMARY .....</b>	<b>5</b>
<b>3 EUT DESCRIPTION.....</b>	<b>6</b>
<b>4 TEST METHODOLOGY.....</b>	<b>7</b>
4.1. DESCRIPTION OF TEST MODES .....	7
<b>5 SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF SUPPORT UNITS.....	8
5.2. CONFIGURATION OF SYSTEM UNDER TEST .....	8
<b>6 FACILITIES AND ACCREDITATIONS .....</b>	<b>9</b>
6.1. FACILITIES .....	9
6.2. ACCREDITATIONS .....	9
6.3. MEASUREMENT UNCERTAINTY .....	9
<b>7 LIMITS AND RESULTS .....</b>	<b>10</b>
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT .....	10
7.2. SPURIOUS EMISSIONS MEASUREMENT.....	15
7.3. 6dB BANDWIDTH MEASUREMENT .....	33
7.4. PEAK OUTPUT POWER .....	38
7.5. BAND EDGES MEASUREMENT.....	43
7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	55
<b>APPENDIX I RADIO FREQUENCY EXPOSURE.....</b>	<b>60</b>
<b>APPENDIX II PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>62</b>



## 1 TEST CERTIFICATION

**Product:** Wireless LAN Access Point

**Model:** H3C WA2110-AG

**Brand:** H3C

**Tested:** From January 20, 2007 to August 8, 2007

**Applicant:** Hangzhou H3C Technologies Co., Ltd  
310 Liuhe Road, Zhijiang Science Park, Hangzhou 310053, P.R.China

**Manufacturer:** Hangzhou H3C Technologies Co., Ltd  
310 Liuhe Road, Zhijiang Science Park, Hangzhou 310053, P.R.China

### APPLICABLE STANDARDS

Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

### DEVIATION FROM APPLICABLE STANDARD

None

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

**Approved by:**

Miro Chueh  
EMC Manager  
Compliance Certification Service Inc.

**Tested by:**

Ruth Wu  
EMC engineer  
Compliance Certification Service Inc.



## 2 TEST RESULT SUMMARY

<b>APPLICABLE STANDARDS</b>			
<b>Standard</b>	<b>Test Type</b>	<b>Result</b>	<b>Remark</b>
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The test result judgment is decided by the limit of test standard  
2. The information of measurement uncertainty is available upon the customer's request.



### 3 EUT DESCRIPTION

<b>Product</b>	Wireless LAN Access Point
<b>Trade Name</b>	H3C
<b>Model Number</b>	H3C WA2110-AG
<b>Model Discrepancy</b>	All the above models are identical except the model designation for different market.
<b>Power Adapter</b> <b>Power Rating</b>	Powered from an AC/DC power adapter Model Number: FSP025-1AD207A Input: AC 100-240V, 50-60Hz, 0.7A Output: DC 48V, 0.52A
<b>DC Power Cable Type</b>	Unshielded, 1.5m (Non-Detachable) at Power Adapter with a core
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	IEEE 802.11b: 22.40dBm IEEE 802.11g: 21.09dBm
<b>Modulation Technique</b>	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
<b>Transmit Data Rate</b>	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
<b>Number of Channels</b>	IEEE 802.11b, IEEE 802.11g : 11 Channels
<b>Antenna Specification</b>	PIFA antenna with 3.5dBi gain (Max)

**Note:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: U6IH3CEWTO235A22W filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



## 4 TEST METHODOLOGY

### 4.1. DESCRIPTION OF TEST MODES

The EUT had been tested under the operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode was scanned during the preliminary test:

**Mode 1: Wall, ceiling mounting, set the EUT vertically on the table top.**

**Mode 2: Table top mounting, set the EUT horizontally on the table top.**

After the preliminary scan, the following test mode was found to produce the highest emission level.

**Mode 2: Table top mounting ,set the EUT horizontally on the table top.**

Then, the EUT configuration and cable configuration of the above highest emission mode was recorded for all final test items.

IEEE802.11b: Channel low(2412MHz), Channel middle(2437MHz) and Channel high (2462MHz) with preliminary test 11, 5.5, 2, and 1, After the preliminary scan , the following test mode 11Mbps highest data rate (the worst case) are chosen for the final testing.

IEEE802.11g: Channel low(2412MHz), Channel middle(2437MHz) and Channel high(2462MHz) with preliminary test 54/48/36/24/18/12/9/6, After the preliminary scan , the following test mode 6Mbps data rate (the worst case) are chosen for the final testing.



## 5 SETUP OF EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	NB	HP	HP6130	3106010149	N/A.	Shielded, 1.2m	N/A
2.	Wireless controller	WX	WX5002	02A23S006B00000 7	N/A	Shielded, 1.8m	N/A

**Note:**

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



## 6 FACILITIES AND ACCREDITATIONS

### 6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, P.R.O.C**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC,A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA,
<b>Taiwan</b>	TAF

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsemc.com>.

### 6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETR 028:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 2.15dB
Radiated emissions	30MHz ~ 200MHz	+/- 2.50dB
	200MHz ~1000MHz	+/- 2.50dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 7 LIMITS AND RESULTS

### 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

#### 7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

**NOTE:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## TEST INSTRUMENTS

Conducted Emission Test Site A (10m chamber)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESI26	100068	02/11/2008
EMC Analyzer	Agilent	E7402A	US41160329	02/11/2008
LISN	FCC	FCC-LISN-50-50-2-M	01067	02/11/2008
LISN (EUT)	FCC	FCC-LISN-50-50-2-M	01068	02/11/2008
FOUR BALANCED TELECOM PAIRS ISN	FCC	FCC-TLISN-T8-02	20165	07/30/2008
4-WIRE ISN	R&S	ENY41	830663/024	04/08/2008
Double 2-Wire ISN	R&S	ENY22	830661/027	04/08/2008
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	03/15/2008
EMI Monitor control box	FCC	0-SVDC	N/A	05/11/2008

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


2. N.C.R = No Calibration Request.



## 7.1.2. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

### 7.1.3. TEST SETUP

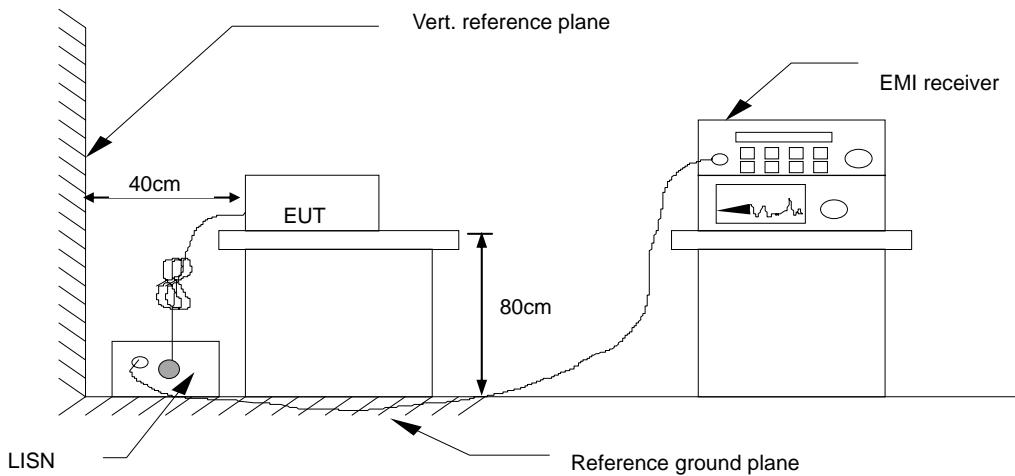

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.1.4. Data Sample:

Frequency (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Correction factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
XXX	37.58	35.11	10.10	47.68	45.21	63.49	53.49	-15.81	-8.28	L1

Frequency (MHz)

= Emission frequency in MHz

Reading (dBuV)

= Uncorrected Analyzer/Receiver reading

Correction factor (dB)

= Insertion loss of LISN

Limit (dBuV)

= Limit stated in standard

Margin (dB)

= Reading (dBuV) – Limit (dBuV)

Note



= Current carrying line of reading

**7.1.5. TEST RESULTS**

<b>Model No.</b>	<b>H3C WA2110-AG</b>			<b>Test Mode</b>		<b>Normal Link</b>		
<b>Environmental Conditions</b>	25deg.C, 65% RH, 991 hPa			<b>6dB BANDWIDTH</b>		<b>9 kHz</b>		
<b>Tested by:</b>	<b>RUTH</b>							

Frequency (KHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
190.2	26.06	25.94	10.36	36.42	36.3	64.85	54.85	-28.43	-18.55	L1
231.4	24.75	25.09	10.36	35.11	35.45	63.67	53.67	-28.56	-18.22	L1
329.8	28.54	28.33	10.4	38.94	38.73	60.86	50.86	-21.92	-12.13	L1
1023.8	8.65	7.71	10.43	19.08	18.14	56.00	46.00	-36.92	-27.86	L1
1646.7	8.92	8.74	10.48	19.4	19.22	56.00	46.00	-36.60	-26.78	L1
17812.5	5.6	11.02	12.04	17.64	23.06	60.00	50.00	-42.36	-26.94	L1
183.9	24.15	18.32	10.4	34.55	28.72	65.03	55.03	-30.48	-26.31	L2
235.1	23.93	23.43	10.39	34.32	33.82	63.57	53.57	-29.25	-19.75	L2
331.3	21.3	21.81	10.4	31.7	32.21	60.82	50.82	-29.12	-18.61	L2
375.9	25.48	26.59	10.4	35.88	36.99	59.55	49.55	-23.67	-12.56	L2
987.5	9.05	7.87	10.42	19.47	18.29	56.00	46.00	-36.53	-27.71	L2
1908.1	11.62	10.94	10.49	22.11	21.43	56.00	46.00	-33.89	-24.57	L2

**REMARKS:** L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

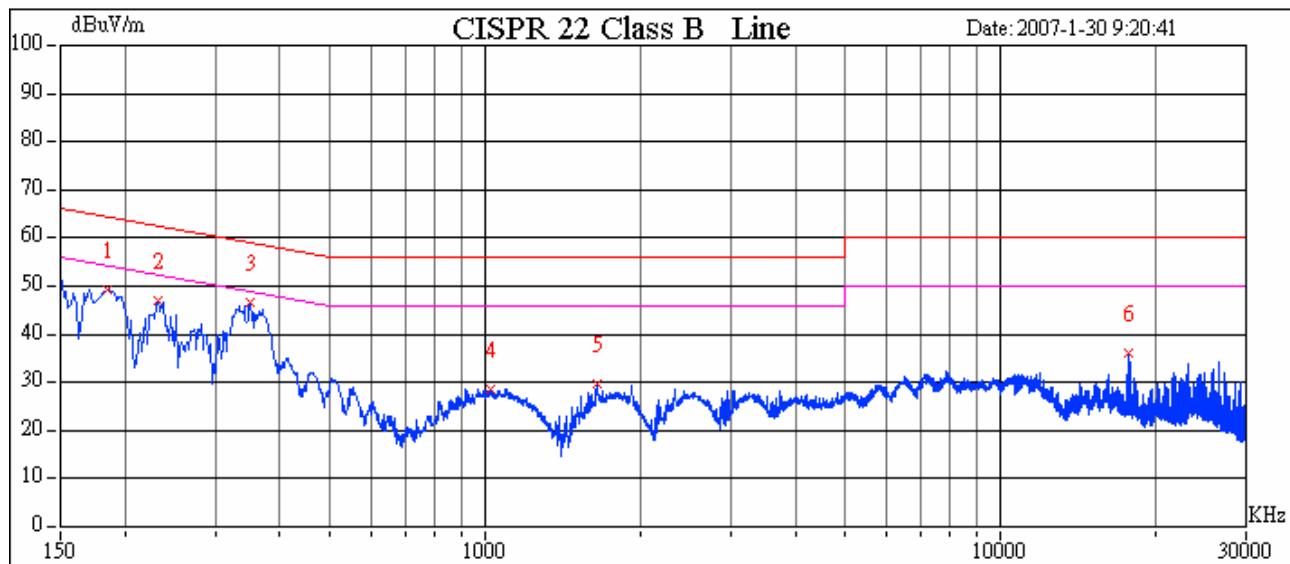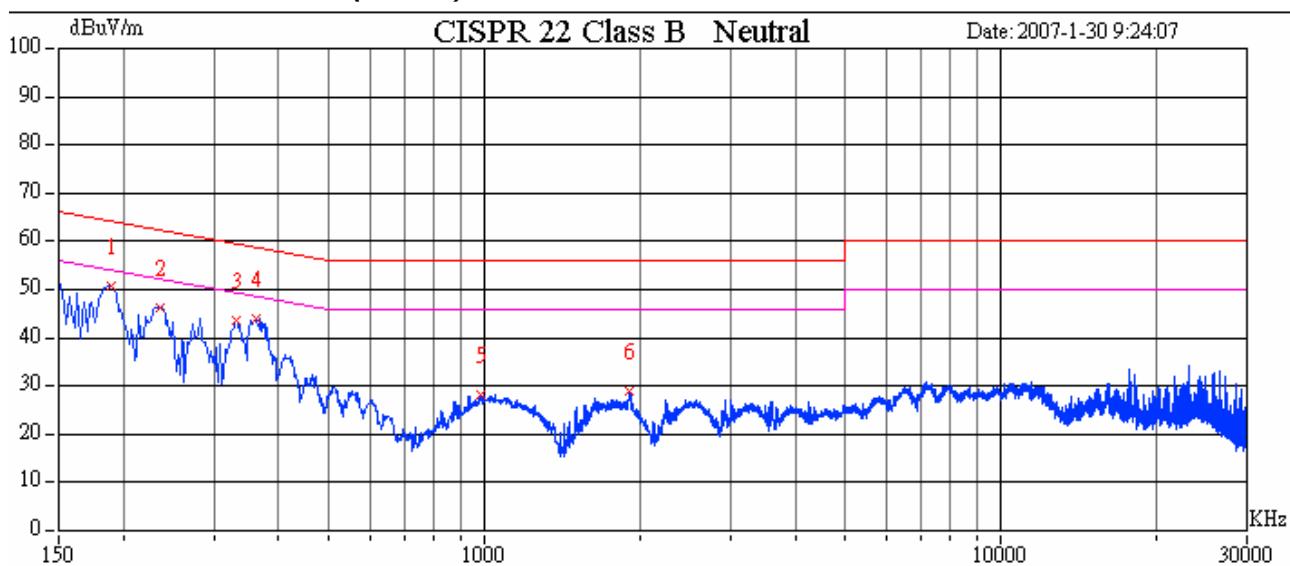**Test Plots*****Conducted emissions (Line 1)******Conducted emissions (Line 2)***



## 7.2. SPURIOUS EMISSIONS MEASUREMENT

### 7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### 7.2.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	08/15/2008

### 7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


## 7.2.4. TEST RESULTS

### Test Plot (IEEE 802.11b mode)


Tested by: Ruth

#### CH Low

30MHz ~ 2.9GHz

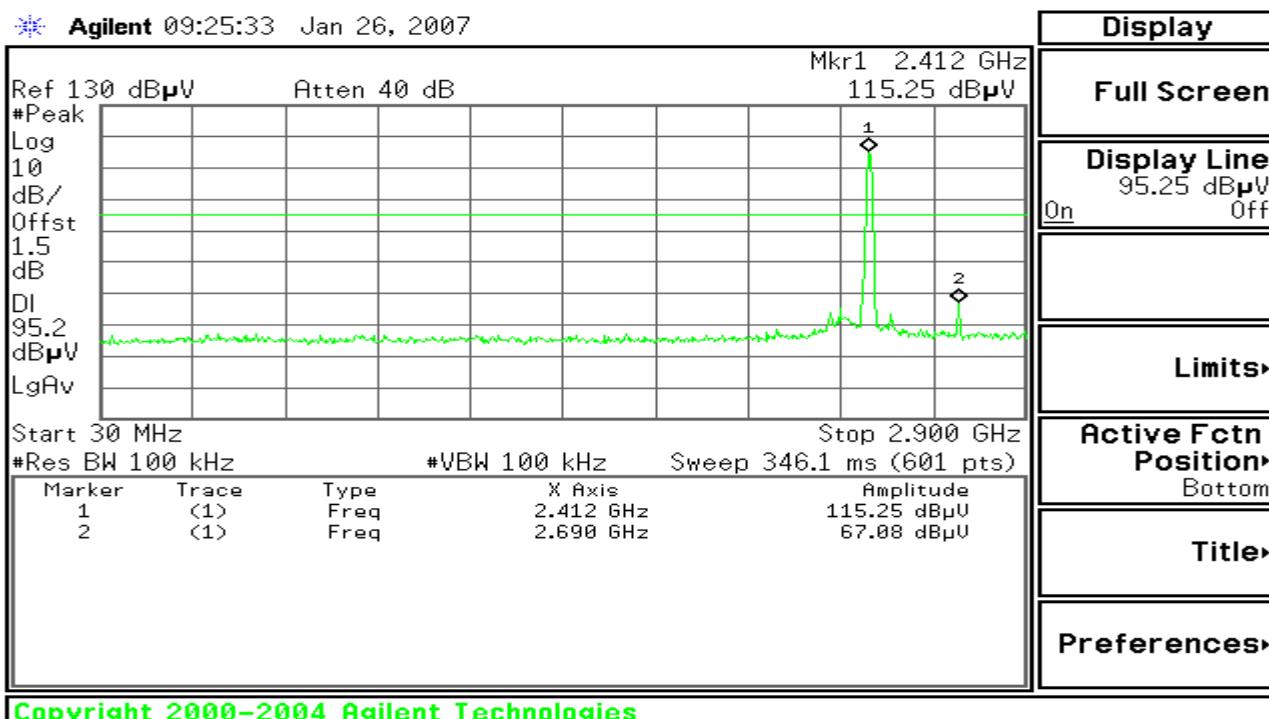


2.9GHz ~ 26.5GHz

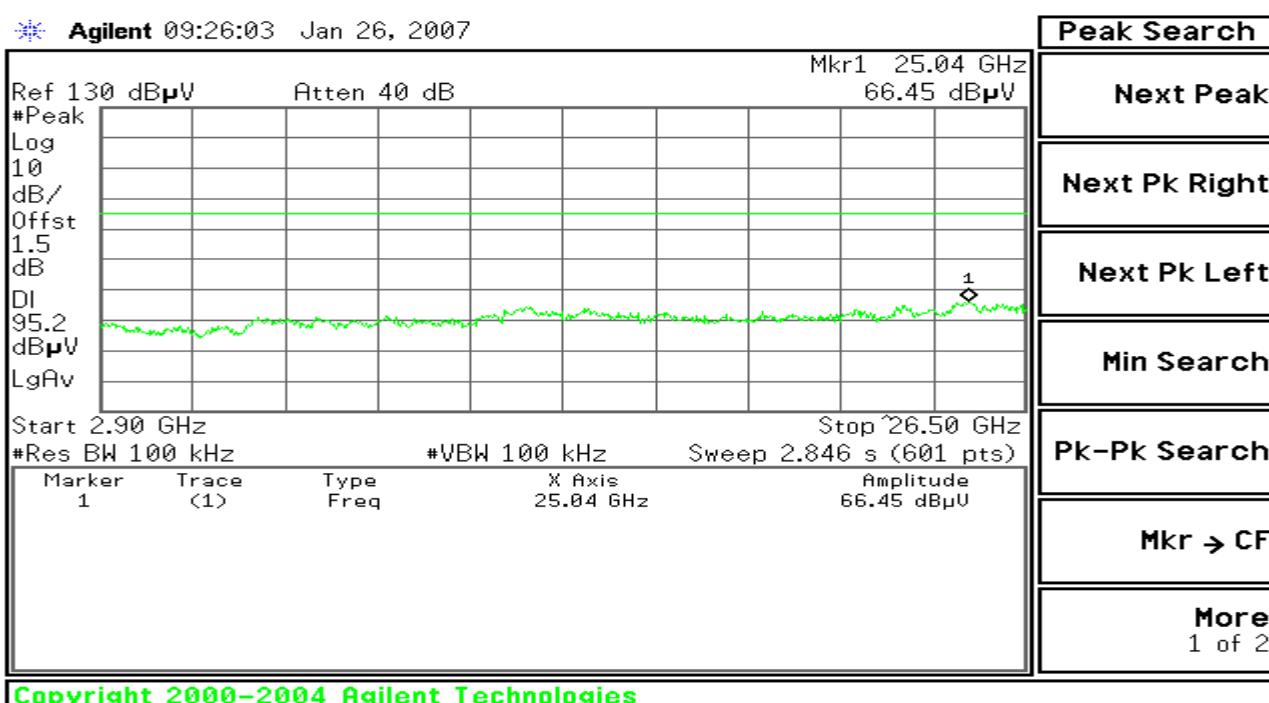




## CH Mid

### 30MHz ~ 2.9GHz

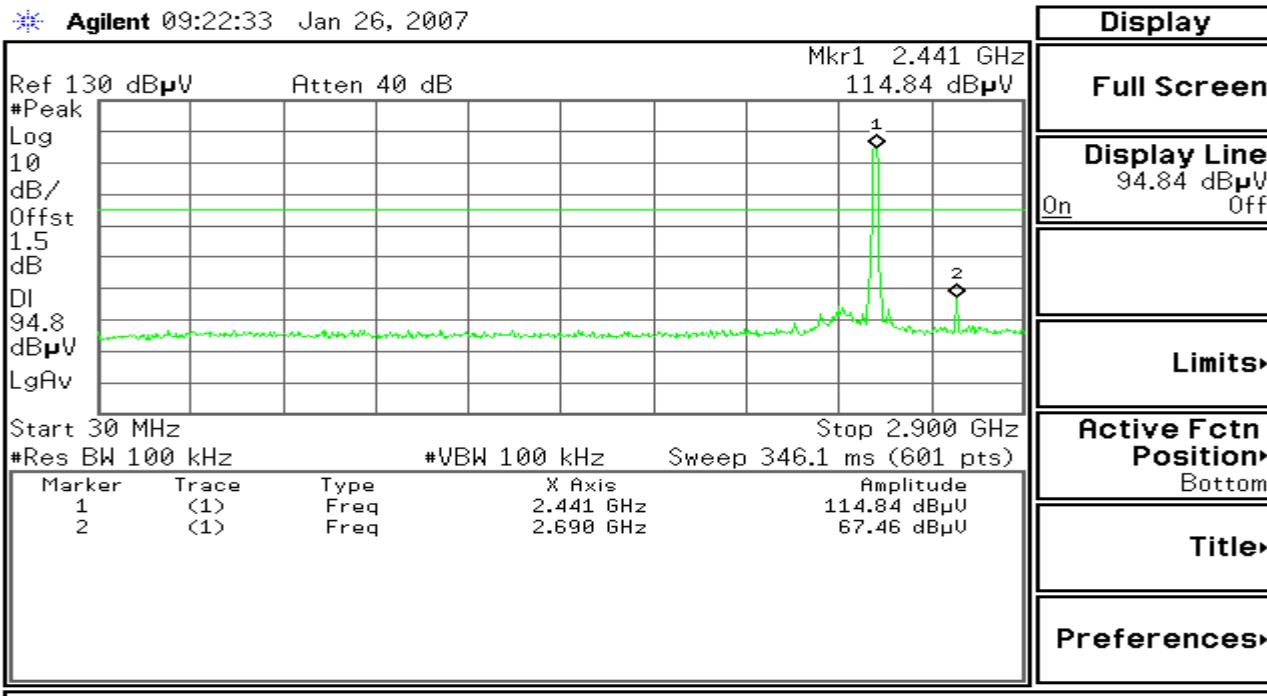


### 2.9GHz ~ 26.5GHz

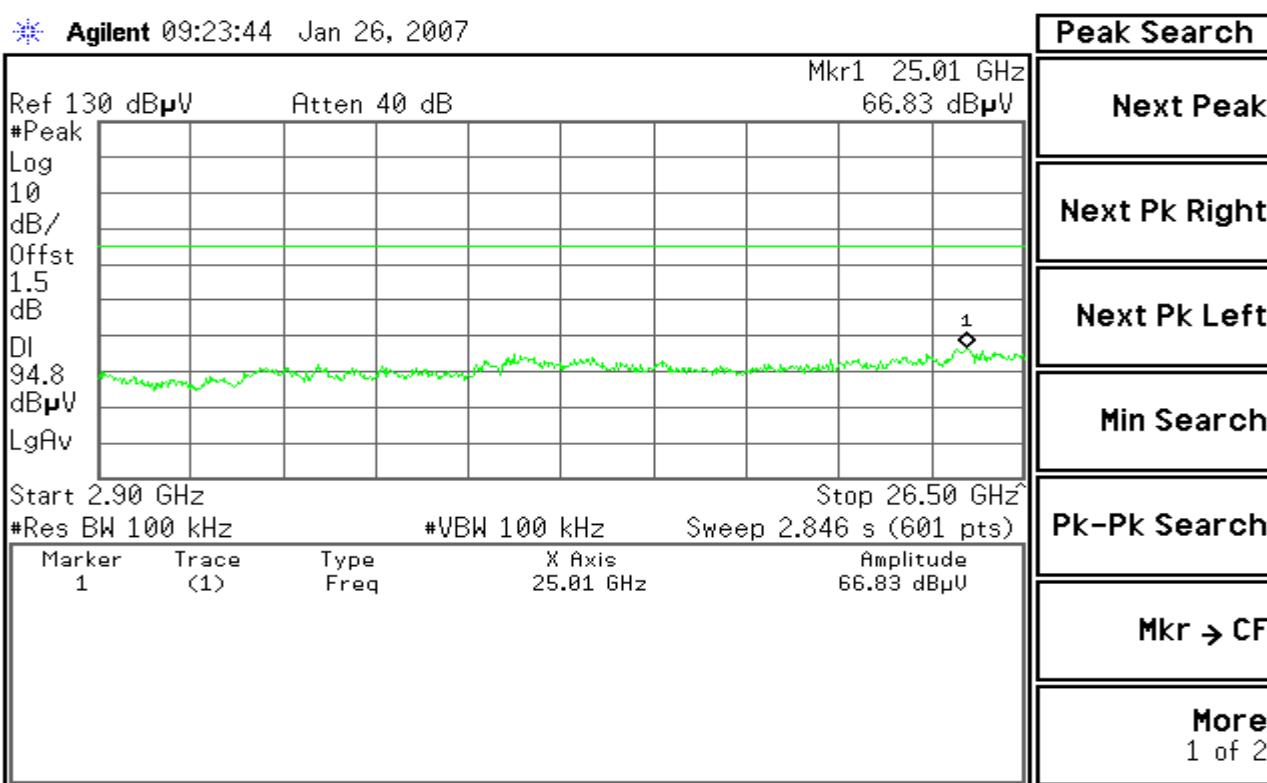




## CH High

### 30MHz ~ 2.9GHz

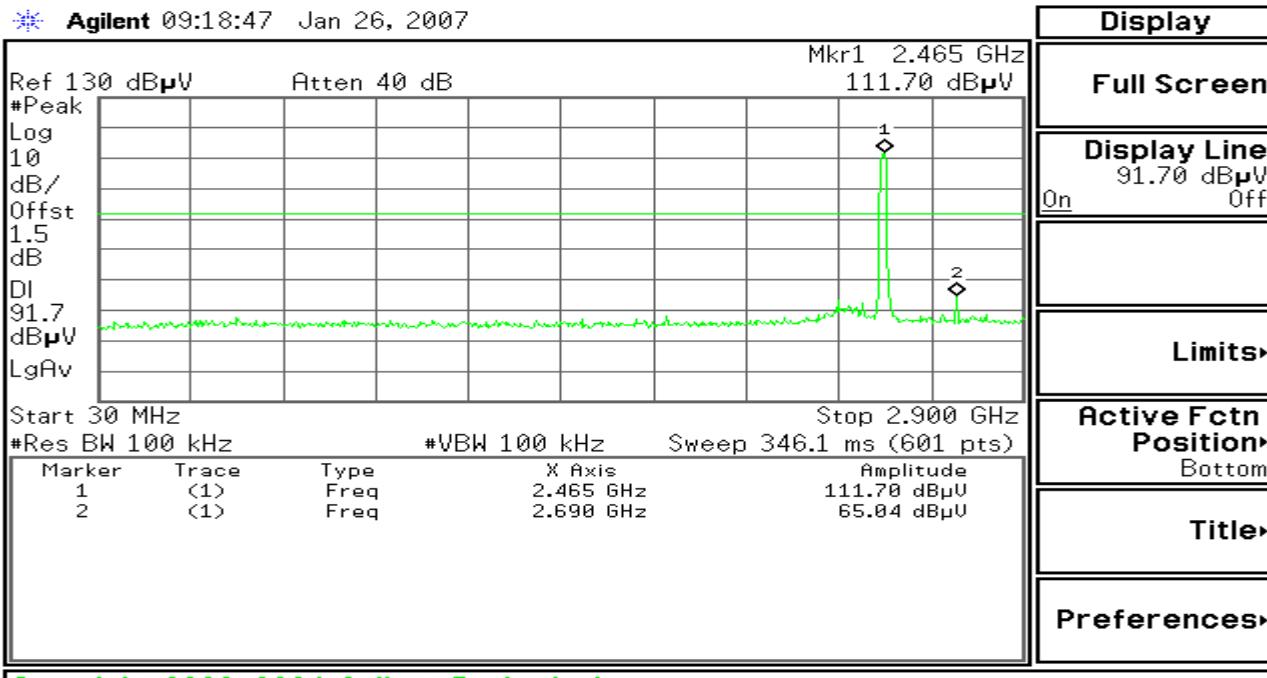

### 2.9GHz ~ 26.5GHz

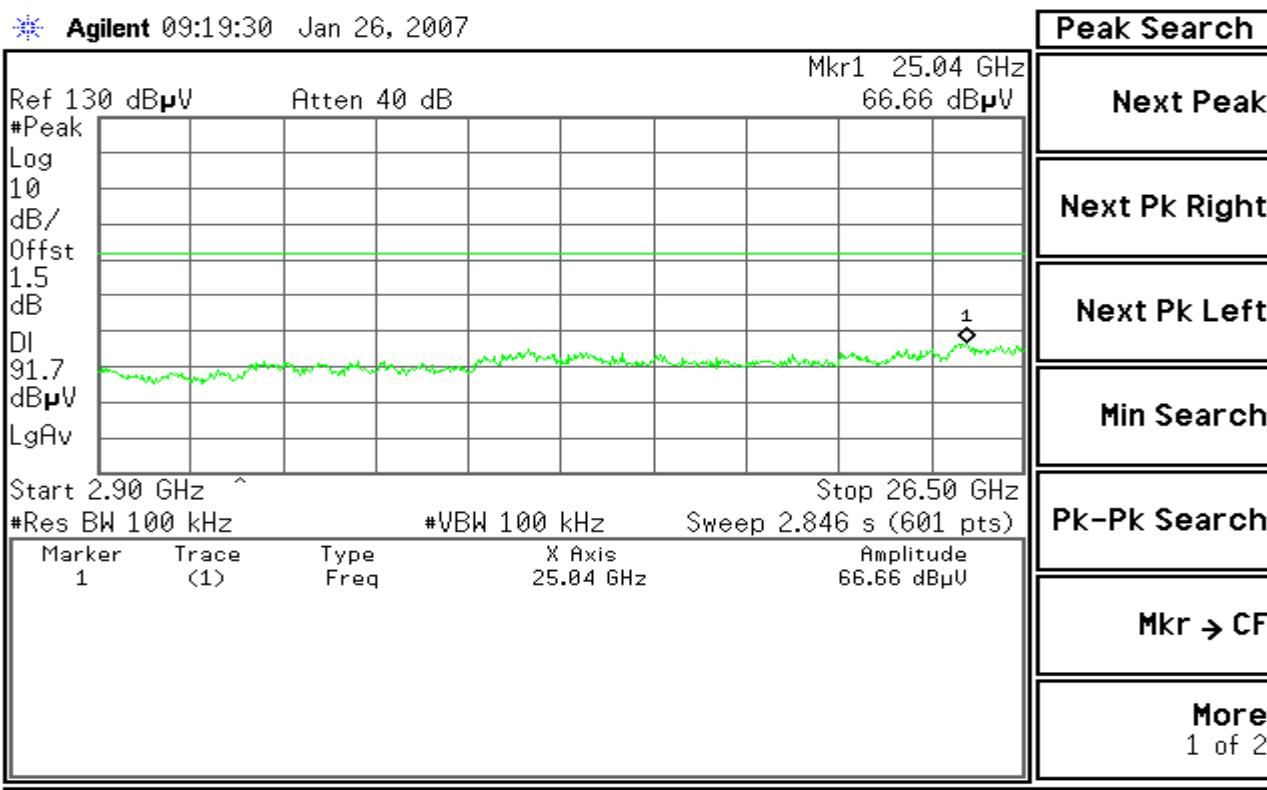





## Test Plot (IEEE 802.11g mode)

### CH Low

30MHz ~ 2.9GHz

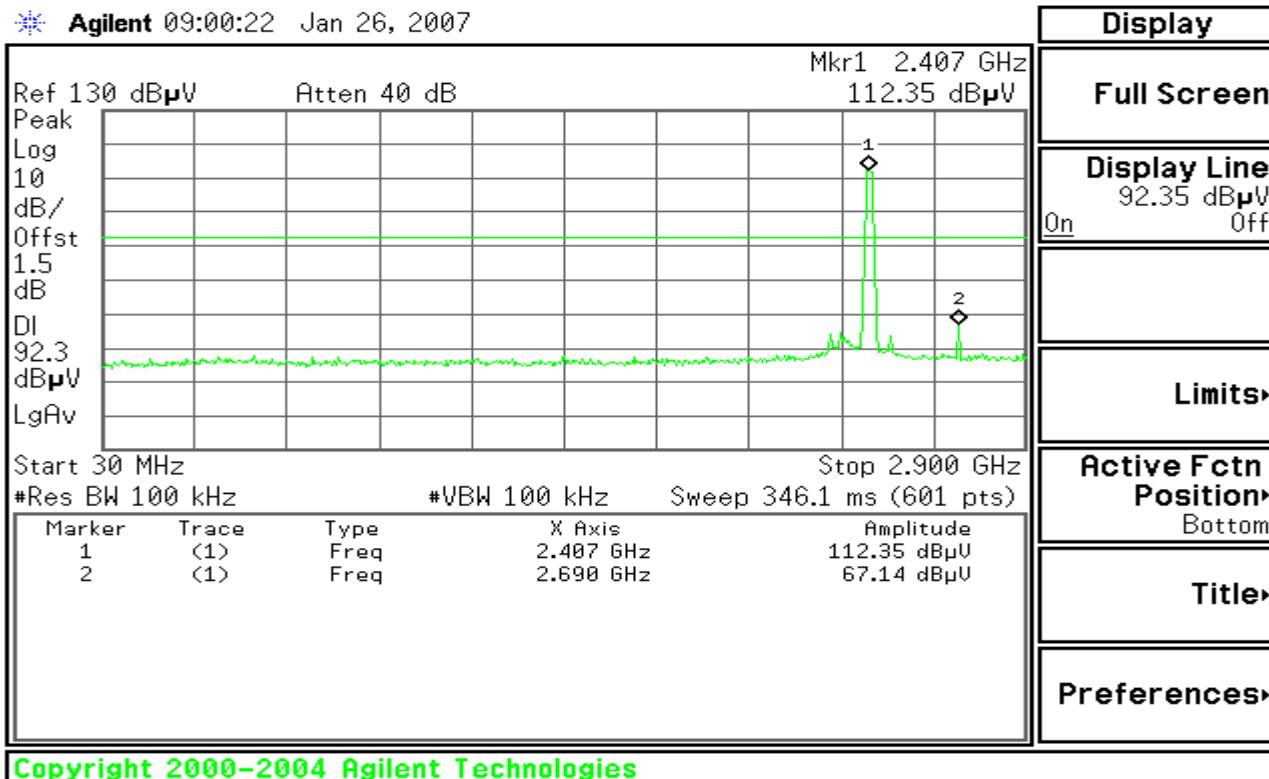

2.9GHz ~ 26.5GHz

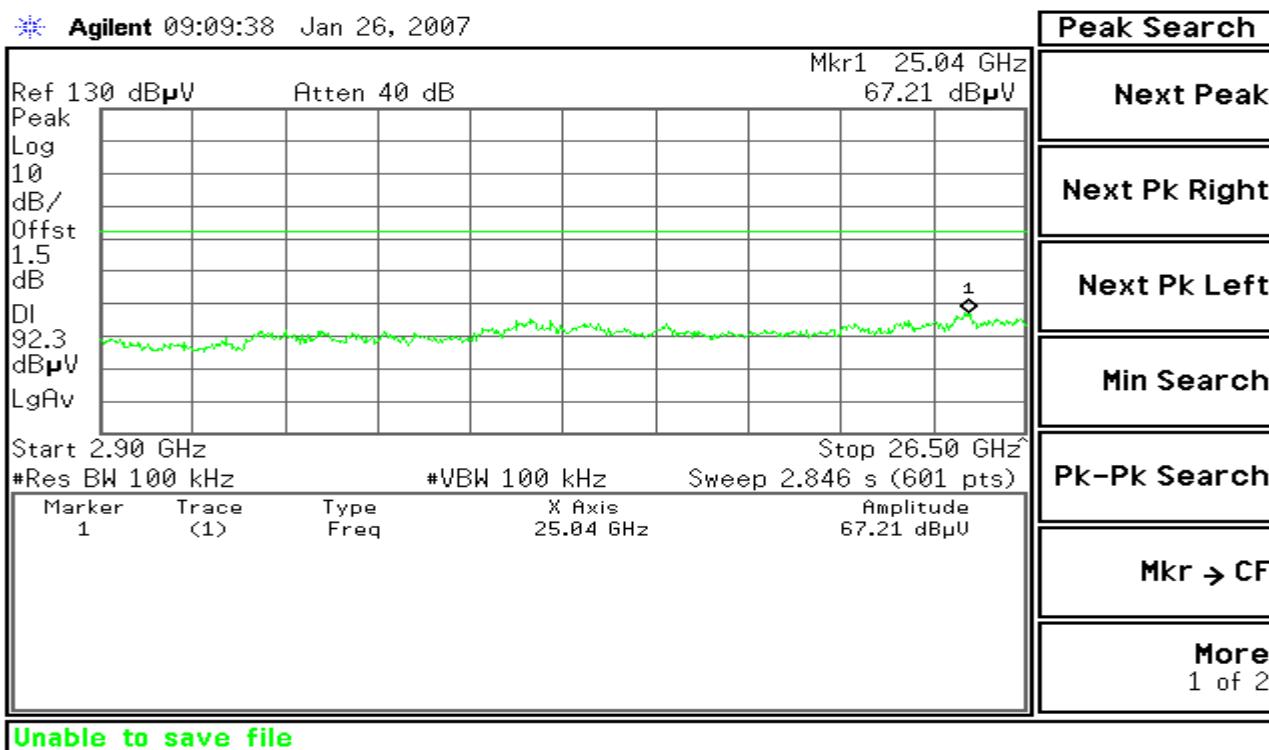




## CH Mid

### 30MHz ~ 2.9GHz

Agilent 09:07:04 Jan 26, 2007

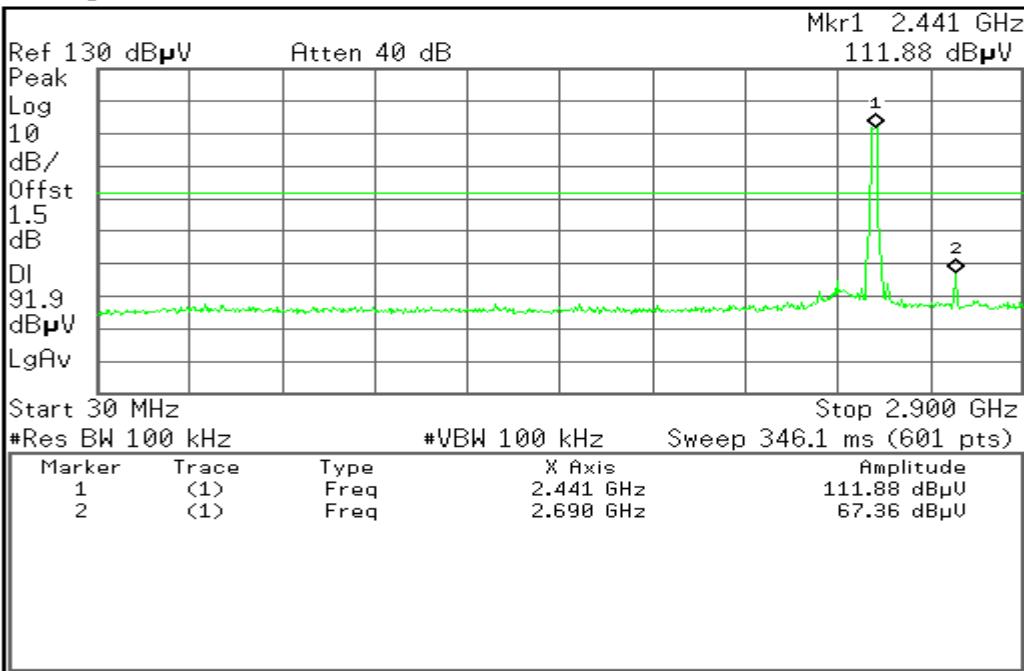


- Display
- Full Screen
- Display Line 91.88 dBµV Off On
- Limits
- Active Fctn Position Bottom
- Title
- Preferences

Copyright 2000-2004 Agilent Technologies

### 2.9GHz ~ 26.5GHz

Agilent 09:07:51 Jan 26, 2007

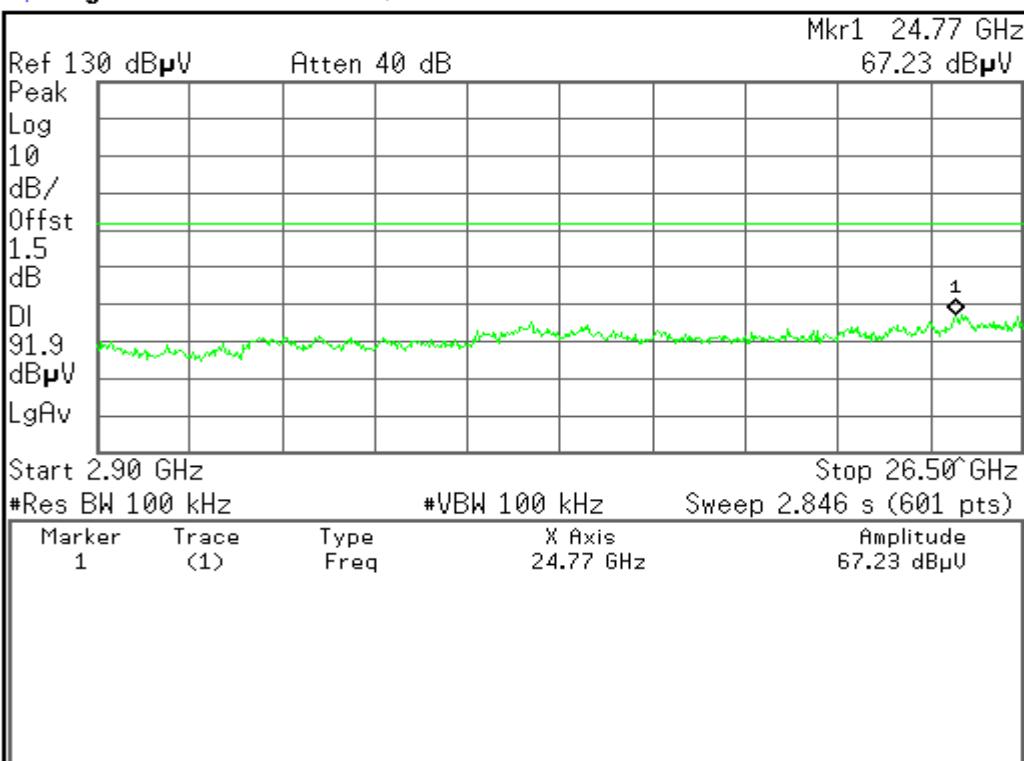

- Peak Search
- Next Peak
- Next Pk Right
- Next Pk Left
- Min Search
- Pk-Pk Search
- Mkr → CF
- More 1 of 2



Copyright 2000-2004 Agilent Technologies



## CH High

### 30MHz ~ 2.9GHz


\* Agilent 09:13:24 Jan 26, 2007

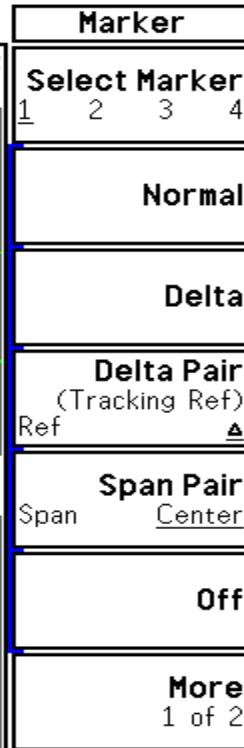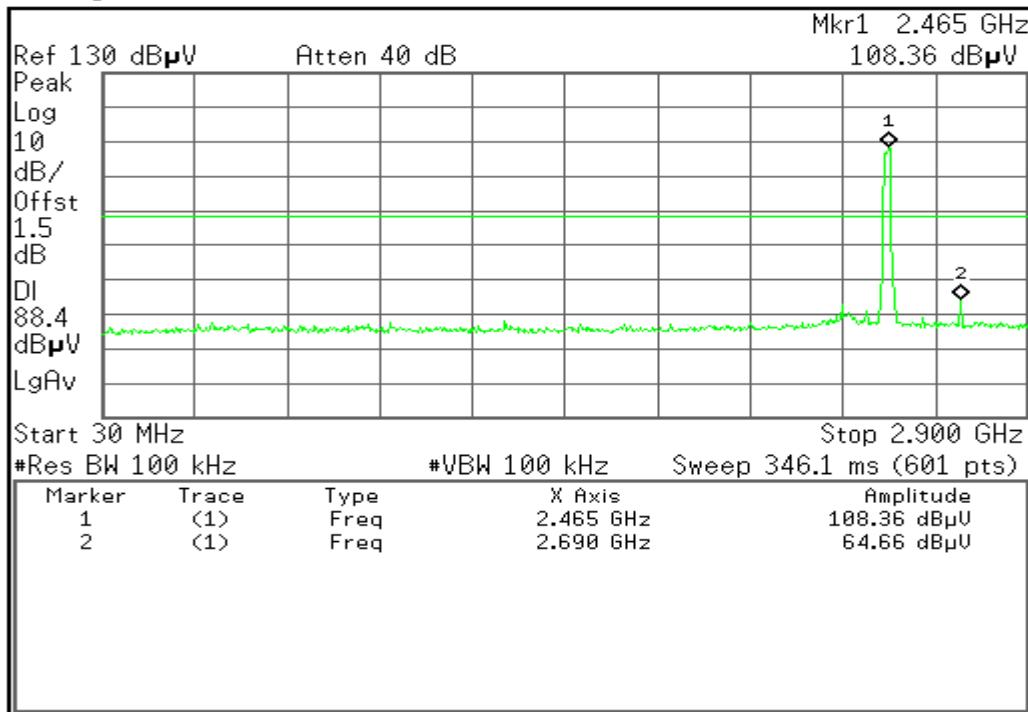

Copyright 2000-2004 Agilent Technologies

### 2.9GHz ~ 26.5GHz

\* Agilent 09:16:40 Jan 26, 2007

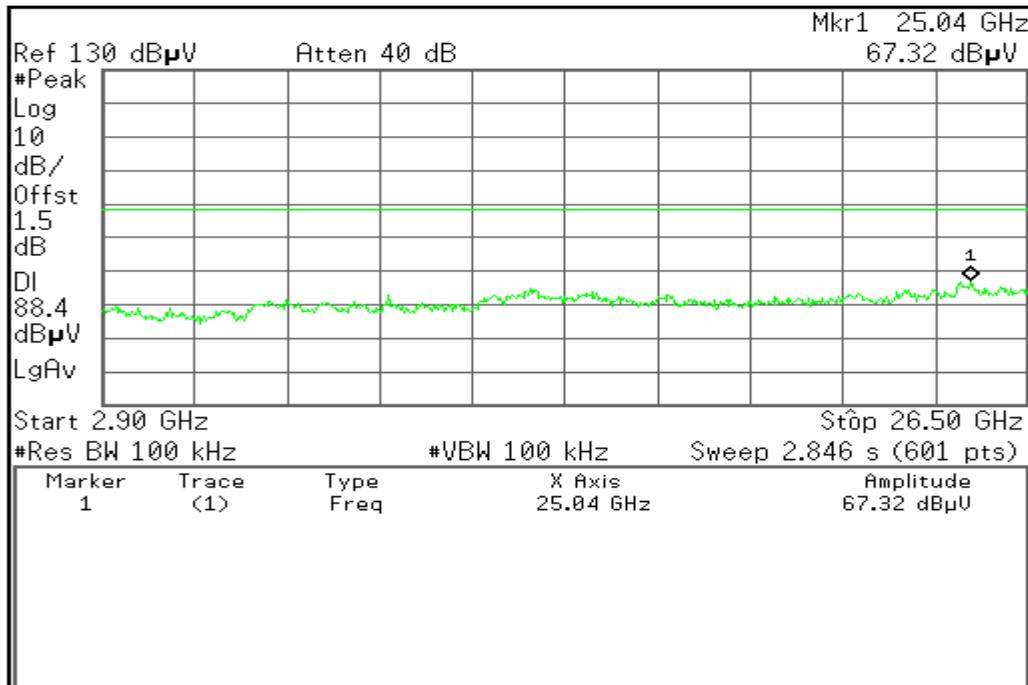

Copyright 2000-2004 Agilent Technologies

**7.2.5. Radiated Emissions****7.2.5.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT**

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**NOTE:** (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

**7.2.5.2. TEST INSTRUMENTS**

3M Semi Anechoic Chamber (977)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	08/15/2008
Spectrum Analyzer	Agilent	E4446A	US44300398	07/25/2008
EMI Test Receiver	R&S	ESPI3	101026	11/11/2008
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	12/13/2007
Pre-Amplifier	Miteq	NSP4000-NF	870731	01/28/2008
Bilog Antenna	Sunol	JB1	A110204-2	11/22/2007
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	02/01/2008
PSG Analog Signal Generator	Agilent	E8257C	MY43321570	12/19/2007
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT100	95637	N.C.R
Site NSA	CCS	N/A	N/A	04/06/2008

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The FCC Site Registration number is 93105,90471.  
 4. N.C.R = No Calibration Required.

**7.2.5.3. TEST PROCEDURE** (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.

#### 7.2.5.4. TEST SETUP

##### Below 1 GHz

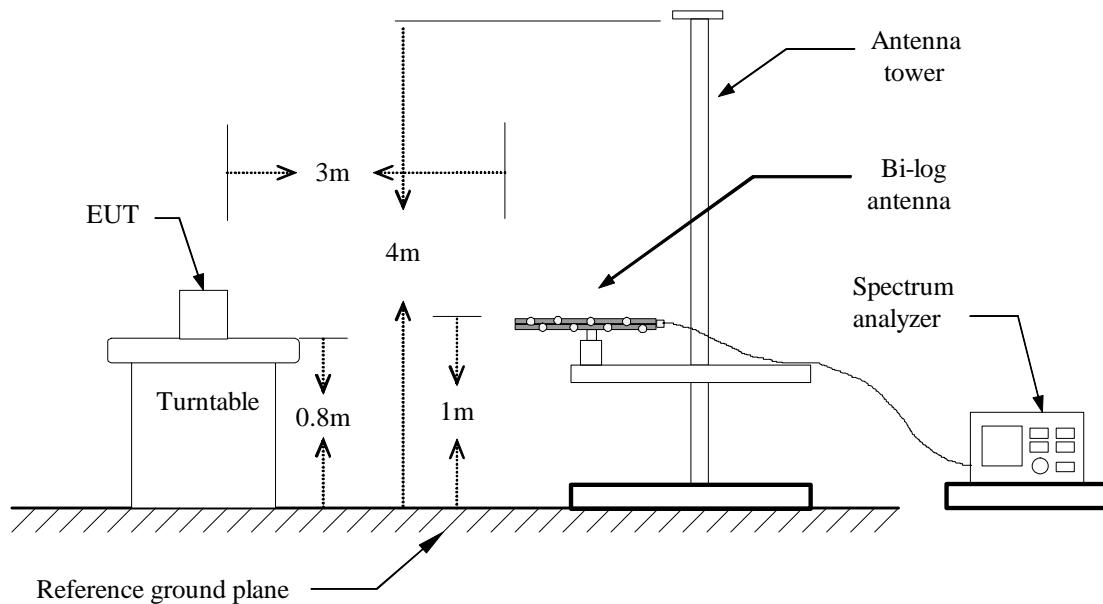

##### Above 1 GHz

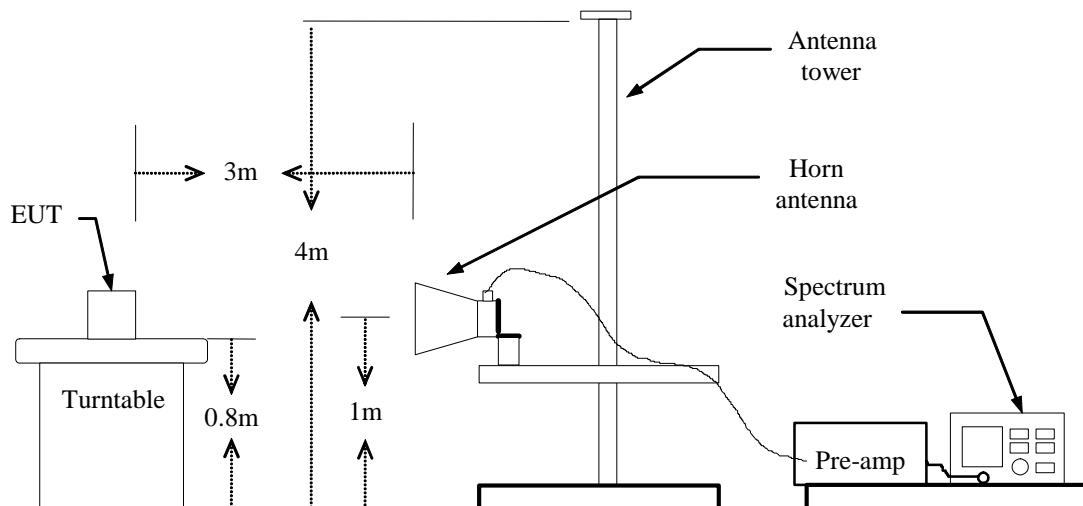

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.2.5.5. Data Sample:****Below 1 GHz**

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Remark) (dBuV)	Correction Factor (dB/m)	Result (Remark) (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (dB)	Remark
xxx	V	12.12	10.21	22.33	37.00	-14.67	Peak

**Above 1 GHz**

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
xxx	V	65.45	63.00	-11.12	54.33	51.88	74.00	54.00	-2.12	AVG

Frequency (MHz)

= Emission frequency in MHz

Ant.Pol. (H/V)

= Antenna polarization

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Correction Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Remark Result (dBuV/m) – Limit (dBuV/m)

Peak

= Peak Reading

QP

= Quasi-peak Reading

AVG

= Average Reading



### 7.2.5.6. TEST RESULTS

#### Below 1 GHz

**Operation Mode:** Normal Link

**Test Date:** March 28, 2007

**Temperature:** 20°C

**Tested by:** ruth

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

<b>Freq. (MHz)</b>	<b>Ant.Pol. H/V</b>	<b>Detector Mode (PK/QP)</b>	<b>Reading (dBuV)</b>	<b>Factor (dB)</b>	<b>Actual FS (dBuV/m)</b>	<b>Limit 3m (dBuV/m)</b>	<b>Safe Margin (dB)</b>
76.5331	V	QP	51.82	-14.41	37.41	40	-2.59
225.872	V	QP	51.73	-10.06	41.67	46	-4.33
401.002	V	QP	45.67	-4.58	41.09	46	-4.91
424.85	V	QP	44.12	-4.02	40.1	46.0	-5.9
737.67	V	QP	37.4	1.52	38.92	46.0	-7.08
922.846	V	QP	39.73	3.93	43.66	46.0	-2.34
<hr/>							
175.5511	H	QP	46.79	-10.48	36.31	43.5	-7.19
325.2505	H	QP	49.49	-7.07	42.42	46	-3.58
401.002	H	QP	49.21	-4.58	44.63	46	-1.37
424.8497	H	QP	46.72	-4.02	42.7	46	-3.3
830.2605	H	QP	40.12	2.89	43.01	46.0	-2.99
919.982	H	QP	38.52	3.9	42.42	46.0	-3.58

**REMARKS:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



## Above 1 GHz

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** April 8, 2007

**Temperature:** 20°C

**Tested by:** ruth

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2483.33	V	45.16	43.59	4.93	50.09	48.52	74.00	54.00	-5.48	average
4828.33	V	34.76	35.92	11.01	45.77	46.93	74.00	54.00	-7.07	average
7225	V	37.58	32.06	16.48	54.06	48.54	74.00	54.00	-5.46	average
N/A										
N/A										
N/A										
<hr/>										
2483.33	H	47.24	45.29	4.93	52.17	50.22	74.00	54.00	-3.78	average
4825.00	H	33.91	32.59	11.01	44.92	43.6	74.00	54.00	-10.40	average
7233.33	H	30.82	27.89	16.41	47.23	44.3	74.00	54.00	-9.70	average
N/A										
N/A										
N/A										

### **REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** April 8, 2007**Temperature:** 20°C**Tested by:** ruth**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2686.67	V	46.12	43.05	5.27	51.39	48.32	74.00	54.00	-5.68	average
4875.00	V	40.2	33.26	11.08	51.28	44.34	74.00	54.00	-9.66	average
7225.00	V	32.09	32.09	16.48	48.57	48.57	74.00	54.00	-5.43	average
N/A										
N/A										
N/A										
<hr/>										
2686.67	H	47.18	44.95	5.27	52.45	50.22	74.00	54.00	-3.78	average
4875.00	H	41.57	33.92	11.08	52.65	45	74.00	54.00	-9.00	average
7200.00	H	37.42	32.26	16.49	53.91	48.75	74.00	54.00	-5.25	average
N/A										
N/A										
N/A										

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** April 8, 2007**Temperature:** 20°C**Tested by:** ruth**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2686.67	V	49.91	42.26	5.27	55.18	47.53	74.00	54.00	-6.47	average
4925.00	V	48.31	41.09	11.08	59.39	52.17	74.00	54.00	-1.83	average
7305.95	V	37.73	32.16	16.48	54.21	48.64	74.00	54.00	-5.36	average
N/A										
N/A										
N/A										
<hr/>										
2686.67	H	45.71	40.26	5.27	50.98	45.53	74.00	54.00	-8.47	average
4925.00	H	48.87	41.26	11.25	60.12	52.51	74.00	54.00	-1.49	average
7304.99	H	39.21	33.06	16.5	55.71	49.56	74.00	54.00	-4.44	average
N/A										
N/A										
N/A										

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** April 8, 2007**Temperature:** 20°C**Tested by:** ruth**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2686.67	V	47.08	43.09	5.27	52.35	48.36	74.00	54.00	-5.64	average
4833.33	V	41.89	38.06	11.02	52.91	49.08	74.00	54.00	-4.92	average
7233.33	V	34.53	29.99	16.49	51.02	46.48	74.00	54.00	-7.52	average
N/A										
N/A										
N/A										
<hr/>										
2686.67	H	49.6	43.06	5.27	54.87	48.33	74.00	54.00	-5.67	average
4808.33	H	42.84	37.59	10.99	53.83	48.58	74.00	54.00	-5.42	average
7200.00	H	33.98	30	16.51	50.49	46.51	74.00	54.00	-7.49	average
N/A										
N/A										
N/A										

**REMARKS:**

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** April 8, 2007**Temperature:** 20°C**Tested by:** ruth**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2613.3333	V	40.49	36.95	5.27	45.76	42.22	74.00	54.00	-11.78	average
4866.67	V	35.78	31.26	11.07	46.85	42.33	74.00	54.00	-11.67	average
7309.26	V	33.55	26.98	16.44	49.99	43.42	74.00	54.00	-10.58	average
N/A										
N/A										
N/A										
<hr/>										
2686.6667	H	46.76	39.26	5.27	52.03	43.58	74.00	54.00	-10.42	average
4883.33	H	38.56	32.06	11.09	49.65	43.15	74.00	54.00	-10.85	average
7308.99	H	33.72	27.09	16.49	50.21	43.58	74.00	54.00	-10.42	average
N/A										
N/A										
N/A										

**REMARKS:**

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** April 8, 2007**Temperature:** 20°C**Tested by:** ruth**Humidity:** 52 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2686.67	V	43	36.92	5.27	48.27	42.19	74.00	54.00	-11.81	average
4933.3333	V	37.13	32.06	11.16	48.29	43.22	74.00	54.00	-10.78	average
7350	V	32.02	26.05	18.1	50.12	44.15	74.00	54.00	-9.85	average
N/A										
N/A										
N/A										
<hr/>										
2613.33	H	44.76	36.09	5.23	49.99	41.32	74.00	54.00	-12.68	average
4925.00	H	37.5	31.98	11.15	48.65	43.13	74.00	54.00	-10.87	average
7400.00	H	32.15	25.99	17.95	50.1	43.94	74.00	54.00	-10.06	average
N/A										
N/A										
N/A										

**REMARKS:**

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.3. 6dB BANDWIDTH MEASUREMENT

### 7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.3.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	08/15/2008

### 7.3.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 20MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



### 7.3.4. TEST RESULTS

No non-compliance noted

**Tested by:Ruth**

#### Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	12290	>500	PASS
Mid	2437	12309		PASS
High	2462	11566		PASS


#### Test Data

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16500	>500	PASS
Mid	2437	16388		PASS
High	2462	16411		PASS

Test Plot (IEEE 802.11b mode)

## 6dB Bandwidth (CH Low)

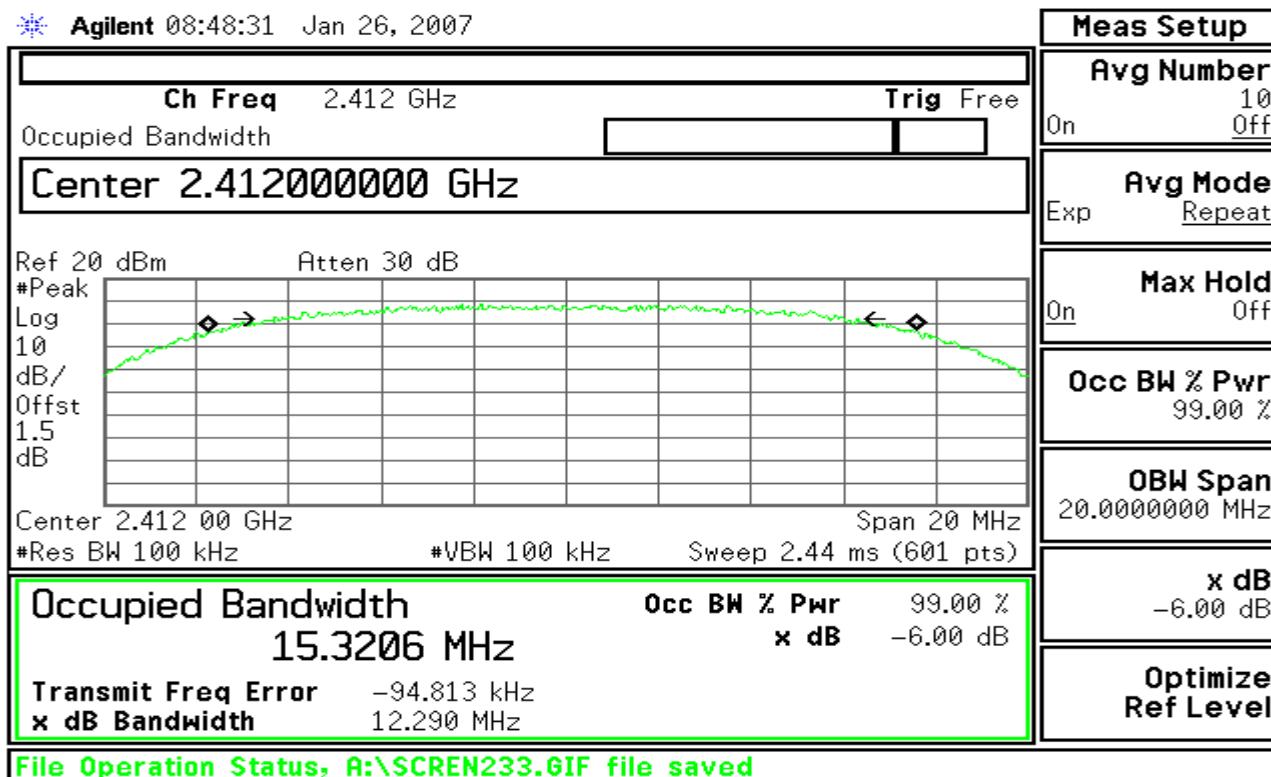


## 6dB Bandwidth (CH Mid)

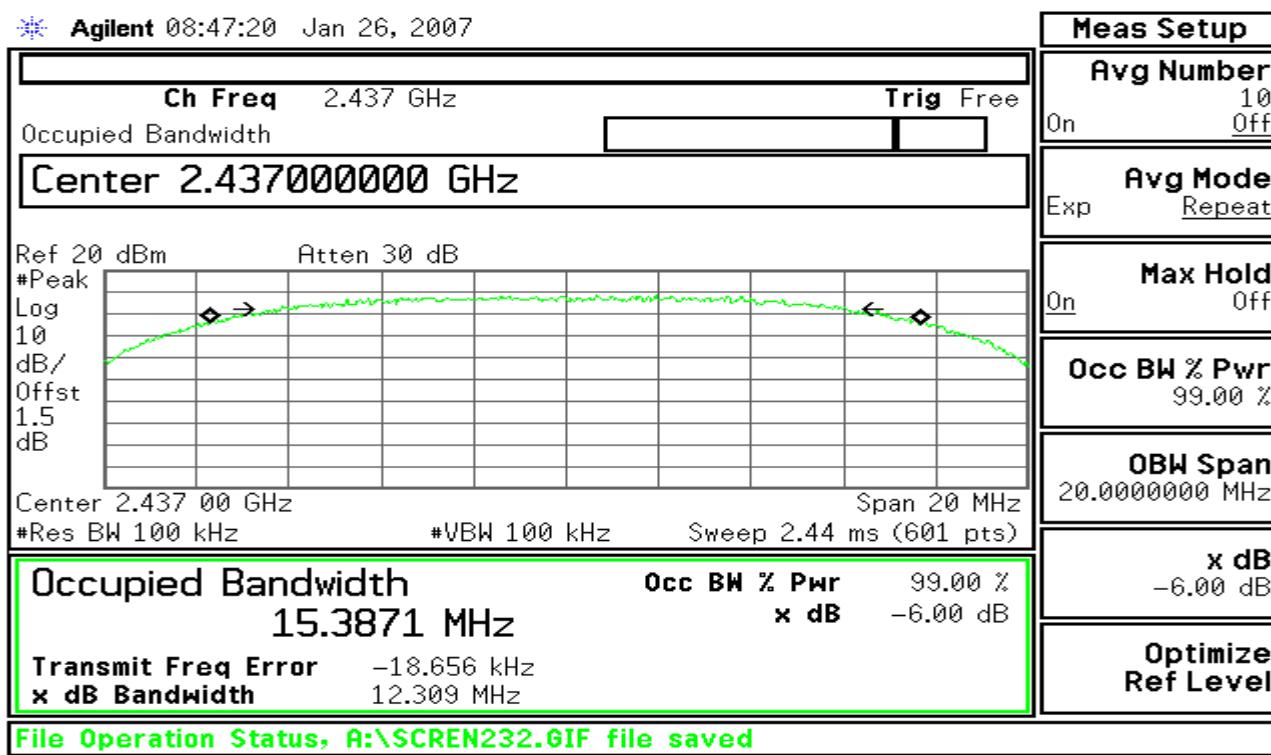



## 6dB Bandwidth (CH High)


Agilent 08:43:02 Jan 26, 2007

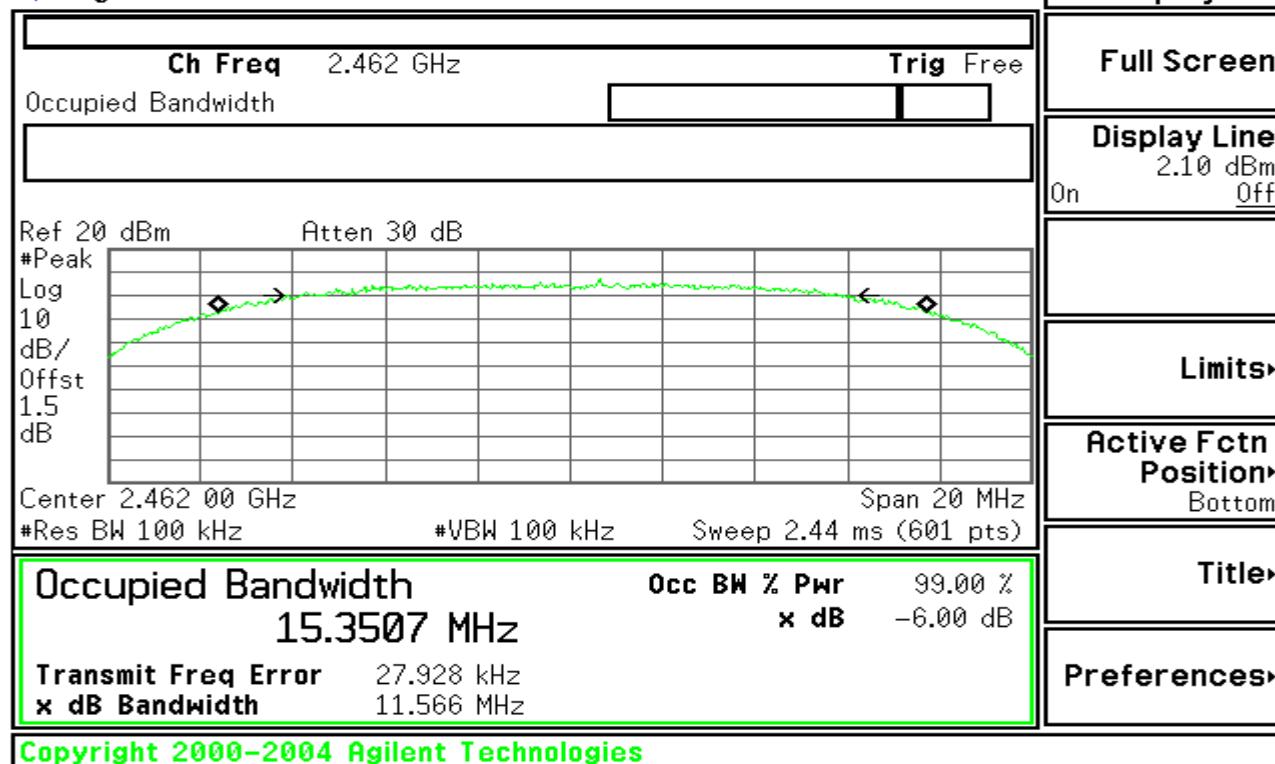

## Test Plot (IEEE 802.11g mode)

## 6dB Bandwidth (CH Low)


Agilent 08:49:18 Jan 26, 2007

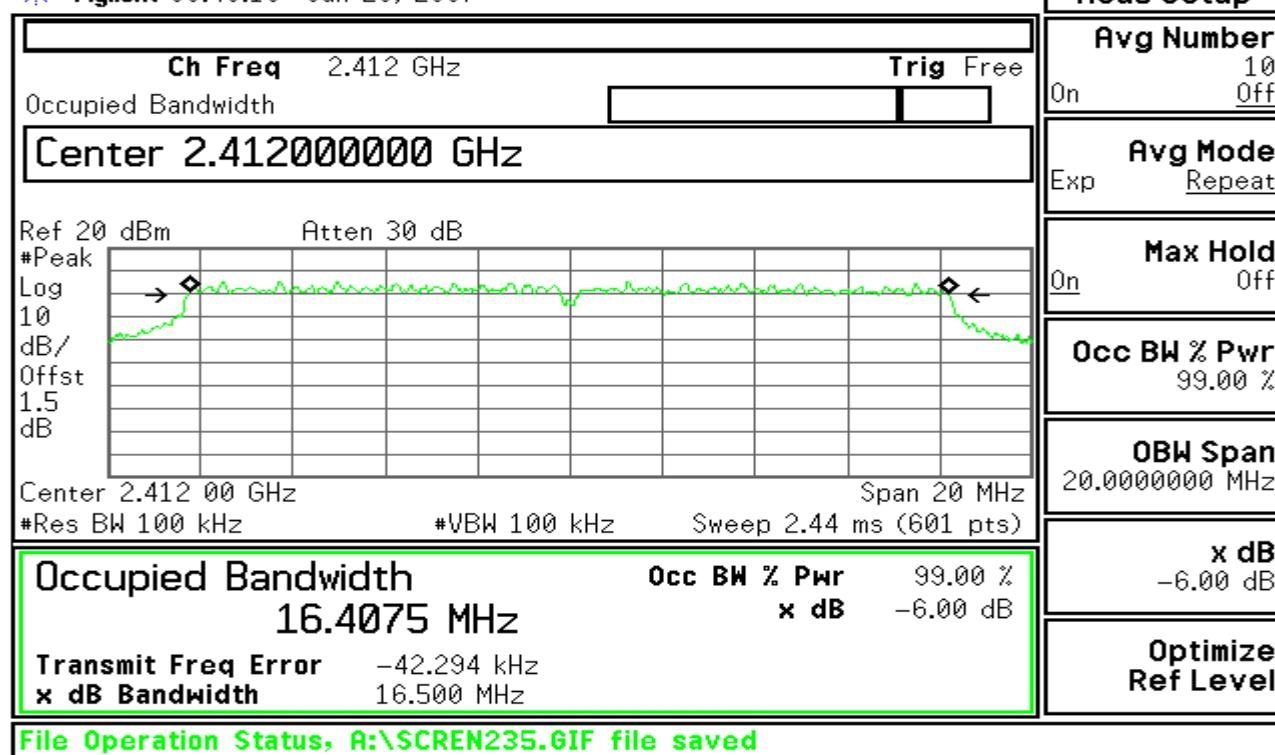




## 6dB Bandwidth (CH Mid)

\* Agilent 08:46:09 Jan 26, 2007

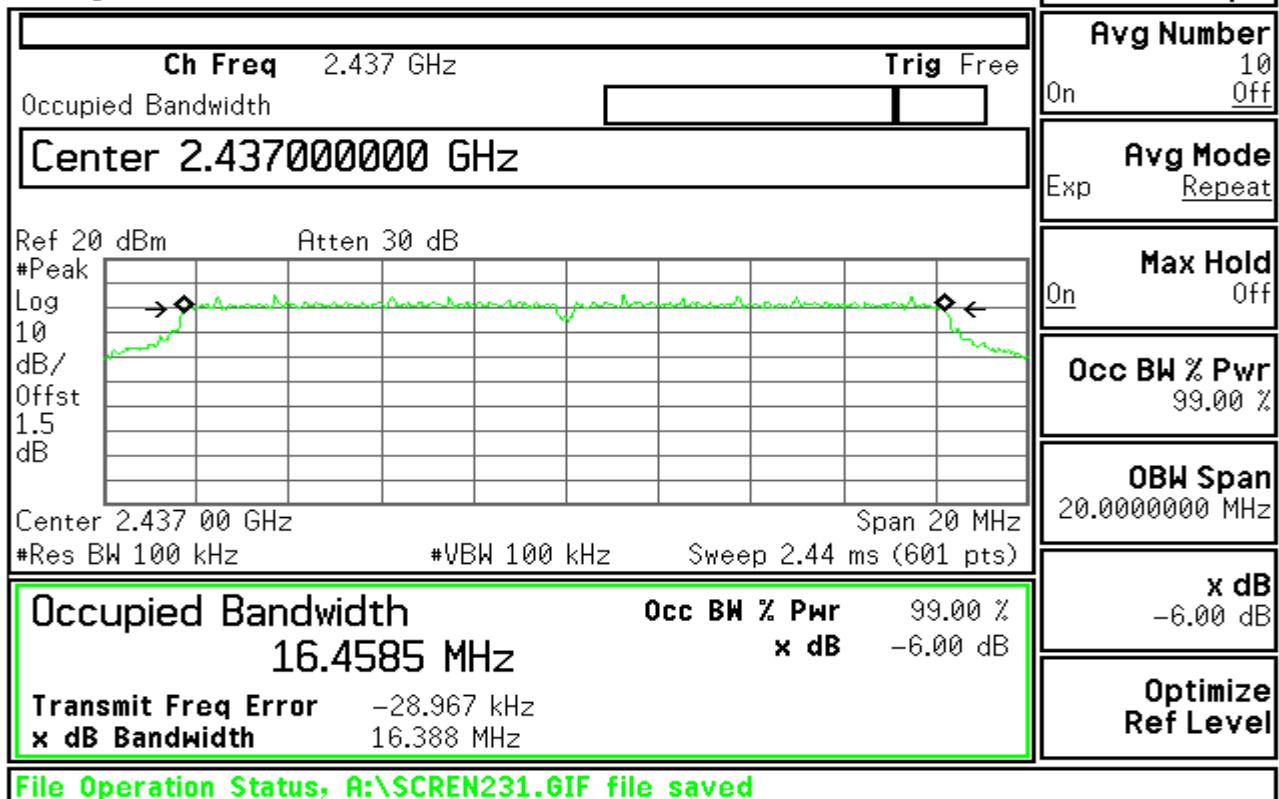

## 6dB Bandwidth (CH High)

\* Agilent 08:44:42 Jan 26, 2007

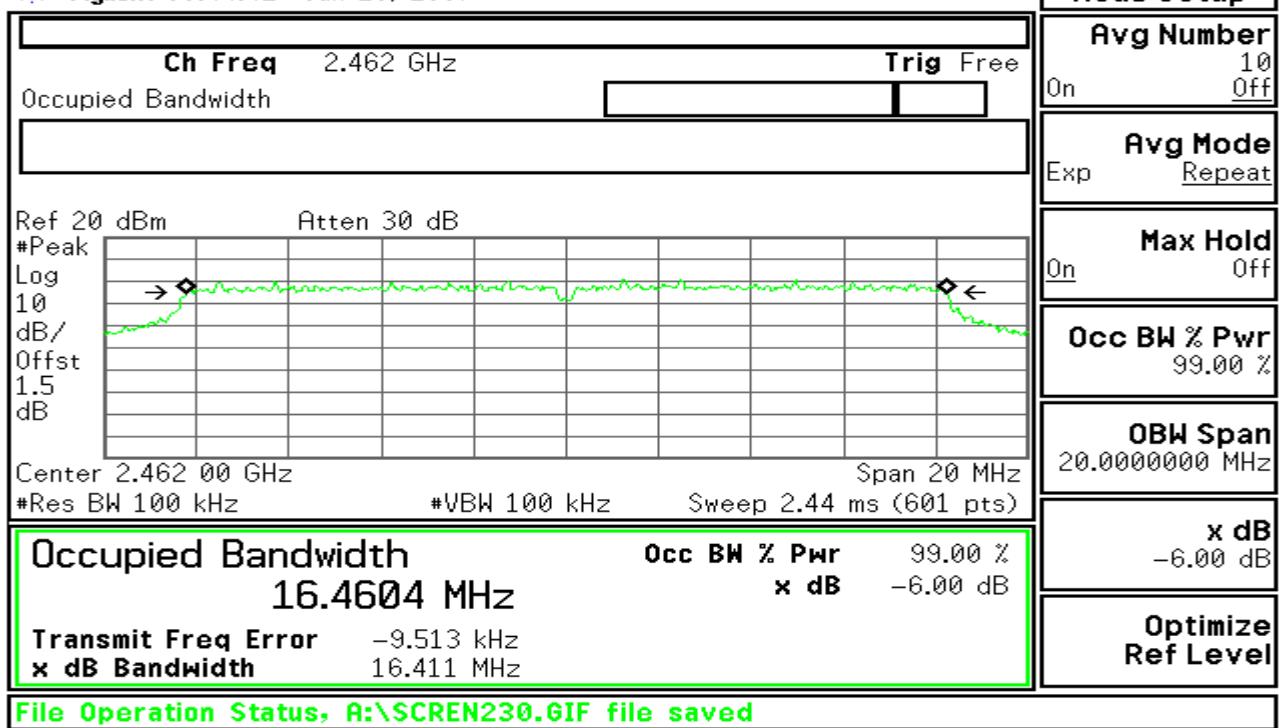



## 7.4. PEAK OUTPUT POWER

### 7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.4.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	08/15/2008

### 7.4.3. TEST PROCEDURES (please refer to measurement standard)

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.



## 7.4.4. TEST RESULTS

No non-compliance noted

**Tested by:Ruth**



### Test Data

#### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	22.40	0.17378	1	PASS
Mid	2437	22.33	0.17100		PASS
High	2462	21.87	0.15382		PASS

#### Test mode: IEEE 802.11g


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	20.73	0.11830	1	PASS
Mid	2437	20.94	0.12417		PASS
High	2462	21.09	0.12853		PASS

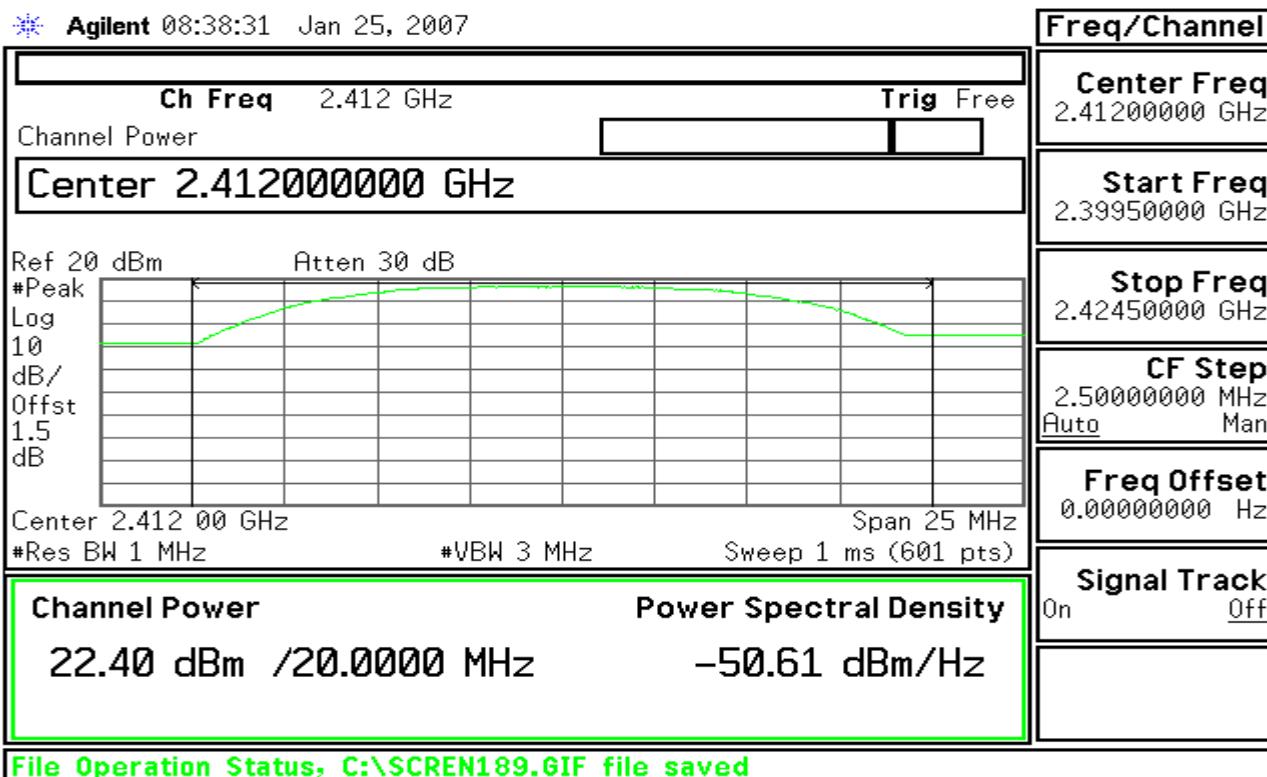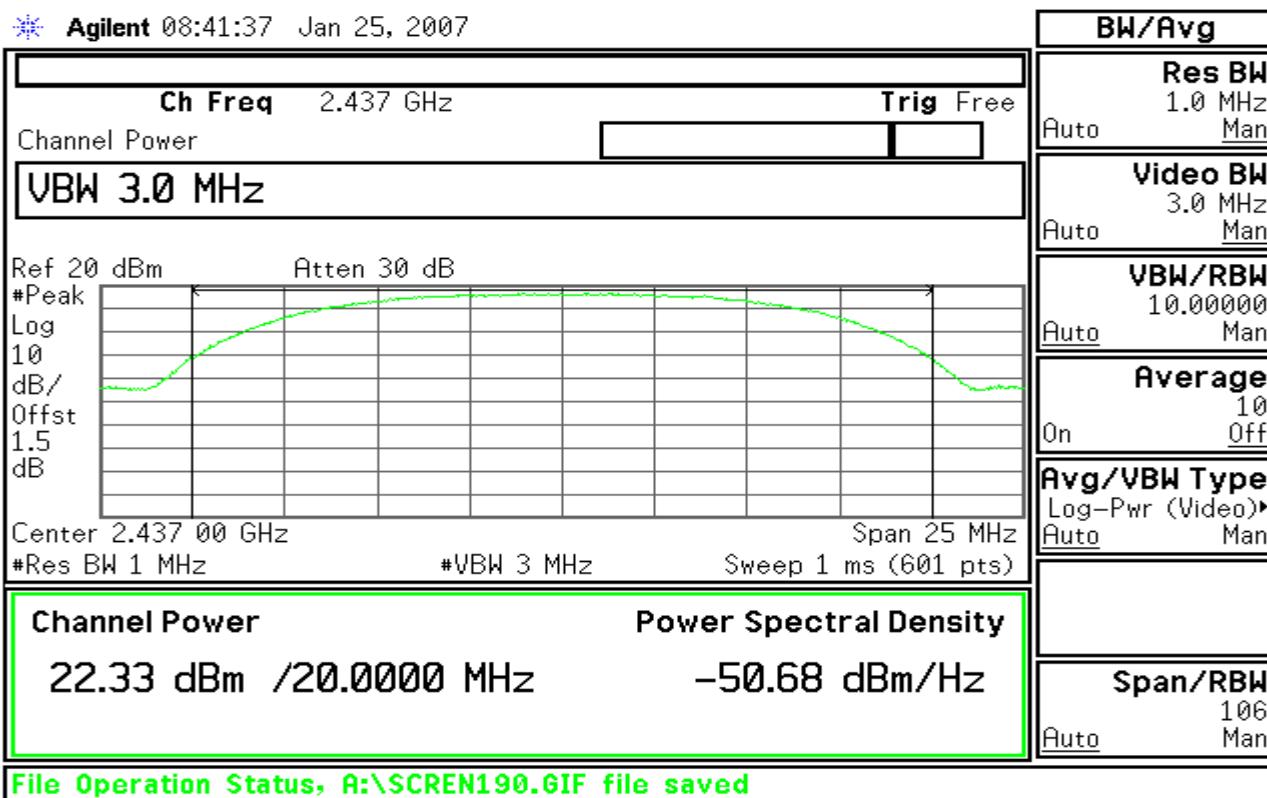**Test Plot (IEEE 802.11b mode)****Peak Power (CH Low)****Peak Power (CH Mid)**



## Peak Power (CH High)


\* Agilent 08:42:36 Jan 25, 2007

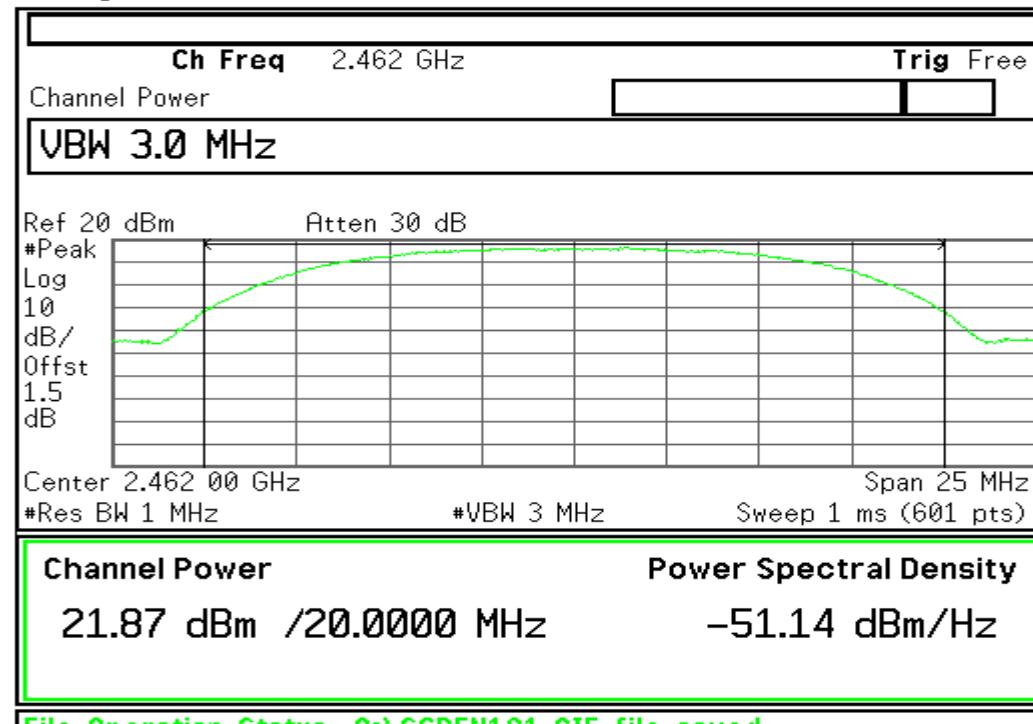

## Test Plot (IEEE 802.11g mode)

## Peak Power (CH Low)


\* Agilent 08:45:57 Jan 25, 2007

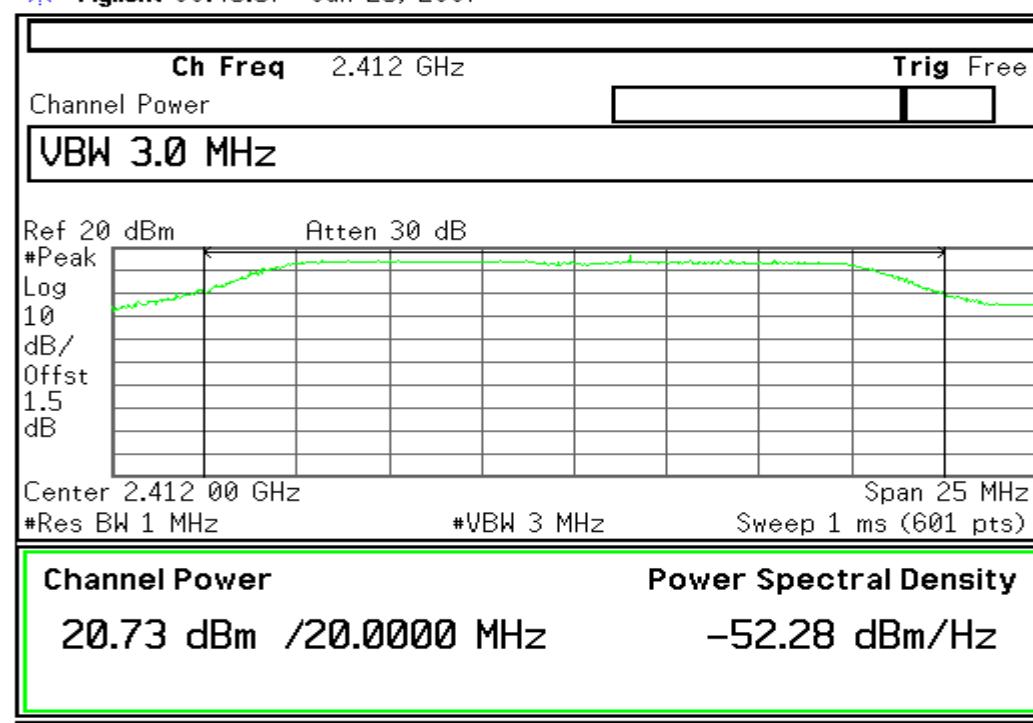



## Peak Power (CH Mid)

Agilent 08:46:51 Jan 25, 2007

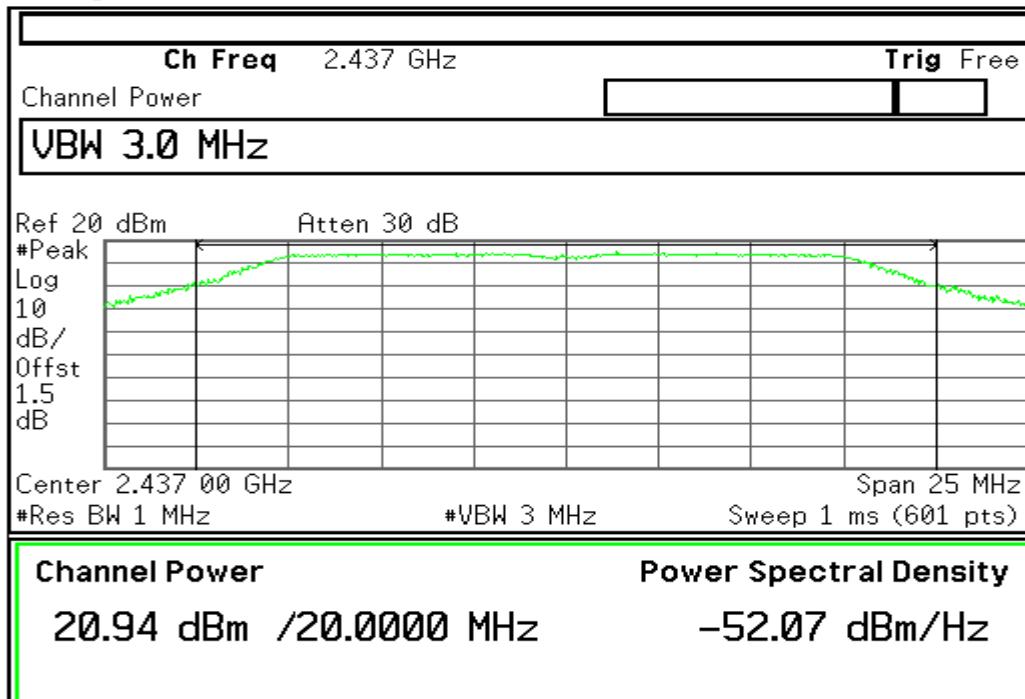


BW/Avg	
Res BW	1.0 MHz
Auto	Man
Video BW	3.0 MHz
Auto	Man
VBW/RBW	10.00000
Auto	Man
Average	10
On	Off
Avg/VBW Type	Log-Pwr (Video)
Auto	Man
Span/RBW	106
Auto	Man

File Operation Status, A:\SCREN194.GIF file saved

## Peak Power (CH High)

Agilent 08:47:30 Jan 25, 2007

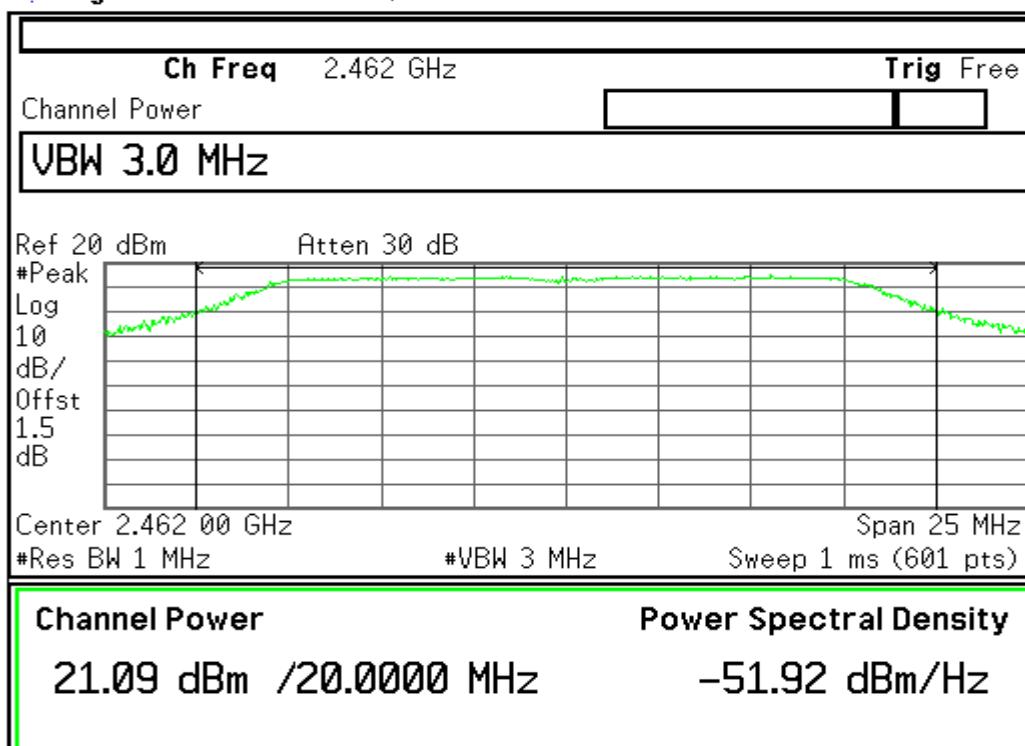

BW/Avg	
Res BW	1.0 MHz
Auto	Man
Video BW	3.0 MHz
Auto	Man
VBW/RBW	10.00000
Auto	Man
Average	10
On	Off
Avg/VBW Type	Log-Pwr (Video)
Auto	Man
Span/RBW	106
Auto	Man

File Operation Status, A:\SCREN195.GIF file saved



## 7.5. BAND EDGES MEASUREMENT:

### 7.5.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).


### 7.5.2. TEST INSTRUMENTS

3M Semi Anechoic Chamber (977)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	08/15/2008
Spectrum Analyzer	Agilent	E4446A	US44300398	07/25/2008
EMI Test Receiver	R&S	ESPI3	101026	11/11/2008
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	12/13/2007
Pre-Amplifier	Miteq	NSP4000-NF	870731	01/28/2008
Bilog Antenna	Sunol	JB1	A110204-2	11/22/2007
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	02/01/2008
PSG Analog Signal Generator	Agilent	E8257C	MY43321570	12/19/2007
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT100	95637	N.C.R
Site NSA	CCS	N/A	N/A	04/06/2008

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The FCC Site Registration number is 93105,90471.  
4. N.C.R = No Calibration Required.

**7.5.3. TEST PROCEDURES** (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

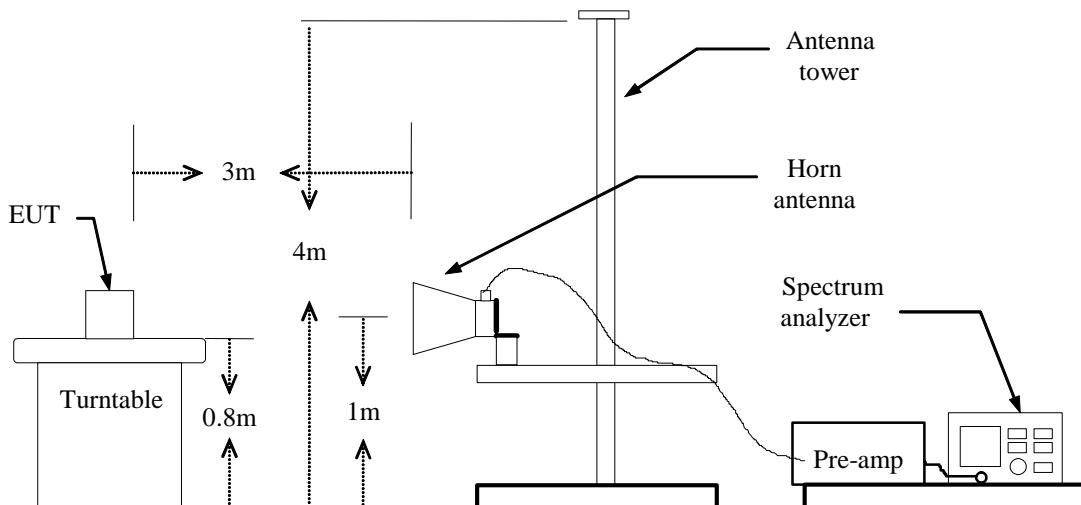**7.5.4. TEST SETUP**



## Test Data

## Test Plot (IEEE 802.11b mode)

**Tested by:Ruth**


### 7.5.5. TEST RESULTS

#### Test Plot (IEEE 802.11b mode)

##### Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

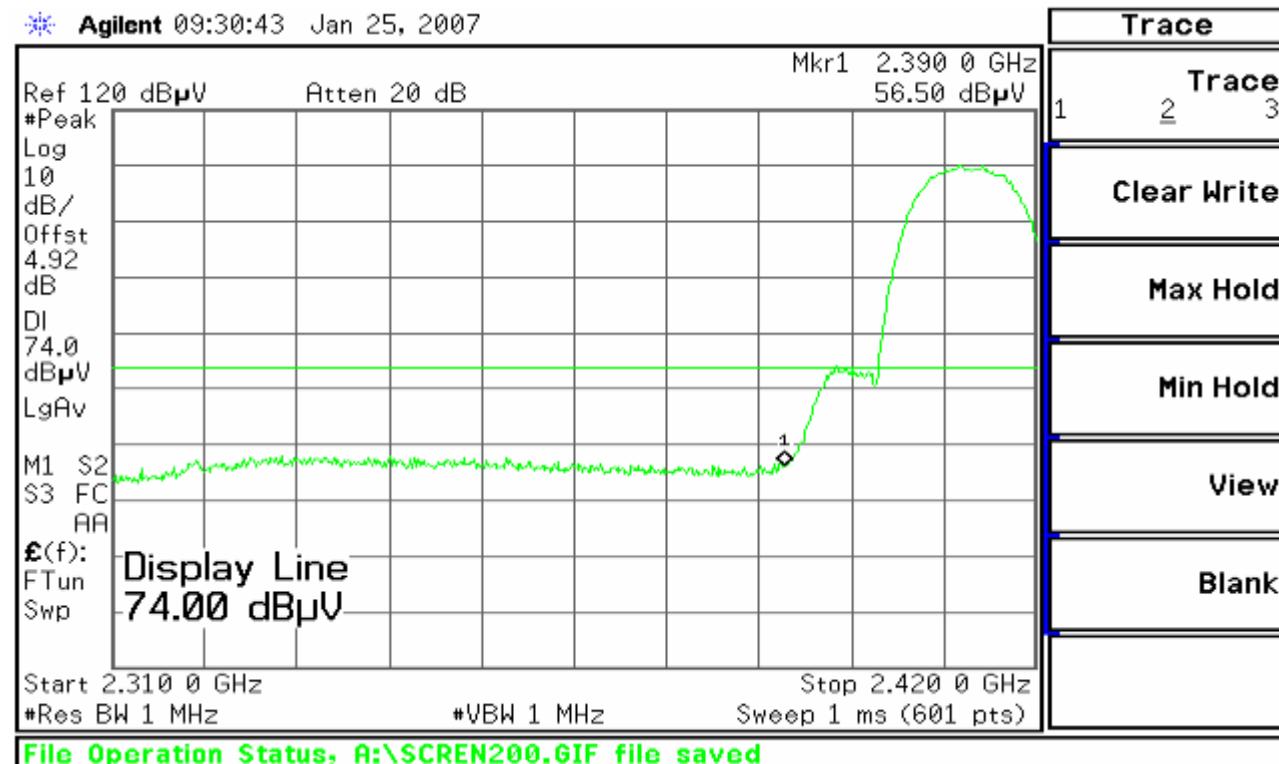


Detector mode: Average

Polarity: Vertical

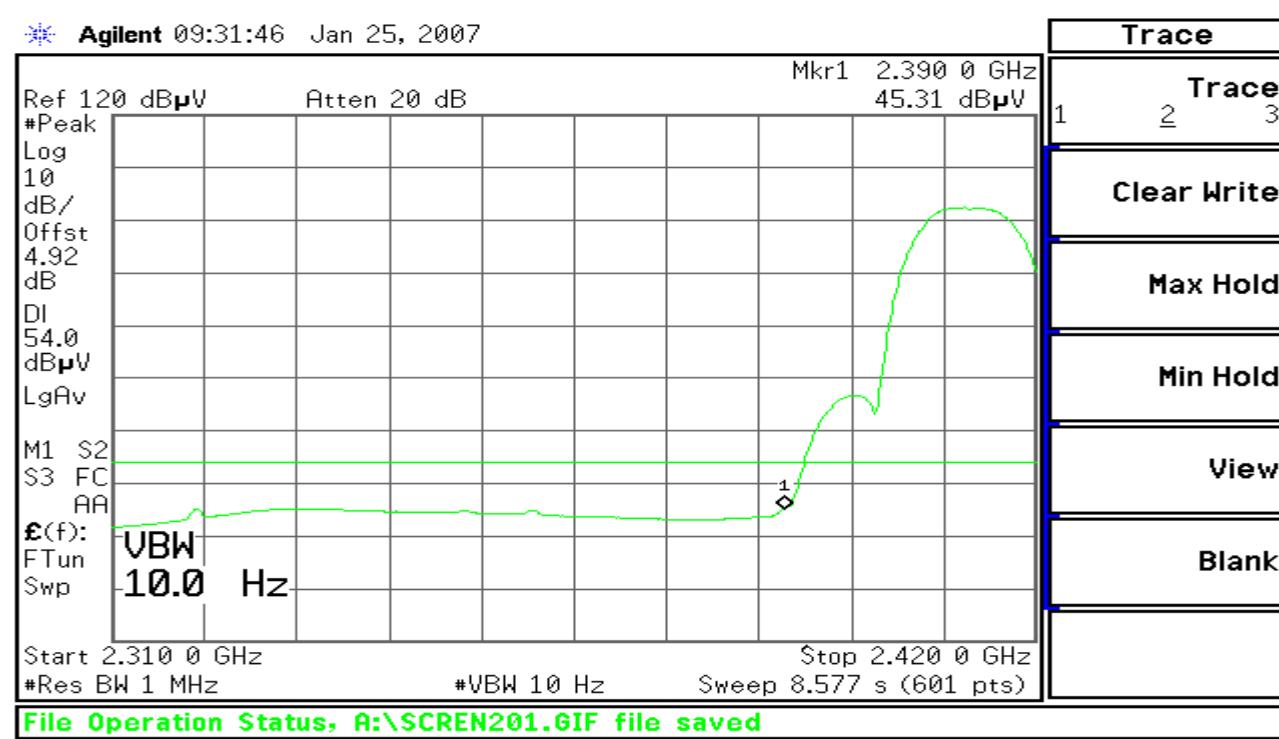


**Detector mode: Peak****Polarity: Horizontal**

\* Agilent 09:23:11 Jan 25, 2007

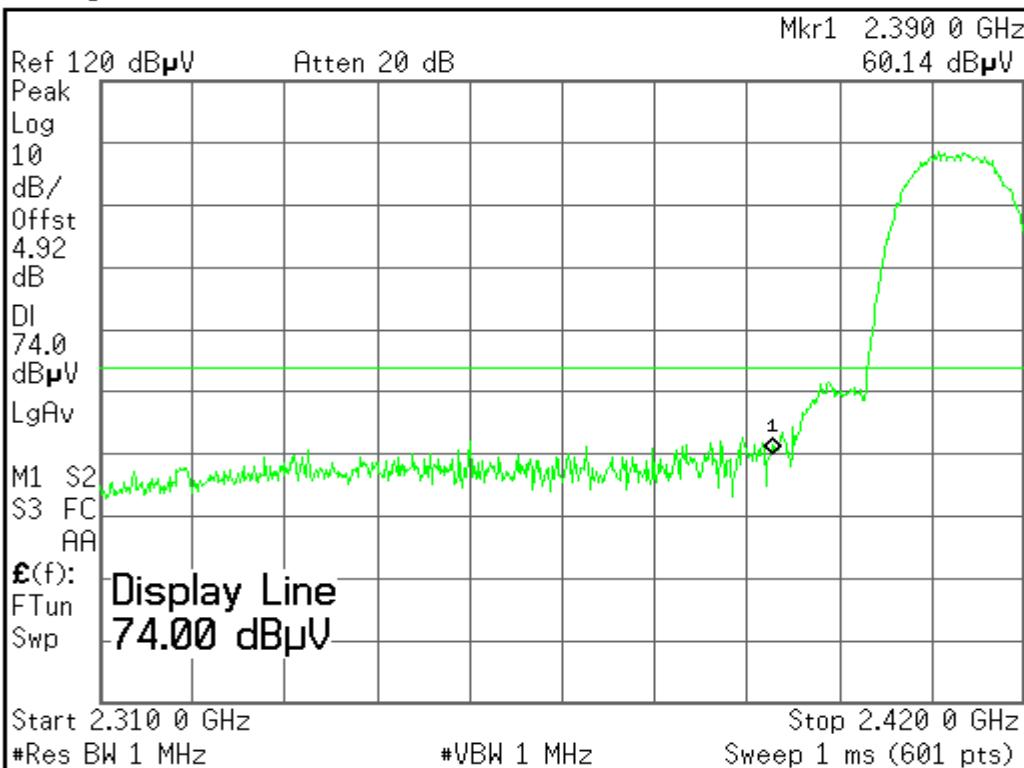**Copyright 2000-2004 Agilent Technologies****Detector mode: Average****Polarity: Horizontal**

\* Agilent 09:26:13 Jan 25, 2007

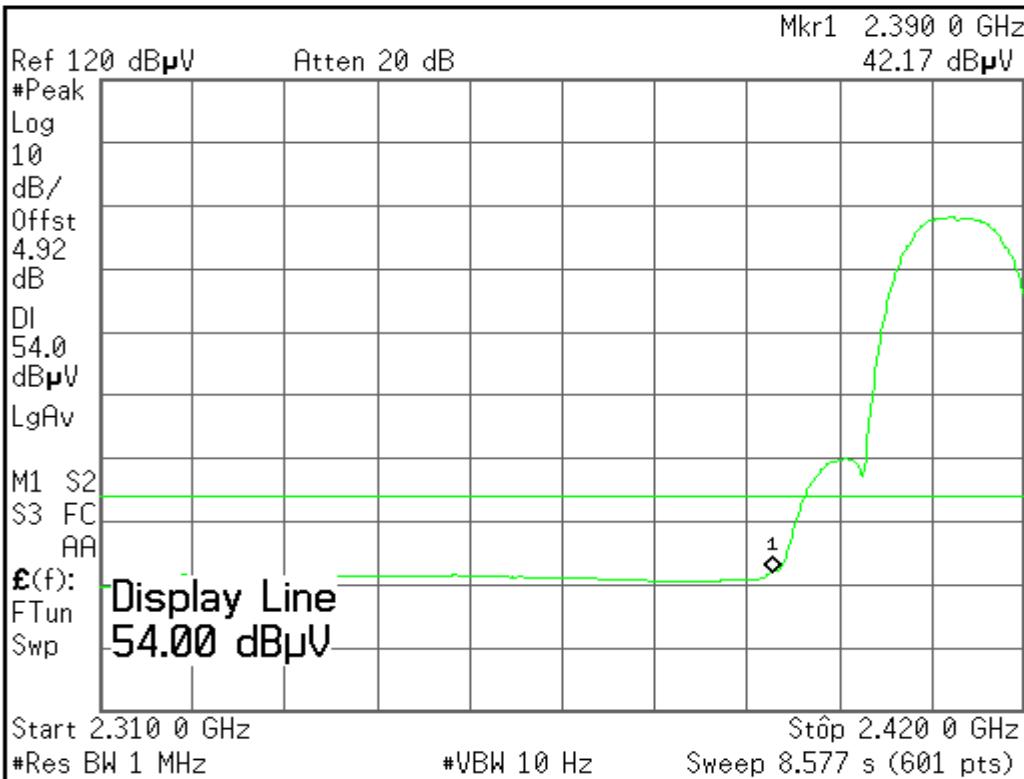**File Operation Status, A:\SCREEN199.GIF file saved**




## Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

\* Agilent 09:40:17 Jan 25, 2007

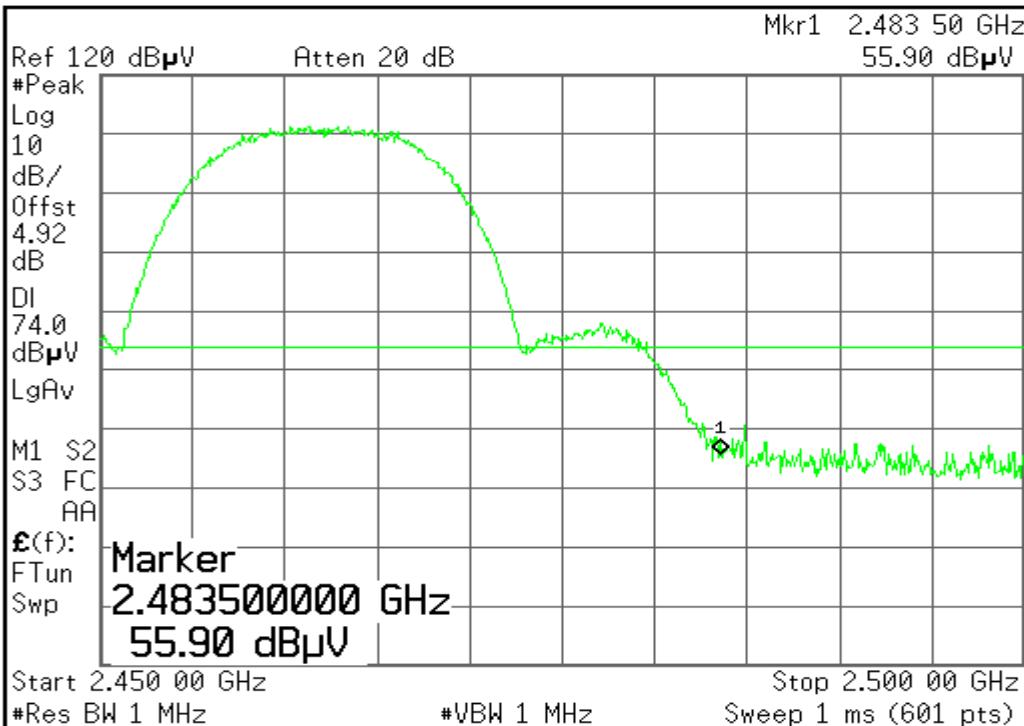


File Operation Status, A:\SCREN202.GIF file saved

Detector mode: Average

Polarity: Vertical

\* Agilent 09:41:05 Jan 25, 2007

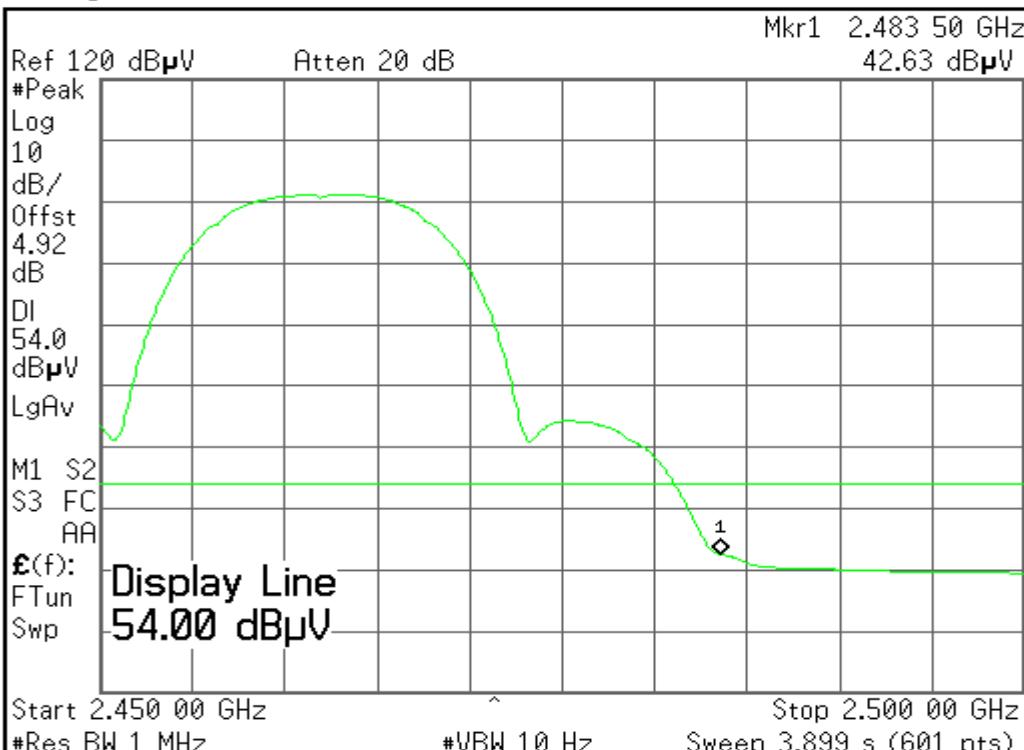


File Operation Status, A:\SCREN203.GIF file saved



Detector mode: Peak

Polarity: Horizontal

Agilent 09:48:06 Jan 25, 2007

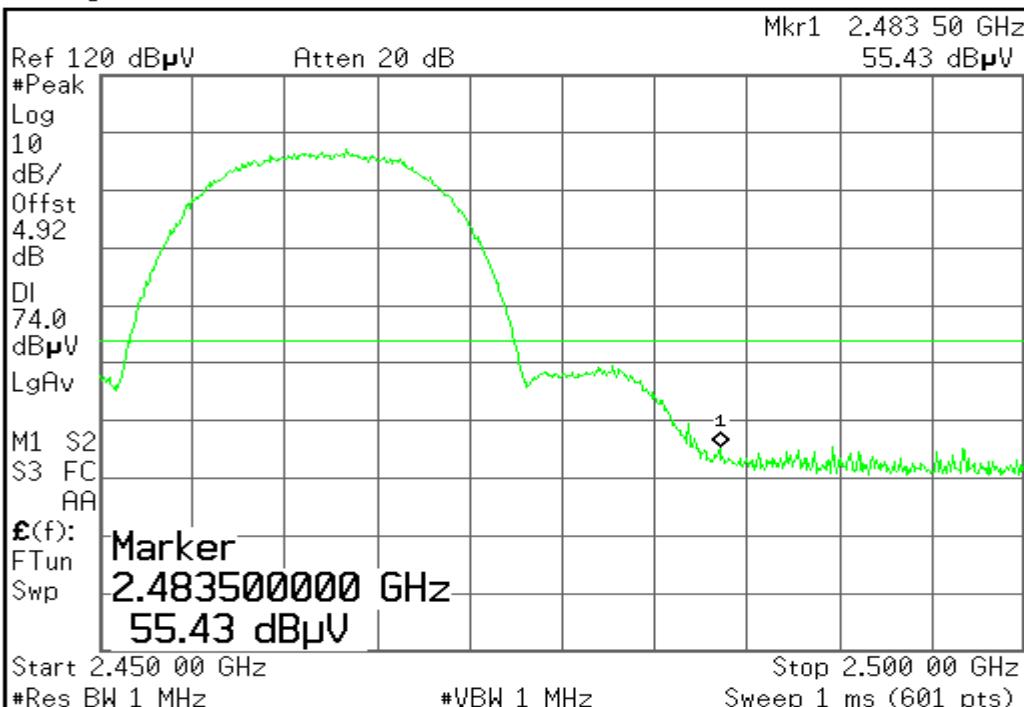


File Operation Status, A:\SCREEN204.GIF file saved

Detector mode: Average

Polarity: Horizontal

Agilent 09:48:58 Jan 25, 2007

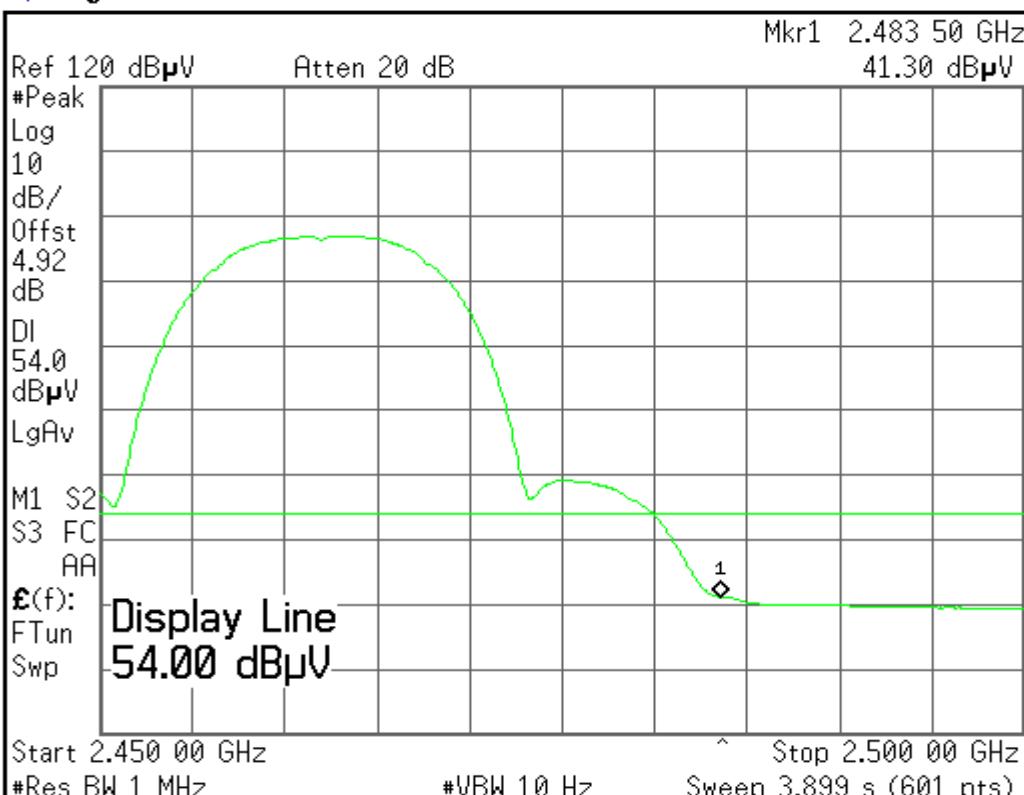

File Operation Status, A:\SCREEN205.GIF file saved



## Test Data

## Test Plot (IEEE 802.11g mode)

**Tested by:Ruth**




## Test Plot (IEEE 802.11g mode)

### Band Edges (CH Low)

Detector mode: Peak


Polarity: Vertical

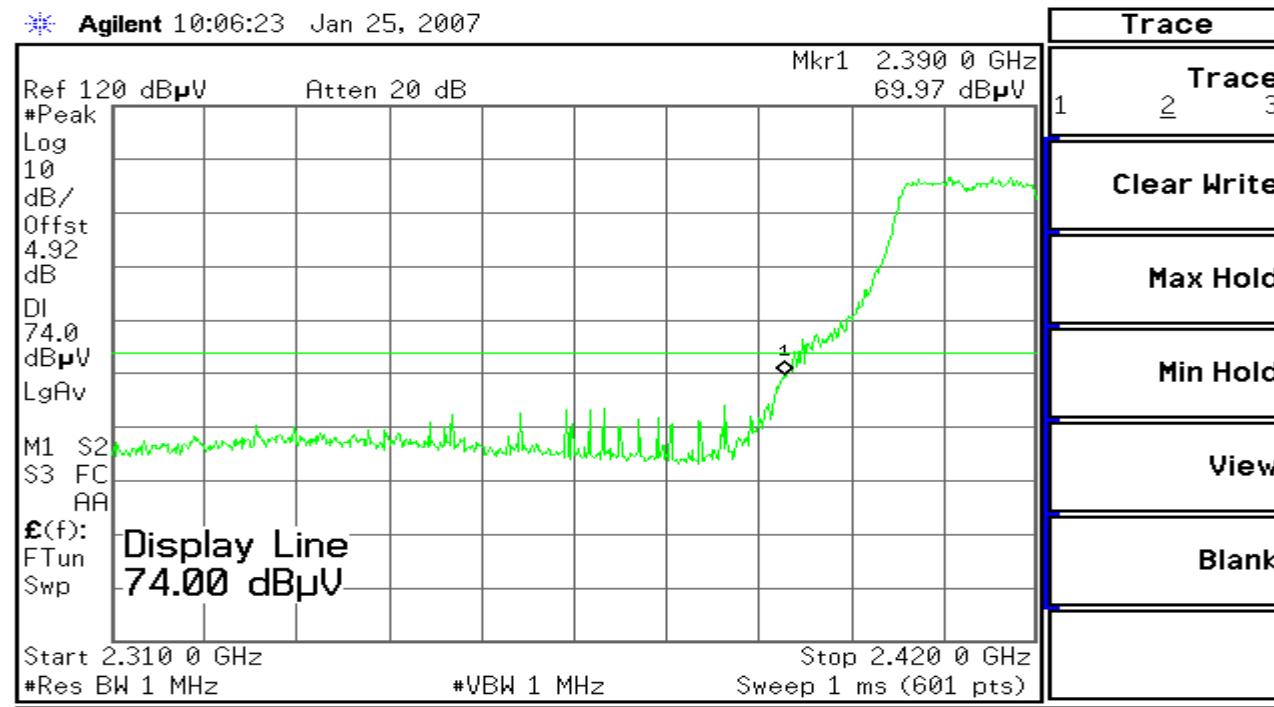

File Operation Status, A:\SCREN209.GIF file saved

Detector mode: Average

Polarity: Vertical

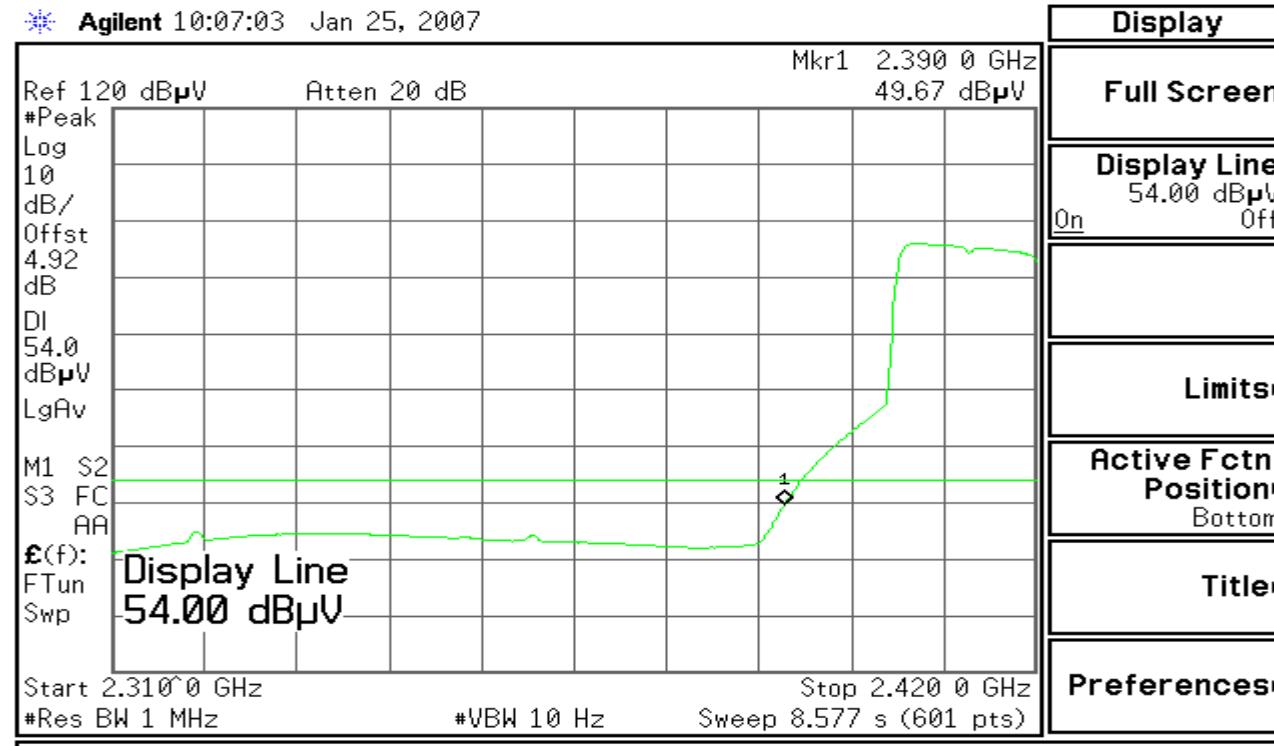


File Operation Status, A:\SCREN210.GIF file saved



Detector mode: Peak

Polarity: Horizontal

Agilent 09:59:08 Jan 25, 2007

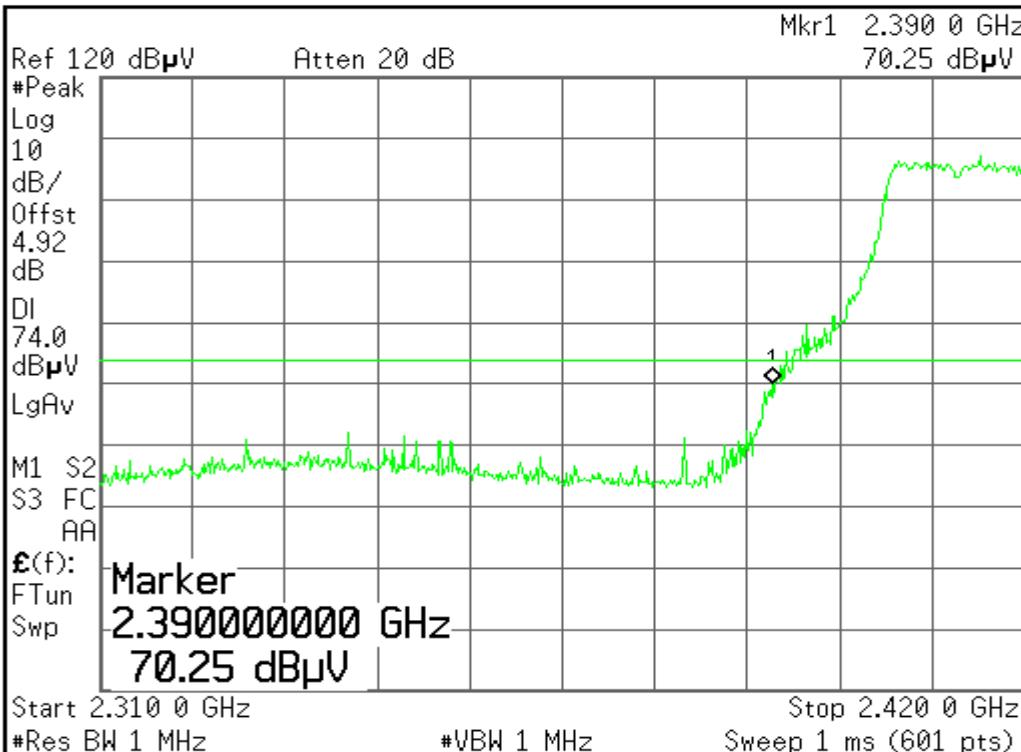

Trace

Trace  
1 2 3

Clear Write

Max Hold

Min Hold

View


Blank

File Operation Status, A:\SCREN206.GIF file saved

Detector mode: Average

Polarity: Horizontal

Agilent 09:59:43 Jan 25, 2007

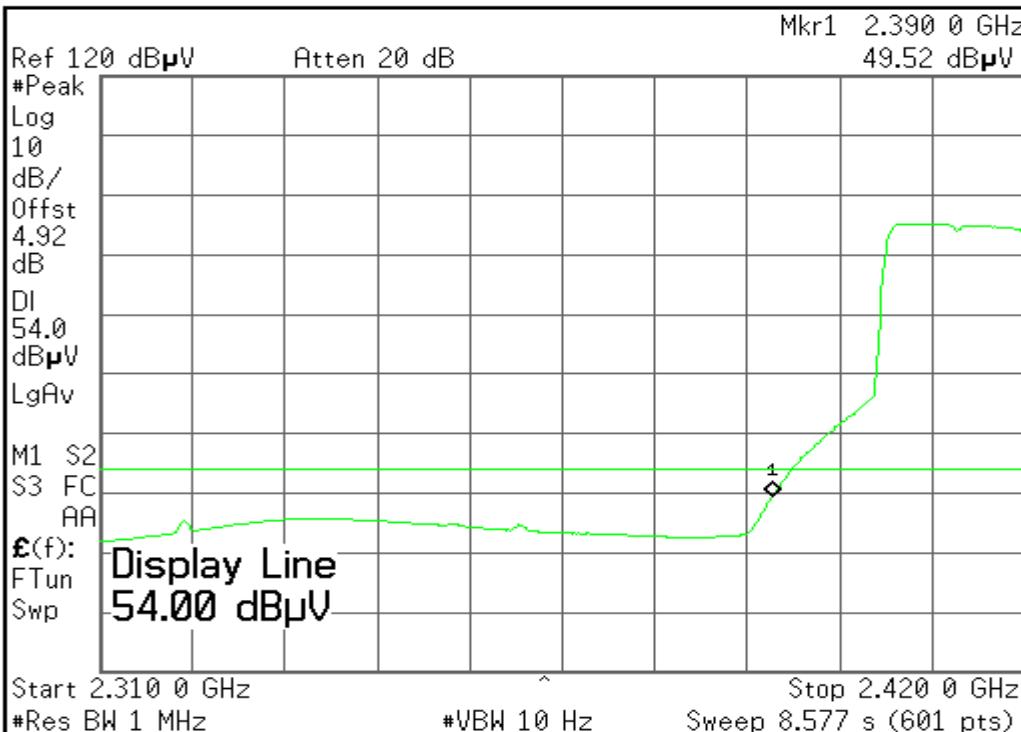

Display

Full Screen

Display Line  
54.00 dB $\mu$ V  
On Off

Limits

Active Fctn  
Position  
Bottom

Title

Preferences


File Operation Status, A:\SCREN207.GIF file saved



## Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

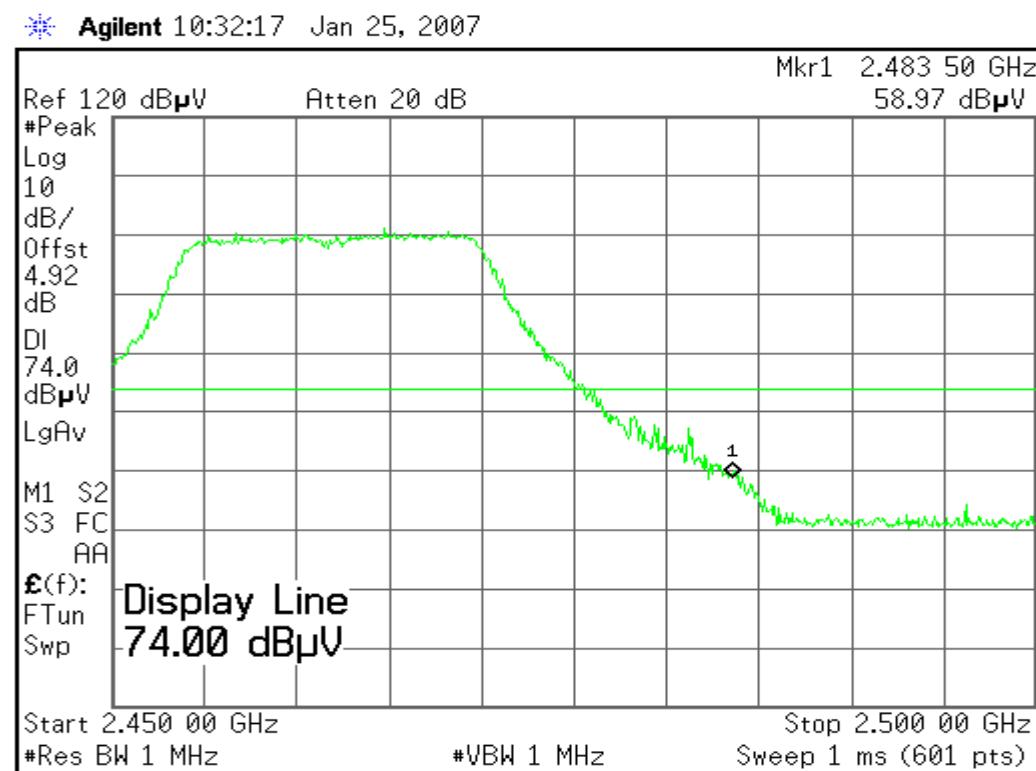


Detector mode: Average

Polarity: Vertical

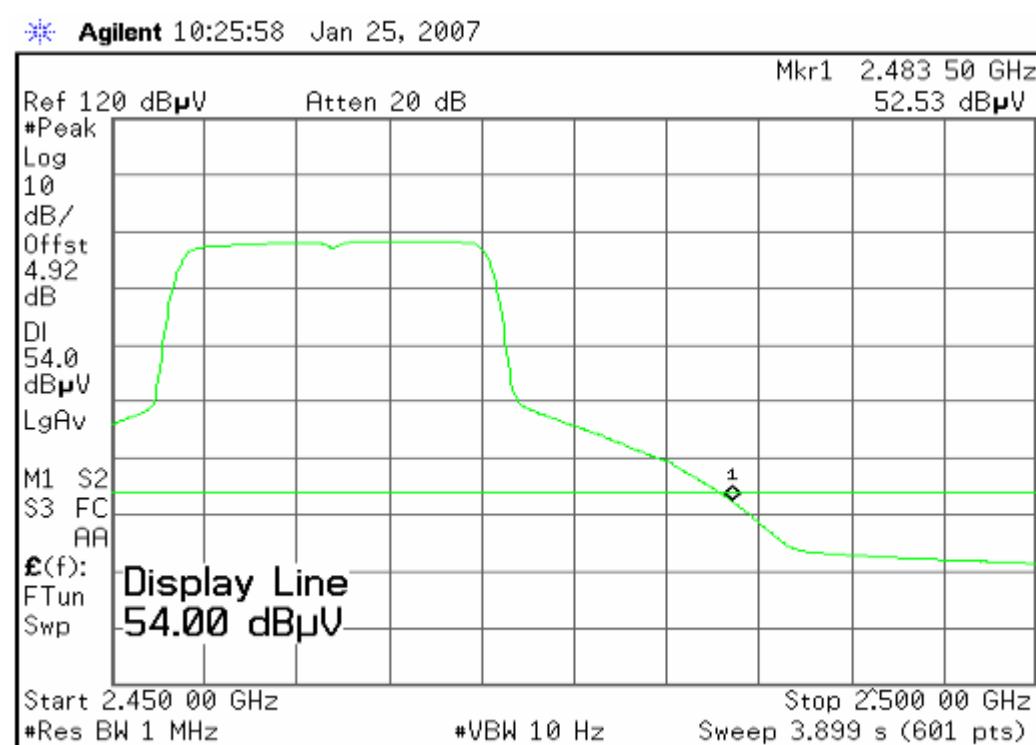

**Detector mode: Peak****Polarity: Horizontal**


Agilent 10:32:17 Jan 25, 2007

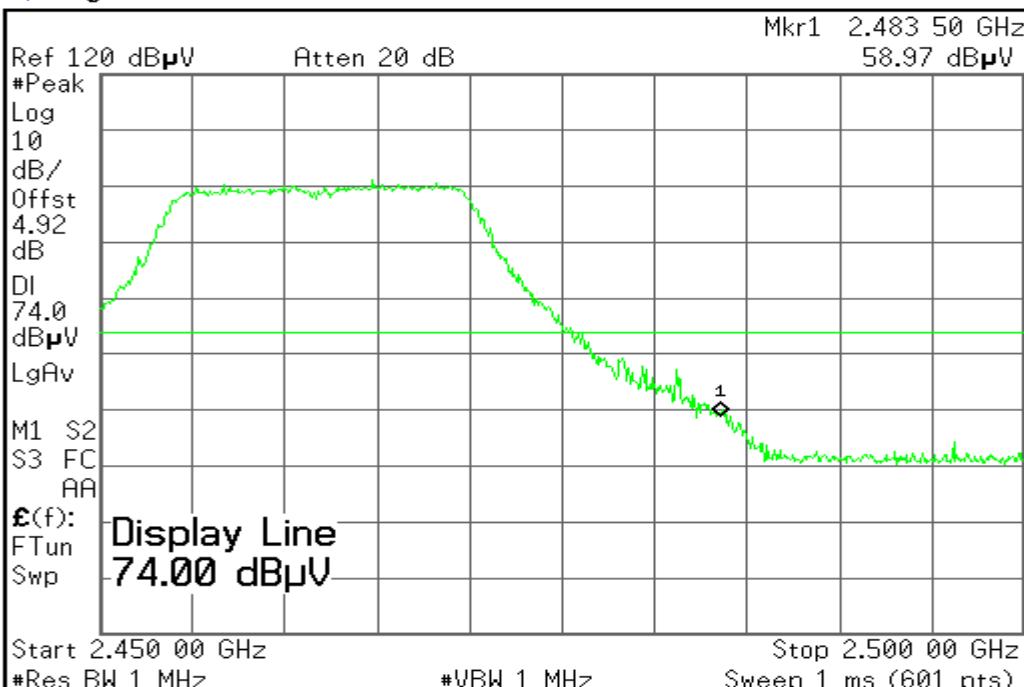

- Trace
- Trace 1 2 3
- Clear Write
- Max Hold
- Min Hold
- View
- Blank

**File Operation Status, A:\SCREN218.GIF file saved****Detector mode: Average****Polarity: Horizontal**

Agilent 10:32:48 Jan 25, 2007

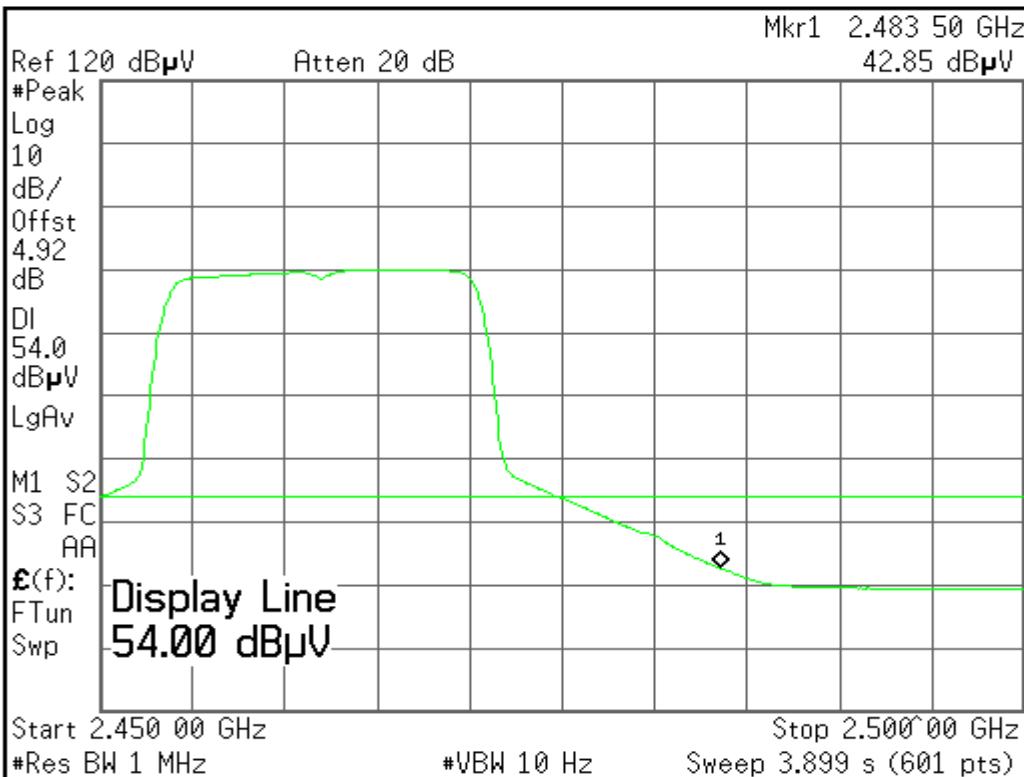

- Display
- Full Screen
- Display Line On Off
- Limits
- Active Fctn Position Bottom
- Title
- Preferences

**File Operation Status, A:\SCREN219.GIF file saved**



## 7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 7.6.1. LIMITS

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


### 7.6.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	08/15/2008

### 7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### 7.6.4. TEST SETUP

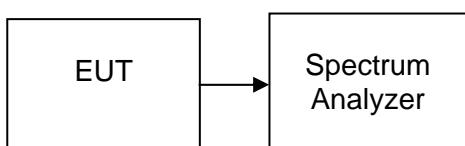



r

**7.6.5. TEST RESULTS***No non-compliance noted***Tested by:Ruth****Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-11.21	8.00	PASS
Mid	2437	-10.39		PASS
High	2462	-14.91		PASS

**Test Data****Test mode: IEEE 802.11g**


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-2.87	8.00	PASS
Mid	2437	-2.53		PASS
High	2462	-2.48		PASS

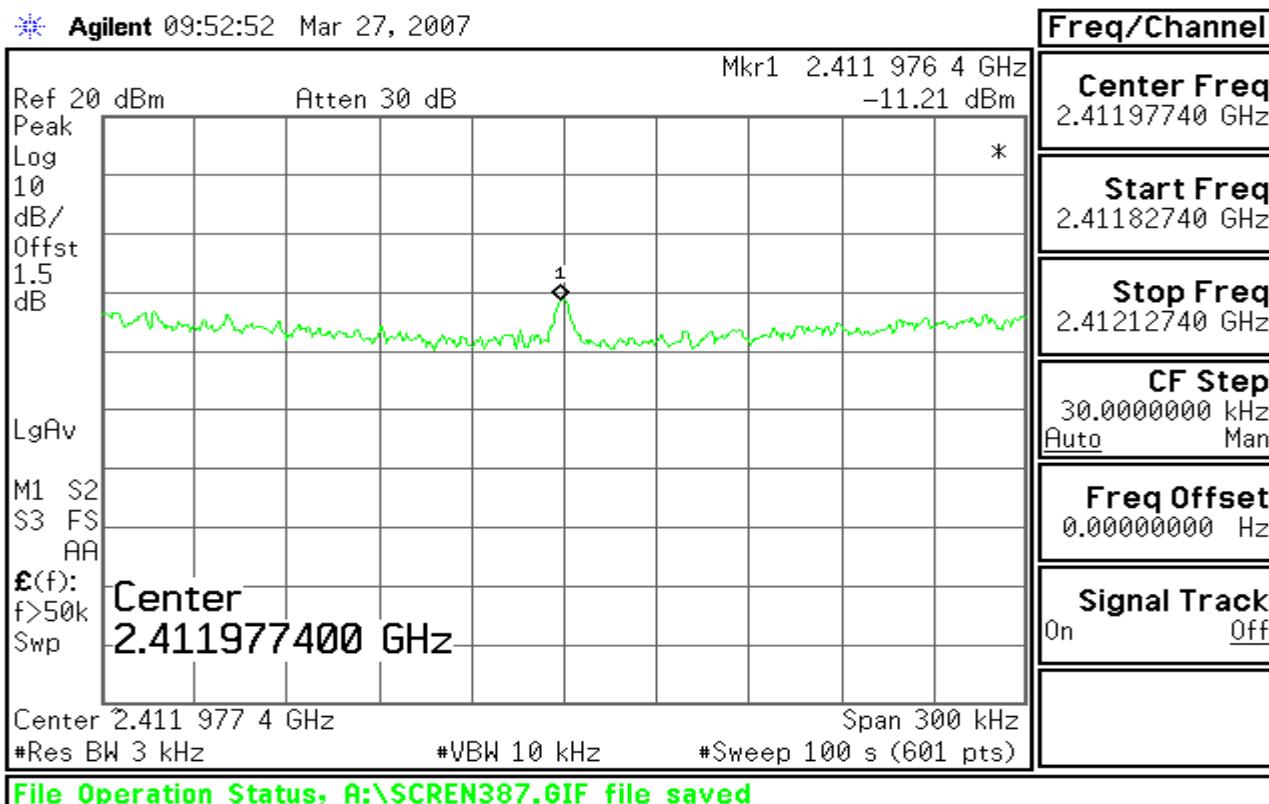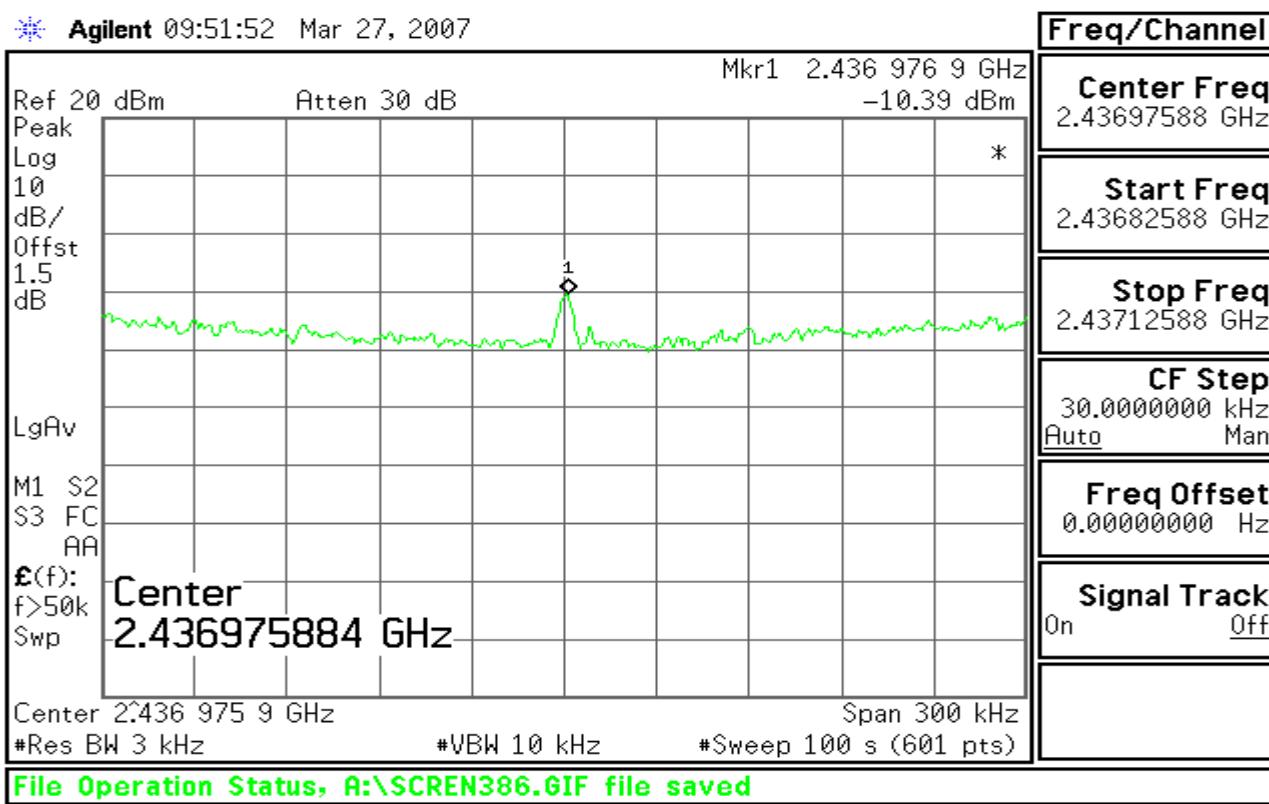**Test Plot (IEEE 802.11b mode)****PPSD (CH Low)****PPSD (CH Mid)**



## PPSD (CH High)

Agilent 09:50:09 Mar 27, 2007

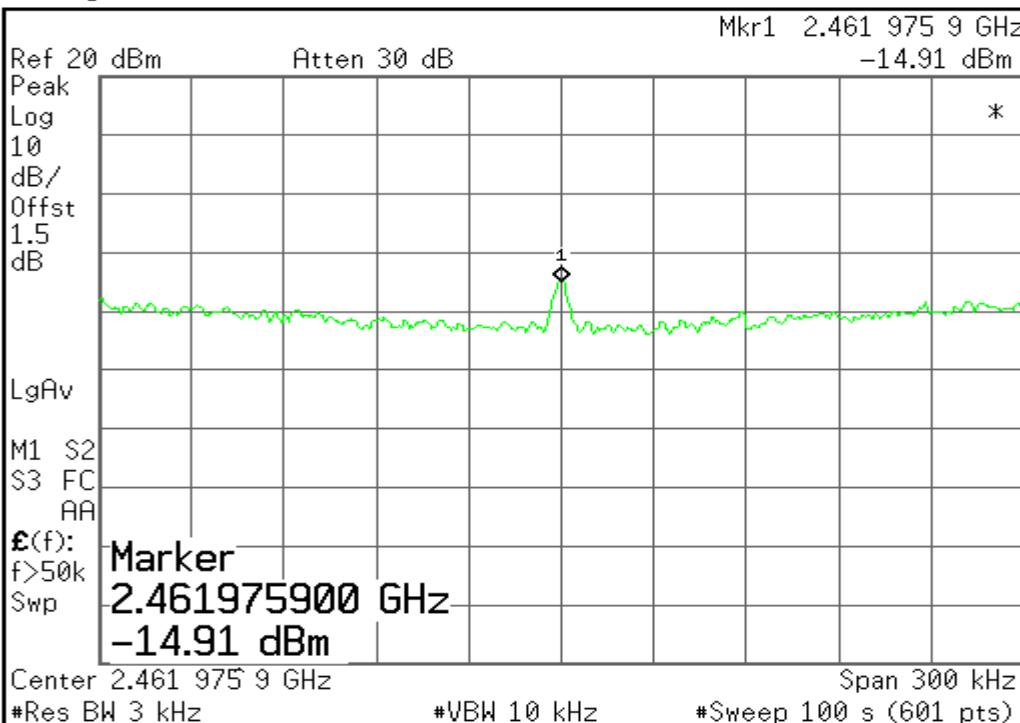

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More  
1 of 2

File Operation Status, A:\SCREEN385.GIF file saved

## Test Plot (IEEE 802.11g mode)

## PPSD (CH Low)

Agilent 09:33:55 Mar 27, 2007

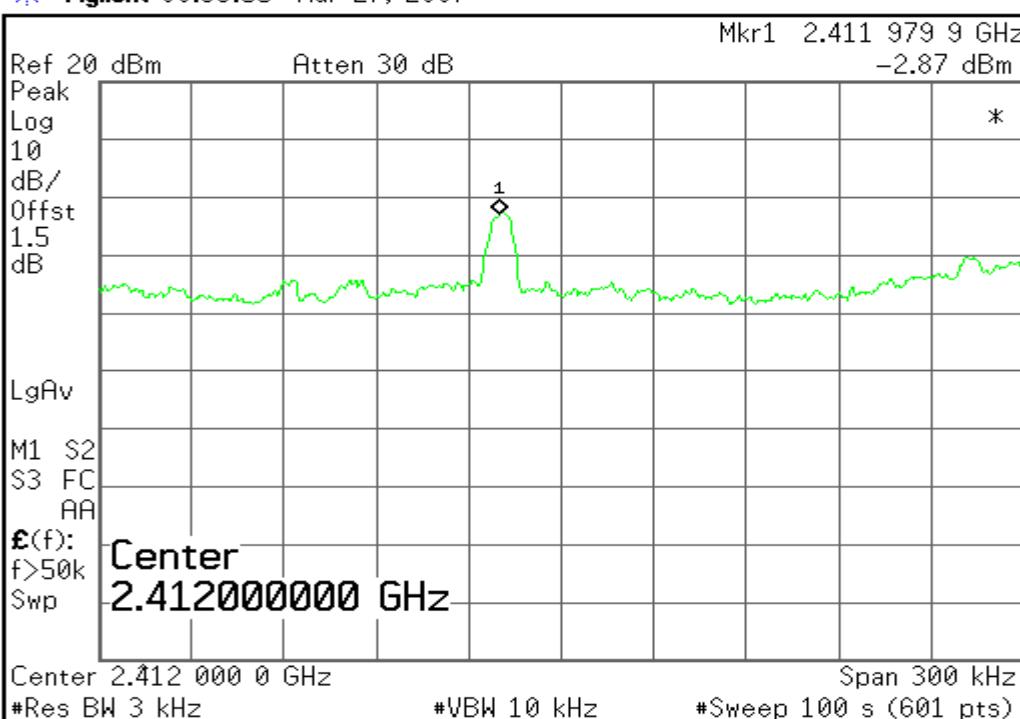


Freq/Channel

Center Freq  
2.412000000 GHzStart Freq  
2.411850000 GHzStop Freq  
2.412150000 GHzCF Step  
30.00000000 kHz  
Auto ManFreq Offset  
0.00000000 HzSignal Track  
On Off


File Operation Status, A:\SCREEN381.GIF file saved



## PPSD (CH Mid)

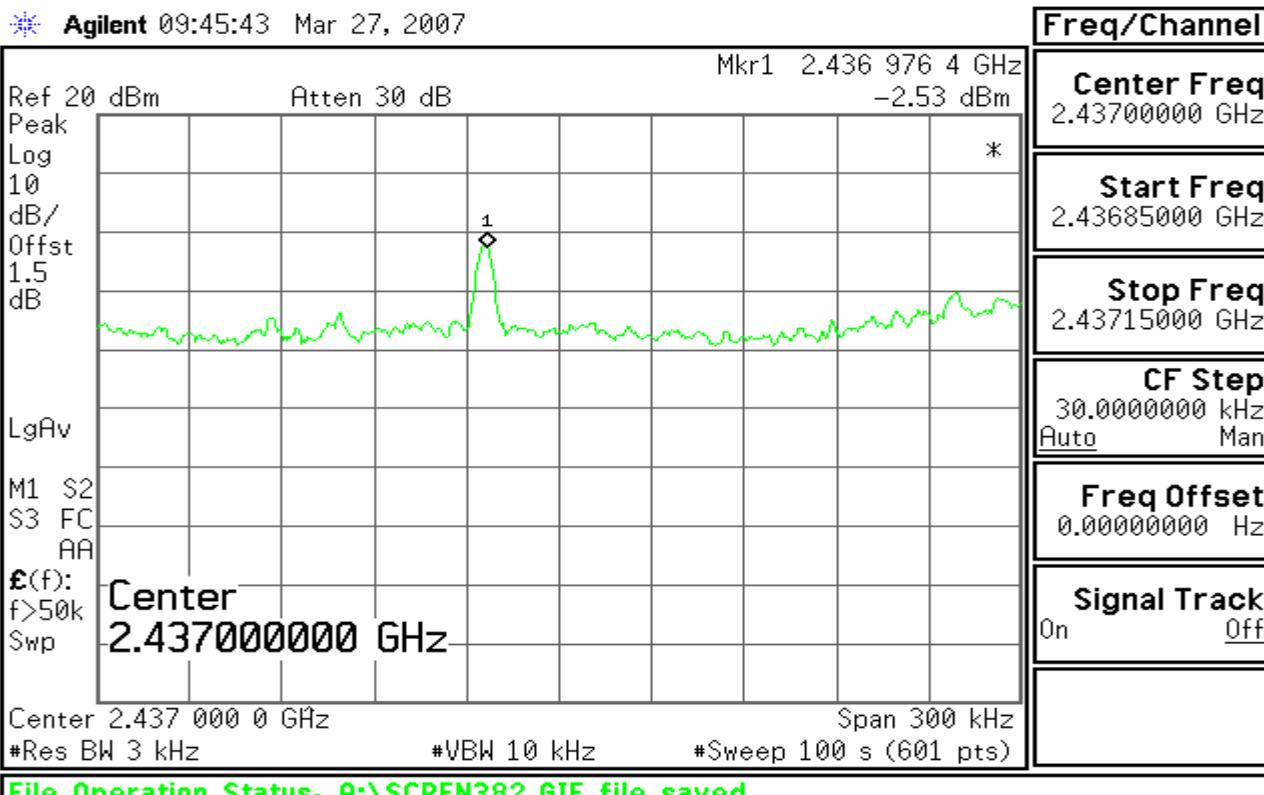

## PPSD (CH High)

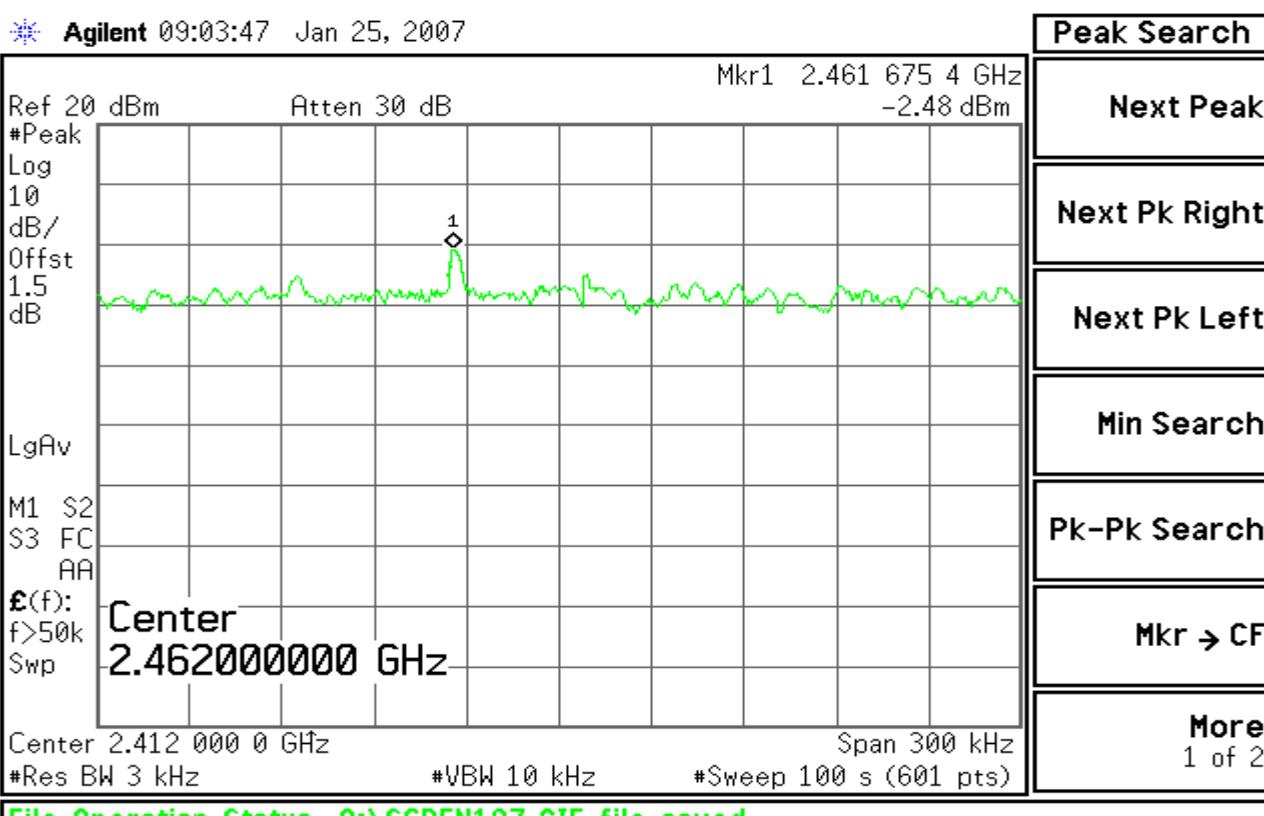



## APPENDIX I RADIO FREQUENCY EXPOSURE

### LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

### EUT Specification

<b>EUT</b>	Wireless access point
<b>Frequency band (Operating)</b>	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Bluetooth: 2.402GHz ~ 2.480 GHz
<b>Device category</b>	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation)
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure ( $S = 5\text{mW/cm}^2$ ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ( $S=1\text{mW/cm}^2$ )
<b>Antenna diversity</b>	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	IEEE 802.11b: 22.40 dBm (173.78mW) IEEE 802.11g: 21.09 dBm (128.53mW)
<b>Antenna gain (Max)</b>	3.5dBi (Numeric gain: 2.24)
<b>Evaluation applied</b>	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

### **Remark:**

1. The maximum output power is 22.40dBm (173.78mW) at 2412MHz (with 2.24 numeric antenna gain).
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is  $1.0\text{ mW/cm}^2$  even if the calculation indicates that the power density would be larger.



## TEST RESULTS

No non-compliance noted.

### Calculation

Given  $E = \frac{\sqrt{30 \times P \times G}}{d}$  &  $S = \frac{E^2}{3770}$

Where  $E$  = Field strength in Volts / meter

$P$  = Power in Watts

$G$  = Numeric antenna gain

$d$  = Distance in meters

$S$  = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$P$  (mW) =  $P$  (W) / 1000 and

$d$  (cm) =  $d$ (m) / 100

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where  $d$  = Distance in cm

$P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power density in mW / cm<sup>2</sup>

### Maximum Permissible Exposure

EUT output power = 173.78mW

Numeric Antenna gain = 2.24

Substituting the MPE safe distance using  $d = 20$  cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$



Where  $P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power density in mW / cm<sup>2</sup>

→ Power density = 0.077mW / cm<sup>2</sup>

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm<sup>2</sup> even if the calculation indicates that the power density would be larger.)

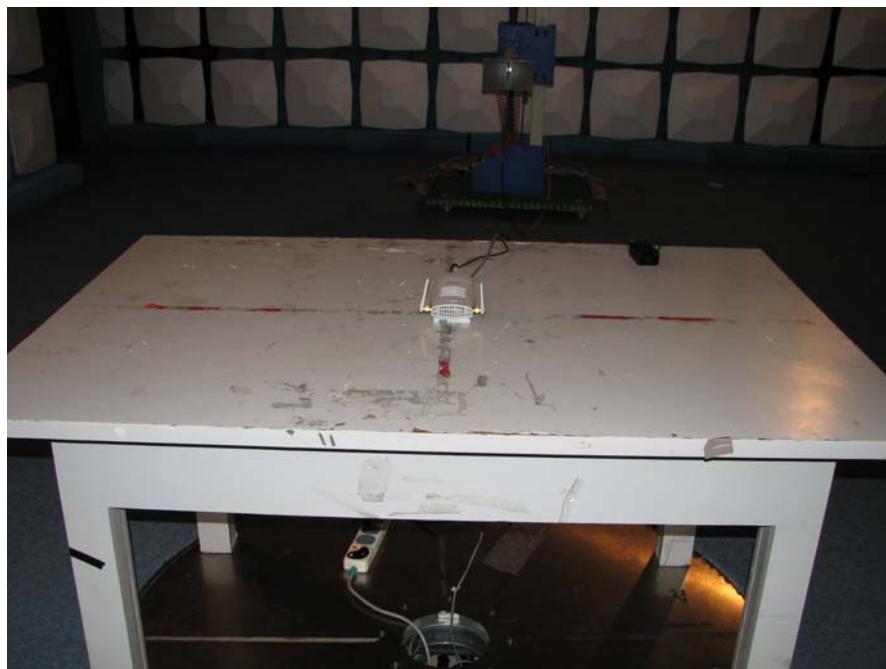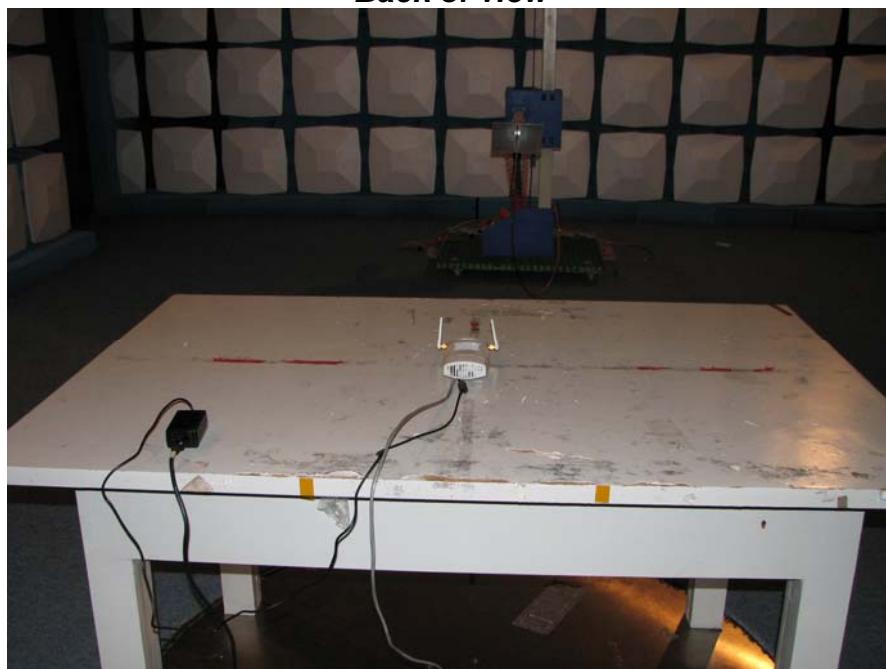**APPENDIX II PHOTOGRAPHS OF THE TEST CONFIGURATION****Radiated Emissions Setup Photos*****Front of view******Back of view***

**Power Line Conducted Emissions Setup Photos*****Front of view******Right of view***