



FCC CERTIFICATION RADIO MEASUREMENT TECHNICAL REPORT

On Model Name: Remote Control

Model Number : TD3000

Trademark : N/A

FCC ID : U6QSHTDRCEW0703

Prepared for Shanghai Tedu Electromechanical Co., Ltd.

According to FCC Part 15 (2006), Subpart C

Test Report #: SHA-0701-5978-FCC

Prepared by: Chris Huang

Reviewed by: Harry Zhao

QC Manager: Paul Chen

Test Report Released by:

Paul Chen

2007, March 26

Date

Test Location

*Tests performed at EMC Compliance Management Group (China)
in a Certified ANSI Semi-Anechoic Chamber and Shielded Room
performed testing.*

*Test Site Location: Jiangsu Electronic Products
Supervision & Inspection Institute
No 107 Ge lane ZhongQiao
WuXi JiangSu, China*

*Tel: 86-510-85140038
Fax: 86-510-85140037
Registration Number: 399439*

Table of Contents

ADMINISTRATIVE DATA	1
EUT DESCRIPTION	1
TEST SUMMARY	2
TEST MODE JUSTIFICATION	3
EUT EXERCISE SOFTWARE	3
EQUIPMENT MODIFICATION	3
TEST SYSTEM DETAILS	4
CONFIGURATION OF TESTED SYSTEM	5
EUT SAMPLE PHOTOS OF TD3000	6
ATTACHMENT 1 - ANTENNA REQUIREMENT	10
ATTACHMENT 2 - OPERATION MODE	13
ATTACHMENT 3 - RESTRICTED BAND OF OPERATION	16
ATTACHMENT 4 -FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS	22
ATTACHMENT 5 - BANDWIDTH TEST	31-34

Administrative Data

Test Sample : *Remote Control*

Model Number : *TD3000*

Trade Mark : *N/A*

Date Tested : *2007, March 15th*

Applicant : *Shanghai Tedu Electromechanical Co., Ltd.
No.158 Jiuyi Rd., Jiuting, Songjiang, Shanghai,
China*

Telephone : *86-21-57637503*

Fax : *86-21-57637503*

Applicant : *Shanghai Tedu Electromechanical Co., Ltd.
No.158 Jiuyi Rd., Jiuting, Songjiang, Shanghai,
China*

EUT Description

Shanghai Tedu Electromechanical Co., Ltd. model number TD3000 (referred to as the EUT in this test report) is a Remote Control. The transmitter is manually operated and has two buttons (for the winch running forward and reverse). It transmits once per push and will cease transmitting after the button is released.

Test Summary

The Electromagnetic Compatibility requirements on TD3000 for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

EMC Test Items			
Reference FCC Part 15 (2006), Subpart C			
Specification	Description	Test Results	Remark
FCC Part 15.203	Antenna Requirement	Compliance	Attachment 1
FCC Part 15.205	Restricted Band of Operation	Compliance	Attachment 3
FCC Part 15.209	Radiated Emission Limits	Compliance	Refer to Attachment 4
FCC Part 15.231	Periodic Operation in the Band 40.66-40.70MHz and above 70MHz		
(a)	Operation Mode	Compliance	Attachment 2
(b)	Field Strength of Fundamental and Spurious Emissions	Compliance	Attachment 4
(c)	Bandwidth	Compliance	Attachment 5

Test Mode Justification

The test modes (Lie, Side, Stand) were done for testing.

Note: Lie mode means let EUT put flat;

Side mode means let EUT stand with side;

Stand mode means let EUT stand up.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

EUT Exercise Software

The device is not programmable and does not use software.

Equipment Modification


Any modifications installed previous to testing by Shanghai Tedu Electromechanical Co., Ltd. will be incorporated in each production model sold or leased in United States.

There were no modifications installed by EMC Compliance Management Group (China) test personnel.

Test System Details

EUT	
Model Number:	TD3000
Trademark::	N/A
Serial Number:	Engineering Sample
Input Voltage:	12V DC (1*12V alkaline battery)
Description:	Remote Controller for Remote Control
Manufacturer:	Shanghai Tedu Electromechanical Co., Ltd.
Support Equipment	
None	
Cable Description	
None	

Configuration of Tested System

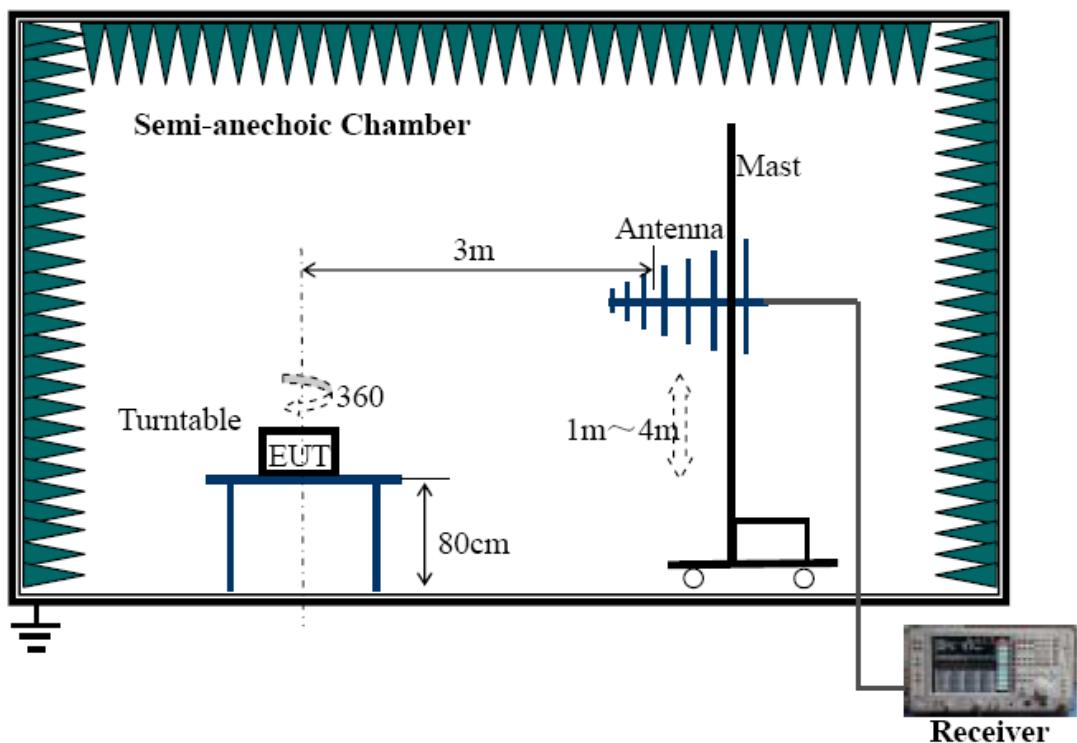


EUT Sample Photos of TD3000




Front View



Rear View

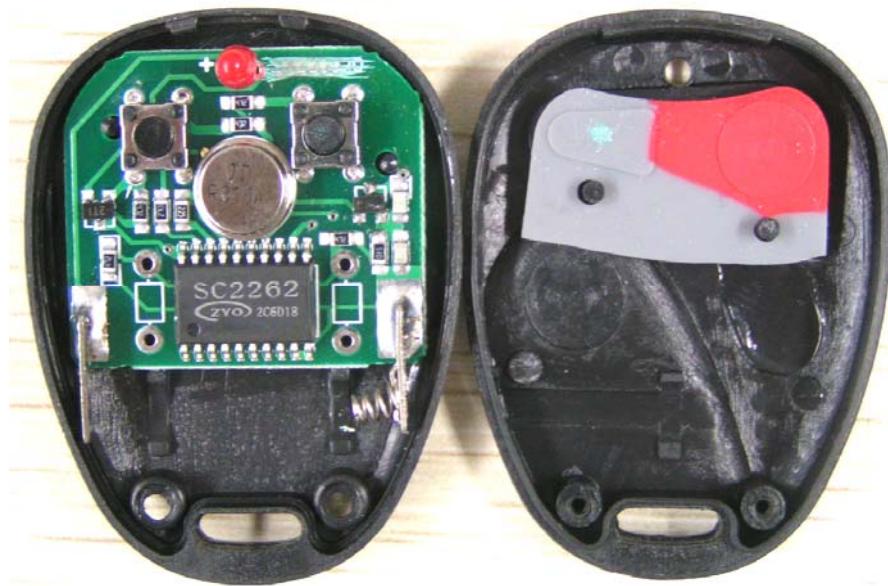


Uncovered #1

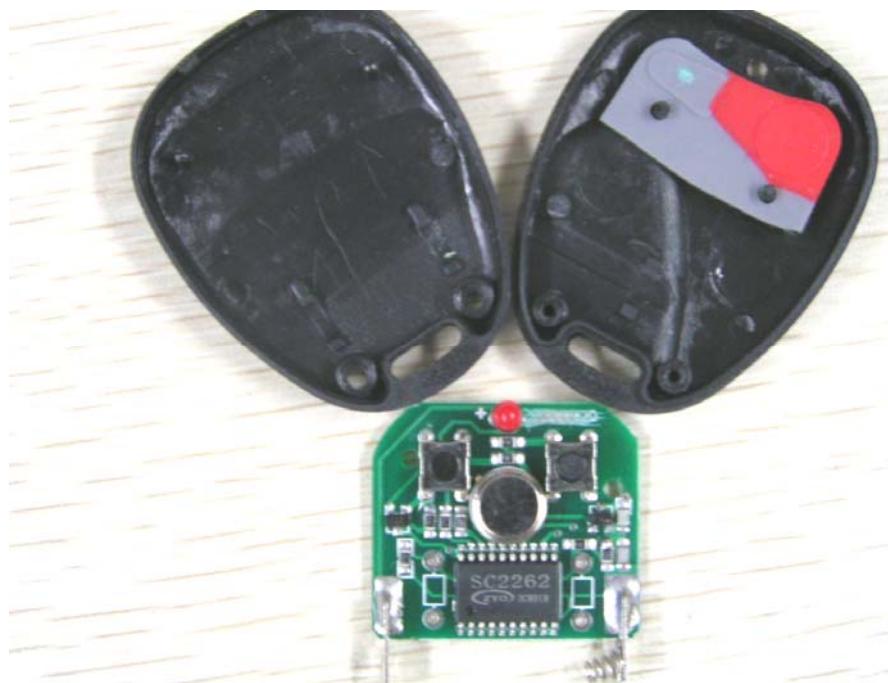

Uncovered #2



Main Board Front View

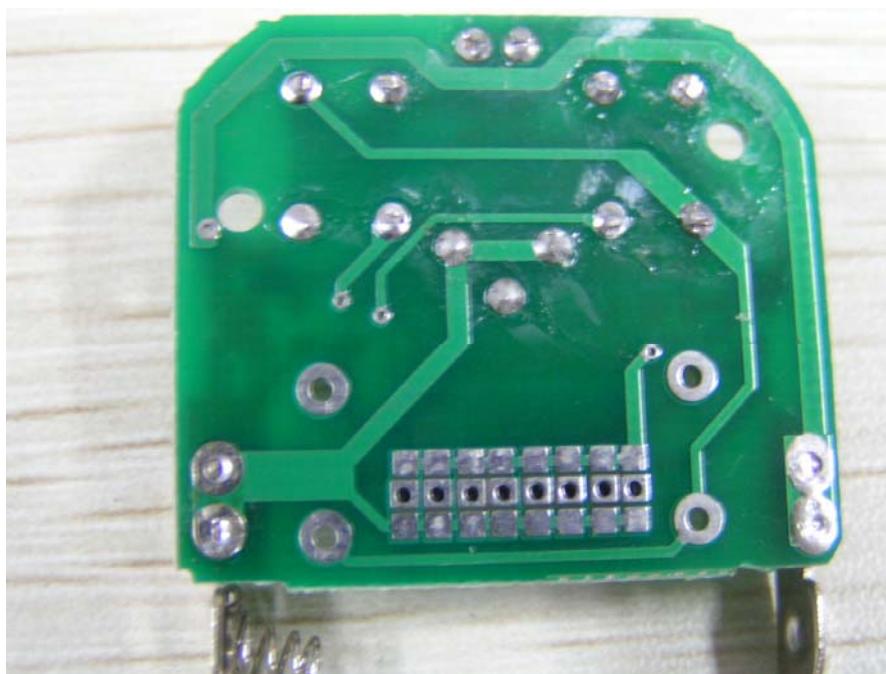

Main Board Back View




Battery View

ATTACHMENT 1 - ANTENNA REQUIREMENT

CLIENT:	Shanghai Tedu Electromechanical Co., Ltd.	TEST STANDARD:	FCC Part 15.203 (2006)
MODEL NUMBER:	TD3000	PRODUCT:	Remote Control
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	20°C	HUMIDITY:	58%RH
ATM PRESSURE:	101.8 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2007, March 15
SETUP METHOD:	N/A		
ANTENNA REQUIREMENT:	An intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.		
TEST VOLTAGE:	12V DC (1*12V alkaline battery)		
TEST STATUS:	Normal Operation As Usual		
RESULTS:	The EUT meets the Antenna requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
M. UNCERTAINTY:	N/A		

FCC Section	FCC Rules	Conclusion
15.203	<p>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</p> <p>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</p> <ul style="list-style-type: none"> + The application (or intended use) of the EUT + The installation requirements of the EUT + The method by which the EUT will be marketed 	The RF Device uses an integral antenna without connector.

Integral Antenna

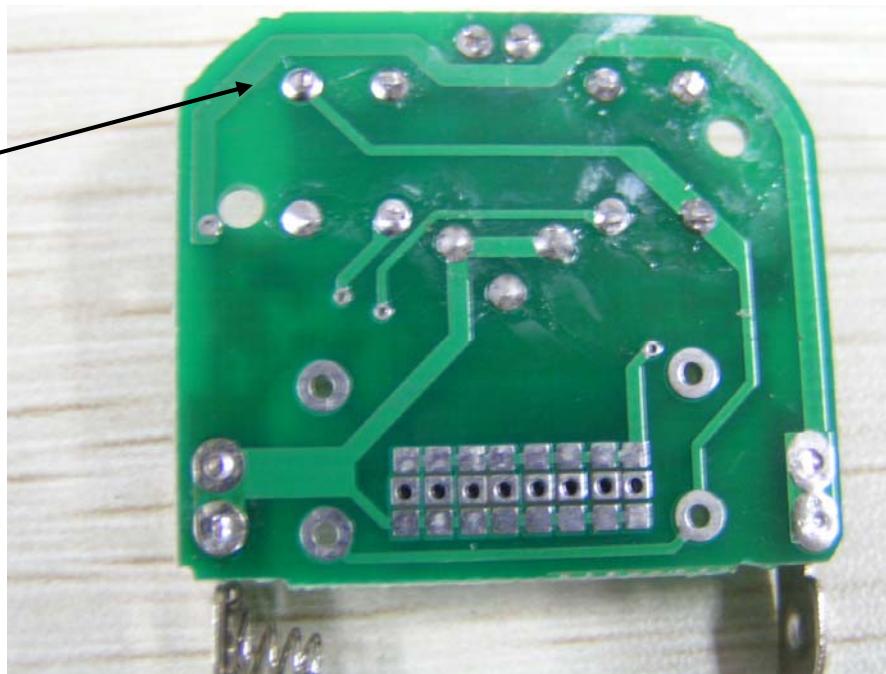


Integral Antenna without Connector View

ATTACHMENT 2 – OPERATION MODE

CLIENT:	Shanghai Tedu Electromechanical Co., Ltd.	TEST STANDARD:	FCC Part 15.231 (a) (2006)
MODEL NUMBER:	TD3000	PRODUCT:	Remote Control
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	20°C	HUMIDITY:	58%RH
ATM PRESSURE:	101.8 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2007, March 15
SETUP METHOD:	N/A		
OPERATION MODE REQUIREMENT:	(1) A manually operated transmitter shall employ a switch that will automatically stop the transmitter within not more than 5 seconds of being released. (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation. (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used on security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour. (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.		
TEST VOLTAGE:	12VDC (1*12V alkaline battery)		
TEST STATUS:	Push the button for a while and then release it		
RESULTS:	The EUT meets the operation mode requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
M. UNCERTAINTY:	N/A		

FCC Section	FCC Rules	Conclusion
15.231 (a)	<p><i>The provisions of this Section are restricted to periodic operation within the band 40.66 - 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of 15.231 Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:</i></p> <p class="list-item-l1">(1) <i>A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released</i></p> <p class="list-item-l1">(2) <i>A transmitter activated automatically shall cease transmission within 5 seconds after activation.</i></p> <p class="list-item-l1">(3) <i>Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used on security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.</i></p> <p class="list-item-l1">(4) <i>Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.</i></p>	<p><i>The transmitter is manually controlled and employs a switch to start the transmitter. The switch will automatically deactivate the transmitting within not more than 5 seconds after being released.</i></p> <p><i>The transmitter does not perform periodic transmissions.</i></p>

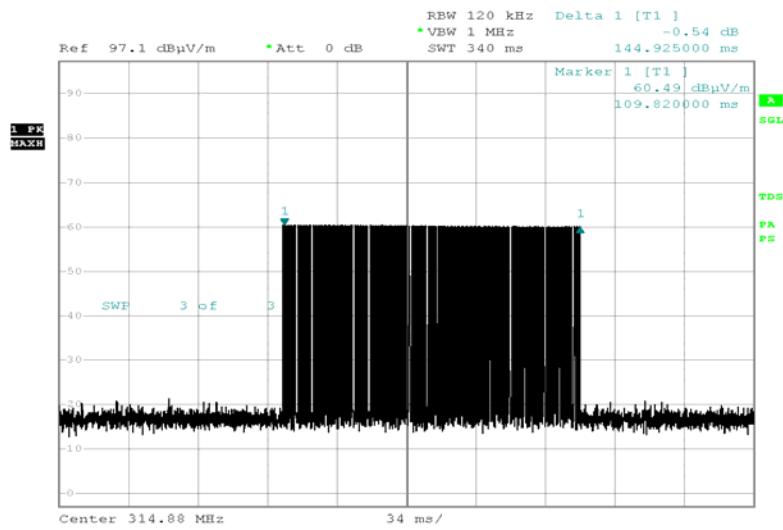

ABC

Date: 8.MAR.2007 12:56:21

Plot of the duration

Description: Push the button on for a while and then release it, then the transmitting signal disappears at once.

ATTACHMENT 3 – RESTRICTED BAND OF OPERATION


CLIENT:	Shanghai Tedu Electromechanical Co., Ltd.	TEST STANDARD:	FCC Part 15.231(b), FCC Part 15.35
MODEL NUMBER:	TD3000	PRODUCT:	Remote Control
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	20°C	HUMIDITY:	58%RH
ATM PRESSURE:	101.6 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2007, March 15
SETUP METHOD:	ANSI C63.4 : 2003		
RESTRICTED BANDS OF OPERATION REQUIREMENT:	The only spurious emissions are permitted in any of the frequency bands listed below table of next page.		
TESTED RANGE:	30MHz to 5000MHz		
TEST VOLTAGE:	12VDC (1*12V alkaline battery)		
TEST STATUS:	Keep Tx in continuous transmission mode, modulated		
RESULTS:	The EUT meets the restricted bands of operation requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6


Test Data (Below 1GHz)

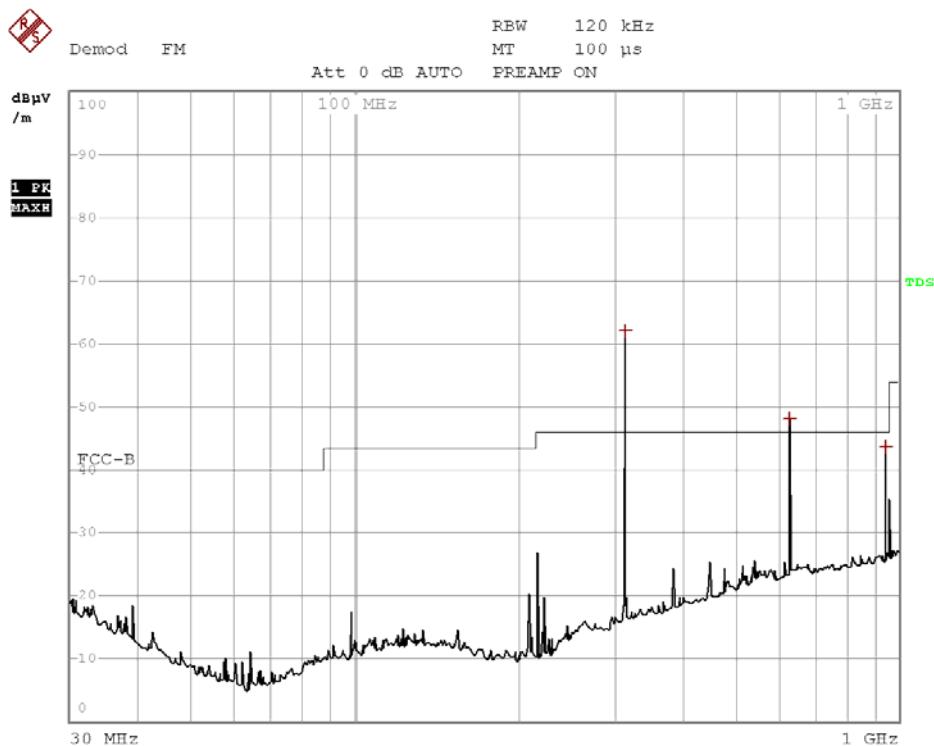

ABC

Date: 15.MAR.2007 15:18:00

Test Data (Above 1GHz)

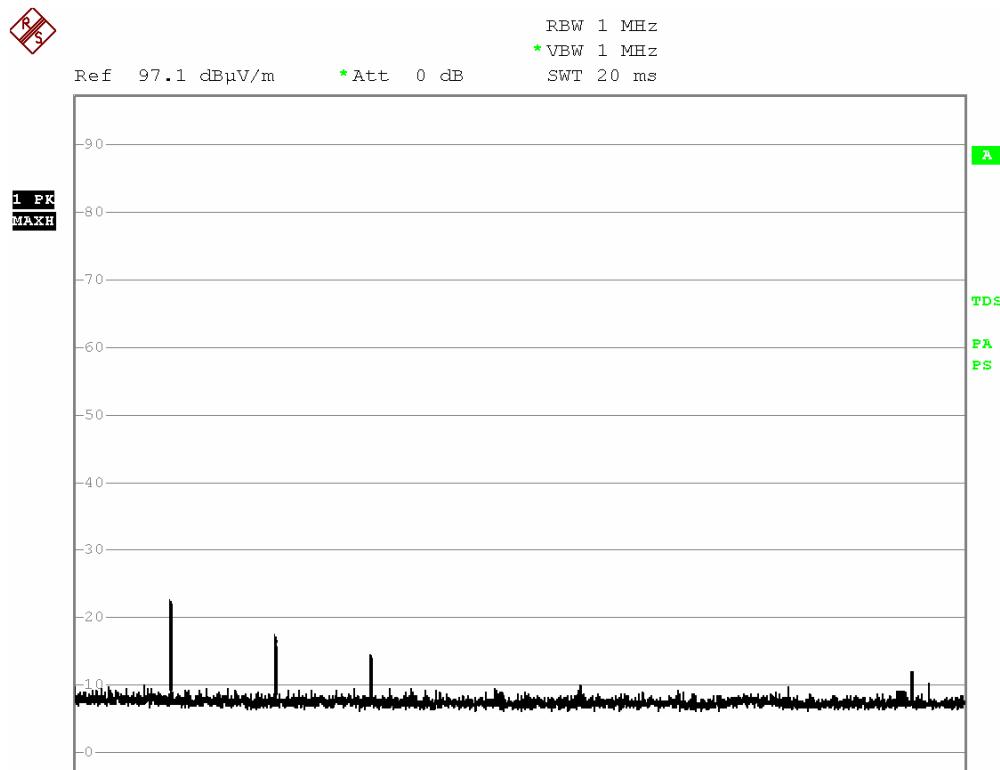

ABC

Date: 15.MAR.2007 15:32:08

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum	R&S	ESCI	1166.595003 100065	11/23/06	11/22/07
Spectrum Analyzer	Agilent	E4440A	US45303119	03/20/06	03/19/07
Bilog Antenna	CHASE	CBL6112	117.0800.20	02/17/07	02/16/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120 D	513	02/10/07	02/09/08
Anechoic Chamber	LINDGREN	FACT-3	601	01/10/07	01/09/08
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: _____


Shi-xiting

ENGINEER


REVIEWED BY: _____

Hangzhou

SENIOR ENGINEER

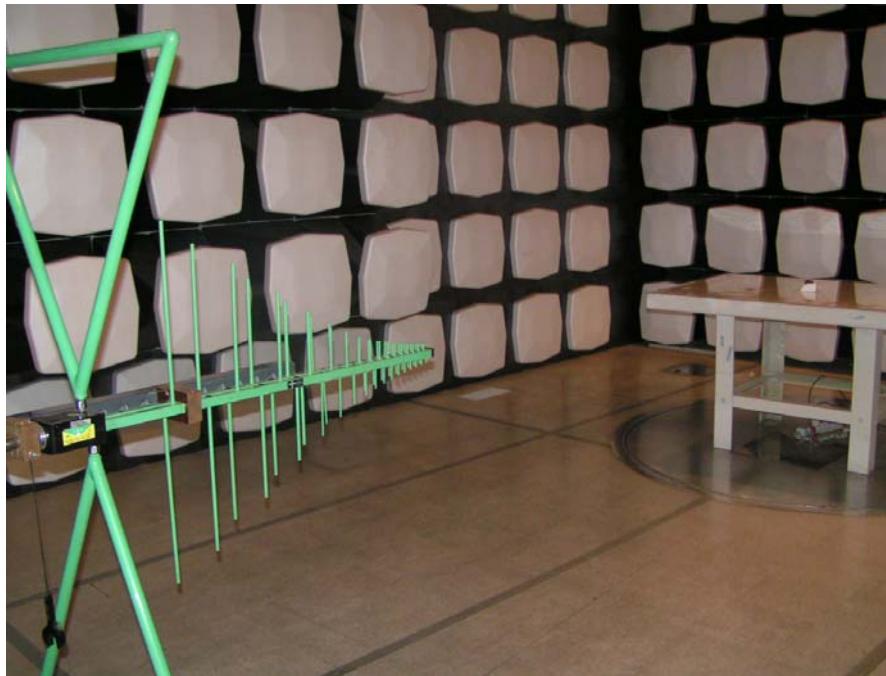

Field Strength Emissions Test Set-up (Below 1GHz)

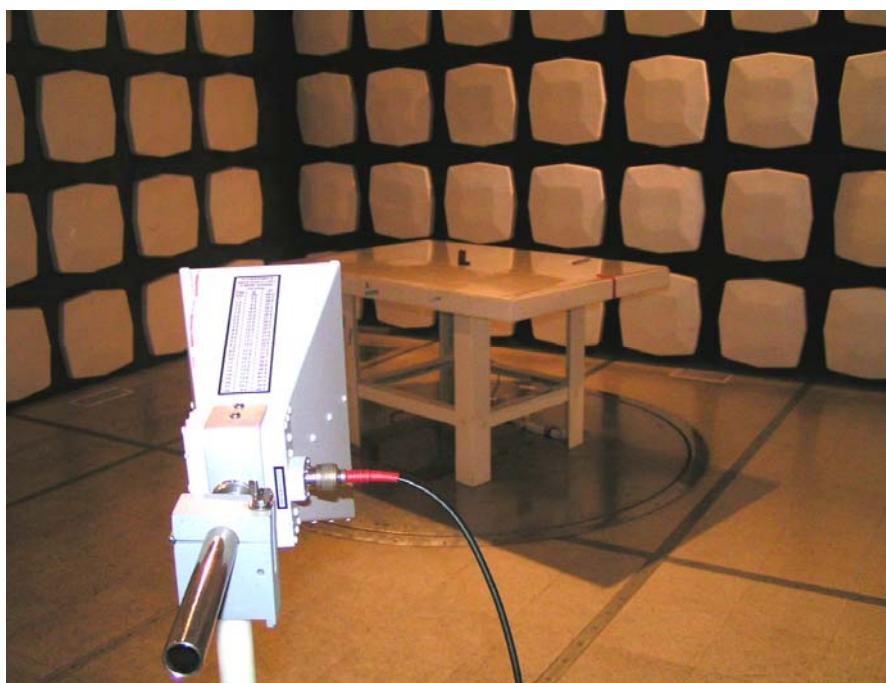

Field Strength Emissions Test Set-up (Above 1GHz)

ATTACHMENT 4 -FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS

CLIENT:	Shanghai Tedu Electromechanical Co., Ltd.	TEST STANDARD:	FCC Part 15.231(b), FCC Part 15.35
MODEL NUMBER:	TD3000	PRODUCT:	Remote Control
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	20°C	HUMIDITY:	58%RH
ATM PRESSURE:	101.6 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2007, March 15
SETUP METHOD:	ANSI C63.4 : 2003, FCC Part 15.35		
TEST PROCEDURE:	<p>a. The EUT was placed on a rotatable table with 0.8 meters above ground.</p> <p>b. The EUT was set 3 meters from the interference-receiving antenna, which was mounted on the top of a variable height antenna tower.</p> <p>c. The antenna was varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna were set to make measurement.</p> <p>d. For each suspected emission the EUT was arranged to its worst case and then change the antenna tower height (from 1m to 4m) and turn table (from 0 degree to 360 degree) to find the maximum reading.</p> <p>e. If the emission level of the EUT in peak mode was 20 dB lower than the specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be tested using the quasi-peak method in about six maximal points and the results will be reported.</p> <p>f. Broadband antenna (Calibrated antenna) was used as receiving antenna below 1000MHz. Horn antenna were used as receiving antenna above 1000MHz.</p> <p>g. The bandwidth is 120 kHz below 1000 MHz, and 1 MHz above 1000 MHz</p> <p>Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG - DC</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p> <p>DC = Duty Cycle Correction Factor</p>		

Continue on the next page...

TESTED RANGE:	30MHz to 5000MHz
TEST VOLTAGE:	12VDC (1*12V alkaline battery)
TEST STATUS:	Keep Tx in continuous transmission mode, modulated
RESULTS:	The EUT meets the requirements of field strength test. The test results only to the equipment under test provided by client.
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB

Average value of the measured emissions:

Direction	Polarization	Frequency Type	Frequency (MHz)	Field Strength dB(µV/m)	Limit dB(µV/m)	Over Limit dB(µV/m)	Read Level dB(µV)	Factor (dB)	Duty cycle Correction Factor (dB)
Lying	Horizontal	Fundamental	314.92	51.34	75.63	-24.29	63.80	-5.73	6.73
		Spurious	629.84	36.97	55.63	-18.66	51.10	-7.40	6.73
		Spurious	944.76	38.98	55.63	-16.65	46.80	-1.09	6.73
		Spurious	1259.68	40.44	55.63	-15.19	44.30	2.87	6.73
		Spurious	1574.60	36.90	54.00	-17.10	42.90	0.73	6.73
		Spurious	1889.52	37.36	55.63	-18.27	43.20	0.89	6.73
	Vertical	Fundamental	314.92	52.64	75.63	-22.99	65.10	-5.73	6.73
		Spurious	629.84	38.17	55.63	-17.46	52.30	-7.40	6.73
		Spurious	944.76	36.48	55.63	-19.15	44.30	-1.09	6.73
		Spurious	1259.68	37.24	55.63	-18.39	41.10	2.87	6.73
		Spurious	1574.60	34.80	54.00	-19.20	40.80	0.73	6.73
		Spurious	1889.52	37.86	55.63	-17.77	43.70	0.89	6.73
Side	Horizontal	Fundamental	314.92	48.64	75.63	-26.99	61.10	-5.73	6.73
		Spurious	629.84	34.47	55.63	-21.16	48.60	-7.40	6.73
		Spurious	944.76	37.48	55.63	-18.15	45.30	-1.09	6.73
		Spurious	1259.68	37.04	55.63	-18.59	40.90	2.87	6.73
		Spurious	1574.60	36.30	54.00	-17.70	42.30	0.73	6.73
		Spurious	1889.52	35.56	55.63	-20.07	41.40	0.89	6.73
	Vertical	Fundamental	314.92	50.64	75.63	-24.99	63.10	-5.73	6.73
		Spurious	629.84	35.97	55.63	-19.66	50.10	-7.40	6.73
		Spurious	944.76	34.98	55.63	-20.65	42.80	-1.09	6.73
		Spurious	1259.68	39.14	55.63	-16.49	43.00	2.87	6.73
		Spurious	1574.60	35.90	54.00	-18.10	41.90	0.73	6.73
		Spurious	1889.52	35.36	55.63	-20.27	41.20	0.89	6.73
Stand	Horizontal	Fundamental	314.92	53.94	75.63	-21.69	66.40	-5.73	6.73
		Spurious	629.84	35.17	55.63	-20.46	49.30	-7.40	6.73
		Spurious	944.76	38.98	55.63	-16.65	46.80	-1.09	6.73
		Spurious	1259.68	37.14	55.63	-18.49	41.00	2.87	6.73
		Spurious	1574.60	34.90	54.00	-19.10	40.90	0.73	6.73
		Spurious	1889.52	35.86	55.63	-19.77	41.70	0.89	6.73
	Vertical	Fundamental	314.92	49.64	75.63	-25.99	62.10	-5.73	6.73
		Spurious	629.84	36.17	55.63	-19.46	50.30	-7.40	6.73
		Spurious	944.76	38.58	55.63	-17.05	46.40	-1.09	6.73
		Spurious	1259.68	38.94	55.63	-16.69	42.80	2.87	6.73
		Spurious	1574.60	33.90	54.00	-20.10	39.90	0.73	6.73
		Spurious	1889.52	34.66	55.63	-20.97	40.50	0.89	6.73

Memo: All the other readings are too low to record.

Peak value of the measured emissions:

Direction	Polarization	Frequency Type	Frequency (MHz)	Read Level dB(µV)	Factor (dB)	Field Strength dB(µV/m)	Limit dB(µV/m)	Over Limit dB(µV/m)
Lie	Horizontal	Fundamental	314.92	63.80	-5.73	58.07	95.63	-37.56
		Spurious	629.84	51.10	-7.40	43.70	75.63	-31.93
		Spurious	944.76	46.80	-1.09	45.71	75.63	-29.92
		Spurious	1259.68	44.30	2.87	47.17	75.63	-28.46
		Spurious	1574.60	42.90	0.73	43.63	74.00	-30.37
		Spurious	1889.52	43.20	0.89	44.09	75.63	-31.54
	Vertical	Fundamental	314.92	65.10	-5.73	59.37	95.63	-36.26
		Spurious	629.84	52.30	-7.40	44.90	75.63	-30.73
		Spurious	944.76	44.30	-1.09	43.21	75.63	-32.42
		Spurious	1259.68	41.10	2.87	43.97	75.63	-31.66
		Spurious	1574.60	40.80	0.73	41.53	74.00	-32.47
		Spurious	1889.52	43.70	0.89	44.59	75.63	-31.04
Side	Horizontal	Fundamental	314.92	61.10	-5.73	55.37	95.63	-40.26
		Spurious	629.84	48.60	-7.40	41.20	75.63	-34.43
		Spurious	944.76	45.30	-1.09	44.21	75.63	-31.42
		Spurious	1259.68	40.90	2.87	43.77	75.63	-31.86
		Spurious	1574.60	42.30	0.73	43.03	74.00	-30.97
		Spurious	1889.52	41.40	0.89	42.29	75.63	-33.34
	Vertical	Fundamental	314.92	63.10	-5.73	57.37	95.63	-38.26
		Spurious	629.84	50.10	-7.40	42.70	75.63	-32.93
		Spurious	944.76	42.80	-1.09	41.71	75.63	-33.92
		Spurious	1259.68	43.00	2.87	45.87	75.63	-29.76
		Spurious	1574.60	41.90	0.73	42.63	74.00	-31.37
		Spurious	1889.52	41.20	0.89	42.09	75.63	-33.54
Stand	Horizontal	Fundamental	314.92	66.40	-5.73	60.67	95.63	-34.96
		Spurious	629.84	49.30	-7.40	41.90	75.63	-33.73
		Spurious	944.76	46.80	-1.09	45.71	75.63	-29.92
		Spurious	1259.68	41.00	2.87	43.87	75.63	-31.76
		Spurious	1574.60	40.90	0.73	41.63	74.00	-32.37
		Spurious	1889.52	41.70	0.89	42.59	75.63	-33.04
	Vertical	Fundamental	314.92	62.10	-5.73	56.37	95.63	-39.26
		Spurious	629.84	50.30	-7.40	42.90	75.63	-32.73
		Spurious	944.76	46.40	-1.09	45.31	75.63	-30.32
		Spurious	1259.68	42.80	2.87	45.67	75.63	-29.96
		Spurious	1574.60	39.90	0.73	40.63	74.00	-33.37
		Spurious	1889.52	40.50	0.89	41.39	75.63	-34.24

Memo: All the other readings are too low to record.

Note:

1. Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follow:

For fundamental frequency ($F=314.92\text{MHz}$)

Average field Strength of Fundamental (dBuV/m)

$$\begin{aligned}&=20\log(41.6667 \times F - 7083.3333) \\&=20\log(41.6667 \times 314.92 - 7083.3333) \\&=75.62 \text{ dBuV/m}\end{aligned}$$

Average field Strength of Spurious (dBuV/m) = $75.62 - 20 = 55.62 \text{ dBuV/m}$

According to FCC 15.35(b), maximum permitted peak field strength is 20dB above the maximum permitted average emission limit.

2. Average Field Strength=Read Level + Factor – Duty Cycle Correction Factor

Peak Field Strength= Read Level + Factor

Factor = Antenna Factor + Cable Loss - Preamp Factor

Duty Cycle Correction Factor is calculated by averaging the sum of the pulse train.


Correction factor is measured as follows:

Keep the EUT in continuous transmission mode (modulated), and set the spectrum to the fundamental frequency and set the span width to 0 Hz. Then connect a storage oscilloscope to the video output of the spectrum that is used to detect the pulse train. Adjust the oscilloscope settings to observe the pulse train and determine the number and width of the pulses, as well as the period of the train.

Duty Cycle Correction Factor at its minimum value (Worst case): 6.73dB

$$\begin{aligned}
 \text{Duty Cycle} &= 20 / \log(19 * \text{Pulse}) / \text{Period} \\
 &= 20 / \log(19 * 485\text{us}) / 20\text{ms} \\
 &= 20 / \log 0.461 = 6.73\text{dB}
 \end{aligned}$$

(please refer to the following test graph below)

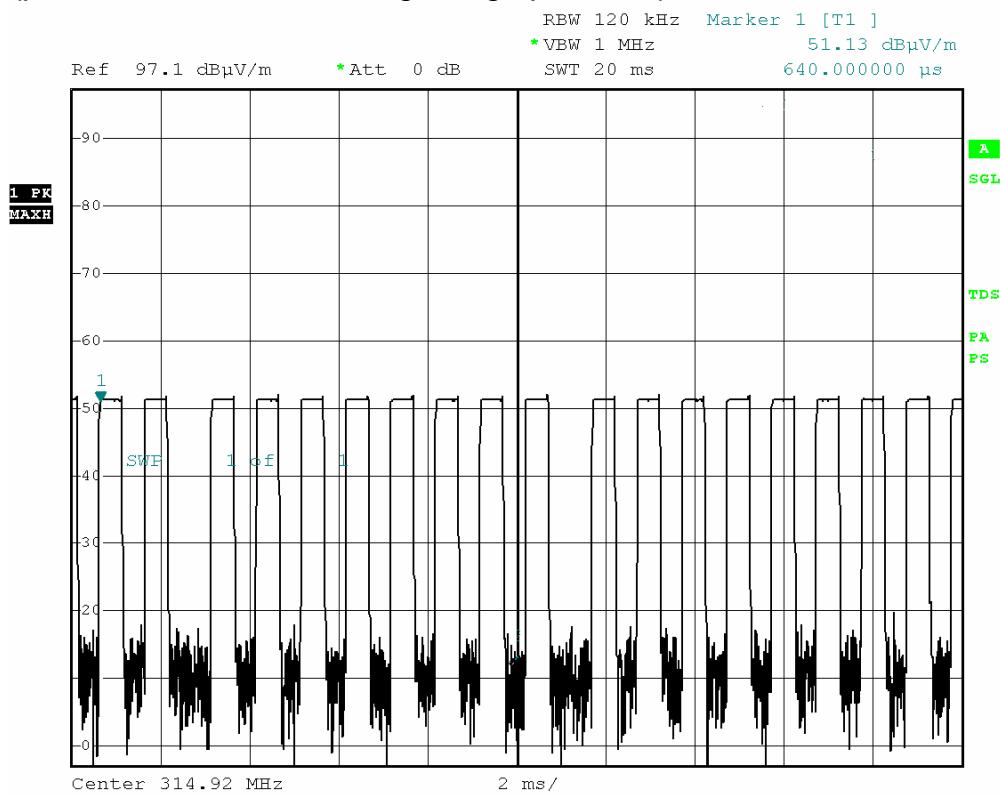

ABC

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum	R&S	ESCI	1166.595003 100065	11/23/06	11/22/07
Spectrum Analyzer	Agilent	E4440A	US45303119	03/20/06	03/19/07
Bilog Antenna	CHASE	CBL6112	117.0800.20	02/17/07	02/16/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120 D	513	02/10/07	02/09/08
Anechoic Chamber	LINDGREN	FACT-3	601	01/10/07	01/09/08
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: _____

Shi-xiting


ENGINEER

REVIEWED BY: _____


Hanyzhou

SENIOR ENGINEER

Test setup of low frequency

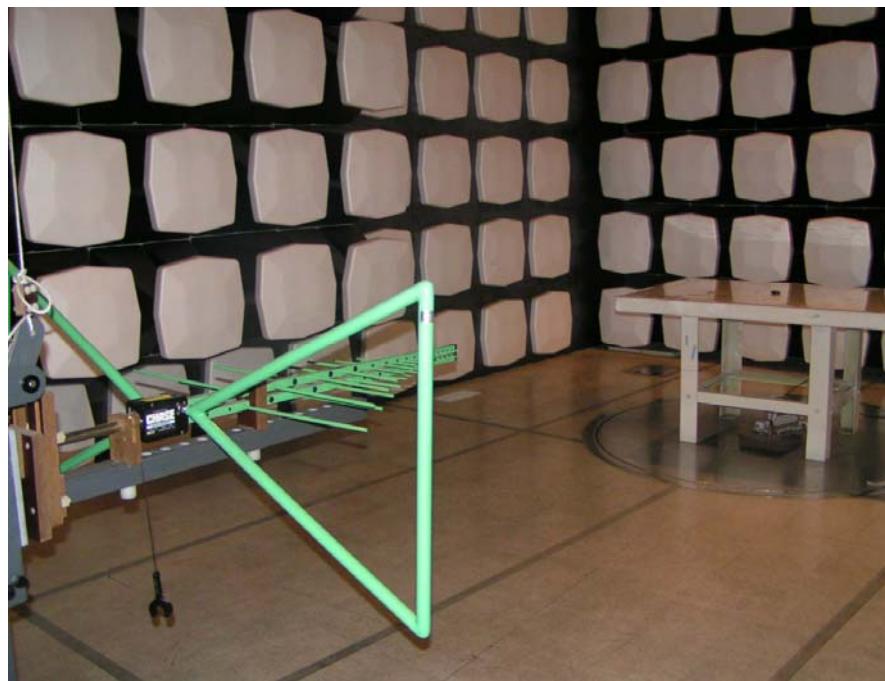

Field Strength Emissions Test Set-up - Lying mode

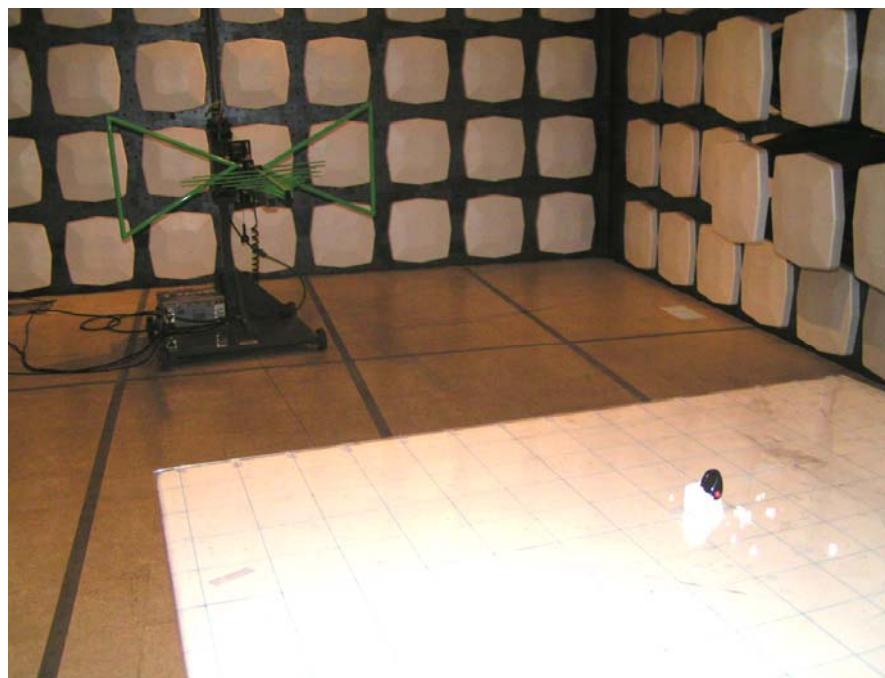


Field Strength Emissions Test Set-up - Side mode



Field Strength Emissions Test Set-up - Stand mode

Test setup of High frequency

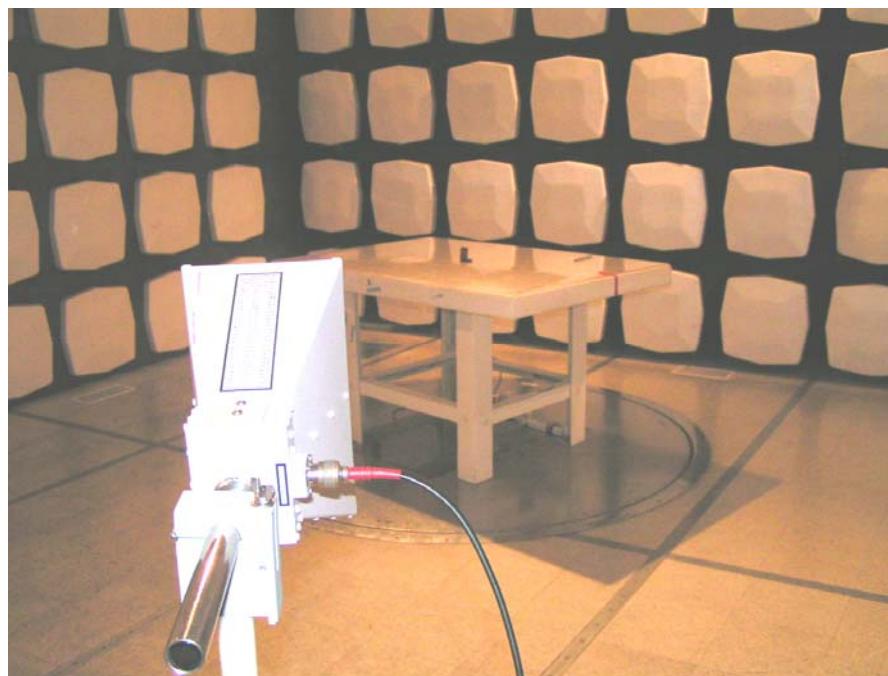


Field Strength Emissions Test Set-up

ATTACHMENT 5 – BANDWIDTH TEST

CLIENT:	Shanghai Tedu Electromechanical Co., Ltd.	TEST STANDARD:	FCC Part 15.231 (C)
MODEL TESTED:	TD3000	PRODUCT:	Remote Control
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	20°C	HUMIDITY:	58%RH
ATM PRESSURE:	101.6 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2007, March 15
SETUP METHOD:	ANSI C63.4 - 2003		
BANDWIDTH REQUIREMENT:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, The emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.		
TEST VOLTAGE:	12VDC (1*12V alkaline battery)		
TEST STATUS:	Keep Tx in continuous transmission mode, modulated		
RESULTS:	The EUT meets the bandwidth requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB		

Test Data (Fundamental Frequency)

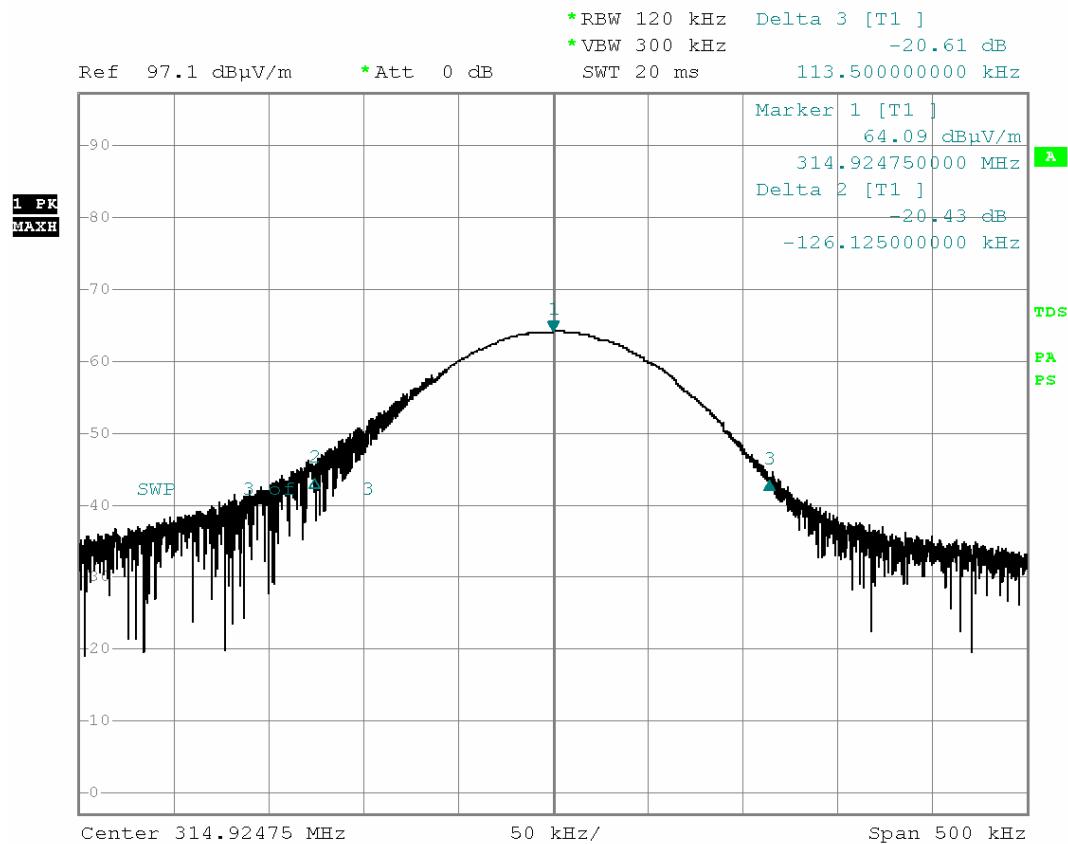


ABC

20dB Bandwidth

Frequency (MHz)			Test Result (MHz)	Bandwidth Limit (MHz) (F _{center} X 0.25%)	Conclusion
Center	Left	Right			
314.92	0.1261	0.1135	0.2396	0.7873	Compliance

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum	R&S	ESCI	1166.595003 100065	11/23/06	11/22/07
Bilog Antenna	CHASE	CBL6112	117.0800.20	02/17/07	02/16/08
Anechoic Chamber	LINDGREN	FACT-3	601	01/10/07	01/09/08
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Shi-xiting REVIEWED BY: Hangzhan
 ENGINEER SENIOR ENGINEER

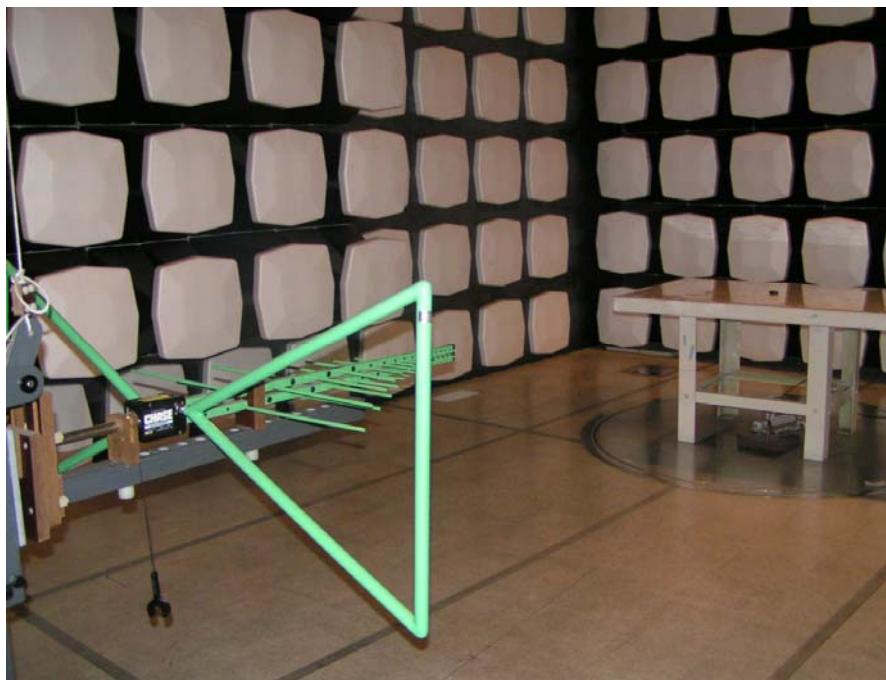

Bandwidth Test Set-up