

FCC LISTED,
REGISTRATION
NUMBER: 905266

IC LISTED,
REGISTRATION
NUMBER: IC 4621



CENTRO DE
TECNOLOGÍA DE LAS
COMUNICACIONES, S.A.

Parque Tecnológico de Andalucía,
c/Severo Ochoa nº 2
29590 Campanillas/ Málaga/ España
Tel. 952 61 91 00 - Fax 952 61 91 13
MÁLAGA, C.I.F. A29 507 456
Registro Mercantil Tomo 1169 Libro 82
Folio 133 Hoja MA3729

TEST REPORT


Report No.: 25810RET.201

TEST NAME: FCC PART 22, PART 24 & PART 15 (Electromagnetic emissions)

Product : Mobile phone with bluetooth
Trade Mark : Neonode
Model/type Ref. : N2
Manufacturer : NEONODE AB
Requested by : NEONODE AB
Other identification of the product : FCC ID: U76GC444277
Standard(s) : FCC Part 22 & 24
FCC Part 15, Subpart C

This test report includes 4 annexes and therefore the total number of pages is 81

IMPORTANT: No parts of this report may be reproduced or quoted out of context, and must not be reproduced except in full without the written approval of Centro de Tecnología de las Comunicaciones, S.A. (AT4 WIRELESS).

Date: 2007-08-03	Test operator A. Llamas/R. López   Approved by: J.C. Soler Consultant AT4 WIRELESS Centro de Tecnología de las Comunicaciones, S.A. 	Page: 1 of 8
------------------	--	--------------

INDEX

1.	COMPETENCE AND GUARANTEES	3
2.	GENERAL CONDITIONS	3
3.	CHARACTERISTICS OF THE TEST	3
3.1	TEST REQUESTED.....	3
3.2	REQUIREMENTS AND METHOD	4
4.	IDENTIFICATION DATA SUPPLIED BY THE APPLICANT.....	5
4.1	APPLICANT.....	5
4.2	REPRESENTATIVE.....	5
4.3	TEST SAMPLES SUPPLIER.....	5
4.4	IDENTIFICATION OF ITEM/ITEMS TESTED	5
5.	USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS	6
5.1	USAGE OF SAMPLES	6
5.2	PERIOD OF TESTING	6
5.3	ENVIROMENTAL CONDITIONS.....	7
6.	TEST RESULTS	8
7.	REMARKS AND COMMENTS.....	8
8.	SUMMARY.....	8

ANNEXES

ANNEX A. TEST RESULTS FOR FCC PART 22

ANNEX B. TEST RESULTS FOR FCC PART 24

ANNEX C. MEASURING RESULTS FOR ELECTROMAGNETIC EMISSION

ANNEX D. PHOTOGRAPHS

Report No.:		Page: 2 of 8
25810RET.201		
Date: 2007-08-03		

1. COMPETENCE AND GUARANTEES

Centro de Tecnología de las Comunicaciones (AT4 WIRELESS), S.A. is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 905266.

Centro de Tecnología de las Comunicaciones (AT4 WIRELESS), S.A. is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621.

In order to assure the traceability to other national and international laboratories, AT4 WIRELESS has a calibration and maintenance programme for its measuring equipment.

AT4 WIRELESS guarantees the reliability of the data presented in this report, which is the result of measurements and tests performed to the item under test on the date and under the conditions stated on the report and is based on the knowledge and technical facilities available at AT4 WIRELESS at the time of execution of the test.

AT4 WIRELESS is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the item under test and the results of the test.

2. GENERAL CONDITIONS

1. This report only refers to the item that has undergone the test.
2. This report does not constitute or imply by its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without written approval of AT4 WIRELESS.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of AT4 WIRELESS and the Accreditation Bodies.

3. CHARACTERISTICS OF THE TEST

3.1 TEST REQUESTED

1. Measurements for PCS 850 and PCS 1900 devices according to FCC parts 22 and 24.
2. Continuous conducted emission, power leads:

Standard: FCC Rules and Regulations 47 CFR Part 15

Limit: Class B

Method: FCC Rules and Regulations 47 CFR Part 15, Subpart C

3. Radiated emission, electromagnetic field:

Standard: FCC Rules and Regulations 47 CFR Part 15

Report No.: 25810RET.201		Page: 3 of 8
Date: 2007-08-03		

Limit: Class B

Method: FCC Rules and Regulations 47 CFR Part 15, Subpart C

3.2 REQUIREMENTS AND METHOD

The test has been carried out according to the following documents and standards:

1. FCC part 22.
2. FCC part 24.
3. FCC Rules and Regulations 47 CFR Part 15, Subpart C: Limits and methods of measurements for radio frequency devices. Intentional radiators.

Radiated testing was performed in AT4 WIRELESS's semi-anechoic chamber. This site has been fully described in a report submitted to the FCC and was accepted in a letter dated July 25, 2002. Radiated measurements were made in accordance with the general procedures of ANSI C63.4: 2003 and substitution method according to TIA/EIA 603-C: 2004.

The testing procedures used are:

1. PEEM001: Medida de la tensión perturbadora en bornes de alimentación según EN 55022.

Uncertainty (factor $k=2$) was calculated according to the following AT4 WIRELESS's internal documents:

1. PODT000: Procedimiento para el cálculo de incertidumbres de medida
2. FEM12_07: Formato de cálculo de incertidumbre a aplicar en la medida de la tensión perturbadora en bornes de alimentación según EN 55022.

The instrumentation used to perform the testing is listed below:

1. Semianechoic Absorber Lined Chamber IR 11. BS.
2. Control Chamber IR 12.BC.
3. Spectrum Analyzer Agilent E4440A.
4. Bilog antenna CHASE CBL6111.
5. Antenna tripod EMCO 11968C.
6. Antenna mast EM 1072 NMT.
7. Rotating table EM 1084-4. ON.
8. Double-ridge Guide Horn antenna 1-18 GHz HP 11966E.
9. Double-ridge Guide Horn antenna 18-40 GHz Agilent 119665J.
10. RF pre-amplifier Miteq AFS5-04001300-15-10P-6.
11. RF pre-amplifier Miteq JS4-12002600-30-5A.
12. EMI Test Receiver R&S ESIB26.
13. Universal Radio communication Tester R&S CMU200.
14. 10 dB attenuator HP 8491B.

Report No.:		
25810RET.201		
Date: 2007-08-03		Page: 4 of 8

15. Multi Device Controller EMCO 2090.
16. DC Power supply R & S NGPE 40/40.
17. Transient limiter. HP 11947A.
18. Line Impedance Stabilization Network (L.I.S.N.) R&S. ESH2-Z5.

4. IDENTIFICATION DATA SUPPLIED BY THE APPLICANT

Identification data in this section has been supplied by the client.

4.1 APPLICANT

Name or Company: NEONODE AB.

V.A.T.: 556655-5099

Address: Biblioteksgastan 11

City: Stockholm

Postal code: SE-11146

Country: Sweden

Telephone: +46 8 6781850

Fax: +46 8 6781851

4.2 REPRESENTATIVE

Name: Ulf Martensson.

4.3 TEST SAMPLES SUPPLIER

Name or Company: Same as indicated in point 4.1.

Samples undergoing test have been selected by: **the client**.

4.4 IDENTIFICATION OF ITEM/ITEMS TESTED

Product: Mobile phone with bluetooth

Trade mark: Neonode

Model: N2

HW version: R1

SW version: 2.1.231.1

Manufacturer: NEONODE AB.

Country of manufacture: Sweden

Description: Mobile phone with bluetooth

Report No.: 25810RET.201		Page: 5 of 8
Date: 2007-08-03		

5. USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS

5.1 USAGE OF SAMPLES

Sample M/01 is formed by the following elements:

<u>Control No.</u>	<u>Description</u>	<u>Model</u>	<u>Serial No.</u>	<u>Date of reception</u>
25810/03	Mobile phone with integral antenna	N2	----	19/02/07

Sample M/02 is formed by the following elements:

<u>Control No.</u>	<u>Description</u>	<u>Model</u>	<u>Serial No.</u>	<u>Date of reception</u>
25810/34	Mobile phone with antenna connector	N2	353153000113308	05/06/07

Sample S/01 is composed of the following elements:

<u>Control No.</u>	<u>Description</u>	<u>Model</u>	<u>Serial No.</u>	<u>Date of reception</u>
25810/31	Mobile phone with integral antenna	N2	353153000112805	30/05/07
25810/24	Battery charger	Y-RAY81	----	26/04/07

1. Sample M/01 has undergone following test(s).
Radiated tests indicated in annexes A and B.
2. Sample M/02 has undergone following test(s).
All tests indicated in annexes A and B, except radiated tests.
3. Sample S/01 has undergone to the following test(s):
Continuous conducted emission, power leads, in Annex C.

5.2 PERIOD OF TESTING

The performed test started on 2007-02-26 and finished on 2007-07-09.

The tests as detailed in this report have been performed at AT4 WIRELESS.

Report No.: 25810RET.201		Page: 6 of 8
Date: 2007-08-03		

5.3 ENVIRONMENTAL CONDITIONS

In the control chamber the following limits were not exceeded during the test:

Temperature	Min. = 24 °C Max. = 24 °C
Relative humidity	Min. = 48 % Max. = 48 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

In the semianechoic chamber (21 meters x 11 meters x 8 meters) the following limits were not exceeded during the test.

Temperature	Min. = 25 °C Max. = 25 °C
Relative humidity	Min. = 51 % Max. = 51 %
Air pressure	Min. = 1020 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements the following limits were not exceeded during the test:

Temperature	Min. = 24 °C Max. = 24 °C
Relative humidity	Min. = 51 % Max. = 51 %
Air pressure	Min. = 1020 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Report No.: 25810RET.201		Page: 7 of 8
Date: 2007-08-03		

6. TEST RESULTS

Abbreviations used in the VERDICT column of the following tables are:

- P** Pass
- F** Fail
- NA** not applicable
- NM** not measured

FCC PART 22 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 22.913: RF output power	P			
Clause 2.1055: Frequency stability	P			
Clause 22.917: Spurious emissions at antenna terminals	P			
Clause 22.917: Radiated emissions	P			

FCC PART 24 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 24.232: RF output power	P			
Clause 24.235: Frequency stability	P			
Clause 24.238: Spurious emissions at antenna terminals	P			
Clause 24.238: Radiated emissions	P			

MEASURING RESULTS FOR ELECTROMAGNETIC EMISSION	VERDICT			
	NA	P	F	NM
Continuous conducted emission, power leads. Class B and C	P			

7. REMARKS AND COMMENTS

None.

8. SUMMARY

Based on the results of the performed test, stated in annex A the item under test is **IN COMPLIANCE** with the specifications listed in section 3.1 “TEST REQUESTED”.

NOTE: The results presented in this Test Report apply only to the particular item under test declared in section 4.4 “IDENTIFICATION OF ITEM/ITEMS TESTED” of this document, as presented for test on the date(s) declared in section 5, “USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS”.

Report No.:		
25810RET.201		
Date: 2007-08-03		Page: 8 of 8

ANNEX A

TEST RESULTS FOR FCC PART 22

Report No: 25810RET.201

Report No: 25810RET.201		Page: 1 of 29
Date: 2007-08-03		Annex A

INDEX

	Page
TEST CONDITIONS	3
RF Output Power (conducted and E.R.P.).....	4
Modulation Characteristics.....	7
Frequency Stability.....	8
Occupied Bandwidth	10
Spurious emissions at antenna terminals.....	15
Spurious emissions at antenna terminals at Block Edges.....	18
Radiated emissions	20

Report No: 25810RET.201		Page: 2 of 29
Date: 2007-08-03		Annex A

TEST CONDITIONS

Power supply (V):

$V_{nom} = 3.8 \text{ Vdc}$

$V_{max} = 4.2 \text{ Vdc}$

$V_{min} = 3.6 \text{ Vdc}$

The subscripts nom, min and max indicates voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

Type of power supply = DC Voltage from rechargeable battery

Type of antenna = Integral antenna

TEST FREQUENCIES:

Lowest channel (128): 824.2 MHz

Middle channel (190): 836.6 MHz

Highest channel (251): 848.8 MHz

Report No: 25810RET.201		Page: 3 of 29
Date: 2007-08-03		Annex A

RF Output Power (conducted and E.R.P.)

SPECIFICATION

§2.1046 and 22.913.

The Effective Radiated Power (E.R.P.) of mobile transmitter and auxiliary test transmitter must not exceed 7 Watts (38.45 dBm).

METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and GMSK modulated signal.

For radiated measurements the EUT was placed on a 1 m high non-conductive stand inside an anechoic chamber. The measuring antenna was placed at 3 m distance and the maximum field strength was measured for the three channels. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and GMSK modulated signal.

The Effective Radiated Power (E.R.P.) is obtained by using the Substitution Method according to ANSI/TIA/EIA-603-C: 2004.

RESULTS

MAXIMUM OUTPUT POWER (CONDUCTED). See plots in next pages.

Channel	Lowest	Middle	Highest
Maximum peak power (dBm)	32.90	33.19	33.24
Maximum peak power (W)	1.95	2.08	2.11
Measurement uncertainty (dB)	± 1.5		

MAXIMUM EFFECTIVE RADIATED POWER E.R.P. (RADIATED).


Channel	Lowest	Middle	Highest
Maximum peak power (dBm)	30.96	31.96	32.26
Maximum peak power (W)	1.25	1.57	1.68
Measurement uncertainty (dB)	± 3.8		

Verdict: PASS

Report No: 25810RET.201		Page: 4 of 29
Date: 2007-08-03		Annex A


PEAK OUTPUT POWER (CONDUCTED).

Lowest Channel: 824.2 MHz.

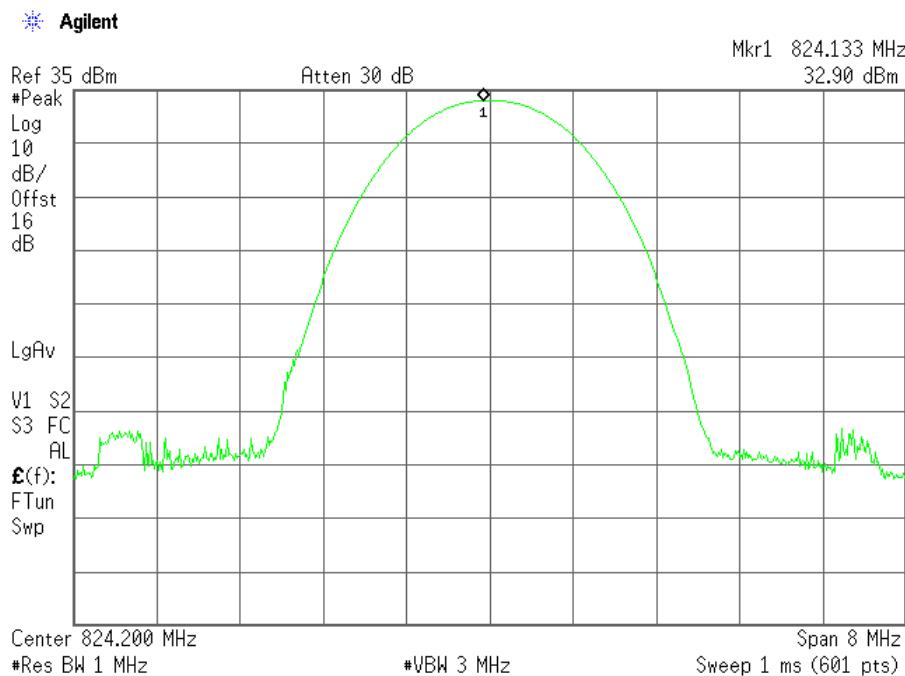

PEAK OUTPUT POWER (CONDUCTED).


Middle Channel: 836.6 MHz.

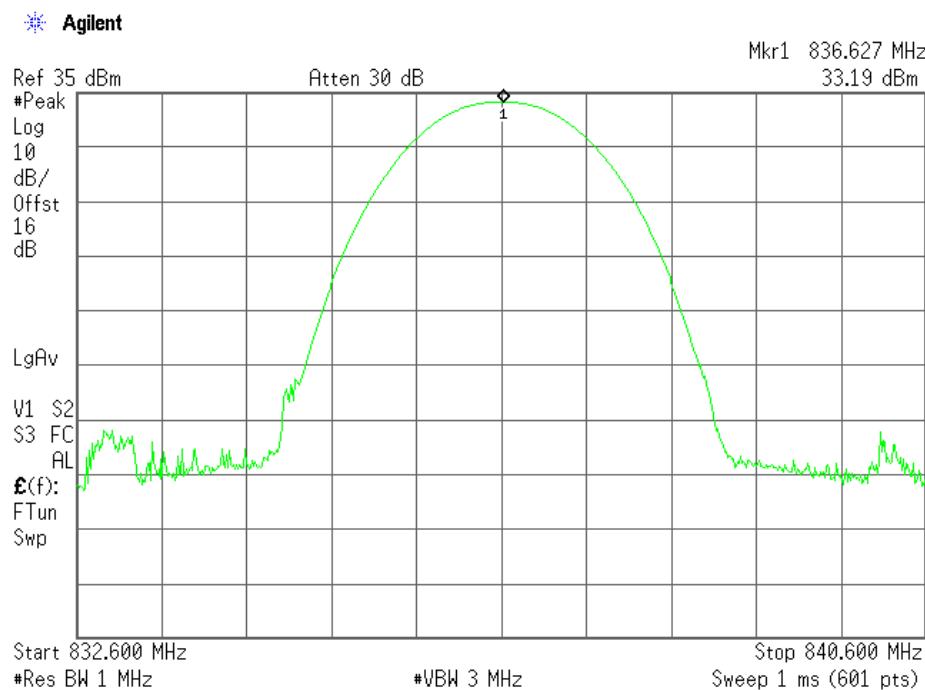

Report No: 25810RET.201		Page: 5 of 29
Date: 2007-08-03		Annex A

PEAK OUTPUT POWER (CONDUCTED).

Highest Channel: 848.8 MHz.

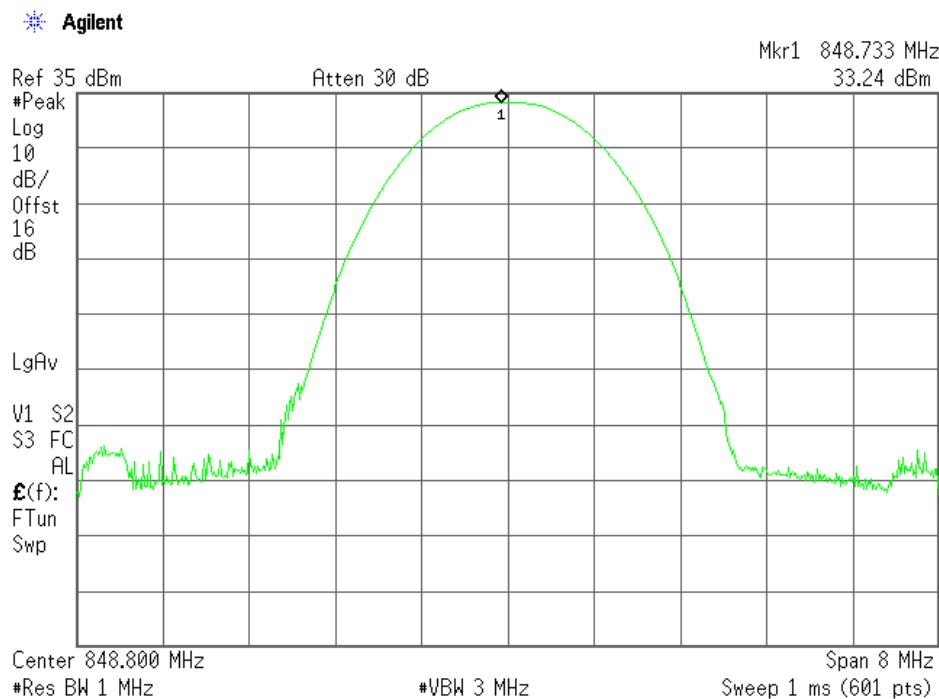

Report No:
25810RET.201

Date: 2007-08-03

FET45_00.DOC

Page: 6 of 29

Annex A

Modulation Characteristics

SPECIFICATION


§2.1047

METHOD

The EUT uses GMSK modulation, in which voice or data information is digitized and coded into a bit stream. The bits are conveyed through precise phase changes in the carrier.

RESULTS

The following plot shows the modulation scheme (GMSK) in the EUT.

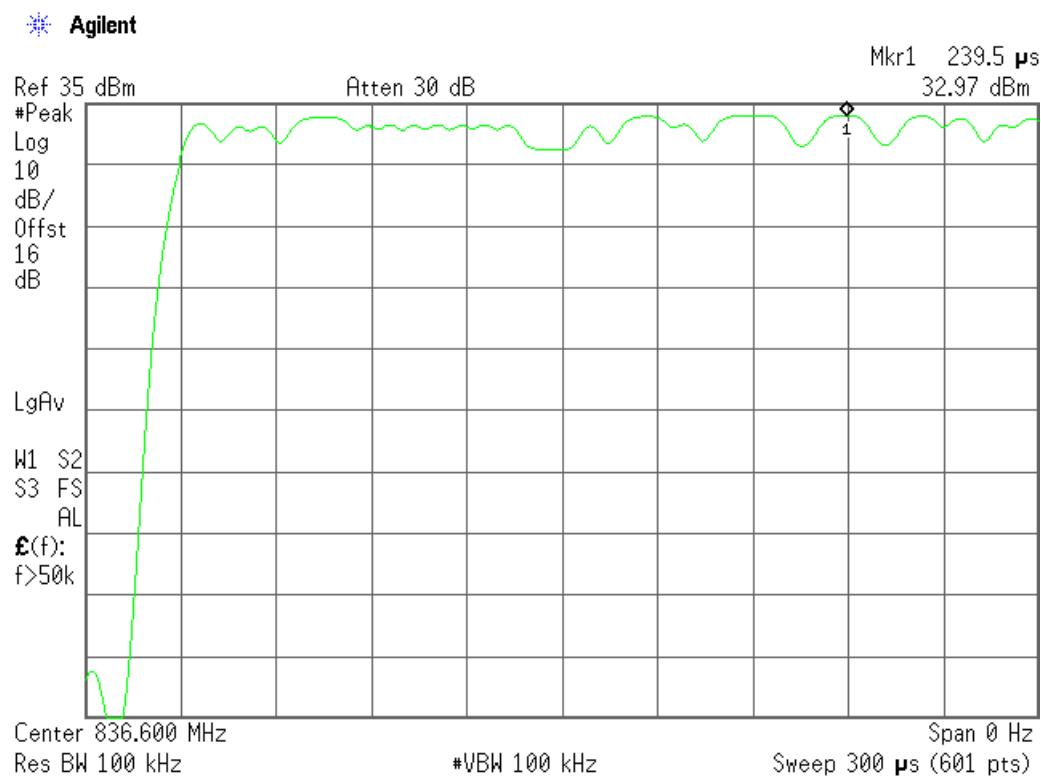

Frequency Stability

SPECIFICATION

§2.1055

METHOD

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The frequency tolerance measurements over voltage variations were made at room temperature and at the V_{max} and V_{min} supply voltages as declared by the applicant.

The EUT was set in “call mode” in the middle channel 190 (836.6 MHz) using the Universal Radio Communication tester R&S CMU200, and the maximum frequency error was measured using the frequency meter of CMU200.

RESULTS

Frequency stability over temperature variations.

Temperature ($^{\circ}\text{C}$)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	+14	0.0167	0.00000167
+40	+14	0.0167	0.00000167
+30	+9	0.0108	0.00000108
+20	+12	0.0143	0.00000143
+10	+19	0.0227	0.00000227
0	+12	0.0143	0.00000143
-10	+15	0.0179	0.00000179
-20	+14	0.0167	0.00000167
-30	+14	0.0167	0.00000167

Report No: 25810RET.201		Page: 8 of 29
Date: 2007-08-03		Annex A

Frequency stability over voltage variations.

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.2	+13	0.0155	0.00000155
Vmin	3.6	+13	0.0155	0.00000155

Report No: 25810RET.201		Page: 9 of 29
Date: 2007-08-03		Annex A

Occupied Bandwidth

SPECIFICATION

§2.1049

METHOD

The EUT was configured to transmit a GMSK modulated carrier signal. An IF bandwidth of 3 kHz was used to determine the occupied bandwidth of the modulated emission.

RESULTS


Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	285	290	287
-26 dBc bandwidth (kHz)	319	322	321
Measurement uncertainty (Hz)	<±40		

Report No: 25810RET.201		Page: 10 of 29
Date: 2007-08-03		Annex A

99% OCCUPIED BANDWIDTH


Lowest Channel: 824.2 MHz.

 Agilent

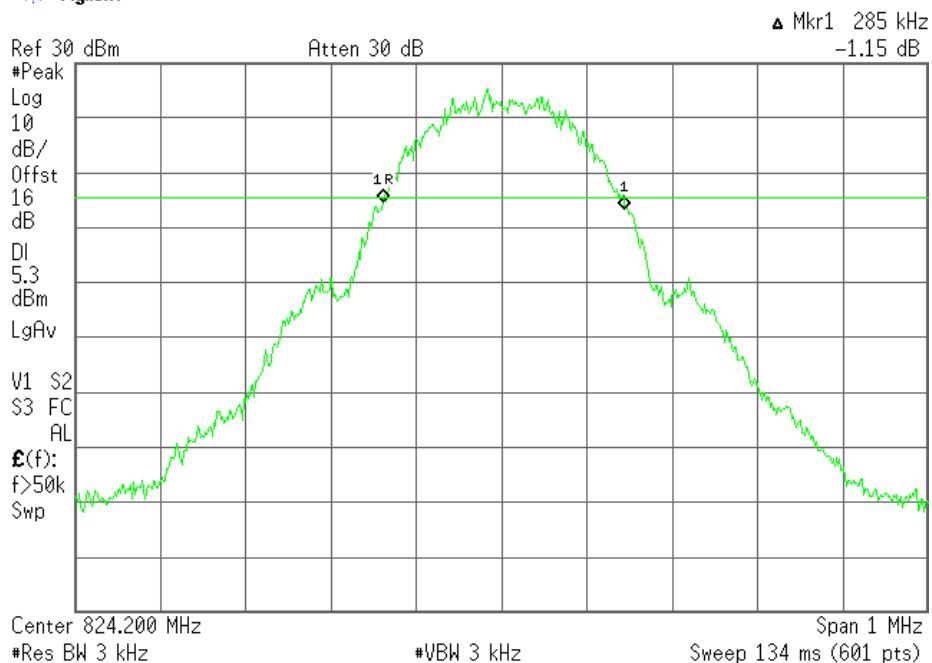

Middle Channel: 836.6 MHz.

 Agilent

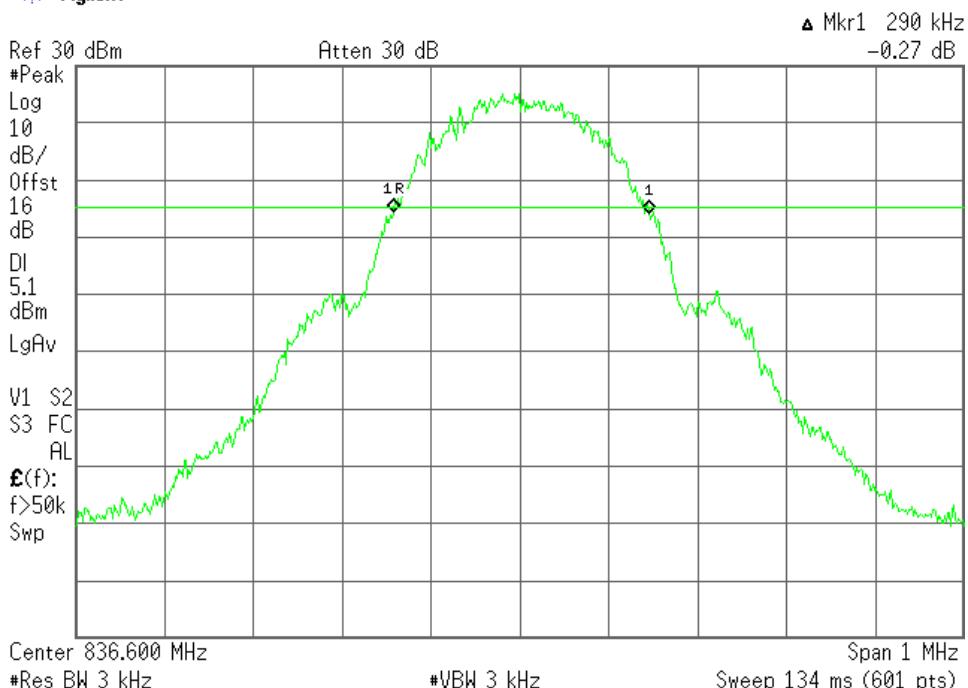

Report No:
25810RET.201


Date: 2007-08-03

FET45_00.DOC

Page: 11 of 29

Annex A

Highest Channel: 848.8 MHz.

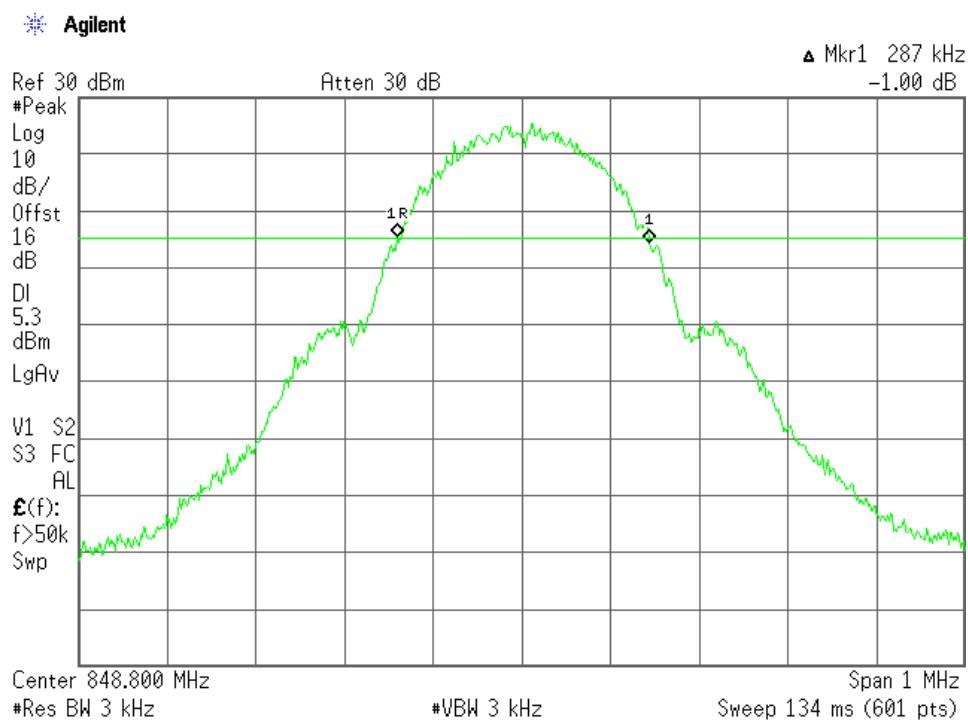

Report No:
25810RET.201

Date: 2007-08-03

FET45_00.DOC


Page: 12 of 29

Annex A

-26 dBc BANDWIDTH


Lowest Channel: 824.2 MHz.

* Agilent

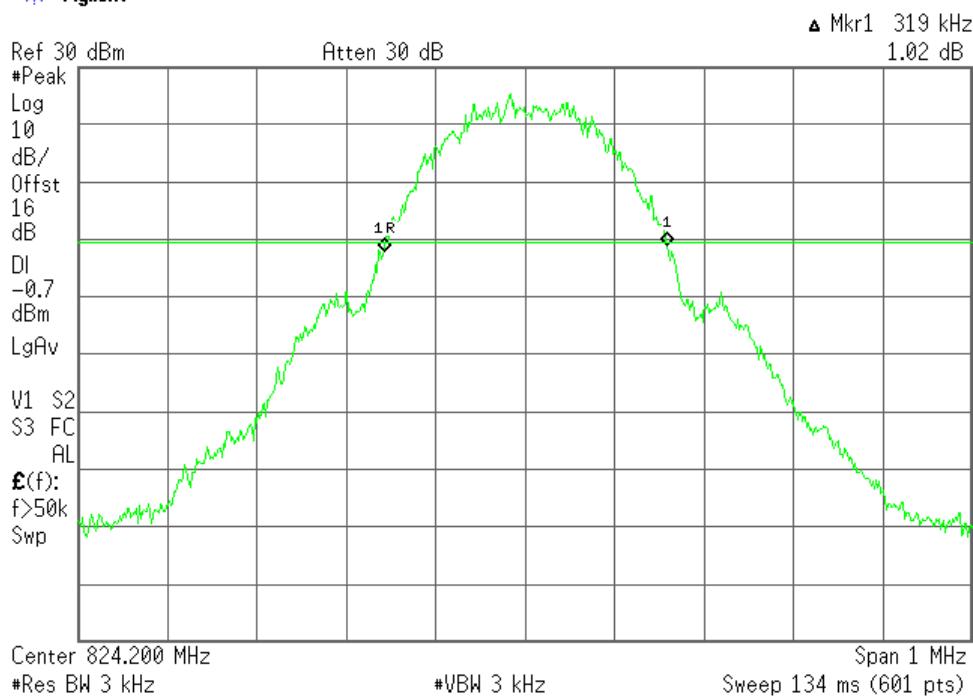

Middle Channel: 836.6 MHz.

* Agilent

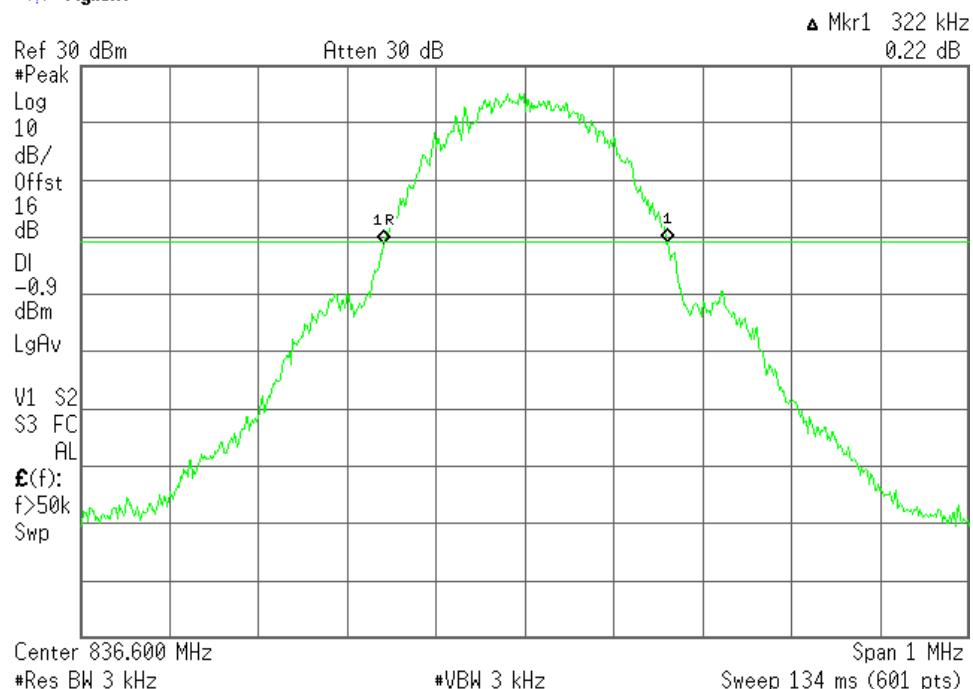

Report No:
25810RET.201

Date: 2007-08-03


FET45_00.DOC

Page: 13 of 29

Annex A

Highest Channel: 848.8 MHz.

* Agilent

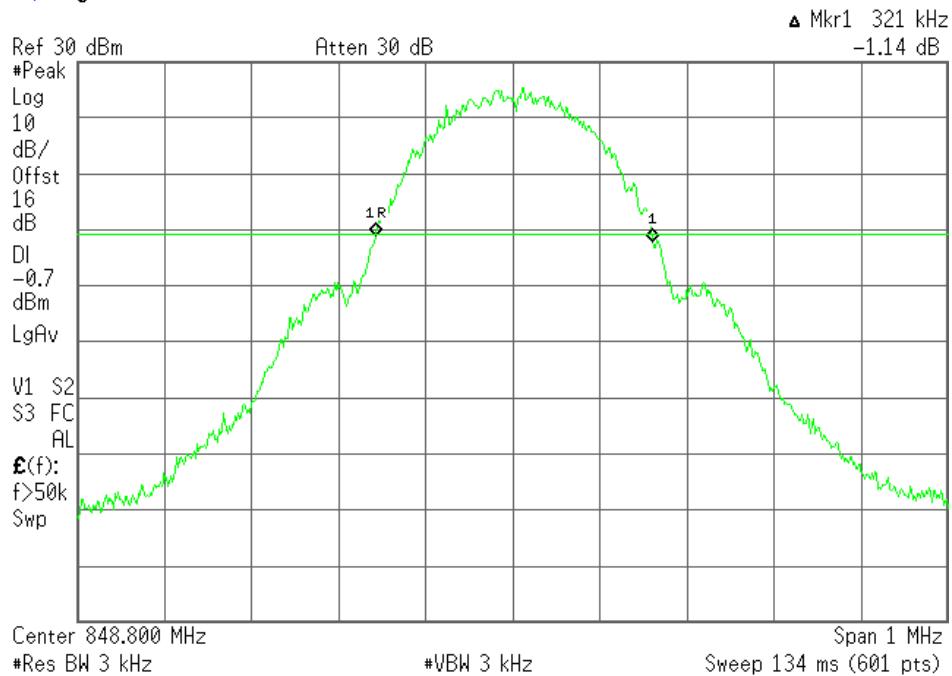

Report No:
25810RET.201

Date: 2007-08-03

FET45_00.DOC

Page: 14 of 29

Annex A

Spurious emissions at antenna terminals

SPECIFICATION

§2.1051 and §22.917

METHOD

The EUT RF output connector was connected to an spectrum analyser using an 50 ohm attenuator and the resolution bandwidth of the spectrum analyser was set to 100 kHz. The spectrum was investigated from 30 MHz to 10 GHz.

The reading of the spectrum analyser is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyser.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB, P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43 + 10 \log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = -13 \text{ dBm}$$

RESULTS (see plots in next pages)

1. CHANNEL: LOWEST (824.2 MHz).

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE (836.6 MHz).

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST (848.8 MHz).


No spurious signals were found in all the range.

Verdict: PASS

Report No: 25810RET.201		Page: 15 of 29
Date: 2007-08-03		Annex A

1. CHANNEL: LOWEST (824.2 MHz).


 Agilent

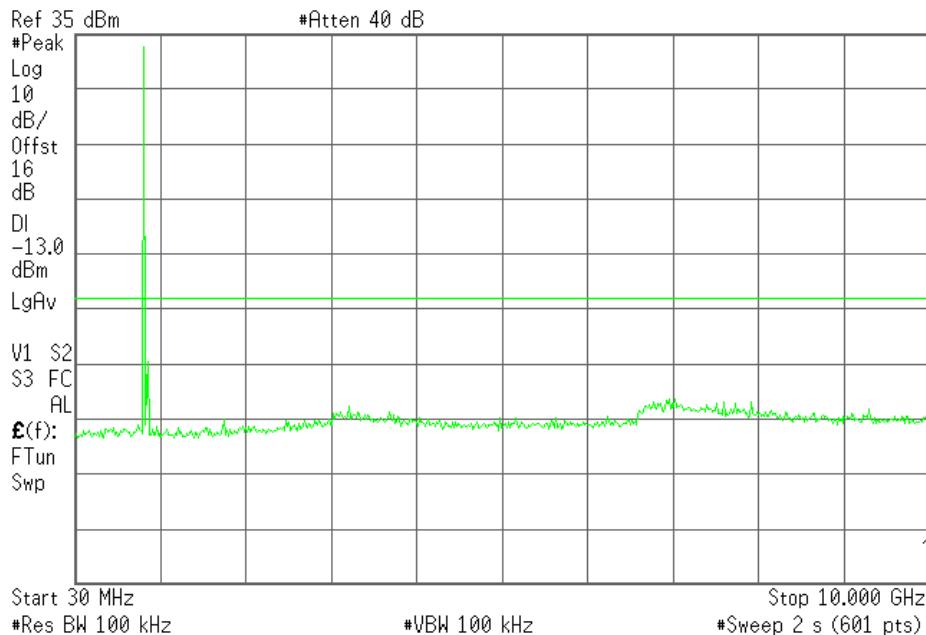

Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE (836.6 MHz).


 Agilent

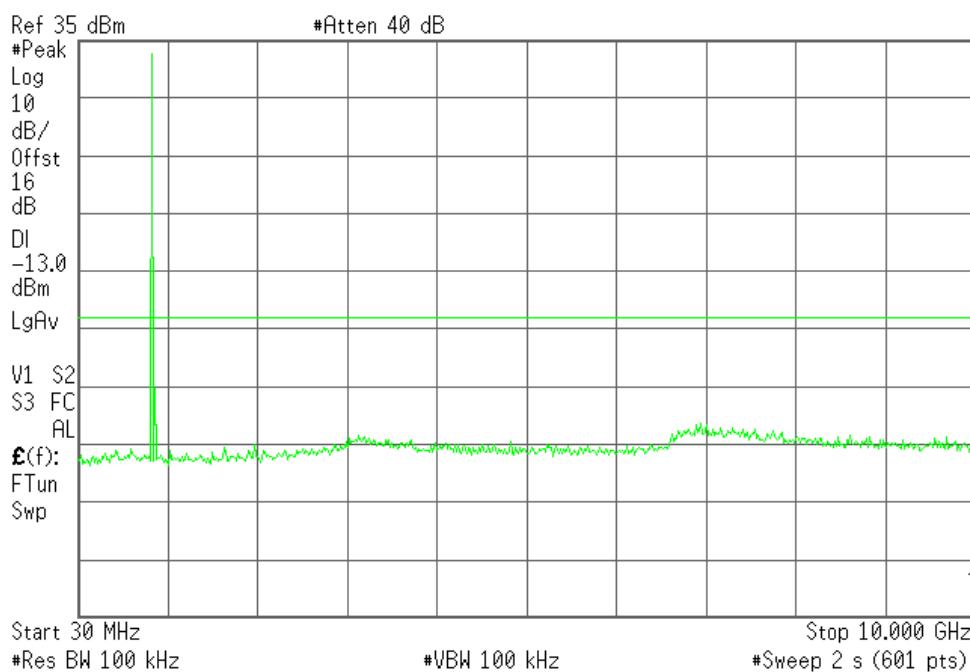

Note: The peak above the limit is the carrier frequency.

Report No: 25810RET.201		Page: 16 of 29
Date: 2007-08-03		Annex A

3. CHANNEL: HIGHEST (848.8 MHz).

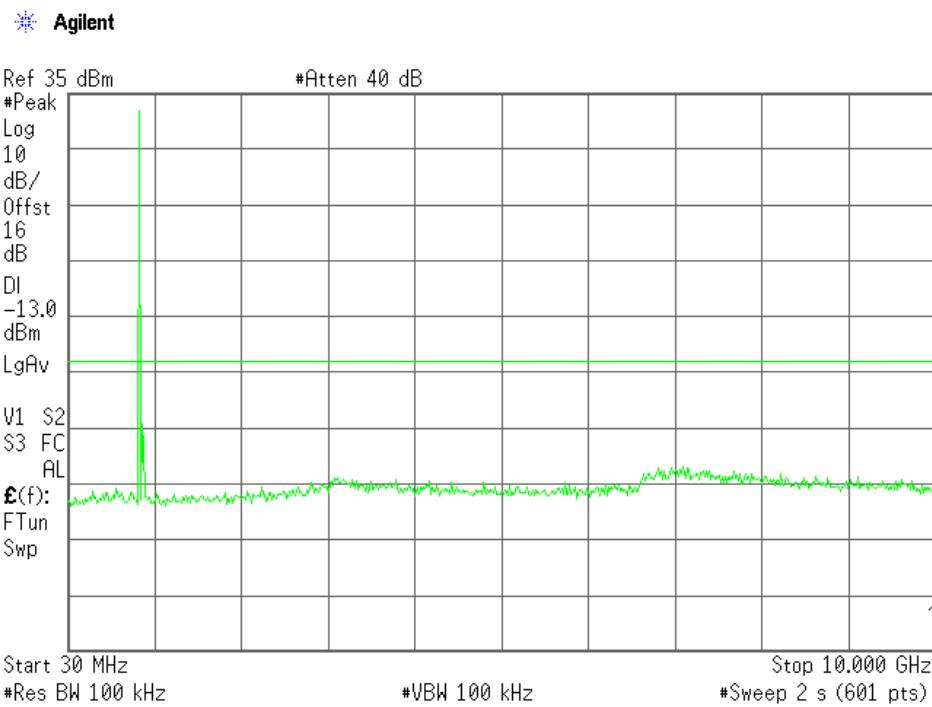

Note: The peak above the limit is the carrier frequency.

Report No: 25810RET.201		Page: 17 of 29
Date: 2007-08-03		Annex A

Spurious emissions at antenna terminals at Block Edges

SPECIFICATION

§2.1051 and §22.917

METHOD

As indicated in FCC part 22, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A resolution bandwidth of 3.3 kHz was used.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB, P in watts.


At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = -13 \text{ dBm}$$

RESULTS (see plots in next pages)


Report No: 25810RET.201		Page: 18 of 29
Date: 2007-08-03		Annex A

BLOCK A. CHANNEL LOWEST (824.2 MHz).

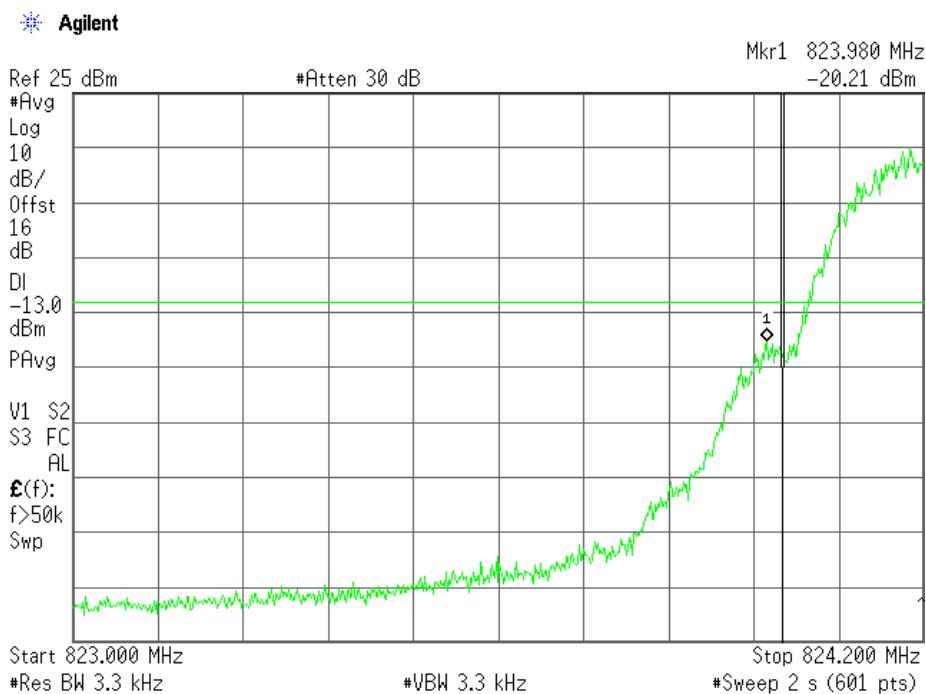

NOTE: The equipment transmits at the maximum output power (PCL= 5).

BLOCK B. CHANNEL HIGHEST (848.8 MHz).

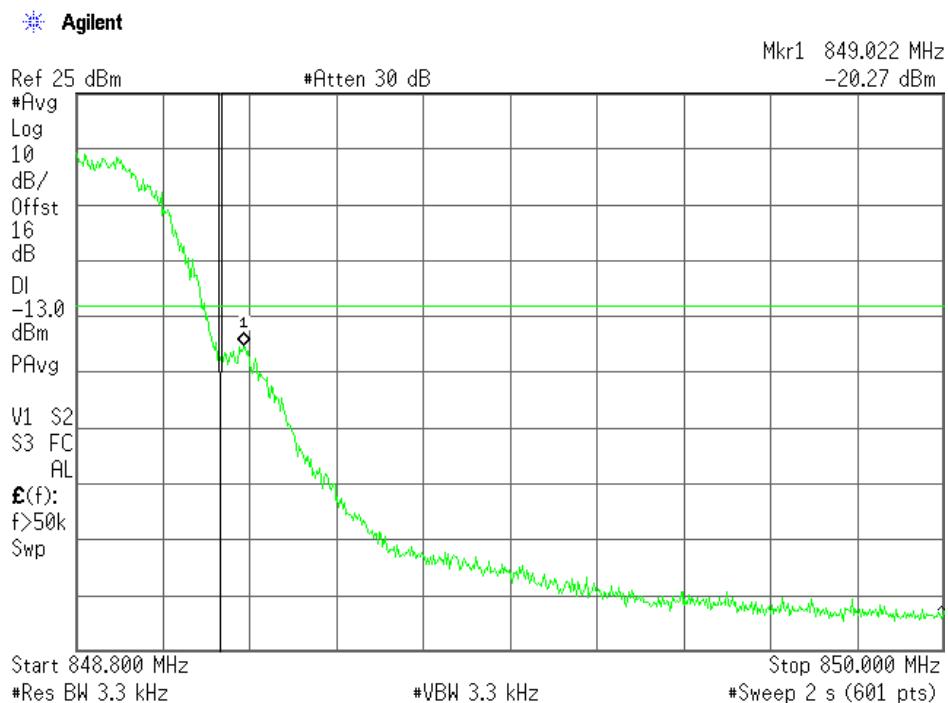

NOTE: The equipment transmits at the maximum output power (PCL= 5).

Verdict: PASS

Report No: 25810RET.201		Page: 19 of 29
Date: 2007-08-03		Annex A

Radiated emissions

SPECIFICATION

§ 22.917

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emissions were substituted by the Substitution method, in accordance with the ANSI/TIA/EIA-603-C: 2004.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB, P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43 + 10 \log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = -13 \text{ dBm}$$

Report No: 25810RET.201		Page: 20 of 29
Date: 2007-08-03		Annex A

RESULTS

1. CHANNEL: LOWEST (824.2MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

Spurious frequency (MHz)	Level (dBm)	Polarization	Measurement uncertainty (dB)
1648.37	-27.40	Vertical	± 4.0
3292.36	-38.08	Horizontal	± 4.0
4120.80	-36.78	Vertical	± 4.0
5769.40	-37.20	Horizontal	± 4.0
8241.47	-31.68	Horizontal	± 4.0
9890.90	-30.65	Vertical	± 4.0

2. CHANNEL: MIDDLE (836.6 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

Spurious frequency (MHz)	Level (dBm)	Polarization	Measurement uncertainty (dB)
1673.30	-24.54	Vertical	± 4.0
3346.53	-38.27	Horizontal	± 4.0
4182.80	-39.40	Vertical	± 4.0
5019.70	-39.21	Horizontal	± 4.0
5856.03	-36.87	Horizontal	± 4.0

Report No: 25810RET.201		Page: 21 of 29
Date: 2007-08-03		Annex A

3. CHANNEL: HIGHEST (848.8 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.


Spurious frequency (MHz)	Level (dBm)	Polarization	Measurement uncertainty (dB)
1697.58	-25.80	Vertical	± 4.0
3395.20	-39.61	Horizontal	± 4.0
4243.87	-34.68	Vertical	± 4.0
5092.83	-35.33	Vertical	± 4.0
5941.37	-37.03	Horizontal	± 4.0
7638.93	-34.05	Horizontal	± 4.0

Verdict: PASS

Report No: 25810RET.201		Page: 22 of 29
Date: 2007-08-03		Annex A

FREQUENCY RANGE 30 MHz-1000 MHz.


CHANNEL: LOWEST (824.2 MHz)

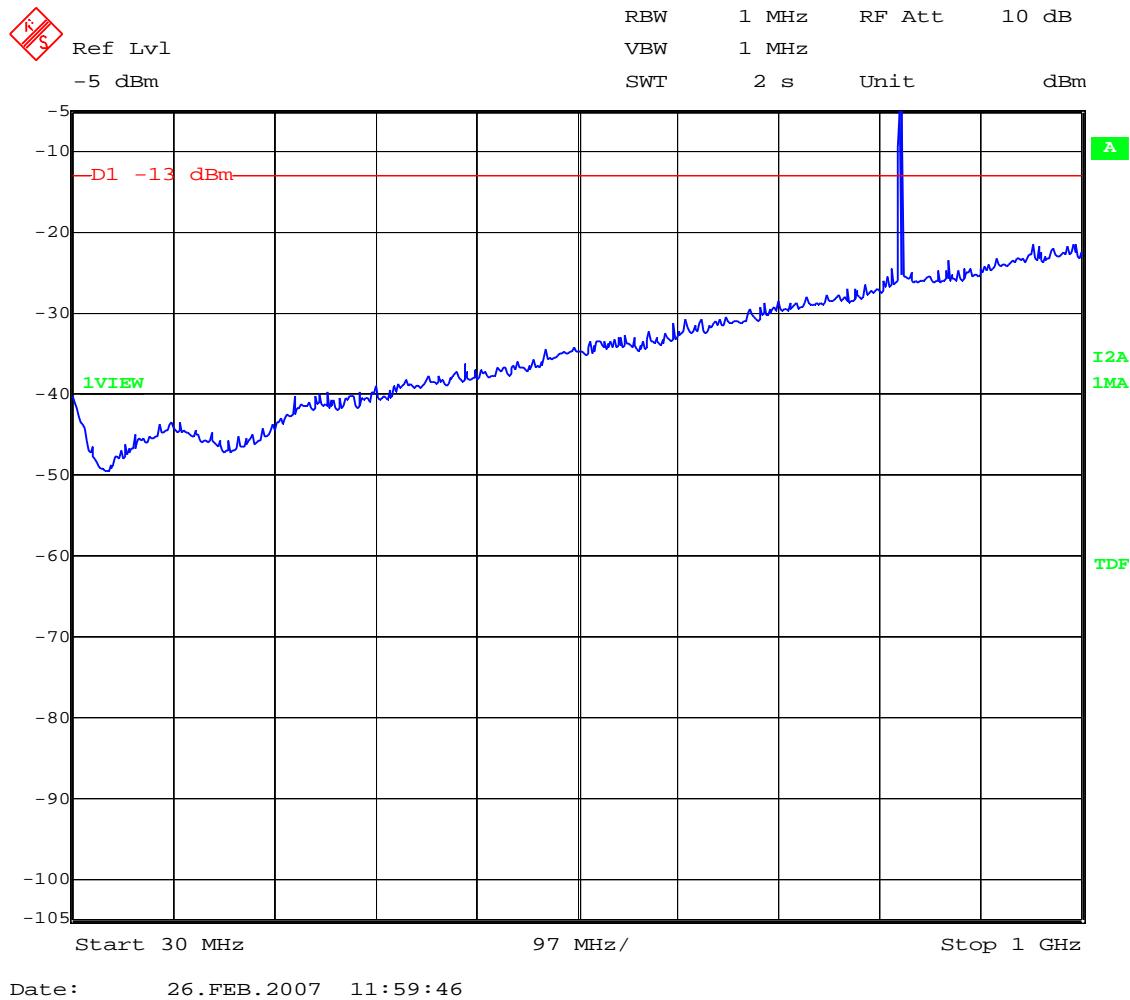

Note: The peak above the limit is the carrier frequency.

Report No: 25810RET.201		Page: 23 of 29
Date: 2007-08-03 FET45_00.DOC		Annex A


CHANNEL: MIDDLE (836.6 MHz)

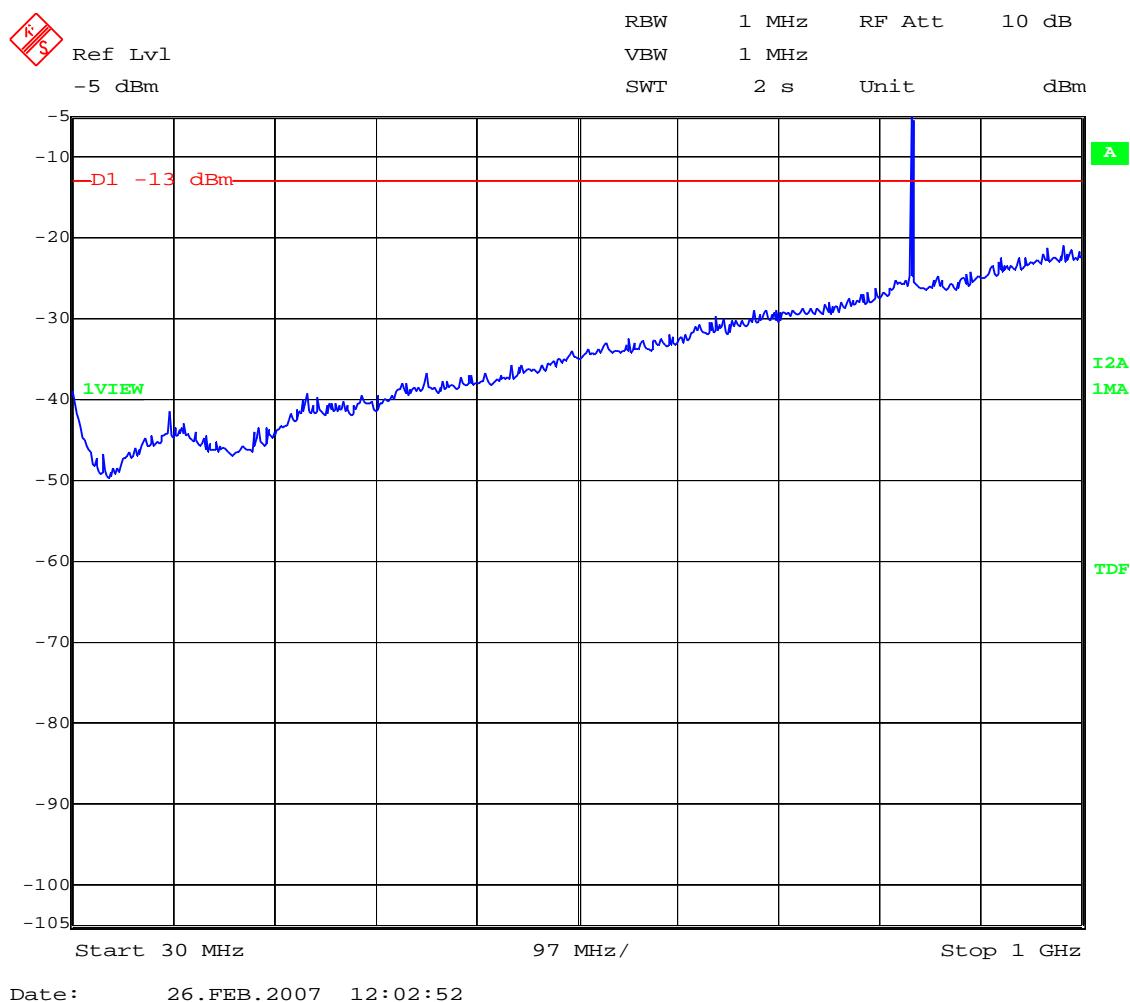

Note: The peak above the limit is the carrier frequency.

Report No: 25810RET.201		Page: 24 of 29
Date: 2007-08-03		Annex A

CHANNEL: HIGHEST (848.8 MHz)

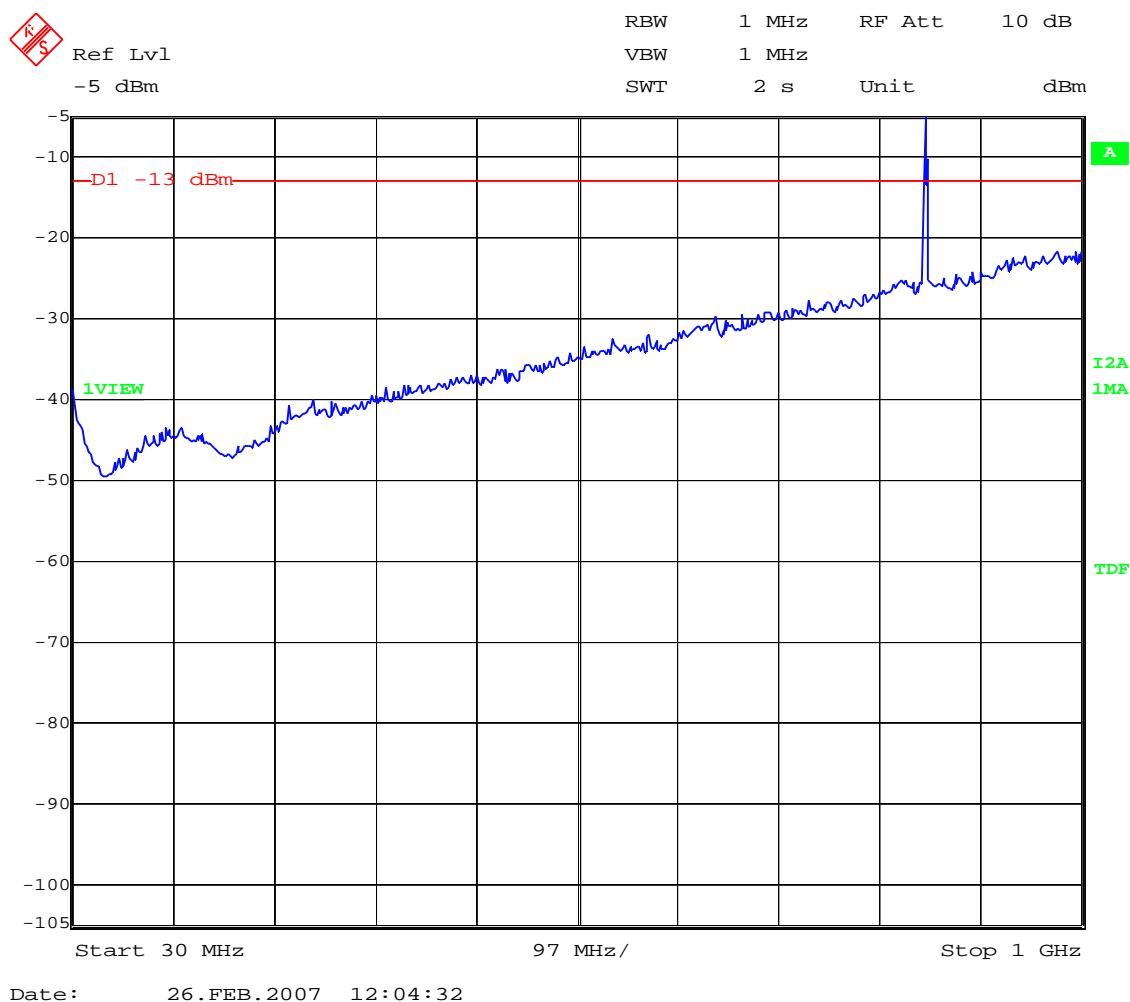


Note: The peak above the limit is the carrier frequency.

Report No: 25810RET.201		Page: 25 of 29
Date: 2007-08-03		Annex A

FREQUENCY RANGE 1 GHz to 3 GHz.


CHANNEL: LOWEST (824.2 MHz)

 Agilent

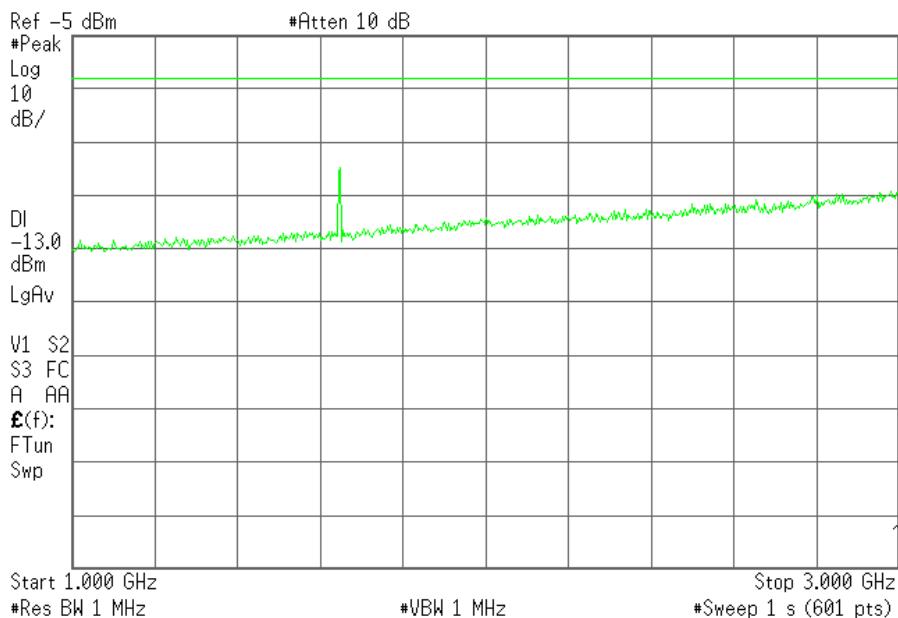

CHANNEL: MIDDLE (836.6 MHz)


 Agilent

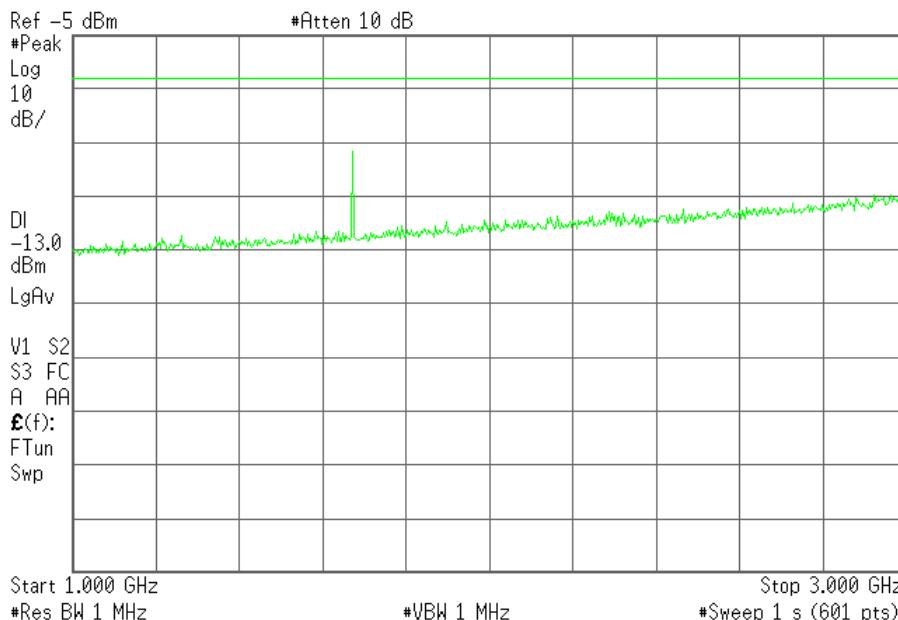

Report No: 25810RET.201		Page: 26 of 29
Date: 2007-08-03		Annex A

CHANNEL: HIGHEST (848.8 MHz)

* Agilent

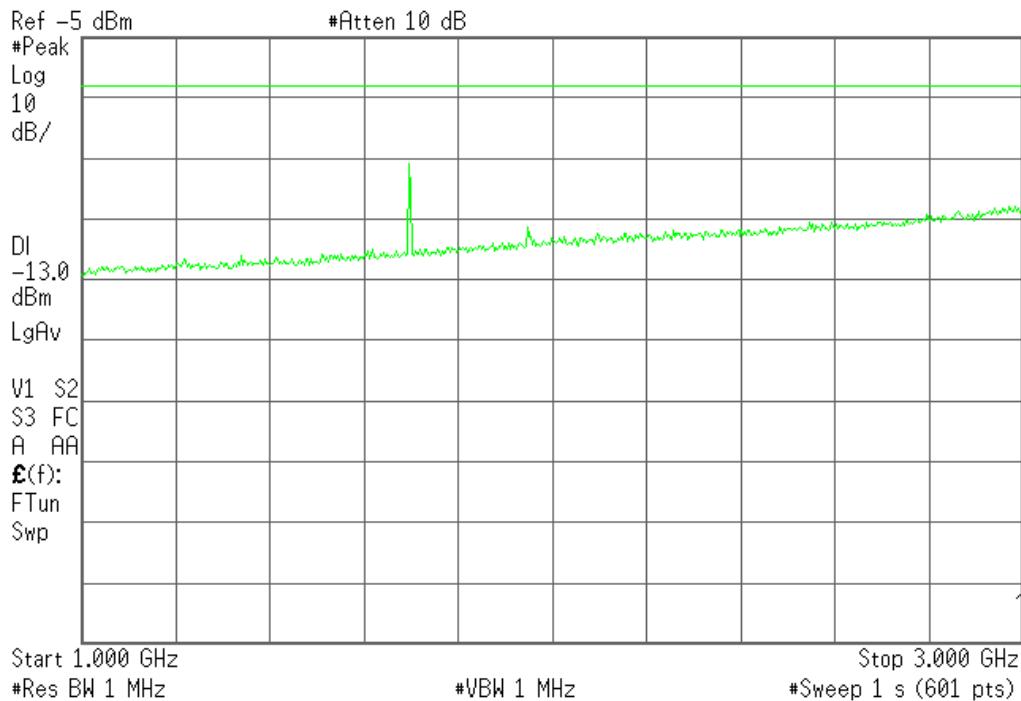


Report No: 25810RET.201		Page: 27 of 29
Date: 2007-08-03		Annex A

FREQUENCY RANGE 3 GHz to 12.75 GHz.


CHANNEL: LOWEST (824.2 MHz)

* Agilent

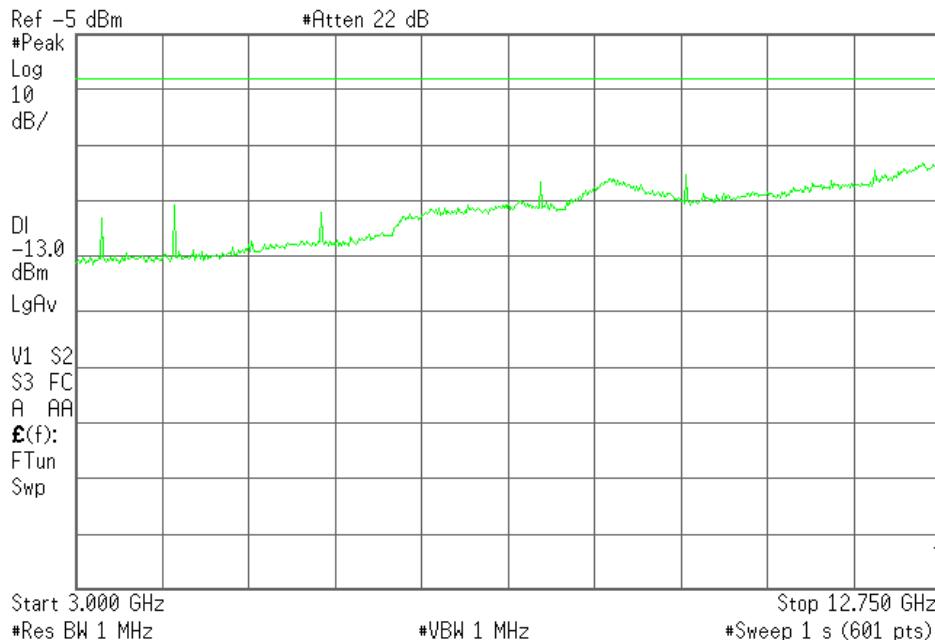

CHANNEL: MIDDLE (836.6 MHz)


* Agilent

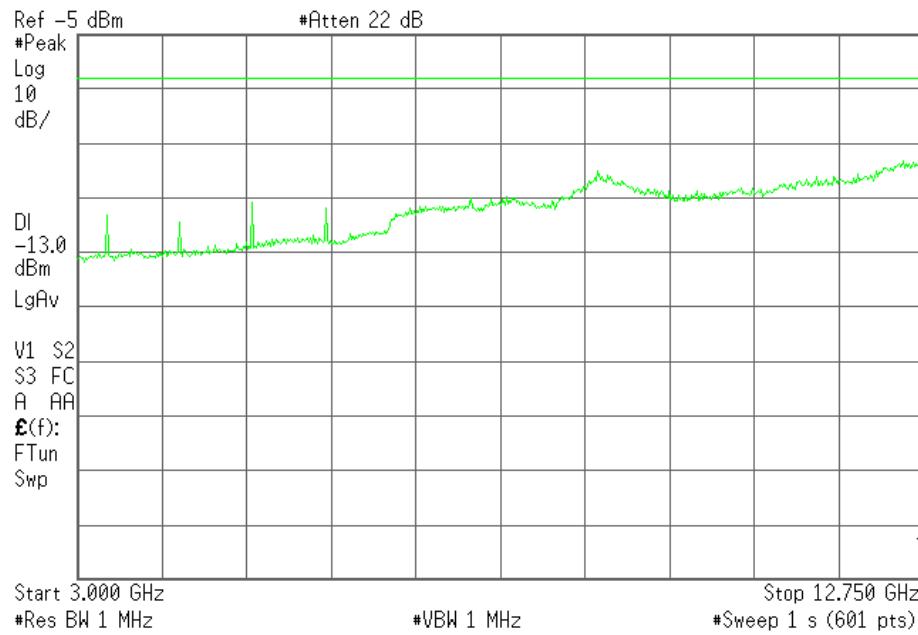

Report No: 25810RET.201		Page: 28 of 29
Date: 2007-08-03		Annex A

CHANNEL: HIGHEST (848.8 MHz)

 Agilent

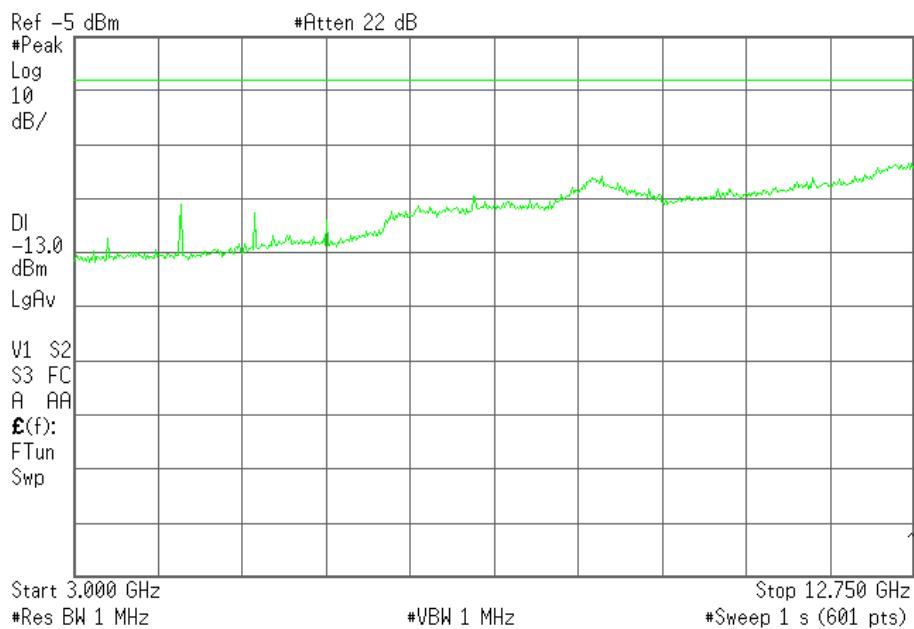

Report No:
 25810RET.201

Date: 2007-08-03

Page: 29 of 29

Annex A



ANNEX B
TEST RESULTS FOR FCC PART 24

Report No: 25810RET.201

Report No: 25810RET.201		Page: 1 of 29
Date: 2007-08-03		Annex B

INDEX

	Page
TEST CONDITIONS	3
RF Output Power (conducted and E.I.R.P.)	4
Modulation Characteristics.....	7
Frequency Stability.....	8
Occupied Bandwidth	10
Spurious emissions at antenna terminals	15
Spurious emissions at antenna terminals at Block Edges.....	18
Radiated emissions	20

Report No: 25810RET.201		Page: 2 of 29
Date: 2007-08-03		Annex B

TEST CONDITIONS

Power supply (V):

$V_{nom} = 3.8 \text{ Vdc}$

$V_{max} = 4.2 \text{ Vdc}$

$V_{min} = 3.6 \text{ Vdc}$

The subscripts nom, min and max indicates voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

Type of power supply = DC Voltage from rechargeable battery

Type of antenna = Integral antenna

TEST FREQUENCIES:

Lowest channel (512): 1850.2 MHz

Middle channel (662): 1880.2 MHz

Highest channel (810): 1909.8 MHz

Report No: 25810RET.201		Page: 3 of 29
Date: 2007-08-03		Annex B

RF Output Power (conducted and E.I.R.P.)

SPECIFICATION

§2.1046 and 24.232

Mobile/portable stations are limited to 2 Watts (33 dBm) Effective Isotropic Radiated Power (E.I.R.P.) peak power.

METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and GMSK modulated signal.

For radiated measurements the EUT was placed on a 1 m high non-conductive stand inside an anechoic chamber. The measuring antenna was placed at 1 m distance and the maximum field strength was measured for the three channels. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and GMSK modulated signal.

The Effective Isotropic Radiated Power (E.I.R.P.) is obtained by using the Substitution Method according to ANSI/TIA/EIA-603-C: 2004.

RESULTS

MAXIMUM OUTPUT POWER (CONDUCTED). See plots in next pages.

Channel	Lowest	Middle	Highest
Maximum peak power (dBm)	29.01	28.31	28.61
Maximum peak power (W)	0.80	0.68	0.73
Measurement uncertainty (dB)	± 1.5		

MAXIMUM EQUIVALENT ISOTROPIC RADIATED POWER E.I.R.P. (RADIATED).


Channel	Lowest	Middle	Highest
Maximum peak power (dBm)	29.27	28.53	28.51
Maximum peak power (W)	0.84	0.71	0.71
Measurement uncertainty (dB)	± 4.0		

Verdict: PASS

Report No: 25810RET.201		Page: 4 of 29
Date: 2007-08-03		Annex B


PEAK OUTPUT POWER (CONDUCTED).

Lowest Channel: 1850.2 MHz.

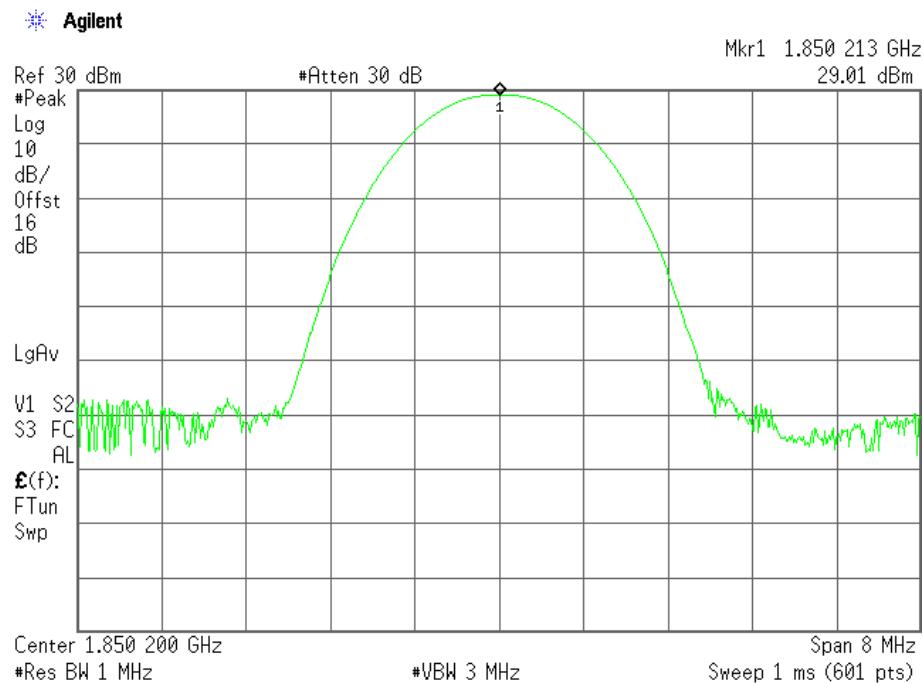

PEAK OUTPUT POWER (CONDUCTED).

Middle Channel: 1880.2 MHz.

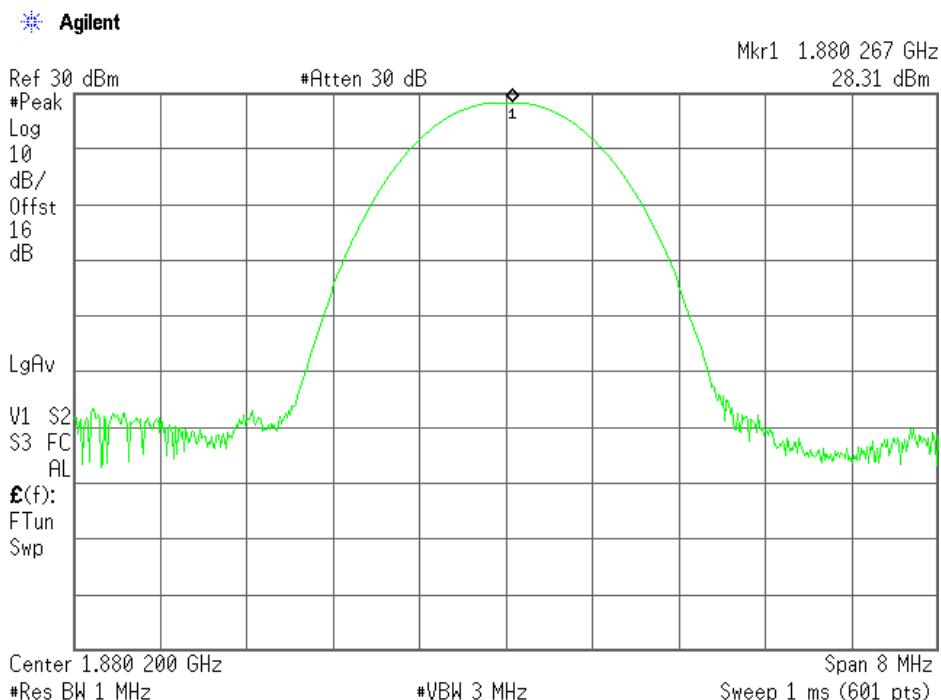

Report No:
25810RET.201

Date: 2007-08-03


FET45_00.DOC

Page: 5 of 29

Annex B

PEAK OUTPUT POWER (CONDUCTED).

Highest Channel: 1909.8 MHz.

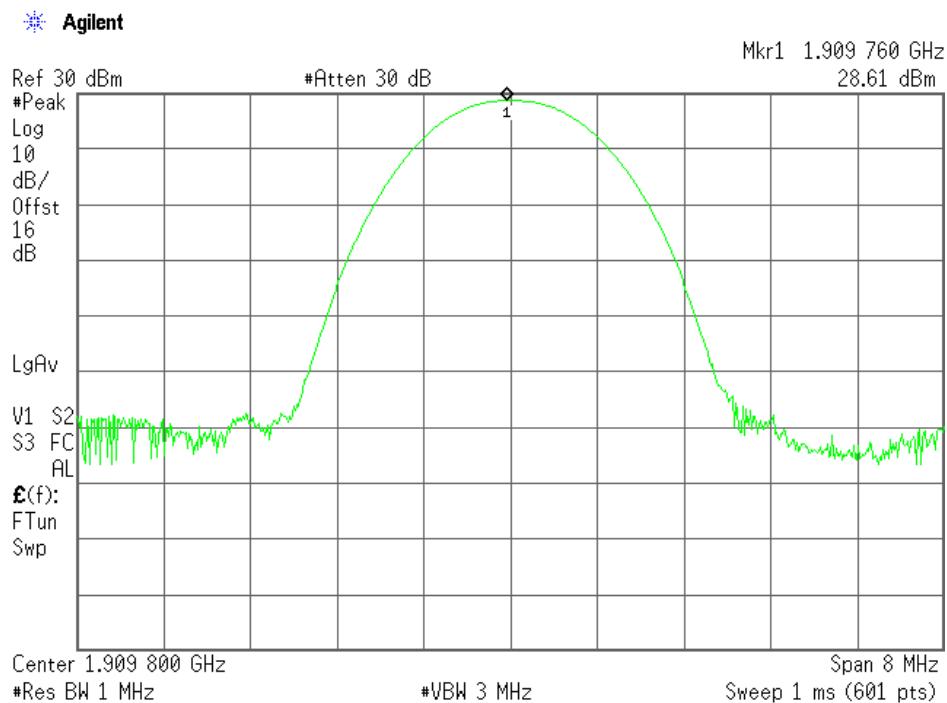

Report No:
25810RET.201

Date: 2007-08-03

FET45_00.DOC

Page: 6 of 29

Annex B

Modulation Characteristics

SPECIFICATION


§2.1047

METHOD

The EUT uses GMSK modulation, in which voice or data information is digitized and coded into a bit stream. The bits are conveyed through precise phase changes in the carrier.

RESULTS

The following plot shows the modulation scheme (GMSK) in the EUT.

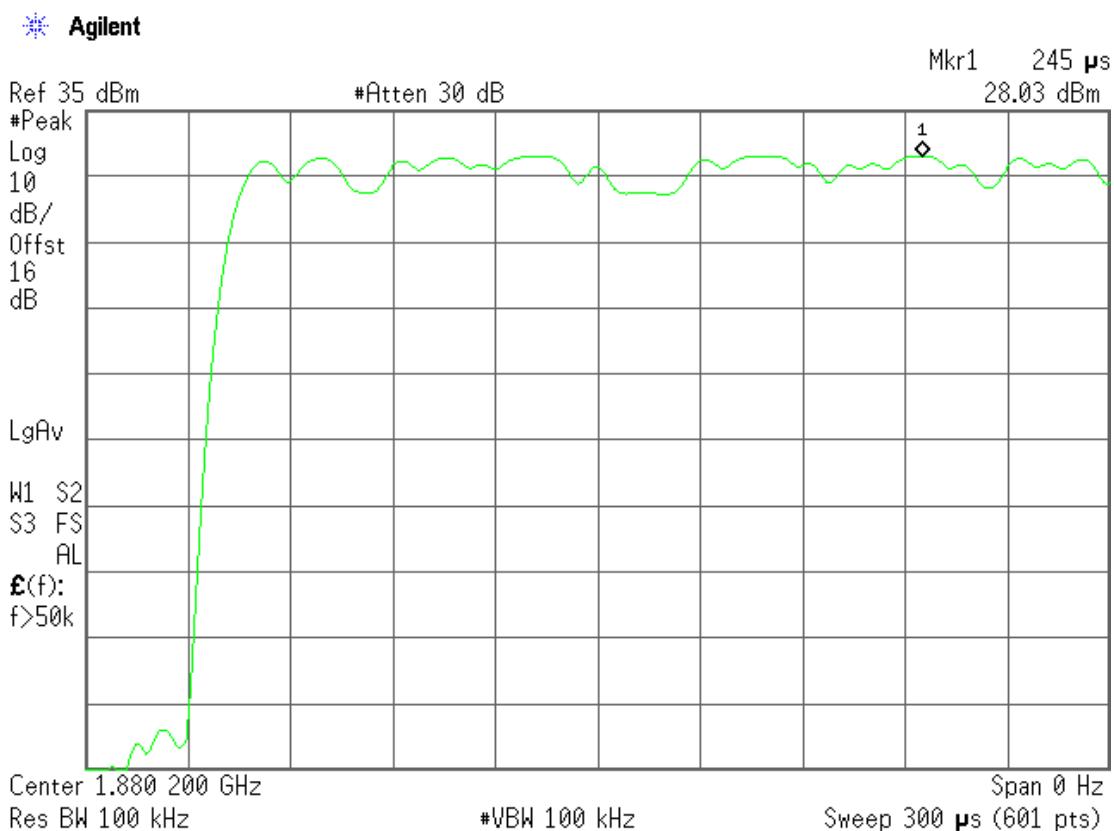

Report No: 25810RET.201		Page: 7 of 29
Date: 2007-08-03		Annex B

Frequency Stability

SPECIFICATION

§2.1055 and 24.235

METHOD

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The frequency tolerance measurements over voltage variations were made at room temperature and at the V_{max} and V_{min} supply voltages as declared by the applicant.

The EUT was set in “call mode” in the middle channel 662 (1880.2 MHz) using the Universal Radio Communication tester R&S CMU200, and the maximum frequency error was measured using the frequency meter of CMU200.

RESULTS

Frequency stability over temperature variations.

Temperature ($^{\circ}\text{C}$)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	+23	0.0122	0.00000122
+40	+25	0.0133	0.00000133
+30	+23	0.0122	0.00000122
+20	+20	0.0106	0.00000106
+10	+26	0.0138	0.00000138
0	+31	0.0165	0.00000165
-10	+20	0.0106	0.00000106
-20	+20	0.0106	0.00000106
-30	+21	0.0112	0.00000112

Report No: 25810RET.201		Page: 8 of 29
Date: 2007-08-03		Annex B

Frequency stability over voltage variations.

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.2	+6	0.0032	0.00000032
Vmin	3.6	+16	0.0085	0.00000085

Report No:
25810RET.201

Date: 2007-08-03

Page: 9 of 29

Annex B

Occupied Bandwidth

SPECIFICATION

§2.1049

METHOD

The EUT was configured to transmit a GMSK modulated carrier signal. An IF bandwidth of 3 kHz was used to determine the occupied bandwidth of the modulated emission.


RESULTS

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	280	277	279
-26 dBc bandwidth (kHz)	317	315	318
Measurement uncertainty (Hz)	<±40		


Report No: 25810RET.201		Page: 10 of 29
Date: 2007-08-03		Annex B

99% OCCUPIED BANDWIDTH

Lowest Channel: 1850.2 MHz.

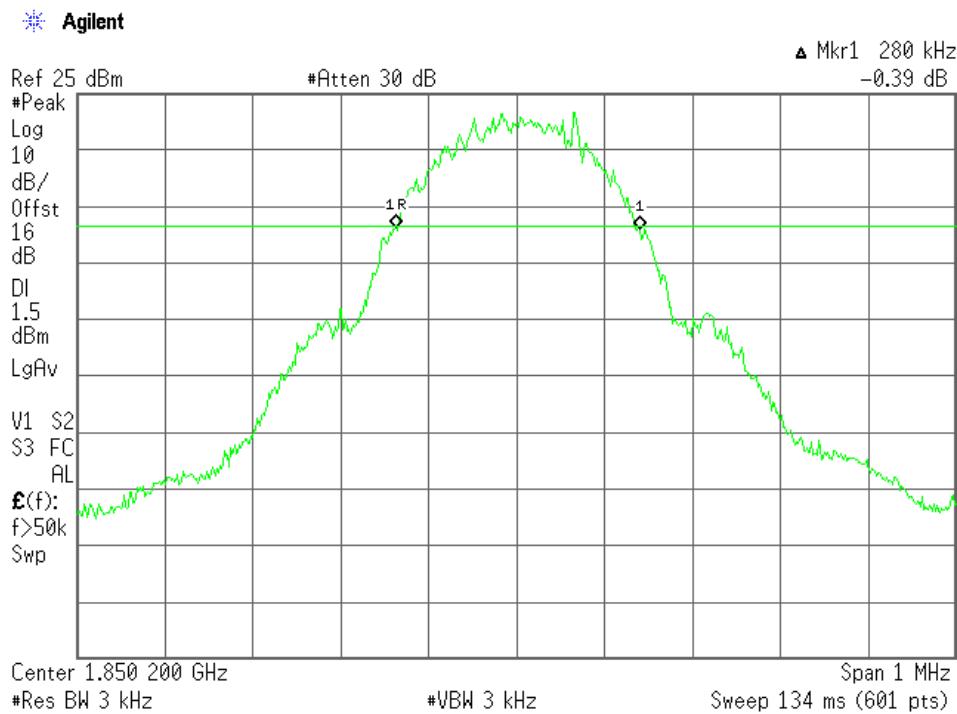

Middle Channel: 1880.2 MHz.

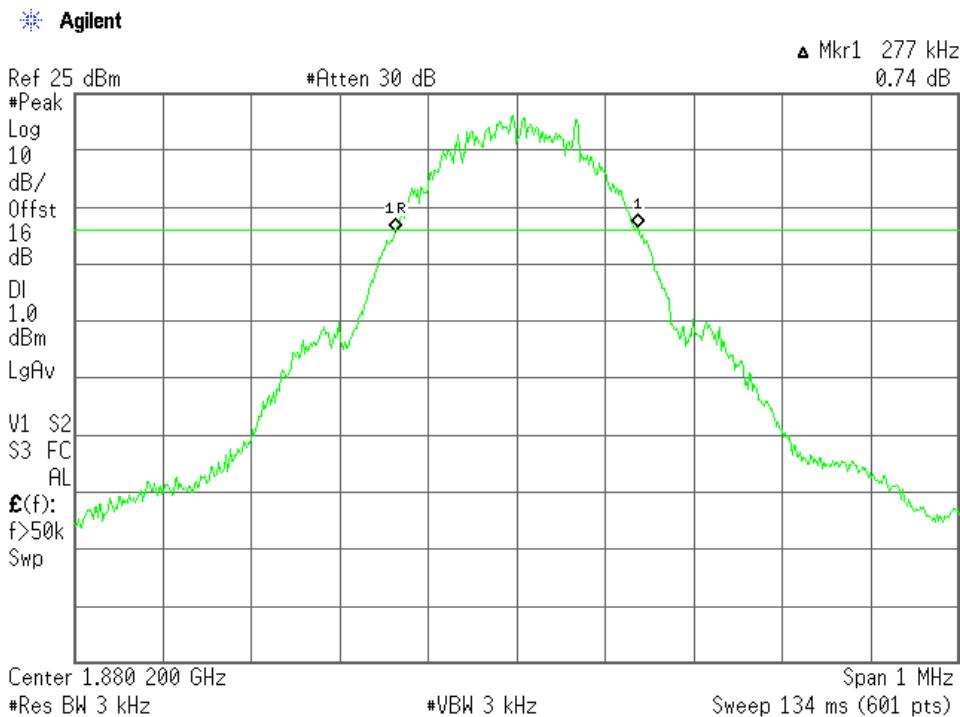

Report No:
25810RET.201


Date: 2007-08-03

FET45_00.DOC

Page: 11 of 29

Annex B

Highest Channel: 1909.8 MHz.

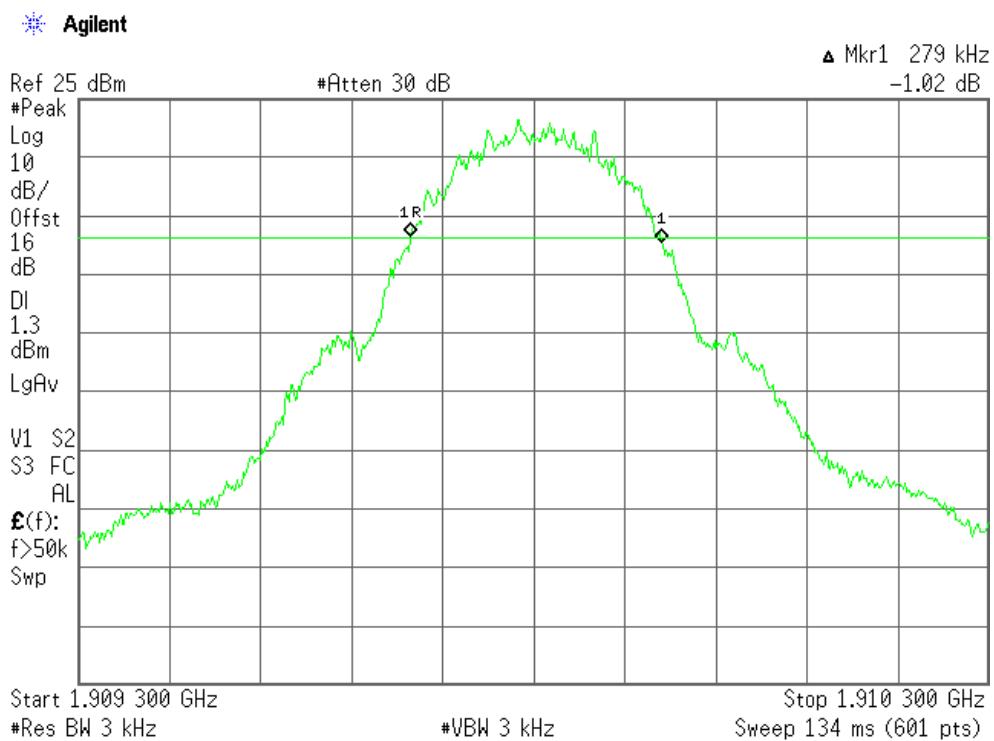

Report No:
25810RET.201

Date: 2007-08-03


FET45_00.DOC

Page: 12 of 29


Annex B

-26 dBc BANDWIDTH

Lowest Channel: 1850.2 MHz.

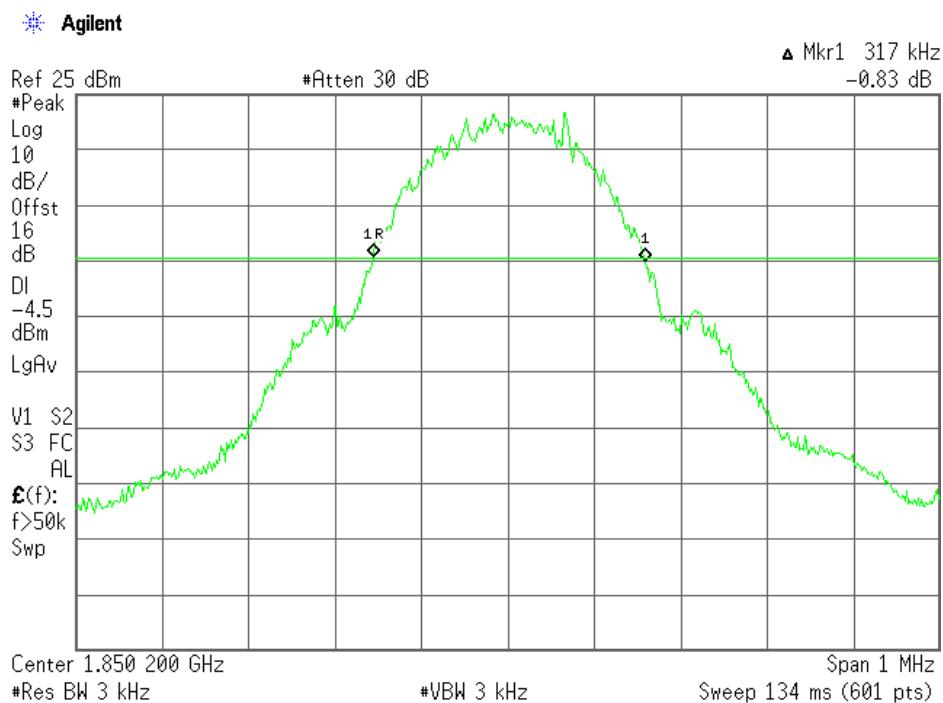

Middle Channel: 1880.2 MHz.

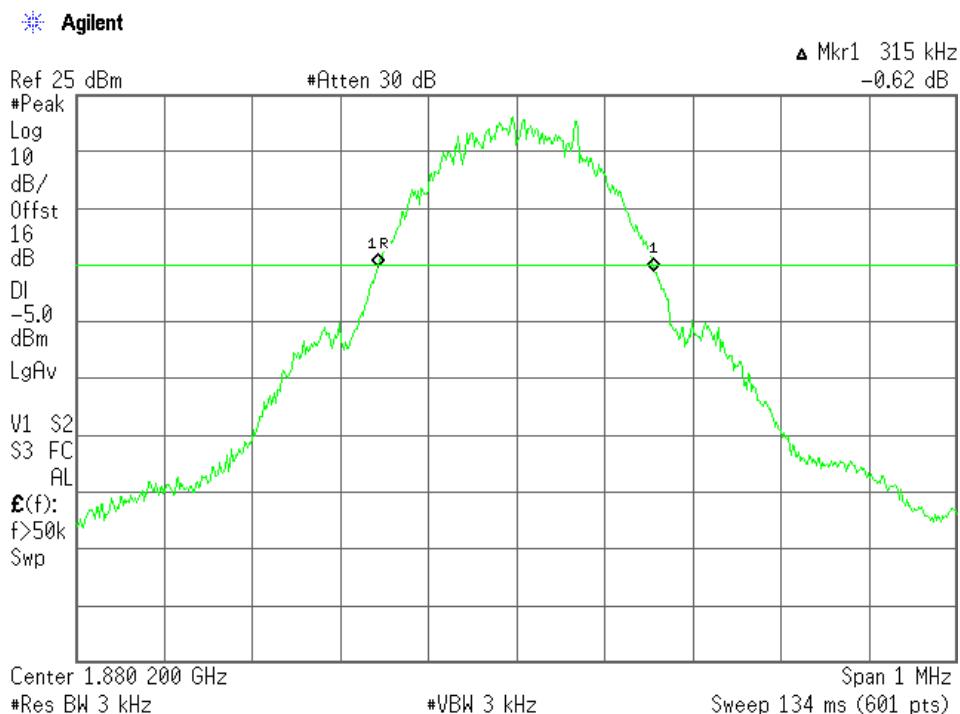

Report No:
25810RET.201

Date: 2007-08-03

FET45_00.DOC

Page: 13 of 29

Annex B