





Conducted Spurious Emissions Downlink High CH (30 MHz – 1 GHz)

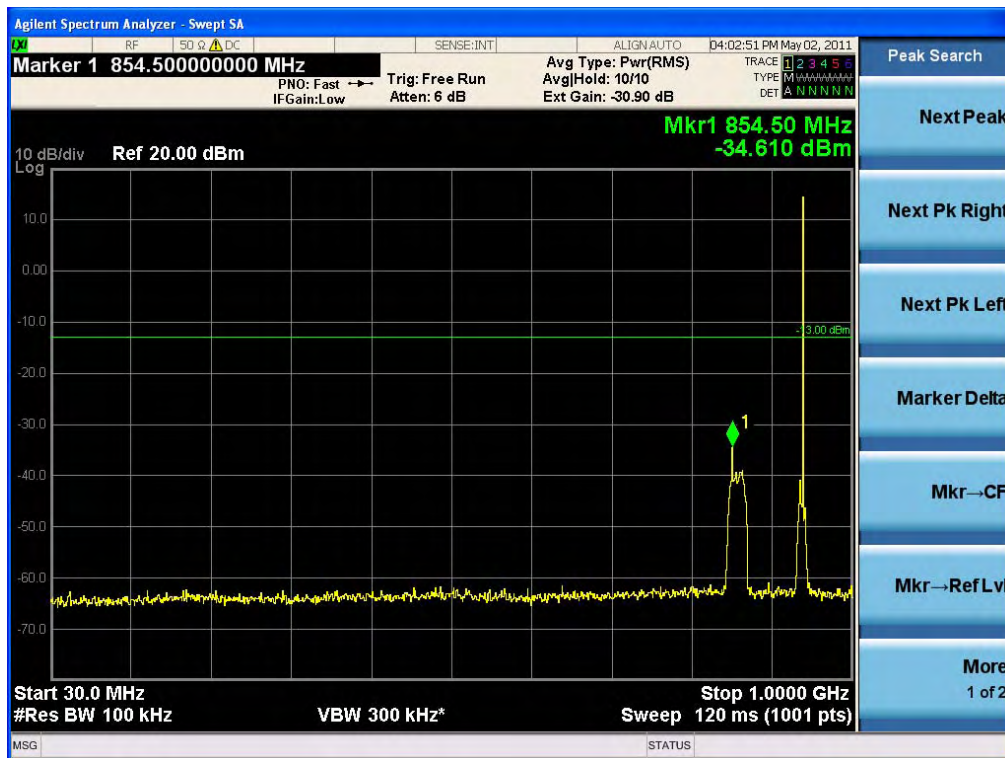

Conducted Spurious Emissions Downlink High CH (1 GHz – 26.5 GHz)

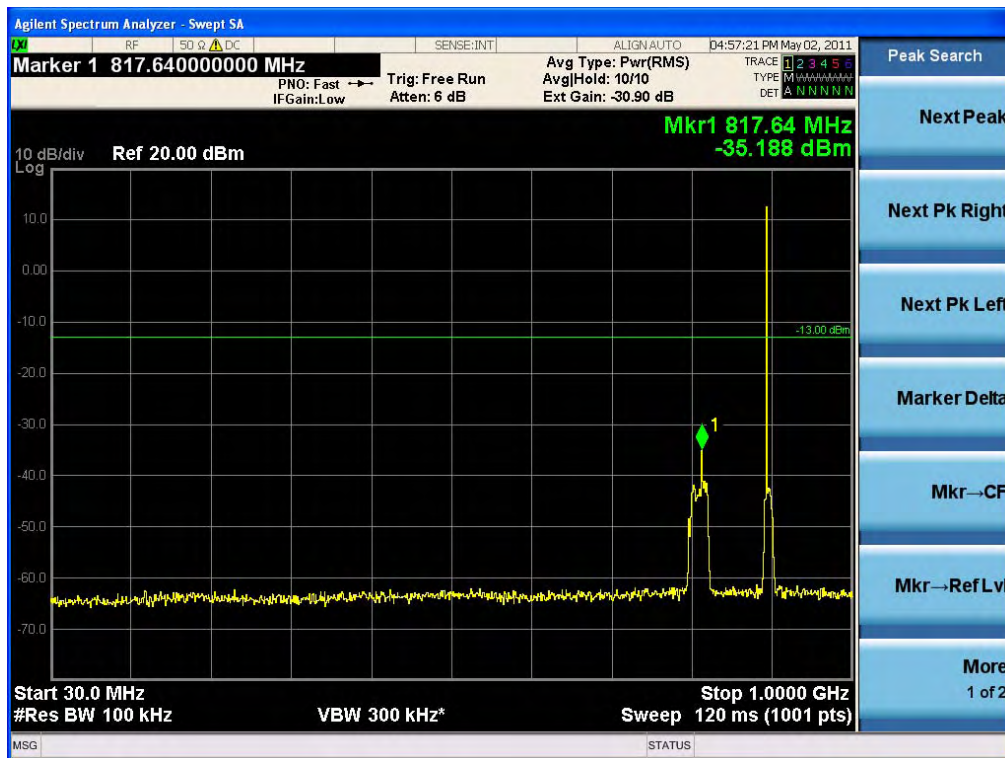

Conducted Spurious Emissions Uplink Low CH (30 MHz – 1 GHz)




Conducted Spurious Emissions Uplink Low CH (1 GHz – 26.5 GHz)







Plots of Two Tone Intermodulation, iDEN 900

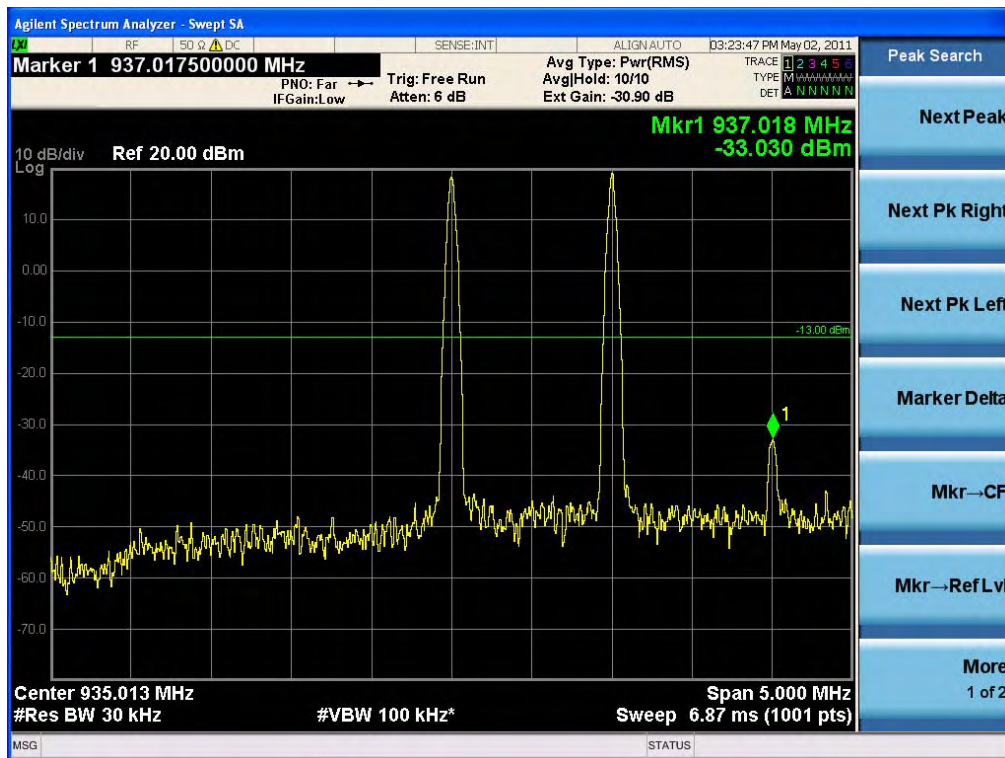


Two Tone Downlink Low End Intermodulation

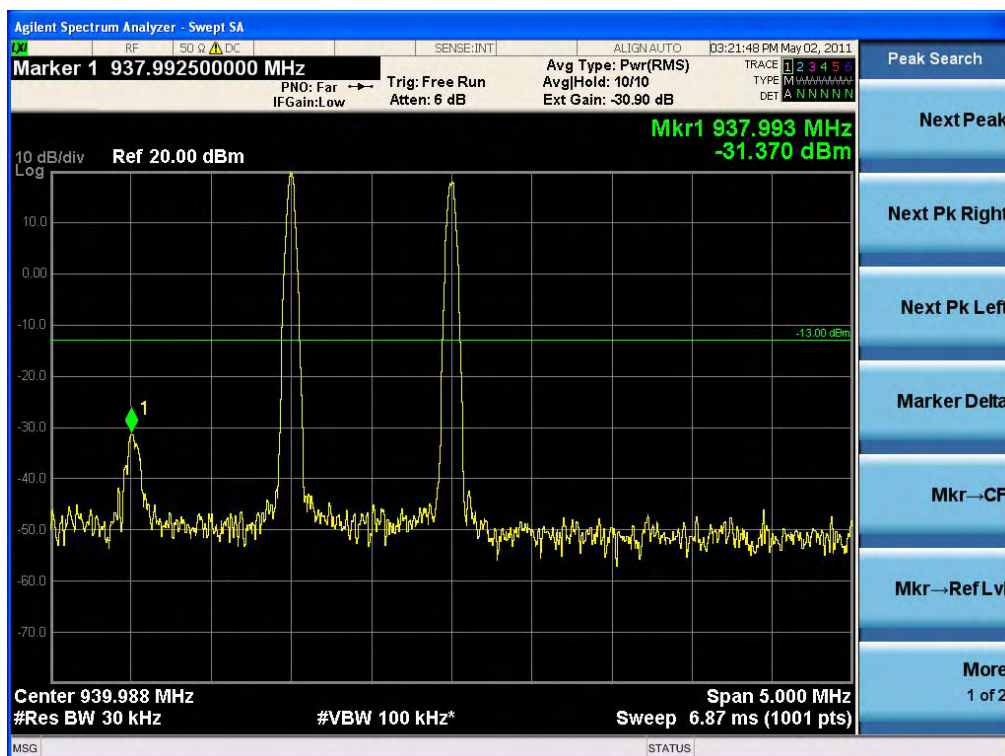

Two Tone Downlink Hi End Intermodulation

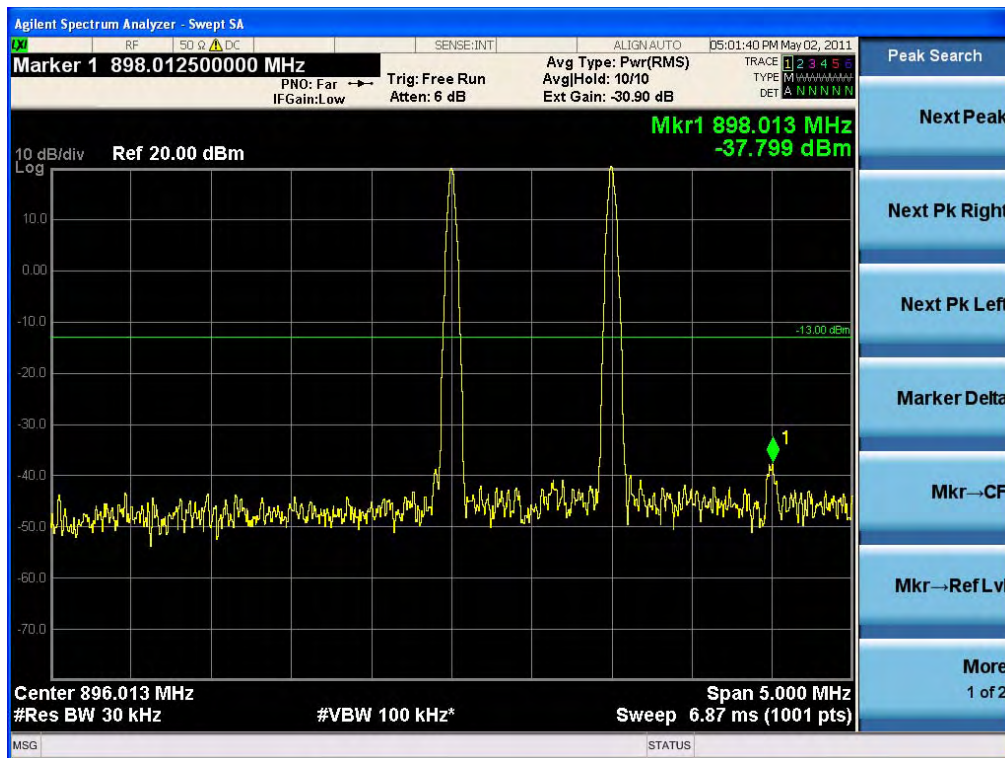


Two Tone Uplink Low End Intermodulation

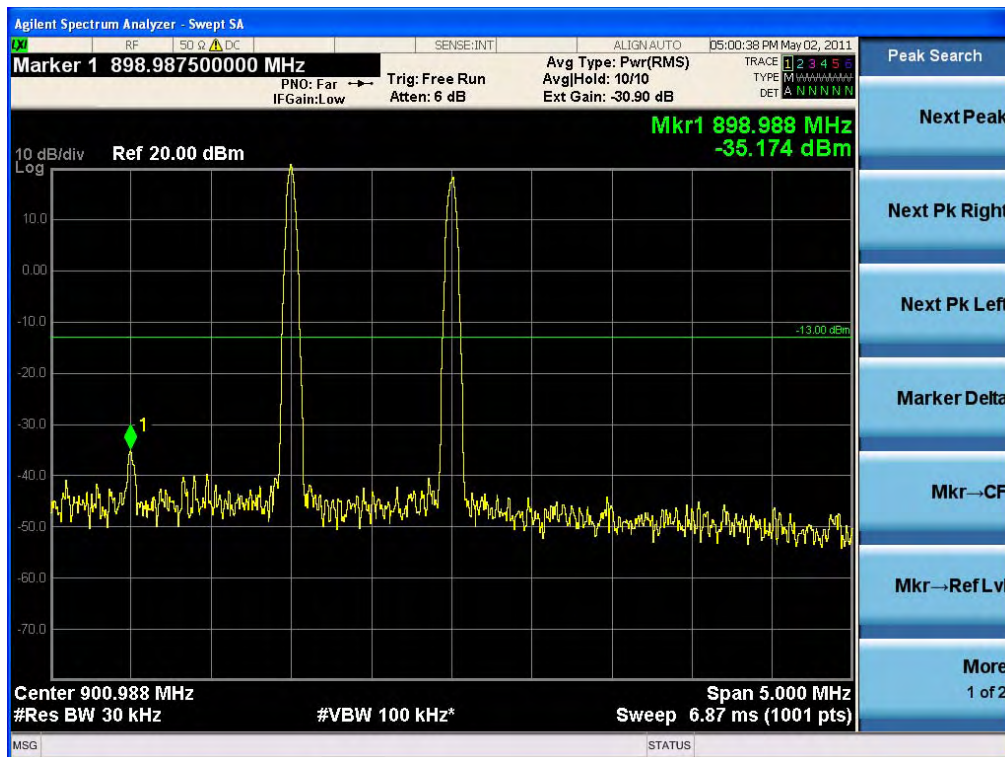


Two Tone Uplink Hi End Intermodulation

Plots of Band Reject iDEN900

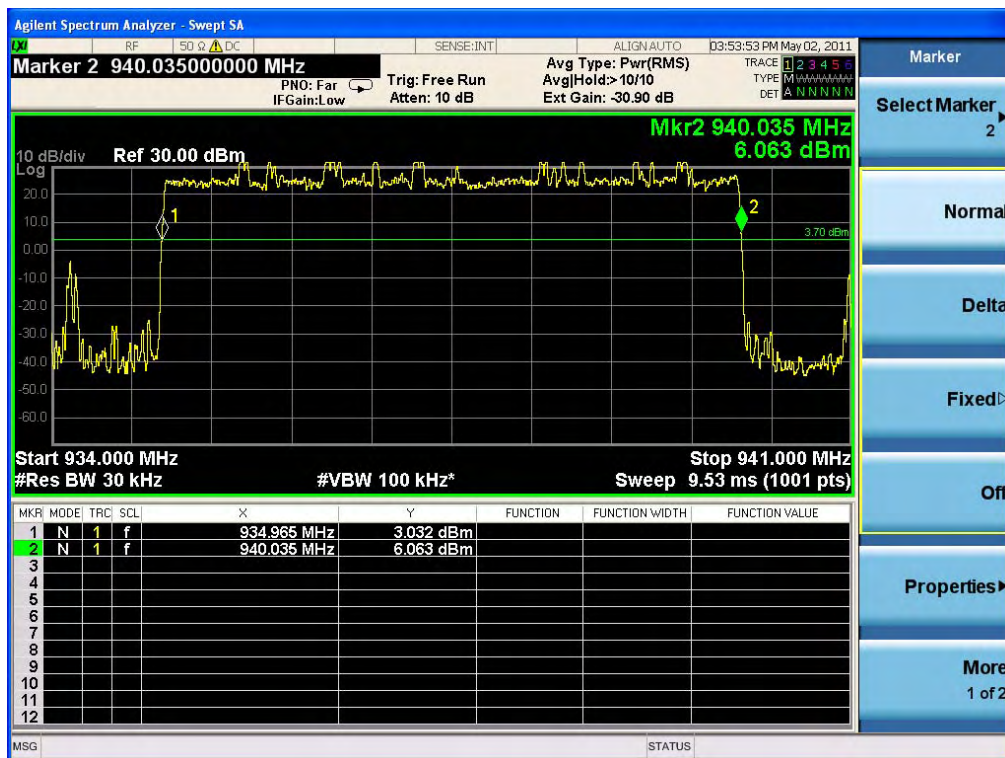

(iDEN900 Downlink Mid CH)

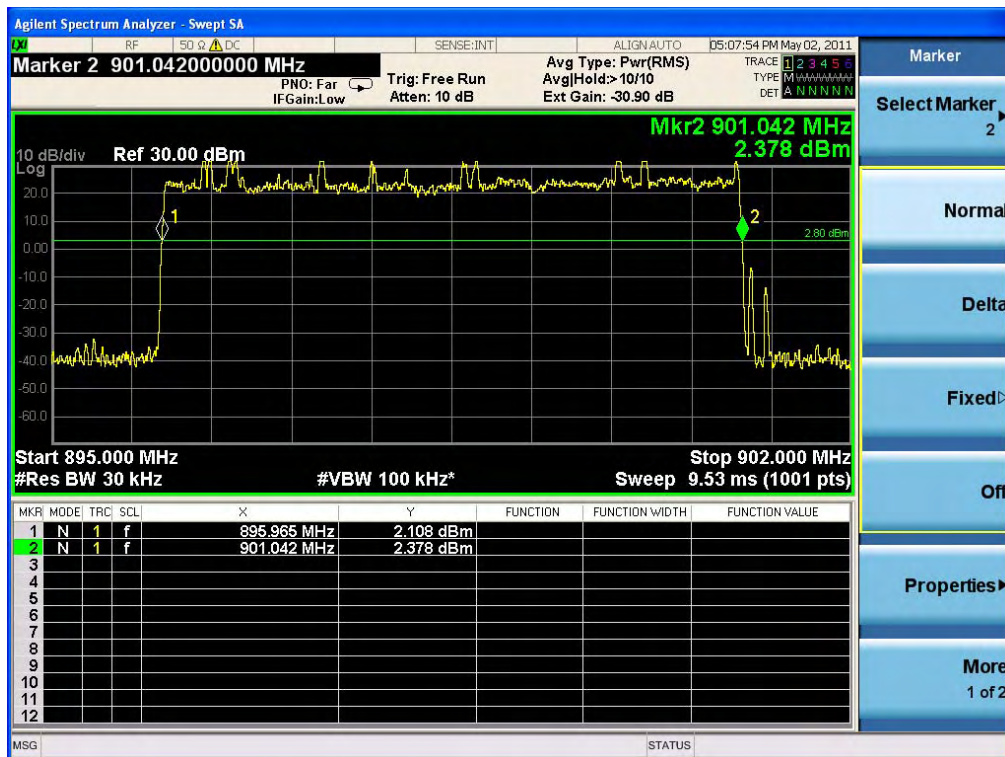

(iDEN900 Uplink Mid CH)

Plots of Emission Mask iDEN900

HCT Co., Ltd.


105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

TEL : +82 31 645 6300


FAX : +82 31 645 6401

www.hct.co.kr


- 67 /92-

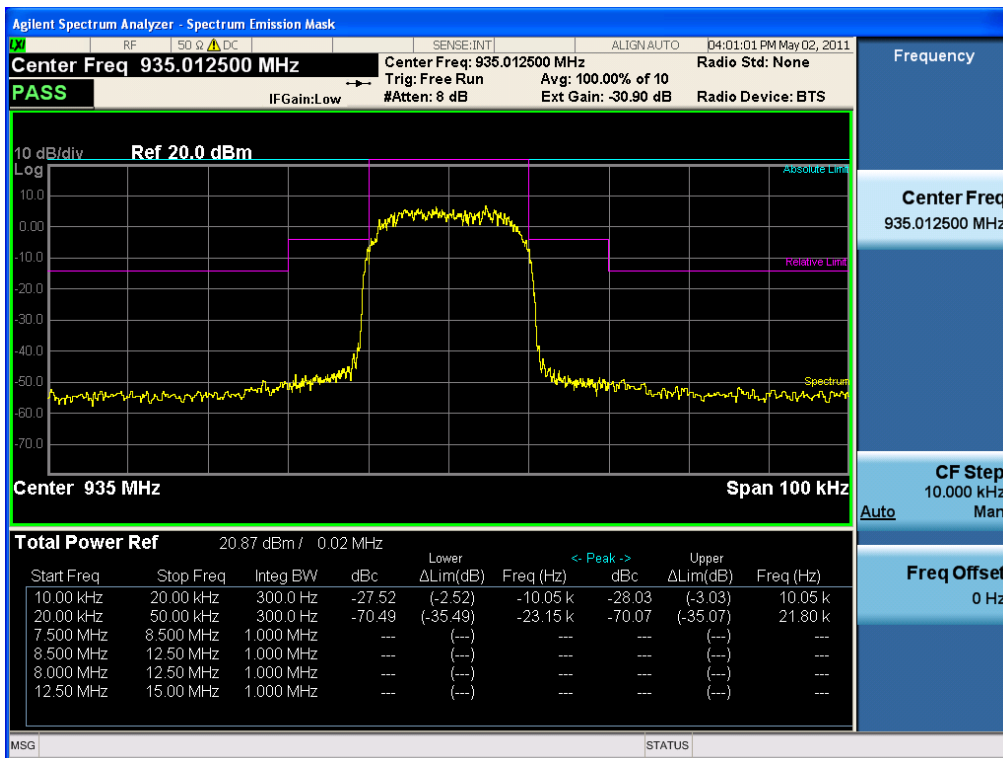


(iDEN900 Downlink Low CH)

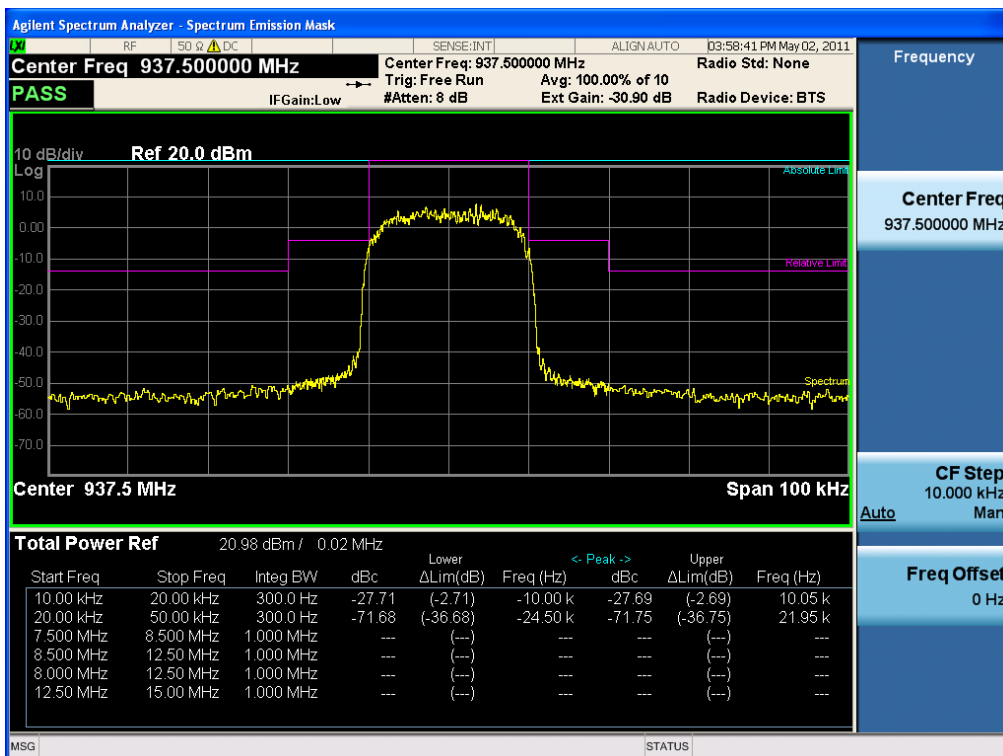


(iDEN900 Downlink Mid CH)

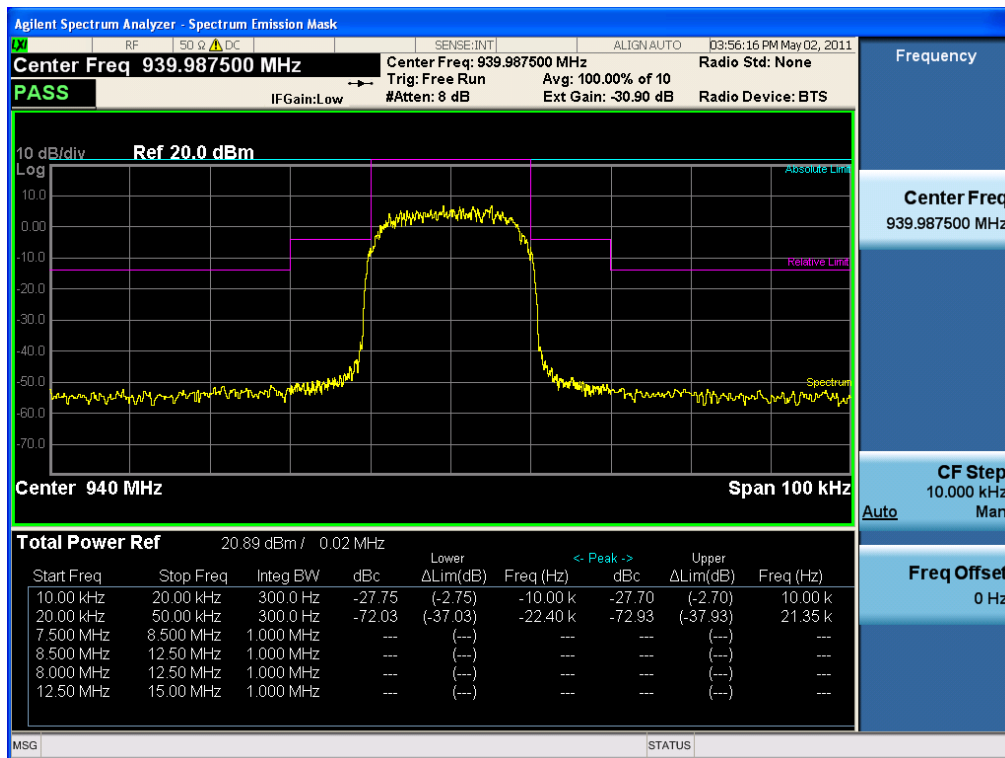


(iDEN900 Downlink High CH)

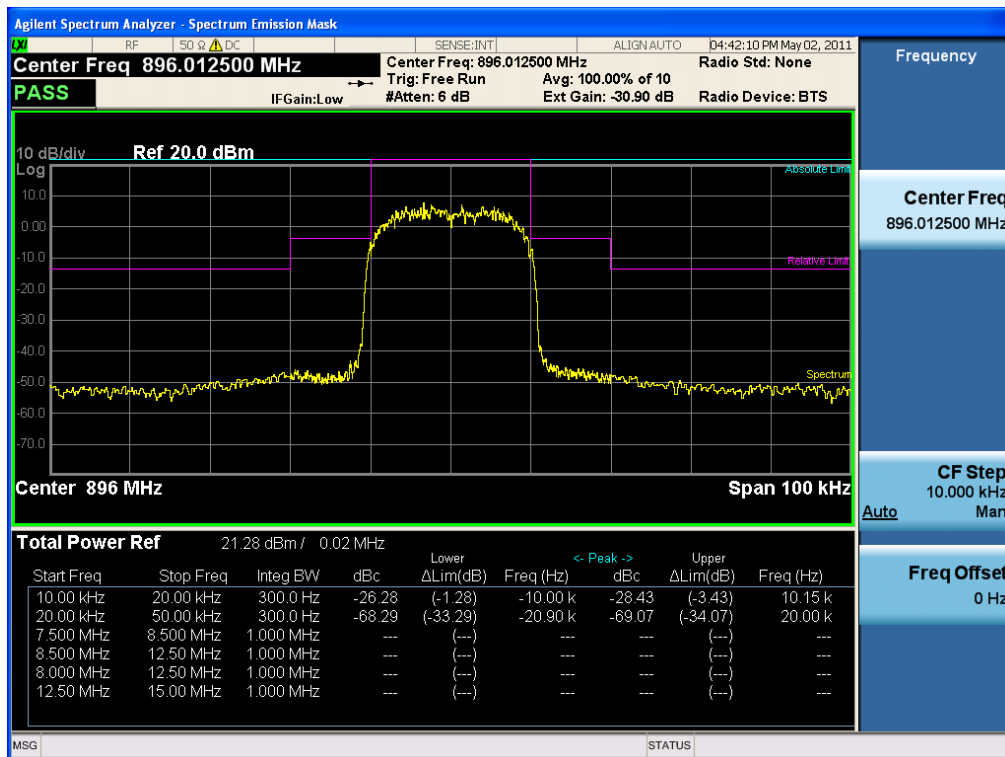

(iDEN900 Uplink Low CH)

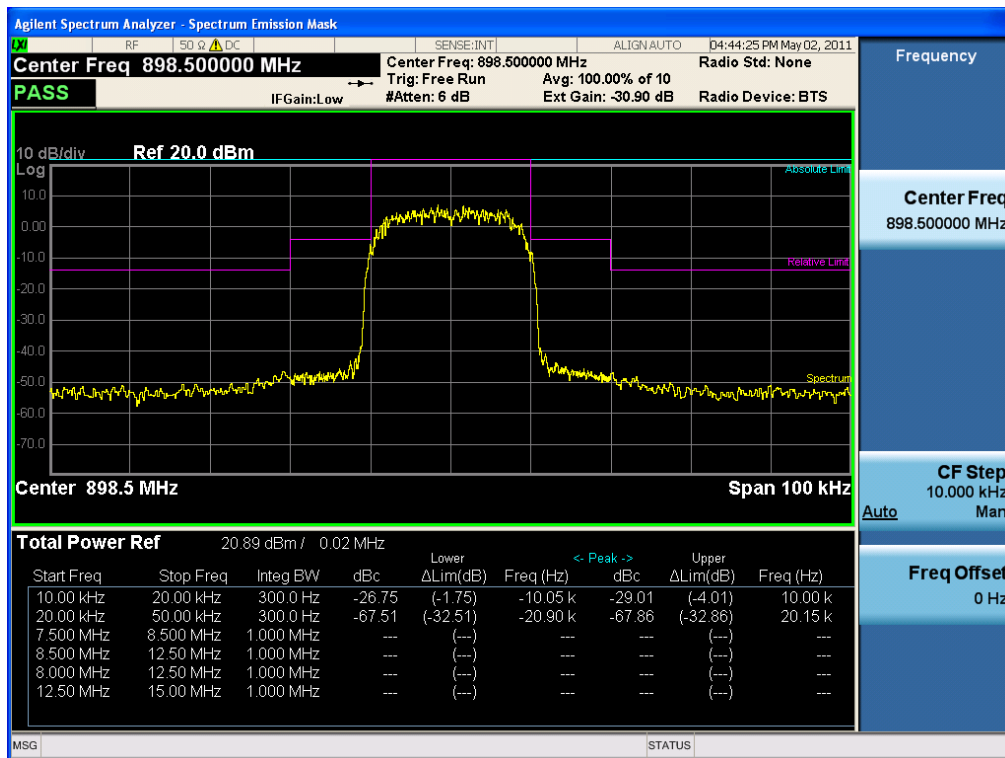


(iDEN900 Uplink Mid CH)

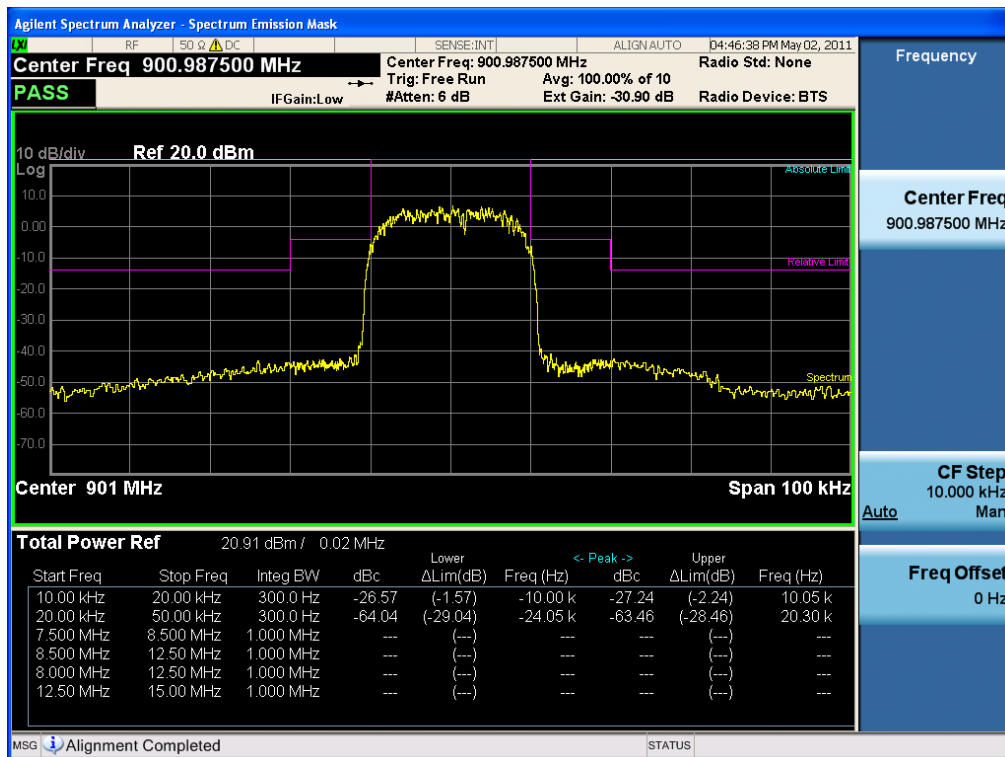

(iDEN900 Uplink High CH)

Plots of Spurious Emission, iDEN800-7 MHz

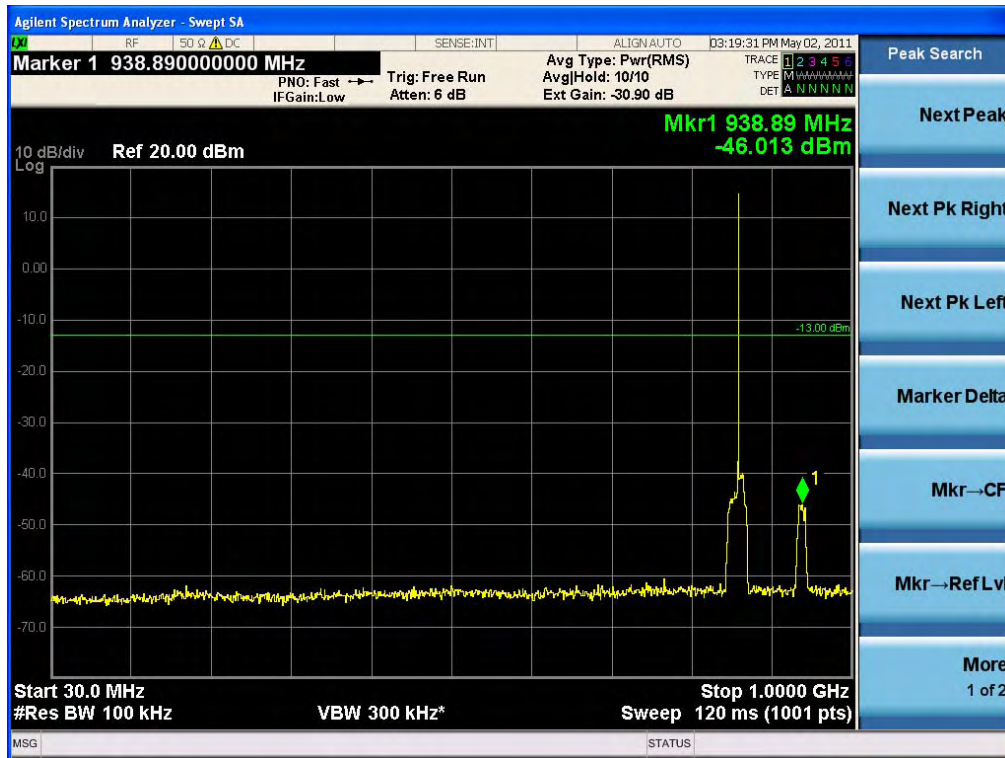

Conducted Spurious Emissions Downlink Low CH (30 MHz – 1 GHz)



Conducted Spurious Emissions Downlink Low CH (1 GHz – 26.5 GHz)

HCT Co., Ltd.


105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

TEL : +82 31 645 6300

FAX : +82 31 645 6401

www.hct.co.kr


- 71 /92-

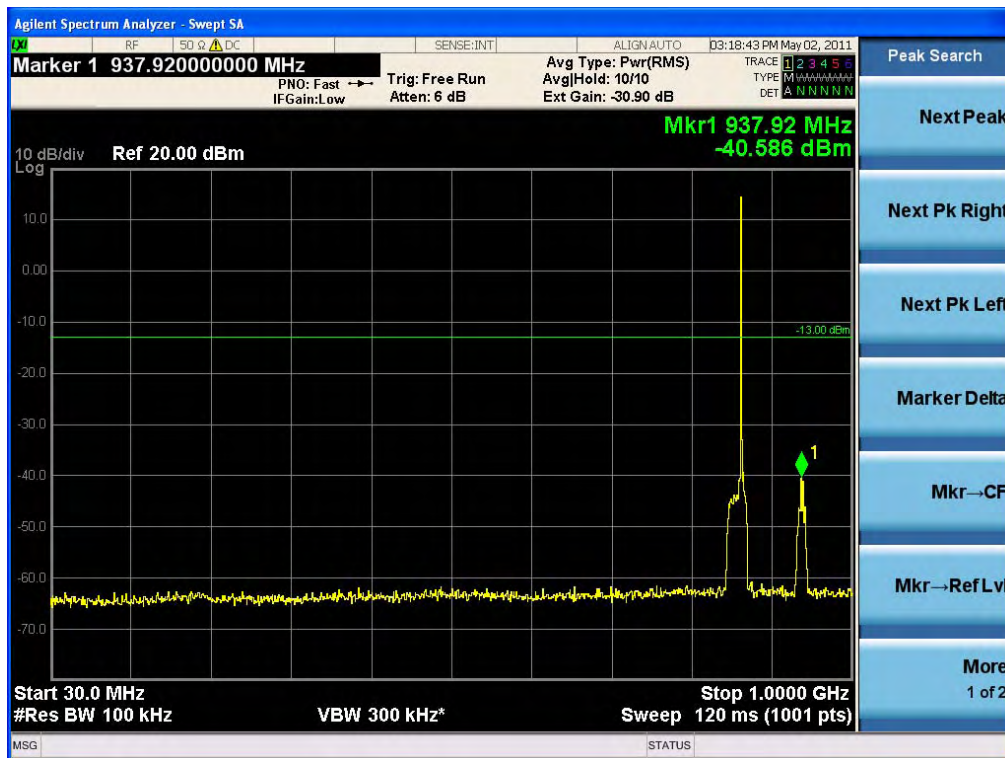

Conducted Spurious Emissions Downlink Mid CH (30 MHz – 1 GHz)




Conducted Spurious Emissions Downlink Mid CH (1 GHz – 26.5 GHz)

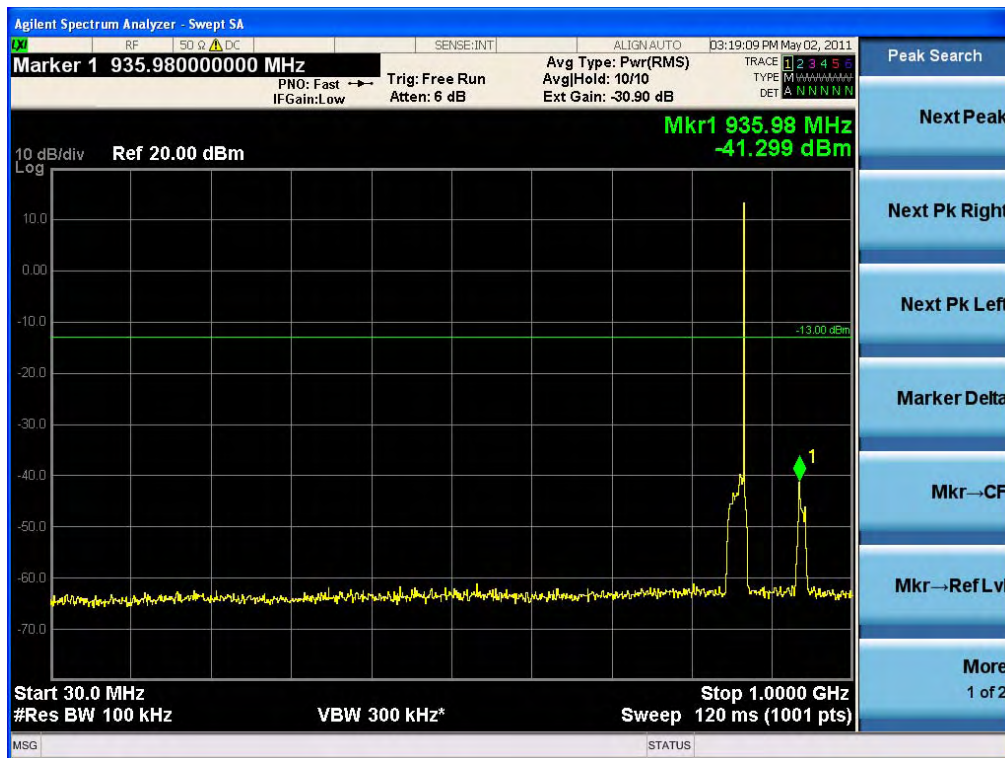

Conducted Spurious Emissions Downlink High CH (30 MHz – 1 GHz)




Conducted Spurious Emissions Downlink High CH (1 GHz – 26.5 GHz)

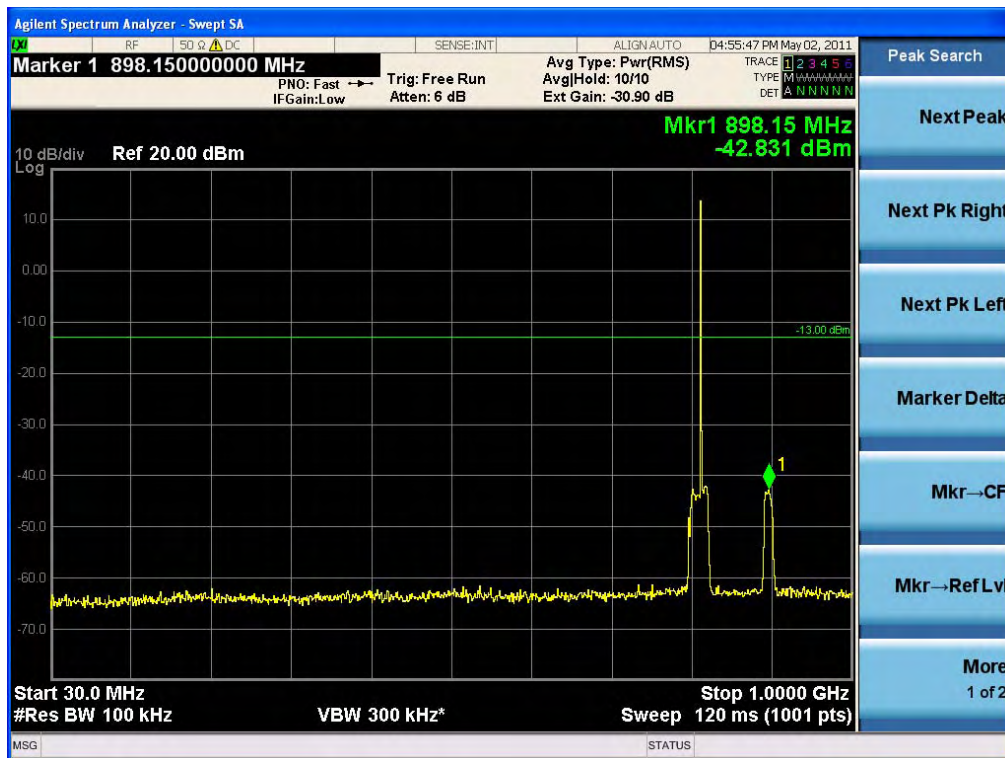

Conducted Spurious Emissions Uplink Low CH (30 MHz – 1 GHz)




Conducted Spurious Emissions Uplink Low CH (1 GHz – 26.5 GHz)

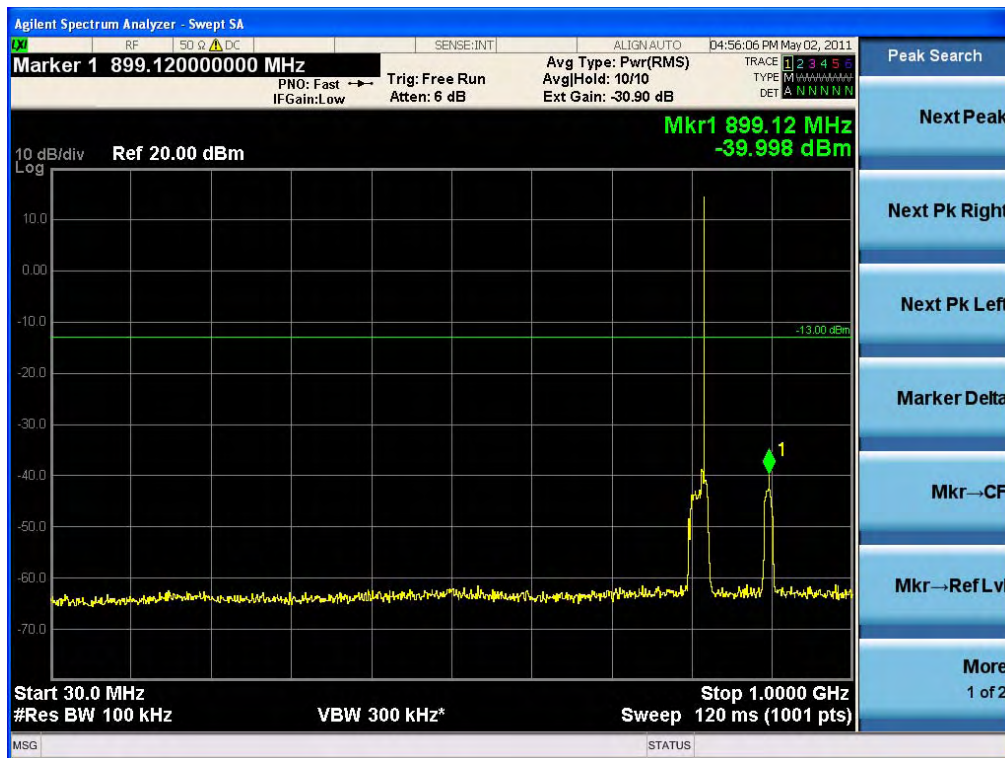

Conducted Spurious Emissions Uplink Mid CH (30 MHz – 1 GHz)



Conducted Spurious Emissions Uplink Mid CH (1 GHz – 26.5 GHz)

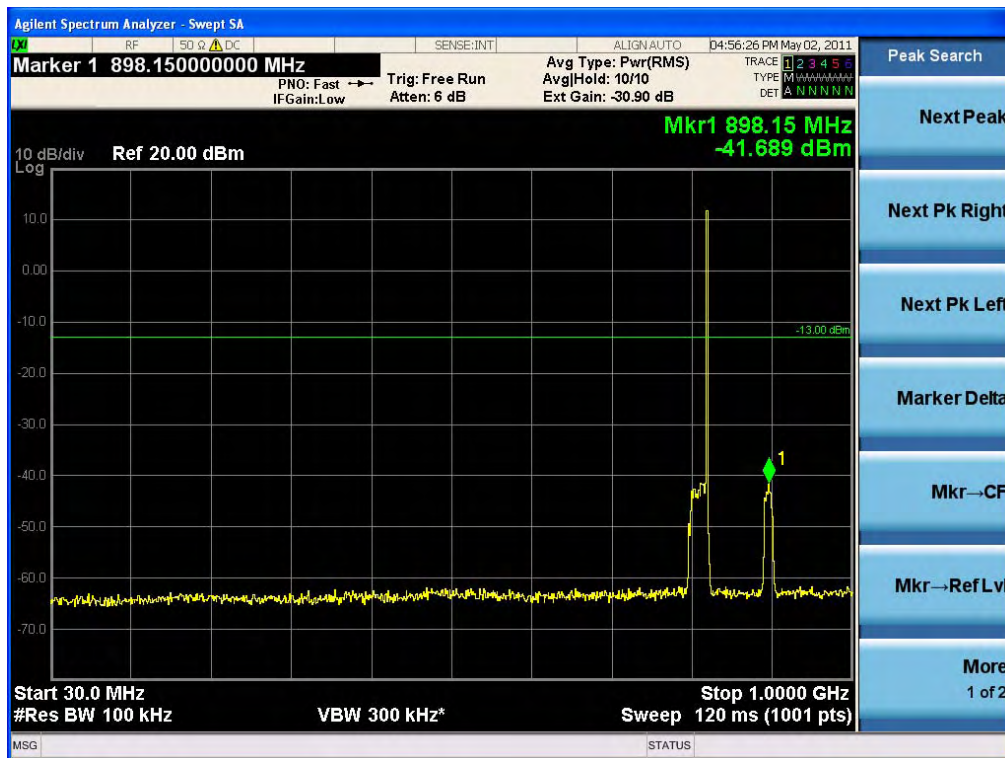


Conducted Spurious Emissions Uplink High CH (30 MHz – 1 GHz)




Conducted Spurious Emissions Uplink High CH (1 GHz – 26.5 GHz)

Plots of Two Tone Intermodulation, iDEN 800-7 MHz

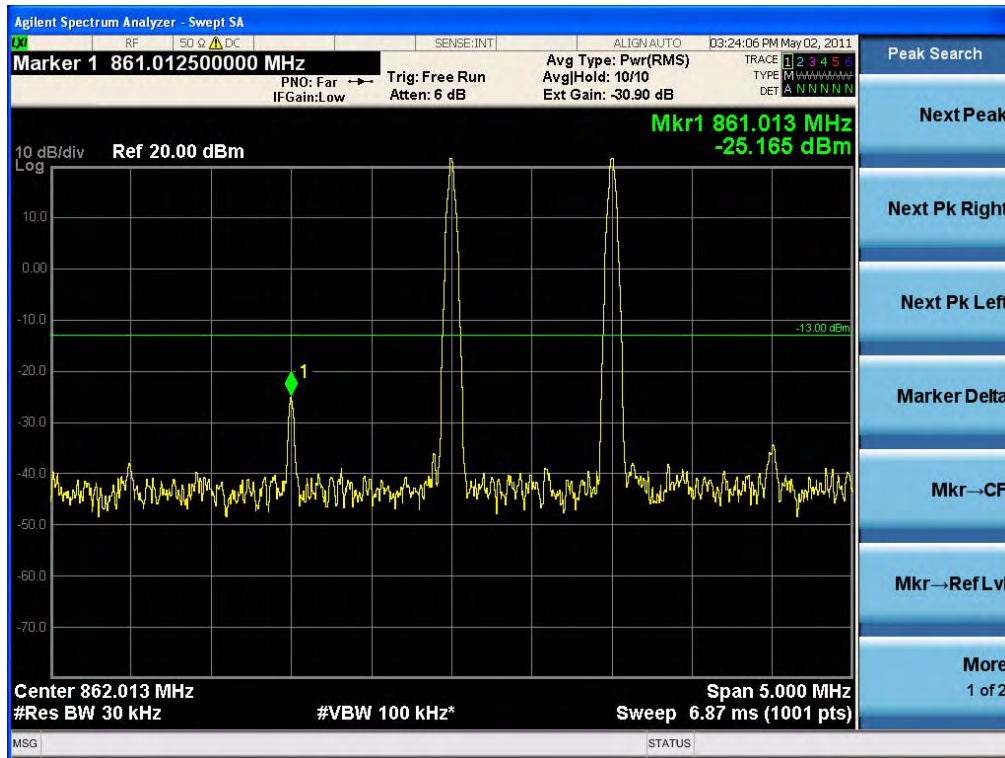

Two Tone Downlink Low End Intermodulation

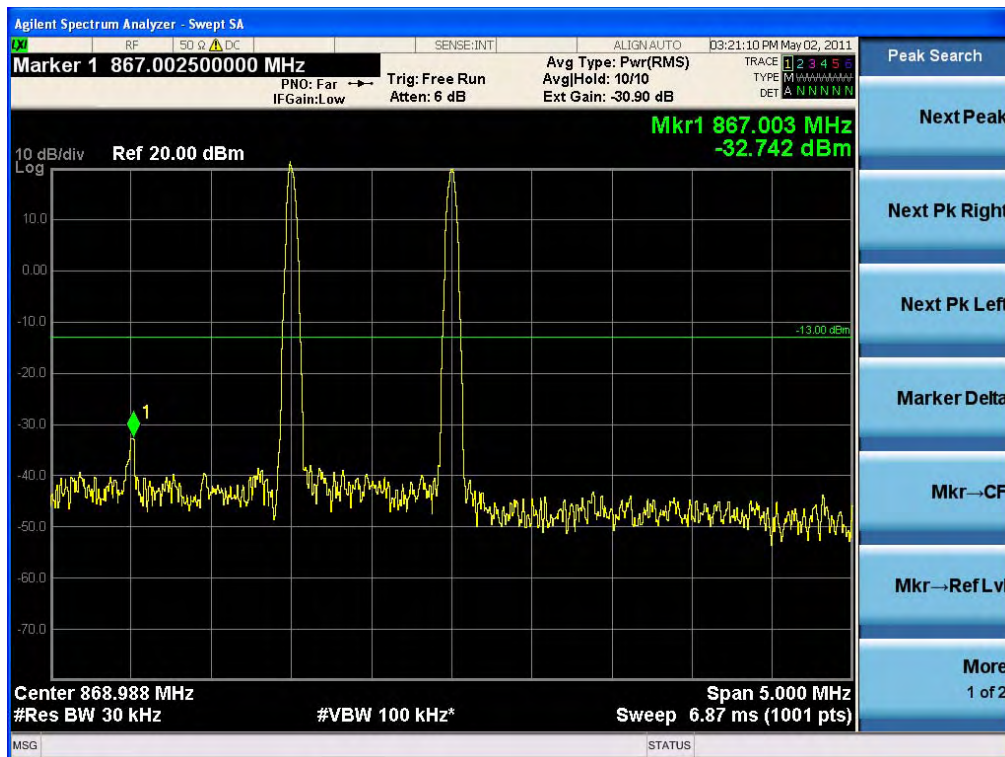

Two Tone Downlink Hi End Intermodulation

HCT Co., Ltd.


105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

TEL : +82 31 645 6300


FAX : +82 31 645 6401

www.hct.co.kr

- 77 /92-

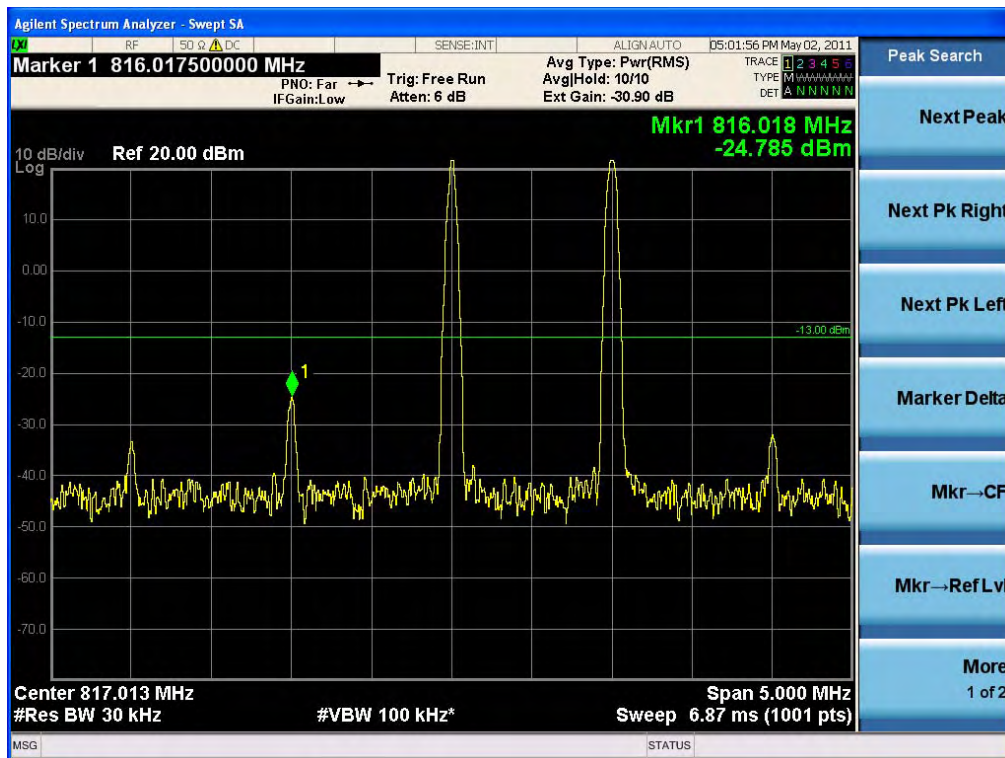


Two Tone Uplink Low End Intermodulation

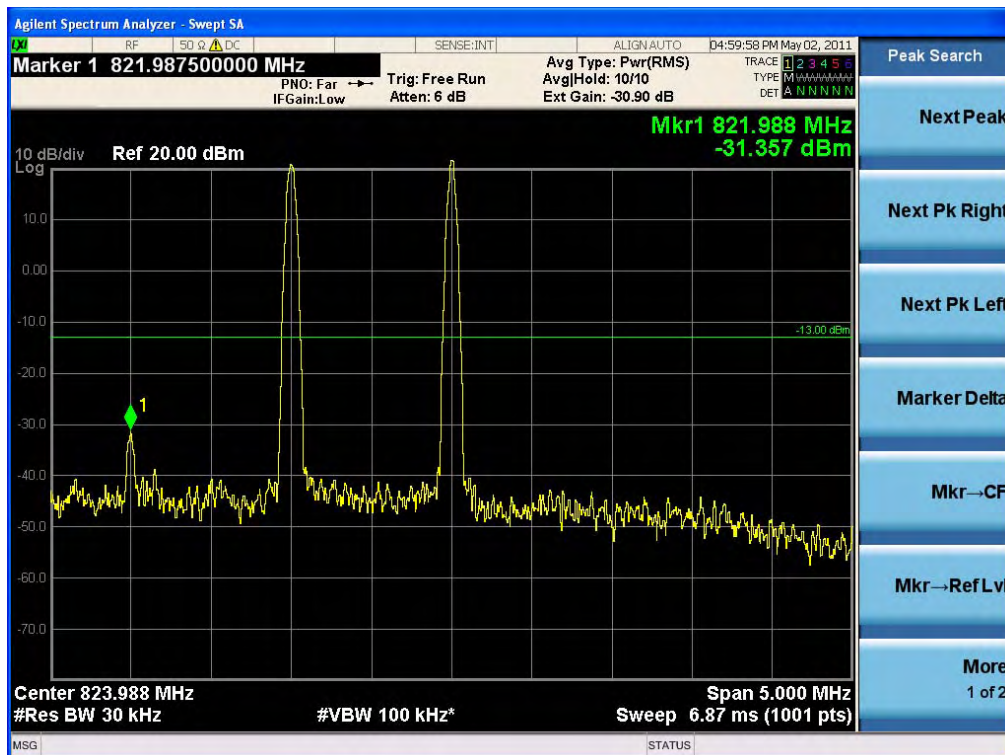


Two Tone Uplink Hi End Intermodulation

Plots of Band Reject iDEN 800-7 MHz

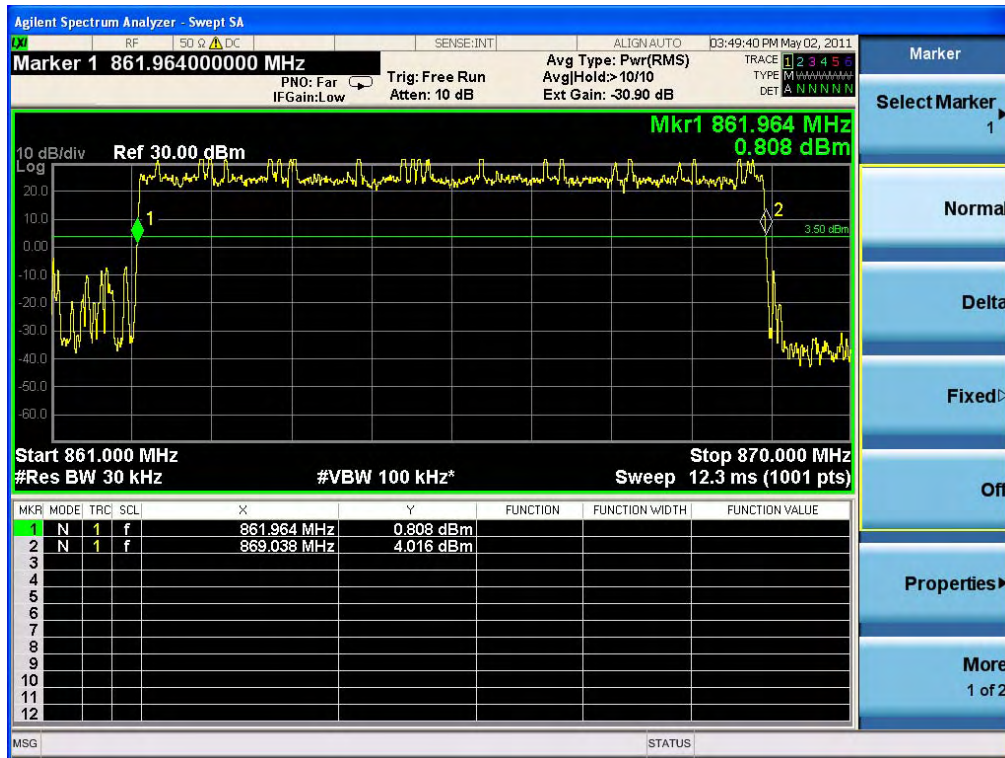


(iDEN800 Downlink Mid CH) - 7 MHz

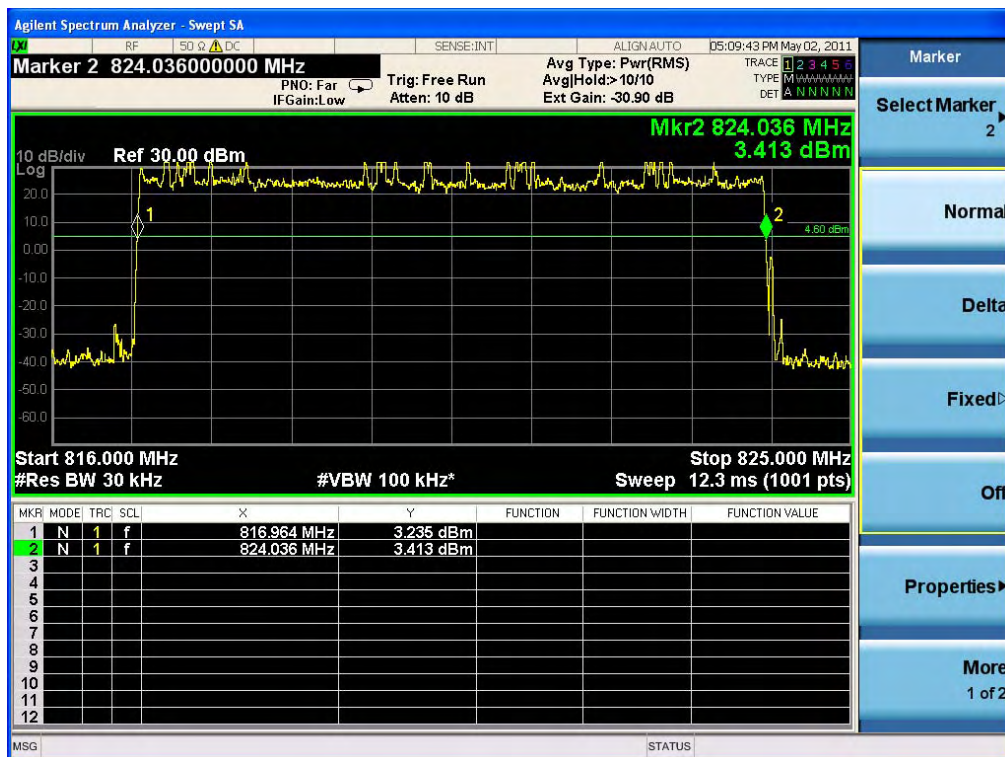


(iDEN800 Uplink Mid CH) - 7 MHz

Plots of Emission Mask iDEN 800-7 MHz

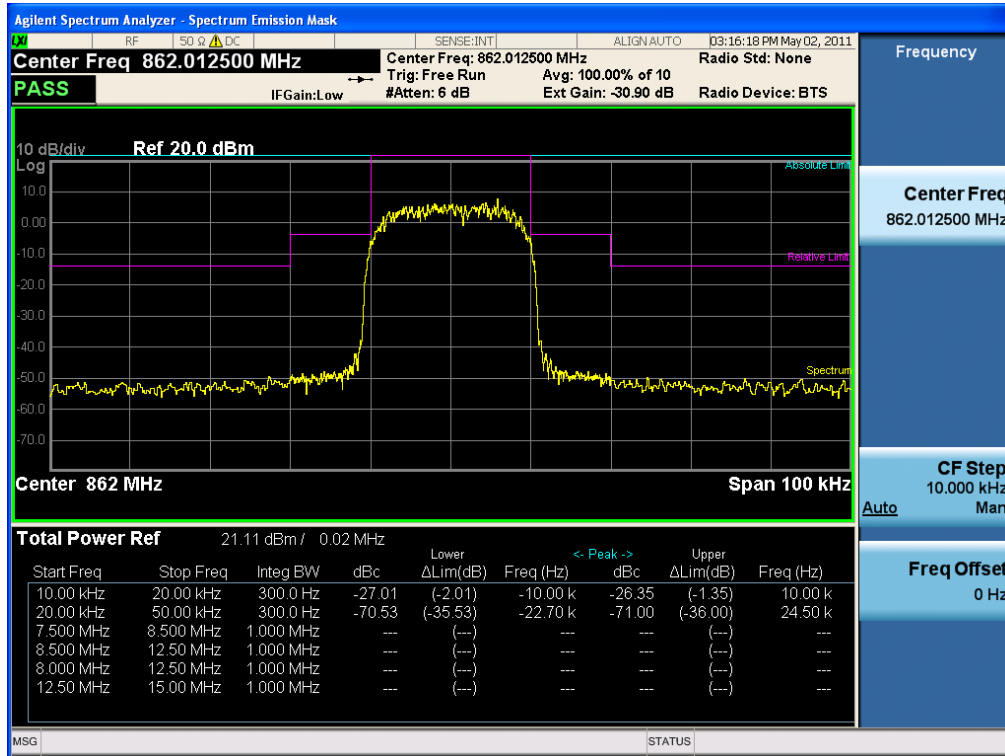

(iDEN900 Downlink Low CH) - 7 MHz

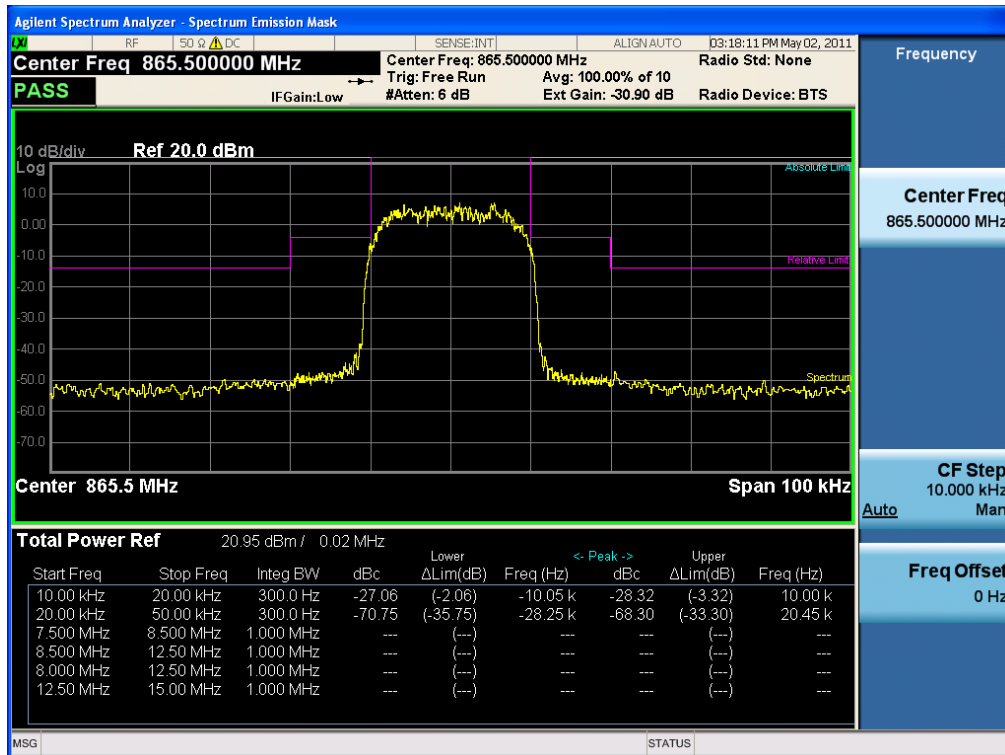

(iDEN900 Downlink Mid CH) - 7 MHz

HCT Co., Ltd.


105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

TEL : +82 31 645 6300


FAX : +82 31 645 6401

www.hct.co.kr


- 80 /92-

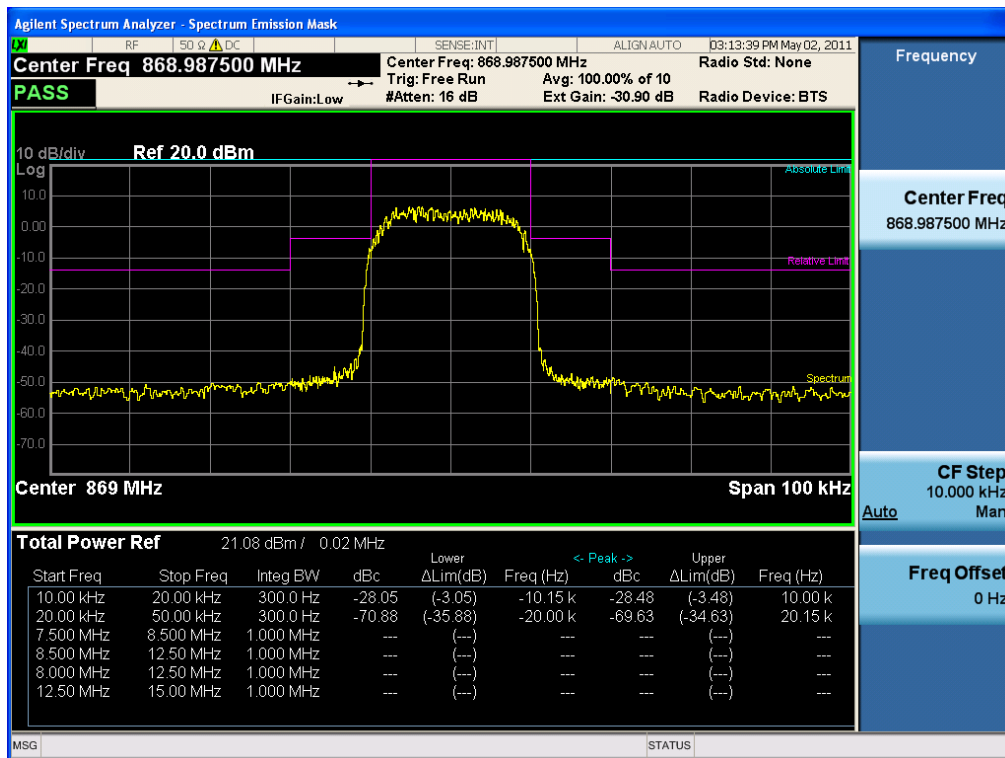


(iDEN900 Downlink High CH) - 7 MHz

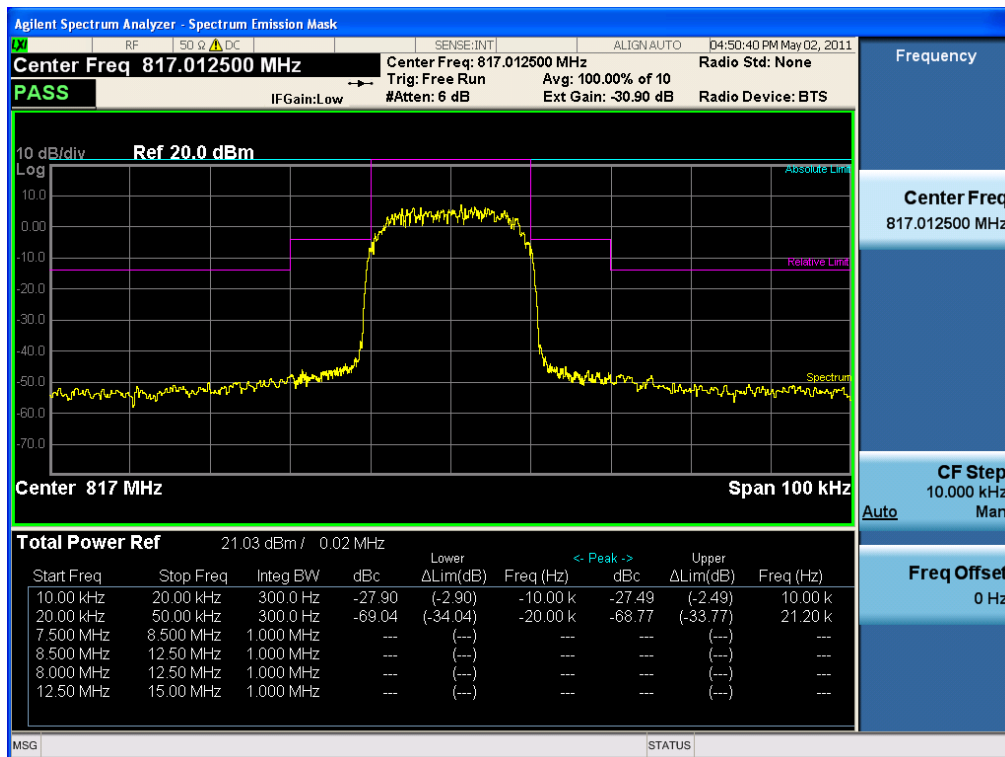

(iDEN900 Uplink Low CH) - 7 MHz

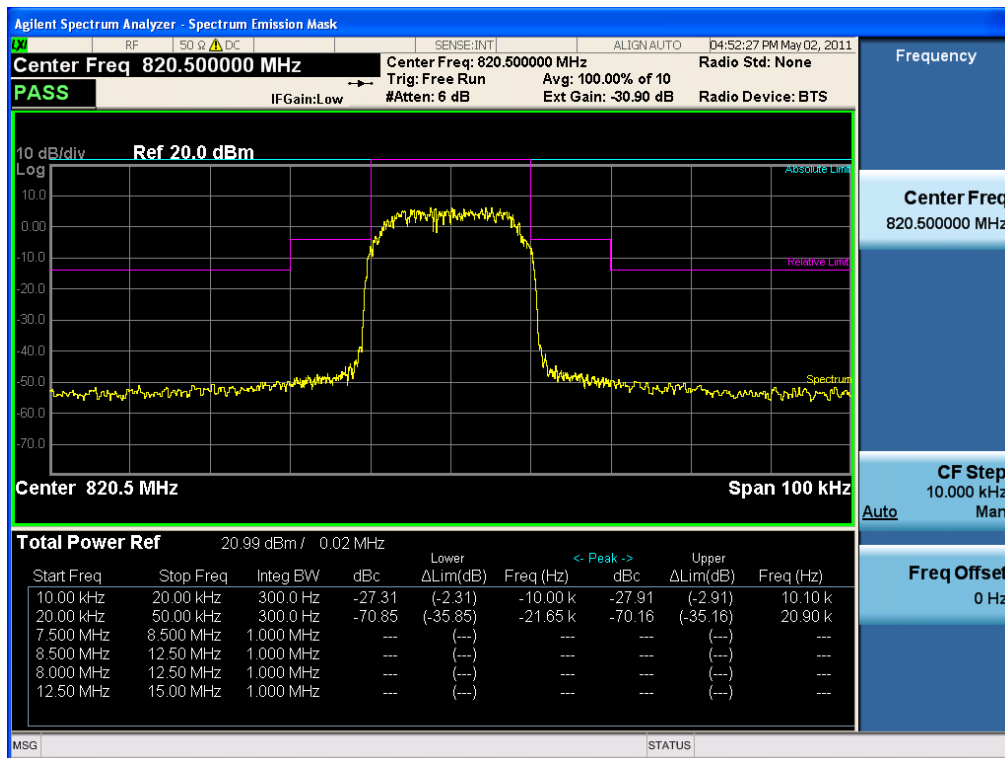

(iDEN900 Uplink Mid CH) - 7 MHz

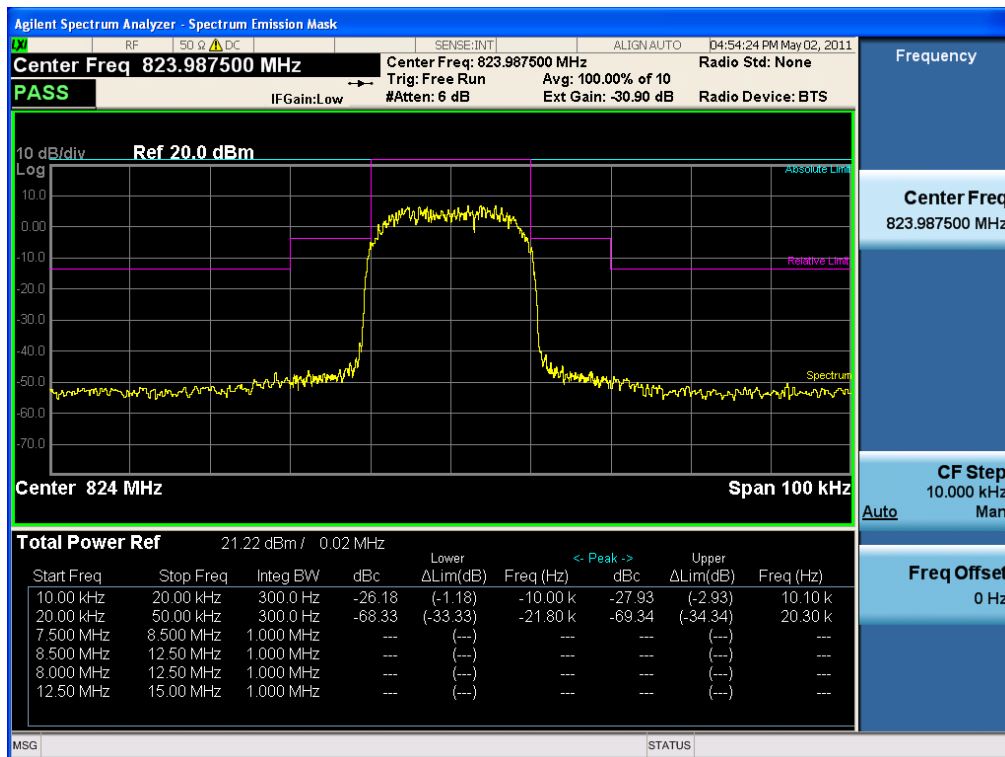

(iDEN900 Uplink High CH) - 7 MHz

8. FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement(s): § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

Test Procedures: As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* were made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".


Radiated emission measurements were performed inside a 10 meter semi-anechoic chamber.

The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360

and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

Test Results: There were no emissions detected above the noise floor which was at least 20 dB below the limit.

Radiated Spurious Emissions Test Setup

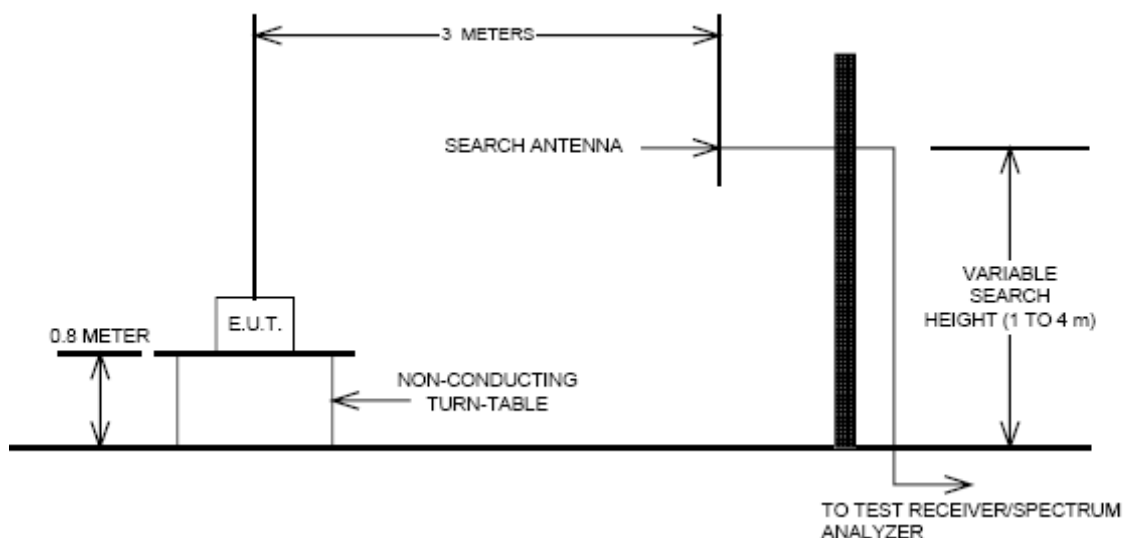

[iDEN 800]

Mode	Frequency	Freq.(MHz)	Substitute Level [dBm]	Ant. Gain (dBd)	C.L	Pol.	ERP (dBm)	Margin (dB)
DOWN-LINK	860.00	1720.00	-64.60	7.50	2.99	V	-60.09	-47.09
		2580.00	-65.20	8.27	3.51	V	-60.44	-47.44
UPLINK	815.00	1630.00	-64.20	7.07	2.95	V	-60.08	-47.08
		2445.00	-65.00	8.12	3.41	V	-60.29	-47.29

[iDEN 900]

Mode	Frequency	Freq.(MHz)	Substitute Level [dBm]	Ant. Gain (dBd)	C.L	Pol.	ERP (dBm)	Margin (dB)
DOWN-LINK	937.50	1875.00	-64.90	7.90	3.05	V	-60.05	-47.05
		2812.50	-65.50	8.65	3.67	V	-60.52	-47.52
UPLINK	898.50	1797.00	-64.70	7.87	3.02	V	-59.85	-46.85
		2695.50	-65.30	8.64	3.59	V	-60.43	-47.43

9. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS

Test Requirement(s):

§2.1055(a)(1) §90.213

Test Procedures:

As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Spectrum Analyzer.

The EUT was placed in the Environmental Chamber.

A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations.

The frequency drift was investigated for every 10 °C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to 50 °C.


Voltage supplied to EUT is 120 Vac reference temperature was done at 20°C. The voltage was varied by ± 15 % of nominal

Test Results:

The E.U.T was found in compliance for Frequency Stability and Voltage Test

NOTE: The EUT is a band selective repeater. The test was performed using all selective bands and there was not much difference between them. The test result is reported using the widest bands.

Test Setup:

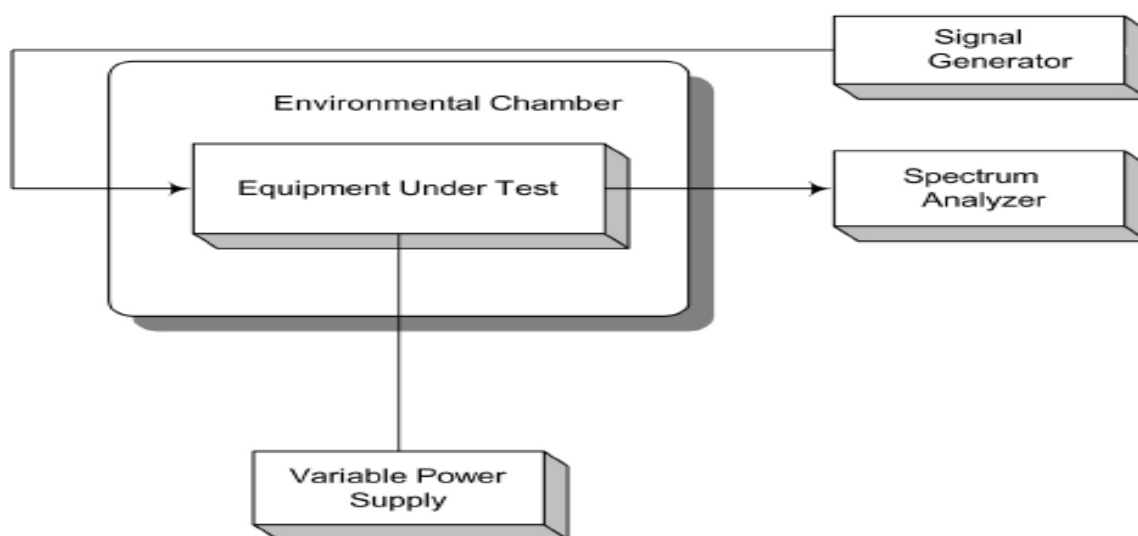

Frequency Stability and Voltage Test Results

Reference: 120 Vac at 20°C **Freq.** = 815.0000 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	814 999 996	-4	0	0.0000
	-30	814 999 991	-9	-5	-0.0061
	-20	814 999 989	-11	-7	-0.0086
	-10	814 999 991	-9	-5	-0.0061
	0	814 999 994	-6	-2	-0.0025
	+10	814 999 992	-8	-4	-0.0049
	+30	815 000 008	8	12	0.0147
	+40	815 000 005	5	9	0.0110
	+50	814 999 995	-5	-1	-0.0012
115%	+20	814 999 992	-8	-4	-0.0049
85%	+20	814 999 996	-4	0	0.0000

Uplink Mid CH, iDEN 800

Reference: 120 Vac at 20°C **Freq.** = 860.0000 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	860 000 007	7	0	0.0000
	-30	860 000 013	13	6	0.0070
	-20	860 000 005	5	-2	-0.0023
	-10	859 999 989	-11	-18	-0.0209
	0	860 000 009	9	2	0.0023
	+10	859 999 992	-8	-15	-0.0174
	+30	860 000 010	10	3	0.0035
	+40	860 000 012	12	5	0.0058
	+50	860 000 004	4	-3	-0.0035
115%	+20	859 999 993	-7	-14	-0.0163
85%	+20	859 999 994	-6	-13	-0.0151

Downlink Mid CH, iDEN 800

HCT Co., Ltd.

105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

TEL : +82 31 645 6300 FAX : +82 31 645 6401 www.hct.co.kr

- 87 /92-

Reference: 120 Vac at 20°C **Freq.** = 898.500000 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	898 499 999	-1	0	0.0000
	-30	898 499 996	-4	-3	-0.0033
	-20	898 499 997	-3	-2	-0.0022
	-10	898 499 993	-7	-6	-0.0067
	0	898 500 002	2	3	0.0033
	+10	898 500 003	3	4	0.0045
	+30	898 500 002	2	3	0.0033
	+40	898 499 996	-4	-3	-0.0033
	+50	898 500 003	3	4	0.0045
115%	+20	898 499 995	-5	-4	-0.0045
85%	+20	898 499 999	-1	0	0.0000

Uplink Mid CH, iDEN 900

Reference: 120 Vac at 20°C **Freq.** = 937.500000 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	937 499 998	-2	0	0.0000
	-30	937 499 996	-4	-2	-0.0021
	-20	937 499 999	-1	1	0.0011
	-10	937 499 996	-4	-2	-0.0021
	0	937 500 003	3	5	0.0053
	+10	937 500 002	2	4	0.0043
	+30	937 500 000	0	2	0.0021
	+40	937 500 002	2	4	0.0043
	+50	937 500 003	3	5	0.0053
115%	+20	937 500 001	1	3	0.0032
85%	+20	937 499 998	-2	0	0.0000

Downlink Mid CH, iDEN 900

HCT Co., Ltd.

105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

TEL : +82 31 645 6300 FAX : +82 31 645 6401 www.hct.co.kr

- 88 /92-

10. RF EXPOSURE STATEMENT

1. LIMITS

According to §1.1310 and §2.1091 RF exposure is calculated.

(B) Limits for General Population/Uncontrolled Exposures

Frequency range (MHz)	Electric field Strength (V/m)	Magnetic field Strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
0.3 - 1.34.....	614	1.63	*(100)	30
1.34 - 30.....	824/f	2.19/f	*(180/ f ²)	30
30 - 300.....	27.5	0.073	0.2	30
300 - 1500.....			f/1500	30
1500 - 100.000.....			1.0	30

F = frequency in MHz

* = Plane-wave equivalent power density

2. MAXIMUM PERMISSIBLE EXPOSURE Prediction

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = Power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

2-1. iDen Downlink (800 MHz)

Max Peak output Power at antenna input terminal	21.010	dBm
Max Peak output Power at antenna input terminal	126.183	mW
Prediction distance	25.000	cm
Prediction frequency	851.0125	MHz
Antenna Gain(typical)	12.000	dBi
Antenna Gain(numeric)	15.849	–
Power density at prediction frequency(S)	0.255	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	0.567	mW/cm ²

2-2. iDen Uplink (800 MHz)

Max Peak output Power at antenna input terminal	21.040	dBm
Max Peak output Power at antenna input terminal	127.057	mW
Prediction distance	25.000	cm
Prediction frequency	806.0125	MHz
Antenna Gain(typical)	12.000	dBi
Antenna Gain(numeric)	15.849	–
Power density at prediction frequency(S)	0.256	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	0.537	mW/cm ²

2-3. iDen Downlink (900 MHz)

Max Peak output Power at antenna input terminal	21.050	dBm
Max Peak output Power at antenna input terminal	127.350	mW
Prediction distance	25.000	cm
Prediction frequency	935.0125	MHz
Antenna Gain(typical)	12.000	dBi
Antenna Gain(numeric)	15.849	–
Power density at prediction frequency(S)	0.257	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	0.623	mW/cm ²

2-4. iDen Uplink (900 MHz)

Max Peak output Power at antenna input terminal	20.970	dBm
Max Peak output Power at antenna input terminal	125.026	mW
Prediction distance	25.000	cm
Prediction frequency	896.0125	MHz
Antenna Gain(typical)	12.000	dBi
Antenna Gain(numeric)	15.849	–
Power density at prediction frequency(S)	0.252	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	0.597	mW/cm ²

3. RESULTS

The power density level at 25 cm is 0.256 mW/cm²(iDen 800 MHz UpLink), 0.255 mW/cm²(iDen 800 MHz DownLink), 0.252 mW/cm²(iDen 900 MHz UpLink), 0.257 mW/cm²(iDen 900 MHz DownLink), which is below the uncontrolled exposure limit for iDEN Band.

Simultaneous MPE at 25 Cm is $(0.255/0.567) + (0.257/0.623) = 0.862 < 1$ (DownLink),
 $(0.256/0.537) + (0.252/0.597) = 0.898 < 1$ (UpLink),

Warning: In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, it must also have a minimum distance of 25 cm from the body during normal operation.