




Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	58%
Test Engineer	Owen Hsu	Configurations	2.4GHz + 5GHz

Horizontal

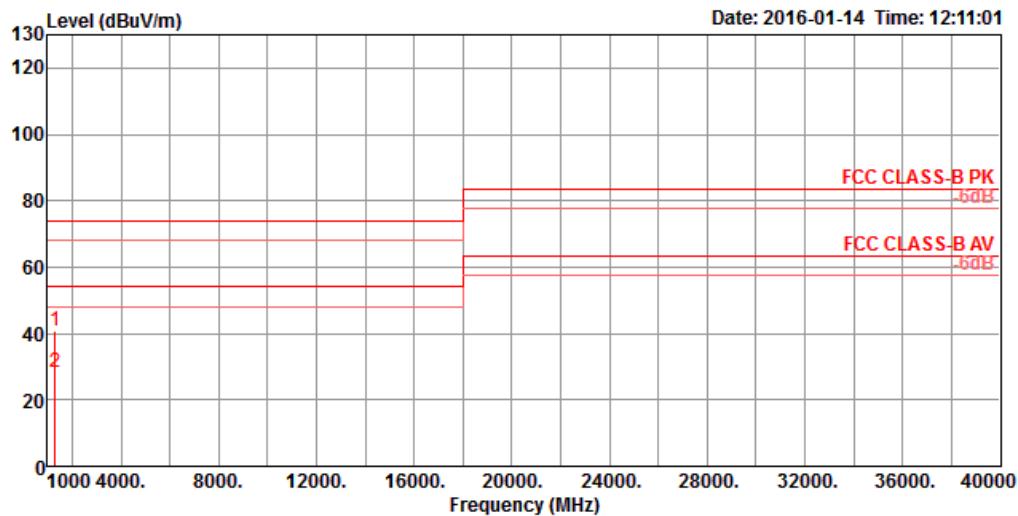

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			A/Pos	T/Pos	Remark
		Line	dB			dB	dB	dB/m			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1	1319.39	40.77	74.00	-33.23	47.32	4.29	35.89	25.05	HORIZONTAL	110	258 Peak
2	1320.21	28.06	54.00	-25.94	34.61	4.29	35.89	25.05	HORIZONTAL	110	258 Average

Vertical

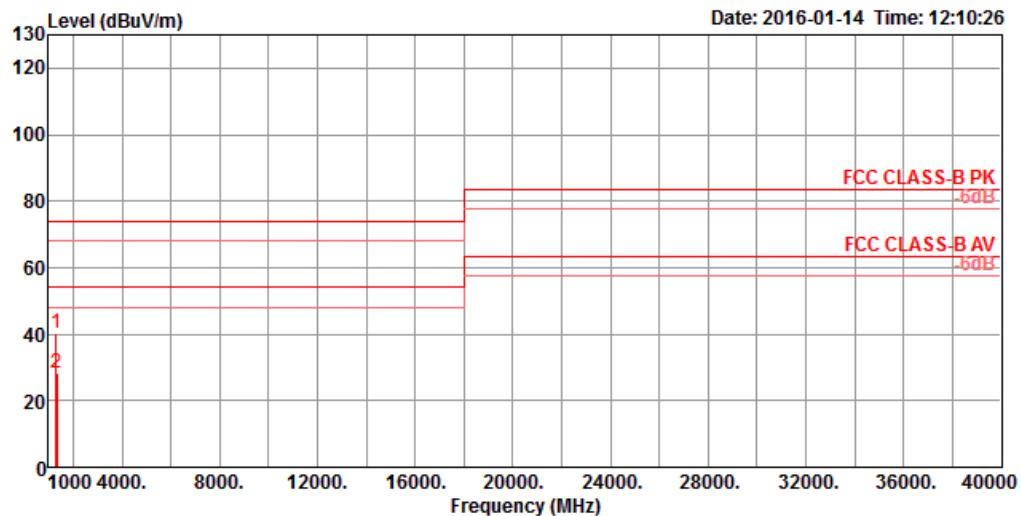

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark
		Line	Limit	Level	Loss	Factor	Pol/Phase			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg	
1	1320.40	40.27	74.00	-33.73	46.82	4.29	35.89	25.05	105	353 Peak
2	1320.44	28.22	54.00	-25.78	34.77	4.29	35.89	25.05	105	353 Average