

Königswinkel 10
32825 Blomberg
Germany
Phone +49 5235 9500-0
Fax +49 5235 9500-10

TEST REPORT

Test Report Reference: F091618E1

Class 2 Change

**Equipment under Test:
ASK USB-Cardreader CPL 407-U & ANT 400**

FCC ID: U92-1

**Serial Number: ASK-CPL407-U
NO-06004-32-C
07140414**

Applicant: Stryker Leibinger GmbH & Co. KG

Manufacturer: ASK

**Test Laboratory
(CAB)
accredited by
DATech GmbH
in compliance with DIN EN ISO/IEC 17025
under the
Reg. No. DAT-P-105/99-21,
FCC Test site registration number 90877**

TEST REPORT REFERENCE: F091618E1

Contents:	Page
1 IDENTIFICATION	3
1.1 APPLICANT	3
1.2 MANUFACTURER	3
1.3 DATES	3
1.4 TEST LABORATORY	4
1.5 RESERVATION	4
1.6 NORMATIVE REFERENCES	4
1.7 TEST RESULTS	4
2 TECHNICAL DATA OF EQUIPMENT	5
2.1 DEVICE UNDER TEST	5
2.2 PERIPHERY DEVICES	5
2.3 SPECIAL EMC MEASURES	5
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	6
4 ADDITIONAL INFORMATION	7
5 LIST OF MEASUREMENTS	7
6 TEST RESULTS	8
6.1 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)	8
6.1.1 METHOD OF MEASUREMENT	8
6.1.2 CONDUCTED EMISSION MEASUREMENT ON AC MAINS (150 kHz to 30 MHz)	9
6.2 RADIATED EMISSIONS	11
6.2.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)	11
6.2.2 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 30 MHz)	18
6.2.3 PRELIMINARY RADIATED EMISSION TEST (30 MHz to 2 GHz)	20
6.2.4 FINAL RADIATED EMISSION TEST (9 kHz to 30 MHz)	22
6.2.5 FINAL RADIATED EMISSION TEST (30 MHz to 2 GHz)	23
6.3 SPECTRUM MASK	25
6.4 FREQUENCY TOLERANCE	27
7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	28
8 LIST OF ANNEXES	29

TEST REPORT REFERENCE: F091618E1

1 IDENTIFICATION

1.1 APPLICANT

Name:	Stryker Leibinger GmbH & Co. KG
Address:	Boezinger Str. 41 79111 Freiburg
Country:	Germany
Name for contact purposes:	Mr. Alexander Schoebel
Tel:	+ 49 761 4512 4039
Fax:	+ 49 761 4512 4494039
e-mail address:	alexander.schoebel@stryker.com

1.2 MANUFACTURER

Name:	ASK
Address:	2260, route des Crêtes 06906 Sophia Antipolis Cedex BP 337
Country:	FRANCE
Name for contact purposes:	Mr. Olivier PARRAULT
Tel:	+33 4 97 21 40 09
Fax:	+33 4 92 38 93 21
e-mail address:	op@ask.fr

1.3 DATES

Date of receipt of test sample:	29 June 2009
Start of test:	03 July 2009
End of test:	07 August 2009

TEST REPORT REFERENCE: F091618E1

1.4 TEST LABORATORY

The tests were carried out at:

PHOENIX TESTLAB GmbH
Königswinkel 10
D-32825 Blomberg
Germany

Phone: +49 (0) 52 35 / 95 00-0
Fax: +49 (0) 52 35 / 95 00-10

accredited by DATech in der TGA GmbH in compliance with DIN EN ISO/IEC 17025 under Reg. No. DAT-P-105/99, FCC Test site registration number 90877.

Test engineer: Michael DINTER
Name



12 August 2009

Date

Signature

Test report checked: Bernd STEINER
Name



12 August 2009

Date

Signature

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Tel. 0 52 35 / 95 00-0
Fax 0 52 35 / 95 00-10

Stamp

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory
PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (October 2008)** Radio Frequency Devices

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: F091618E1

2 TECHNICAL DATA OF EQUIPMENT

2.1 DEVICE UNDER TEST

Type of equipment:	13.56 MHz Reader
Type designation:	ASK-CPL407-U NO-06004- 32-C 07140414 1
FCC ID:	U92-1
Serial No.:	None
Lowest internal frequency:	105.937 kHz
Highest internal frequency:	13.56 MHz Card reader; 480 MHz USB 2.0
Antenna type:	Integral
Supply Voltage:	4.9 V DC to 5.1 V DC via USB
Printed circuit design:	P05 06 0012 REV 3 (main PCB) and P05-10-001 rev 01 (PCB ANT 400)
Software Version:	-

The following external I/O cables were used:

Cable	Length	Shielding	Connector
Connection cable (including DC supply lines and Data in/ out lines)	0.3 m *	Yes	USB
-	-	-	-

*: Length during the test

2.2 PERIPHERY DEVICES

The following equipment was used as control unit and ancillary equipment:

During the all measurements measurements a 13.56 MHz transponder card was used.(delivered by the applicant.

To set the EUT in a permanently reading mode the PC software POLLING V4.07b.EXE was running on a Laptop Medion MD96500.

2.3 SPECIAL EMC MEASURES

The following EMC measures were necessary to reach the documented results:

None.

TEST REPORT REFERENCE: F091618E1

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

During all tests the EUT was supplied via USB from a Laptop Medion MD 96500.

To set the EUT in a permanently reading mode the PC software POLLING V4.07b.EXE was running on a Laptop Medion MD96500.


For the conducted emission measurement on AC-mains Laptop was supplied with 120 V AC / 60 Hz.

For the whole frequency range a preliminary measurement in a fully anechoic chamber with a measuring distance of 3 m was carried out to determine the frequencies, which were radiated by the EUT.

The final measurements on the detected frequencies were carried out on an outdoor test site without ground plane (for the frequency range 9 kHz to 30 MHz) and on an open area test site with ground plane (for the frequency range 30 MHz to 1 GHz).

During the tests, the EUT was not sealed or labelled with a FCC-label.

The physical boundaries of the Equipment Under Test are shown below.

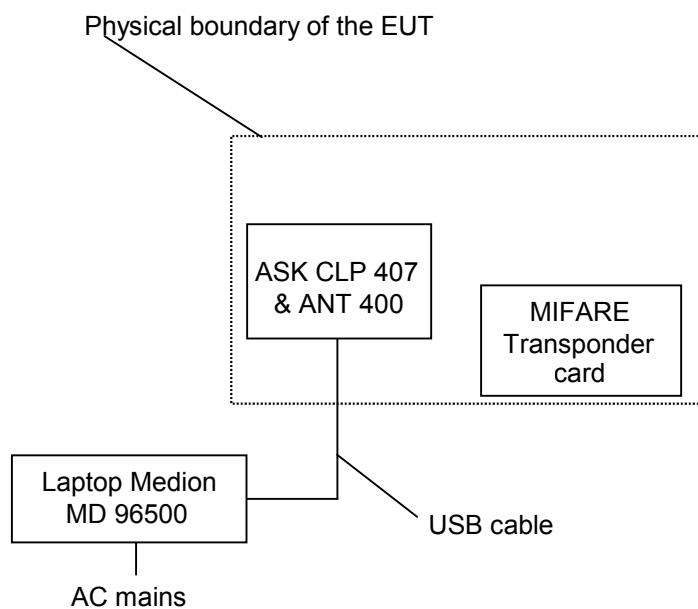

TEST REPORT REFERENCE: F091618E1

4 ADDITIONAL INFORMATION

As stated by the applicant the ASK USB-Cardreader CPL 407 & ANT 400 was already tested under Bureau Veritas test report reference 3634-FCC. The reason for this report is to show the compliance of the device with the modifications performed as declared by the applicant.

5 LIST OF MEASUREMENTS

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	Status	Refer page
Conducted emissions on supply line	0.15 - 30	15.207 (a)	Passed	8 et seq.
Radiated emissions	0.009 - 1,000	15.205 (a) 15.209 (a)	Passed	11 et seq.
Radiated emissions	13.553 to 13.567	15.225 (a)	Passed	11 et seq.
Spectrum mask	13.560 MHz	15.225 (a,b,c)	Passed	25 et seq.
Frequency tolerance	13.560 MHz	15.225 (e)	Passed	27 et seq.

TEST REPORT REFERENCE: F091618E1

6 TEST RESULTS


6.1 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)

6.1.1 METHOD OF MEASUREMENT

This test will be carried out in a shielded chamber. Tabletop devices will be set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

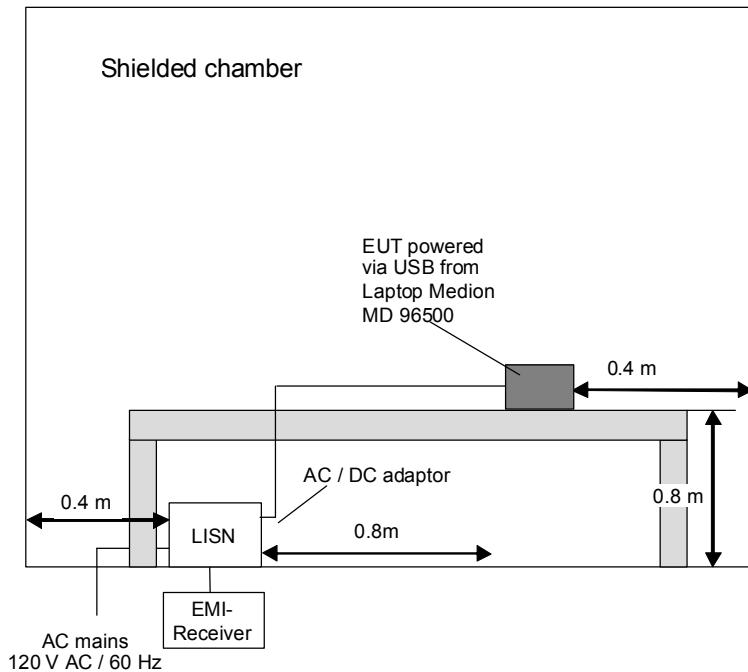

TEST REPORT REFERENCE: F091618E1

6.1.2 CONDUCTED EMISSION MEASUREMENT ON AC MAINS (150 kHz to 30 MHz)


Ambient temperature:	20 °C	Relative humidity:	46 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a wooden table of a height of 0.8 m.

Cable guide: The cable of the EUT was fixed on the wooden table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in TAG reading mode of the EUT's 13.56 MHz TAG. All results are shown in the following.

Power supply: During this test the EUT was powered via USB from a Laptop Medion MD 96500.

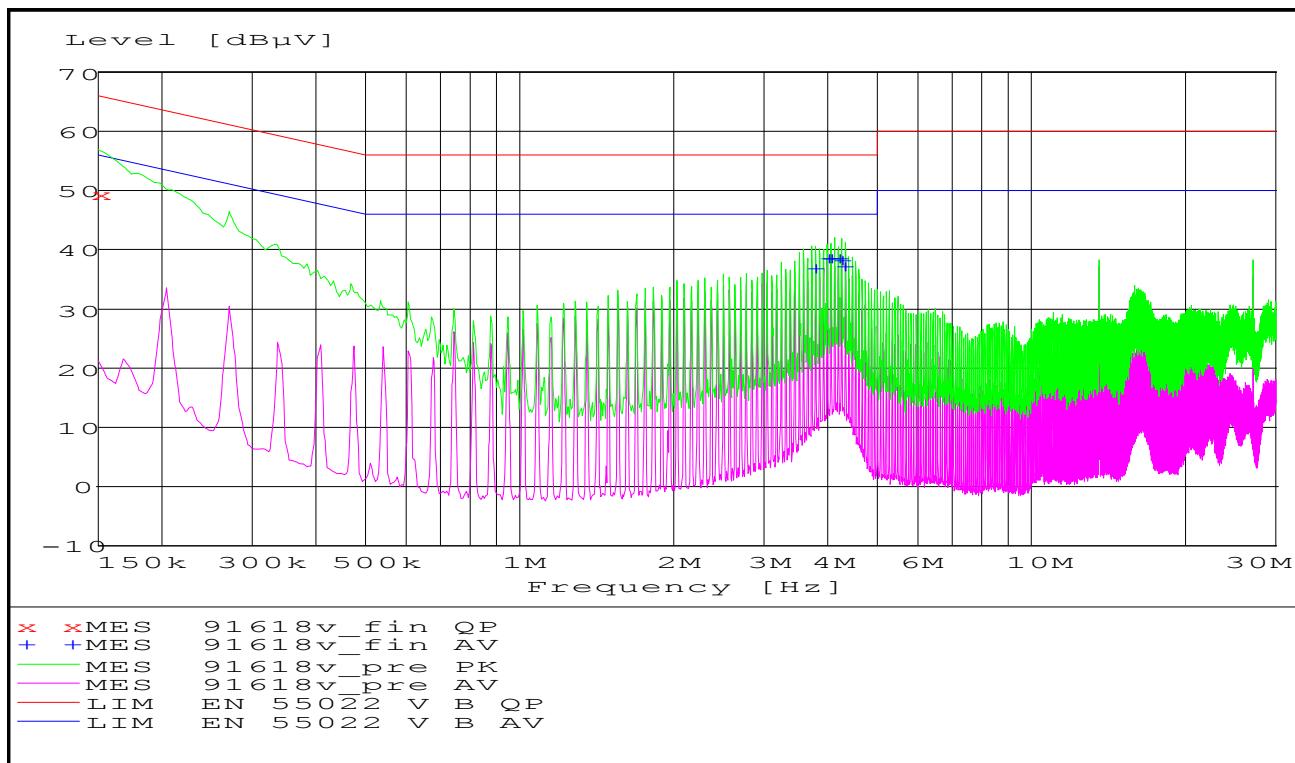

TEST REPORT REFERENCE: F091618E1

Result measured with the quasipeak detector:
(These values are marked in the above diagram by x)

Frequency MHz	Level dB μ V	Transducer dB	Limit dB μ V	Margin dB	Line	PE
0.150900	49.70	2.1	66.0	16.3	N	GND

Data record name: 91618v_fin QP

Result measured with the average detector:
(These values are marked in the above diagram by +)

Frequency MHz	Level dB μ V	Transducer dB	Limit dB μ V	Margin dB	Line	PE
3.788700	37.00	0.7	46.0	9.0	L1	GND
3.993000	38.70	0.7	46.0	7.3	L1	GND
4.059600	38.60	0.8	46.0	7.4	L1	FLO
4.195500	38.90	0.8	46.0	7.1	L1	FLO
4.263000	38.50	0.8	46.0	7.5	L1	FLO
4.330500	37.40	0.7	46.0	8.6	L1	GND

Data record name: 91618v_fin AV

Test: Passed

TEST EQUIPMENT USED:

1 - 6

TEST REPORT REFERENCE: F091618E1

6.2 RADIATED EMISSIONS

6.2.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)

The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test side without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 110 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 110 GHz.

All measurements will be carried out with the EUT working on the middle and upper and lower edge of the assigned frequency band. For this reason the hopping function of the EUT has to be disabled.


Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

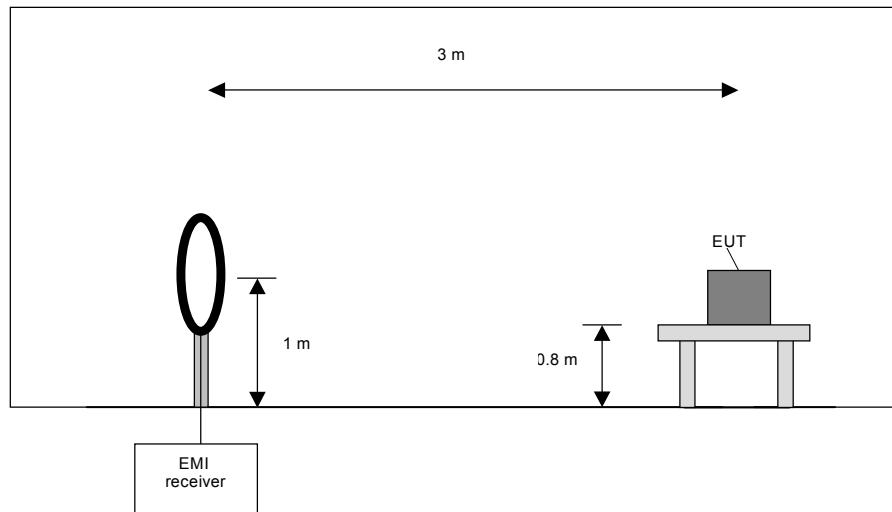

TEST REPORT REFERENCE: F091618E1

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (in case of handheld equipment).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

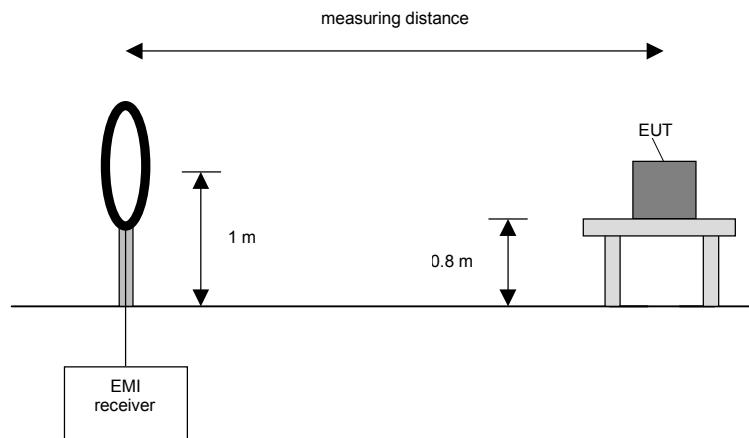

TEST REPORT REFERENCE: F091618E1

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (in case of handheld equipment).


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

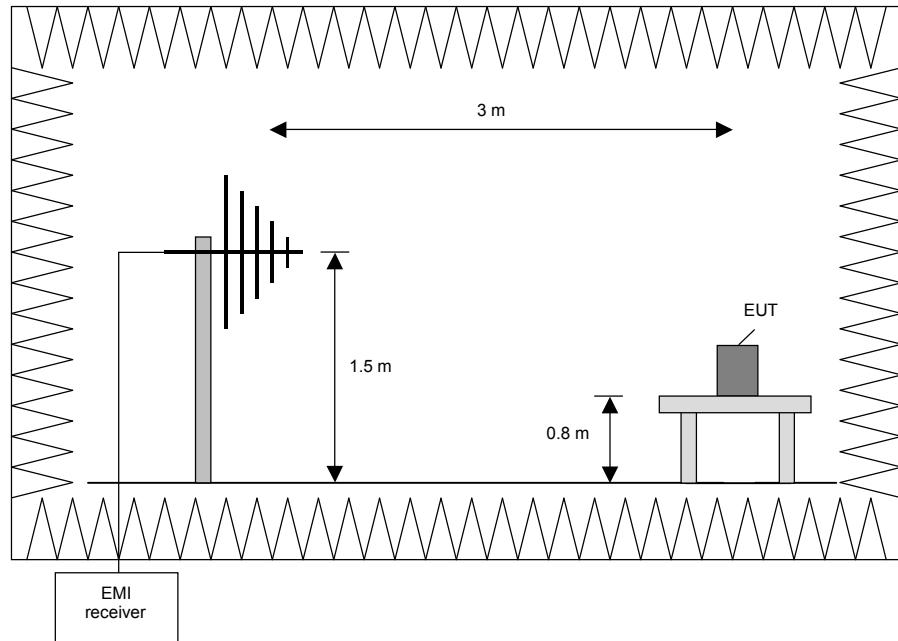

TEST REPORT REFERENCE: F091618E1

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz. The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (in case of handheld equipment).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

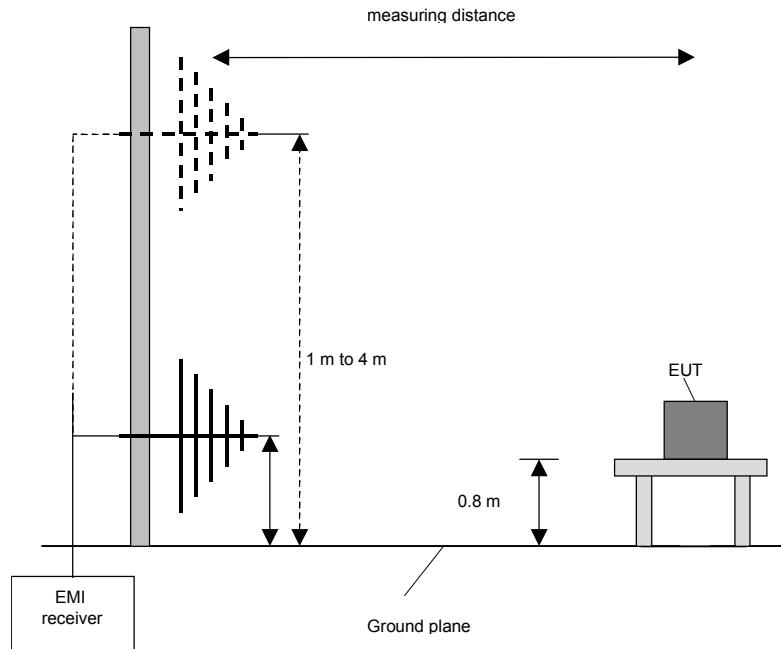

TEST REPORT REFERENCE: F091618E1

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (in case of handheld equipment).

Preliminary and final measurement (1 GHz to 110 GHz)

This measurement will be performed in a fully anechoic chamber. Tabletop devices will be set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].


Preliminary measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and then the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz
40 GHz to 60 GHz	100 kHz
50 GHz to 75 GHz	100 kHz
75 GHz to 110 GHz	100 kHz

TEST REPORT REFERENCE: F091618E1

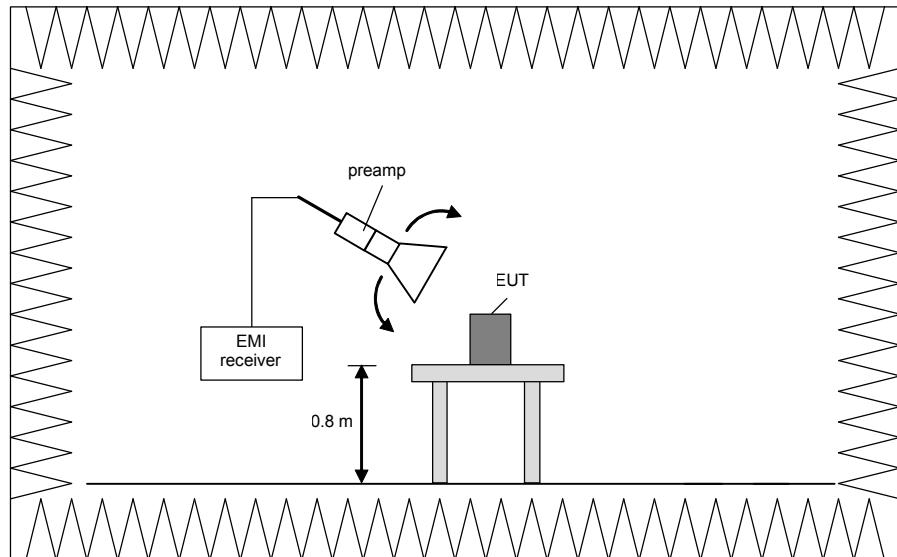


Final measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz
40 GHz to 60 GHz	1 MHz
50 GHz to 75 GHz	1 MHz
75 GHz to 110 GHz	1 MHz

TEST REPORT REFERENCE: F091618E1

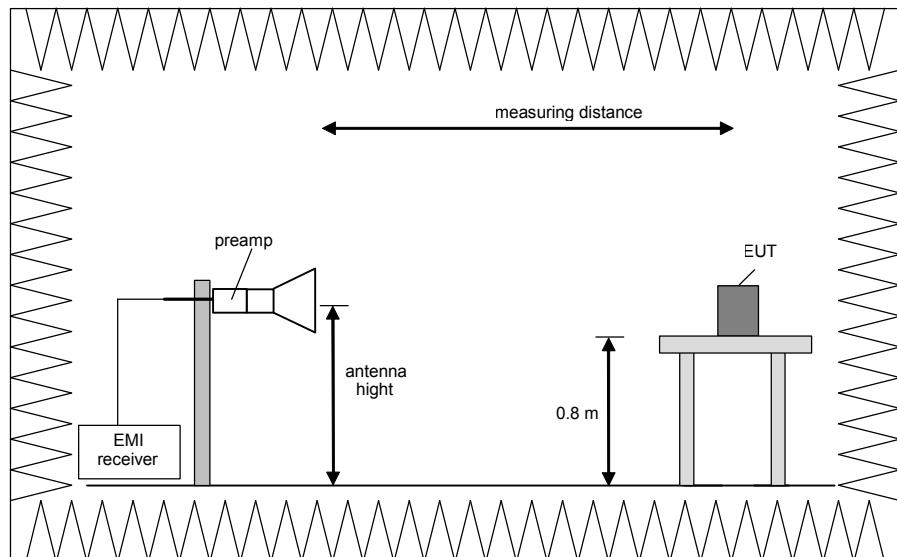

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 26.5 GHz, 26.5 GHz to 40 GHz, 40 GHz to 60 GHz, 60 GHz to 75 GHz and 75 GHz to 110 GHz. The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

TEST REPORT REFERENCE: F091618E1

6.2.2 PRELIMINARY RADIATED EMISSION TEST (9 kHz to 30 MHz)


Ambient temperature:	20 °C	Relative humidity:	50 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in TAG reading mode of the EUT (reading a 13.56 MHz TAG). All results are shown in the following.


91618_1.wmf: Spurious emissions from 9 kHz to 150 kHz:

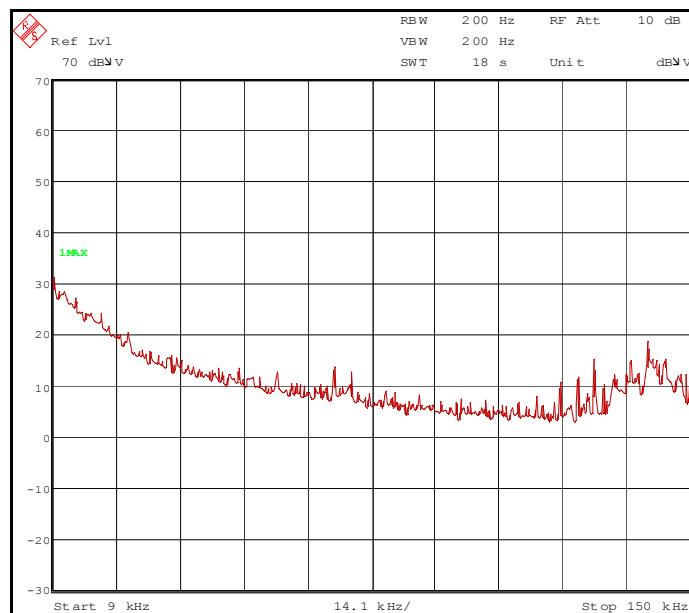


TEST EQUIPMENT USED THE TEST:
29, 31 – 33, 43, 56

TEST REPORT REFERENCE: F091618E1

91618_2.wmf: Spurious emissions from 150 kHz to 1 MHz:

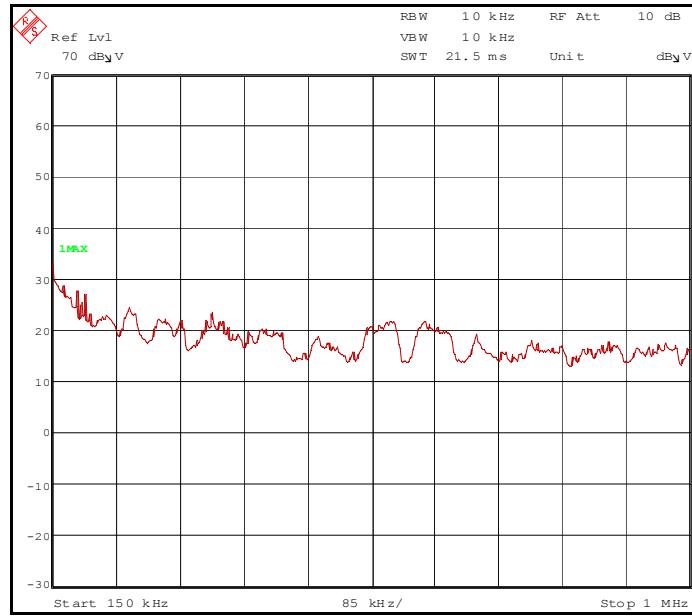

91618_3.wmf: Spurious emissions from 1 MHz to 30 MHz:

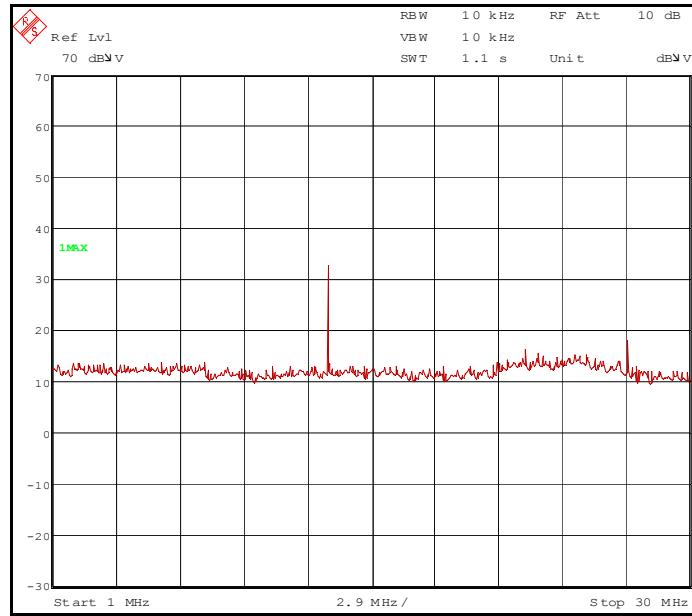

The following emission was found according to FCC 47 CFR Part 15 section 15.209 (a).

27.12 MHz.

The following frequency was found inside the 13.533 to 13.567 MHz band according to FCC 47 CFR Part 15 section 15.225 [2]:

13.56 MHz.

These frequencies have to be measured on the outdoor test site. The result of this final measurement is shown in subclause 6.2.4 of this test report.

TEST REPORT REFERENCE: F091618E1

6.2.3 PRELIMINARY RADIATED EMISSION TEST (30 MHz to 2 GHz)


Ambient temperature:	20 °C	Relative humidity:	50 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in TAG reading mode of the EUT (reading a 13.56 MHz TAG). All results are shown in the following.

Supply voltage: During this test the EUT was powered via USB from a Laptop Medion MD 96500.

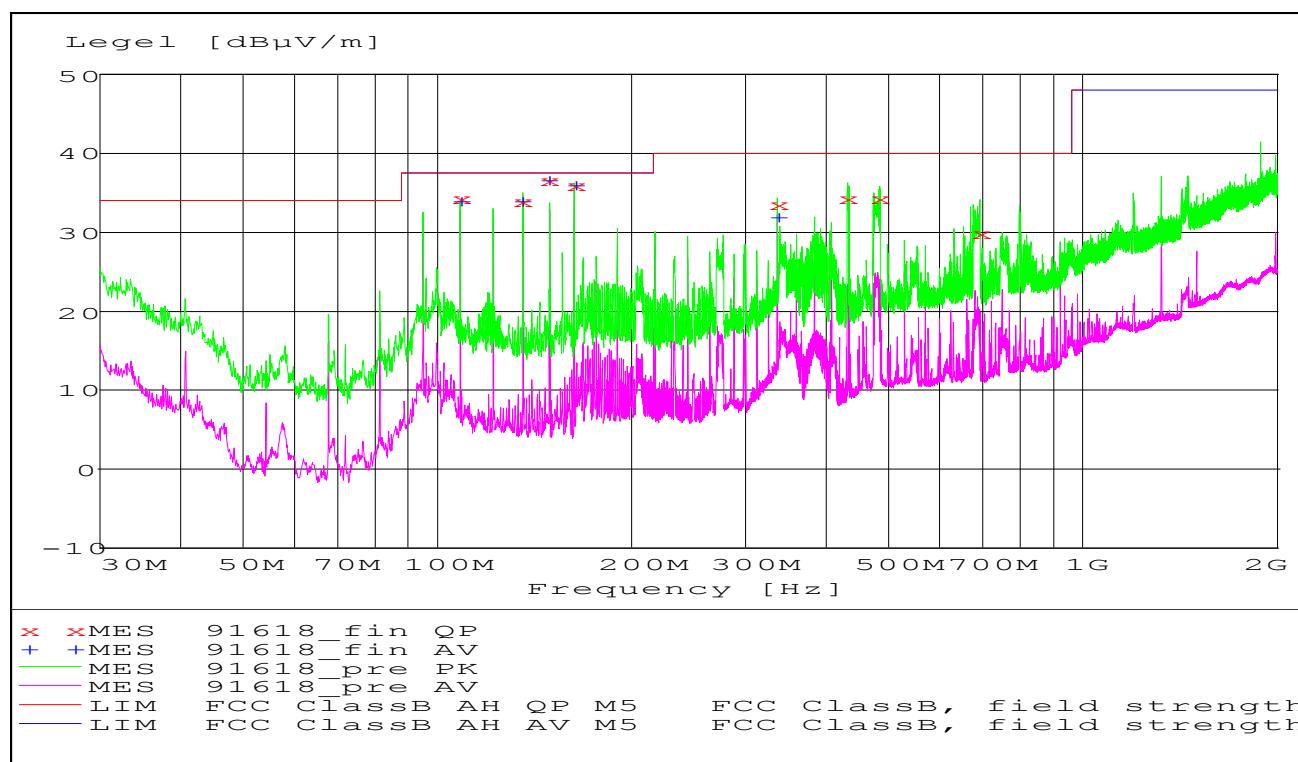

TEST REPORT REFERENCE: F091618E1

The following frequencies were found during the preliminary radiated emission test:

40.720 MHz, 67.830 MHz, 81.360 MHz, 94.950 MHz, 122.080 MHz, 144.080 MHz,
149.160 MHz, 176.320 MHz, 189.840 MHz, 216.960 MHz, 335.992 MHz, 431.260 MHz,
480.000 MHz, 483.760 MHz, 691.560 MHz, 692.764 MHz

The following frequencies were found inside the restricted bands according to
FFC 47 CFR Part 15 section 15.205 [2].

108.480 MHz, 135.600 MHz, 162.720 MHz, 325.440 MHz,

These frequencies have to be measured on the open area test site. The results of this final measurement are
shown in subclause 6.2.5 of this test report.

TEST EQUIPMENT USED FOR THE TEST:
29, 31 – 35, 43

TEST REPORT REFERENCE: F091618E1

6.2.4 FINAL RADIATED EMISSION TEST (9 kHz to 30 MHz)

Ambient temperature:	18 °C	Relative humidity:	56 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m and 10 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in TAG reading mode of the EUT (reading a 13.56 MHz TAG). All results are shown in the following.

Supply voltage: During this test the EUT was powered via USB from a Laptop Medion MD 96500.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{antenna factor [dB/m]}$$

Results with measuring distance of 3 m						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
13.56 MHz	64.5	124.0	59.5	QP	44.5	20.0
27.12 MHz	31.6	69.5	37.9	QP	11.6	20.0
Results with measuring distance of 10 m						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
13.56 MHz	41.9	104.0	59.5	QP	21.9	20.0
27.12 MHz	Signal was below the noise floor of the system					
Results with measuring distance of 30 m						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
13.56 MHz	Signal was below the noise floor of the system, so the extrapolated result for the 30 m distance is 24.5 dB μ V/m.					
27.12 MHz	Signal was below the noise floor of the system					
Measurement uncertainty		+2.2 dB / -3.6 dB				

*: Cable loss included

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

56, 57

TEST REPORT REFERENCE: F091618E1

6.2.5 FINAL RADIATED EMISSION TEST (30 MHz to 2 GHz)

Ambient temperature:	20 °C	Relative humidity:	45 %
----------------------	-------	--------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.


Test record: The test was carried out in TAG reading mode of the EUT (reading a 13.56 MHz TAG). All results are shown in the following.

Supply voltage: During this test the EUT was powered via USB from a Laptop Medion MD 96500.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with an x are the measured results of the standard final measurement on the open area test site.

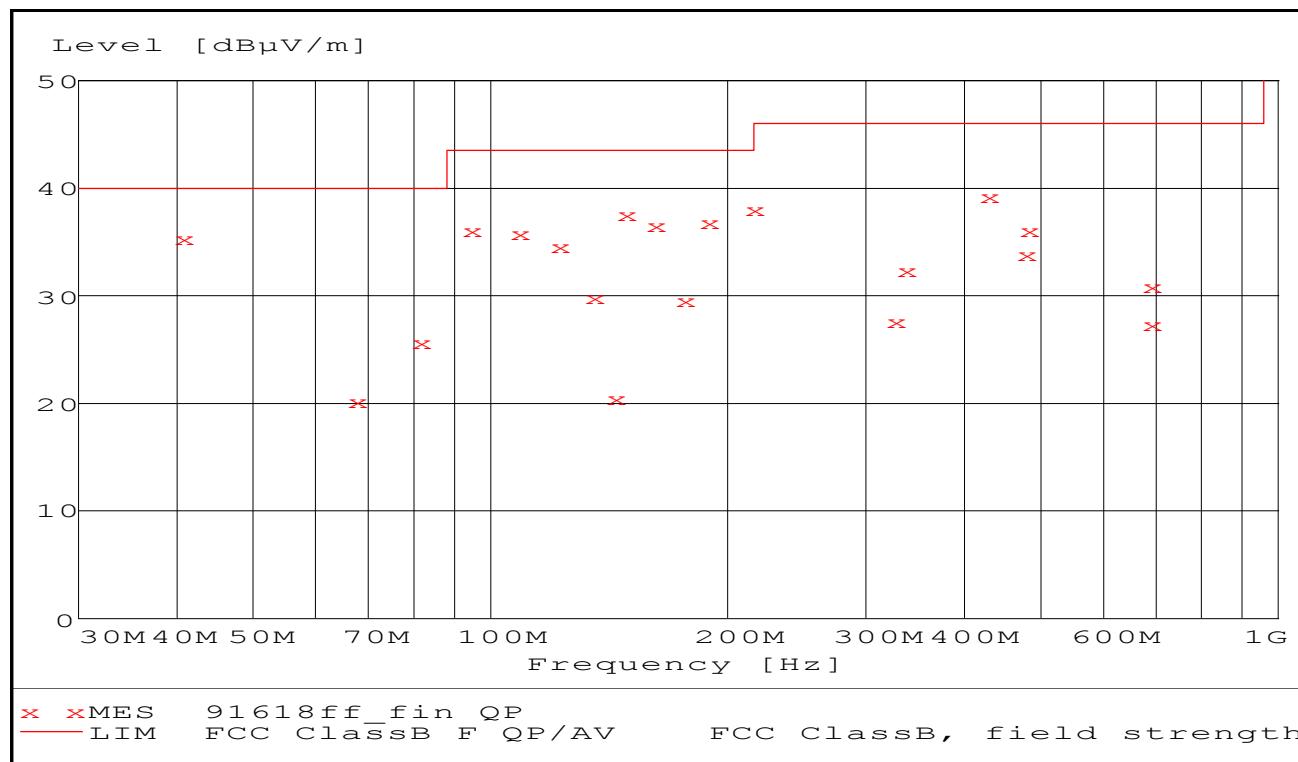

TEST REPORT REFERENCE: F091618E1

The results of the standard final measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above-mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.

Result measured with the quasipeak detector:

(These values are marked in the diagram by an x)

Spurious emissions outside restricted bands									
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
40.720	35.4	40.0	4.6	20.4	14.3	0.7	100	0	VERT.
67.830	20.2	40.0	19.8	13.0	6.3	0.9	200	0	HOR.
81.360	25.7	40.0	14.3	16.5	8.2	1.0	200	0	HOR.
94.950	36.1	43.5	7.4	24.5	10.5	1.1	200	180	HOR.
122.080	34.6	43.5	8.9	21.0	12.4	1.2	200	180	HOR.
144.080	20.4	43.5	23.1	7.3	11.8	1.3	200	177	HOR.
149.160	37.5	43.5	6.0	24.5	11.7	1.3	199	0	HOR.
176.320	29.7	43.5	13.8	18.4	9.8	1.5	150	180	HOR.
189.840	36.8	43.5	6.7	26.3	9.0	1.5	110	30	HOR.
216.960	38.1	46.0	7.9	26.9	9.6	1.6	119	38	HOR.
335.992	32.5	46.0	13.5	16.7	13.8	2.0	120	27	VERT.
431.260	39.3	46.0	6.7	20.7	16.3	2.3	100	25	VERT.
480.000	33.8	46.0	12.2	14.4	17.0	2.4	100	0	VERT.
483.760	36.1	46.0	9.9	16.5	17.1	2.5	100	30	VERT.
691.560	30.9	46.0	15.1	8.0	19.9	3.0	117	315	HOR.
692.764	27.4	46.0	18.6	4.5	19.9	3.0	100	170	VERT.
Spurious emissions in restricted bands									
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
108.480	35.9	43.5	7.6	23.2	11.6	1.1	194	0	HOR.
135.600	30	43.5	13.5	16.8	11.9	1.3	100	148	VERT.
162.720	36.6	43.5	6.9	24.3	10.9	1.4	150	0	HOR.
325.440	27.8	46.0	18.2	12.4	13.5	1.9	100	0	HOR.
Measurement uncertainty				+2.2 dB / -3.6 dB					

The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:
14 - 20

TEST REPORT REFERENCE: F091618E1

6.3 SPECTRUM MASK

Ambient temperature:	21 °C
----------------------	-------

Relative humidity:	60 %
--------------------	------

Supply voltage: The EUT was supplied by the laptop PC.


Test record: The test was carried out while the EUT was reading a TAG.

The Reference level in the plot below was calculated with the following formula:

$$\text{Reflevel} = (\text{Limit}_{\text{OATS}} - \text{Level}_{\text{OATS}}) + \text{Marker value}$$


Where $\text{Limit}_{\text{OATS}} = 84.0 \text{ dB}\mu\text{V/m}$, $\text{Level}_{\text{OATS}} = 24.5 \text{ dB}\mu\text{V/m}$ (Level at 3 m – 40 dB) and Marker value = 88.0 dB μ V.

91618S1.wmf: Spectrum mask at 13.560 MHz:

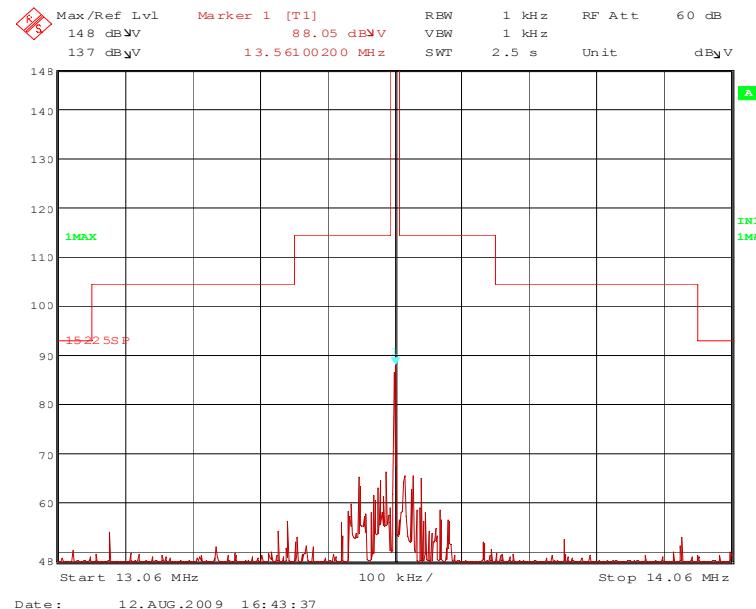

TEST REPORT REFERENCE: F091618E1

91618S2.wmf: Spectrum mask at 13.560 MHz:

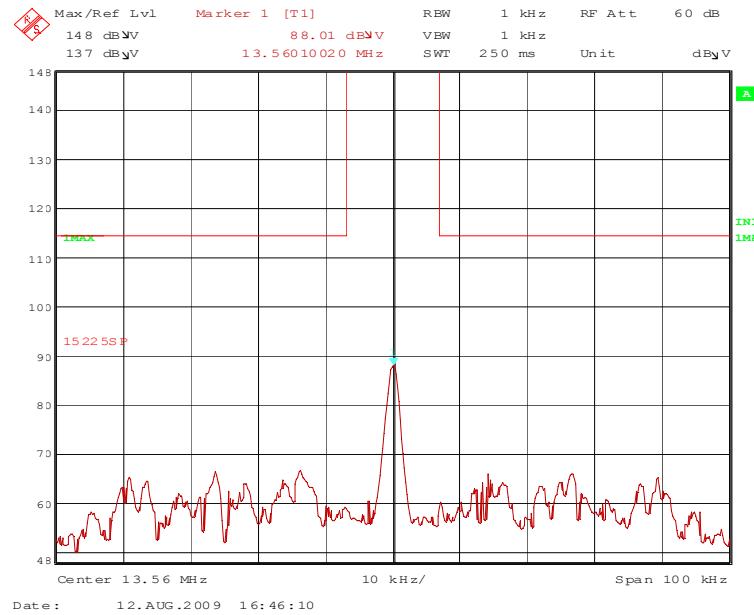

Test result: Passed

TEST EQUIPMENT USED THE TEST:

31, 58, 59

TEST REPORT REFERENCE: F091618E1

6.4 FREQUENCY TOLERANCE

Ambient temperature	21 °C	Relative humidity	60 %
---------------------	-------	-------------------	------

Test set-up: For this test the EUT was fixed on a wooden table inside the climatic chamber.

Cable guide: For further information of the cable guide refer to the pictures in annex A of this test report.

Remark: During a preliminary test no changing of the output frequency was measurable while changing the AC mains voltage in the range 85 % to 115 %. For this reason this variation was not carried out during this test. As declared by the applicant, the EUT is intended to be used for indoor applications. Therefore the range of the temperature variation was chosen from 0 °C to 50 °C.

Temperature	Supply voltage	Minutes after switch on	Frequency [MHz]	Allowed tolerance	Measured tolerance	Result
50 °C		0	13.559920	±1.356 kHz	91 Hz	Passed
		2	13.559935	±1.356 kHz	106 Hz	Passed
		5	13.559946	±1.356 kHz	117 Hz	Passed
		10	13.559947	±1.356 kHz	118 Hz	Passed
40 °C		0	13.559895	±1.356 kHz	66 Hz	Passed
		2	13.559912	±1.356 kHz	83 Hz	Passed
		5	13.559914	±1.356 kHz	85 Hz	Passed
		10	13.559921	±1.356 kHz	92 Hz	Passed
30 °C		0	13.559860	±1.356 kHz	31 Hz	Passed
		2	13.559871	±1.356 kHz	42 Hz	Passed
		5	13.559879	±1.356 kHz	50 Hz	Passed
		10	13.559865	±1.356 kHz	36 Hz	Passed
20 °C		0	13.559816	±1.356 kHz	-13 Hz	Passed
		2	13.559821	±1.356 kHz	-8 Hz	Passed
		5	13.559824	±1.356 kHz	-5 Hz	Passed
		10	13.559829	-	0 Hz	Reference
10 °C		0	13.559807	±1.356 kHz	-22 Hz	Passed
		2	13.559800	±1.356 kHz	-29 Hz	Passed
		5	13.559799	±1.356 kHz	-30 Hz	Passed
		10	13.559799	±1.356 kHz	-30 Hz	Passed
0 °C		0	13.559788	±1.356 kHz	-41 Hz	Passed
		2	13.559790	±1.356 kHz	-39 Hz	Passed
		5	13.559795	±1.356 kHz	-34 Hz	Passed
		10	13.559796	±1.356 kHz	-33 Hz	Passed
Measurement uncertainty				< ± 1*10 ⁻⁷		

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:
31, 58, 59, 61

TEST REPORT REFERENCE: F091618E1

7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
1	Shielded chamber M4	-	Siemens	B83117S1-X158	480088	Weekly verification (system cal.)	
2	Measuring receiver	ESAI	Rohde & Schwarz	831953/001 833181/018	480025 480026	06/16/2009	06/2011
3	LISN	NSLK8128	Schwarzbeck	8128155	480058	01/15/2009	01/2011
4	DC-filter	B84266-A21-E13	Siemens	940164525	480099	Weekly verification (system cal.)	
5	AC-filter	B84299-D87-E3	Siemens	930262292	480097	Weekly verification (system cal.)	
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111	-	-
14	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification (system cal.)	
15	Measuring receiver	ESCS30	Rohde & Schwarz	828985/014	480270	02/27/2008	02/2010
16	Controller	HD100	Deisel	100/670	480139	-	-
17	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
18	Antenna support	AS615P	Deisel	615/310	480086	-	-
19	Antenna	CBL6111 A	Chase	1643	480147	08/01/2007	08/2012
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111	-	-
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	02/25/2008	02/2010
32	Controller	MCU	Maturo GmbH	MCU/043/971107	480832	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2688	480328	10/11/2005	10/2010
43	RF-cable No. 30	RTK 081	Rosenberger	-	410141	Weekly verification (system cal.)	
56	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	02/19/2008	02/2013
57	EMI test receiver	ESPC	Rohde & Schwarz	843756/006	480150	02/28/2008	02/2010
58	Loop Antenna Ø = 225 mm	-	Phoenix Test-Lab	-	410085	Weekly verification	
59	RF-cable No. 10	RG223	Phoenix-Test-Lab	-	410102	Weekly verification	
61	Climatic chamber	MK 240	BINDER	05-79022	480462	07/01/2009	01/2011

TEST REPORT REFERENCE: F091618E1

8 LIST OF ANNEXES

ANNEX A	PHOTOGRAPHS OF THE TEST SET-UPS:	4 pages
	ASK-CPL 407, test set-up shielded chamber	91618emic1
	ASK-CPL 407, test set-up fully anechoic chamber	91618emi1
	ASK-CPL 407, test set-up outdoor test site	91618emiout1
	ASK-CPL 407, test set-up open area test site	91618emiff1
ANNEX B	INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	8 pages
	ASK-CPL 407, main PCB, top view	91618eut1
	ASK-CPL 407, main PCB, bottom view	91618eut2
	ASK-ANT 400, antenna PCB, top view	91618eut3
	ASK-ANT 400, antenna PCB, bottom view	91618eut4
	ASK-CPL-U & ANT 400, PCB's view	91618eut12
	ASK-CPL-U & ANT 400, PCB's view	91618eut10
	ASK-CPL-U & ANT 400, PCB's view	91618eut11
	ASK-CPL-U & ANT 400, inside view	91618eut13
ANNEX C	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	2 pages
	ASK-CPL 407, 3-D-view 1	91618eut5
	ASK-CPL 407, 3-D-view 2	91618eut6