



Registration No. DAT-P-207/05

FCC ID: U9A277IWLAN-V210

EMI -- TEST REPORT

- FCC Part 15.249 -

Test Report No. :	T34492-00-00AA	15. October 2010
		Date of issue

Type / Model Name : MobilePanel277IWLAN V2 / 277FIWLAN V2

Product Description : Mobile Human Machine Interface

Applicant : Siemens AG, Industry Sector, IIA AS RD ST TT

Address : Werner-von-Siemens-Str. 50
92224 Amberg, Germany

Manufacturer : Siemens AG, Industry Sector, IIA AS FA HMI

Address : Gleiwitzer Str. 555
90475 Nürnberg, Germany

Licence holder : Siemens AG, Industry Sector, IIA AS RD ST TT

Address : Werner-von-Siemens-Str. 50
92224 Amberg, Germany

Test Result according to the standards listed in clause 1 test standards:
--

POSITIVE



DAT-P-207/05-00

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: U9A277IWLAN-V210

Contents

1 TEST STANDARDS	3
2 SUMMARY	4
3 EQUIPMENT UNDER TEST	5
3.1 Photo documentation of the EUT – Please see attachment A	5
3.2 Power supply system utilised	5
3.3 Short description of the equipment under test (EUT)	5
4 TEST ENVIRONMENT	6
4.1 Address of the test laboratory	6
4.2 Environmental conditions	6
4.3 Statement of the measurement uncertainty	6
4.4 Measurement protocol for FCC, VCCI and AUSTEL	7
5 TEST CONDITIONS AND RESULTS	8
5.1 Conducted emissions	8
5.2 Radiated emission of the fundamental frequency	12
5.3 Radiated emissions outside specified frequency bands	15
5.4 20 dB Bandwidth	24
5.5 Maximum Permissible Exposure (MPE)	27
5.6 Antenna application	29
6 USED TEST EQUIPMENT AND ACCESSORIES	30

FCC ID: U9A277IWLAN-V210

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2009)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2009)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.249	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz
ANSI C63.4: 2009	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006	Information technology equipment

FCC Rules and Regulations Part 1 Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits.
-----------------------------------	---

OET Bulletin 65, 65A, 65B, 65C Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

FCC ID: U9A277IWLAN-V210

2 SUMMARY

GENERAL REMARKS:

The EuT consists of 1 WLAN miniPCI module and 1 Effective Range Module (Chirp 2.45 GHz) which measure the distance between Mobile Panel and accompanying Transponder.

The Effective Range Module is connected to an internal dual port patch antenna (gain=2.6 / 2.7 dBic).

The frequency range was scanned from 9 kHz to 25000 MHz. All emissions not reported in this test report are more than 20 dB below the specified limit.

The Mobile Panel 277F IWLAN offers the possibility of having the mobile safety functions of emergency stop at any point of a machine or plant. The 277 IWLAN doesn't have the safety function. Both are electronically identical however the 277 IWLAN is not equipped with the relevant parts necessary for the safety function.

All tests have been carried out with the full equipped 277F IWLAN Mobile Panel.

This test report describes only the assessment of the Effective Range Module in the 2.4 GHz frequency band. The EuT has been measured in active transmitting mode. All measurements have been carried out radiated.

The receive mode is too short to be measured.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 20 July 2010

Testing concluded on : 10 September 2010

Checked by:

Tested by:

Klaus Gegenfurtner
Dipl.-Ing.(FH)
Manager: Radio Group

Anton Altmann
Dipl.-Ing.(FH)

FCC ID: U9A277IWLAN-V210

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT – Please see attachment A

3.2 Power supply system utilised

Power supply voltage : 7.2 V DC Battery
Power supply voltage (alternative) : Input: 110-240 V / 47-63 Hz / 1φ Power supply
Output: +12 V DC

3.3 Short description of the equipment under test (EUT)

The MobilePanel277IWLAN V2 / 277FIWLANV2 permits mobile operation at any point in the system. The HMI device communicates with the PLC via WLAN. The HMI device is equipped with a zone recognition function. The operator can operate the system wireless at almost any location on the machine or system.

Number of tested samples: 1
Serial number: Prototype

EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- Continuous transmitting mode at 2.4 GHz

- Data transmission with AP (WLAN 5 GHz)

EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- AC/DC power supply Model : MEAN WELL GS60A12
- _____ Model : _____

FCC ID: U9A277IWLAN-V210

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production processes may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for specific tests. The manufacturer has the sole responsibility of continued compliance of the EUT.

FCC ID: U9A277IWLAN-V210

4.4 Measurement protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.4.2 DETAILS OF TEST PROCEDURES

4.4.2.1 General Standard Information

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

FCC ID: U9A277IWLAN-V210

5 TEST CONDITIONS AND RESULTS


5.1 Conducted emissions

For test instruments and accessories used see section 6 Part **A 4**.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

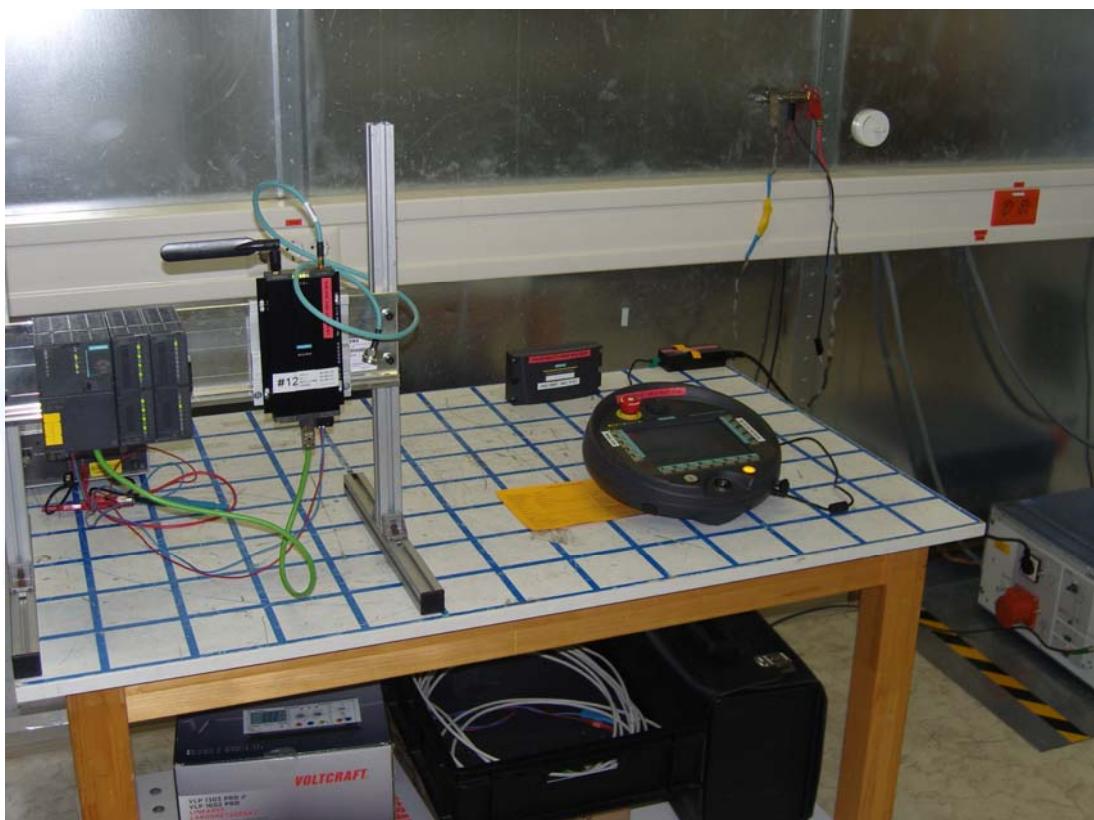

FCC ID: U9A277IWLAN-V210

5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

5.1.4 Description of Measurement

The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a line impedance stabilization network (LISN) with $50\Omega/50\mu H$ (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 cm above the floor and is positioned 40 cm from the vertical ground plane (wall) of the screen room. The correction factors for cable loss are stored in the memory of the EMI receiver therefore the final level (dB μ V) appears directly in the reading of the EMI receiver. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded. The measurement is performed attending the US AC mains 120V/60 Hz.

To convert between dB μ V and μ V, the following conversions apply:

$$\begin{aligned} \text{dB}\mu\text{V} &= 20(\log \mu\text{V}) \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz


Min. limit margin -9.2 dB at 26 MHz

The requirements are **FULFILLED**.

Remarks: The EuT keeps the requirements of EN 55022 class B.


FCC ID: U9A277IWLAN-V210

5.1.6 Test protocol

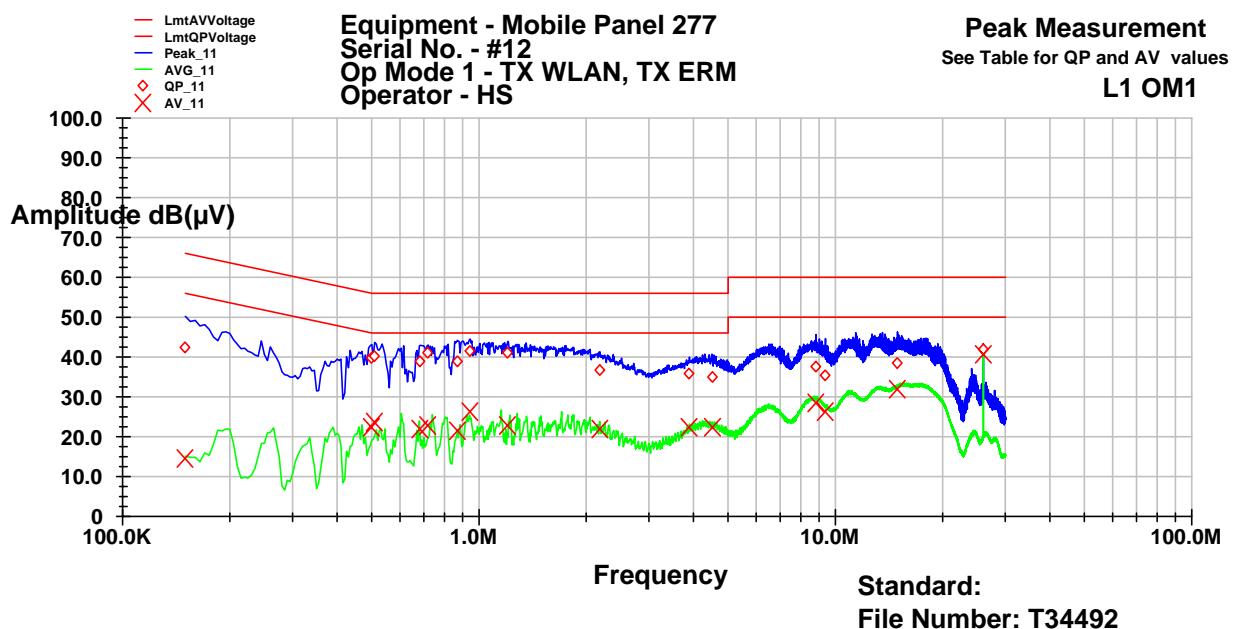

Frequency	QP Level	QP Delta	QP Limit	AV Level	AV Delta	AV Limit
MHz	dB(μ V)	dB	dB	dB(μ V)	dB	dB
0.15	42.3	-23.8	66.0	14.6	-41.3	56.0
0.5	39.7	-16.3	56.0	22.5	-23.5	46.0
0.51	40.4	-15.6	56.0	23.6	-22.4	46.0
0.685	39.0	-17.0	56.0	21.8	-24.2	46.0
0.72	41.2	-14.8	56.0	22.8	-23.2	46.0
0.87	39.0	-17.0	56.0	21.3	-24.7	46.0
0.945	41.5	-14.5	56.0	26.3	-19.7	46.0
1.205	41.0	-15.0	56.0	22.8	-23.2	46.0
2.185	36.5	-19.5	56.0	22.0	-24.0	46.0
3.895	35.7	-20.3	56.0	22.4	-23.6	46.0
4.505	35.0	-21.0	56.0	22.3	-23.7	46.0
8.83	37.8	-22.2	60.0	28.5	-21.5	50.0
9.375	35.5	-24.5	60.0	26.2	-23.8	50.0
14.935	38.6	-21.4	60.0	31.9	-18.1	50.0
26	41.8	-18.3	60.0	40.8	-9.2	50.0

FCC ID: U9A277IWLAN-V210

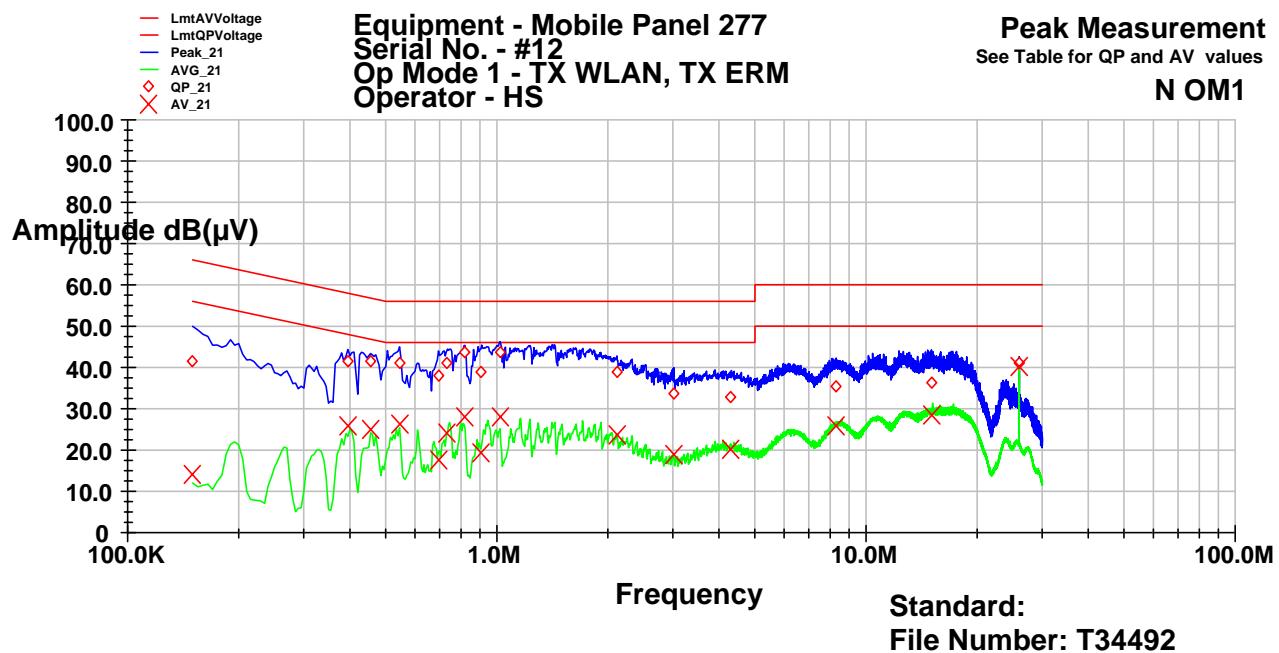

Frequency	QP Level	QP Delta	QP Limit	AV Level	AV Delta	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.15	41.5	-24.5	66.0	14.2	-41.8	56.0
0.395	41.7	-16.3	58.0	25.9	-22.0	48.0
0.455	41.4	-15.4	56.8	24.8	-22.0	46.8
0.545	41.2	-14.8	56.0	26.2	-19.8	46.0
0.695	37.9	-18.1	56.0	17.5	-28.5	46.0
0.735	41.1	-14.9	56.0	24.0	-22.0	46.0
0.82	43.6	-12.4	56.0	28.2	-17.8	46.0
0.91	38.8	-17.2	56.0	19.1	-26.9	46.0
1.02	43.9	-12.1	56.0	28.2	-17.8	46.0
2.115	38.7	-17.3	56.0	23.9	-22.1	46.0
3.015	33.5	-22.5	56.0	18.7	-27.3	46.0
4.315	32.9	-23.1	56.0	20.4	-25.6	46.0
8.295	35.5	-24.5	60.0	25.8	-24.2	50.0
15.02	36.4	-23.6	60.0	28.5	-21.5	50.0
26	41.2	-18.8	60.0	40.2	-9.8	50.0

FCC ID: U9A277IWLAN-V210

5.2 Radiated emission of the fundamental frequency


For test instruments and accessories used see section 6 Part **CPR 3**.

5.2.1 Description of the test location

Test location: Anechoic Chamber A2

Test distance: 3 metres

5.2.2 Photo documentation of the test set-up

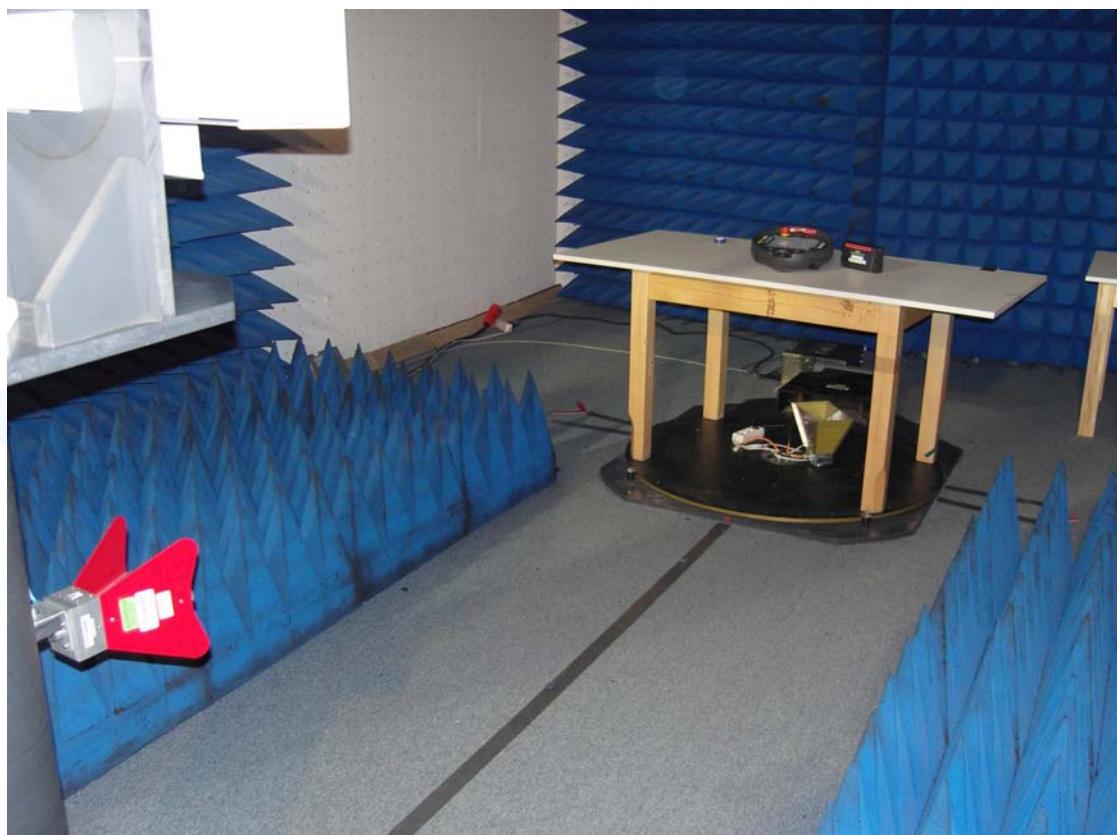

FCC ID: U9A277IWLAN-V210

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.249(a):

The fieldstrength of emissions from intentional radiators within these frequency bands shall comply with the following table:

Fundamental Frequency (MHz)	Fieldstrength of Fundamental	
	(mV/m)	(dB μ V/m)
902 - 928	50	94
2400 – 2483.5	50	94
5725 - 5875	50	94
24.0 – 24.25 GHz	250	108

5.2.2 Description of Measurement

As shown in Section 15.35(b) the emissions above 1000 MHz are based on average limits. However the peak fieldstrength shall not exceed the maximum permitted average limit by more than 20 dB. The set up of the EUT shall be in accordance with ANSI C63.4. The fundamental frequency has been measured radiated using a spectrum analyzer at a distance of 3 m with the following settings:

RBW=1 MHz, VBW=1 MHz, Peak detector

5.2.3 Test result

Frequency (MHz)	Reading Level Pk (dB μ V)	Reading Level AV (dB μ V)	Bandwidth (kHz)	Correction Factor (dB/m)	Corrected Level Pk (dB μ V/m)	Corrected Level AV (dB μ V/m)	Average Limit (dB μ V/m)	Delta (dB)
2463	100.0	---	1000	-9.6	90.4	---	94	-3.6

Note: Where correction factor means cable loss, amplifier gain and antenna factor.


The value at 2463 MHz is the highest emission in the frequency band from 2400 to 2483.5 MHz.

The requirements are **FULFILLED**.

Remarks:	<u>Because the peak value is below the average limit, no AV-measurement has been performed.</u>
	<u>The EuT is transmitting only in the designed band and not in any restricted bands.</u>
	<u>For detailed test result refer to following plot.</u>

FCC ID: U9A277IWLAN-V210

R
S

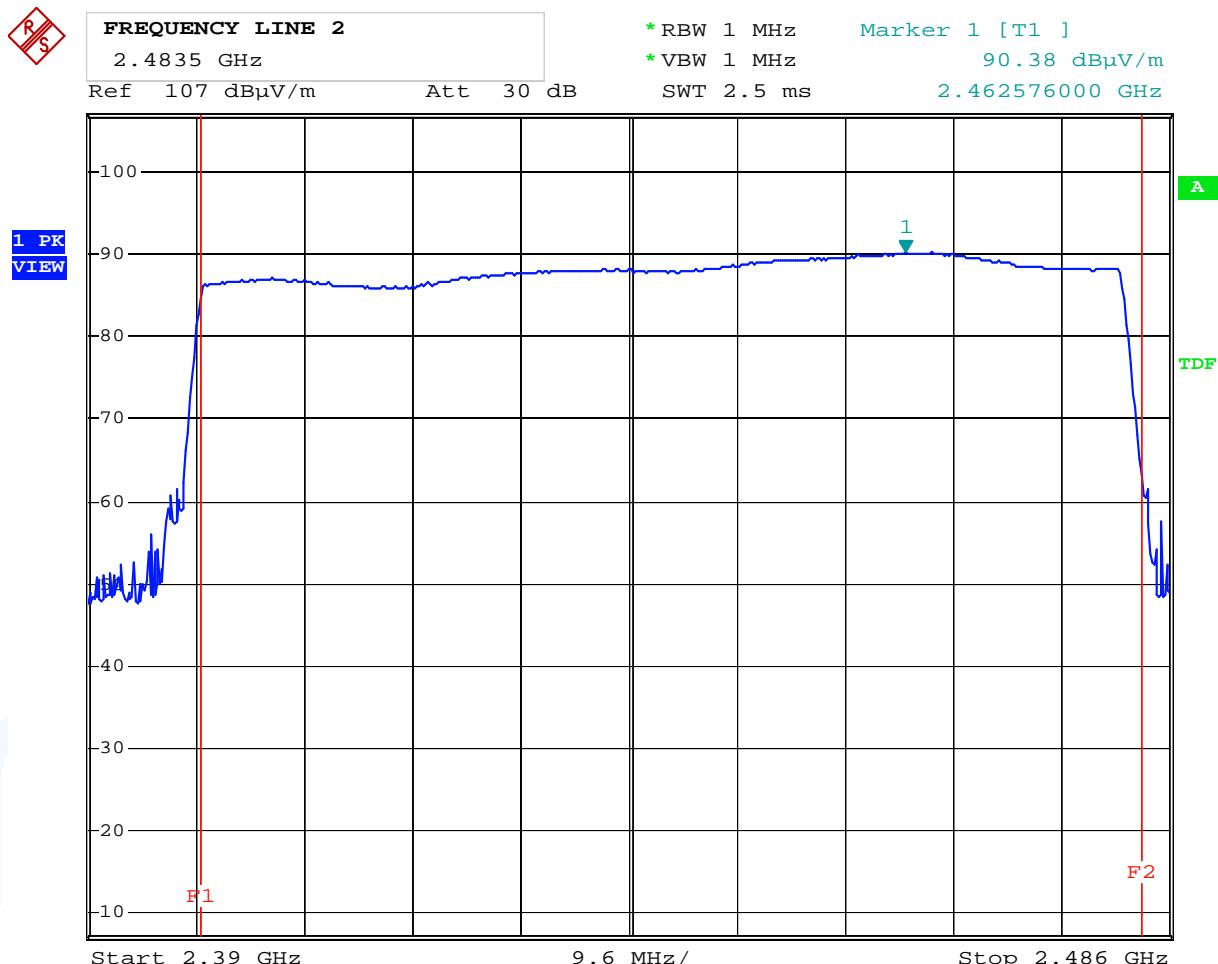

Date: 23.AUG.2010 12:40:13

FCC ID: U9A277IWLAN-V210

5.3 Radiated emissions outside specified frequency bands

For test instruments and accessories used see section 6 Part **SER 1, SER 2, SER 3**.


5.3.1 Description of the test location

Test location: OATS1
Test distance: 3 metres

Test location: Anechoic Chamber A2
Test distance: 3 metres

5.3.2 Photo documentation of the test set-up

Anechoic chamber

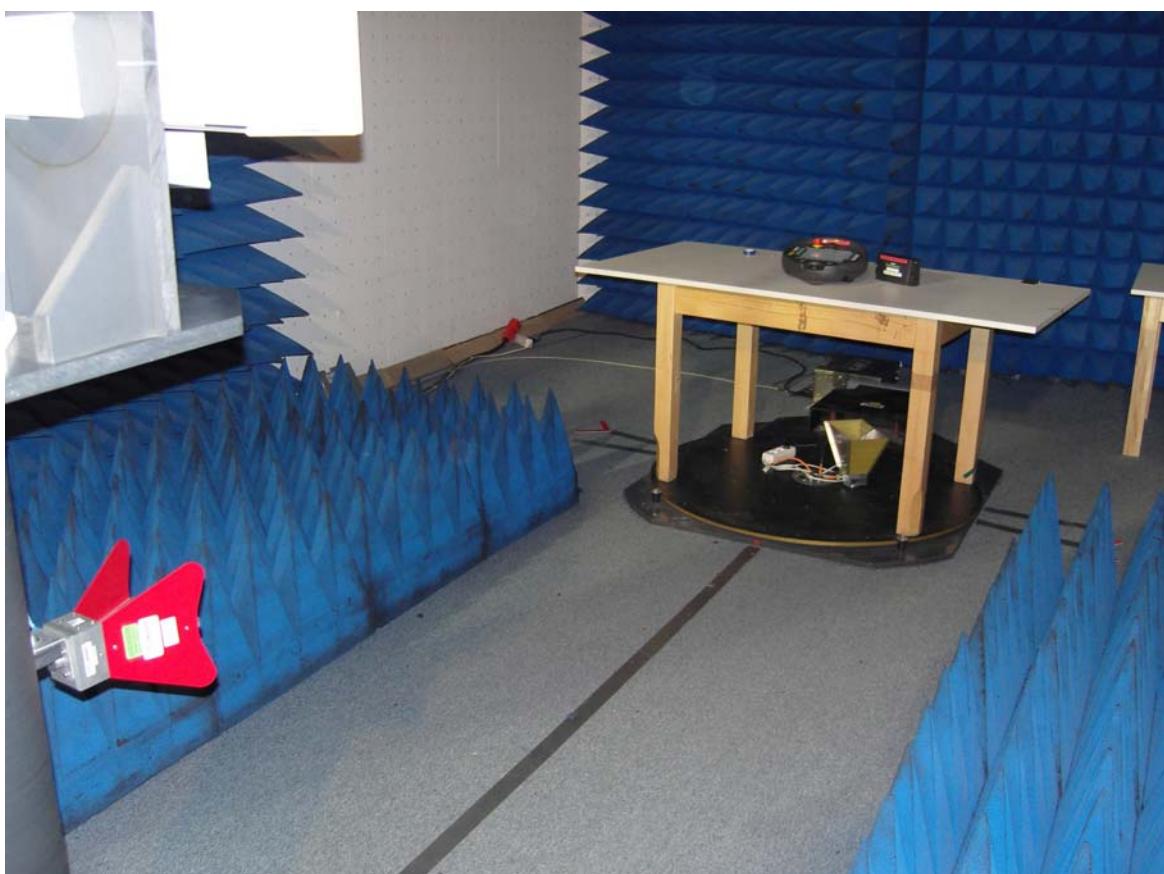

FCC ID: U9A277IWLAN-V210

OATS1 (30-1000 MHz)



OATS1 (9 kHz-30 MHz)



FCC ID: U9A277IWLAN-V210

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.249 (d):

Emission radiated outside of the specified frequency bands, except harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in FCC Part 15C, Section 15.209, whichever is the lesser attenuation.

5.3.4 Description of Measurement

The radiated spurious emissions of the EUT are measured in the frequency range from 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 9 kHz and 1000 MHz are based employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. The set up of the EUT shall be in accordance with ANSI C63.4.

The emissions above 1000 MHz have been measured using a peak detector and RBW=VBW=1 MHz. The peak field strength must comply with the limits specified in Section 15.35 (b). Then the VBW have been set to 10 Hz, while maintaining all of the other instrument settings. The peak level now must comply with the limit specified in Section 15.209. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

5.3.5 Test result f < 1 GHz

Frequency (MHz)	Reading Level QP (dB μ V)	Reading Level AV (dB μ V)	Bandwidth (kHz)	Correction Factor (dB/m)	Corrected Level QP (dB μ V/m)	Corrected Level AV (dB μ V/m)	Limit (dB μ V/m)	Delta (dB)
0.009-0.150	---	---	0.200	---	---	---	---	---
0.150-30	---	---	9	---	---	---	---	---
143	26.2	---	120	15.4	41.6	---	43.5	-1.9
156	24.1	---	120	15.8	39.9	---	43.5	-3.6
169	18.5	---	120	15.4	33.9	---	43.5	-9.6
175	14.5	---	120	15.0	29.5	---	43.5	-14.0
182	21.3	---	120	14.5	35.8	---	43.5	-7.7
208	22.1	---	120	13.2	35.3	---	43.5	-8.2
234	18.8	---	120	14.9	33.7	---	46.0	-12.3
250	19.2	---	120	14.9	34.1	---	46.0	-11.9
260	20.8	---	120	15.3	36.1	---	46.0	-9.9
312	18.7	---	120	17.0	35.7	---	46.0	-10.3
416	11.5	---	120	19.5	31.0	---	46.0	-15.0
442	15.7	---	120	20.1	35.8	---	46.0	-10.2
546	12.2	---	120	22.6	34.8	---	46.0	-11.2
598	11.5	---	120	23.7	35.2	---	46.0	-10.7
624	11.5	---	120	24.2	35.7	---	46.0	-10.3
702	8.7	---	120	25.5	34.2	---	46.0	-11.8

Remark: According to Section 15.31 (f) (2): The measurement below 30 MHz has been performed at a distance of 3 m. The results have been extrapolated to the specified distance by using the square of an inverse linear distance extrapolation factor of 40 dB/decade.

FCC ID: U9A277IWLAN-V210

5.3.6 Test result f > 1 GHz

Frequency (MHz)	Level PK (dB μ V)	Duty Cycle Correction (dB)	Level AV (dB μ V)	Correction Factor (dB/m)	Corrected Level PK (dB μ V/m)	Corrected Level AV (dB μ V/m)	Limit PK (dB μ V/m)	Limit AV (dB μ V/m)	Delta (dB)
2758	61.6	---	---	-9.5	51.6	---	74	54	-2.4
2399.9	51.9	---	---	-10.0	41.9	---	74	54	-12.1
2483.6	68.2	---	55.5	-9.5	58.7	46.0	74	54	-8.0
2484.1	66.8	---	52.4	-9.5	57.3	42.9	74	54	-11.1
3790	61.3	---	---	-7.6	53.7	---	74	54	-0.3
4848	49.3	---	---	4.2	53.5	---	74	54	-0.5
18-25 GHz	---	---	---	---	---	---	74	54	---

Note: Where correction factor means cable loss, amplifier gain and antenna factor.

Remark: The limits according to Section 15.209 apply as appropriate limits because they are the lesser attenuation.

Limits according to FCC Part 15C, Section 15.209:

Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/f(kHz)	300
0.490 - 1.705	24000/f(kHz)	30
1.705 - 30.0	30	30
30 - 88	40	3
88 - 216	43,5	3
216 - 960	46	3
Above 960	54	3


The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic (25000 MHz).

For detailed test result please refer to following plots.


FCC ID: U9A277IWLAN-V210

Spurious emissions from 30 to 300 MHz

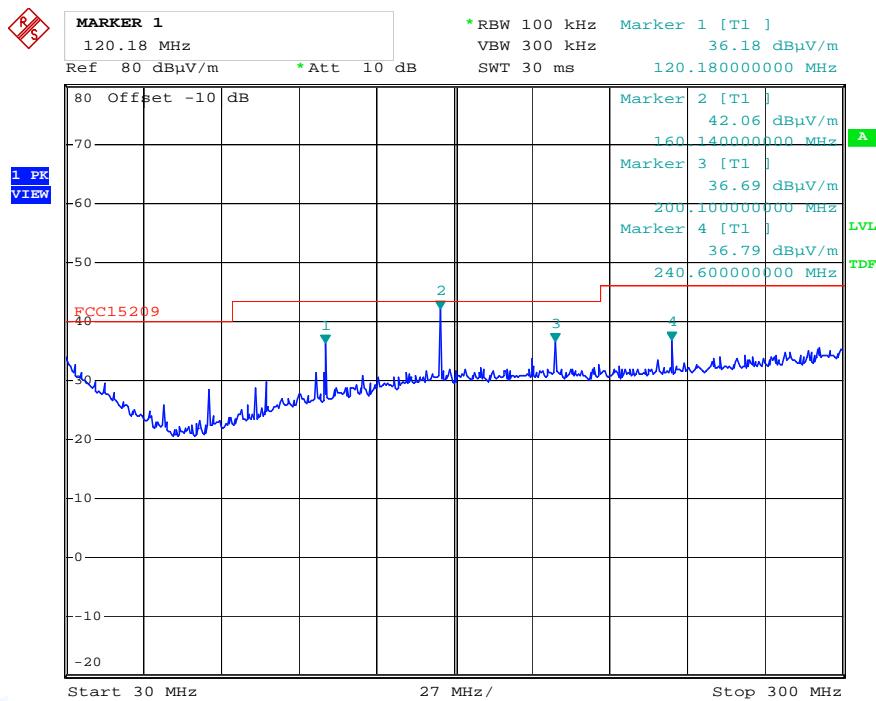

Date: 26.JUL.2010 13:41:52


Spurious emissions from 300 to 1000 MHz

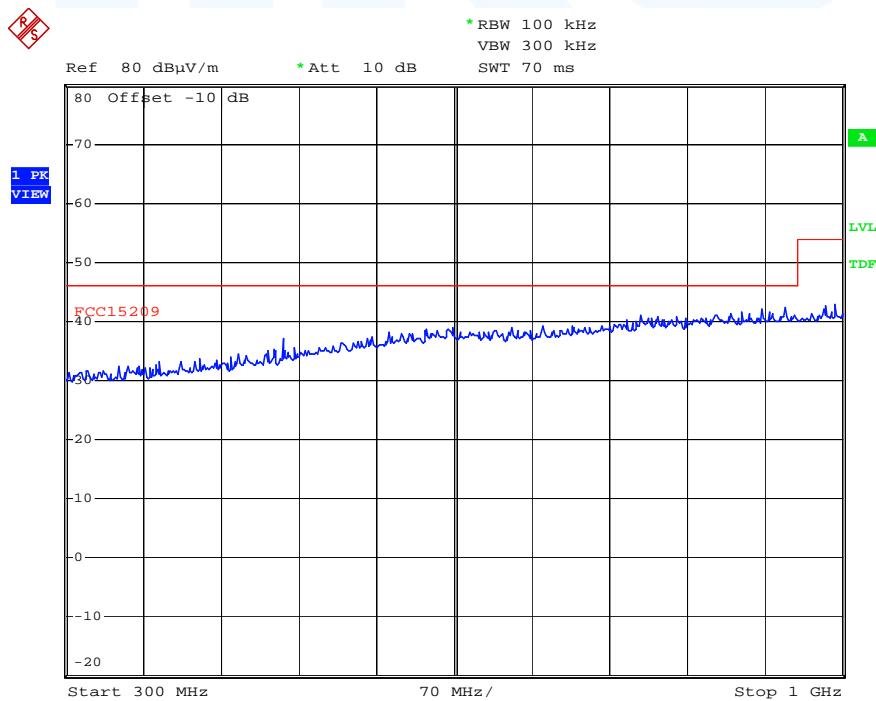

Date: 26.JUL.2010 13:38:32


FCC ID: U9A277IWLAN-V210

Spurious emissions from 1 to 4 GHz
(incl. Fundamental carrier)

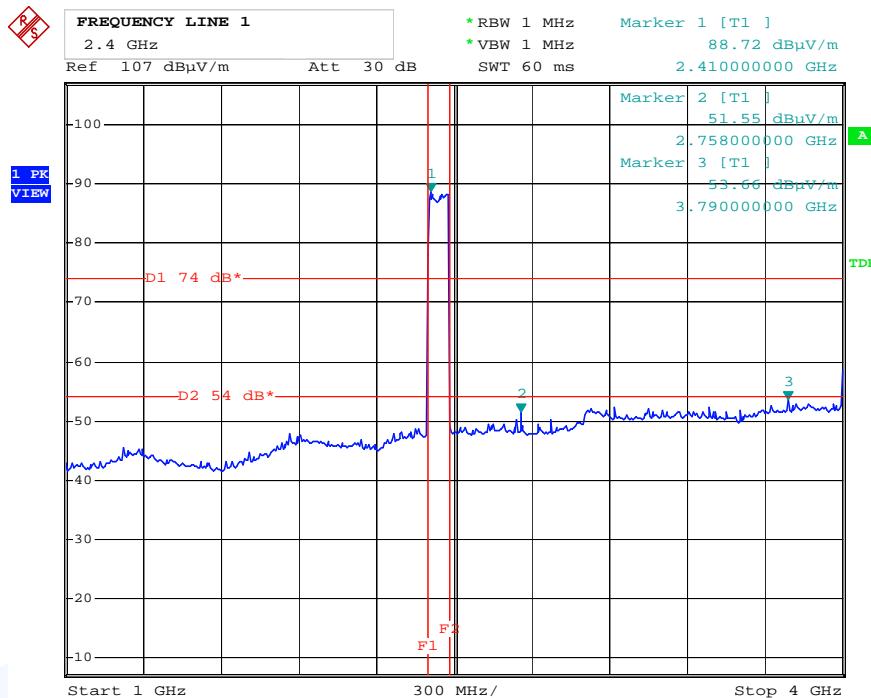

Date: 23.AUG.2010 12:49:08

Spurious emissions from 4 to 12 GHz

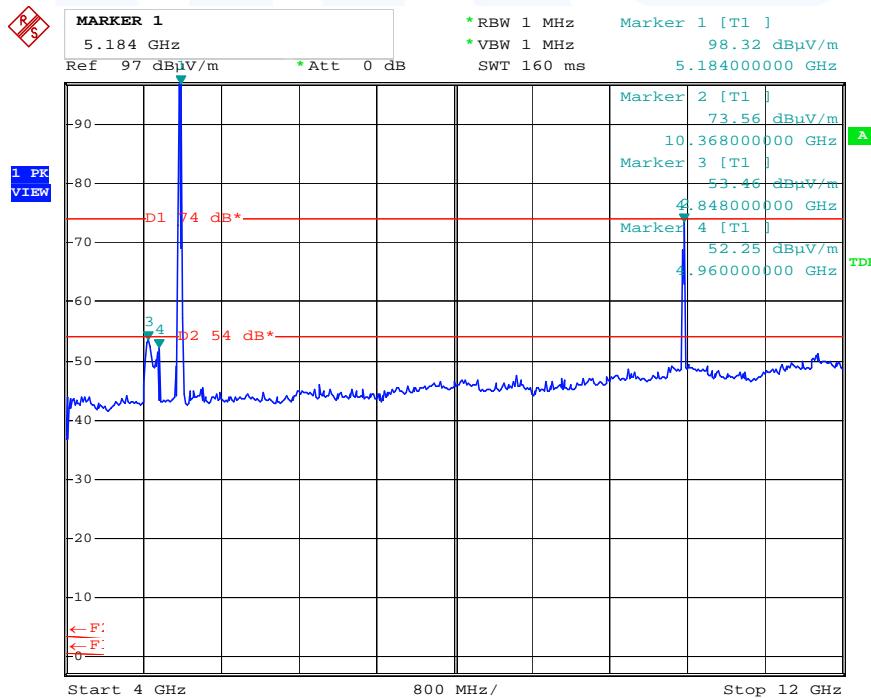


Date: 23.AUG.2010 12:56:42

The value of marker 1 and marker 2 refers to 5 GHz WLAN signal.


FCC ID: U9A277IWLAN-V210

Spurious emissions from 12 to 18 GHz

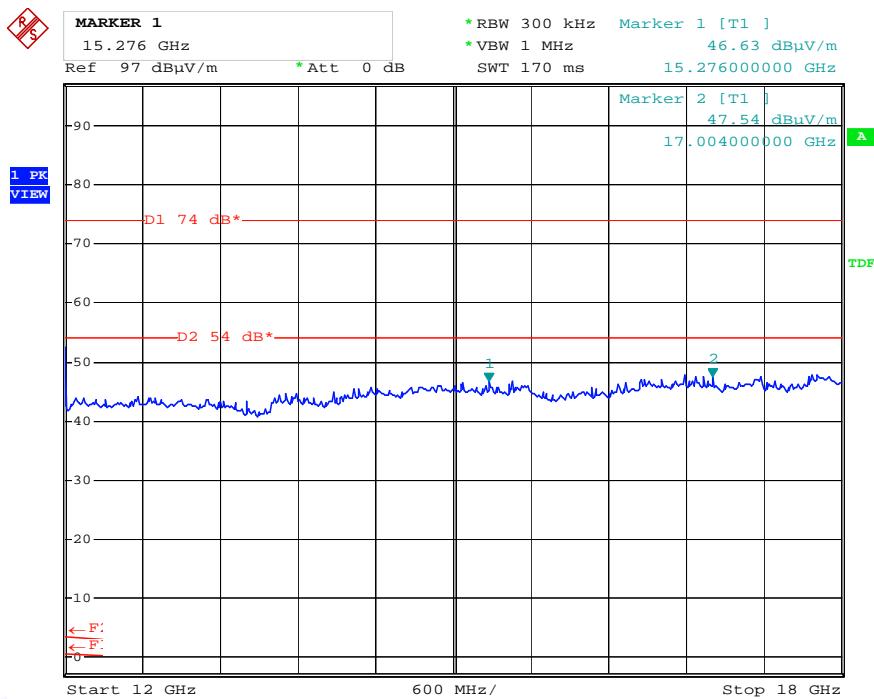


Date: 23.AUG.2010 13:01:48

Spurious emissions from 18 to 25 GHz

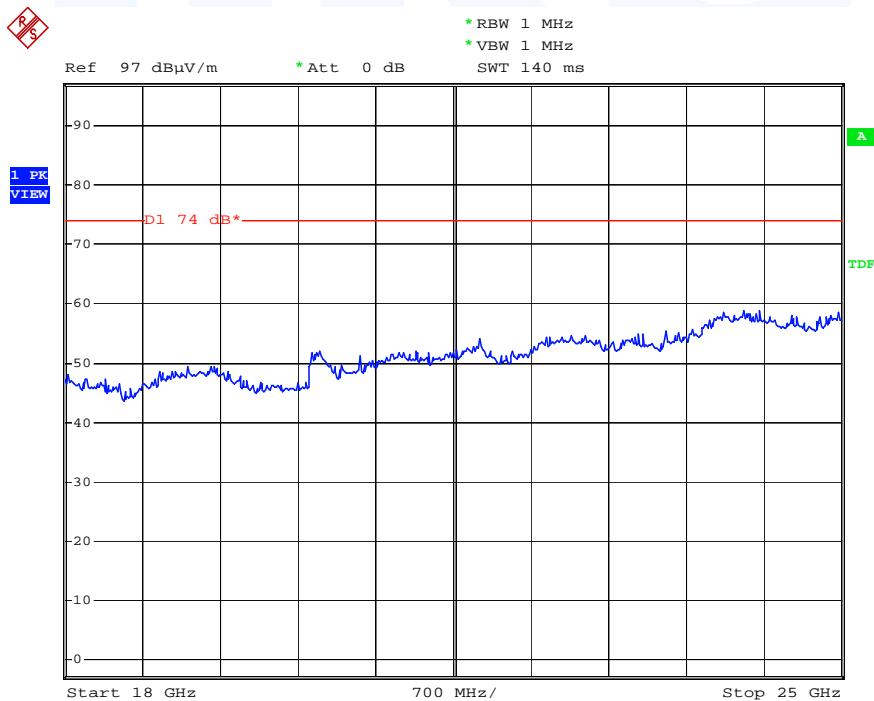


FCC ID: U9A277IWLAN-V210

AV and Pk plot at the upper-out of band

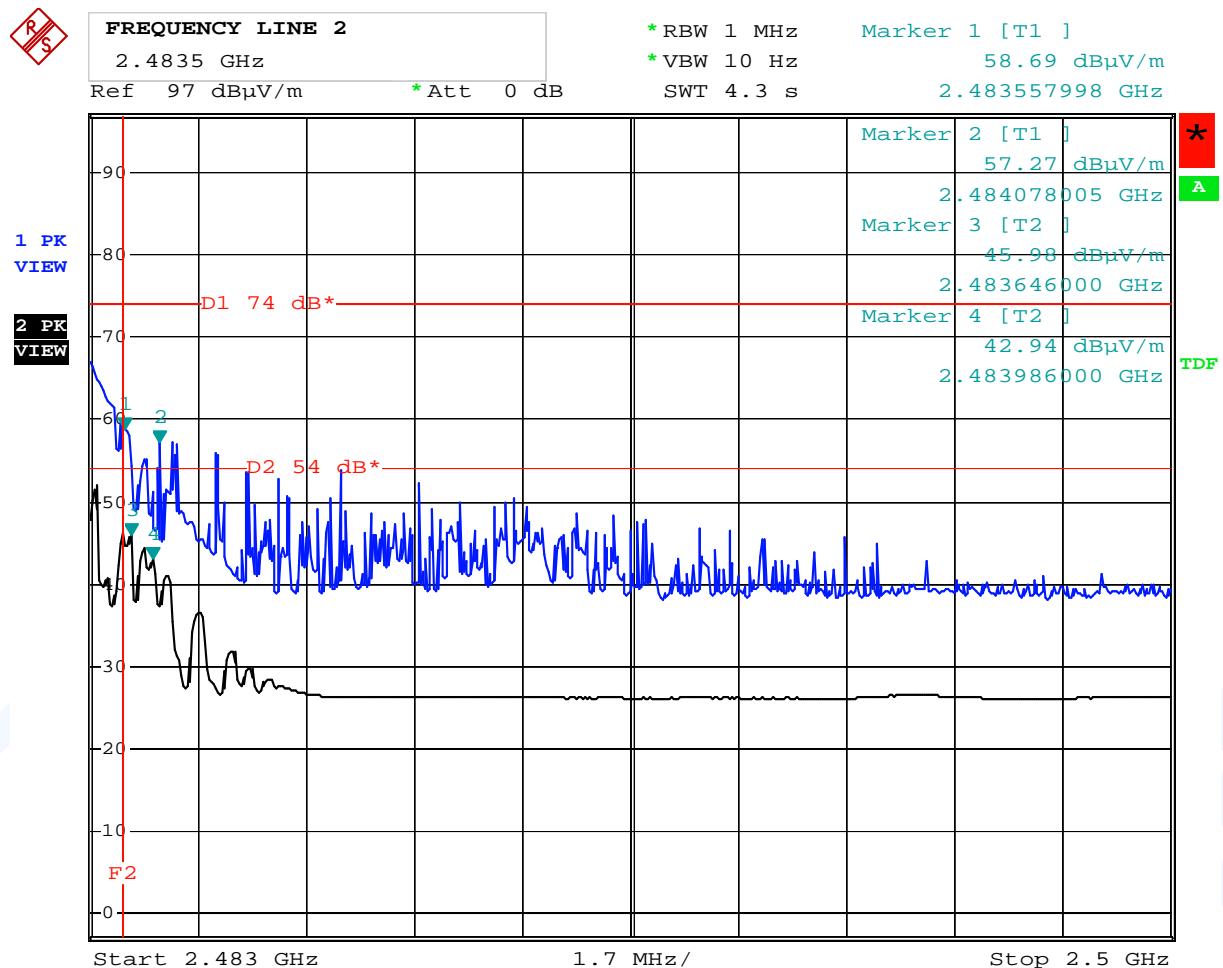


Date: 23.AUG.2010 13:30:29

FCC ID: U9A277IWLAN-V210

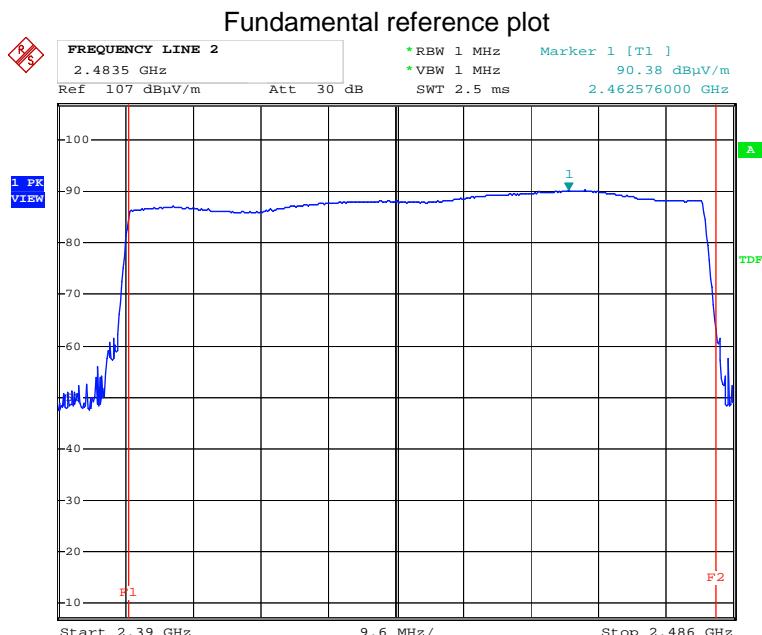

Date: 23.AUG.2010 12:40:13

Marker-Delta Plot at lower out-of band

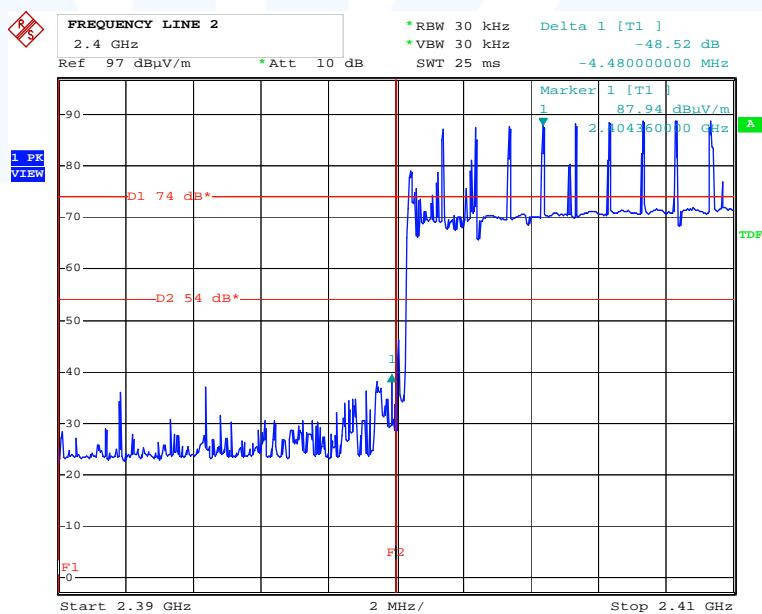

Date: 23.AUG.2010 13:55:50

Calculation of Pk-Value according to the Marker-Delta Method:

1. Pk value of fundamental field strength as reference: 90.4 dB μ V/m
2. Amplitude delta between the fundamental and spurious emission: 48.5 dB
3. Calculated attenuation of spurious emission: $90.4 - 48.5 = 41.9$ dB μ V/m
4. No need of AV measurement because the Pk value is below the AV limit.

Remark: The Marker-Delta Method is described in Public Notice DA 00-705 (Released March 30, 2000).

FCC ID: U9A277IWLAN-V210

5.4 20 dB Bandwidth

For test instruments and accessories used see section 6 Part **MB**.

5.4.1 Description of the test location

Test location: AREA4 (Climatic chamber)

5.4.2 Photo documentation of the test set-up



FCC ID: U9A277IWLAN-V210

5.4.3 Applicable standard

According to FCC Part 15, Section 15.215(c):

Intentional radiators operating under the provisions to the general emission limits, as contained in Section 15.217 through Section 15.257, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from the frequency stability of the transmitter over expected variation in temperature and supply voltage.

5.4.4 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest signal amplitude observed from the transmitter at the fundamental frequency. The measurement has been carried out with normal modulation at normal and extreme test conditions.

Spectrum analyser settings:

RBW = VBW: 100 kHz

Detector: PK

Trace mode: Max hold

Sweep time: 60 s

5.4.5 Test result

Manufacturer declared permitted frequency band:

Lowest frequency: 2400.0 MHz

Highest frequency: 2483.5 MHz

Test conditions		Test result	
		Frequency (MHz)	
T_{nom} (20 °C)	V_{nom} (7.2 V)	f_L	2400.239
		f_H	2481.720
T_{max} (0 °C)	V_{min} (5.8 V)	f_L	2400.420
		f_H	2481.568
T_{min} (45 °C)	V_{max} (8.6 V)	f_L	2400.480
		f_H	2481.500
T_{min} (45 °C)	V_{min} (5.8 V)	f_L	2400.360
		f_H	2481.542
	V_{max} (8.6 V)	f_L	2400.386
		f_H	2481.566
Measurement uncertainty		+/- 500 kHz	

Where f_L Lowest frequency at the appropriate side band level

f_H Highest frequency at the appropriate side band level

Band edge limits: f_{Lm} = Lowest f_L (measured) 2400.239 MHz

and


f_{Hm} = Highest f_H (measured) 2481.720 MHz

The requirements are **FULFILLED**.


Remarks: For detailed results please refer to following plots.

FCC ID: U9A277IWLAN-V210

Bandwidth Plots

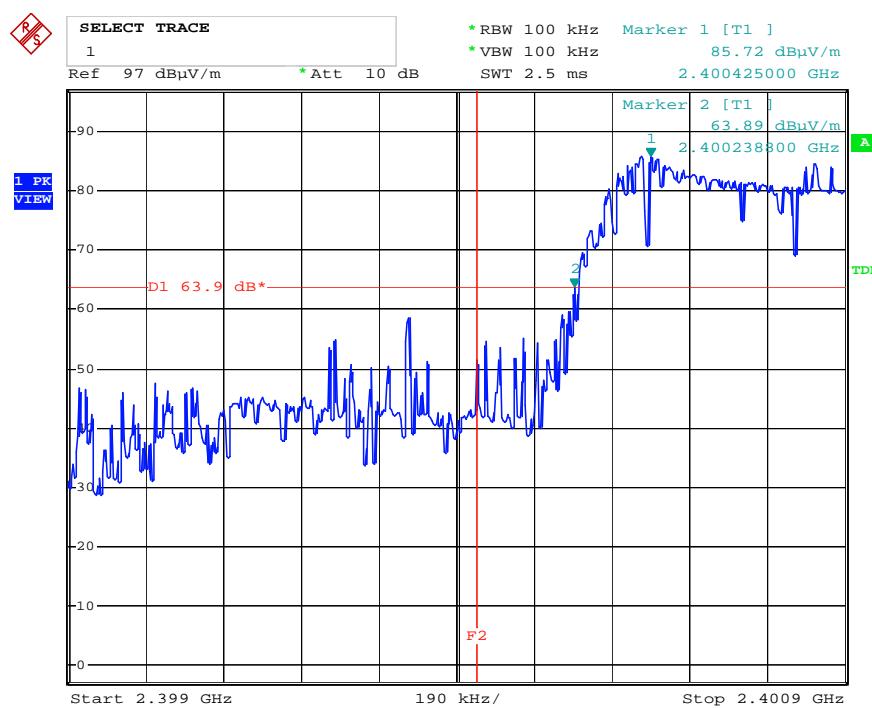

Date: 23.AUG.2010 14:09:41

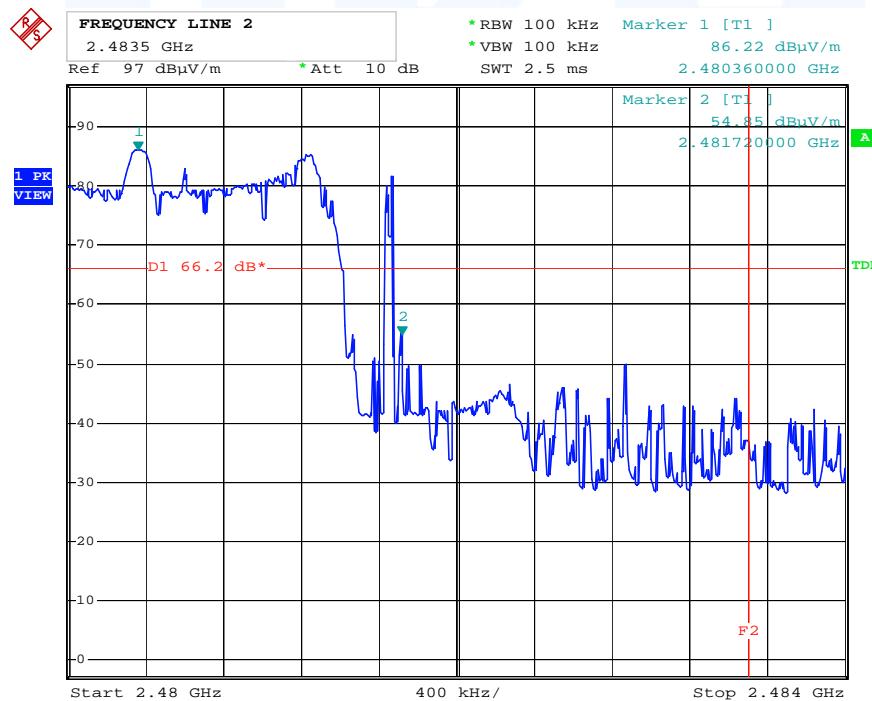

Date: 23.AUG.2010 14:21:55

FCC ID: U9A277IWLAN-V210

5.5 Maximum Permissible Exposure (MPE)

For test instruments and accessories used see section 6 Part **CPR 3**.

5.5.1 Description of the test location

Test location: Anechoic Chamber A2

5.5.2 Applicable standard

According to FCC Part 15 Subpart 15.247 (i): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1-1992, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in FCC 1.1307(b).

5.5.3 Description of Measurement

The maximum total power radiated by the antenna has been calculated using the following far field calculation formula:

$$E = \frac{\sqrt{30 * P_{out} * G}}{R}$$

where

E = E-field strength [V/m]

P_{out} = output power to antenna [W]

G = gain of antenna (linear scale)

R = distance between antenna and observation point [m]

The electrical field strength have been measured radiated as described in clause 5.2 of this document. Through the Friis transmission formula, which is a far field assumption, the maximum MPE at a defined distance away from the product, can be calculated.

$$\text{Friis transmission formula: } P_d = \frac{P_{out} * G}{4 * \pi * r^2}$$

where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna (linear scale)

r = distance between antenna and observation point [cm]

FCC ID: U9A277IWLAN-V210

5.5.4 Test result

Frequency (MHz)	Max Power Output to Antenna (dBm)	Antenna gain (dBi)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
2463	-4.6	0.347	<0.01	1.0

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
(A) Limits for Occupational / Controlled Exposure				
0.3 – 3.0	614	1.63	100	6
3.0 – 30	1842/f	4.89/f	900/f ²	6
30 - 300	61.4	0.163	1.0	6
300-1500	---	---	f/300	6
1500-100000	---	---	5.0	6
(B) Limits for General Population / Uncontrolled Exposure				
0.3 – 3.0	614	1.63	100	30
3.0 – 30	824/f	2.19/f	180/f ²	30
30 - 300	27.5	0.073	0.2	30
300-1500	---	---	f/1500	30
1500-100000	---	---	1.0	30

f = Frequency in MHz

5.5.5 Compliance regarding Co-location and Co-transmission

Applicable standard: ANSI/IEEE C95.1-1999, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", Clause 4.1.1. e):

For mixed or broadband fields at a number of frequencies for which there are different values of the MPE, the fraction of the MPE (in terms of E, H, or power density (S)) occurred within each frequency interval should be determined and the sum of all such fractions should not exceed unity (1.0, or 100 % in terms of percentage).

1. MPE of Effective Range Module: $P_d = <0.01 \text{ mW/cm}^2$
Limit: 1 mW/cm²
Fraction of MPE: <1 %
2. MPE of WLAN-Module (5 GHz): $P_d = 0.026 \text{ mW/cm}^2$
Limit: 1 mW/cm²
Fraction of MPE: 2.6%

The requirements are **FULFILLED**.

Remarks: For the test result of WLAN-Module please refer to Test report T34492-00-02AA
(mikes-testingpartners gmbh)

FCC ID: U9A277IWLAN-V210

5.6 Antenna application

5.6.1 Applicable standard

According to FCC Part 15C, Section 15.203(a):

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

The EUT's antenna meets the requirement of FCC Part 15C, Section 15.203 and 15.204

5.6.2 Result

The requirements are **FULFILLED**.

Remarks: The EuT is equipped with an internal dual port patch antenna (gain=2.6 / 2.7 dBic).
The EuT don't have any external antenna connectors.

FCC ID: U9A277IWLAN-V210

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.	
A 4	ESHS 30	02-02/03-05-002	18/06/2011	18/06/2010	
	FSP 30	02-02/11-05-001	04/05/2011	04/05/2010	
	NNLK 8129	02-02/20-05-001		17/12/2010	17/06/2010
	ESH 2 - Z 5	02-02/20-05-004	13/03/2011	13/03/2008	11/12/2010 11/06/2010
	N-4000-BNC	02-02/50-05-138			
	N-1500-N	02-02/50-05-140			
	ESH 3 - Z 2	02-02/50-05-155		07/10/2010	07/04/2010
	LNG32-3	02-02/50-07-034			
CPR 3	FSP 30	02-02/11-05-001	04/05/2011	04/05/2010	
	AFS4-01000400-10-10P-4	02-02/17-05-003			
	BBHA 9120 E 251	02-02/24-05-006		09/02/2011	09/08/2010
	Sucoflex N-2000-SMA	02-02/50-05-075			
	LNG32-3	02-02/50-07-034			
	Multiflex 141-SMA-N-1500	02-02/50-09-016			
MB	FSP 30	02-02/11-05-001	04/05/2011	04/05/2010	
	WK-340/40	02-02/45-05-001	17/06/2014	17/06/2009	28/12/2010 28/06/2010
	LNG32-3	02-02/50-07-034			
SER 1	FMZB 1516	01-02/24-01-018		15/02/2011	15/02/2010
	ESCS 30	02-02/03-05-001	16/12/2010	16/12/2009	
	LNG32-3	02-02/50-07-034			
SER 2	ESVS 30	02-02/03-05-006	11/06/2011	11/06/2010	
	VULB 9168	02-02/24-05-005	06/05/2011	06/05/2008	16/03/2011 16/09/2010
	S10162-B	02-02/50-05-031			
	KK-EF393-21N-16	02-02/50-05-033			
	NW-2000-NB	02-02/50-05-113			
	LNG32-3	02-02/50-07-034			
SER 3	FSP 30	02-02/11-05-001	04/05/2011	04/05/2010	
	AFS4-01000400-10-10P-4	02-02/17-05-003			
	AMF-4F-04001200-15-10P	02-02/17-05-004			
	AFS5-12001800-18-10P-6	02-02/17-06-002			
	3117	02-02/24-05-009	10/02/2011	10/02/2010	
	R1	02-02/30-09-002		17/02/2011	17/02/2010
	Sucoflex N-1000-SMA	02-02/50-05-072			
	Sucoflex N-1600-SMA	02-02/50-05-073			
	Sucoflex N-2000-SMA	02-02/50-05-075			
	C12-K1K1-157	02-02/50-06-001			
	LNG32-3	02-02/50-07-034			
	H26G40G1	02-02/50-10-011			