





# Specific Absorption Rate (SAR) Test Report

for

I-Sirius Co., Ltd

on the

# **GSM Phone**

Report No. : FA821814A

Trade Name : I-Sirius Model Name : FX-852C

Date of Testing : Mar. 03~04, 2008 Date of Report : Mar. 11, 2008 Date of Review : Mar. 11, 2008

- The test results refer exclusively to the presented test model / sample only.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- Report Version: Rev. 01

# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# **Table of Contents**

		nent of Compliance	
2.		nistration Data	
	2.1	Testing Laboratory	
	2.2	Detail of Applicant	
	2.3	Detail of Manufacturer	
	2.4	Application Details	
3.		al Information	3
	3.1	Description of Device Under Test (DUT)	3
	3.2	Basic Description of Device under Test	
	3.3	Product Photos	
	3.4	Applied Standards	
	3.5	Device Category and SAR Limits	
	3.6	Test Conditions	
		3.6.1 Ambient Condition	
		3.6.2 Test Configuration	
4.	Speci	fic Absorption Rate (SAR)	
	4.1	Introduction	
	4.2	SAR Definition	
5.	SAR N	Neasurement Setup	
	5.1	DASY4 E-Field Probe System	
		5.1.1 ET3DV6 E-Field Probe Specification	
		5.1.2 ET3DV6 E-Field Probe Calibration	
	5.2	DATA Acquisition Electronics (DAE)	
	5.3	Robot	
	5.4	Measurement Server	
	5.5	SAM Twin Phantom	
	5.6	Device Holder for SAM Twin Phantom	
	5.7	Data Storage and Evaluation	
		5.7.1 Data Storage	
		5.7.2 Data Evaluation	
	5.8	Test Equipment List	16
		e Simulating Liquids	
		tainty Assessment	
8.	SAR N	Measurement Evaluation	
	8.1	Purpose of System Performance check	21
	8.2	System Setup	21
	8.3	Validation Results	23
		iption for DUT Testing Position	
10.	Measu	rement Procedures	
	10.1	Spatial Peak SAR Evaluation	
	10.2	Scan Procedures	27
	10.3		
11.	SAR 1	est Results	28
	11.1	Right Cheek	28
	11.2	Right Tilted	28
	11.3	Front Face with 0 cm Gap	28
12.	Refere	ences	29
App	endix	A - System Performance Check Data	
		B - SAR Measurement Data	
		C - Calibration Data	
		D - Product Photo	
ጉሥ	, oriuin	D I I VALUET I I VALUET I VALU	

**Appendix E - Setup Photo** 



# 1. Statement of Compliance

The Specific Absorption Rate (SAR) maximum results found during testing for the I-Sirius Co., Ltd GSM Phone I-Sirius FX-852C are as follows (with expanded uncertainty 21.9%):

Position	GSM850 (W/kg)	PCS1900 (W/Kg)
Head	0.98	1.13
Body	0.847	1.39

They are in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1999 and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C (Edition 01-01).

Approved by

Roy Wu Manager

# 2. Administration Data

# 2.1 Testing Laboratory

**Company Name :** Sporton International Inc. **Department :** Antenna Design/SAR

**Address:** No.52, Hwa-Ya 1<sup>st</sup> RD., Hwa Ya Technology Park, Kwei-Shan Hsiang,

Test Report No : FA821814A

TaoYuan Hsien, Taiwan, R.O.C.

**Telephone Number:** 886-3-327-3456 **Fax Number:** 886-3-328-4978

## 2.2 Detail of Applicant

**Company Name :** I-Sirius Co., Ltd

Address: 3th FL., Sam Young B/D, 106-2, Banpo-Dong, Seocho-Gu, Seoul, 137-040,

Korea

## 2.3 Detail of Manufacturer

**Company Name :** I-Sirius Co., Ltd

Address: 3th FL., Sam Young B/D, 106-2, Banpo-Dong, Seocho-Gu, Seoul, 137-040,

Korea

# 2.4 Application Details

Date of reception of application:Feb. 18, 2008Start of test:Mar. 03, 2008End of test:Mar. 04, 2008



# 3. General Information

# 3.1 <u>Description of Device Under Test (DUT)</u>

I-Sirius / FX-852C is the serial model of FX-850C, and all test data and photo refer to Flextronics (China) Electronics Technology Co., Ltd. Flexmobile Test Lab. report No. DCP-BEJLM-TSRP-070038.2. The difference between these models is LCD. The LCD of FX-852C is colorful.

Test Report No : FA821814A

Product Feature & Specification				
DUT Type	GSM Phone			
Trade Name	I-Sirius			
Model Name	FX-852C			
Ty Evoquoney	GSM850 : 824 ~ 849 MHz			
Tx Frequency	PCS1900: 1850~1910 MHz			
Rx Frequency	GSM850 : 869 ~ 894 MHz			
KX Frequency	PCS1900 : 1930 ~ 1990 MHz			
Channel Spacing	200 KHz			
Maximum Output Power to Antenna	GSM850 : 32.45dBm			
Waximum Output I ower to Antenna	PCS1900 : 30.12dBm			
Antenna Type	Fixed External			
Type of Modulation	GMSK			
DUT Stage	Production Unit			
Application Type	Certification			

3.2 Basic Description of Device under Test

zuste z esertputent e	Device unaci Test	
DUT Name		GSM Phone
Trade Name		I-Sirius
Model Name		FX-852C
AC Adapter	Model Name	EC611A060000F
Desktop Charger	Brand Name	FX-853C/FX-903C
Desktop Charger	Model Name	EC611A060000F
	Brand Name	BOFONENG
<b>Battery</b>	Model Name	FX-852C/853C/903C
Datter y	Power Rating	3.6Vdc, 500mAh
	Type	Li-ion

Remark: Above EUT's information was declared by manufacturer. Please refer to the specifications of manufacturer or User's Manual for more detailed features description.



# 3.3 Product Photos

Please refer to Appendix D

# 3.4 Applied Standards

The Specific Absorption Rate (SAR) testing specification, method and procedure for this GSM Phone is in accordance with the following standards:

Test Report No : FA821814A

47 CFR Part 2 ( 2.1093), IEEE C95.1-1999, IEEE C95.3-2002, IEEE P1528-2003, and OET Bulletin 65 Supplement C (Edition 01-01)



## 3.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

## 3.6 Test Conditions

#### 3.6.1 Ambient Condition

Item	HSL_850	MSL_850	HSL_1900	MSL_1900		
Ambient Temperature (°C)	20-24°C					
Tissue simulating liquid	21.8°C	21.4°C	21.6°C	21.1°C		
temperature (°C)	21.6 C	21.4 C	21.0 C	21.1 C		
Humidity (%)	<60%					

# 3.6.2 <u>Test Configuration</u>

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT.

Measurements were performed on the worst position of FX-850C.

The DUT was set from the emulator to radiate maximum output power during all tests.

For SAR testing, EUT is in GSM link mode, and its crest factor is 8.3.



# 4. Specific Absorption Rate (SAR)

#### 4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

## 4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density.  $\rho$ ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\mathbf{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific head capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration,

or related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



# 5. SAR Measurement Setup

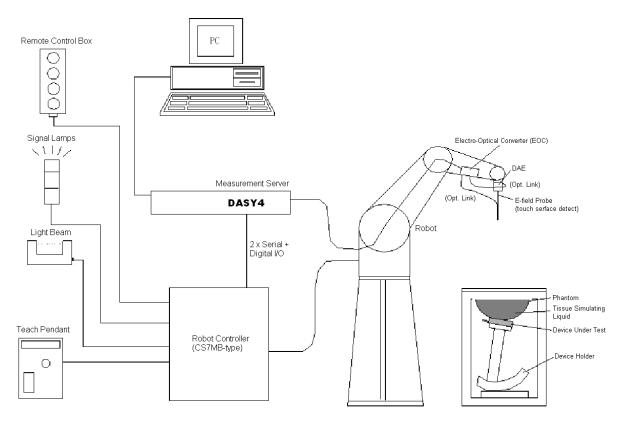


Fig. 5.1 DASY4 System

The DASY4 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

Test Report No : FA821814A

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- ➤ A computer operating Windows XP
- DASY4 software
- Remove control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- > The SAM twin phantom
- ➤ A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

# 5.1 <u>DASY4 E-Field Probe System</u>

The SAR measurement is conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.



### 5.1.1 ET3DV6 E-Field Probe Specification

<ET3DV6>

**Construction** Symmetrical design with triangular core

Built-in optical fiber for surface detection

system

Built-in shielding against static charges PEEK enclosure material (resistant to organic

solvents)

**Frequency** 10 MHz to 3 GHz

**Directivity**  $\pm$  0.2 dB in brain tissue (rotation around probe

axis)

 $\pm$  0.4 dB in brain tissue (rotation perpendicular

to probe axis)

**Dynamic Range**  $5 \mu \text{ W/g to } 100 \text{mW/g; Linearity: } \pm 0.2 \text{dB}$ **Surface Detection**  $\pm 0.2 \text{ mm repeatability in air and clear liquids}$ 

on reflecting surface

**Dimensions** Overall length: 330mm

Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm

Distance from probe tip to dipole centers:

2.7mm

**Application** General dosimetry up to 3GHz

Compliance tests for mobile phones and

Wireless LAN

Fast automatic scanning in arbitrary phantoms



Fig. 5.2 Probe Setup on Robot

# 5.1.2 <u>ET3DV6 E-Field Probe Calibration</u>

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm$  10%. The spherical isotropy shall be evaluated and within  $\pm$  0.25dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data are as below:

#### > ET3DV6 sn1787

Sensitivity	X axis : 1.6			is : 1.66 μV	Z axis : 2.08 μV
Diode compression point	X axis : 92			xis : 96 mV	Z axis : 91 mV
Conversion factor	Frequency (MHz)	X axis		Y axis	Z axis
(Head / Body)	800~1000	6.58 /	6.10	6.58 / 6.10	6.58 / 6.10
	1710~1910	5.16 / 4.68		5.16 / 4.68	5.16 / 4.68
Boundary effect	Frequency (MHz)	Alp	ha	Depth	
(Head / Body)	800~1000	0.32 /	0.36	2.42 / 2.52	
	1710~1910	0.50 /	0.61	2.61 / 2.56	]

NOTE: The probe parameters have been calibrated by the SPEAG.

## 5.2 DATA Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

Test Report No : FA821814A

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

#### 5.3 Robot

The DASY4 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY4 system, the CS7MB robot controller version from Stäubli is used. The RX robot series have many features that are important for our application:

- ➤ High precision (repeatability 0.02 mm)
- ➤ High reliability (industrial design)
- > Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- ► 6-axis controller

#### 5.4 Measurement Server

The DASY4 measurement server is based on a PC/104 CPU board with 166 MHz CPU 32 MB chipset and 64 MB RAM.

Communication with the DAE4 electronic box the 16-bit AD-converter system for optical detection and digital I/O interface.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



### 5.5 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- ➤ Left head
- > Right head
- > Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The phantom can be used with the following tissue simulating liquids:

- \*Water-sugar based liquid
- \*Glycol based liquids

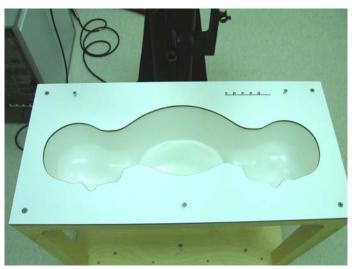


Fig. 5.3 Top View of Twin Phantom



Fig. 5.4 Bottom View of Twin Phantom



## 5.6 <u>Device Holder for SAM Twin Phantom</u>

The SAR in the Phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5 mm distance, a positioning uncertainty of  $\pm 0.5$ mm would produce a SAR uncertainty of  $\pm 20\%$ . An accurate device position is therefore crucial for accurate and repeatable measurement. The position in which the devices must be measured, are defined by the standards.

The DASY4 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY4 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\varepsilon_r = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig. 5.5 Device Holder



## 5.7 <u>Data Storage and Evaluation</u>

## 5.7.1 <u>Data Storage</u>

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-less media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

# 5.7.2 <u>Data Evaluation</u>

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters :	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF:

Conversion factor ConvF<sub>i</sub>
 Diode compression point dcp<sub>i</sub>

**Device parameters**: - Frequency f

- Crest factor cf

**Media parameters** : - Conductivity  $\sigma$ 

- Density  $\rho$ 

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:



$$Vi = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with

 $V_i$  = compensated signal of channel i (i = x, y, z)

 $U_i = input \ signal \ of \ channel \ i \ (i = x, y, z)$ 

 $cf = crest \ factor \ of \ exciting \ field \ (DASY \ parameter)$ 

 $dcp_i = diode\ compression\ point\ (DASY\ parameter)$ 

From the compensated input signals, the primary field data for each channel can be evaluated:

E-field probes :  $E_i = \sqrt{\frac{V_i}{Norm_i ConvF}}$ 

**H-field probes**:  $H_i = \sqrt{V_i} \frac{a_{i0+} a_{i1} f + a_{i2} f^2}{f}$ 

with

 $V_i$  = compensated signal of channel i (i = x, y, z)

*Norm<sub>i</sub>* = sensor sensitivity of channel i (i = x, y, z)

 $\mu V/(V/m)$ 2 for E-field Probes

ConvF = sensitivity enhancement in solution

 $a_{ii}$  = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

 $E_i$  = electric field strength of channel i in V/m

 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_X^2 + E_Y^2 + E_Z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

SAR = local specific absorption rate in mW/g

Etot = total field strength in V/m

 $\sigma = \text{conductivity in [mho/m] or [Siemens/m]}$ 

 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

\* Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$
 or  $P_{pwe} = H_{tot}^2 \cdot 37.7$ 

with

 $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

 $E_{tot}$  = total electric field strength in V/m

 $H_{tot}$  = total magnetic field strength in A/m



5.8 Test Equipment List

Manufacture	Nome of Farinment	Truno/Model	Serial Number	Calibration		
Manufacture	Name of Equipment	Type/Model	Seriai Number	Last Cal.	<b>Due Date</b>	
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1787	Aug. 28, 2007	Aug. 28, 2008	
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 15, 2006	Mar. 15, 2008	
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 21, 2006	Mar. 21, 2008	
SPEAG	Data Acquisition Electronics	DAE4	778	Sep. 17, 2007	Sep. 17, 2008	
SPEAG	Device Holder	N/A	N/A	NCR	NCR	
SPEAG	Phantom	QD 000 P40 C	TP-1303	NCR	NCR	
SPEAG	Phantom	QD 000 P40 C	TP-1383	NCR	NCR	
SPEAG	Phantom	QD 0VA 001 BB	1029	NCR	NCR	
SPEAG	Robot	Staubli RX90BL	F03/5W15A1/A/01	NCR	NCR	
SPEAG	Software	DASY4 V4.7 Build 55	N/A	NCR	NCR	
SPEAG	Software	SEMCAD V1.8 Build 176	N/A	NCR	NCR	
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR	
Agilent	ENA Series Network Analyzer	E5071B	MY42403579	Mar. 29, 2007	Mar. 29, 2008	
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Dec. 22, 2006	Dec. 22, 2008	
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR	
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR	
Agilent	Power Amplifier	8449B	3008A01917	NCR	NCR	
Agilent	Power Meter	E4416A	GB41292344	Feb. 21, 2008	Feb. 20, 2009	
Agilent	Power Sensor	E9327A	US40441548	Feb. 21, 2008	Feb. 20, 2009	

**Table 5.1 Test Equipment List** 



# 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY4, the phantom must be filled with around 25 liters of homogeneous tissue simulating liquid. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR)or from the flat phantom to the liquid top surface (body SAR) is 15.2cm.

The following ingredients for tissue simulating liquid are used:

- ▶ Water: deionized water (pure  $H_20$ ), resistivity  $\ge 16M\Omega$  as basis for the liquid
- Sugar: refined sugar in crystals, as available in food shops to reduce relative permittivity
- Salt: pure NaCl to increase conductivity
- ➤ **Cellulose**: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20°C), CAS#54290-to increase viscosity and to keep sugar in solution.
- ➤ **Preservative**: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS#55965-84-9- to prevent the spread of bacteria and molds.
- ➤ **DGMBE**: Deithlenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS#112-34-5 to reduce relative permittivity.

Table 6.1 gives the recipes for one liter of head and body tissue simulating liquid for frequency band 850MHZ and 1900 MHz.

Ingredient	HSL-850	MSL-850	HSL-1900	MSL-1900
Water	532.98 g	631.68 g	552.42 g	716.56 g
Cellulose	0 g	0 g	0 g	0 g
Salt	18.3 g	11.72 g	3.06 g	4.0 g
Preventol D-7	2.4 g	1.2 g	0 g	0 g
Sugar	766.0 g	600.0 g	0 g	0 g
DGMBE	0 g	0 g	444.52 g	300.67 g
Total amount	1 liter (1.3 kg)	1 liter (1.3 kg)	1 liter (1.0 kg)	1 liter (1.0 kg)
Dielectric	f = 835  MHz	f=835 MHz	f= 1900 MHz	f= 1900 MHz
Parameters at 22°	$\varepsilon_{\rm r}=41.5\pm5\%$	$\varepsilon_{\rm r} = 55.2 \pm 5\%,$	$\varepsilon_{\rm r} = 40.0 \pm 5\%$	$\varepsilon_{\rm r} = 53.3 \pm 5 \%$
	$\sigma = 0.90 \pm 5\% \text{ S/m}$	$\sigma = 0.97 \pm 5\% \text{ S/m}$	$\sigma = 1.4 \pm 5\% \text{ S/m}$	$\sigma$ = 1.52±5% S/m

**Table 6.1 Recipes for Tissue Simulating Liquid** 

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.



Table 6.2 shows the measuring results for head and muscle simulating liquid.

Bands	Position	Frequency	Permittivity	Conductivity	Measurement
Danus	1 OSITIOII	(MHz)	$(\varepsilon_{\rm r})$	(σ)	Date
		824.2	40.8	0.902	
	Head	836.4	40.7	0.913	Mar. 03, 2008
GSM850		848.8	40.6	0.921	
$(824 \sim 849 \text{ MHz})$	Body	824.2	56.3	0.955	Mar. 04, 2008
		836.4	56.3	0.967	
		848.8	56.1	0.976	
		1850.2	39.2	1.38	
	Head	1880.0	39.1	1.40	Mar. 03, 2008
PCS1900		1909.8	39.0	1.43	
$(1850 \sim 1910 \text{ MHz})$		1850.2	51.6	1.47	
	Body	1880.0	51.5	1.50	Mar. 04, 2008
		1909.8	51.4	1.53	

**Table 6.2 Measuring Results for Simulating Liquid** 

The measuring data are consistent with  $\varepsilon_r$  = 41.5±5% and  $\sigma$  = 0.9±5% for head GSM850 band,  $\varepsilon_r$  = 55.2 ± 5% and  $\sigma$  = 0.97 ± 5% for body GSM850 band,  $\varepsilon_r$  = 40.0 ± 5% and  $\sigma$  = 1.4 ± 5% for head PCS1900 band, and  $\varepsilon_r$  = 53.3 ± 5% and  $\sigma$  = 1.52 ± 5% for body PCS1900 band.



# 7. <u>Uncertainty Assessment</u>

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-shape
Multiplying factor <sup>(a)</sup>	1/k (b)	1/√3	1/√6	1/√2

<sup>(</sup>a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

**Table 7.1 Multiplying Factions for Various Distributions** 

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY4 uncertainty Budget is showed in Table 7.2.

<sup>(</sup>b)  $\kappa$  is the coverage factor



Error Description	Uncertainty Value ± %	Probability Distribution	Divisor	Ci (1g)	Standard Unc. (1g)	vi or Veff
Measurement Equipment						
Probe Calibration	±5.9 %	Normal	1	1	±5.9 %	$\infty$
Axial Isotropy	±4.7 %	Rectangular	$\sqrt{3}$	0.7	±1.9 %	$\infty$
Hemispherical Isotropy	±9.6 %	Rectangular	$\sqrt{3}$	0.7	±3.9 %	$\infty$
Boundary Effects	±1.0 %	Rectangular	$\sqrt{3}$	1	±0.6 %	$\infty$
Linearity	±4.7 %	Rectangular	$\sqrt{3}$	1	±2.7 %	$\infty$
System Detection Limits	±1.0 %	Rectangular	$\sqrt{3}$	1	±0.6 %	$\infty$
Readout Electronics	±0.3 %	Normal	1	1	±0.3 %	$\infty$
Response Time	±0.8 %	Rectangular	$\sqrt{3}$	1	±0.5 %	$\infty$
Integration Time	±2.6 %	Rectangular	$\sqrt{3}$	1	±1.5 %	$\infty$
RF Ambient Noise	±3.0 %	Rectangular	$\sqrt{3}$	1	±1.7 %	$\infty$
RF Ambient Reflections	±3.0 %	Rectangular	$\sqrt{3}$	1	±1.7 %	$\infty$
Probe Positioner	±0.4 %	Rectangular	$\sqrt{3}$	1	±0.2 %	$\infty$
Probe Positioning	±2.9 %	Rectangular	$\sqrt{3}$	1	±1.7 %	$\infty$
Max. SAR Eval.	±1.0 %	Rectangular	$\sqrt{3}$	1	±0.6 %	$\infty$
Test Sample Related						
Device Positioning	±2.9 %	Normal	1	1	±2.9	145
Device Holder	±3.6 %	Normal	1	1	±3.6	5
Power Drift	±5.0 %	Rectangular	$\sqrt{3}$	1	±2.9	$\infty$
Phantom and Setup						
Phantom Uncertainty	±4.0 %	Rectangular	$\sqrt{3}$	1	±2.3	$\infty$
Liquid Conductivity (target)	±5.0 %	Rectangular	$\sqrt{3}$	0.64	±1.8	$\infty$
Liquid Conductivity (meas.)	±2.5 %	Normal	1	0.64	±1.6	$\infty$
Liquid Permittivity (target)	±5.0 %	Rectangular	$\sqrt{3}$	0.6	±1.7	$\infty$
Liquid Permittivity (meas.)	±2.5 %	Normal	1	0.6	±1.5	$\infty$
<b>Combined Standard Uncertainty</b>					±10.9	387
Coverage Factor for 95 %		K=2				
Expanded uncertainty (Coverage factor = 2)					±21.9	

**Table 7.2 Uncertainty Budget of DASY4** 



# 8. SAR Measurement Evaluation

Each DASY4 system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY4 software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

## 8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

#### 8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 850 MHz and 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

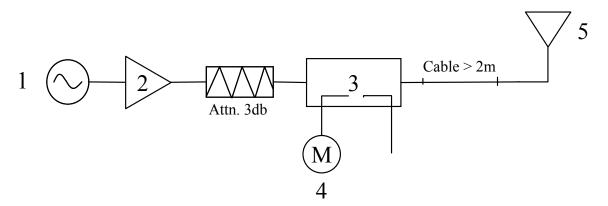


Fig. 8.1 System Setup for System Evaluation



- 1. Signal Generator
- 2. Amplifier
- 3. Directional Coupler
- 4. Power Meter
- 5. 850 MHz or 1900 MHz Dipole

The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.



Fig 8.2 Dipole Setup



# 8.3 Validation Results

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power.

Band	Position	SAR	Target (W/kg)	Measurement data (W/kg)	Variation	Measurement Date	
GSM850 (835MHz)	Head	SAR (1g)	9.24	9.71	5.1 %	Mar. 03, 2008	
		SAR (10g)	6.07	6.42	5.8 %	Mai. 03, 2008	
	Body	SAR (1g)	9.91	10.2	2.9 %	Mar. 04, 2008	
		SAR (10g)	6.55	6.8	3.8 %		
PCS1900 (1900MHz)	Head	SAR (1g)	38.4	38.3	-0.3 %	Mar. 03, 2008	
		SAR (10g)	20.5	20.1	-2.0 %		
	Body	SAR (1g)	41.1	40.3	-1.9 %	Mar. 04, 2008	
		SAR (10g)	21.8	21.4	-1.8 %	1viai. 04, 2006	

**Table 8.1 Target and Measurement Data Comparison** 

The table above indicates the system performance check can meet the variation criterion.

# 9. Description for DUT Testing Position

This DUT was tested in 3 different positions. They are right cheek, right tilted, and front face with 0 cm Gap as illustrated below:

Test Report No : FA821814A

# 1) "Cheek Position"

- i) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M, RE and LE) and align the center of the ear piece with the line RE-LE.
- ii) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.1).

## 2) "Tilted Position"

- i) To position the device in the "cheek" position described above.
- ii) While maintaining the device the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.2).

## 3) "Body Worn"

- i) To position the device parallel to the phantom surface.
- ii) To adjust the phone parallel to the flat phantom.
- iii) To adjust the distance between the EUT surface and the flat phantom to 0 cm.

Remark: Please refer to Appendix E for the test setup photos.

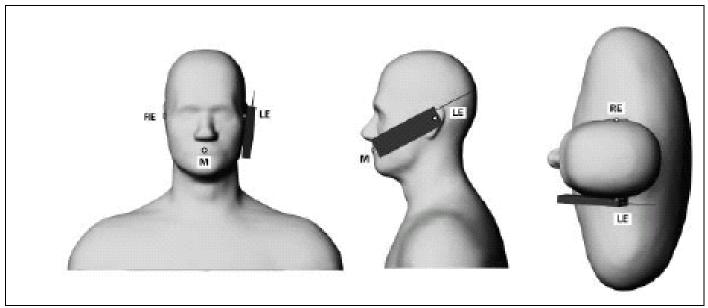


Fig. 9.1 Phone Position 1, "Cheek" or "Touch" Position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the plane for phone positioning, are indicated.

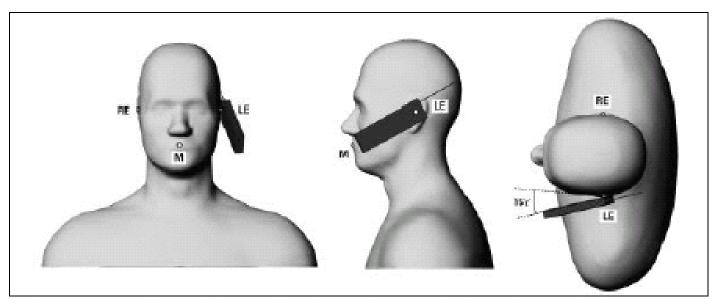


Fig. 9.2 Phone Position 2, "Tilted Position". The reference point for the right ear (RE), left ear (LE) and mouth (M), which define the plane for phone positioning, are indicated.

# 10.Measurement Procedures

The measurement procedures are as follows:

- Linking DUT with base station emulator CMU200
- ➤ Setting CMU200 to allow DUT to radiate maximum output power
- Measuring output power through RF cable and power meter
- Placing the DUT in the positions described in the last section
- > Setting scan area, grid size and other setting on the DASY4 software
- Taking data for the lowest, middle, and highest channel on each testing position

According to the IEEE P1528 draft standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- > Power reference measurement

#### 10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528-2003 standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

Base on the Draft: SCC-34, SC-2, WG-2-Computational Dosimetry, IEEE P1528/D1.2 (Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- extraction of the measured data (grid and values) from the Zoom Scan
- calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- generation of a high-resolution mesh within the measured volume
- interpolation of all measured values form the measurement grid to the high-resolution grid
- extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- calculation of the averaged SAR within masses of 1g and 10g

Test Report No : FA821814A



### 10.2 Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 1 g.

# 10.3 SAR Averaged Methods

In DASY4, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



# 11. SAR Test Results

11.1 Right Cheek

Mode	Chan.	Freq (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limit (W/kg)	Results
GSM850	128	824.2 (Low)	GMSK	32.41	-0.13	0.948	1.6	Pass
	189	836.4 (Mid)	GMSK	32.45	-0.024	0.98	1.6	Pass
	251	848.8 (High)	GMSK	32.40	-0.122	0.941	1.6	Pass
PCS1900	512	1850.2 (Low)	GMSK	29.58	-	-	-	-
	661	1880.0 (Mid)	GMSK	30.12	-	-	1	-
	810	1909.8 (High)	GMSK	29.86	ı	-	ı	-

11.2 Right Tilted

Mode	Chan.	Freq (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limit (W/kg)	Results
GSM850	128	824.2 (Low)	GMSK	32.41	-	-	1	-
	189	836.4 (Mid)	GMSK	32.45	-	-	-	-
	251	848.8 (High)	GMSK	32.40	-	-	-	-
PCS1900	512	1850.2 (Low)	GMSK	29.58	-0.063	1.13	1.6	Pass
	661	1880.0 (Mid)	GMSK	30.12	-0.032	1.12	1.6	Pass
	810	1909.8 (High)	GMSK	29.86	-0.005	1.06	1.6	Pass

11.3 Front Face with 0 cm Gap

Mode	Chan.	Freq (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limit (W/kg)	Results
GSM850	128	824.2 (Low)	GMSK	32.41	-0.016	0.806	1.6	Pass
	189	836.4 (Mid)	GMSK	32.45	-0.012	0.823	1.6	Pass
	251	848.8 (High)	GMSK	32.40	-0.193	0.847	1.6	Pass
PCS1900	512	1850.2 (Low)	GMSK	29.58	0.119	1.39	1.6	Pass
	661	1880.0 (Mid)	GMSK	30.12	0.047	1.36	1.6	Pass
	810	1909.8 (High)	GMSK	29.86	0.002	1.26	1.6	Pass

Remark: Test Engineer :  $\underline{Jason\ Wang}\ and\ \underline{Jay\ Lai}$ 

# 12.References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

Test Report No : FA821814A

- [2] IEEE Std. P1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", April 21, 2003
- [3] Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), "Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to RF Emissions", June 2001
- [4] IEEE Std. C95.3-2002, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields-RF and Microwave", 2002
- [5] IEEE Std. C95.1-1999, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", 1999
- [6] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148
- [7] DAYS4 System Handbook

# Appendix A - System Performance Check Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/3

#### System Check\_Head\_835MHz

#### DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_850 Medium parameters used: f = 835 MHz;  $\sigma = 0.911$  mho/m;  $\varepsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Test Report No : FA821814A

Ambient Temperature: 22.4 °C; Liquid Temperature: 21.8 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(6.58, 6.58, 6.58); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

# Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.7 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.971 mW/g; SAR(10 g) = 0.642 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

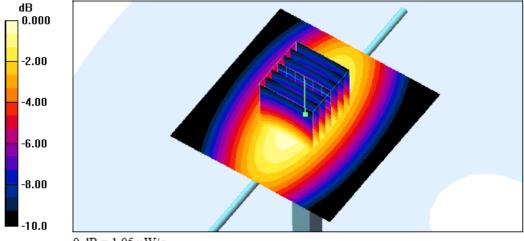

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/3

#### System Check Head 1900MHz

#### DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 Medium parameters used: f = 1900 MHz;  $\sigma = 1.42 \text{ mho/m}$ ;  $\epsilon_r = 39.1$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.6 °C; Liquid Temperature: 21.6 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(5.16, 5.16, 5.16); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176


# Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (interpolated) = 4.43 mW/g

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.5 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 6.70 W/kg

SAR(1 g) = 3.83 mW/g; SAR(10 g) = 2.01 mW/gMaximum value of SAR (measured) = 4.37 mW/g

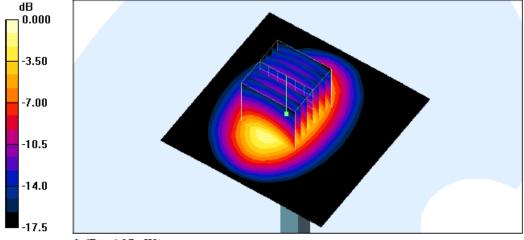

0 dB = 4.37 mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/4

#### System Check Body 835MHz

#### DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used: f = 835 MHz;  $\sigma = 0.965$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6 °C; Liquid Temperature: 21.4 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

# Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 1.09 mW/g

#### Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.1 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.680 mW/gMaximum value of SAR (measured) = 1.10 mW/g

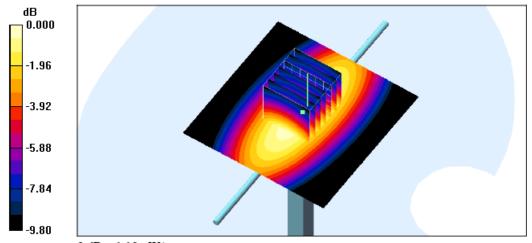

0 dB = 1.10 mW/g

CC SAR Test Report No : FA821814A

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/4

#### System Check\_Body\_1900MHz

#### DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used: f = 1900 MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4 °C; Liquid Temperature: 21.1 °C

## DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

# Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (interpolated) = 4.72 mW/g


merpolated) 1.72 mm/g

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.7 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 6.95 W/kg

SAR(1 g) = 4.03 mW/g; SAR(10 g) = 2.14 mW/gMaximum value of SAR (measured) = 4.59 mW/g

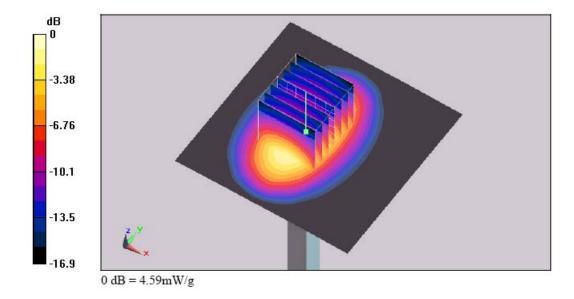

# Appendix B - SAR Measurement Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/3

#### Right Cheek GSM850 Ch190 FX-852C

DUT: 821814

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL\_850 Medium parameters used: f = 837 MHz;  $\sigma = 0.913$  mho/m;  $\varepsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Test Report No : FA821814A

Ambient Temperature: 22.2 °C; Liquid Temperature: 21.8 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(6.58, 6.58, 6.58); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

# Ch190/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.994 mW/g


#### Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1~g) = 0.980~mW/g;~SAR(10~g) = 0.688~mW/g

Maximum value of SAR (measured) = 1.03 mW/g

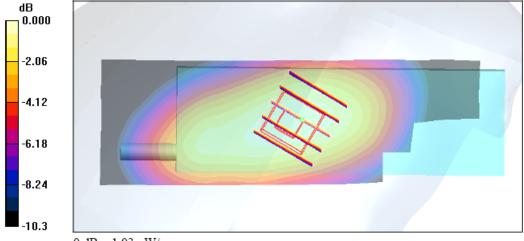

0 dB = 1.03 mW/g

FCC SAR Test Report No : FA821814A

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/3

#### Right Tilted PCS Ch512 FX-852C

#### DUT: 821814

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$ 

 $kg/m^3$ 

Ambient Temperature: 22.6 °C; Liquid Temperature: 21.6 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(5.16, 5.16, 5.16); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

# Ch512/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 1.39 mW/g

#### Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.603 mW/gMaximum value of SAR (measured) = 1.20 mW/g

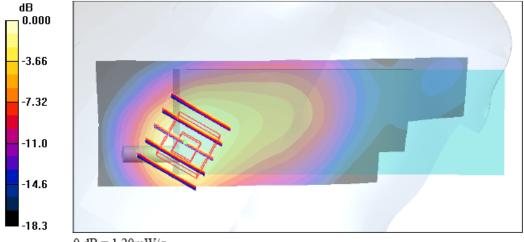

0 dB = 1.20 mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/4

### Body\_GSM850 Ch251\_Front Face With 0cm Gap\_FX-852C

#### DUT: 821814

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL\_850 Medium parameters used: f = 849 MHz;  $\sigma = 0.976$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6 °C; Liquid Temperature: 21.4 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

# Ch251/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 0.949 mW/g

#### Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.6 V/m; Power Drift = -0.193 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.542 mW/gMaximum value of SAR (measured) = 0.919 mW/g

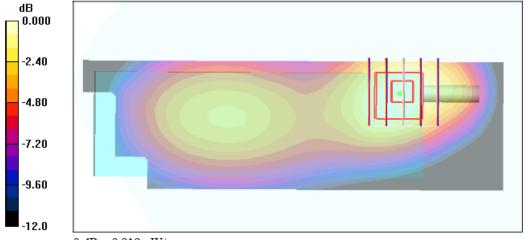

Test Report No : FA821814A

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/4

#### Body PCS Ch512 Front Face With 0cm Gap FX-852C

#### DUT: 821814

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL\_1900 Medium parameters used : f = 1850.2 MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 51.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4 °C; Liquid Temperature: 21.1 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

## Ch512/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 1.63 mW/g

#### Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.776 mW/gMaximum value of SAR (measured) = 1.54 mW/g

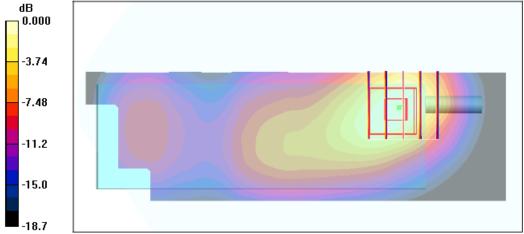

0 dB = 1.54 mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/3

### Right Cheek\_GSM850 Ch190\_FX-852C\_2D

DUT: 821814

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: HSL 850 Medium parameters used: f = 837 MHz;  $\sigma = 0.913$  mho/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.2 °C; Liquid Temperature: 21.8 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(6.58, 6.58, 6.58); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176


Ch190/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.994 mW/g

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.980 mW/g; SAR(10 g) = 0.688 mW/gMaximum value of SAR (measured) = 1.03 mW/g

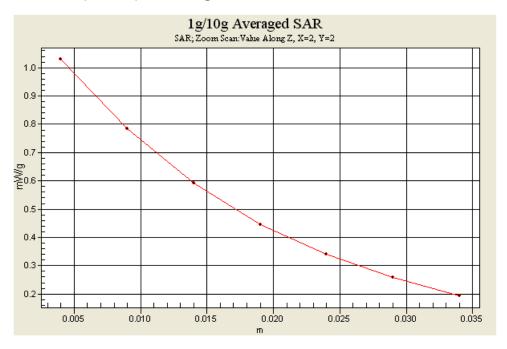

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/3

#### Right Tilted PCS Ch512 FX-852C 2D

DUT: 821814

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6 °C; Liquid Temperature: 21.6 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(5.16, 5.16, 5.16); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

#### Ch512/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.39 mW/g

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.603 mW/gMaximum value of SAR (measured) = 1.20 mW/g



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/4

### Body\_GSM850 Ch251\_Front Face With 0cm Gap\_FX-852C\_2D

DUT: 821814

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL\_850 Medium parameters used: f = 849 MHz;  $\sigma = 0.976$  mho/m;  $\epsilon_r = 56.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.6 °C; Liquid Temperature: 21.4 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(6.1, 6.1, 6.1); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Ch251/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (interpolated) = 0.949 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.6 V/m; Power Drift = -0.193 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.542 mW/gMaximum value of SAR (measured) = 0.919 mW/g

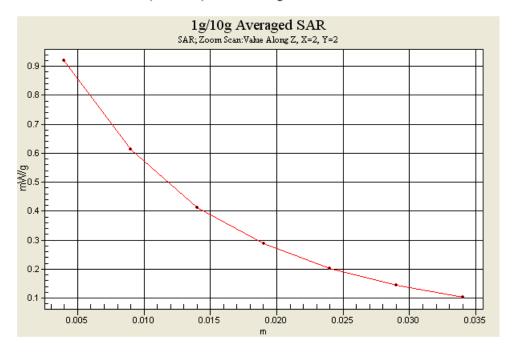

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2008/3/4

### Body\_PCS Ch512\_Front Face With 0cm Gap\_FX-852C\_2D

DUT: 821814

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL\_1900 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 51.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.4 °C; Liquid Temperature: 21.1 °C

#### DASY4 Configuration:

- Probe: ET3DV6 SN1787; ConvF(4.68, 4.68, 4.68); Calibrated: 2007/8/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2007/9/17
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

# Ch512/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.63 mW/g

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.776 mW/gMaximum value of SAR (measured) = 1.54 mW/g

