

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart F § 15.519

Equipment : AL5616 Worldwide Wireless Dual Role USB Adapter
Model No. : AL5616
Brand Name : Alereon
Applicant : Alereon Inc.
700-C Suite 200 Capitol of Texas Highway Austin Texas
USA 78731
Manufacturer : Goodway Technology Co., LTD.
3F, No. 135 Lane 235 Pau Chiao Rd. Hsin Tien, Taipei,
Taiwan
FCC ID : U9YAL5616
Test Freq. Range : 3100 ~ 10600MHz
Received Date : Jan. 25, 2010
Final Test Date : Feb. 09, 2010
Filing Type : New Application

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart F**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1. SUMMARY OF THE TEST RESULT	2
2. GENERAL INFORMATION.....	3
2.1 Product Details	3
2.2 Table for Carrier Frequencies	3
2.3 Table for TFC	4
2.4 Accessories	4
2.5 Table for Test Modes	4
2.6 Table for Testing Locations.....	5
2.7 Table for Supporting Units.....	5
2.8 Table for Parameters of Test Software Setting	5
2.9 Test Configuration	5
3. TEST RESULT	6
3.1 Operational Limitations.....	6
3.2 UWB Bandwidth Measurement	7
3.3 Radiated Emissions Measurement.....	18
3.4 Radiated Emissions in GPS Bands Measurement.....	96
3.5 Peak Emissions within a 50 MHz Bandwidth Measurement	104
3.6 Labeling and Instruction Manual Requirements	112
3.7 Antenna Requirements.....	112
4. LIST OF MEASURING EQUIPMENTS.....	113
5. TEST LOCATION	114
6. TAF CERTIFICATE OF ACCREDITATION.....	115
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. PHOTOGRAPHS OF EUT	B1 ~ B8

History of This Test Report

Original Issue Date: Feb. 10, 2010

Report No.: FR011911

- No additional attachment.
- Additional attachment were issued as following record:

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart F § 15.519

Equipment : AL5616 Worldwide Wireless Dual Role USB Adapter

Model No. : AL5616

Brand Name : Alereon

Applicant : **Alereon Inc.**

700-C Suite 200 Capitol of Texas Highway Austin Texas USA
78731

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 25, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu 2010.3.8
Wayne Hsu / Vice Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart F				
Part	Rule Section	Description of Test	Result	Under Limit
-	15.207	AC Power Line Conducted Emissions	-	-
3.1	15.519(a)	Operational Limitations	Complies	-
3.2	15.519(b)	UWB Bandwidth	Complies	-
3.3	15.519(c)/15.209	Radiated Emissions	Complies	0.13 dB
3.4	15.519(d)	Radiated Emissions in GPS Bands	Complies	13.17 dB
3.5	15.519(e)	Peak Emissions within a 50 MHz Bandwidth	Complies	6.81 dB
3.6	15.517(f)	Labeling Requirements	Complies	-
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.3\text{dB}$	Confidence levels of 95%
UWB Bandwidth	$\pm 8.5 \times 10^{-8}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	$\pm 0.8\text{dB}$	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated Emissions / in GPS Bands (1GHz~18GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Temperature	$\pm 0.7^\circ\text{C}$	Confidence levels of 95%
Humidity	$\pm 3.2\%$	Confidence levels of 95%
DC / AC Power Source	$\pm 1.4\%$	Confidence levels of 95%

2. GENERAL INFORMATION

2.1 Product Details

Items	Description
Power Type	Host (Notebook)
Modulation	Multi-band OFDM (QPSK / DCM)
Operation Frequency Range	3168 ~ 4752 MHz & 6336 ~ 8976 MHz
10 dB Bandwidth	516 MHz
RF Output Rating	From 3.1~10.6GHz band, max EIRP is -20.78 dBm (EIRP) @ RBW 10MHz, transfer to -6.81 dBm (EIRP) @ RBW 50MHz.
Antenna	External Antenna

2.2 Table for Carrier Frequencies

Band Group	BAND_ID (n_b)	Lower Frequency (MHz)	Center Frequency (MHz)	Upper Frequency (MHz)
1	1	3168	3432	3696
	2	3696	3960	4224
	3	4224	4488	4752
3	7	6336	6600	6864
	8	6864	7128	7392
	9	7392	7656	7920
6	9	7392	7656	7920
	10	7920	8184	8448
	11	8448	8712	8976

2.3 Table for TFC

Open band		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency Range		3.1-4.8GHz	4.8-6.3GHz	6.3-7.9GHz	7.4-9GHz	7.9-9.5GHz
Band Group		1	2	3	6	4
Band_ID	Band_1	1	4	7	9	10
	Band_2	2	5	8	10	11
	Band_3	3	6	9	11	12
TFC	TFC 1	1-2-3-1-2-3	4-5-6-4-5-6	7-8-9-7-8-9	9-10-11-9-10-11	10-11-12-10-11-12
	TFC 2	1-3-2-1-3-2	4-6-5-4-6-5	7-9-8-7-9-8	9-11-10-9-11-10	10-12-11-10-12-11
	TFC 3	1-1-2-2-3-3	4-4-5-5-6-6	7-7-8-8-9-9	9-9-10-10-11-11	10-10-11-11-12-12
	TFC 4	1-1-3-3-2-2	4-4-6-6-5-5	7-7-9-9-8-8	9-9-11-11-10-10	10-10-12-12-11-11
	TFC 5	1-1-1-1-1-1	4-4-4-4-4-4	7-7-7-7-7-7	9-9-9-9-9-9	10-10-10-10-10-10
	TFC 6	2-2-2-2-2-2	5-5-5-5-5-5	8-8-8-8-8-8	10-10-10-10-10-10	11-11-11-11-11-11
	TFC 7	3-3-3-3-3-3	6-6-6-6-6-6	9-9-9-9-9-9	11-11-11-11-11-11	12-12-12-12-12-12
	TFC 8	1-2-1-2-1-2	4-5-4-5-4-5	7-8-7-8-7-8	9-10-9-10-9-10	10-11-10-11-10-11
	TFC 9	1-3-1-3-1-3	4-6-4-6-4-6	7-9-7-9-7-9	9-11-9-11-9-11	10-12-10-12-10-12
	TFC 10	2-3-2-3-2-3	5-6-5-6-5-6	8-9-8-9-8-9	10-11-10-11-10-11	11-12-11-12-11-12

2.4 Accessories

N/A

2.5 Table for Test Modes

Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	BAND_ID (nb)	Data Rate	Remark
AC Power Line Conducted Emissions	-	-	-	-
UWB Bandwidth	CTX	Band Group 1, 3, 6	TFC 4, 53.3 Mbps	-
Radiated Emissions 9kHz~960MHz	CTX	Band Group 1, 3, 6	TFC 4, 53.3 Mbps	-
Radiated Emissions above 960MHz	CTX	Band Group 1, 3, 6	TFC 4, 53.3 Mbps	-
Peak Emissions within a 50 MHz Bandwidth	CTX	Band Group 1, 3, 6	TFC 4, 53.3 Mbps	-

Note:

1. CTX=continuously transmitting at Band Group 1, 3, 6.
2. Investigation has been done on all data rates for searching the worst cases. The EUT with TFC 4 53.3 Mbps and 4095 packets has been found to be the worst case.

2.6 Table for Testing Locations

Test Site No.	Site Category	Location
03CH02-HY	SAC	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya

Semi Anechoic Chamber (SAC)

2.7 Table for Supporting Units

Test Items	Support Unit	Brand	Model	FCC ID
Radiation	Notebook	IBM	2007	DoC

2.8 Table for Parameters of Test Software Setting


During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware on the final end product.

UWB

Test Software Version	Customer RET							
	1	2	3	7	8	9	10	11
BAND_ID (nb)	Default	Default	Default	Default	Default	Default	Default	Default
Power Parameters	Default	Default	Default	Default	Default	Default	Default	Default

2.9 Test Configuration

2.9.1 Radiation Emissions Test Configuration

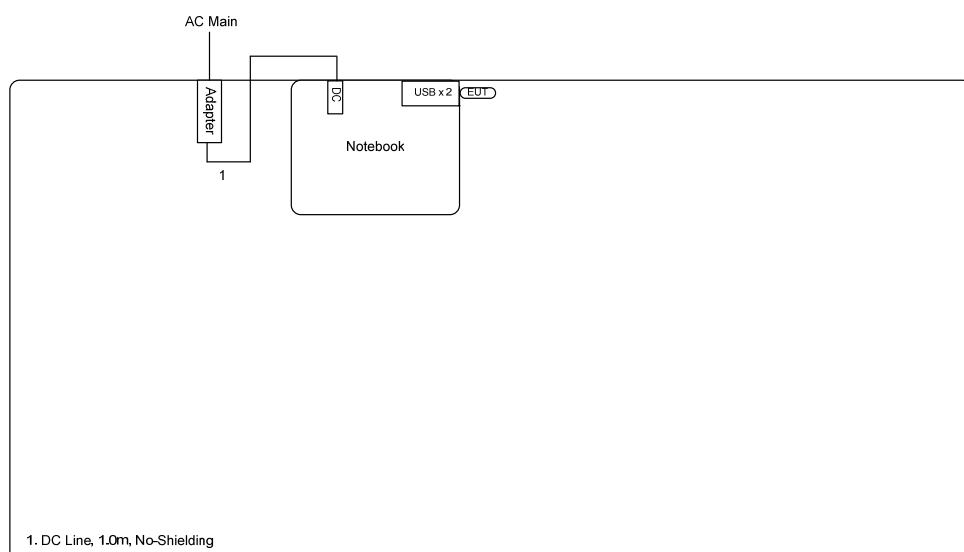

3. TEST RESULT

3.1 Operational Limitations

3.1.1 Test Result of Operation Restriction

Operation Restriction	Informed the applicant	Not applicable	User Manual Informed	Passed
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart F 15.519(a)				
UWB devices operating under the provisions of this section must be hand held, i.e., they are relatively small devices that are primarily hand held while being operated and do not employ a fixed infrastructure. [A transmitter that had been connected to portable device e.g. Laptop PC...and be considered sufficient to demonstrate not a fixed infrastructure application.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
(1) The radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver				
A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting. [The applicant has been informed of this requirement and instructs the caution in user manual.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
(2) Outdoor mounted antennas				
The use of antennas mounted on outdoor structures, e.g., antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device. [The applicant has been informed of this requirement.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
(5) Indoors or Outdoors				
UWB devices operating under the provisions of this section may operate indoors or outdoors. [The applicant has been informed of this requirement.]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

3.2 UWB Bandwidth Measurement

3.2.1 Limit

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M .

Center frequency. The center frequency, f_C , equals $(f_H + f_L)/2$.

Fractional bandwidth. The fractional bandwidth equals $2(f_H - f_L)/ (f_H + f_L)$.

The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

3.2.2 Measuring Instruments and Setting

Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer.

Parameter	Setting
RBW / VBW	10 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


3.2.3 Test Procedures

1. The EUT was placed on the top of the turntable that is non-conductive materials (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. The horn receiving antenna was varied between 1 meter and 4 meters , 1 meter step above ground while find the maximum emissions field strength of both horizontal and vertical polarization.
3. For maximum emission amplitude, the antenna tower was scanning (from 1 M to 4 M) and the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_M . Next, the points that are 10dB or more below the highest radiated emission were observed in a search from f_M in both the lower and higher frequency direction in the measured frequency EIRP graph, they are denoted as f_L and f_H , respectively.

The UWB bandwidth is the difference between f_L and f_H .

4. The individual UWB bandwidths were measured for each BAND_ID (n_b) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.

3.2.4 Test Setup Layout

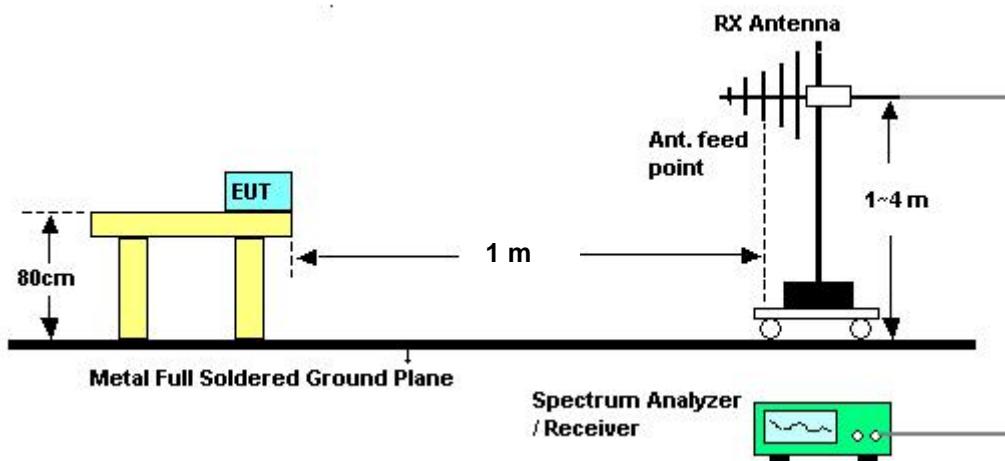

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode and TFC 4 with 53.3Mbps.

3.2.7 Test Result of UWB Bandwidth

Band Group 1

Test Distance: 1m


UWB Bandwidth on BAND_ID (nb) 1

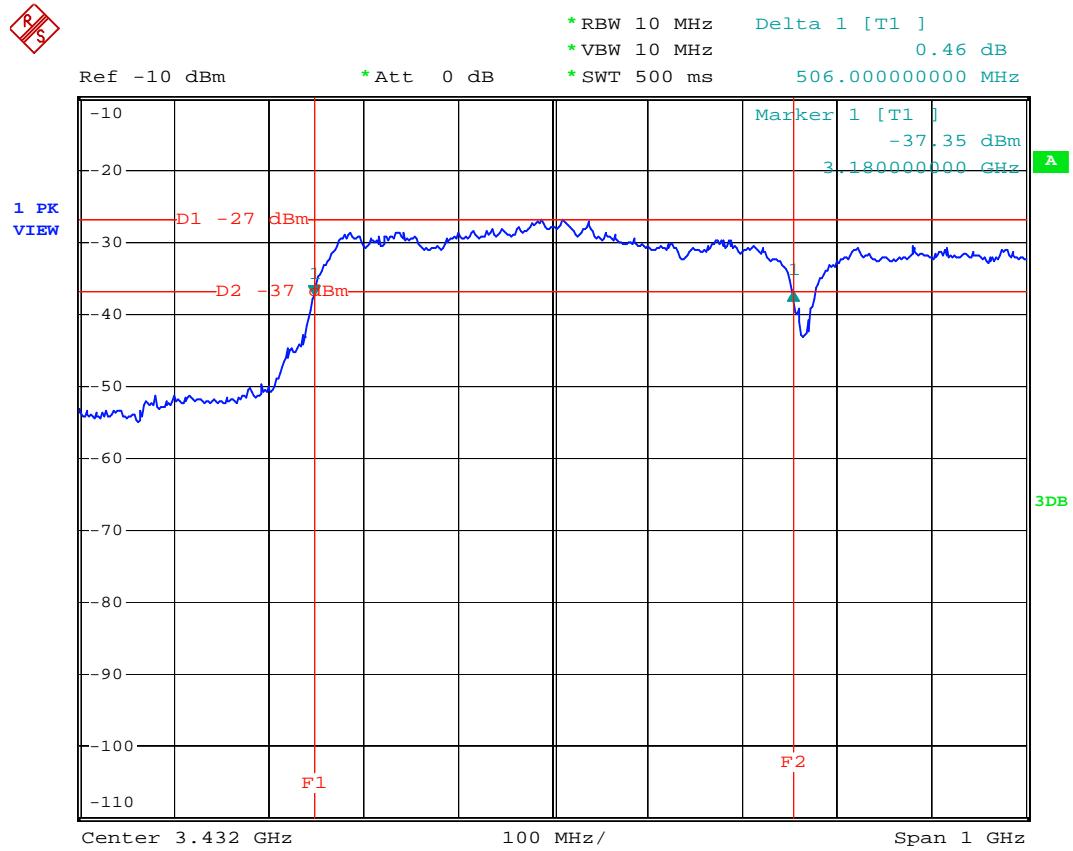

Date: 9.FEB.2010 07:33:39

UWB BW = 506 MHz; F_L = 3180 MHz; F_H = 3686 MHz; F_C = 3433 MHz

Test Distance: 1m

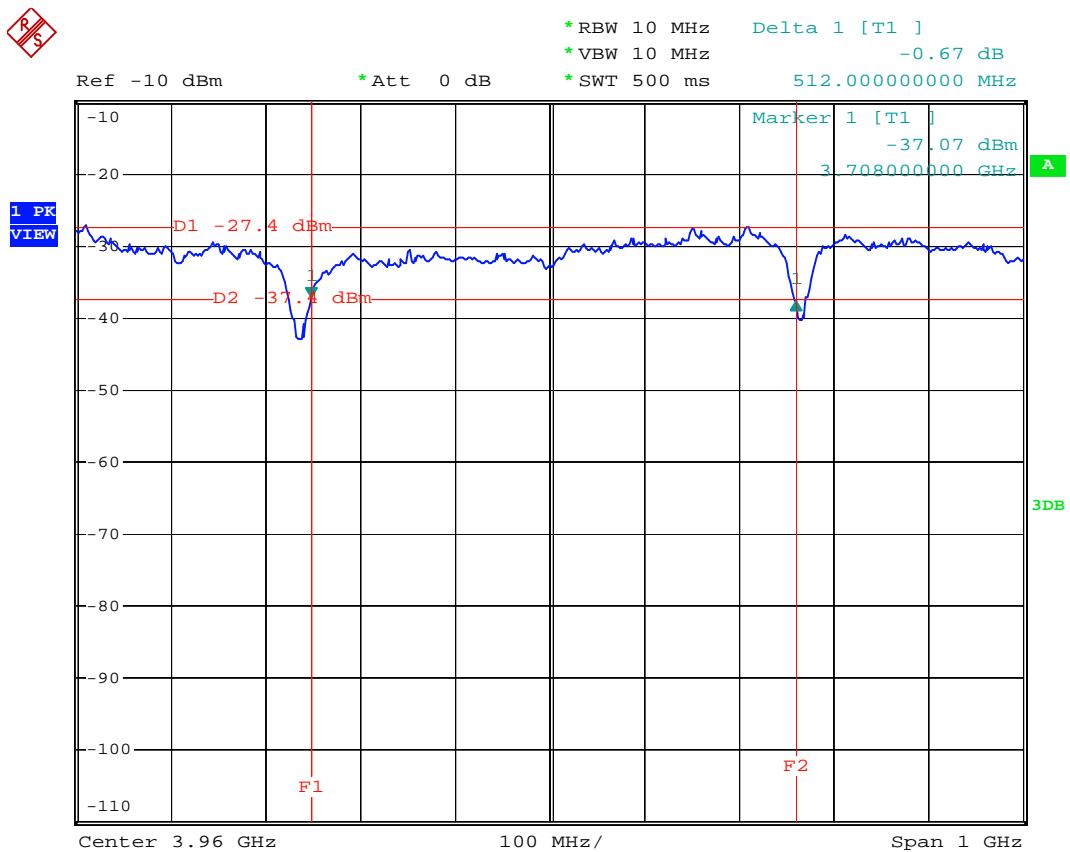
UWB Bandwidth on BAND_ID (nb) 2

Date: 9.FEB.2010 07:37:34

UWB BW = 512 MHz; F_L = 3708 MHz; F_H = 4220 MHz; F_C = 3964 MHz

Test Distance: 1m

UWB Bandwidth on BAND_ID (nb) 3

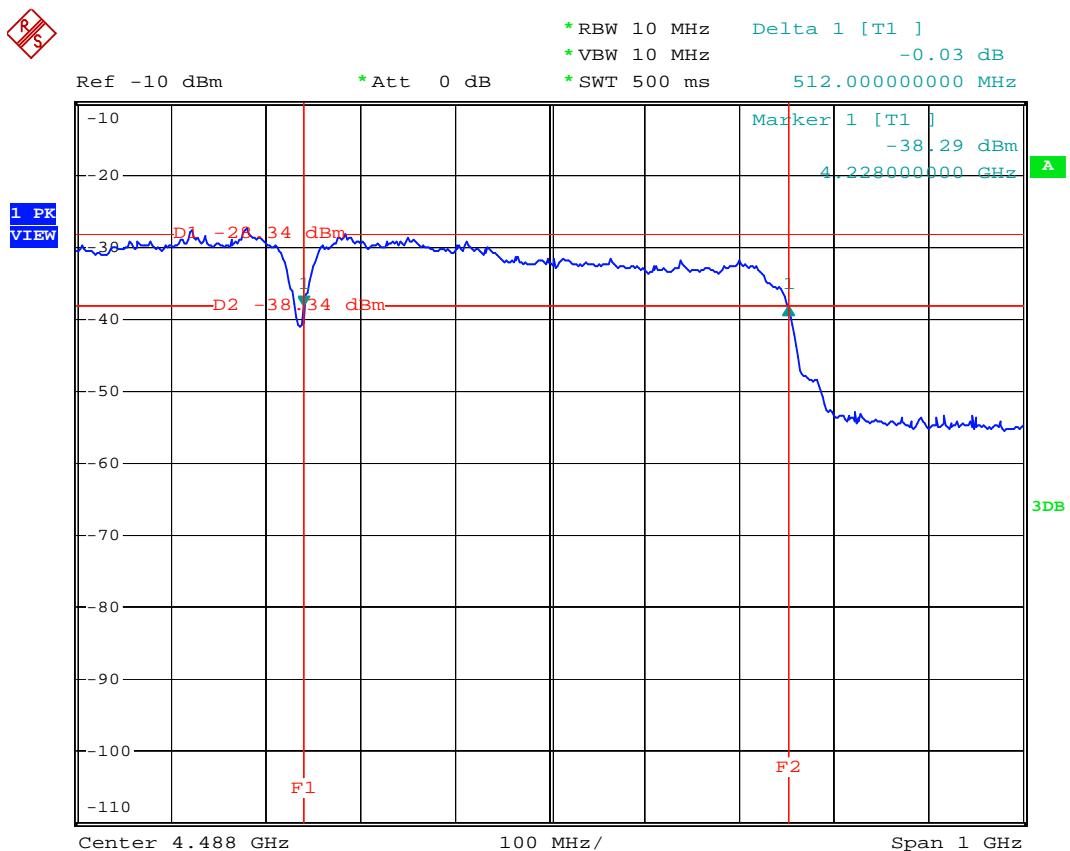


Date: 9.FEB.2010 07:43:19

UWB BW = 512 MHz; F_L = 4228 MHz; F_H = 4740 MHz; F_C = 4484 MHz

Band Group 3

Test Distance: 1m

UWB Bandwidth on BAND_ID (nb) 7

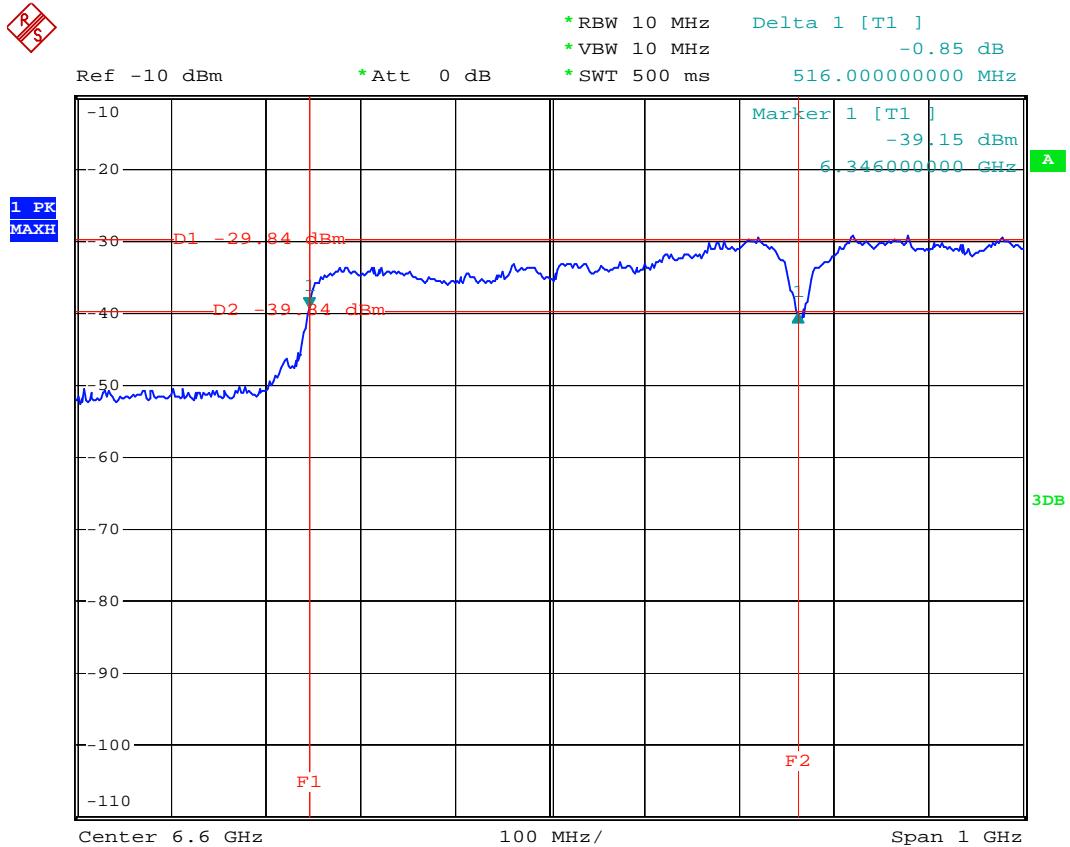


Date: 9.FEB.2010 08:00:14

UWB BW = 516 MHz; F_L = 6346 MHz; F_H = 6862 MHz; F_C = 6604 MHz

Test Distance: 1m


UWB Bandwidth on BAND_ID (nb) 8

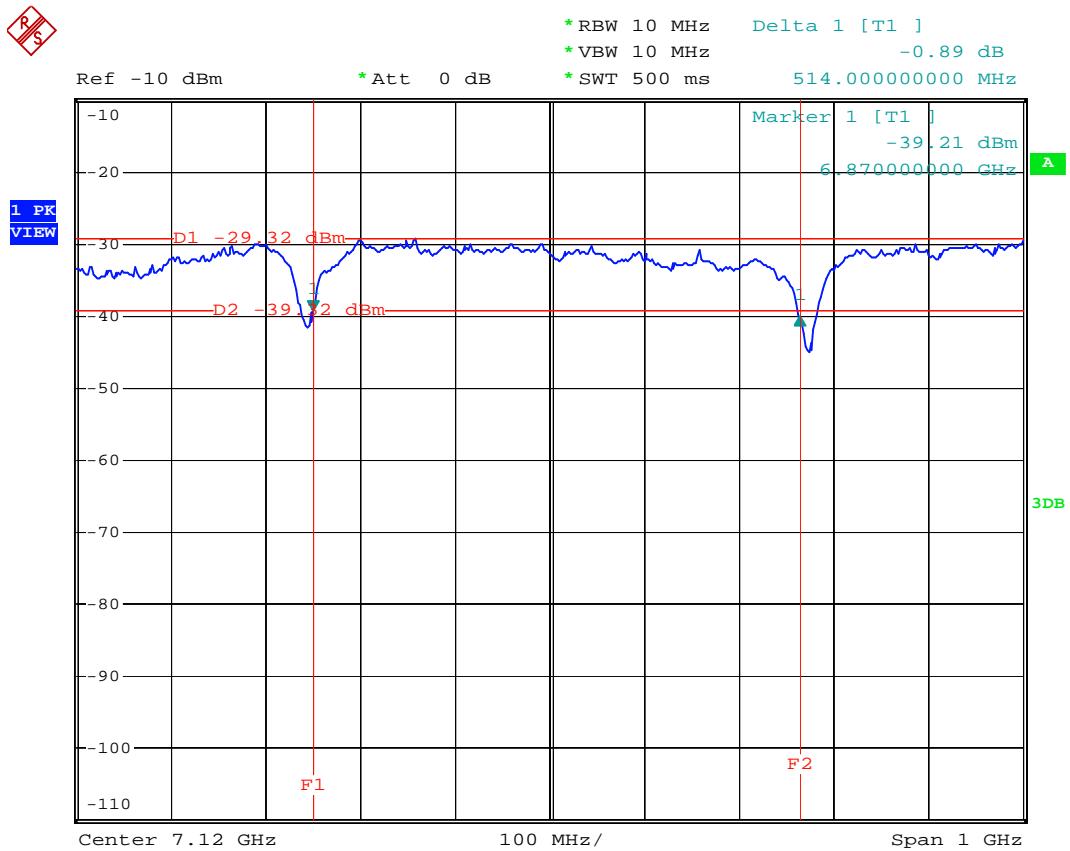

Date: 9.FEB.2010 08:03:26

UWB BW = 514 MHz; $F_L = 6870$ MHz; $F_H = 7384$ MHz; $F_C = 7127$ MHz

Test Distance: 1m

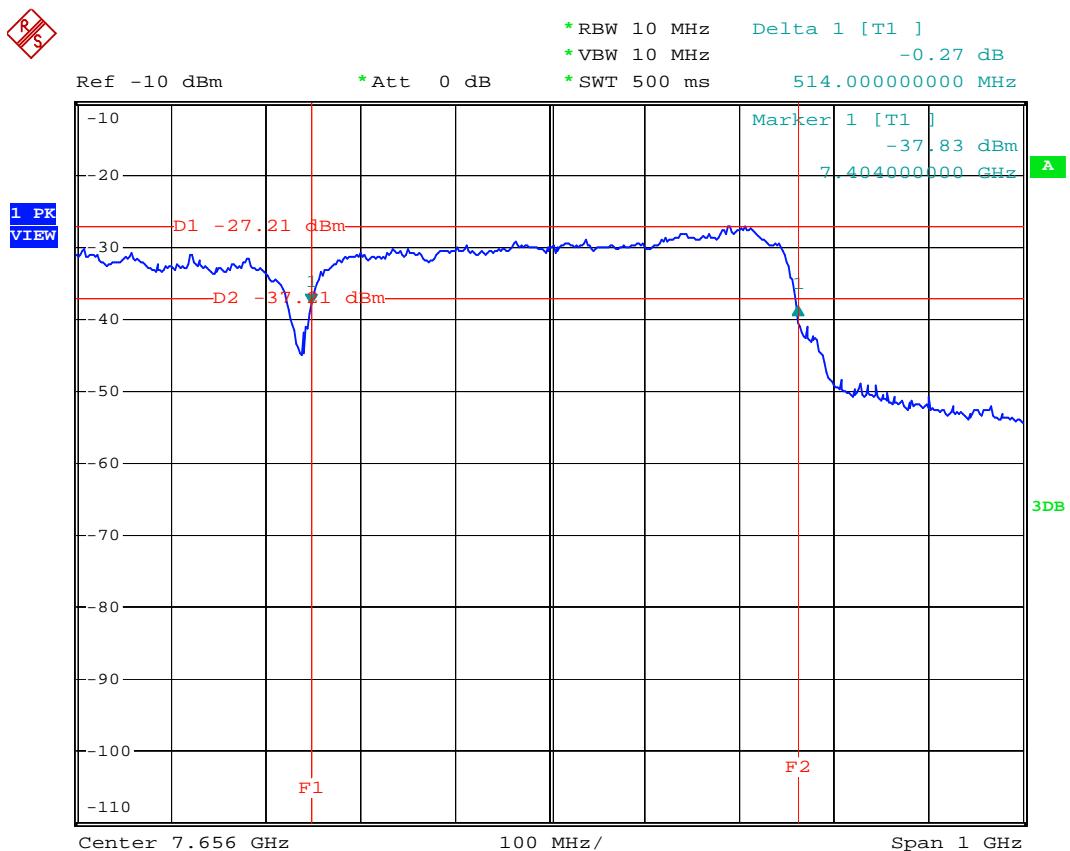UWB Bandwidth on BAND_ID (nb) 9


Date: 9.FEB.2010 08:07:30

UWB BW = 514 MHz; F_L = 7404 MHz; F_H = 7918 MHz; F_C = 7661 MHz

Band Group 6

Test Distance: 1m

UWB Bandwidth on BAND_ID (nb) 9

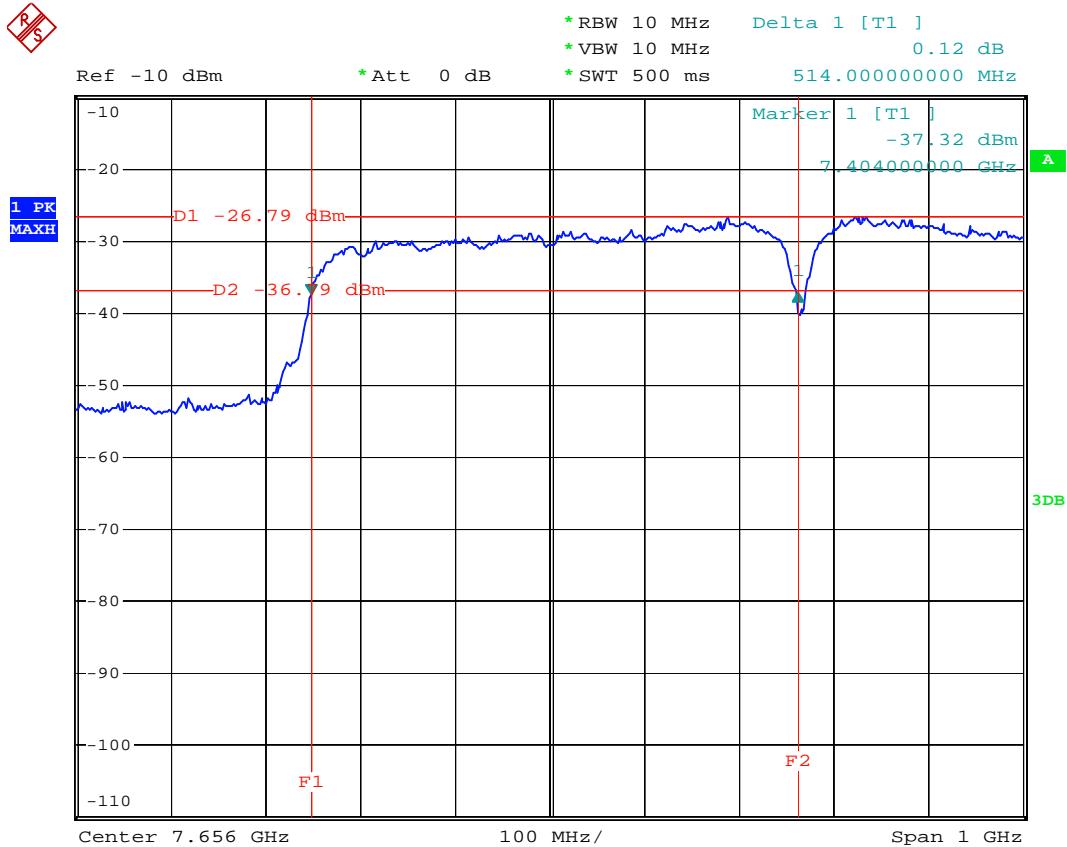


Date: 9.FEB.2010 08:11:32

UWB BW = 514 MHz; F_L = 7404 MHz; F_H = 7918 MHz; F_C = 7661 MHz

Test Distance: 1m

UWB Bandwidth on BAND_ID (nb) 10

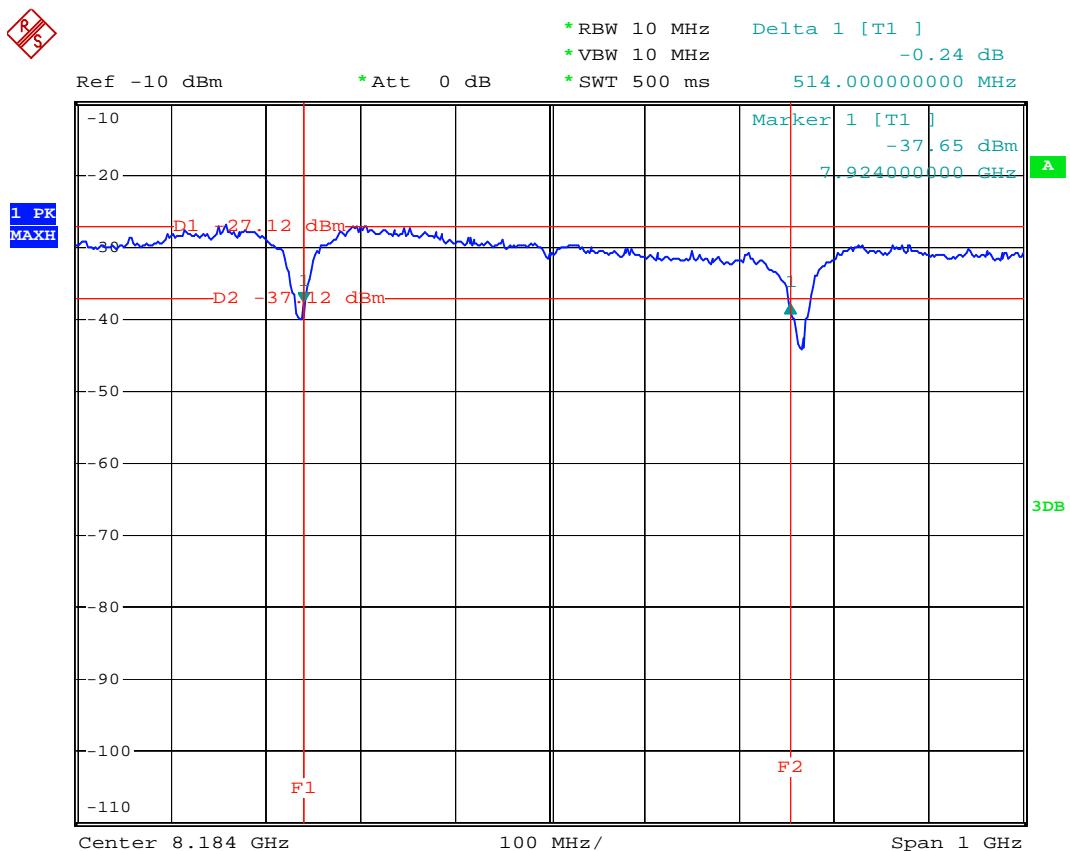


Date: 9.FEB.2010 08:18:28

UWB BW = 514 MHz; F_L = 7924 MHz; F_H = 8438 MHz; F_C = 8181 MHz

Test Distance: 1m

UWB Bandwidth on BAND_ID (nb) 11

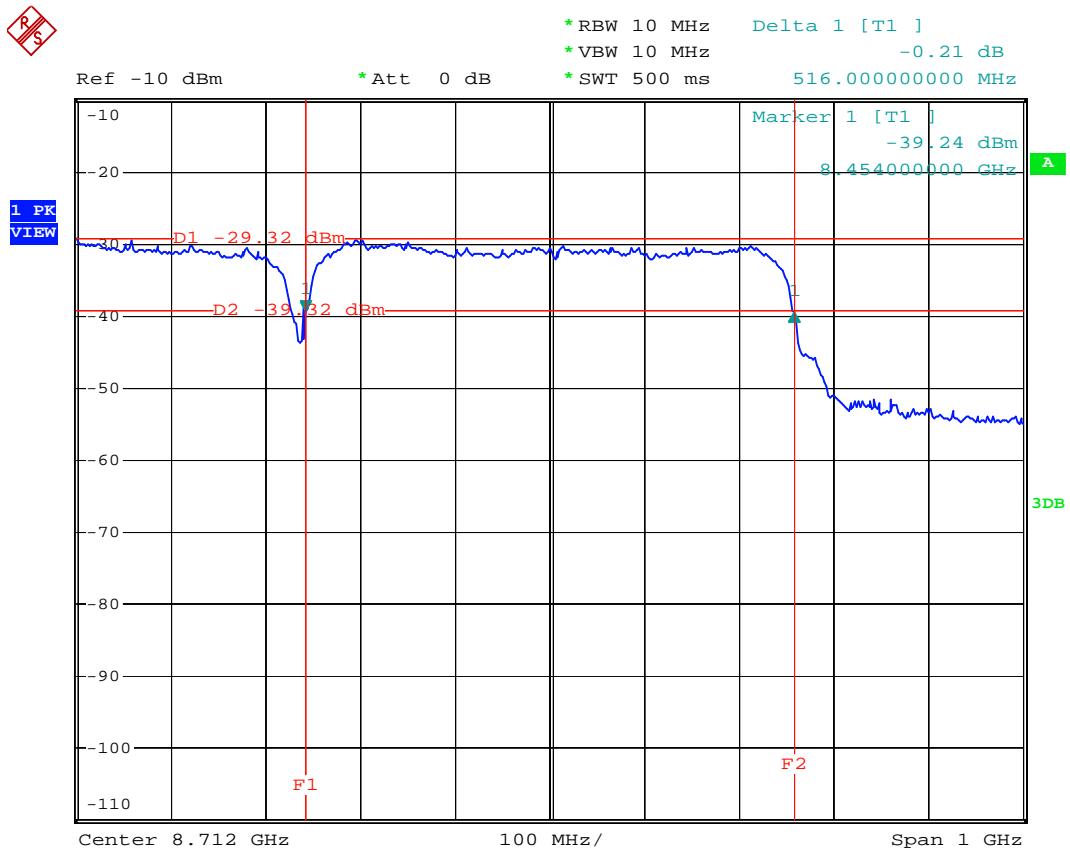

Date: 9.FEB.2010 08:30:18

UWB BW = 516 MHz; F_L = 8454 MHz; F_H = 8970 MHz; F_C = 8712 MHz

3.3 Radiated Emissions Measurement

3.3.1 Limit

1. The radiated emissions at or below 960 MHz from a device shall not exceed the emission levels in section 15.209(a) limit below.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3

2. The radiated emissions above 960 MHz from a device shall not exceed the emission levels in section 15.519(c) limit below.

Freq. (MHz)	EIRP (dBm)
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
10600 above	-61.3

3. This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$.

4. For 47 CFR Section 15.521(c): Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in Section 15.209 of this chapter, rather than the limits specified in this subpart, provided it can be clearly demonstrated that those emissions from the UWB device are due solely to emissions from digital circuitry contained within the transmitter and that the emissions are not intended to be radiated from the transmitter's antenna. Emissions from associated digital devices, as defined in Section 15.3(k) of this chapter, e.g., emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission, are subject to the limits contained in Subpart B of Part 15 of this chapter.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
above 960	500	3

3.3.2 Measuring Instruments and Setting

Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	0 dB
Start Frequency	960 MHz
Stop Frequency	10th carrier harmonic or 40 GHz
RBW / VBW	47 CFR Section15.517(c): 1MHz / 3MHz for RMS, 1 msec averaging time were used for these measurement frequencies. 47 CFR Section 15.521(c): (47 CFR Section 15.209 (a)) 1MHz/1MHz for peak; 1MHz/10Hz for Average. (in accordance with ANSI C63.4)

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~960MHz / RBW 120kHz for QP

3.3.3 Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable that is non-conductive material (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed equal or less than 3 meters far away from the turntable, shorter measurement distances may be used to improve the measurement systems noise floor.
- Extrapolation factor when test distance other than 3m. (in accordance with 47 CFR 15.31 (f) (1))
From 3m to 1m :Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].
From 3m to 0.5m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [0.5m]})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [15.56 dB].
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between 1 meter and 4 meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scanning (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- The measurements made over the frequency range from 9 kHz to 960 MHz were maximized using an


EMI receiver with peak detector capabilities. If the emissions level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 960MHz.

7. Measurements above 960 MHz were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 1 MHz and VBW of 3 MHz, and a 1 msec. averaging time were used for these measurements.
8. The spectrum between 9 kHz and 960 MHz contained no intentional radiation and lies below the limits. The spectrum from 960MHz to 18GHz contained intentional UWB signals between 3100 MHz and 10600 MHz and lie below the limits. No other emissions above 10600 MHz were detected. The maximum frequency tested was 40 GHz.
9. Per 47 CFR, Part 15, Subpart F, §15.521(c) (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.
10. Additional measurements in the 960 MHz to 40 GHz range were performed to determine the nature of all unintentional emissions in this span. Conducted antenna port measurement and terminated antenna port measurement were done in the 960 MHz to 18 GHz range to show that all noise peaks have the same frequency and polarization and are determined to be emission from the digital circuit and are not radiated from the antenna.

3.3.4 Test Setup Layout


For radiated emissions below 30MHz

Investigated emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission


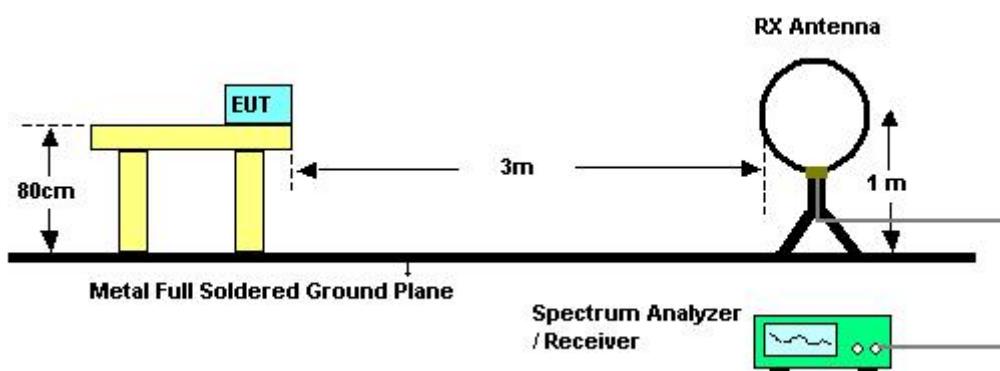


For radiated emissions from 30MHz~960MHz

Investigated emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission

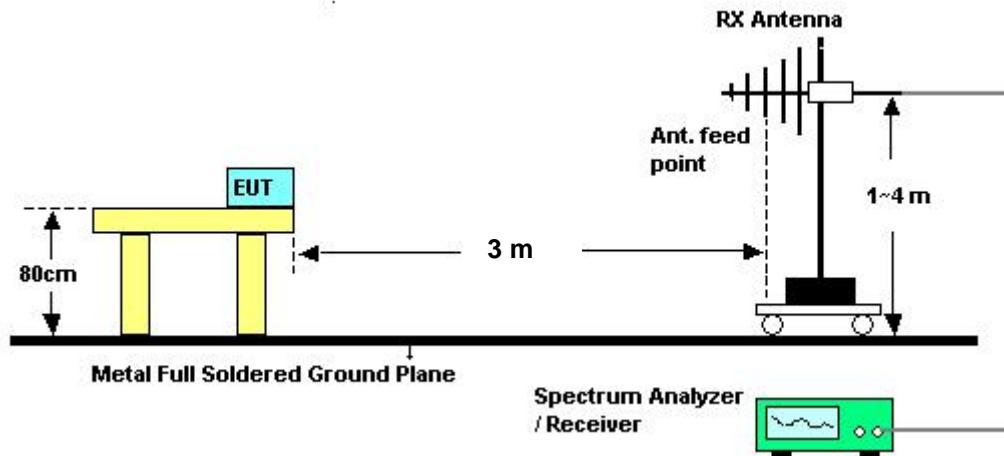
**For radiated emissions above 960MHz**

Investigated emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission

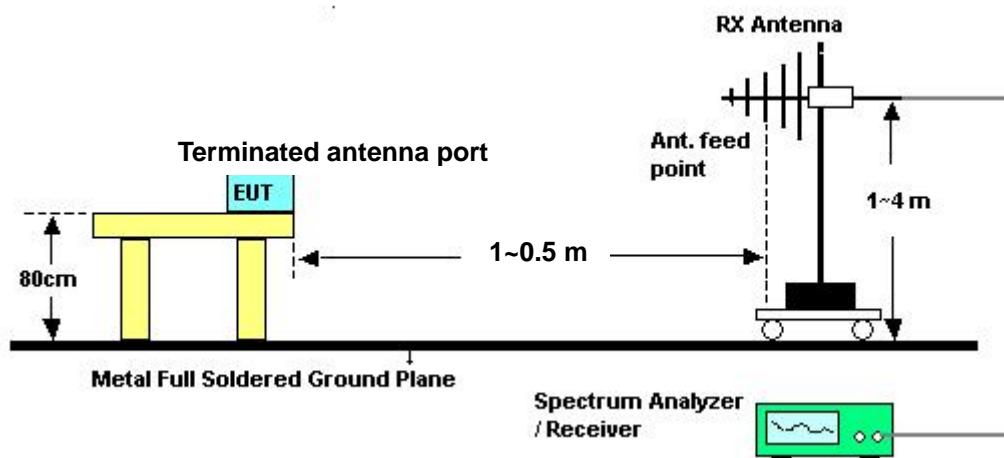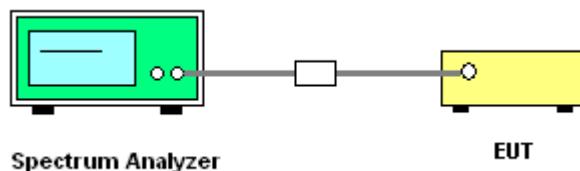**For conducted emissions above 960MHz (Conducted antenna port measurement)**


For radiated emissions above 960MHz

Investigated emissions from UWB transmission

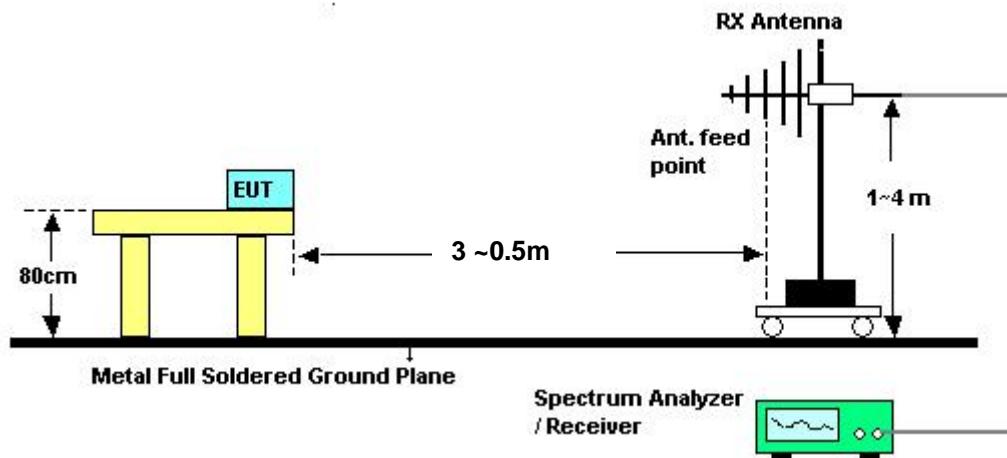

For radiated emissions from fundamental emission (3m bore sight)

Investigated emissions from UWB transmission

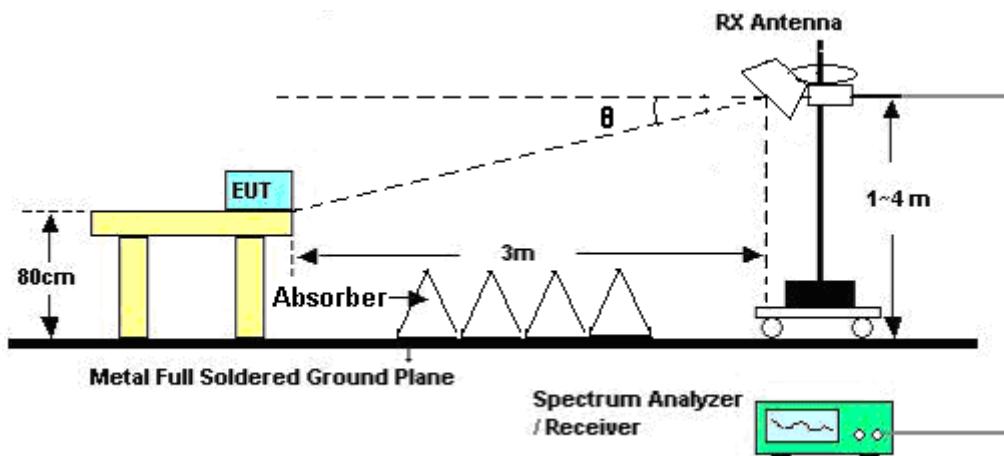

Note: The Horn Antenna maintaining bore sight alignment.

$$\theta = \tan^{-1} \left(\frac{\text{The Antenna's Height} - \text{The Table's Height}}{\text{The Test Distance}} \right)$$

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode and TFC 4 with 53.3Mbps.


3.3.7 Results of Radiated Emissions***Radiated Emissions (9kHz~30MHz)***

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB) (in accordance with 47 CFR 15.31 (f) (2)); Limit line = specific limits (dBuV) + distance extrapolation factor.

Radiated Emissions (30MHz~960MHz)


Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

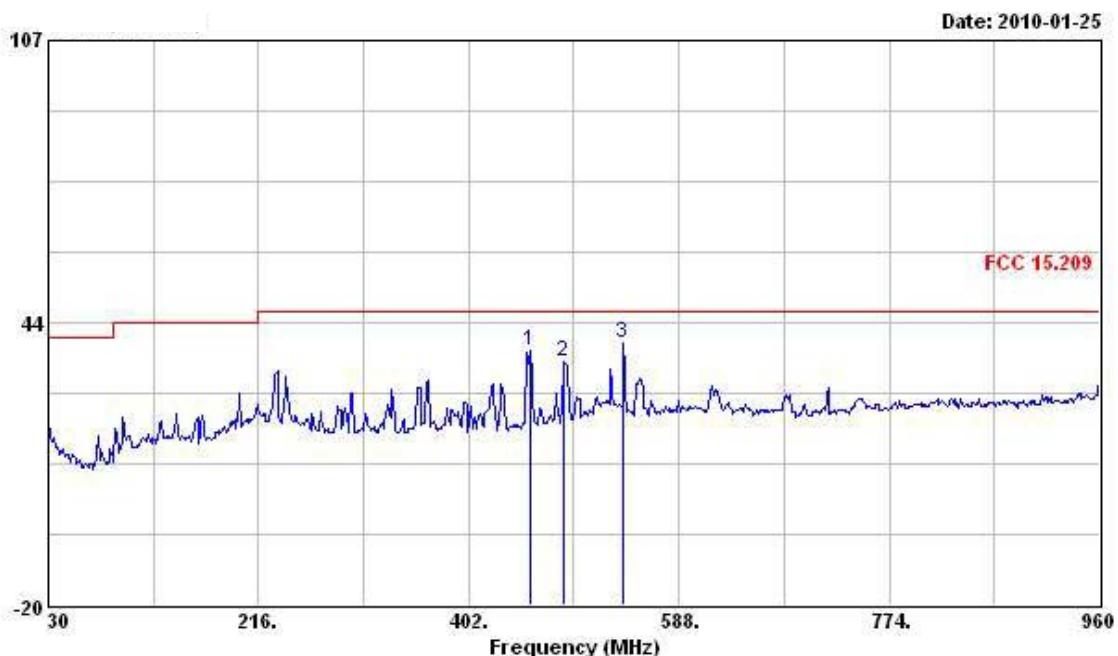Test Distance: 3m**Horizontal**

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	456.870	37.23	-8.77	46.00	44.54	16.41	4.24	27.96 Peak
2	486.630	34.81	-11.19	46.00	41.57	17.00	4.36	28.12 Peak
3	538.710	38.96	-7.04	46.00	44.20	18.41	4.52	28.17 Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

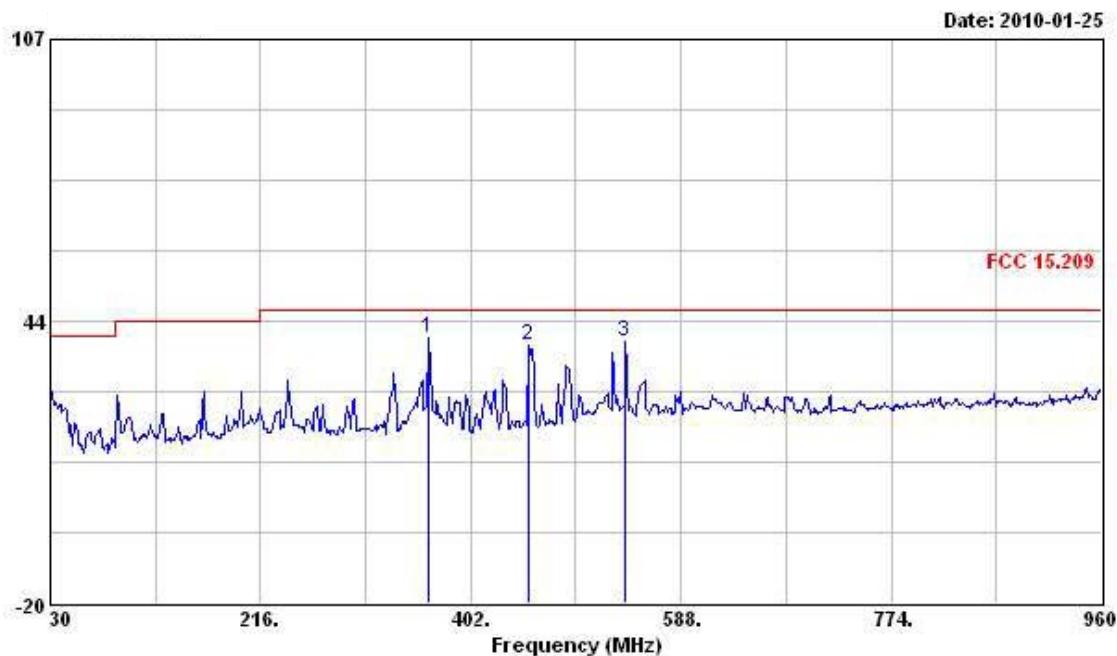Test Distance: 3m**Vertical**

Freq	Level	Over Limit		Read	Antenna	Cable	Preamp	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB
1	363.870	39.58	-6.42	46.00	48.33	14.71	3.85	27.31 Peak
2	453.150	38.22	-7.78	46.00	45.60	16.33	4.23	27.94 Peak
3	538.710	39.08	-6.92	46.00	44.32	18.41	4.52	28.17 Peak


Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 3m


Horizontal

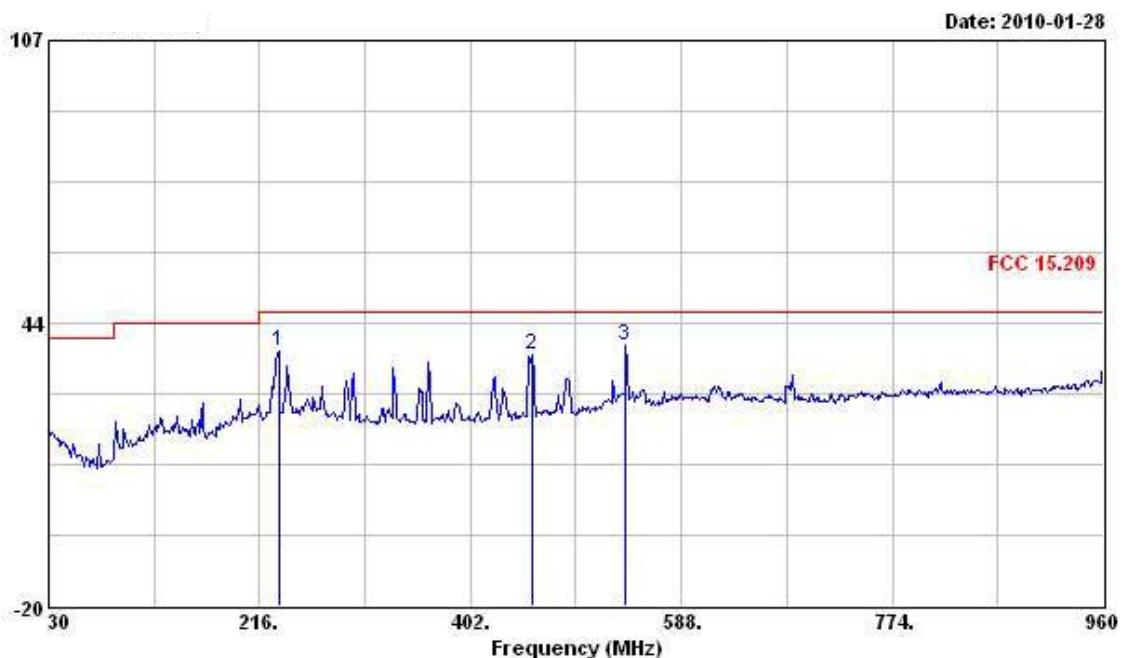

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Antenna	Level	Factor	Loss	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	232.740	37.41	-8.59	46.00	48.72	12.43	3.16	26.90 Peak
2	456.870	36.23	-9.77	46.00	43.54	16.41	4.24	27.96 Peak
3	538.710	38.34	-7.66	46.00	43.58	18.41	4.52	28.17 Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

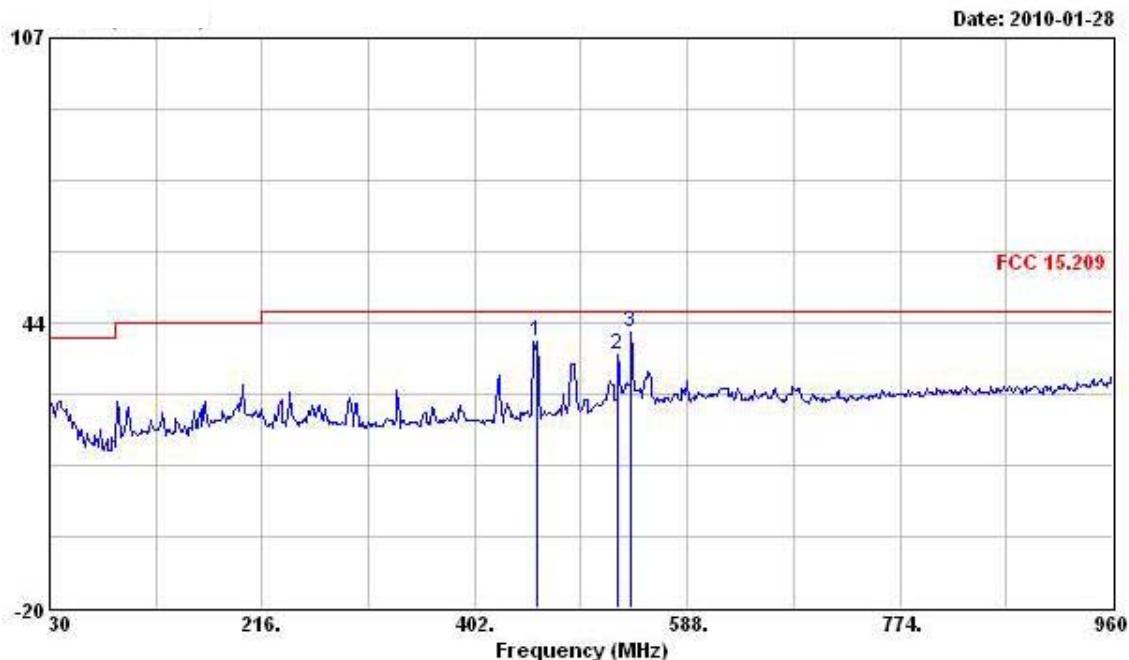Test Distance: 3m**Vertical**

Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark	
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m
1	456.870	39.32	-6.68	46.00	46.63	16.41	4.24	27.96	Peak
2	527.550	36.54	-9.46	46.00	42.15	18.07	4.49	28.17	Peak
3	538.710	41.58	-4.42	46.00	46.82	18.41	4.52	28.17	Peak


Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 3m


Horizontal

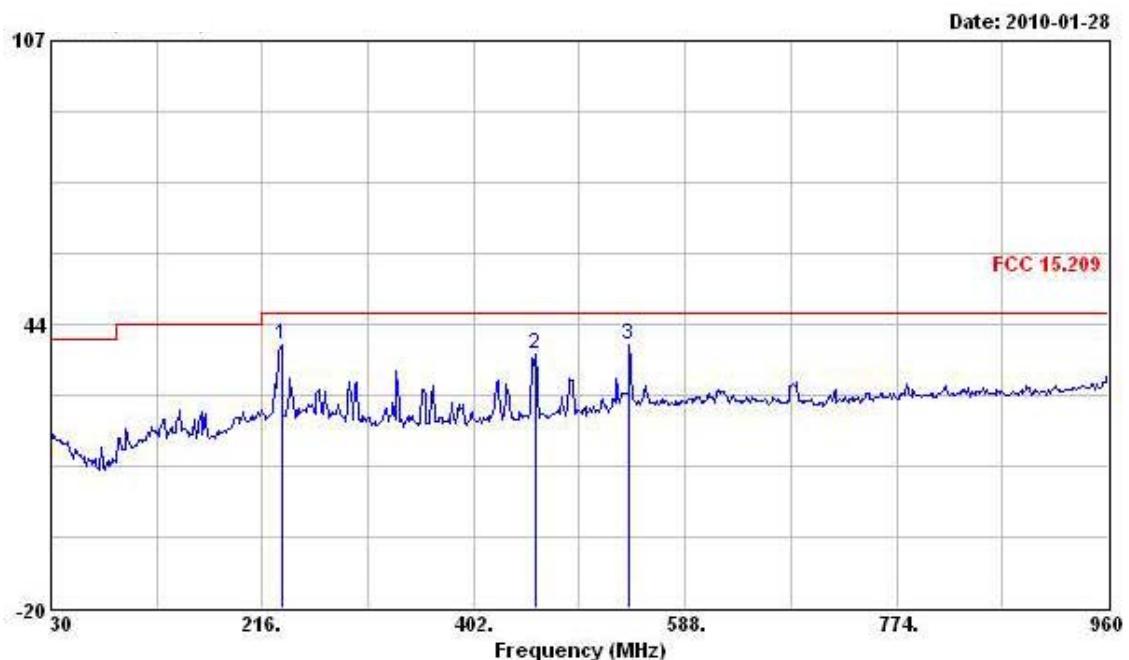

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp
		Limit	Line	Level	Factor	Loss	Factor
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 232.740	38.74	-7.26	46.00	50.05	12.43	3.16	26.90
2 456.870	36.72	-9.28	46.00	44.03	16.41	4.24	27.96
3 538.710	38.81	-7.19	46.00	44.05	18.41	4.52	28.17

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

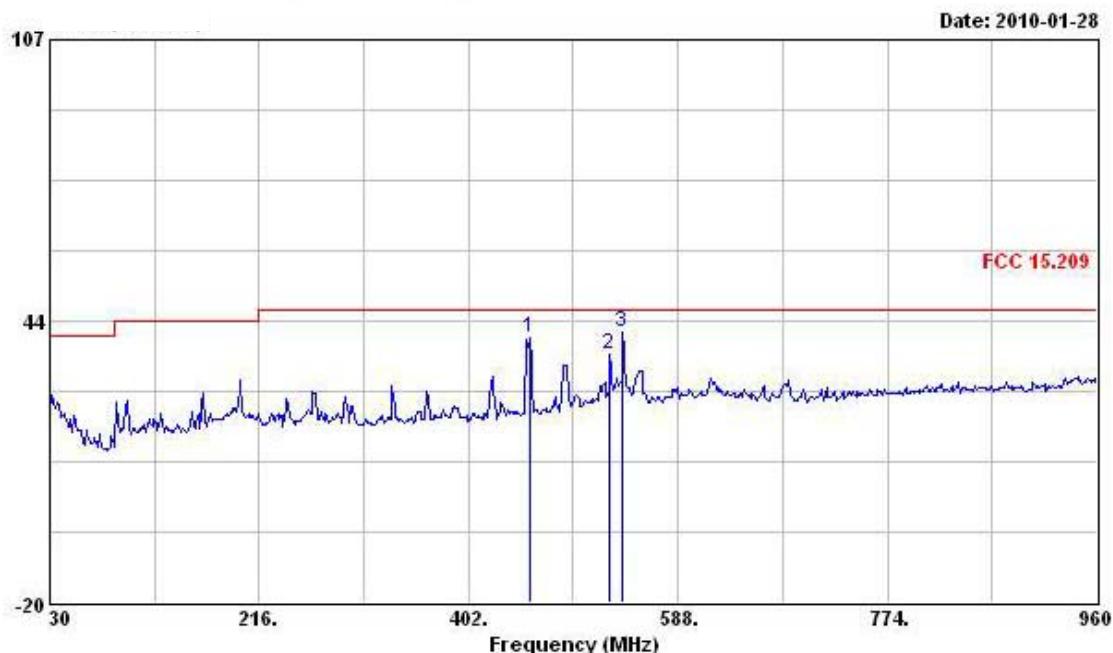Test Distance: 3m**Vertical**


Freq	Level	Over Limit		Read		Antenna Factor	Cable Loss	Preamp Factor	Remark
		MHz	dBuV/m	dB	dBuV/m				
1	456.870	39.68	-6.32	46.00	46.99	16.41	4.24	27.96	
2	527.550	35.97	-10.03	46.00	41.58	18.07	4.49	28.17	
3	538.710	41.07	-4.93	46.00	46.31	18.41	4.52	28.17	

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Radiated Emissions (960MHz~1GHz Emissions)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

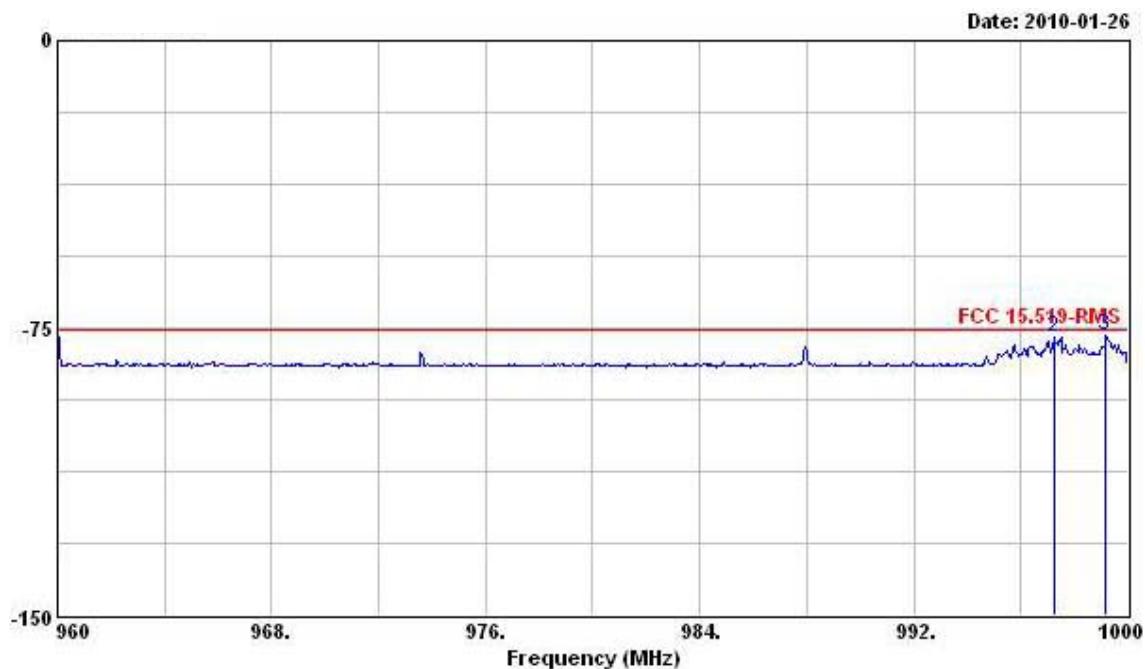
Test Distance: 3m**Horizontal**

Freq	Level	Over Limit		Read	Antenna	Cable Preamp		Remark
		Limit	Line			Level	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	960.000	-75.64	-0.34	-75.30	-76.28	21.52	6.29	27.17
2	997.240	-77.40	-2.10	-75.30	-78.94	22.43	6.16	27.05
3	999.160	-77.05	-1.75	-75.30	-78.64	22.48	6.15	27.04

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 3m

Vertical

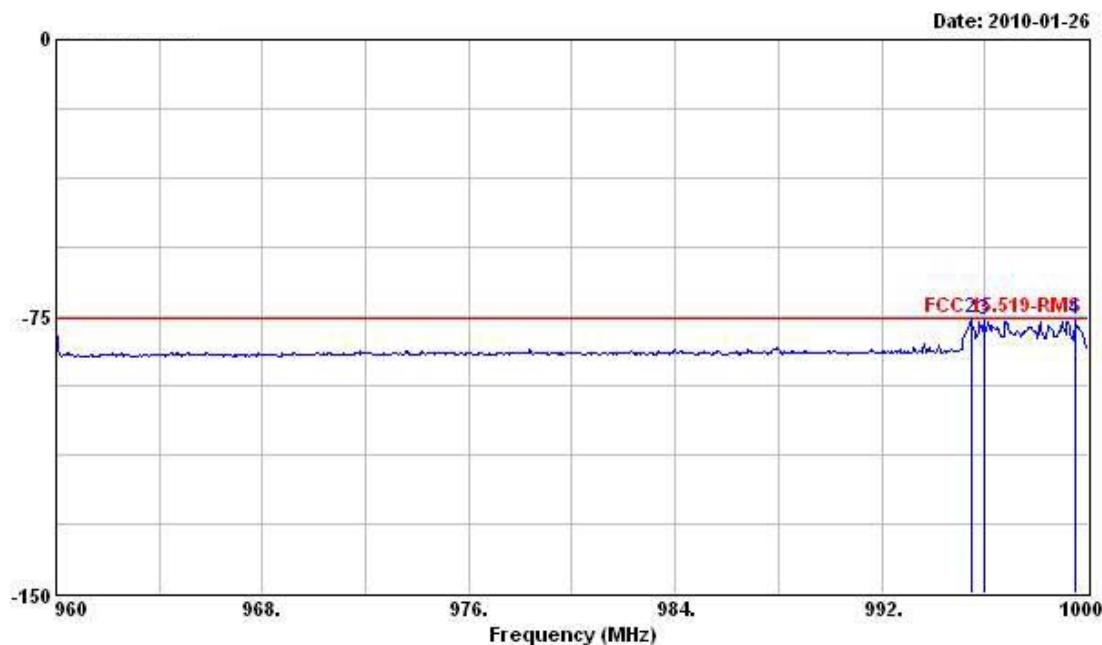


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	960.000	-78.70	-3.40	-75.30	-79.34	21.52	6.29	27.17
2 @	995.480	-75.63	-0.33	-75.30	-77.12	22.38	6.17	27.06
3	995.960	-76.17	-0.87	-75.30	-77.68	22.40	6.16	27.05
4	999.480	-76.18	-0.88	-75.30	-77.77	22.48	6.15	27.04

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 3m

Horizontal

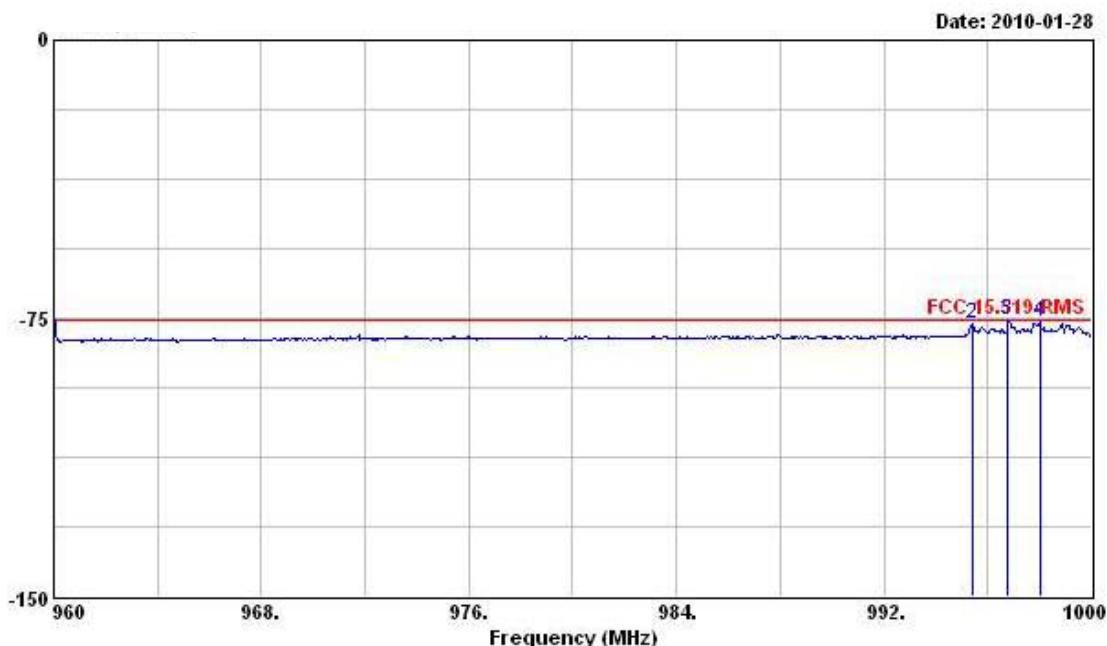


Freq	Level	Over Limit		Read		Antenna Factor	Cable Loss	Preamp Factor	Remark
		10Hz	dBm	Line	dBm				
1	960.000	-75.86	-0.56	-75.30	-76.50	21.52	6.29	27.17	
2	995.440	-76.33	-1.03	-75.30	-77.82	22.38	6.17	27.06	
3	996.760	-75.49	-0.19	-75.30	-77.03	22.43	6.16	27.05	
4	998.000	-75.93	-0.63	-75.30	-77.49	22.45	6.16	27.05	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 3m

Vertical

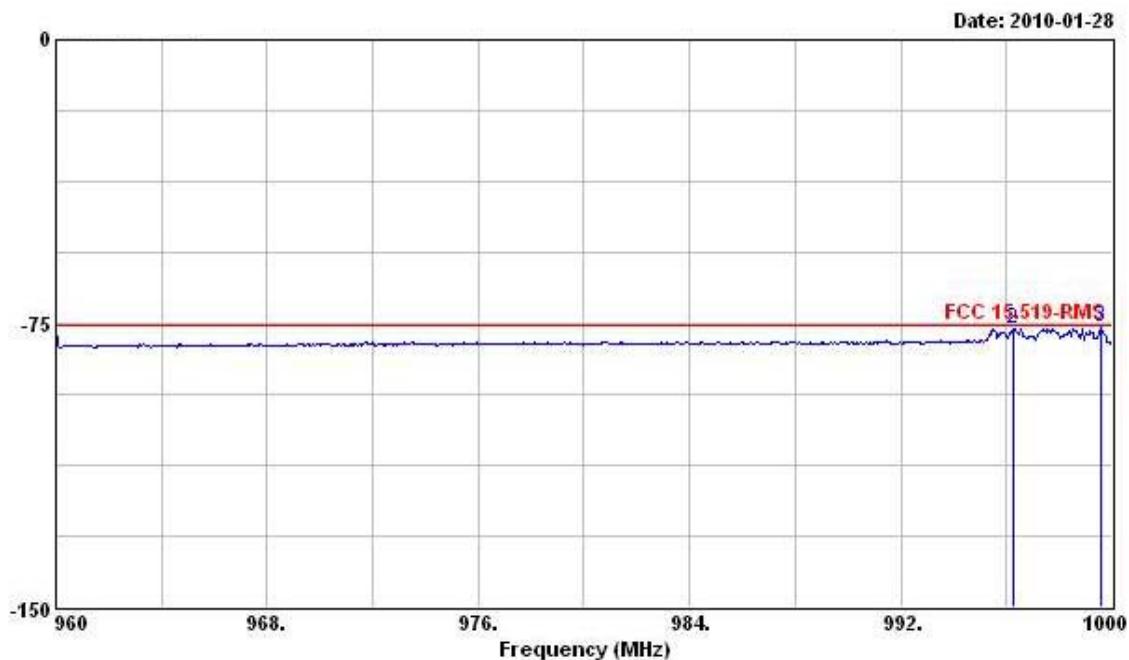


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	960.000	-77.39	-2.09	-75.30	-78.03	21.52	6.29	27.17
2	996.280	-76.27	-0.97	-75.30	-77.78	22.40	6.16	27.05
3	999.600	-75.81	-0.51	-75.30	-77.42	22.50	6.15	27.04

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 3m

Horizontal

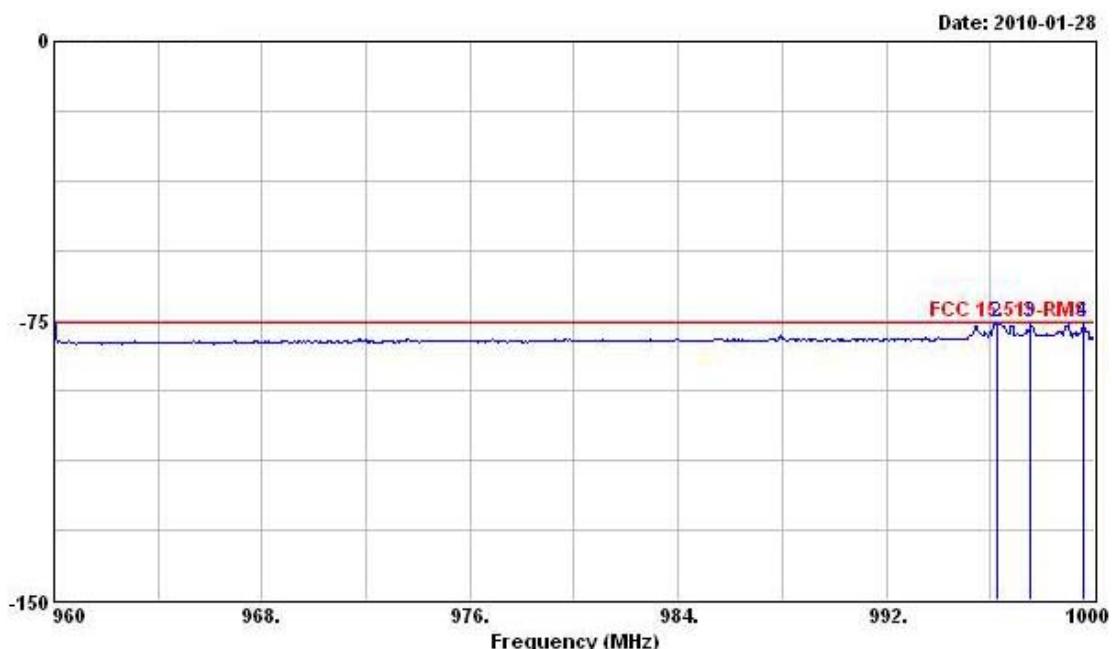


Freq	Level	Over Limit		Read	Antenna	Cable	Preamp	Remark
		MHz	dBm	dB	dBm			
1 @	960.000	-75.70	-0.40	-75.30	-76.34	21.52	6.29	27.17
2 @	996.240	-75.43	-0.13	-75.30	-76.94	22.40	6.16	27.05
3 @	997.560	-75.68	-0.38	-75.30	-77.22	22.43	6.16	27.05
4 @	999.600	-75.59	-0.29	-75.30	-77.20	22.50	6.15	27.04

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 3m

Vertical

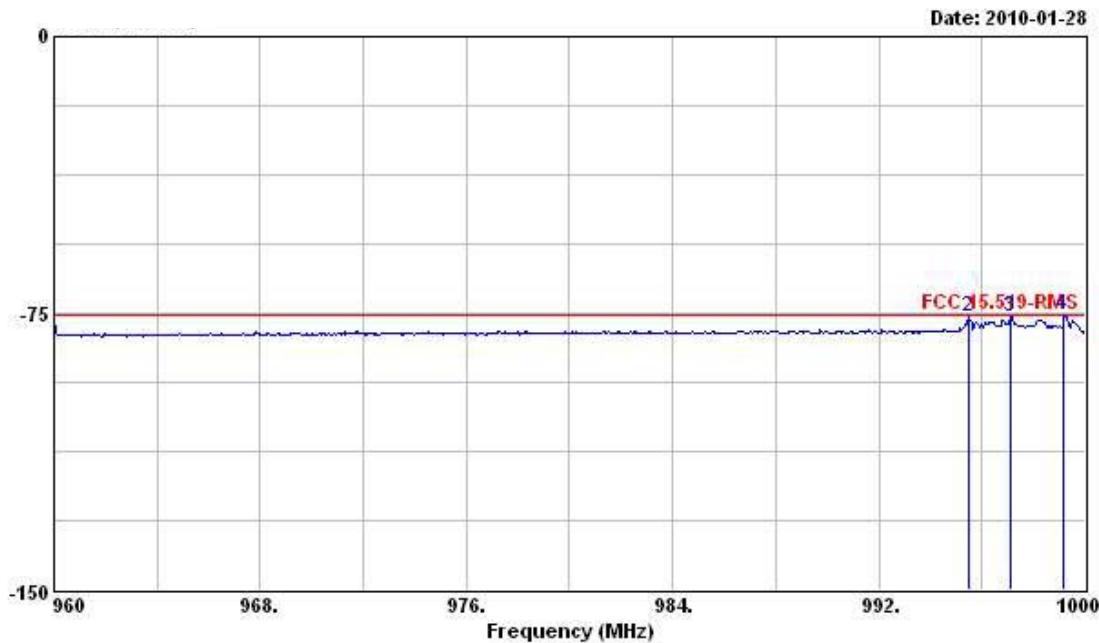

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	960.000	-77.51	-2.21	-75.30	-78.15	21.52	6.29	27.17
2	995.480	-76.17	-0.87	-75.30	-77.66	22.38	6.17	27.06
3	997.080	-75.77	-0.47	-75.30	-77.31	22.43	6.16	27.05
4	999.160	-75.72	-0.42	-75.30	-77.31	22.48	6.15	27.04


Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

For radiated emissions from fundamental emission (3m bore sight)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

Test Distance: 3m

Horizontal

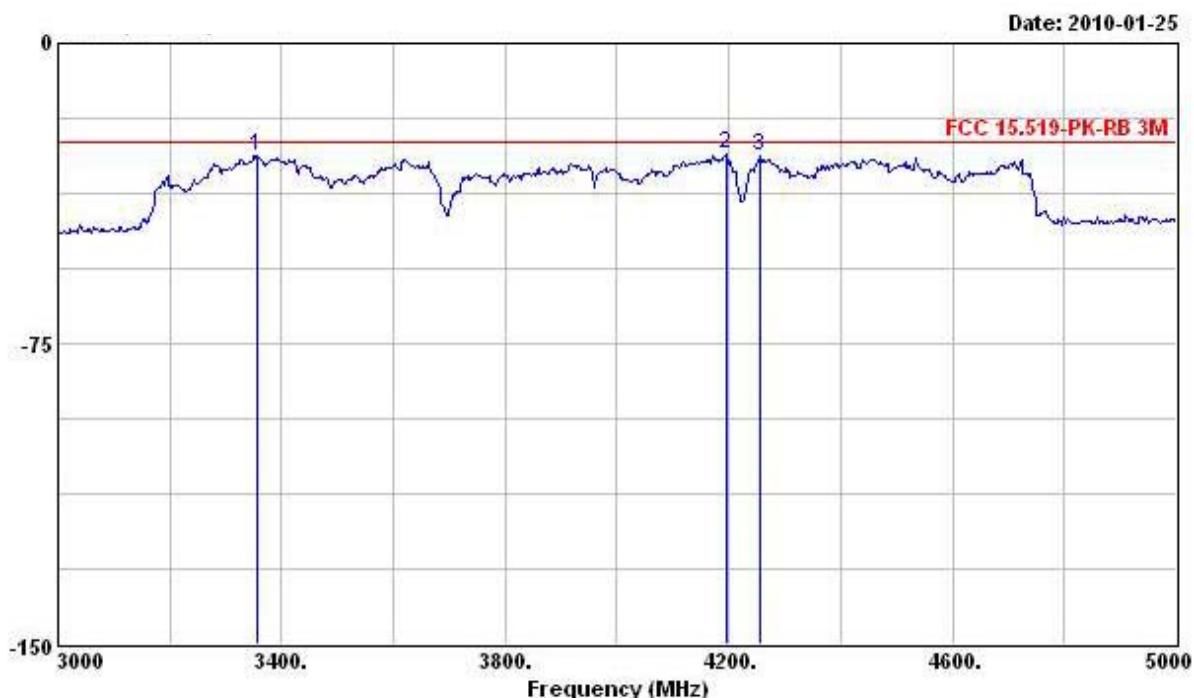


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark
				dBm	dB			
3358.000	-28.19	-3.76	-24.43	-28.88	31.47	3.72	34.50	
4196.000	-27.46	-3.03	-24.43	-29.97	32.96	4.22	34.67	
4254.000	-28.28	-3.85	-24.43	-30.73	32.95	4.23	34.73	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 3m

Vertical

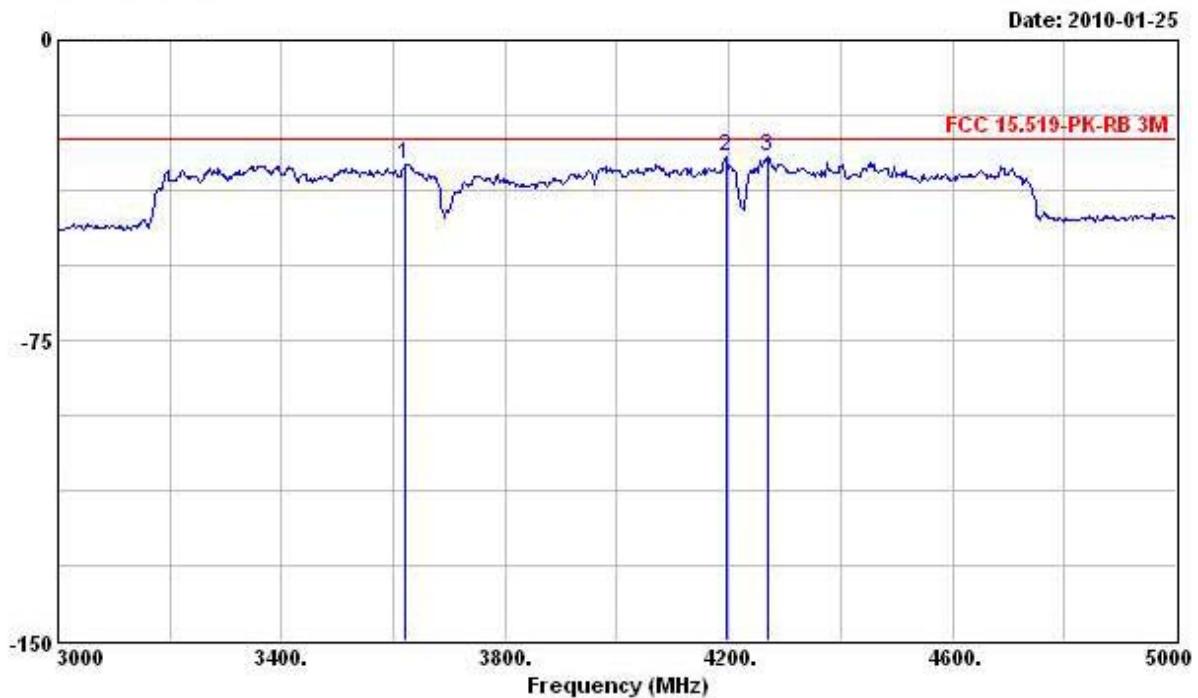


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark
				MHz	dBm	dB	dBm	dB/m
1	3622.000	-30.96	-6.53	-24.43	-32.31	32.09	3.92	34.66
2	4196.000	-29.35	-4.92	-24.43	-31.86	32.96	4.22	34.67
3	4270.000	-28.95	-4.52	-24.43	-31.41	32.95	4.24	34.73

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 3m

Horizontal

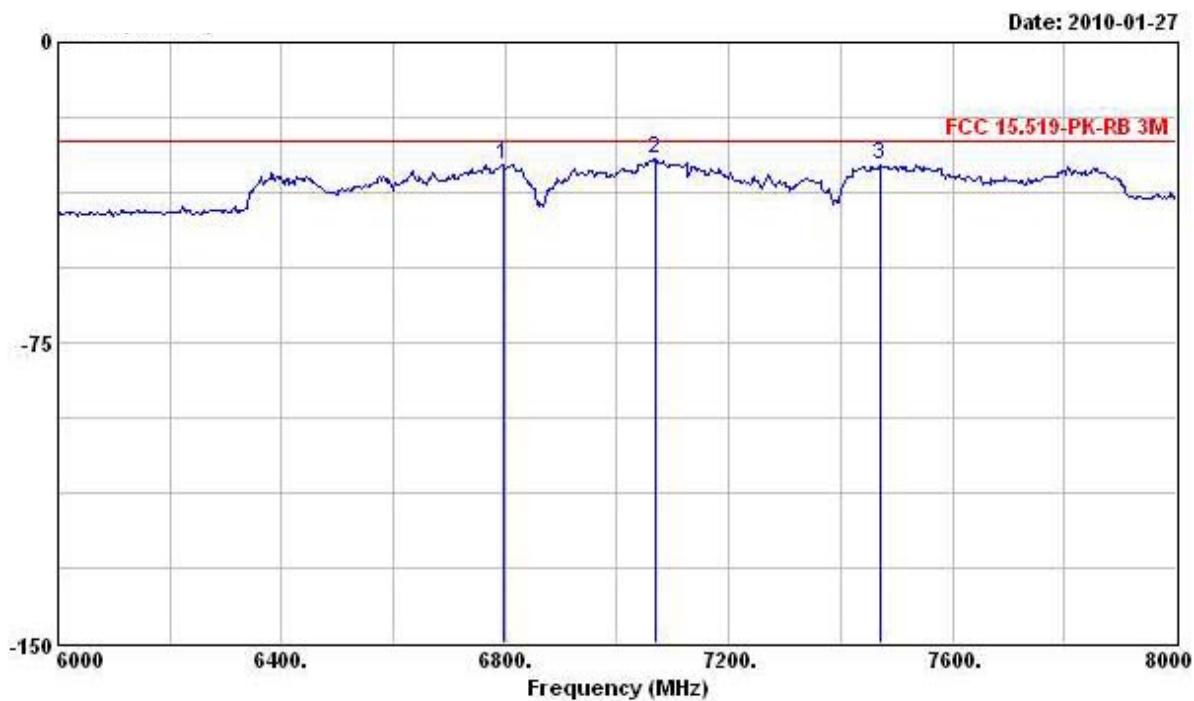


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1 6796.000	-30.63	-6.20	-24.43	-37.54	35.64	5.56	34.29	
2 7068.000	-28.98	-4.55	-24.43	-36.58	36.27	5.61	34.28	
3 7470.000	-30.73	-6.30	-24.43	-39.36	37.26	5.66	34.29	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 3m

Vertical

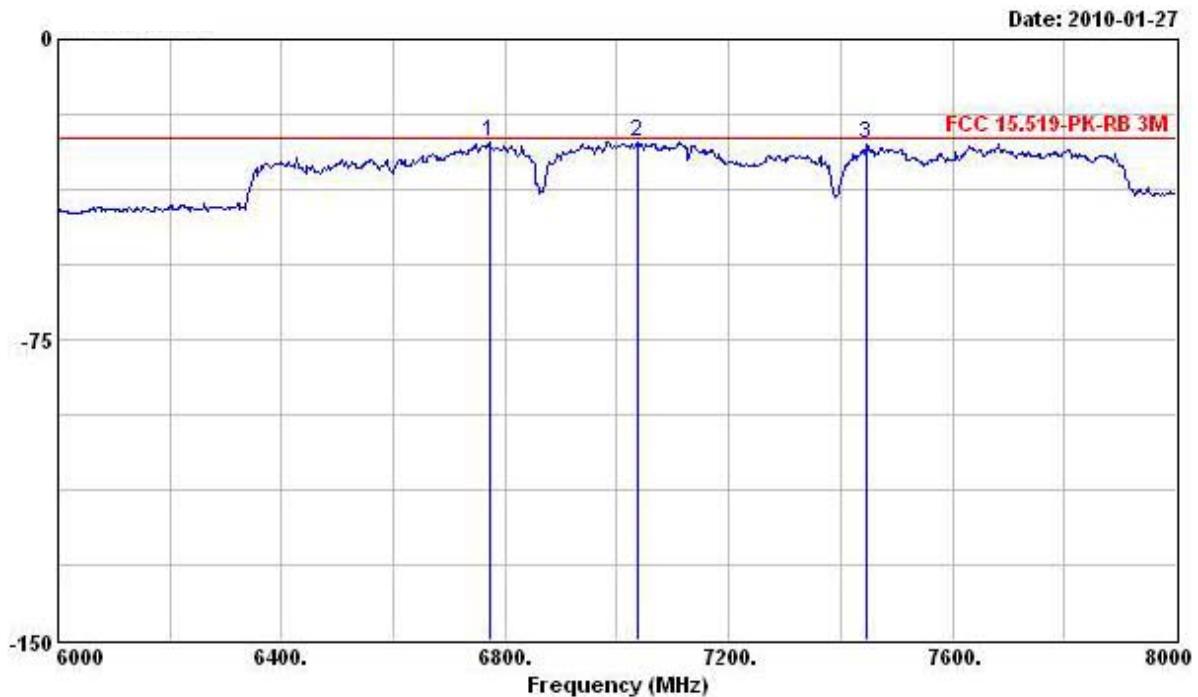


Freq	Level	Over Limit	Limit Line	Antenna		Cable Preamp		Remark
				dBm	dB	dBm	dB/m	
1 @ 6772.000	-25.69	-1.26	-24.43	-32.56	35.61	5.55	34.29	
2 @ 7036.000	-25.63	-1.20	-24.43	-33.13	36.18	5.60	34.28	
3 @ 7446.000	-26.05	-1.62	-24.43	-34.59	37.18	5.65	34.29	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 3m

Horizontal

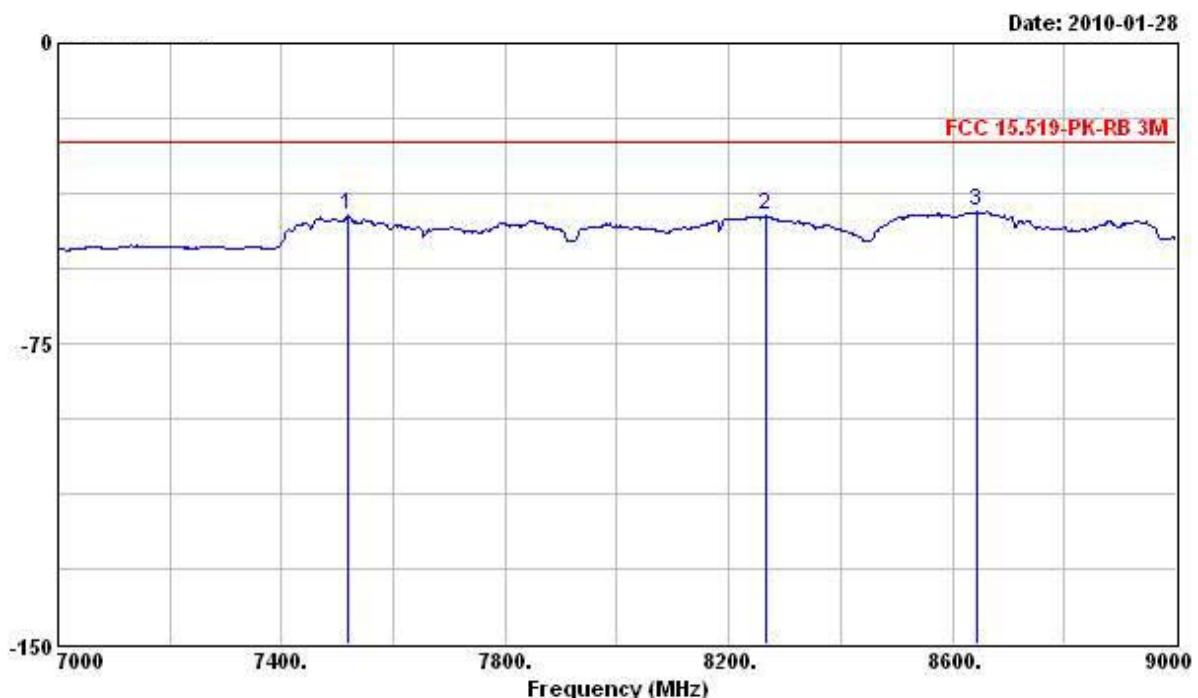


Freq	Level	Over Limit	Limit Line	Read		Antenna Level	Cable Factor	Preamp Loss	Remark
				dBm	dB				
1 7518.000	-43.13	-18.70	-24.43	-51.81	37.32	5.66	34.30		
2 8268.000	-43.14	-18.71	-24.43	-52.82	38.08	5.88	34.28		
3 8644.000	-42.16	-17.73	-24.43	-52.20	38.39	6.01	34.36		

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 3m

Vertical

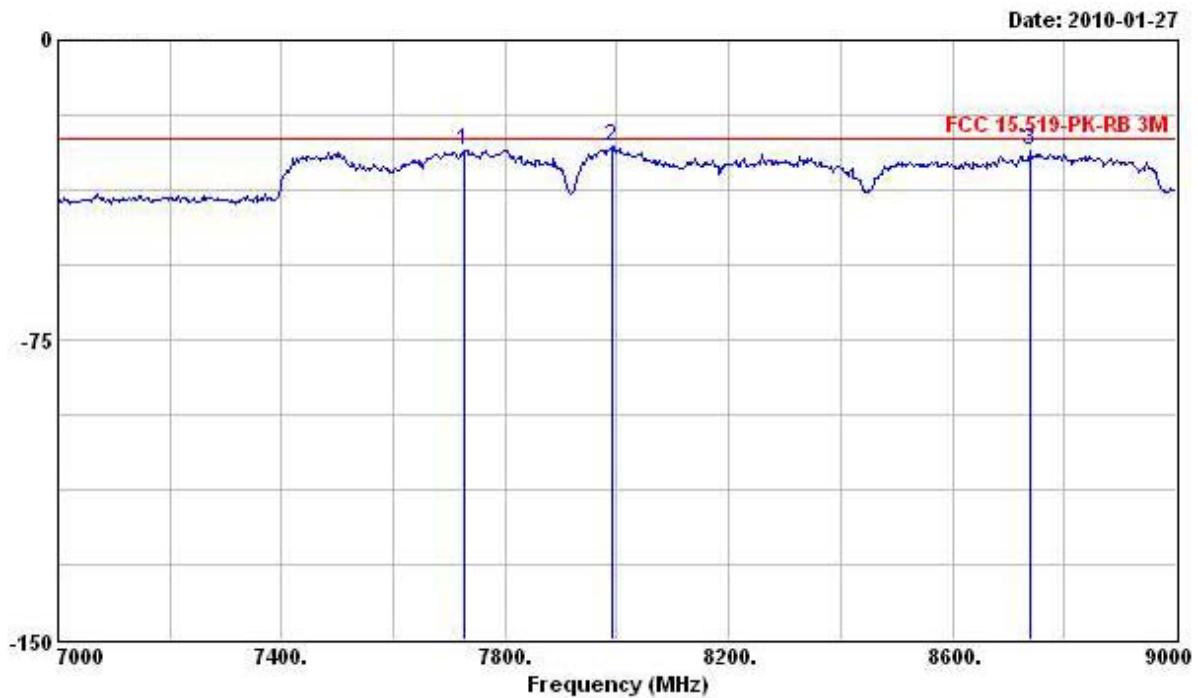


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark
				MHz	dBm	dB	dBm	dB
1 @	7726.000	-27.40	-2.97	-24.43	-36.32	37.53	5.72	34.33
2 @	7990.000	-26.40	-1.97	-24.43	-35.61	37.78	5.80	34.37
3 @	8740.000	-27.87	-3.44	-24.43	-37.88	38.44	6.04	34.47

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 3m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (1GHz~8GHz Emissions)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

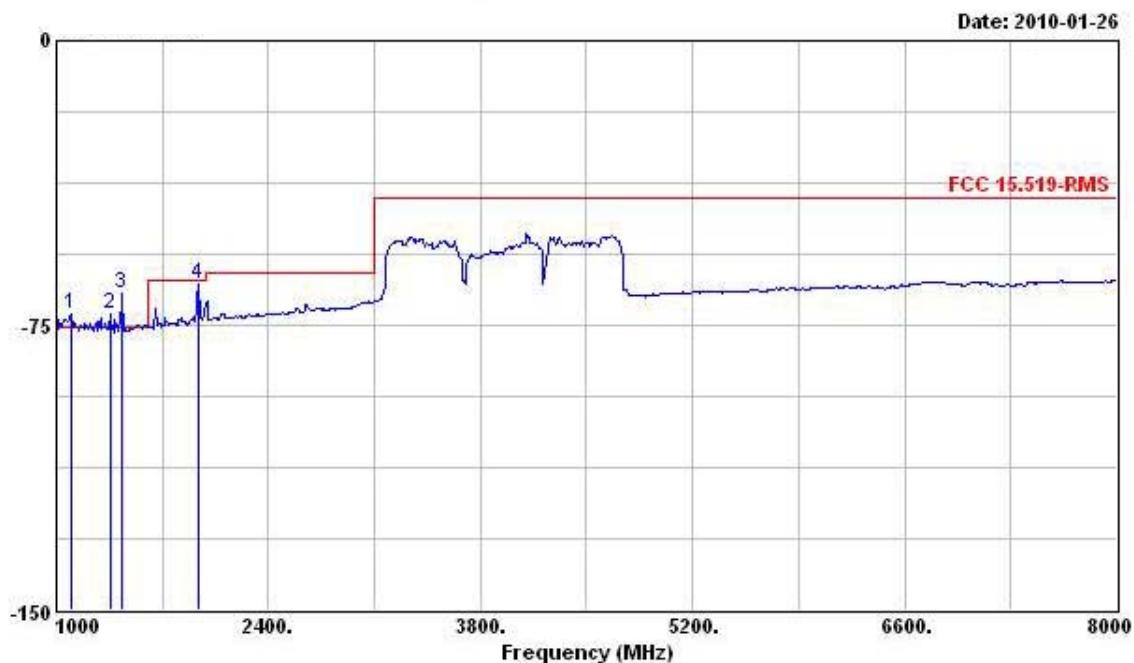
Test Distance: 1m**Horizontal**

Freq	Level	Over Limit	Limit Line	Read		Cable Loss	Antenna Factor	Preamp Factor	Remark
				dBm	dB				
MHz	dBm								
1 @ 1098.000	-72.21			-66.56	27.18	1.92	34.75		
2 @ 1357.000	-71.91			-66.97	27.39	2.15	34.48		
3 @ 1434.000	-66.63			-61.91	27.46	2.22	34.40		
4 @ 1938.000	-64.29			-63.13	29.84	2.66	33.66		

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2, 3, 4) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

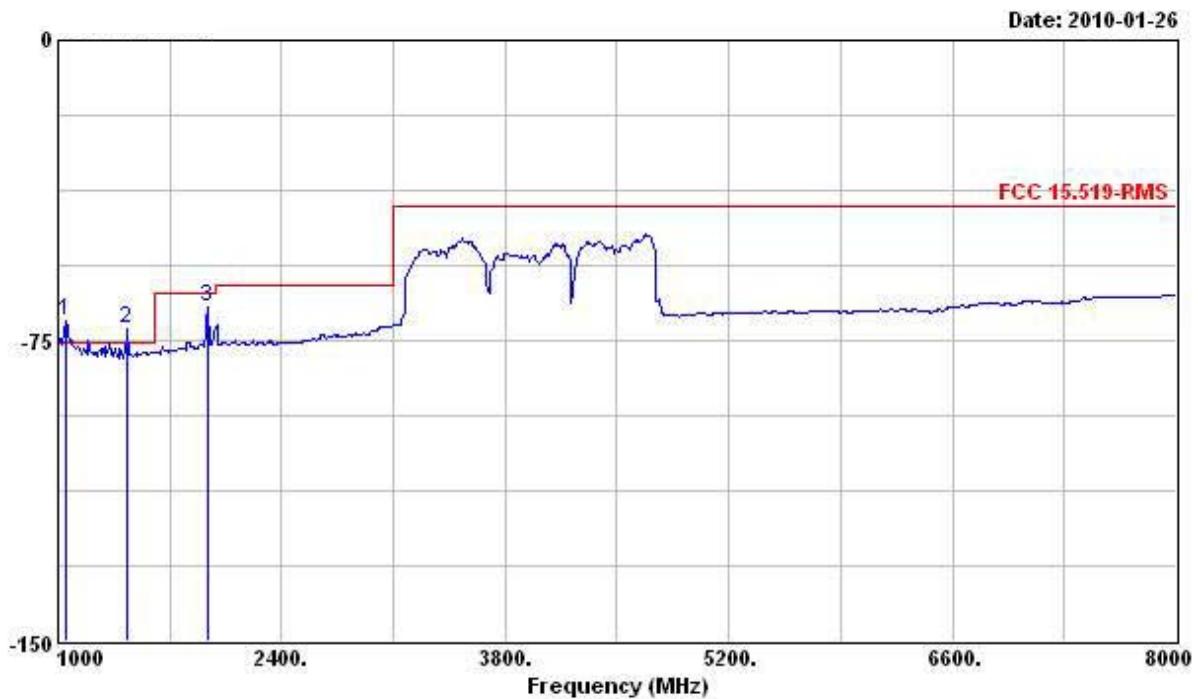


Freq	Level	Over Limit	Line	ReadAntenna		Cable	Preamp	Remark
				MHz	dBm	dB	dBm	dB/m
1	0	1049.000	-70.16			-64.33	27.14	1.84
2	0	1434.000	-72.25			-67.53	27.46	2.22
3	0	1938.000	-66.71			-65.55	29.84	2.66

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2, 3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 1m

Horizontal

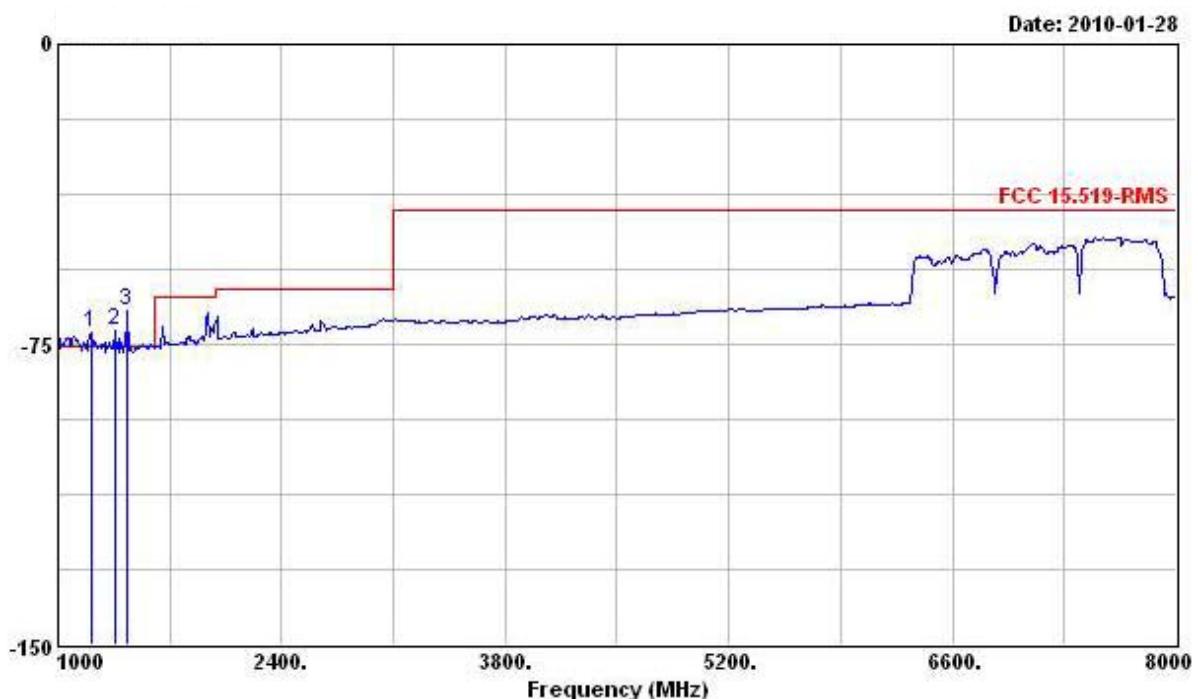


Freq	Level	Over Limit		Read		Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor				
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	dB	
1 0 1210.000	-71.84			-66.46	27.27	1.99	34.64		
2 0 1357.000	-71.51			-66.57	27.39	2.15	34.48		
3 0 1434.000	-66.82			-62.10	27.46	2.22	34.40		

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2, 3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

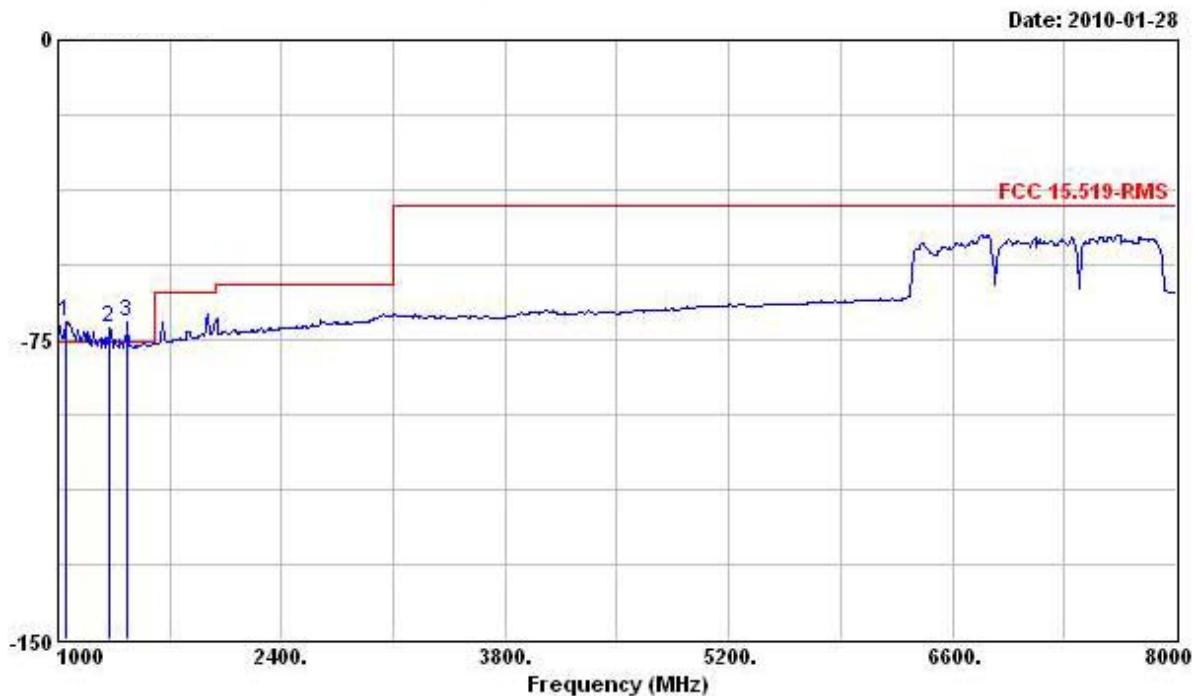


Freq	Level	Over Limit		Read		Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor				
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB		
1 @ 1049.000	-70.36			-64.53	27.14	1.84	34.81		
2 @ 1322.000	-71.97			-66.93	27.36	2.11	34.51		
3 @ 1434.000	-70.51			-65.79	27.46	2.22	34.40		

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2, 3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 1m

Horizontal

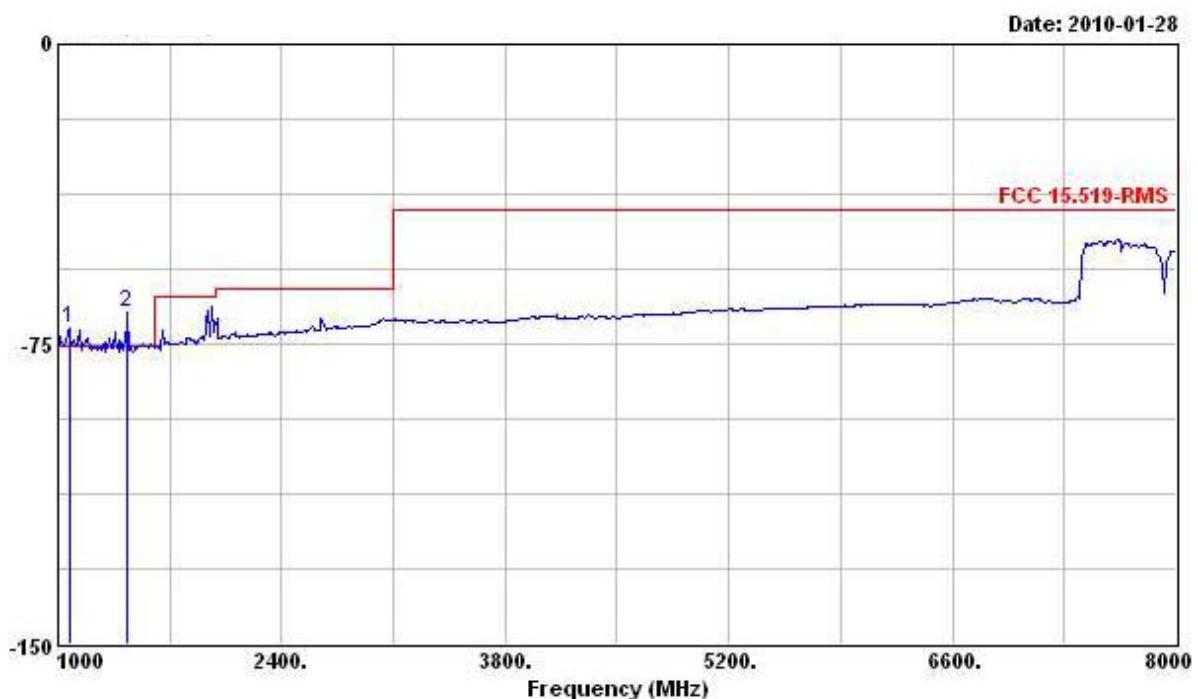


Freq	Level	Over Limit		Read Line	Antenna Level	Cable Factor	Preamp Factor	Remark
		MHz	dBm	dB	dBm	dB/m	dB	dB
1	1070.000	-70.88			-65.14	27.16	1.88	34.78
2	1434.000	-66.90			-62.18	27.46	2.22	34.40

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

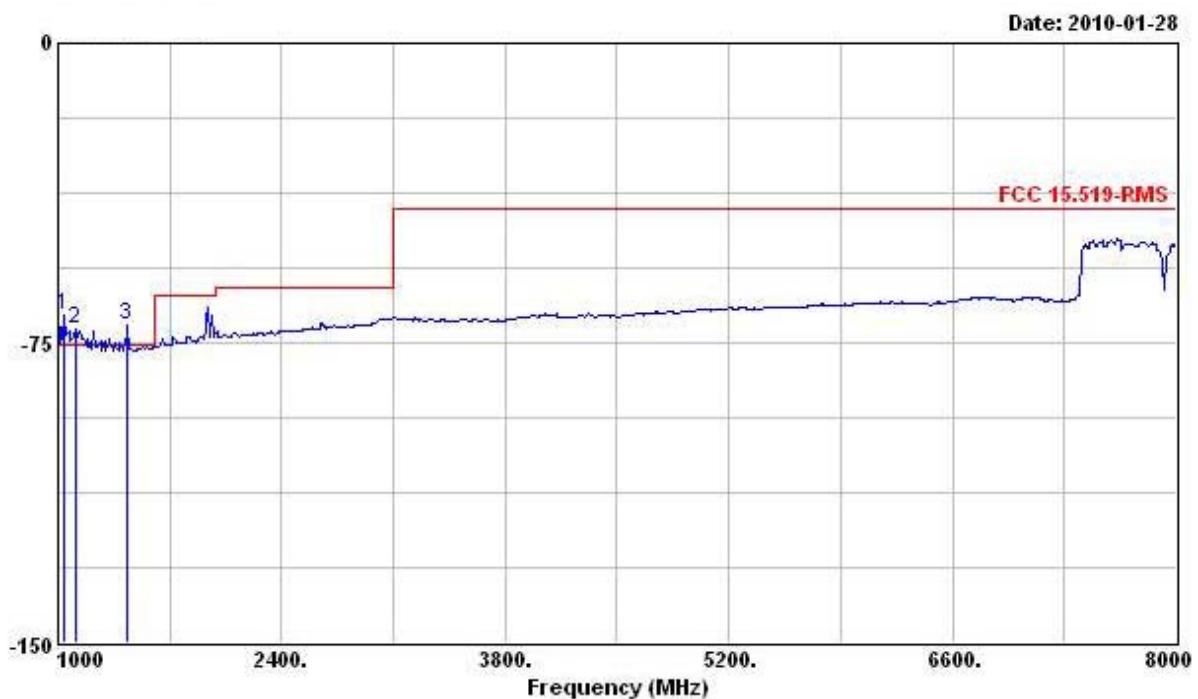


Freq	Level	Over Limit	Line	ReadAntenna		Cable Loss	Preamp Factor	Remark
				MHz	dBm	dB	dBm	dB/m
1	0	1042.000	-67.94			-62.10	27.13	1.84
2	0	1105.000	-71.39			-65.74	27.18	1.92
3	0	1434.000	-70.68			-65.96	27.46	2.22

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1, 2, 3) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions with terminated antenna port (1GHz~8GHz)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

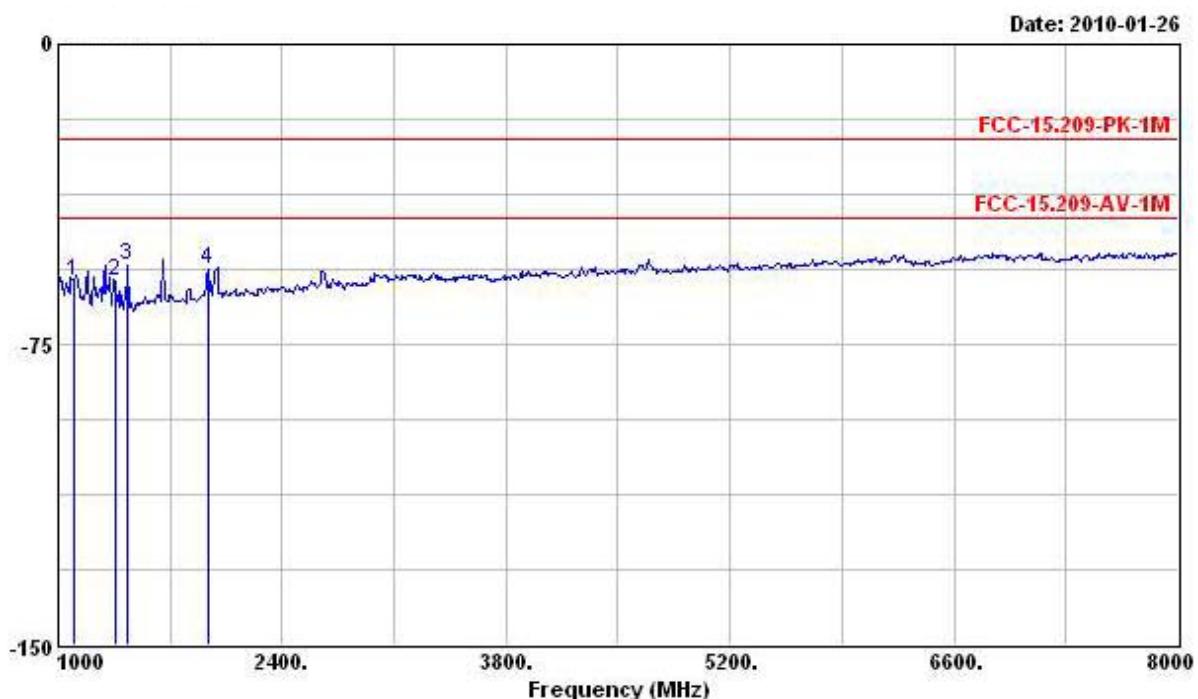
Test Distance: 1m**Horizontal**

Freq	Level	Over Limit	Limit Line	Read		Cable Loss	Preamp Factor	Remark
				Antenna Level	Factor			
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1 1098.000	-59.09	-35.63	-23.46	-53.44	27.18	1.92	34.75	Peak
2 1357.000	-59.24	-35.78	-23.46	-54.30	27.39	2.15	34.48	Peak
3 1434.000	-55.13	-31.67	-23.46	-50.41	27.46	2.22	34.40	Peak
4 1938.000	-56.03	-32.57	-23.46	-54.87	29.84	2.66	33.66	Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Test Distance: 1m

Vertical

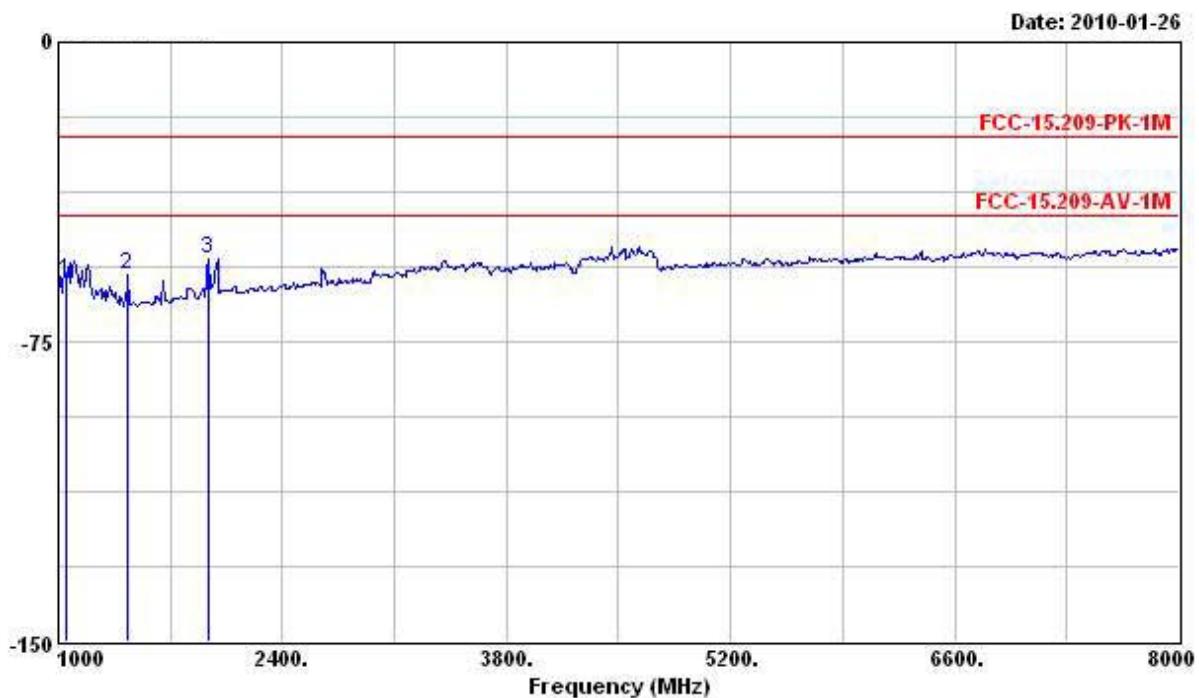


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark
				dBm	dB			
MHz								
1	1049.000	-59.53	-36.07	-23.46	-53.70	27.14	1.84	34.81 Peak
2	1434.000	-58.44	-34.98	-23.46	-53.72	27.46	2.22	34.40 Peak
3	1938.000	-54.22	-30.76	-23.46	-53.06	29.84	2.66	33.66 Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 1m

Horizontal

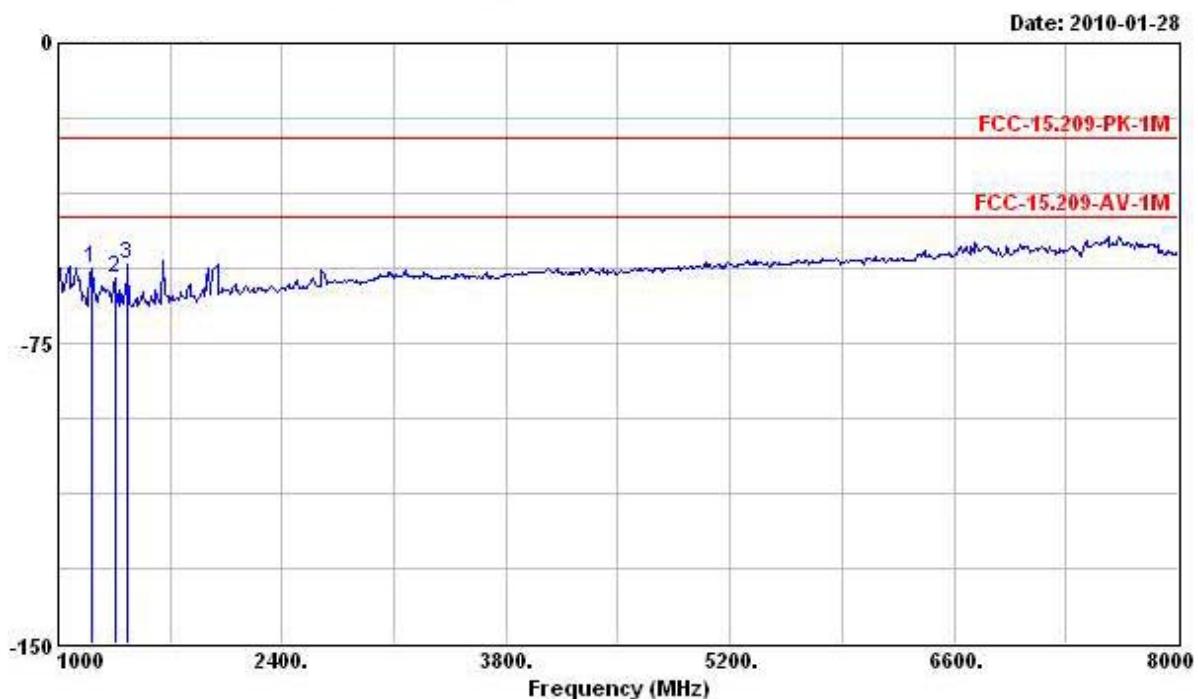


Freq	Level	Over Limit		Read		Antenna Level	Cable Factor	Preamp Factor	Remark
		Line	Limit	Line	Limit				
1	1210.000	-56.14	-32.68	-23.46	-50.76	27.27	1.99	34.64	Peak
2	1357.000	-58.96	-35.50	-23.46	-54.02	27.39	2.15	34.48	Peak
3	1434.000	-55.08	-31.62	-23.46	-50.36	27.46	2.22	34.40	Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Test Distance: 1m

Vertical

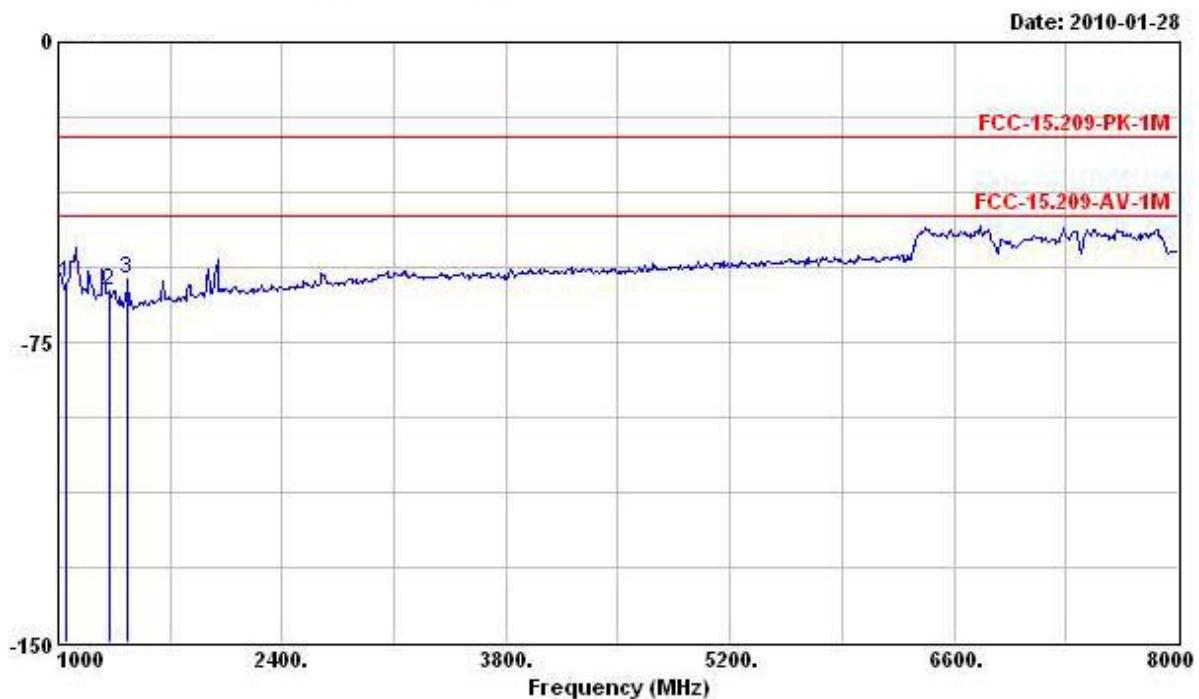


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark
				dBm	dB			
1	1049.000	-60.13	-36.67	-23.46	-54.30	27.14	1.84	34.81 Peak
2	1322.000	-62.24	-38.78	-23.46	-57.20	27.36	2.11	34.51 Peak
3	1434.000	-59.09	-35.63	-23.46	-54.37	27.46	2.22	34.40 Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 1m

Horizontal

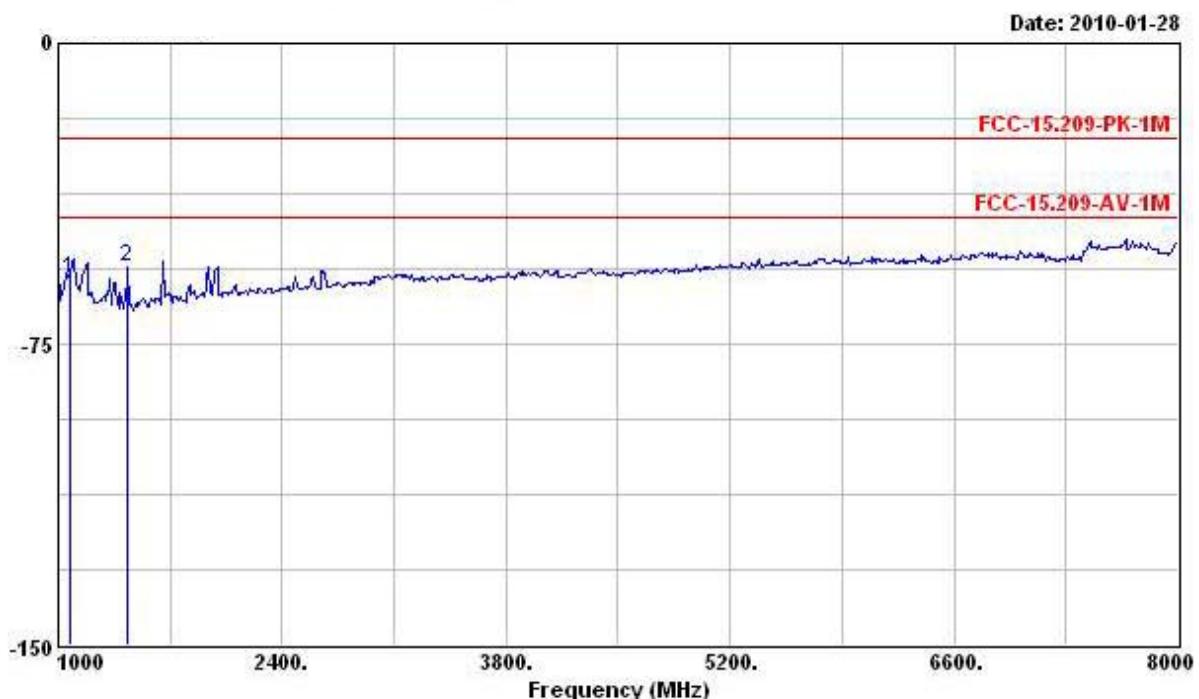


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	dB	dB	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	1070.000	-58.58	-35.12	-23.46	-52.84	27.16	1.88	34.78 Peak
2	1434.000	-55.84	-32.38	-23.46	-51.12	27.46	2.22	34.40 Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Test Distance: 1m

Vertical

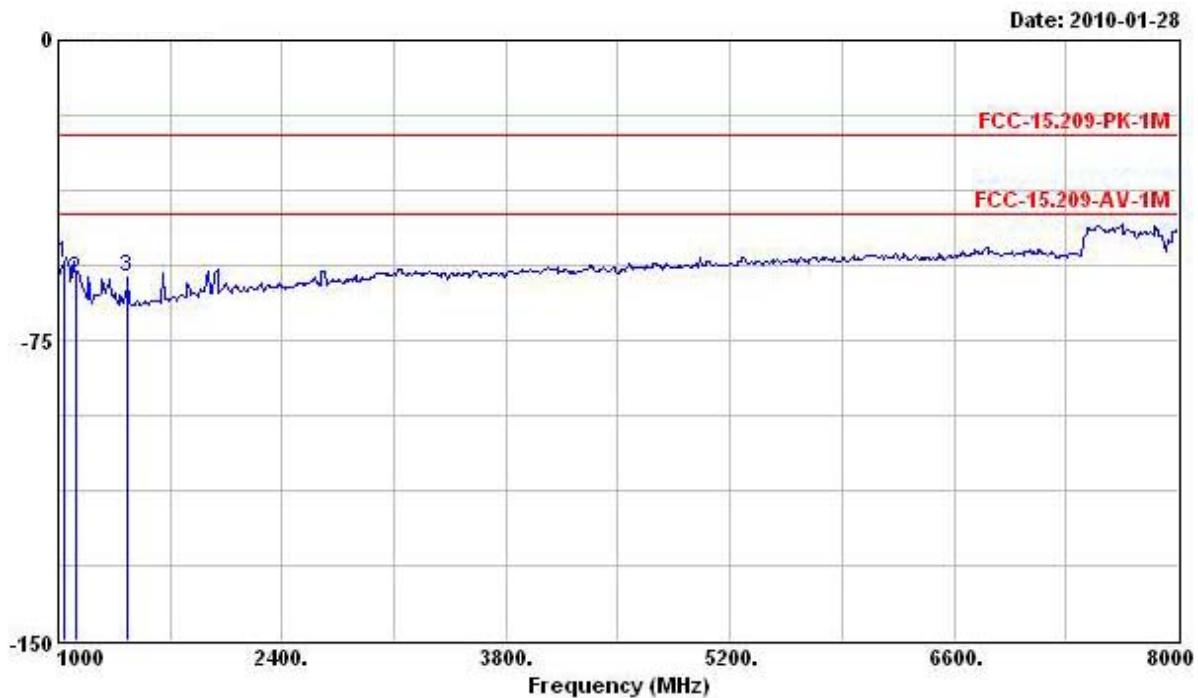


Freq	Level	Over Limit	Limit Line	Read		Antenna Level	Cable Factor	Preamp Factor	Remark
				dBm	dB				
1	0	1042.000	-55.91	-32.45	-23.46	-50.07	27.13	1.84	34.81 Peak
2	0	1105.000	-59.95	-36.49	-23.46	-54.30	27.18	1.92	34.75 Peak
3	0	1434.000	-59.28	-35.82	-23.46	-54.56	27.46	2.22	34.40 Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Conducted Antenna Port Emissions (1GHz~8GHz)

Temperature	28 °C	Humidity	58 %
Test Engineer	Duncan	Configuration	Band_Group 1 (TFC 4)

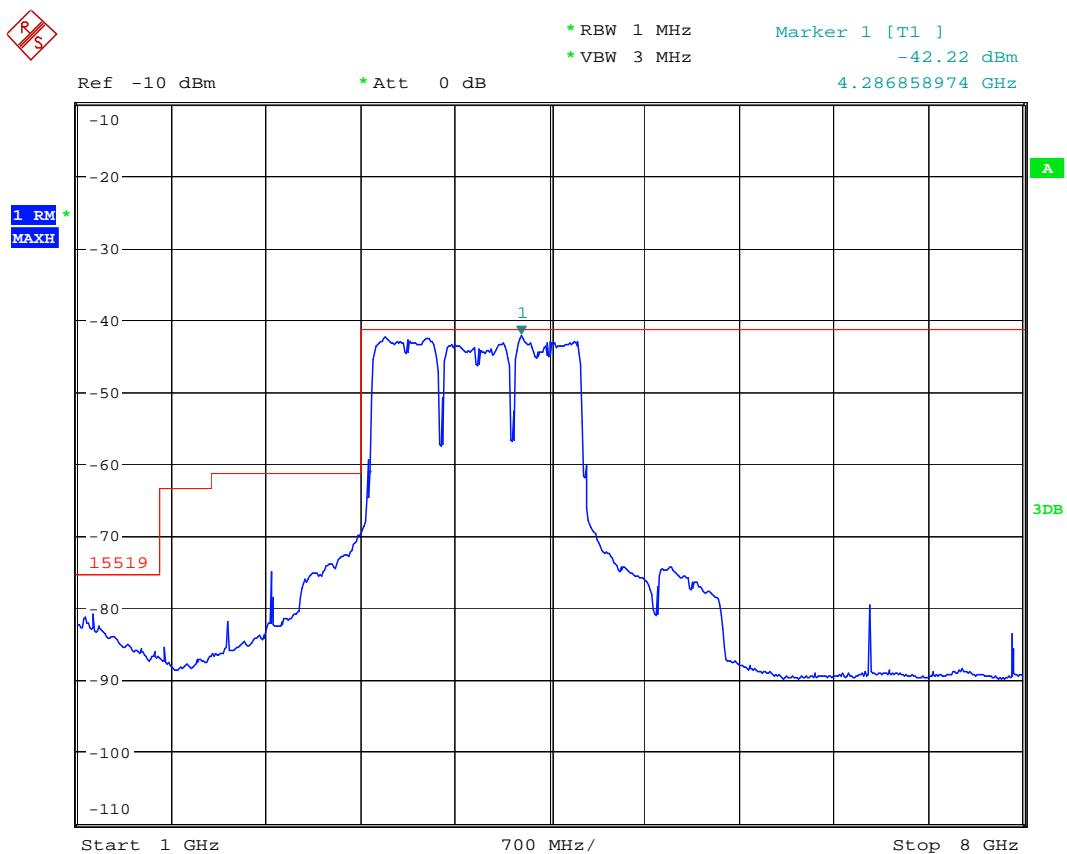


Date: 25.JAN.2010 17:12:49

Note:

Conducted antenna port measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 50-ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	28 °C	Humidity	58 %
Test Engineer	Duncan	Configuration	Band_Group 3 (TFC 4)

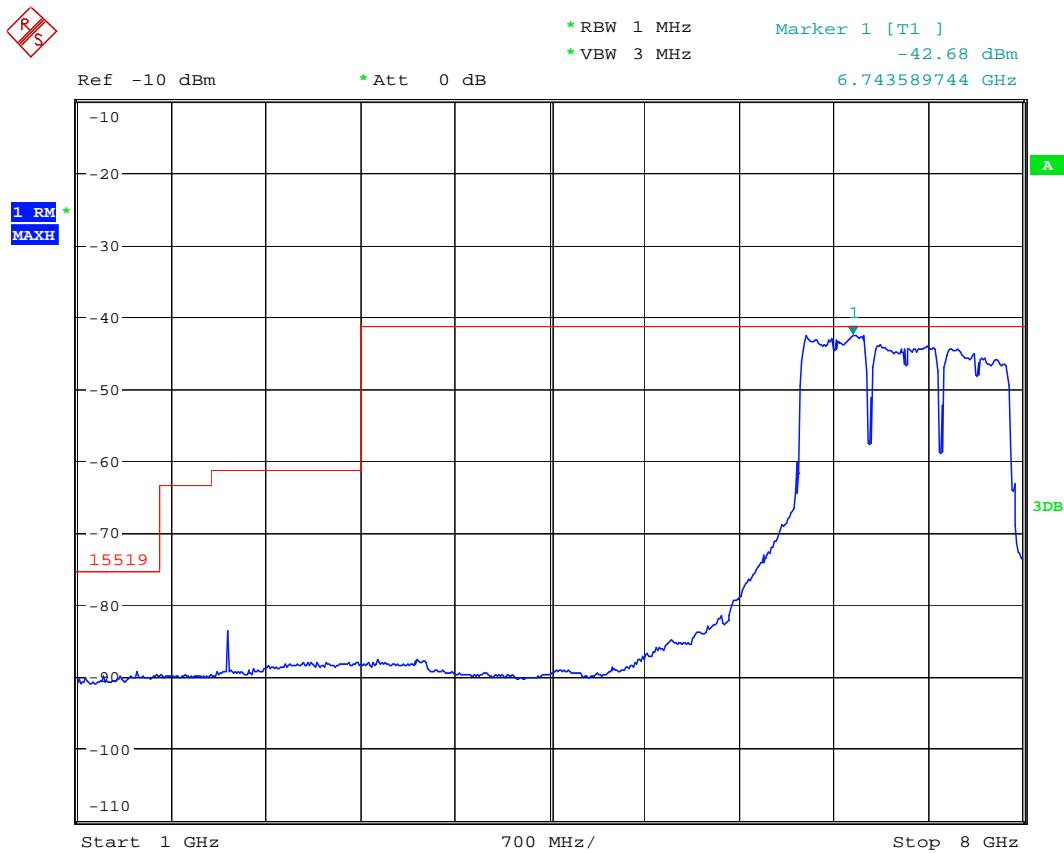


Date: 25.JAN.2010 17:15:02

Note:

Conducted antenna port measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 50-ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	28 °C	Humidity	58 %
Test Engineer	Duncan	Configuration	Band_Group 6 (TFC 4)

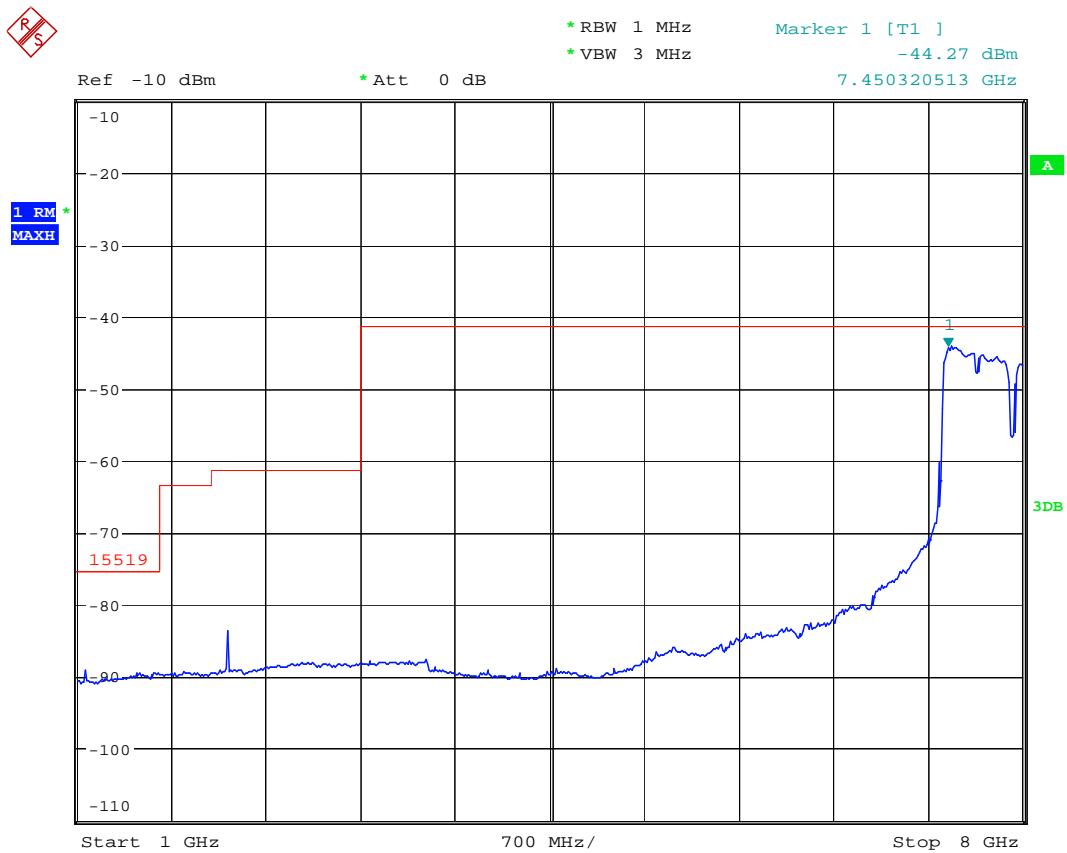


Date: 25.JAN.2010 17:17:15

Note:

Conducted antenna port measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 50-ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (8GHz~12GHz Emissions)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

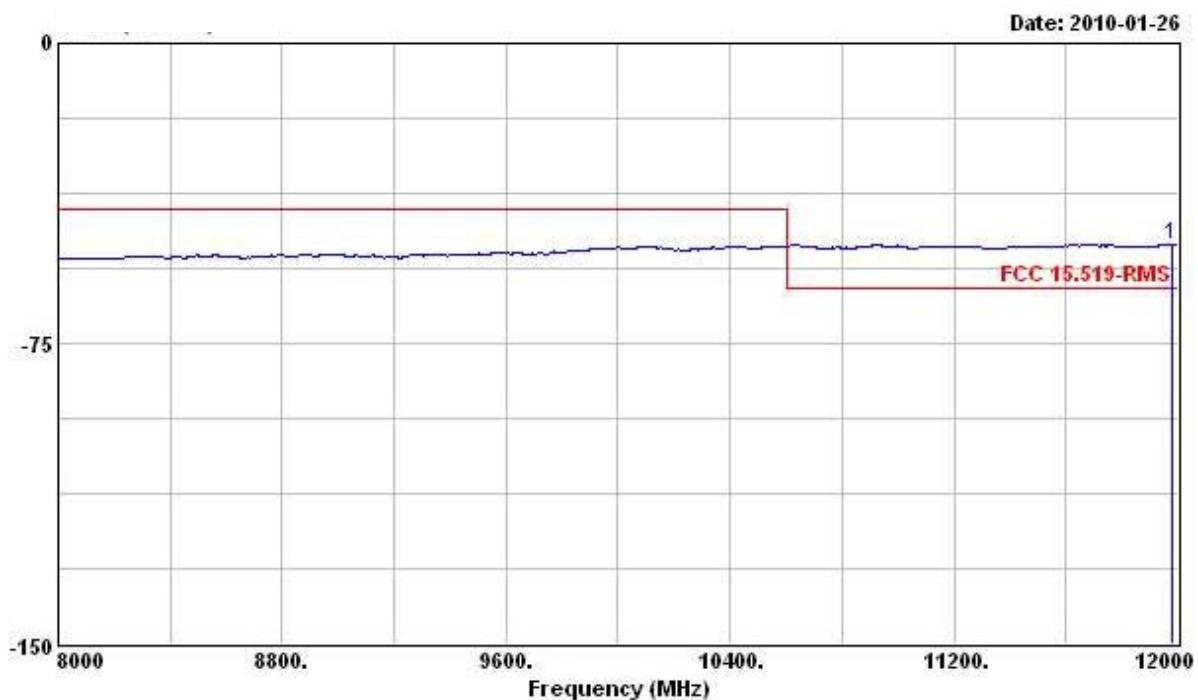
Test Distance: 1m**Horizontal**

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
10119.76000	-50.29			-62.68	39.22	6.65	33.48	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

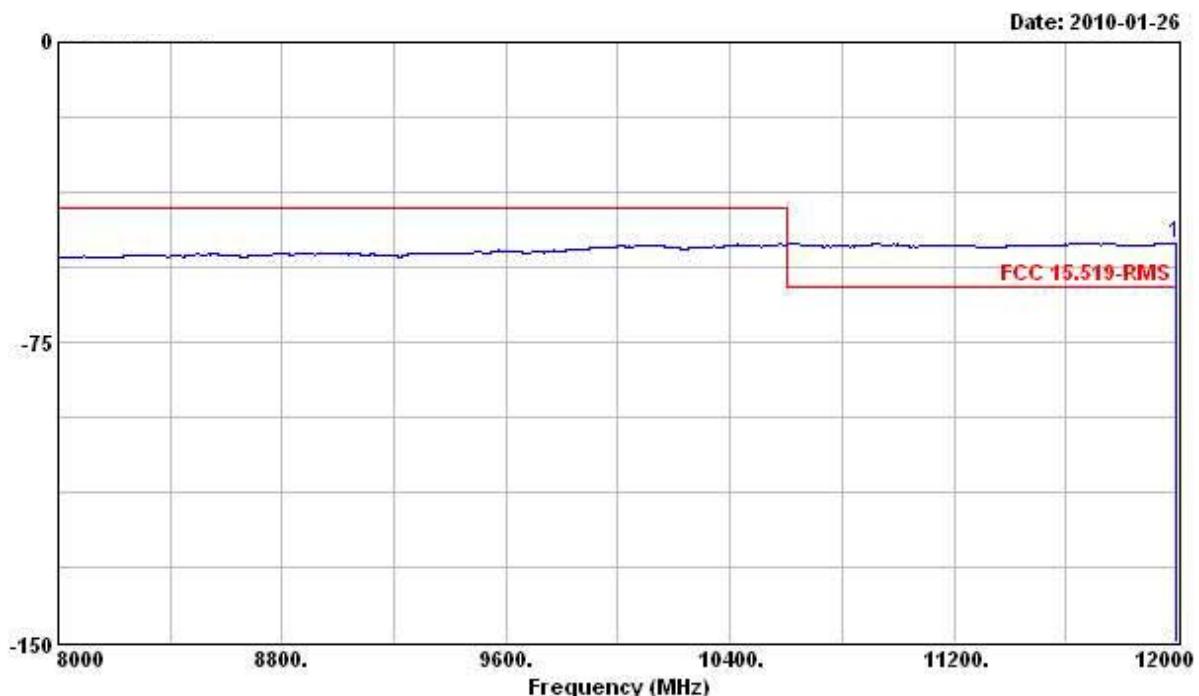


Freq	Level	Over Limit	Read		Antenna Level	Cable Factor	Preamp Factor	Remark
			MHz	dBm	dB	dBm	dB	dB
1	11996.000	-50.30			-62.68	39.20	6.65	33.47

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 1m

Horizontal

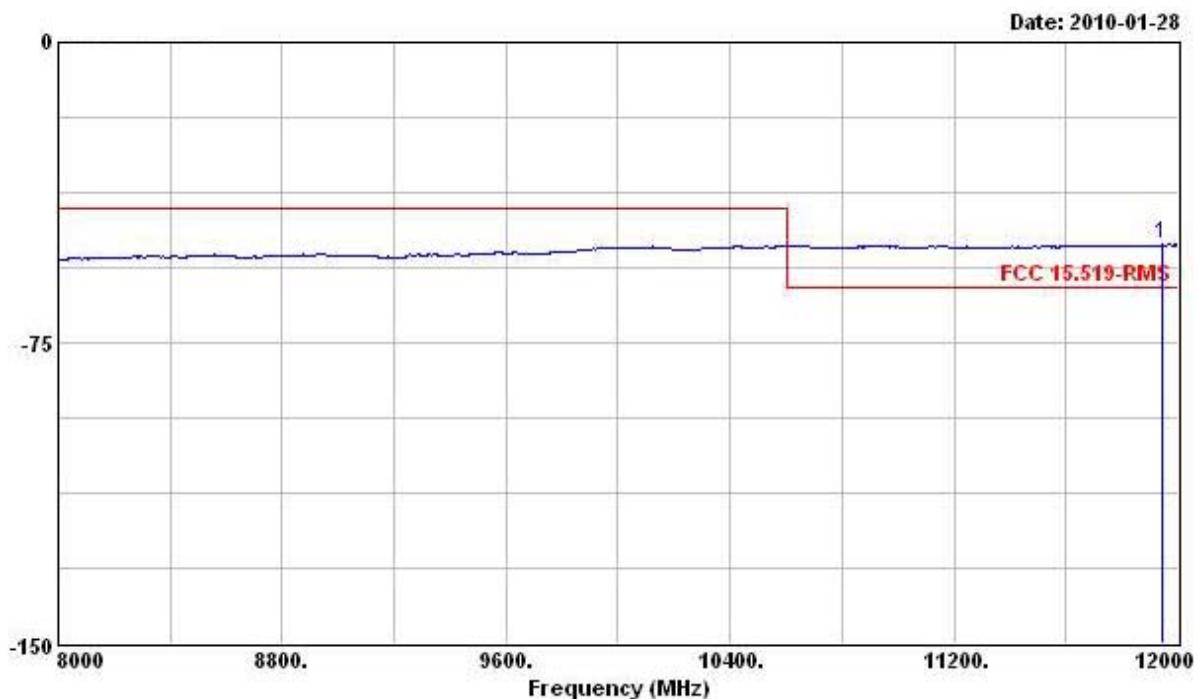


Source: <http://www.fccid.org/FR011911>

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	dB/m	dB	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1 811944.000	-50.53			-62.94	39.25	6.65	33.49	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

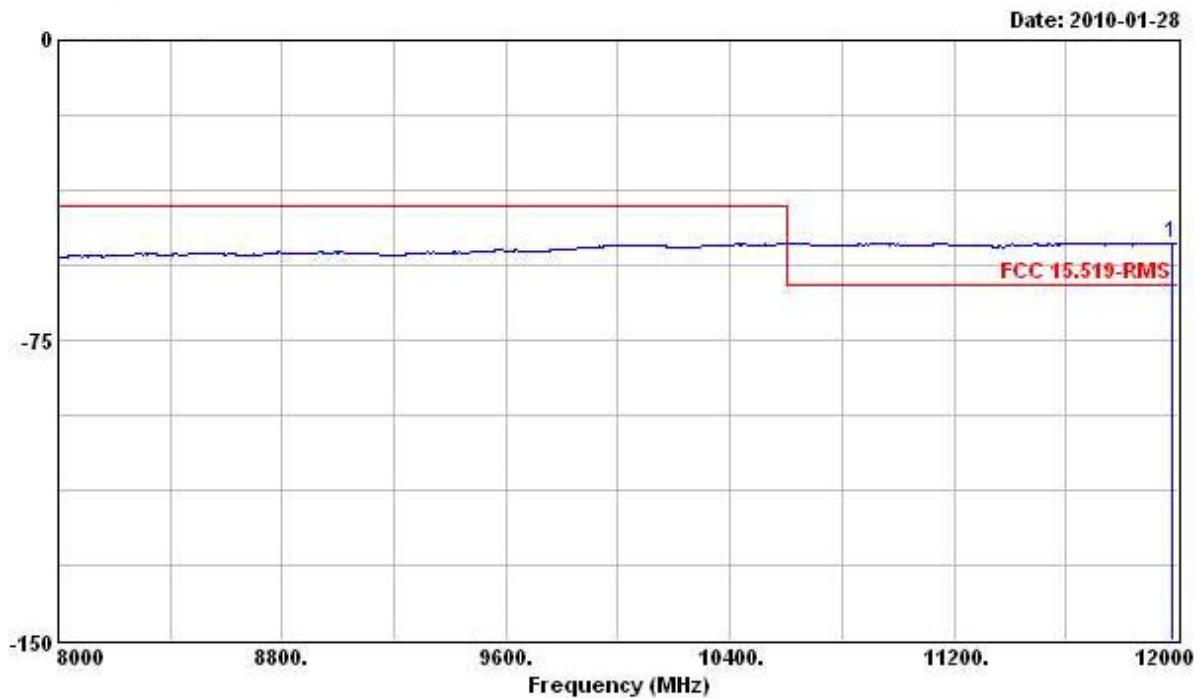


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	dBm	dB/m	
MHz	dBm	dB	dBm					
10.400	-63.06	39.22	6.65	33.48				

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 1m

Horizontal

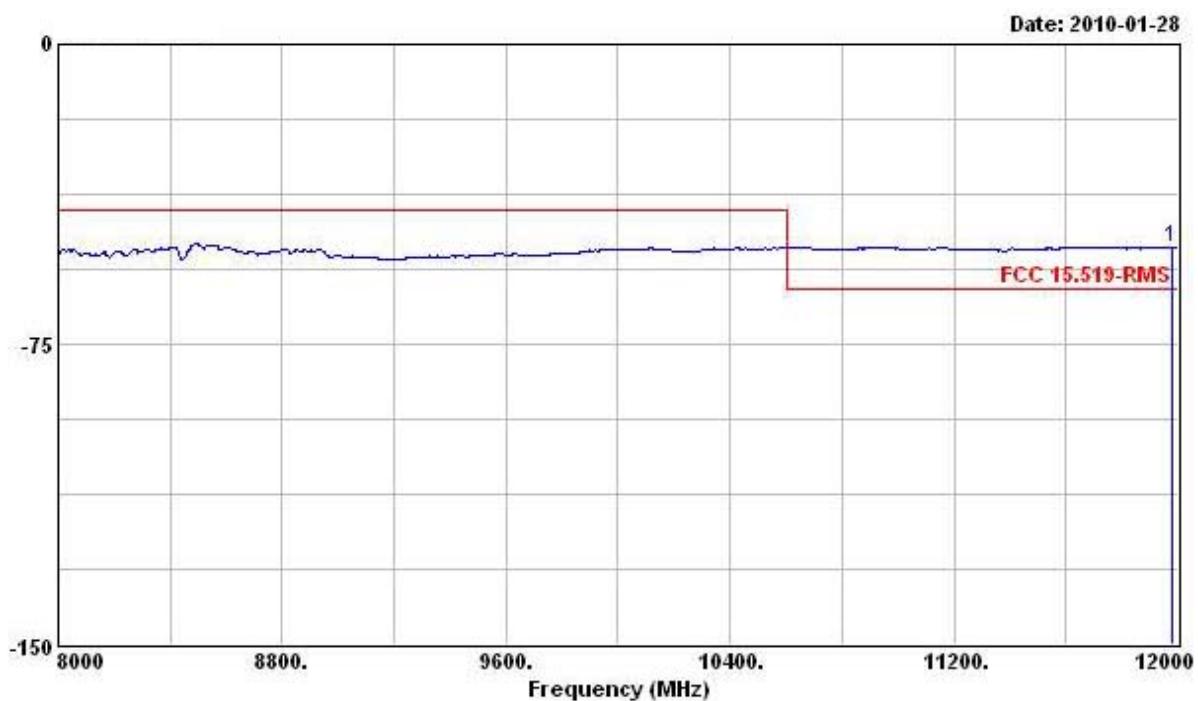


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1 11197.600	-50.64			-63.03	39.22	6.65	33.48	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Test Distance: 1m

Vertical

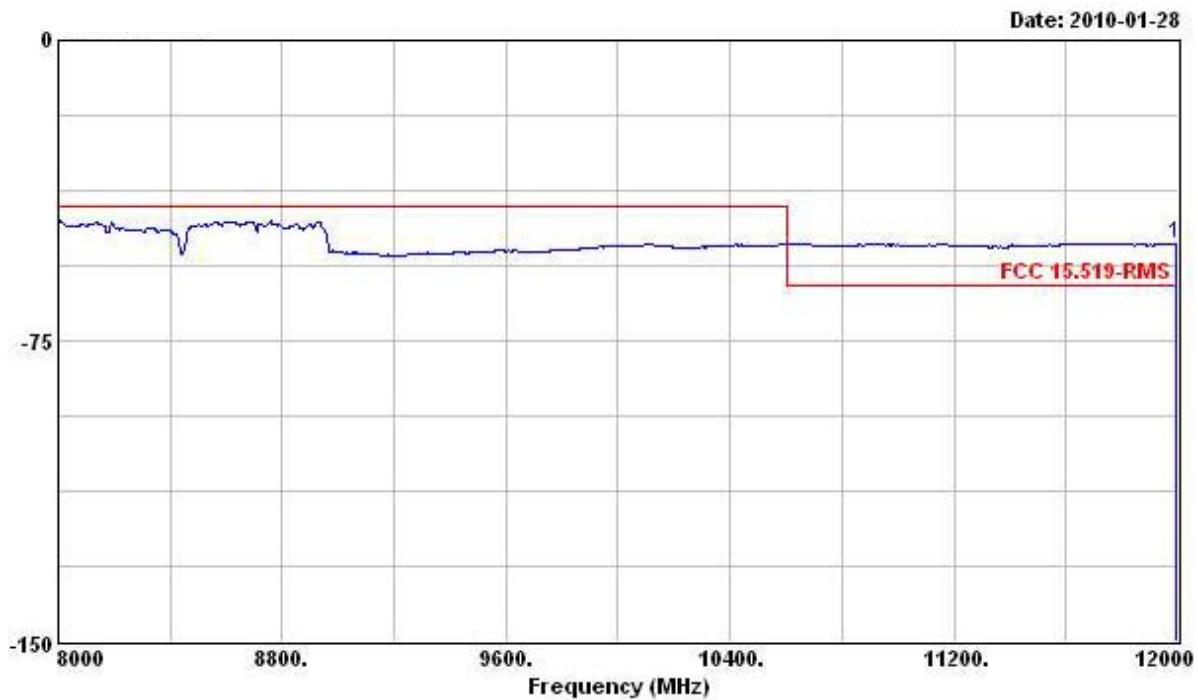


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1 811996.000	-50.64			-63.02	39.20	6.65	33.47	

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions (Mark 1) from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Radiated Emissions with terminated antenna port (8GHz~12GHz)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

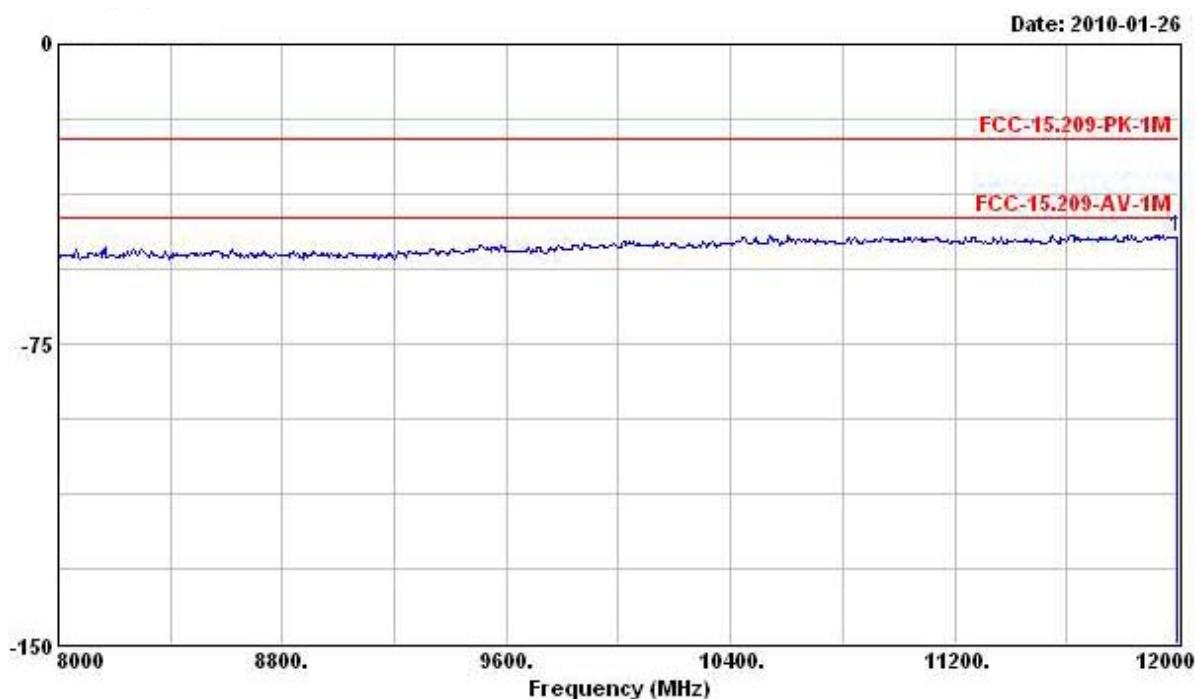
Test Distance: 1m**Horizontal**

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 811996.000	-48.24	-24.78	-23.46	-62.22	40.80	6.65	33.47	Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Test Distance: 1m

Vertical

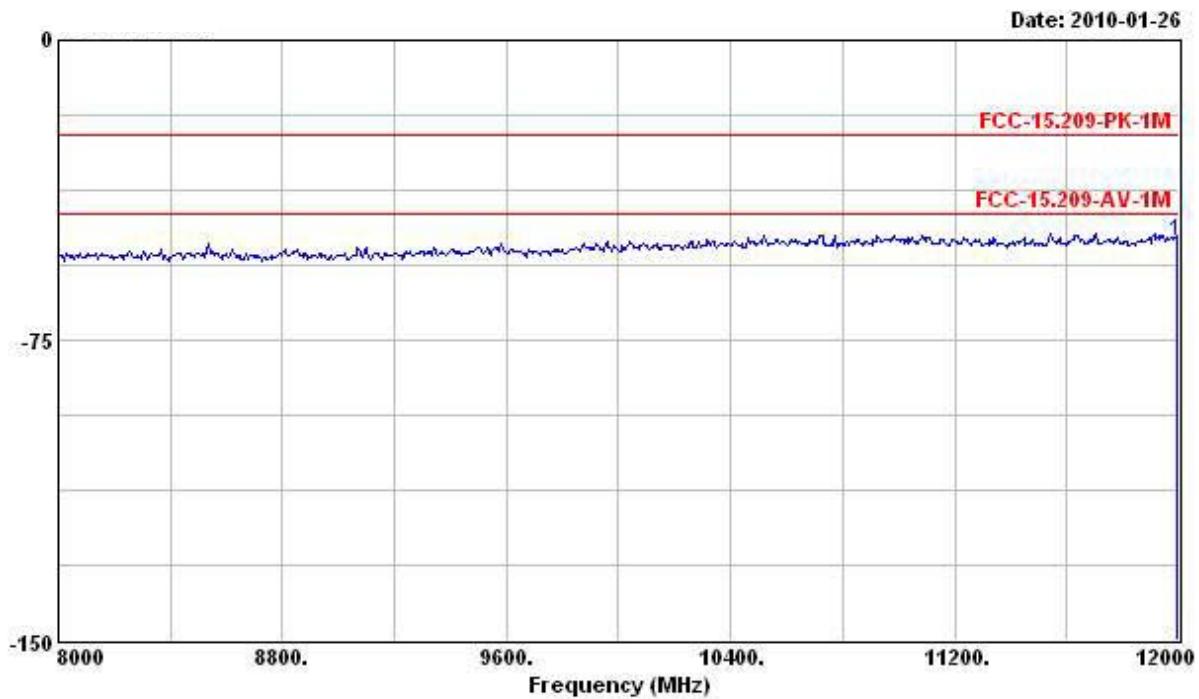


Freq	Level	Over Limit	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark
			Line	Level				
1 11996.000	-50.37	-26.91	-23.46	-64.35	40.80	6.65	33.47	Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 1m

Horizontal

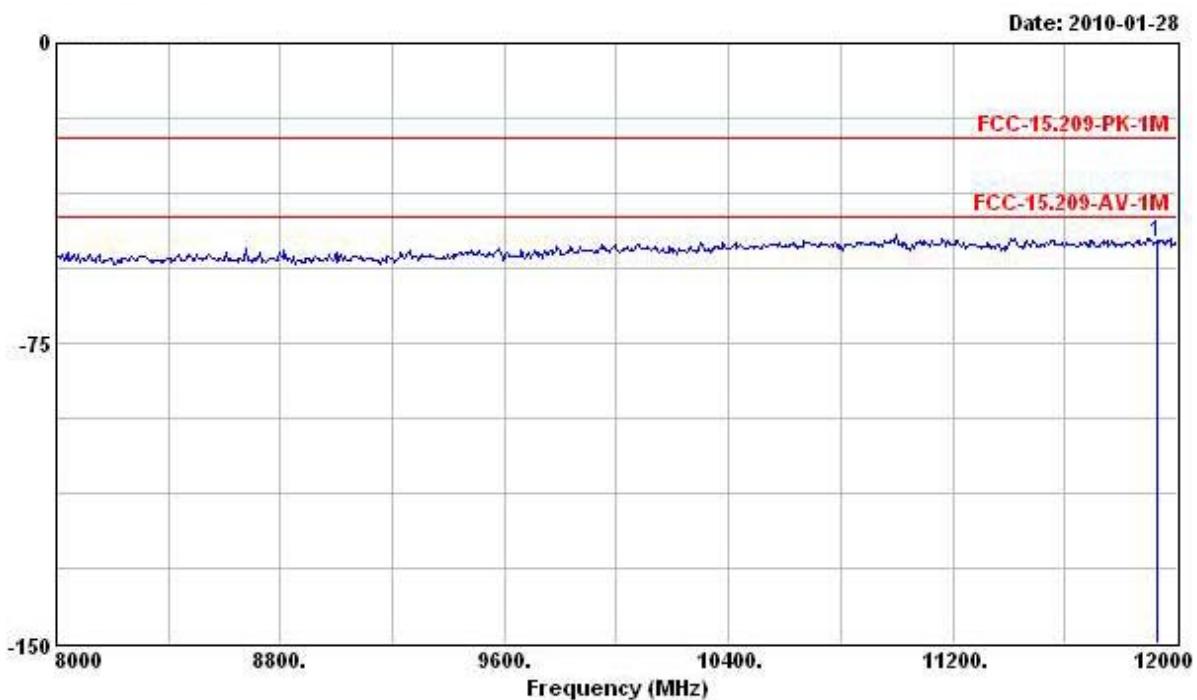


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Line	Limit	Line	Level	Factor	Loss	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 11932.000	-49.99	-26.53	-23.46	-63.92	40.77	6.65	33.49	Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Test Distance: 1m

Vertical

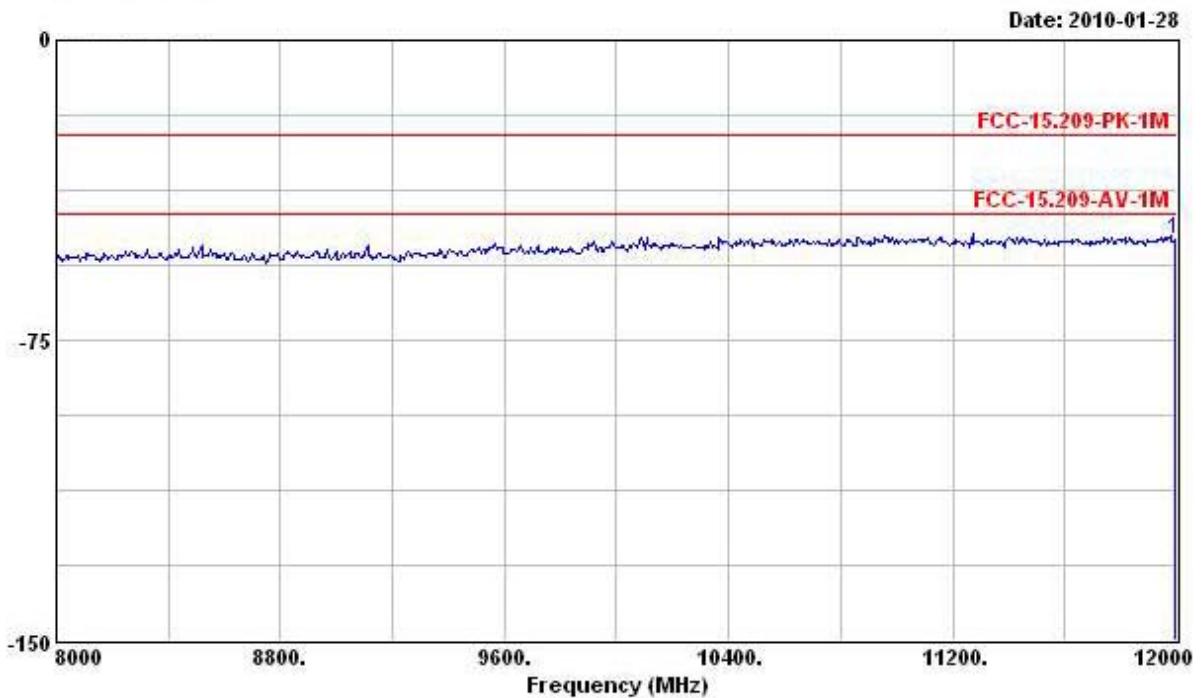


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 11996.000	-49.79	-26.33	-23.46	-63.77	40.80	6.65	33.47	Peak

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 1m

Horizontal

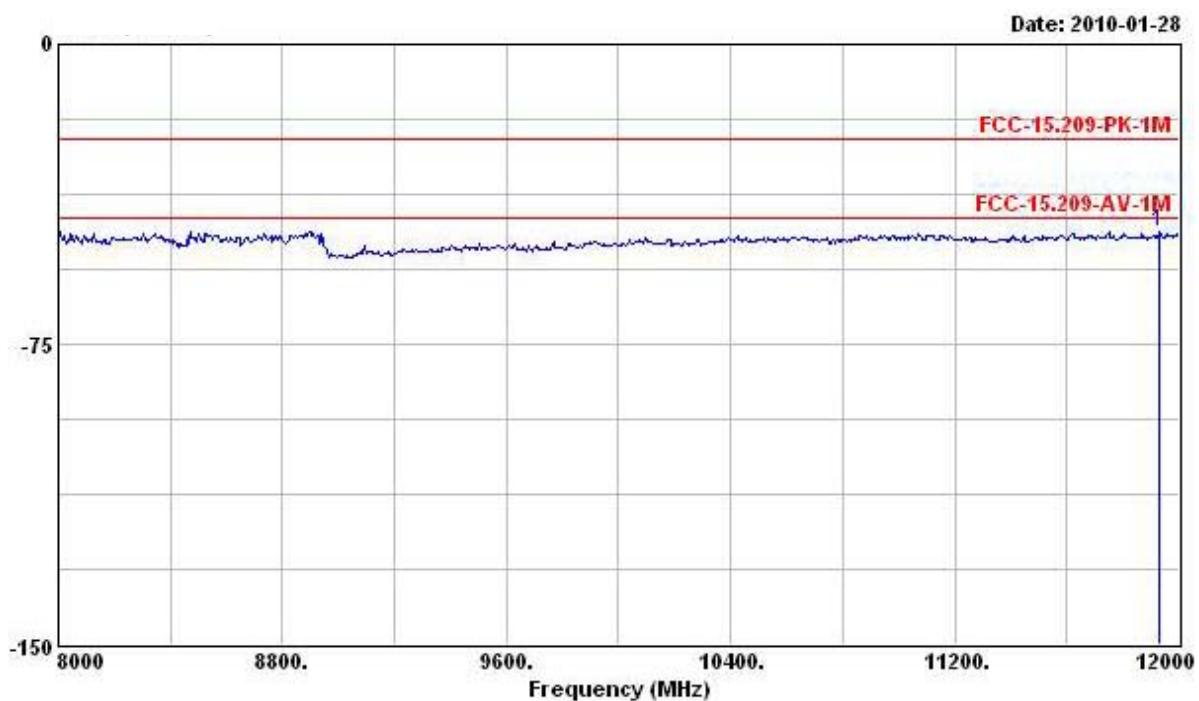


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 811932.000	-46.73	-23.27	-23.46	-60.66	40.77	6.65	33.49	

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Test Distance: 1m

Vertical

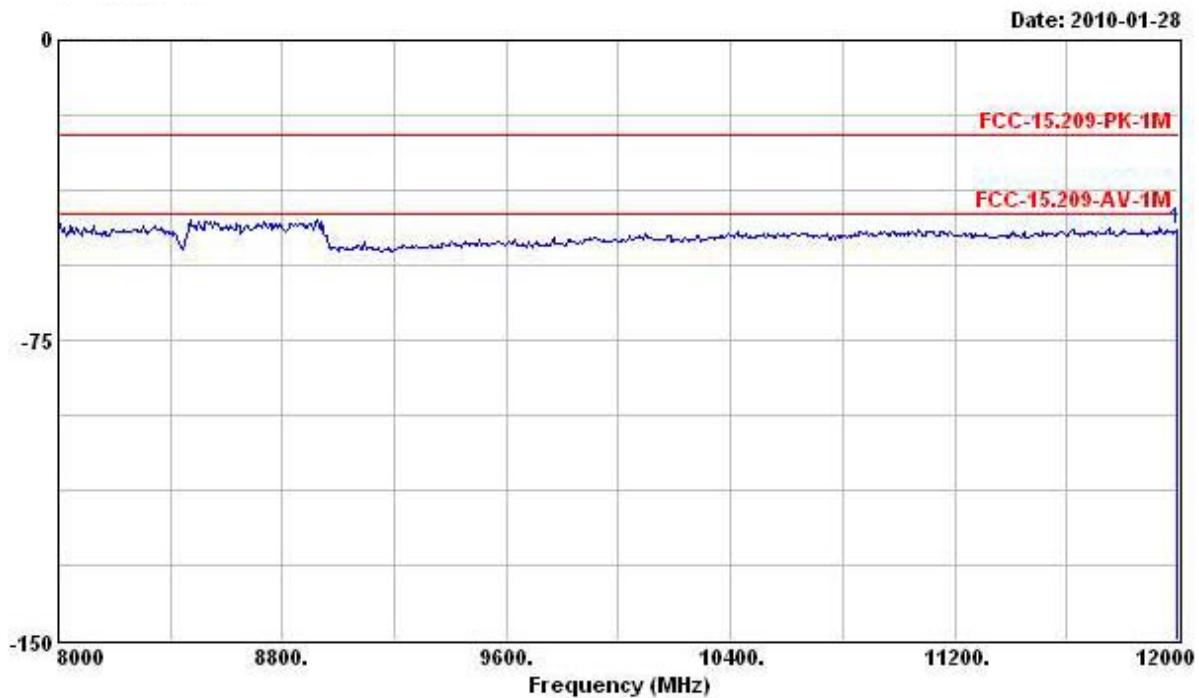


Freq	Level	Over Limit	Limit Line	Read		Antenna Level	Cable Factor	Preamp Loss Factor	Remark
				dBuV/m	dB				
1 811996.000	-47.38	-23.92	-23.46	-61.36	40.80	6.65	33.47	Peak	

Note: Digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, and Subpart C, §15.209.

Conducted Antenna Port Emissions (8GHz~12GHz)


Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

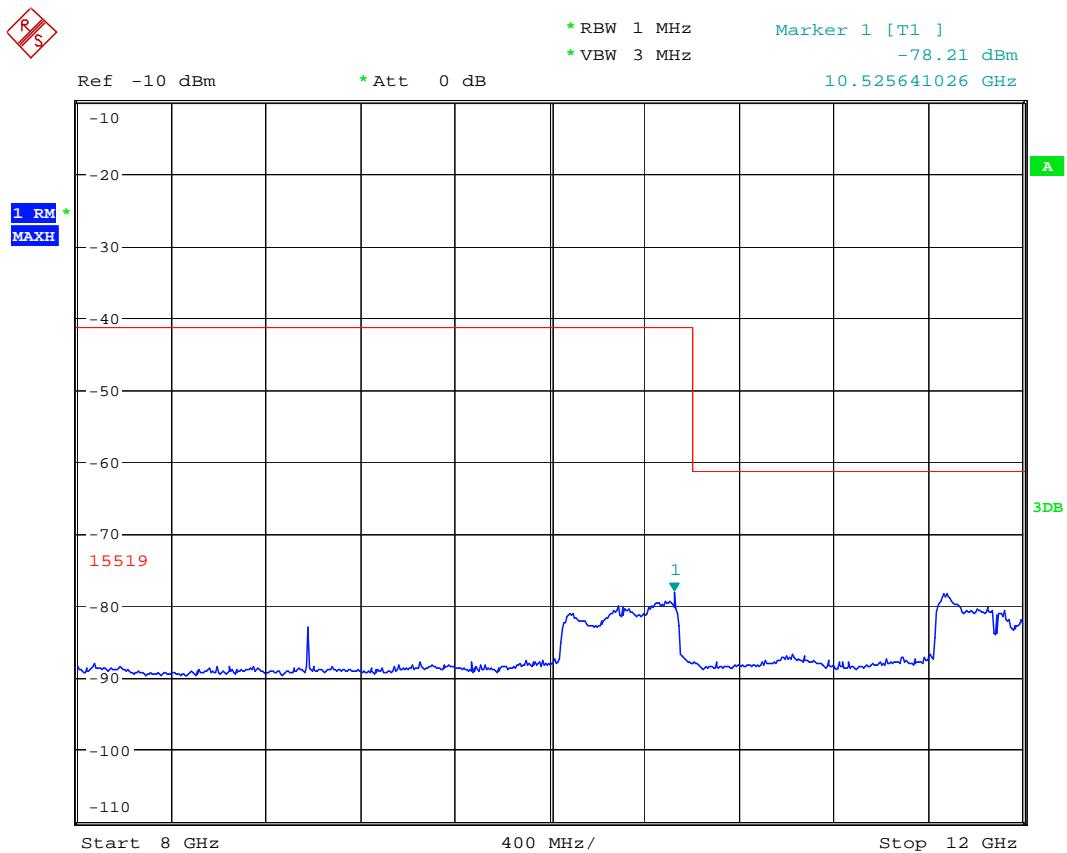

Date: 12.FEB.2010 10:21:27

Note: Conducted antenna port measurements made with 1MHz RBW/3MHz VBW (RMS detector) at 50-ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.


Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

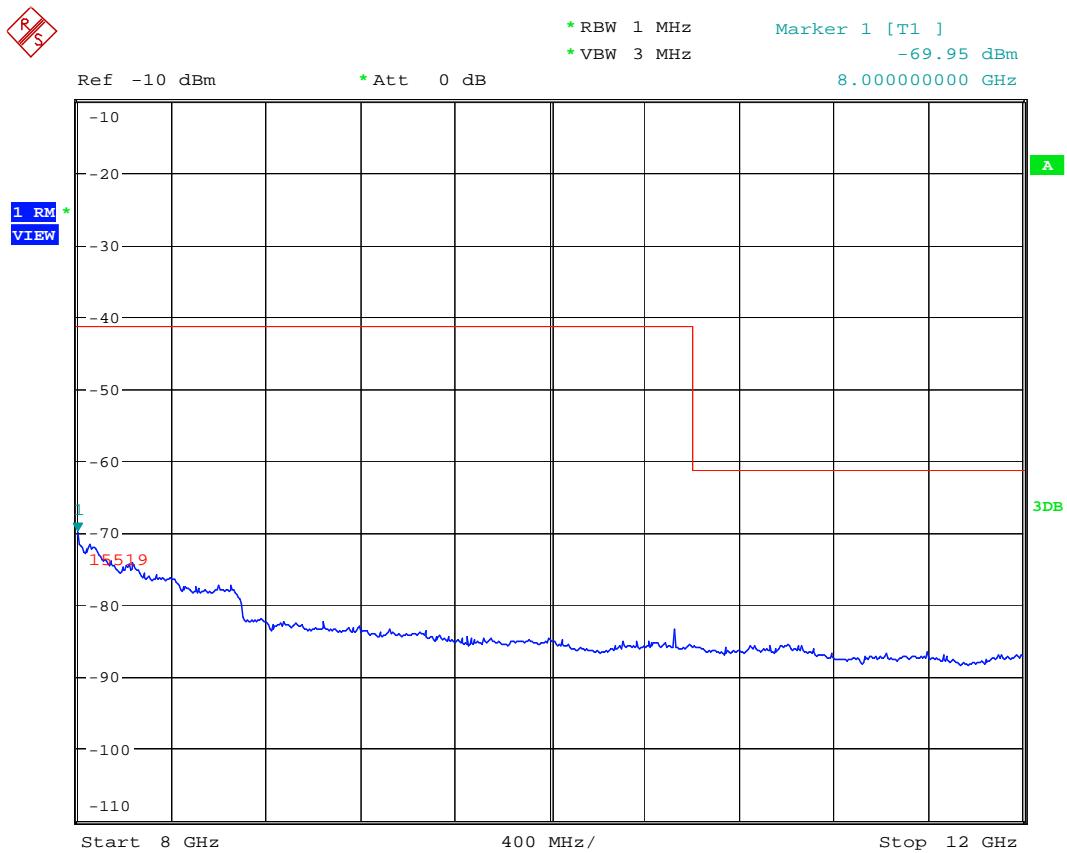

Date: 12.FEB.2010 10:23:26

Note: Conducted antenna port measurements made with 1MHz RBW/3MHz VBW (RMS detector) at 50-ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

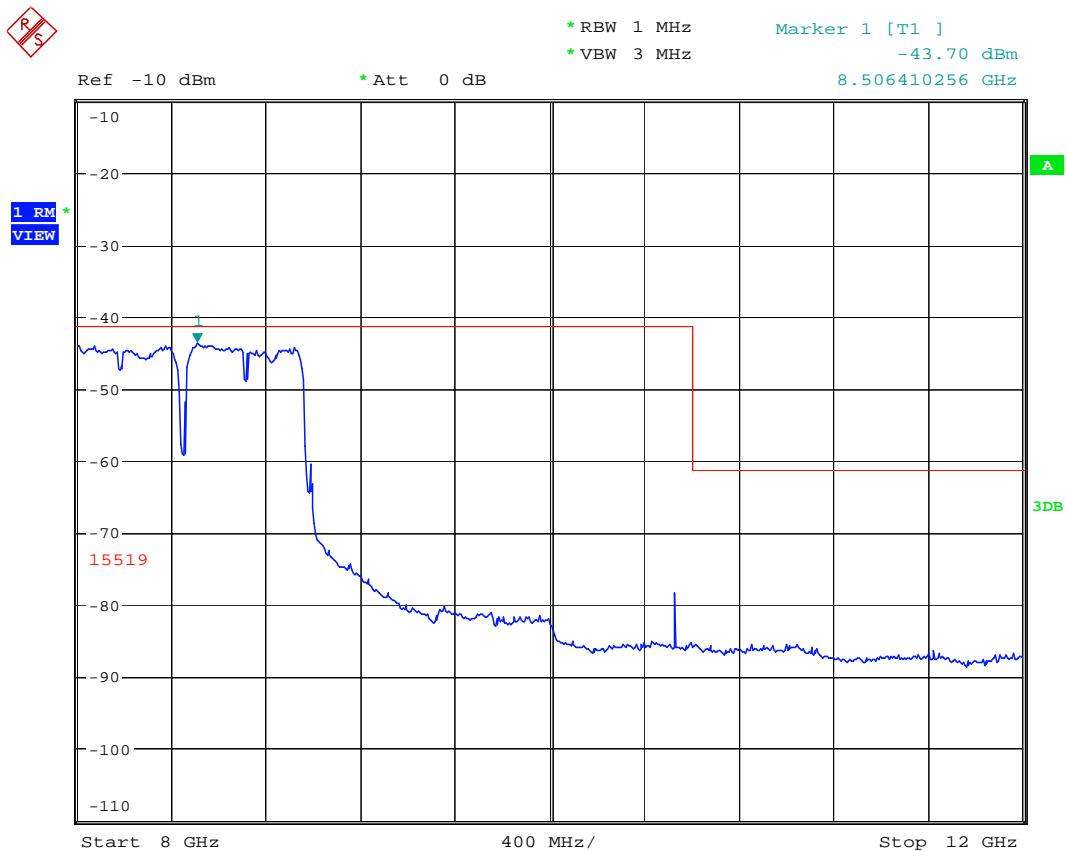


Date: 12.FEB.2010 10:25:59

Note: Conducted antenna port measurements made with 1MHz RBW/3MHz VBW (RMS detector) at 50-ohm impedance. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (12GHz~15GHz Emissions)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

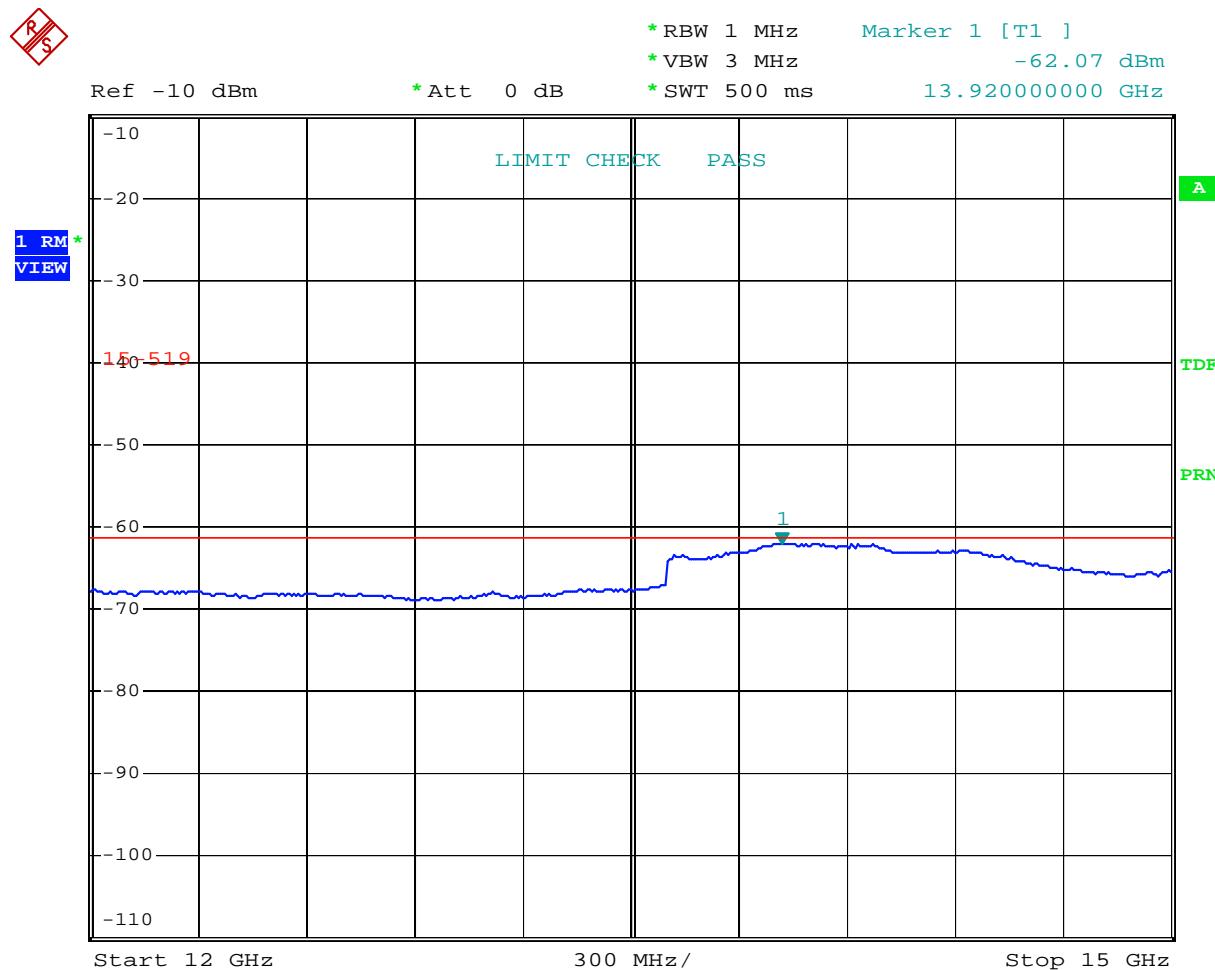
Test Distance: 1m**Horizontal**

Date: 26.JAN.2010 22:10:33

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

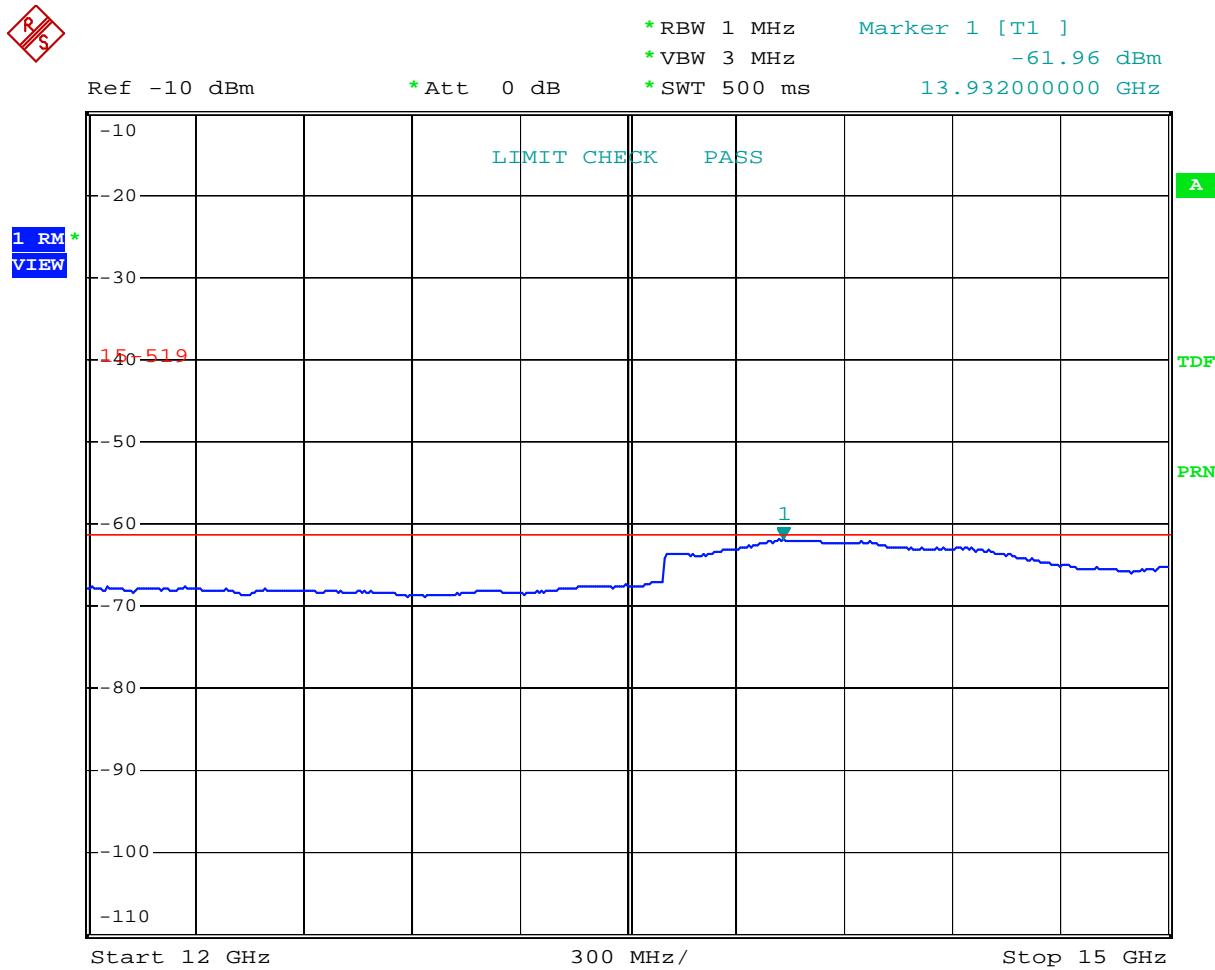


Date: 26.JAN.2010 22:09:35

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)


Test Distance: 1m

Horizontal

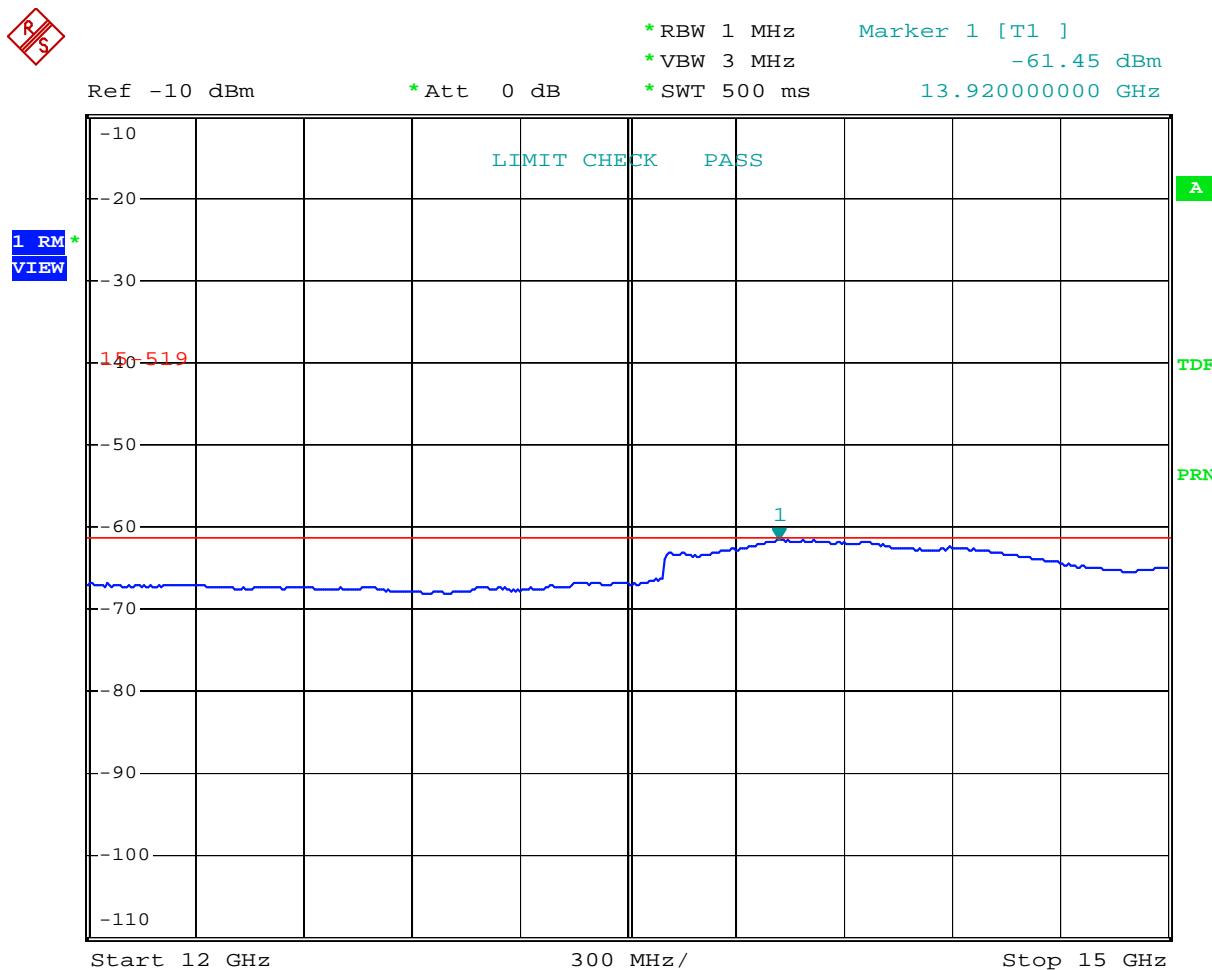

Date: 28.JAN.2010 19:54:47

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

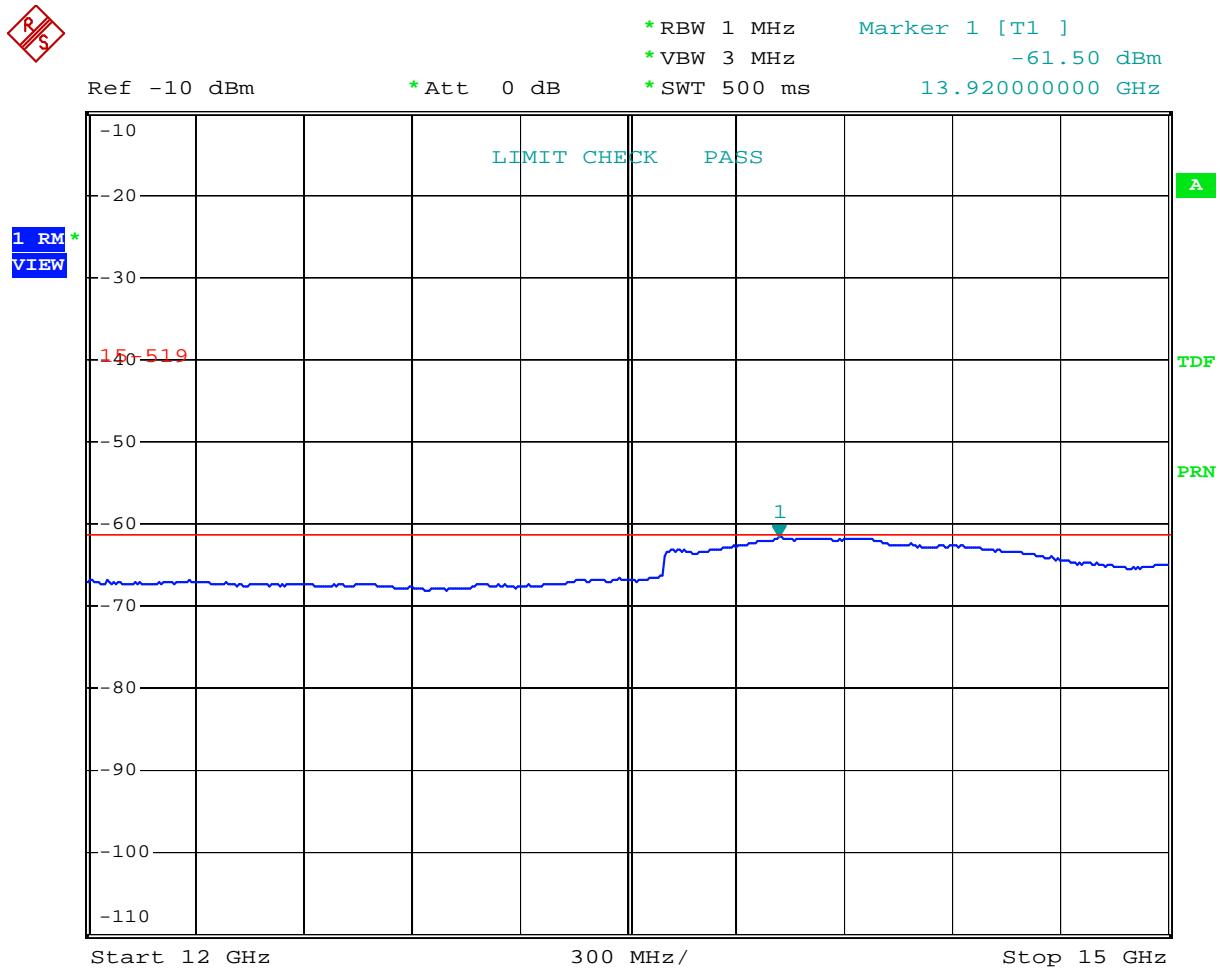Test Distance: 1m**Vertical**


Date: 28.JAN.2010 19:53:00

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)


Test Distance: 1m

Horizontal

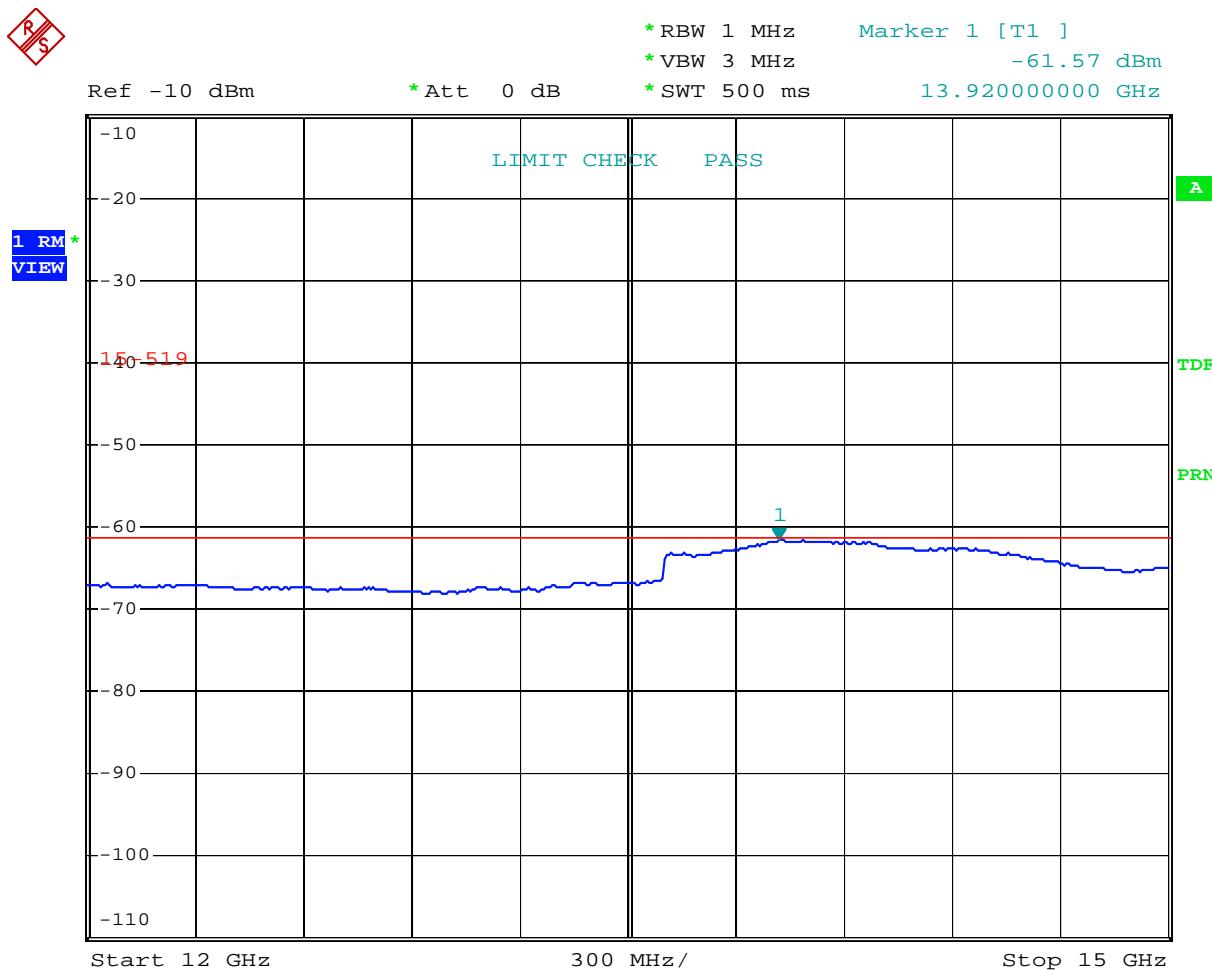

Date: 28.JAN.2010 20:00:06

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

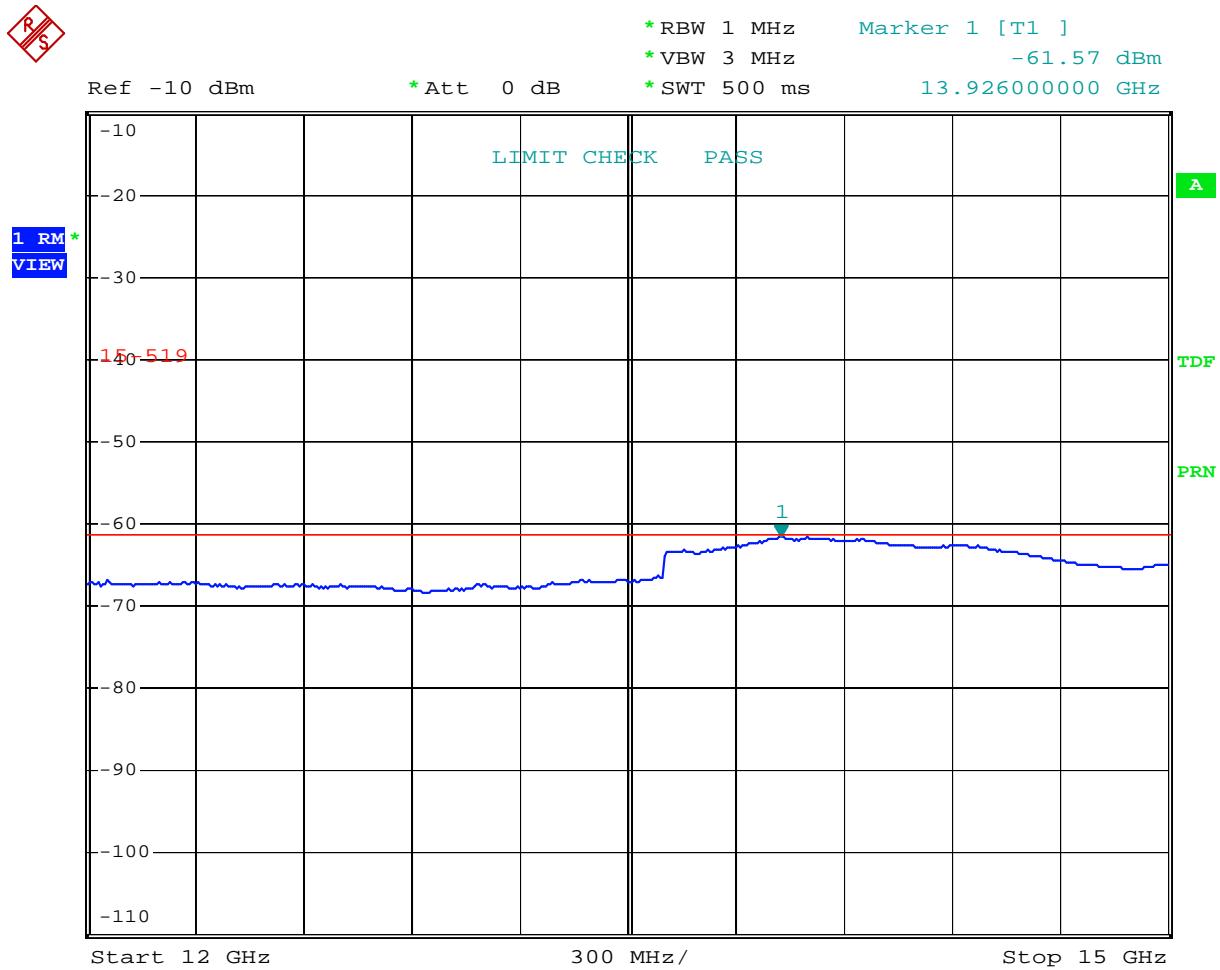
Test Distance: 1m**Vertical**

Date: 28.JAN.2010 20:01:19

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (15GHz~18GHz Emissions)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

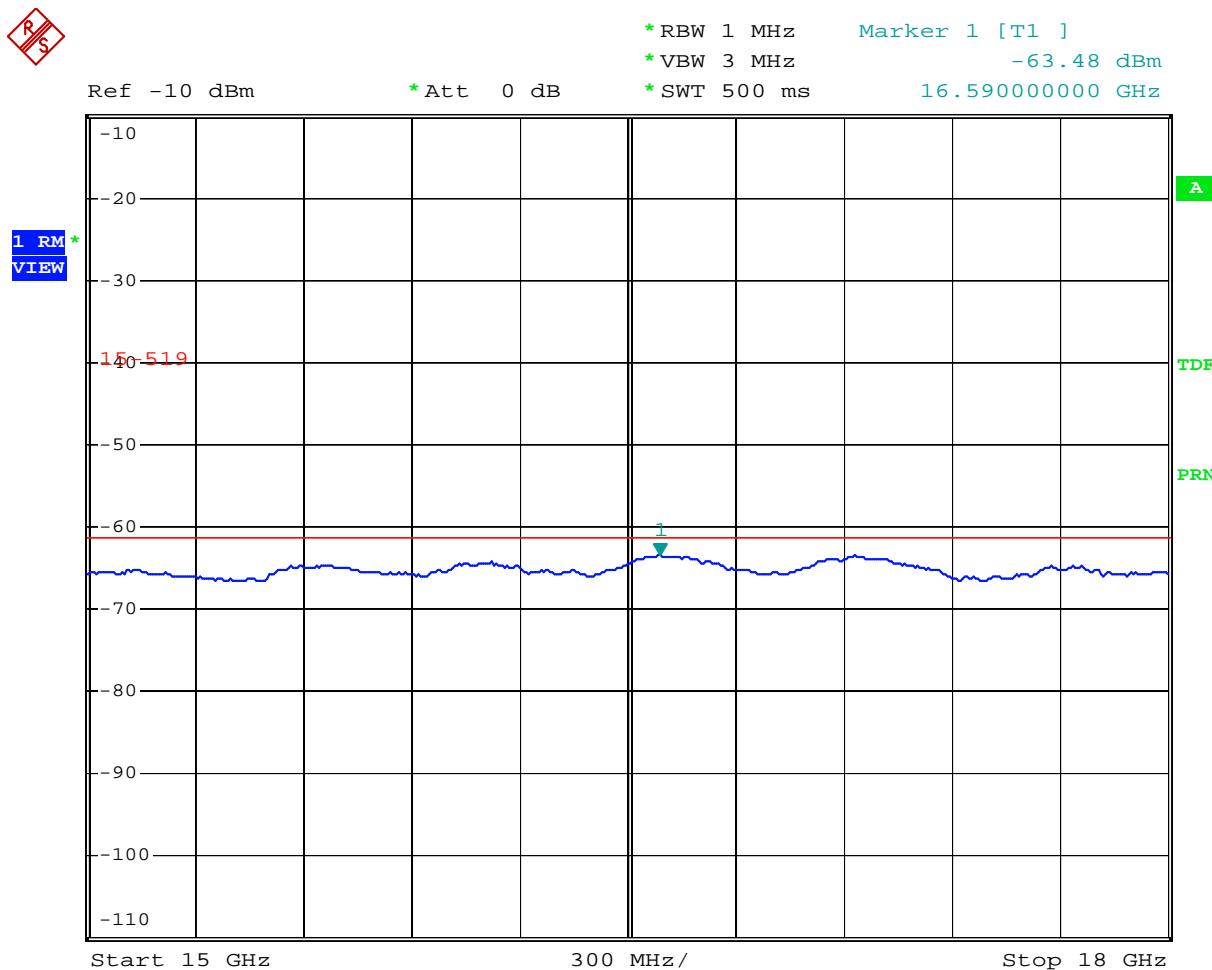
Test Distance: 1m**Horizontal**

Date: 26.JAN.2010 22:18:46

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

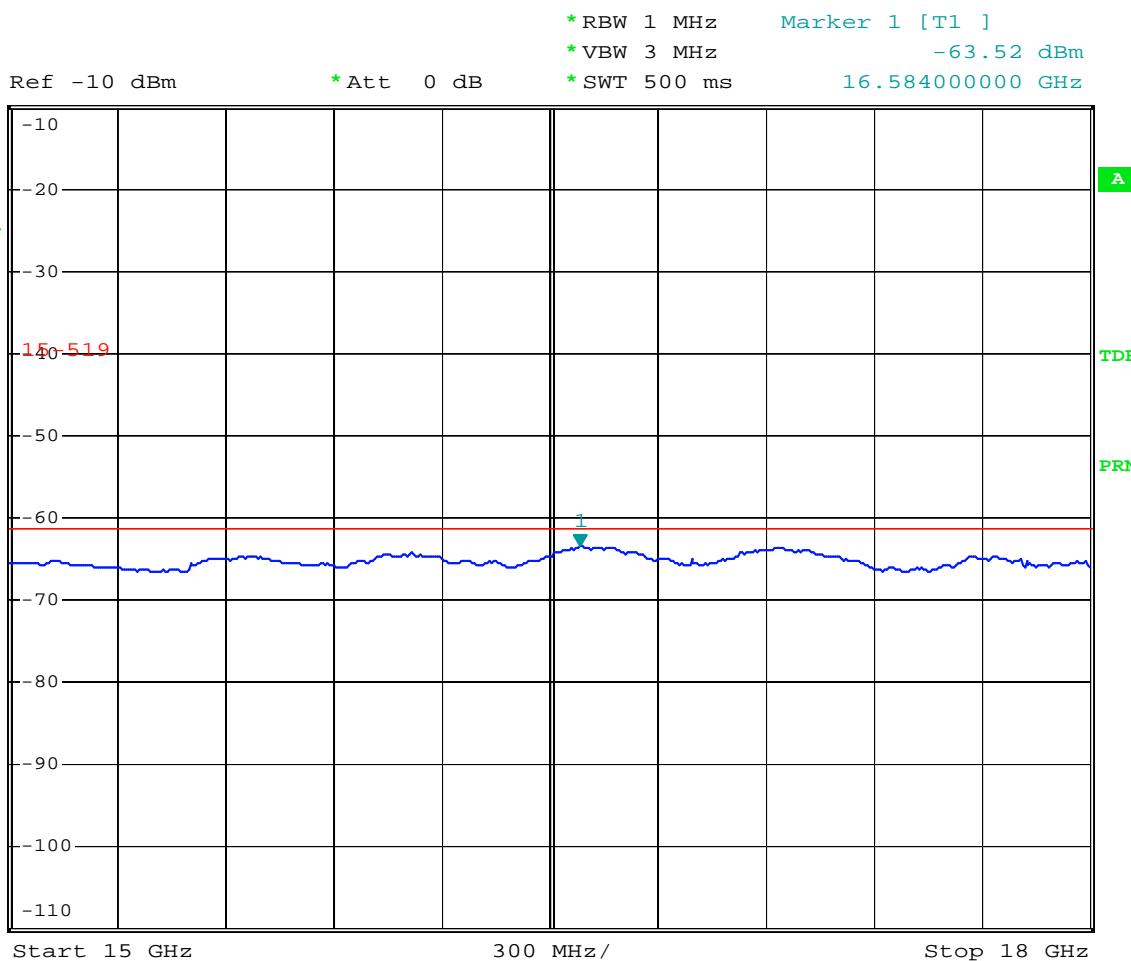


Date: 26.JAN.2010 22:18:14

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 1m

Horizontal

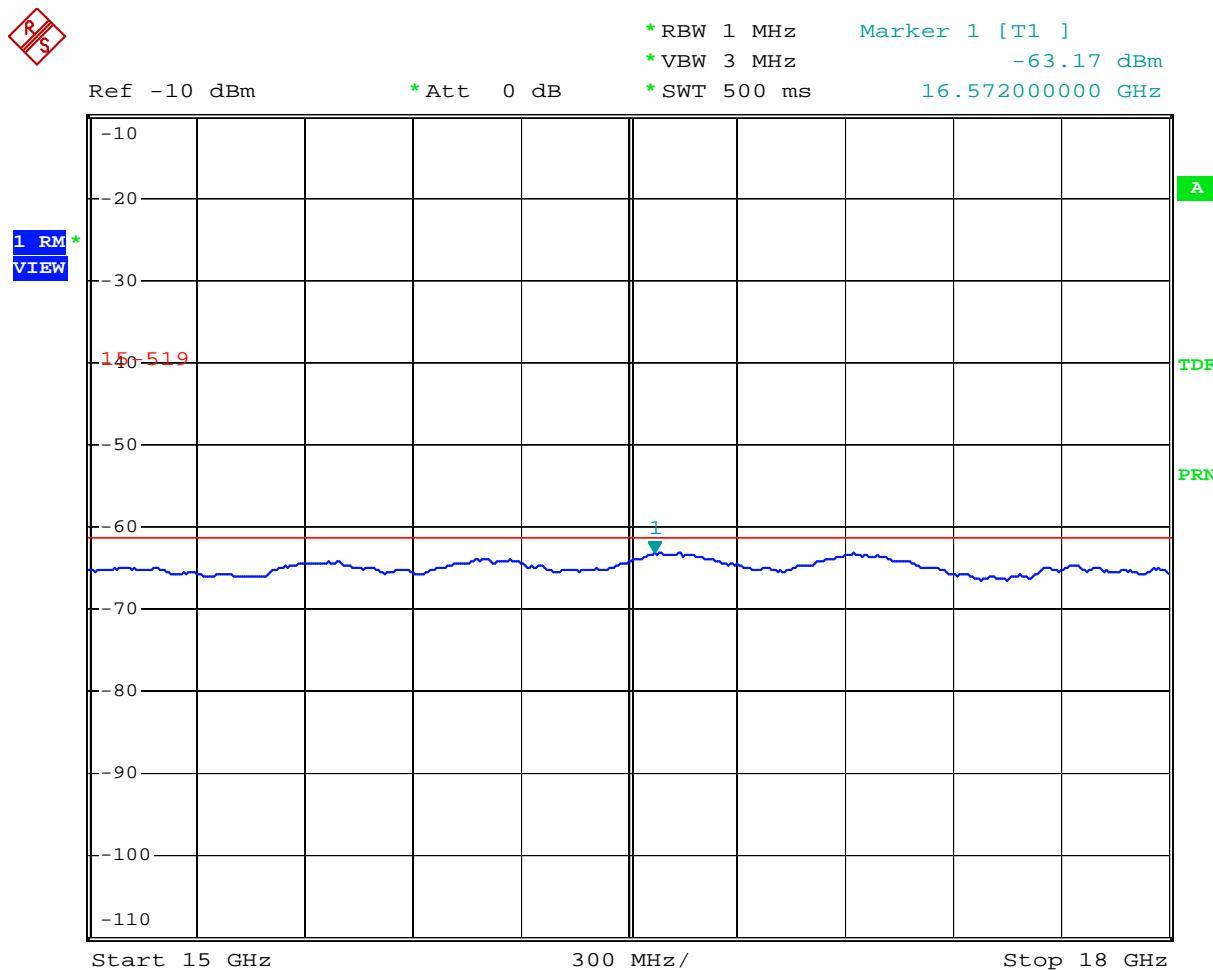


Date: 28.JAN.2010 20:13:05

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

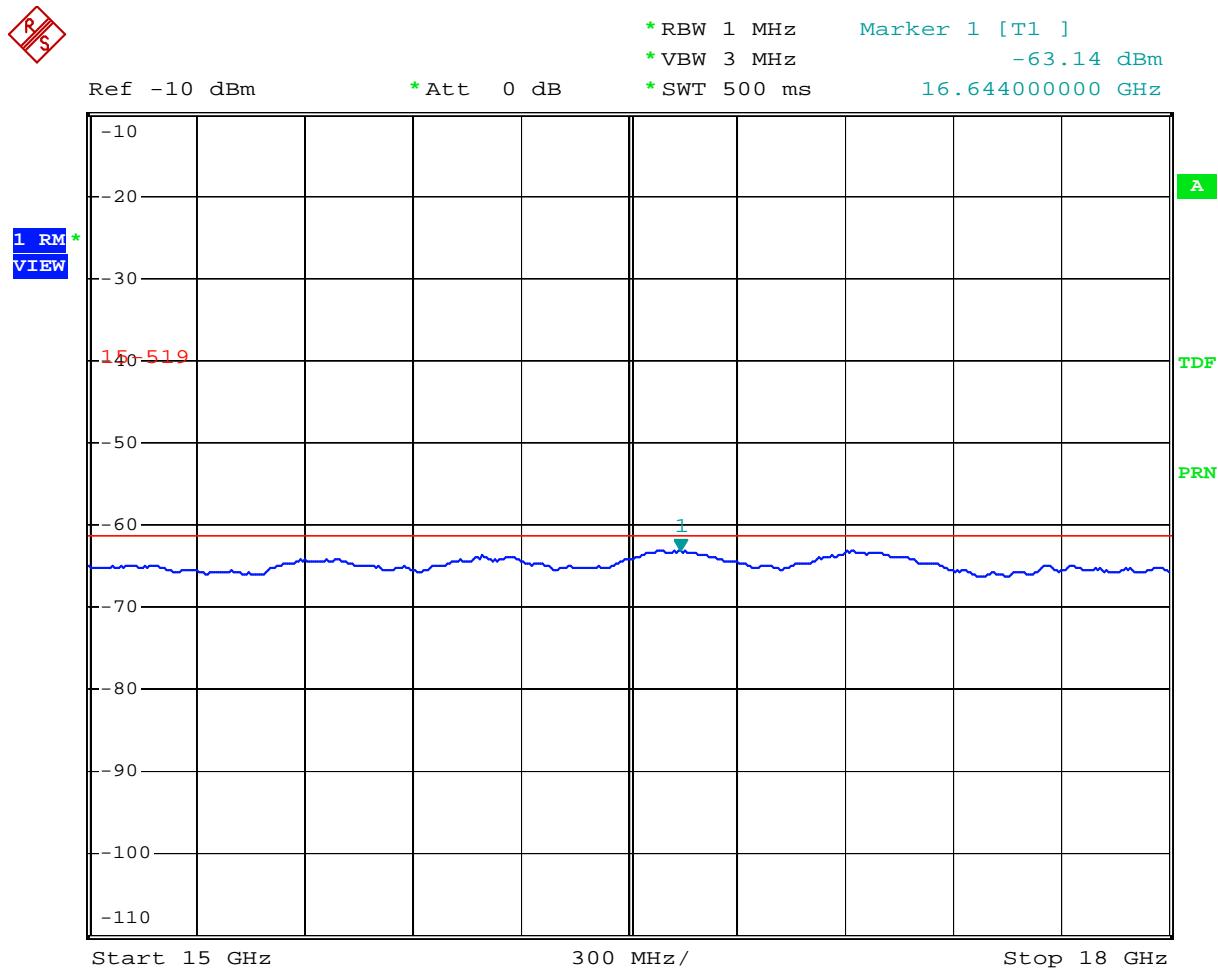


Date: 28.JAN.2010 20:11:50

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 1m

Horizontal

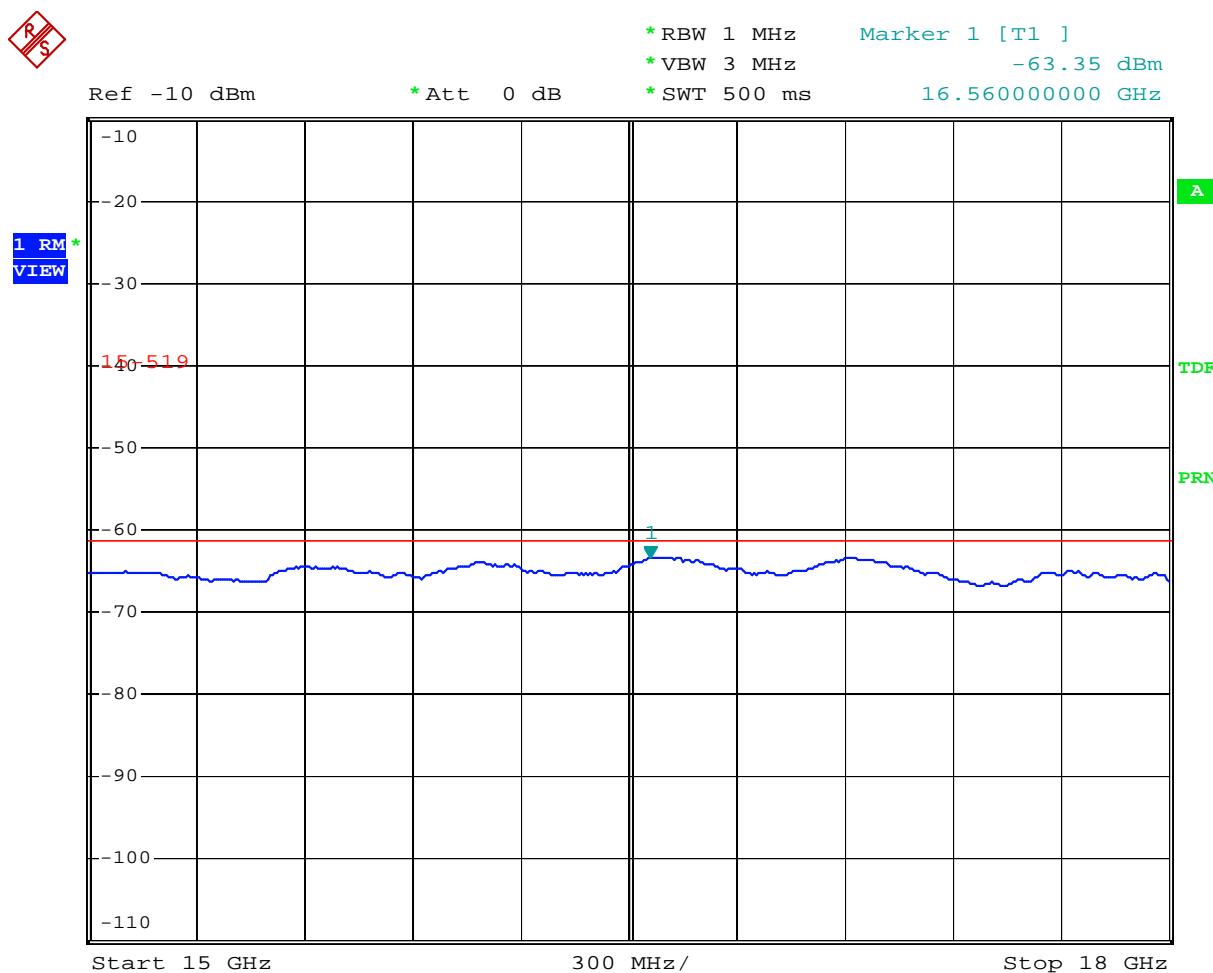


Date: 28.JAN.2010 20:21:58

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

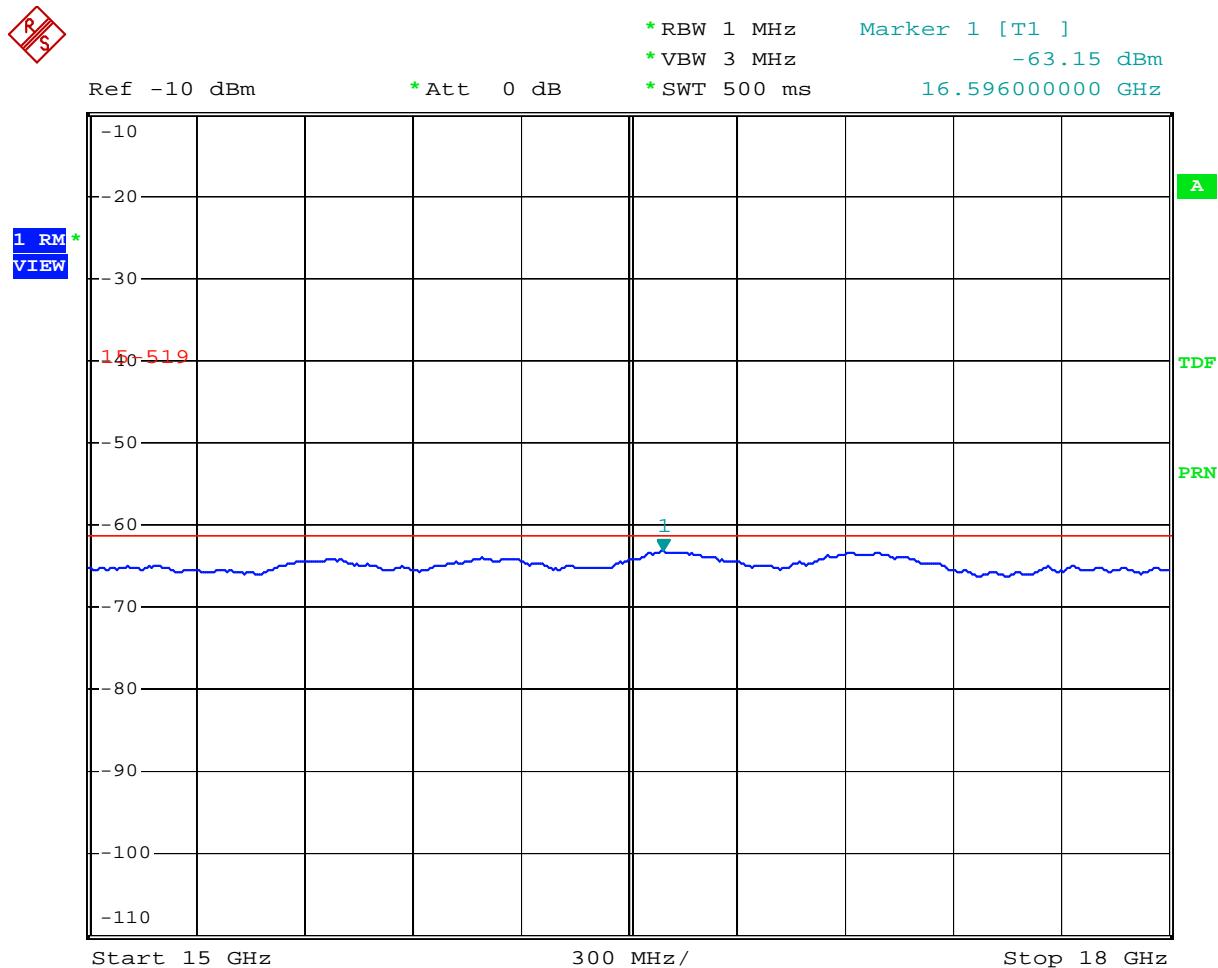


Date: 28.JAN.2010 20:06:43

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (18GHz~26.5GHz Emissions)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

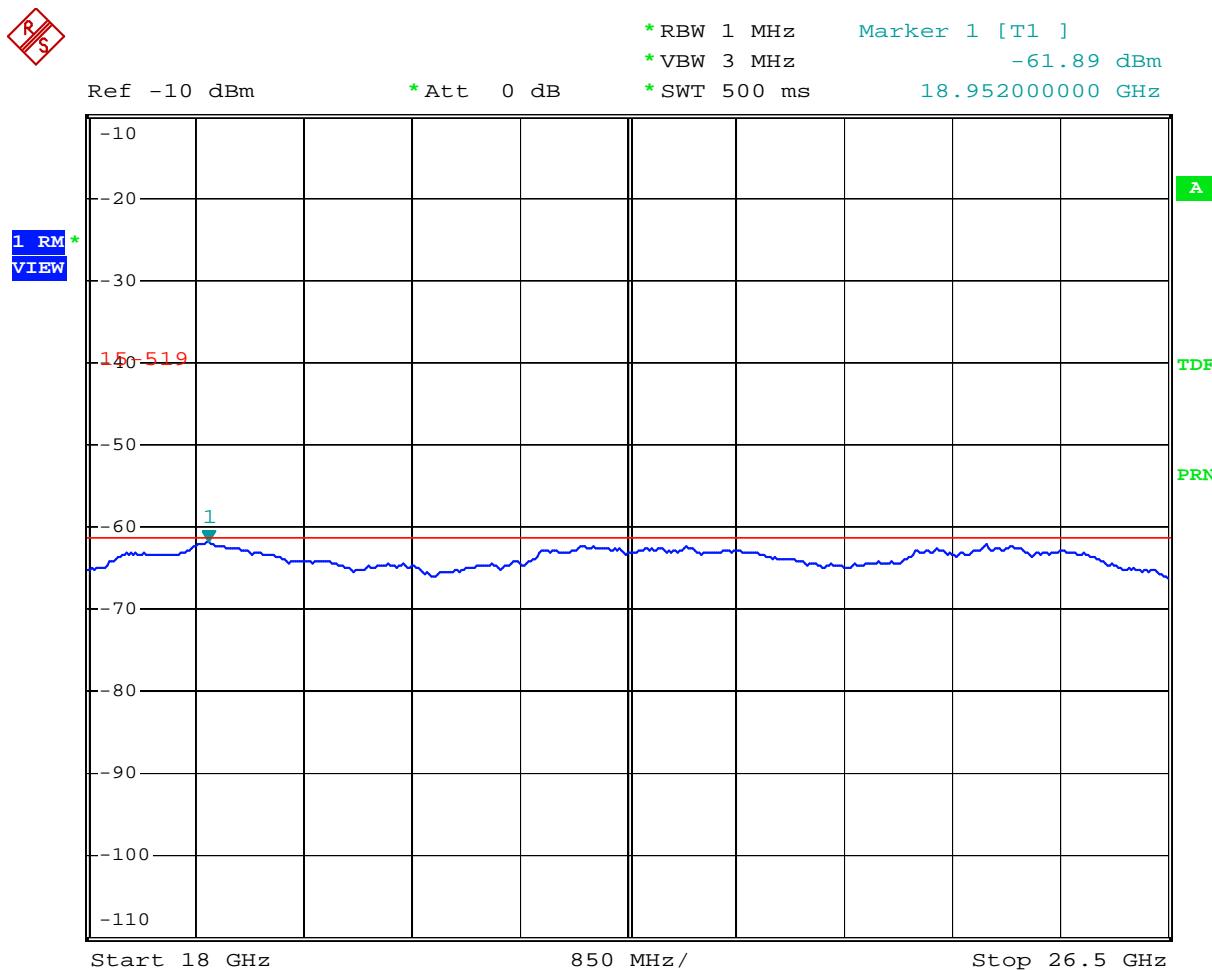
Test Distance: 1m**Horizontal**

Date: 26.JAN.2010 22:19:41

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

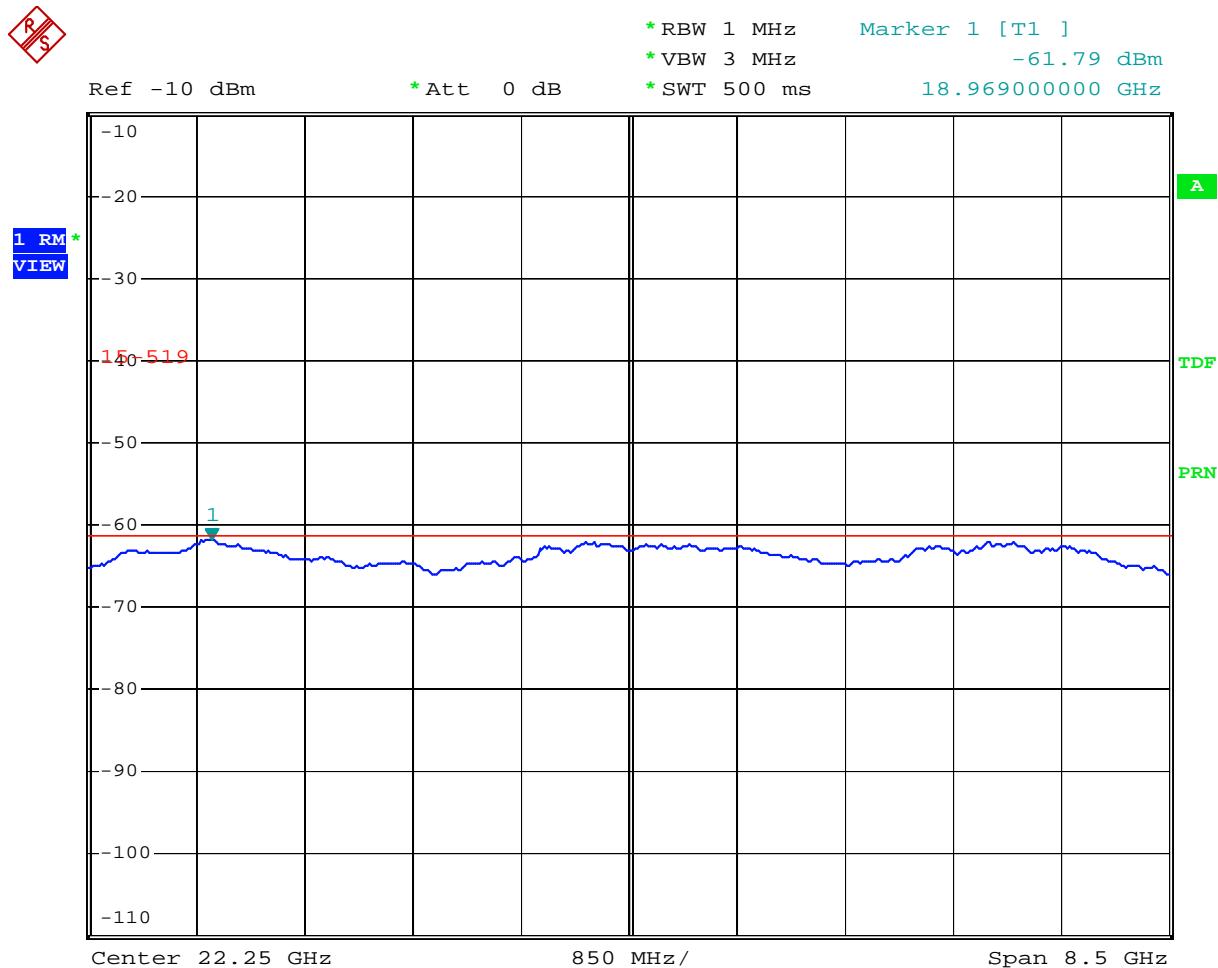


Date: 26.JAN.2010 22:17:32

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 1m

Horizontal

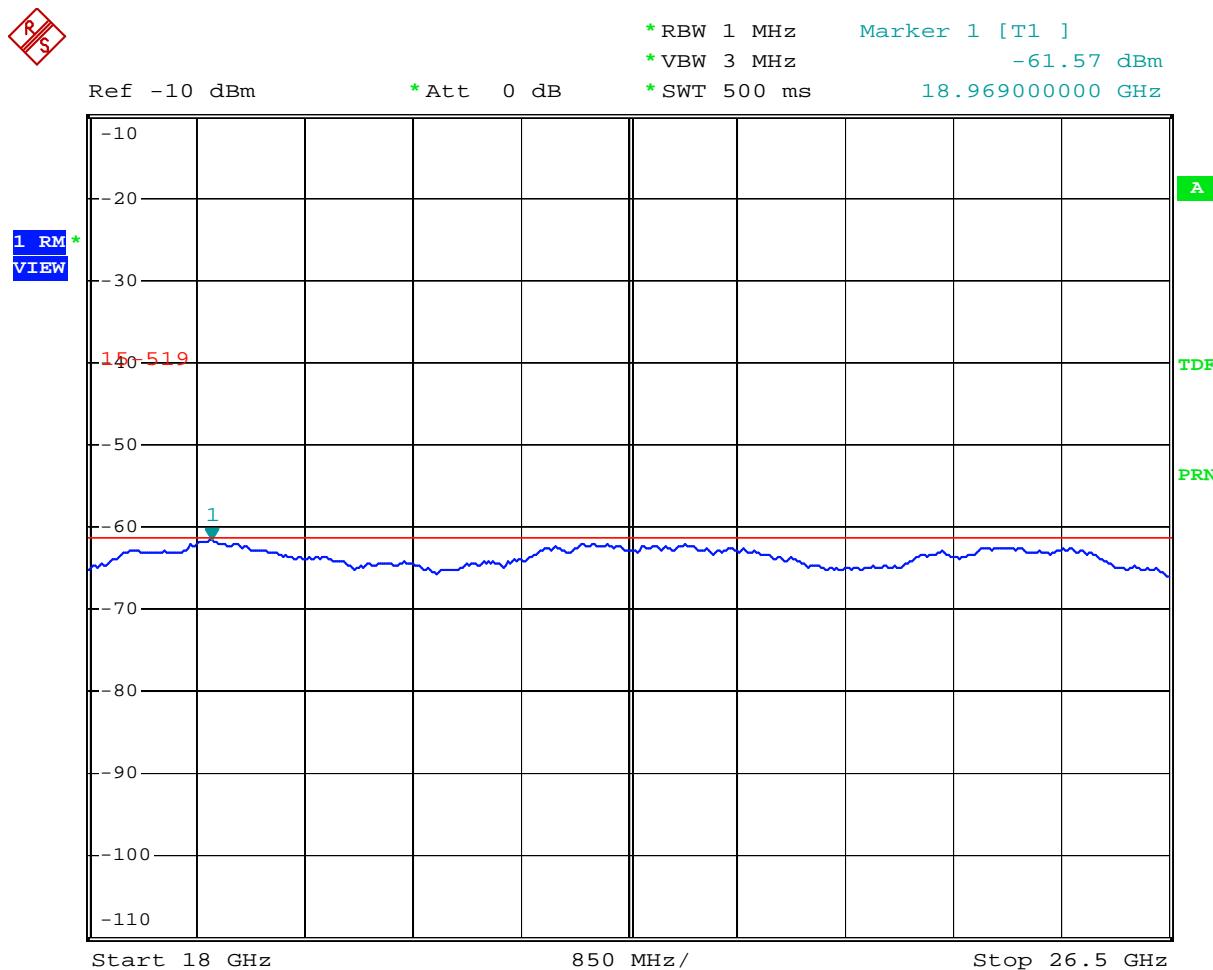


Date: 28.JAN.2010 20:14:45

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

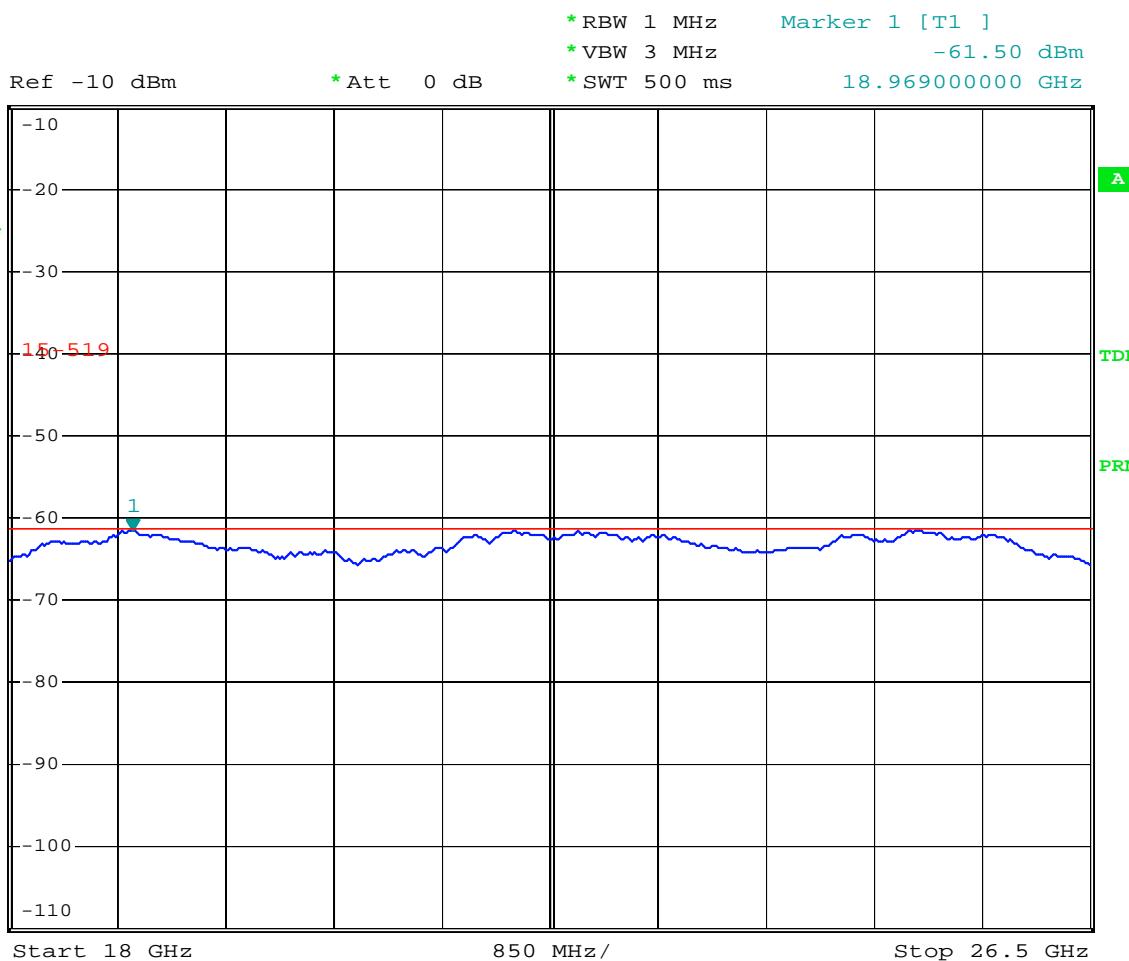


Date: 28.JAN.2010 20:09:34

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 1m

Horizontal

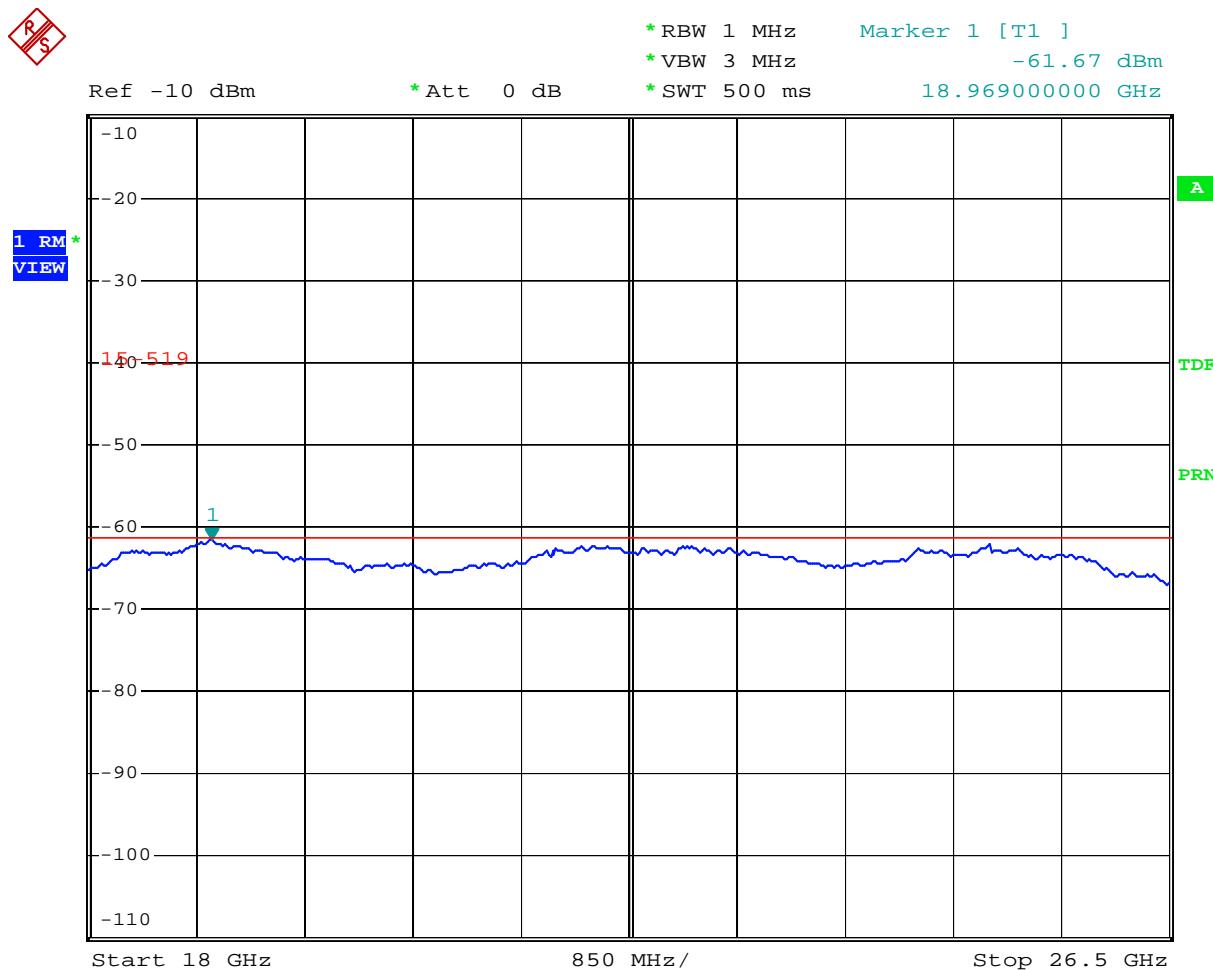


Date: 28.JAN.2010 20:20:30

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

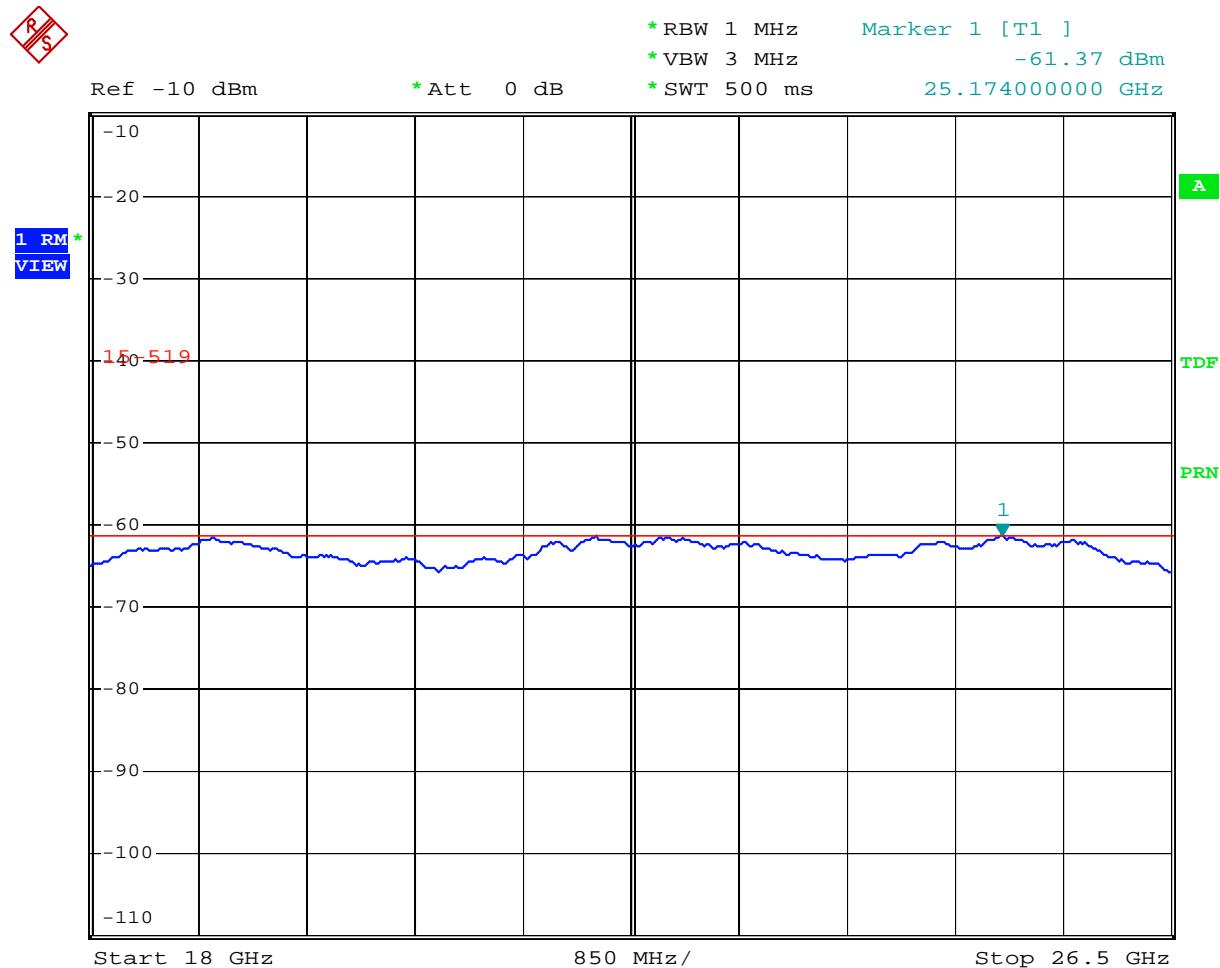


Date: 28.JAN.2010 20:08:26

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Radiated Emissions (26.5GHz~40GHz Emissions)

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

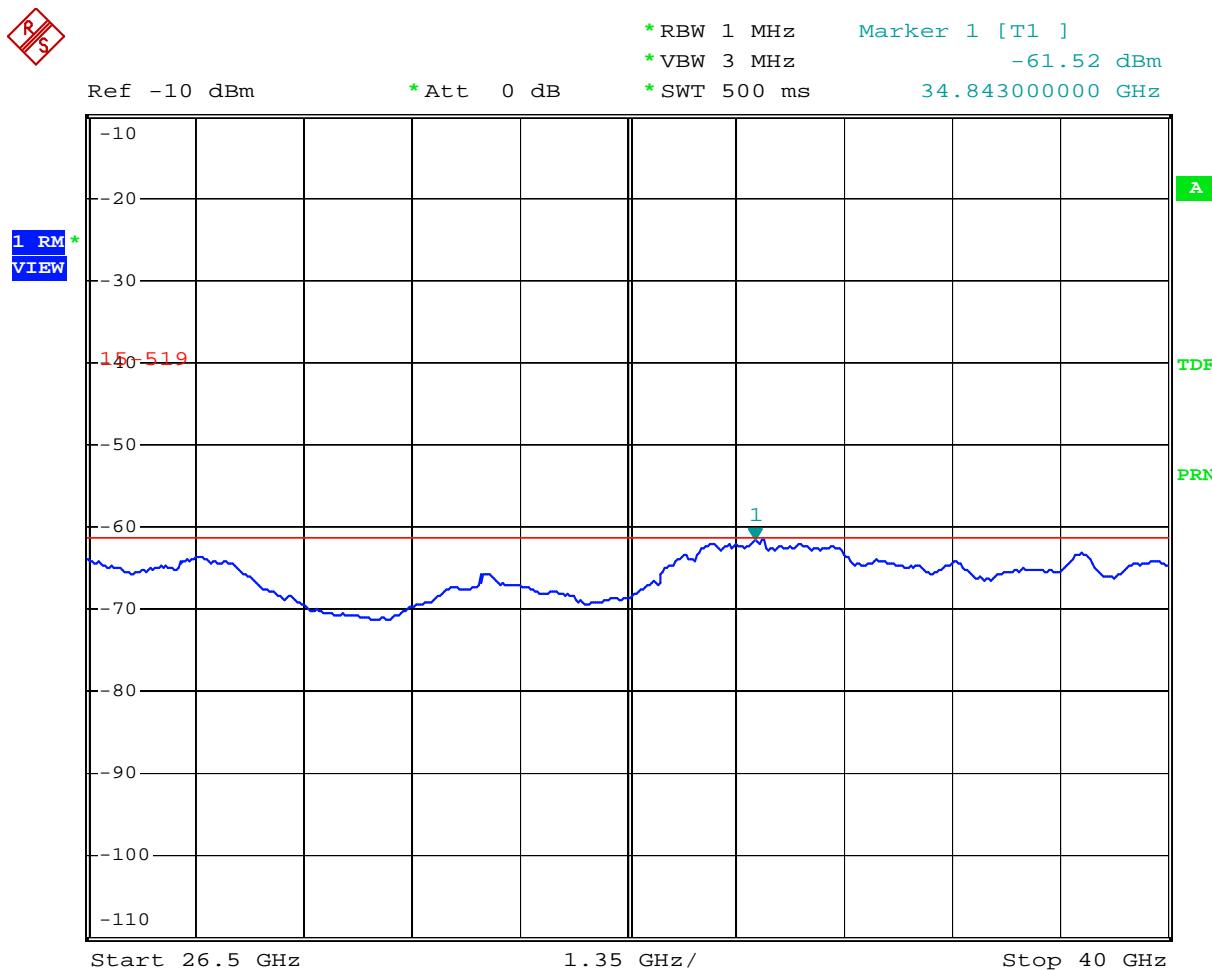
Test Distance: 1m**Horizontal**

Date: 26.JAN.2010 22:21:41

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

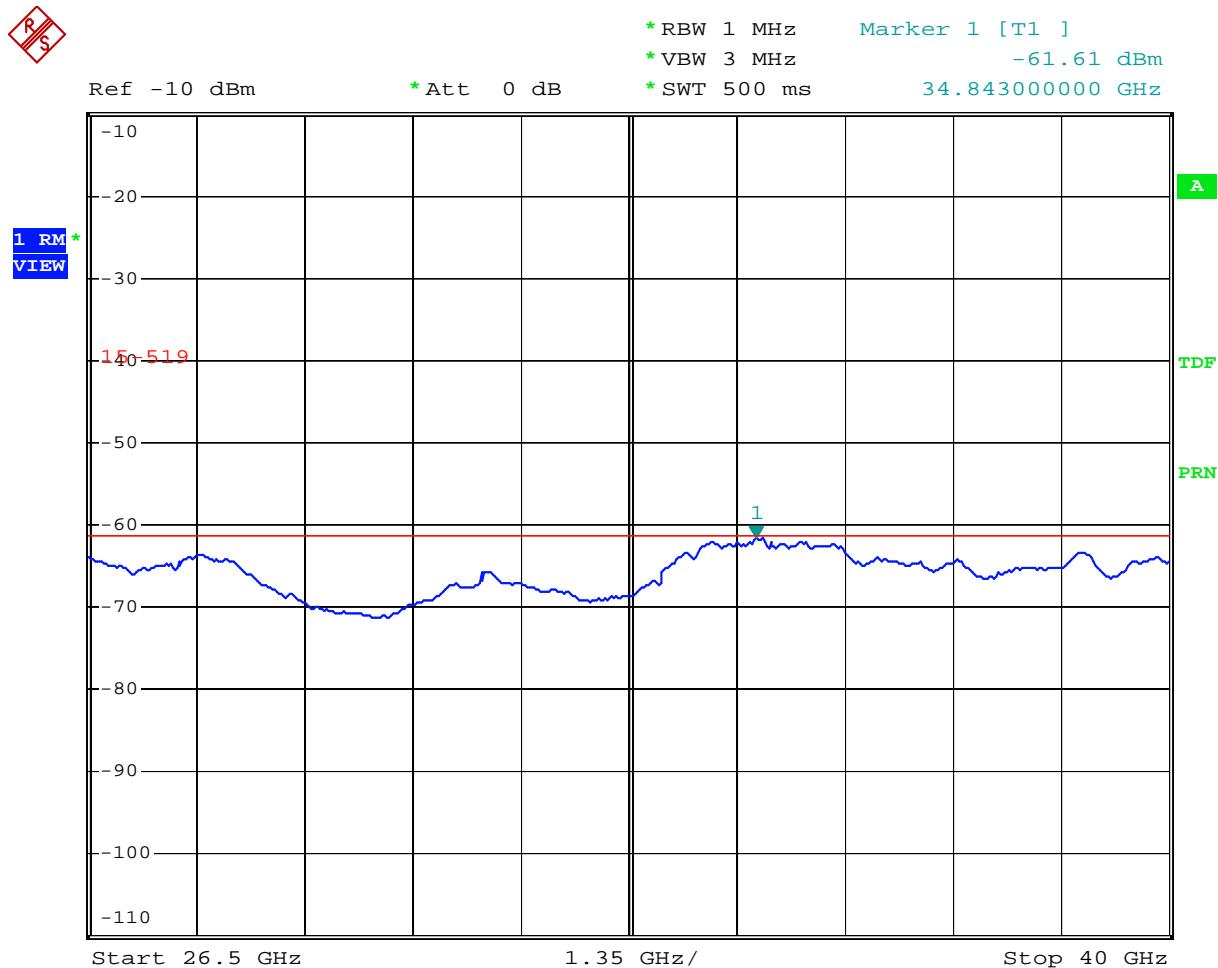


Date: 26.JAN.2010 22:22:24

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

Test Distance: 1m

Horizontal

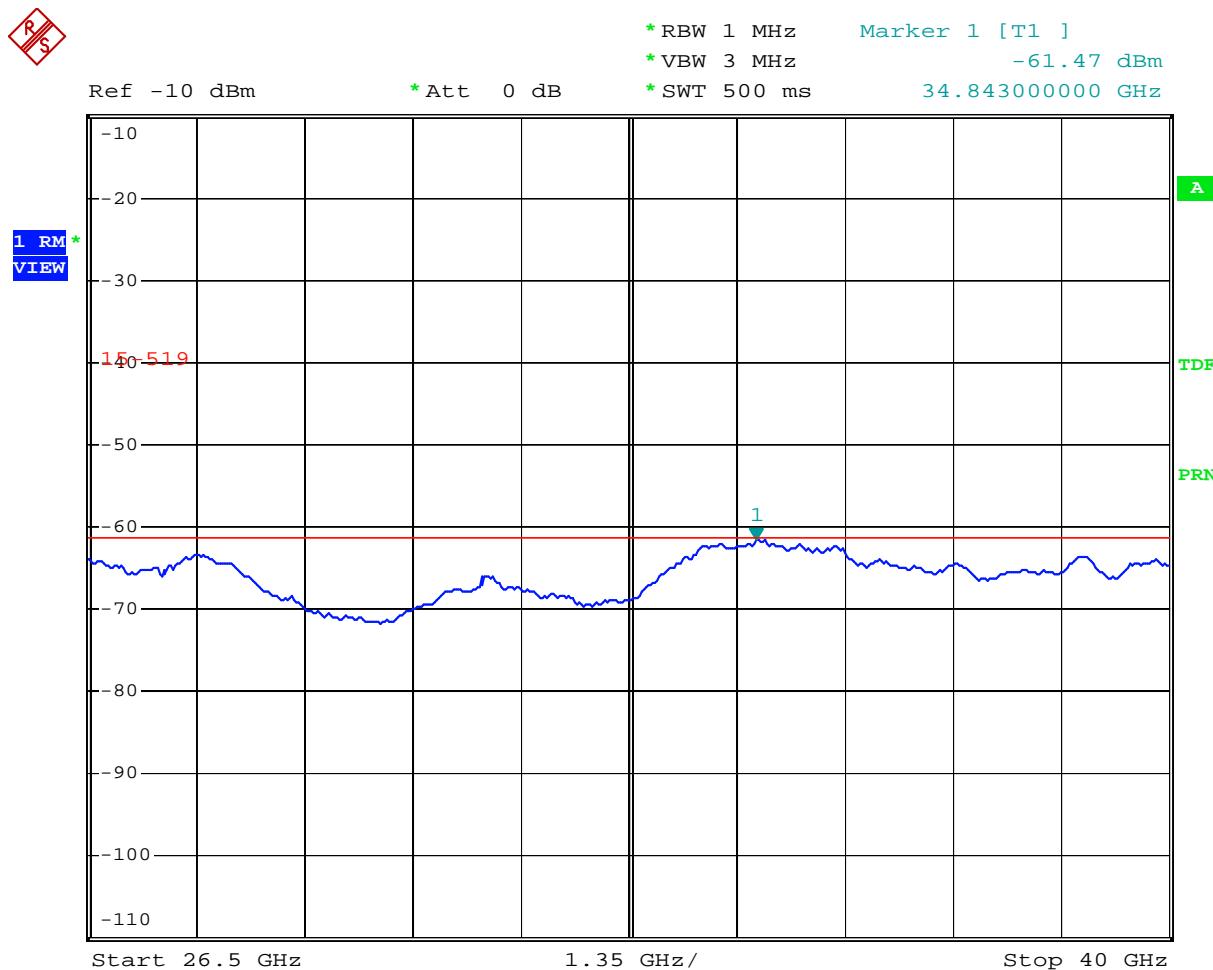


Date: 28.JAN.2010 20:27:57

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

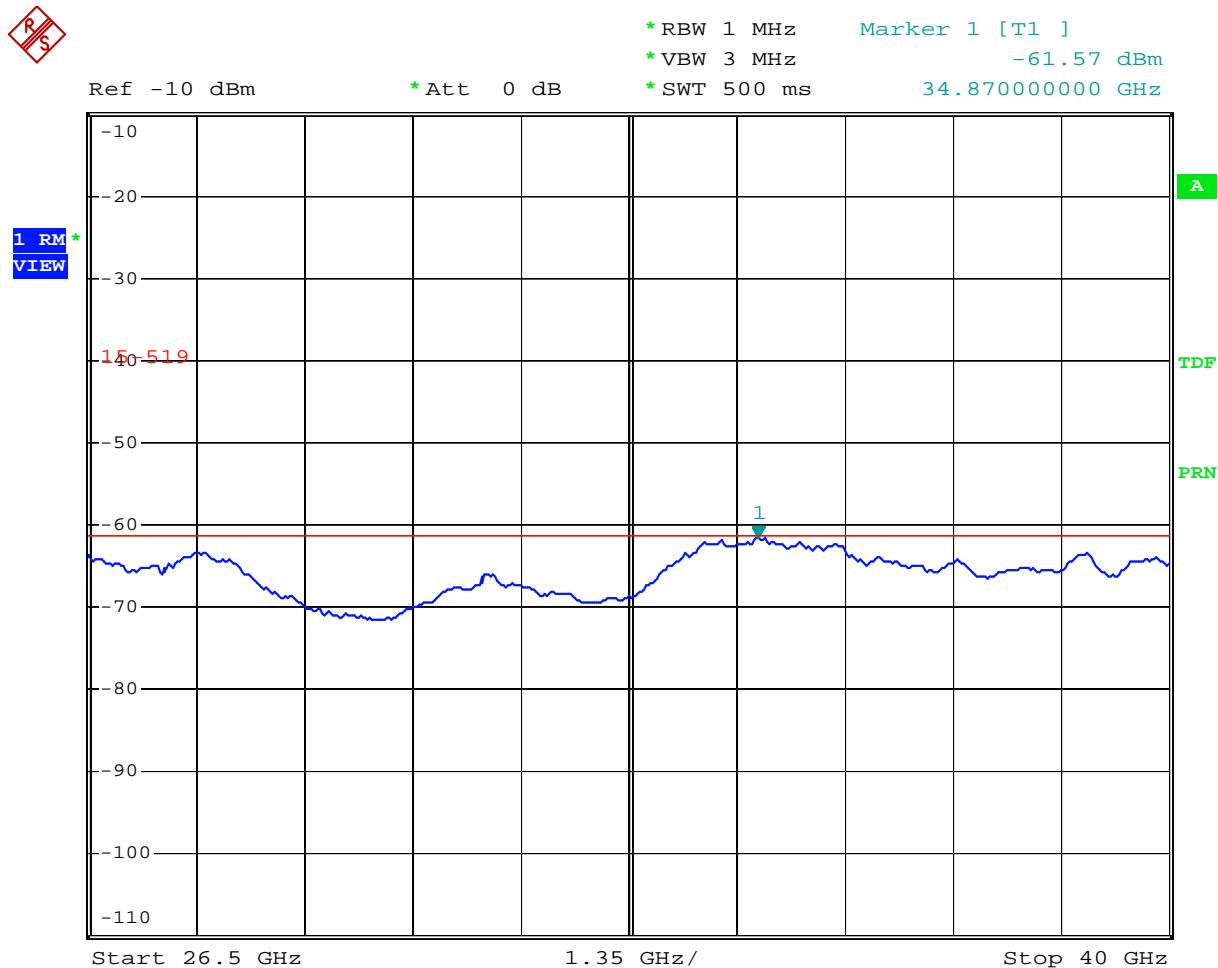


Date: 28.JAN.2010 20:26:51

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

Test Distance: 1m

Horizontal

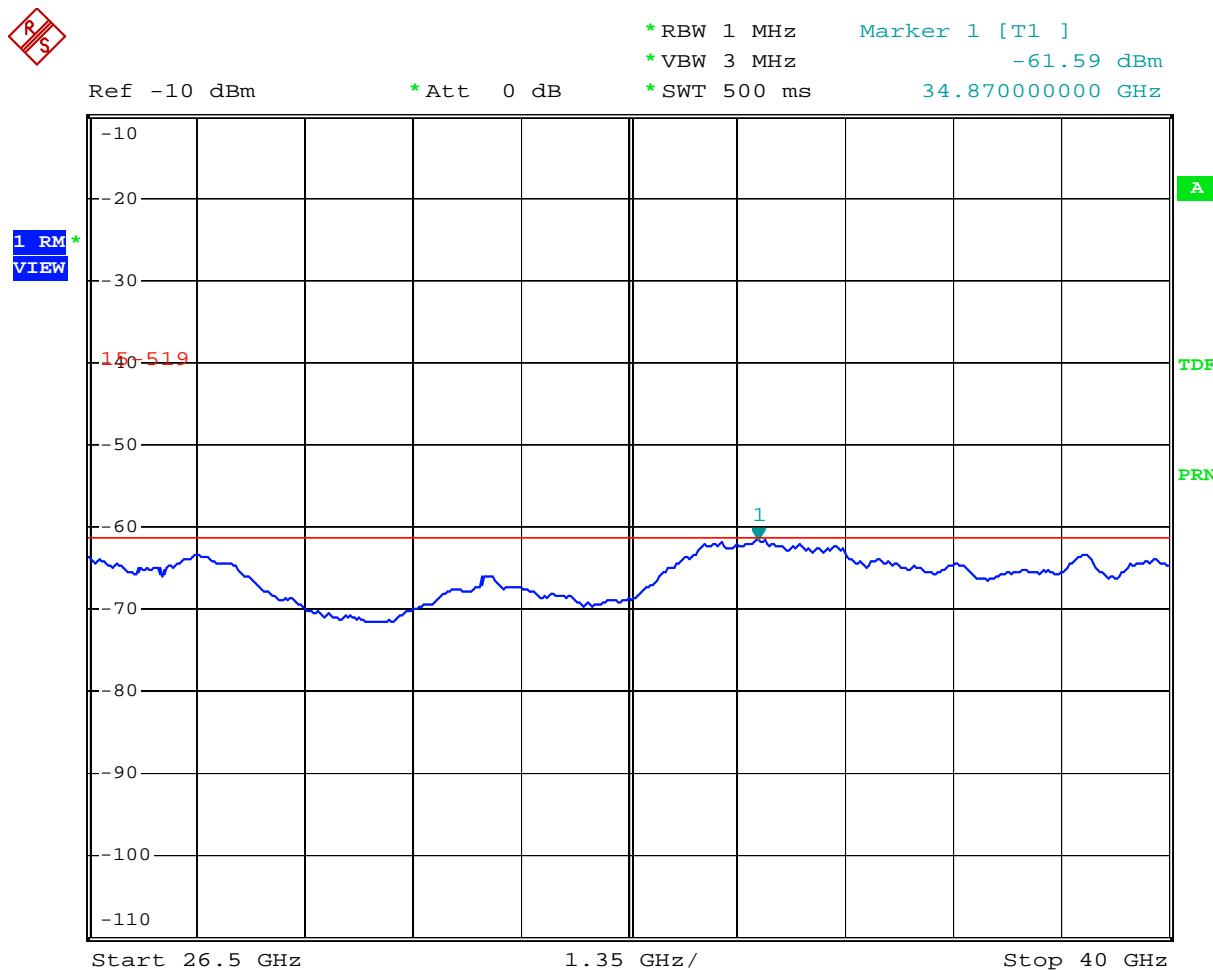


Date: 28.JAN.2010 20:24:03

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

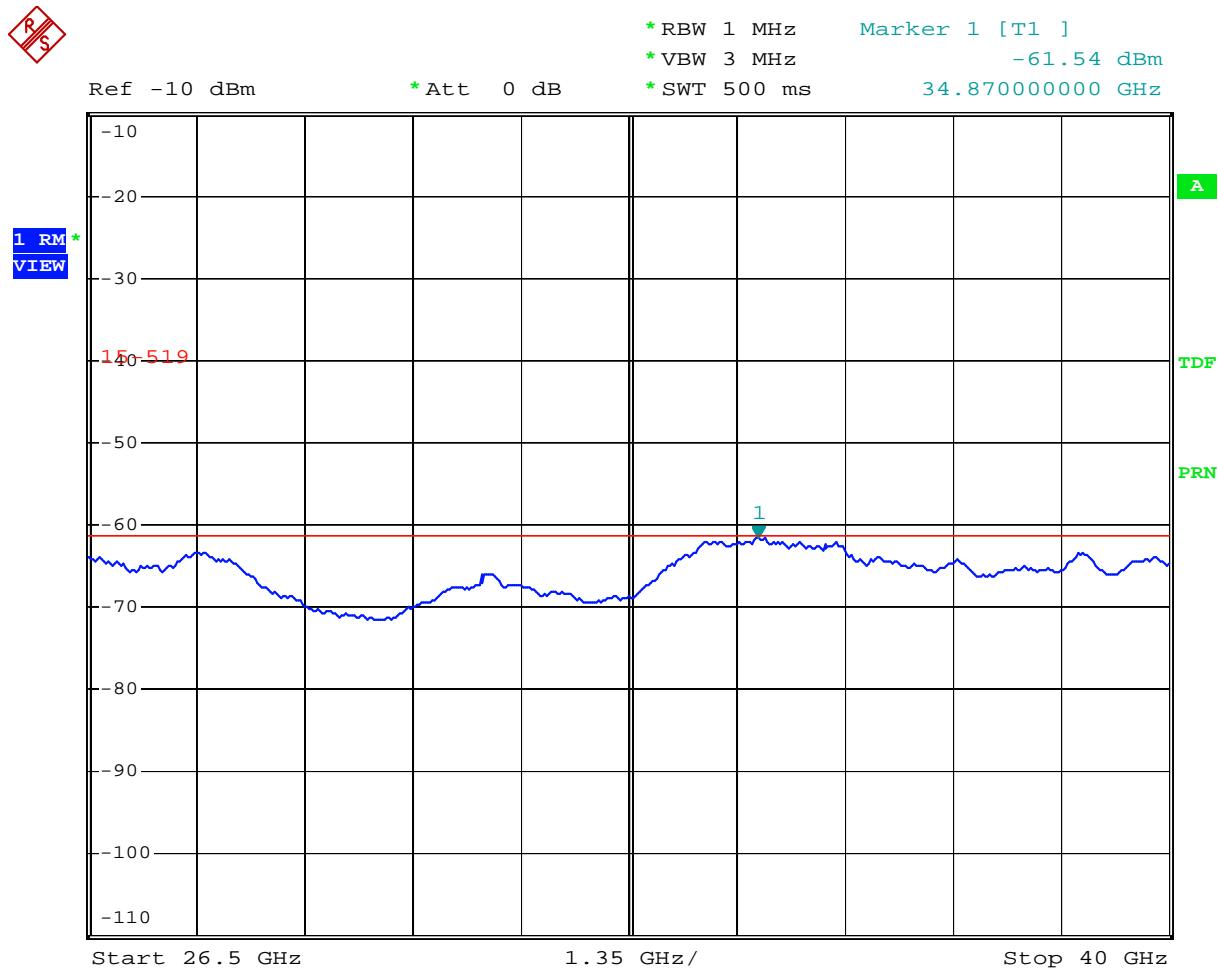

Date: 28.JAN.2010 20:25:37

Note: Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 0.5m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

3.4 Radiated Emissions in GPS Bands Measurement

3.4.1 Limit

In addition to the radiated emission limits specified in the table in paragraph 3.5.1 of this report, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz.

Freq. (MHz)	EIRP (dBm)
1164-1240	-85.3
1559-1610	-85.3

Note 1: This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$.

Note 2: Extrapolation factor when test distance other than 3m. (in accordance with 47 CFR 15.31 (f) (2))

Form 3m to 1m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$

(dB); Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB]. From 3m to 0.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [0.5m]})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [15.56 dB].

3.4.2 Measuring Instruments and Setting

Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	0 dB
RBW / VBW	47 CFR Section 15.517(d) 10 kHz / 1kHz for RMS for Average, 1 msec averaging time were used for these measurement frequencies. 47 CFR Section 15.521(c) (47 CFR Section 15.209 (a)) 1MHz/1MHz for peak, 1MHz/10Hz for Average. (in accordance with ANSI C63.4)

3.4.3 Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable that is non-conductive material (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1 meter far away from the turntable.
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between 1 meter and 4 meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scanning (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

5. Measurements frequencies were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 10 kHz and VBW of 1 kHz, and a 1 msec averaging time were used for these measurements.
6. Per 47 CFR, Part 15, Subpart F, §15.521(c) (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.

3.4.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.4.4.

3.4.5 Test Deviation

There is no deviation with the original standard.


3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode and TFC 4 with 53.3Mbps.

3.4.7 Results for Radiated Emissions in GPS Bands

Radiated Emissions (1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz) GPS Bands

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC4)

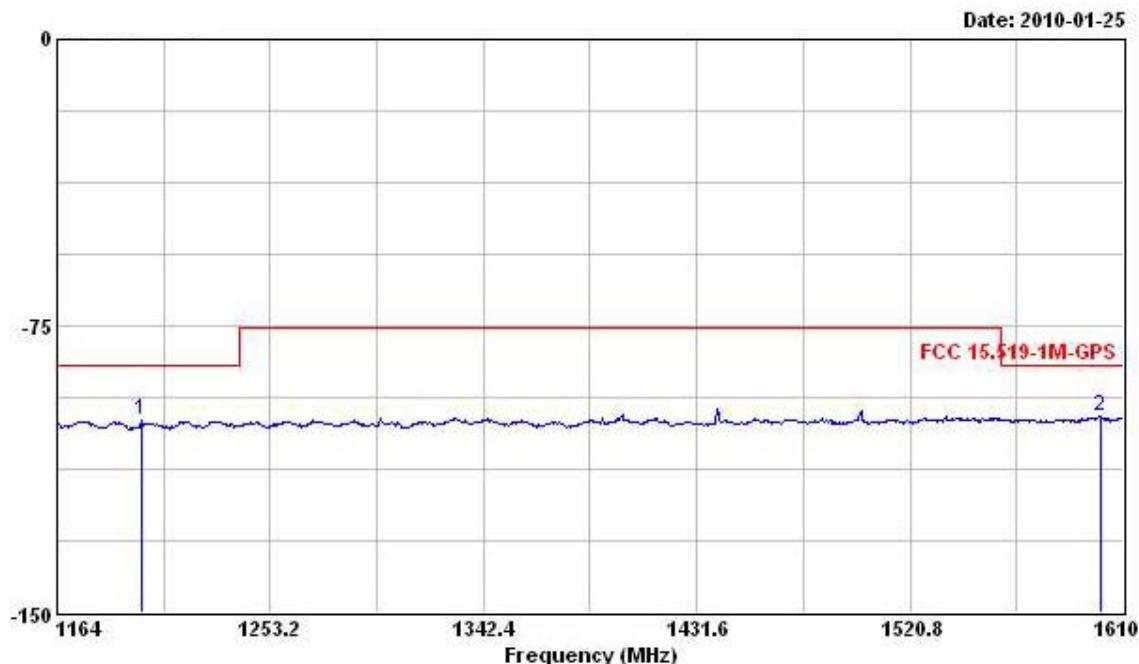
Test Distance: 1m**Horizontal**

Freq	Level	Over Limit		Read		Antenna Level	Cable Factor	Preamp Factor	Remark
		Line Limit	dBm	Line	dBm				
MHz	dBm		dB	dBm		dBm	dB/m	dB	dB
1 1199.230	-99.79	-14.49	-85.30	-91.92	24.78	1.99	34.64		
2 1600.190	-98.47	-13.17	-85.30	-92.70	26.04	2.36	34.17		

Note: Measurements made with 10kHz RBW/10KHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

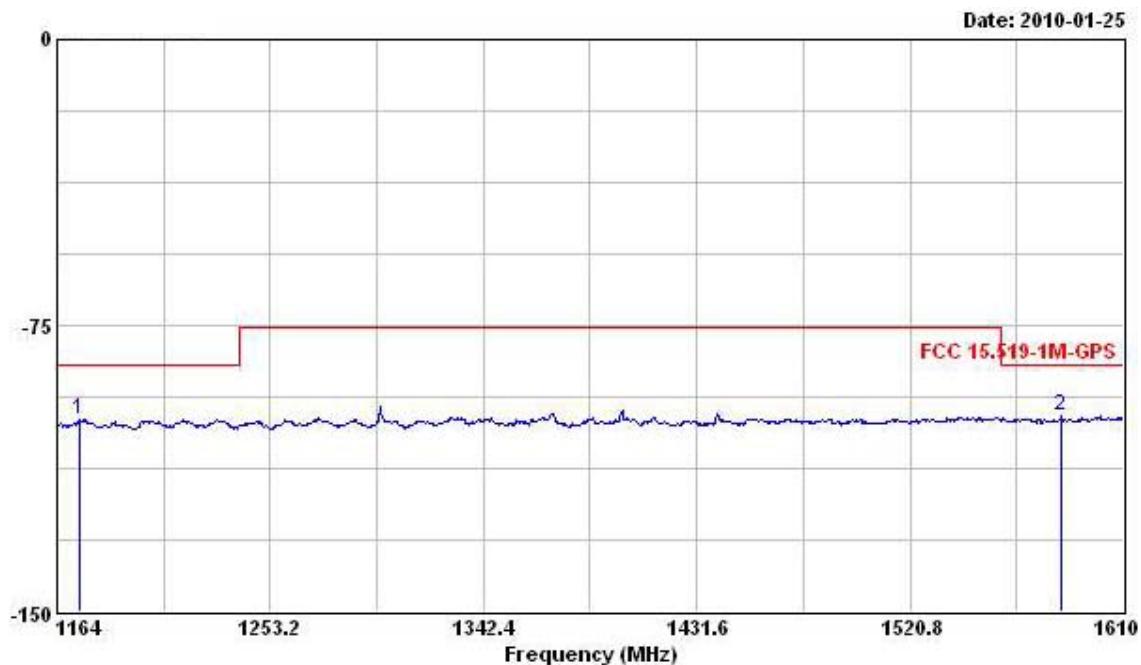

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Antenna	Level	Factor	Loss	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	1173.810	-99.55	-14.25	-85.30	-91.51	24.68	1.95	34.67
2	1584.130	-98.64	-13.34	-85.30	-92.77	25.97	2.36	34.20


Note: Measurements made with 10kHz RBW/10KHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC4)

Test Distance: 1m

Horizontal

Date: 2010-01-27

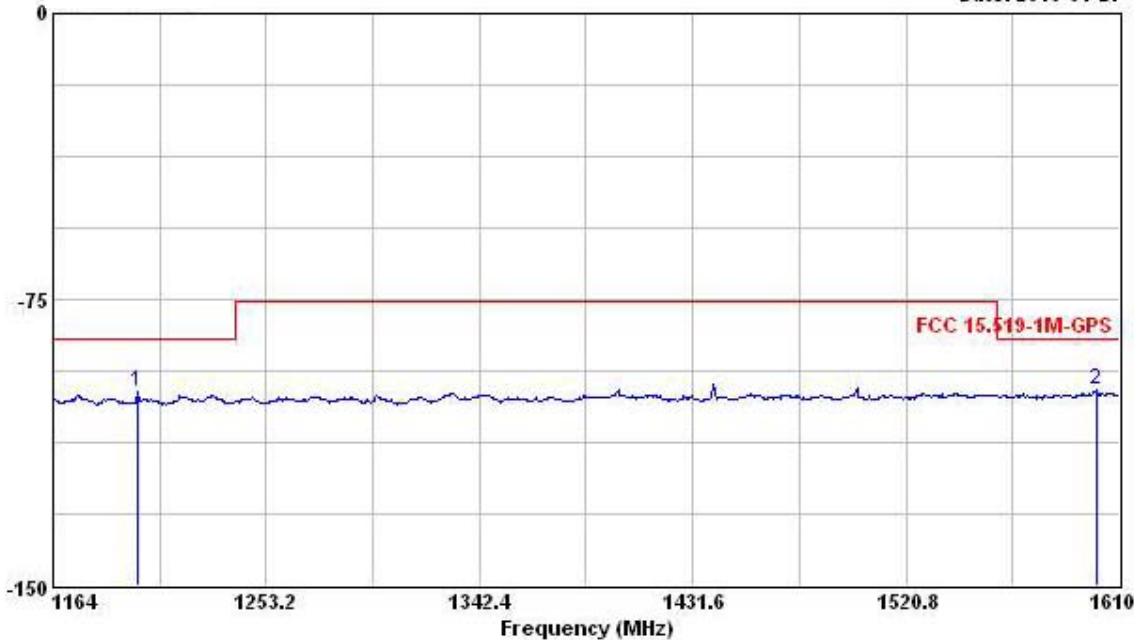


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Loss	Preamp Factor	Remark
				Level	Factor			
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1 1199.230	-99.04	-13.74	-85.30	-91.17	24.78	1.99	34.64	
2 1600.190	-98.78	-13.48	-85.30	-93.01	26.04	2.36	34.17	

Note: Measurements made with 10kHz RBW/10KHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

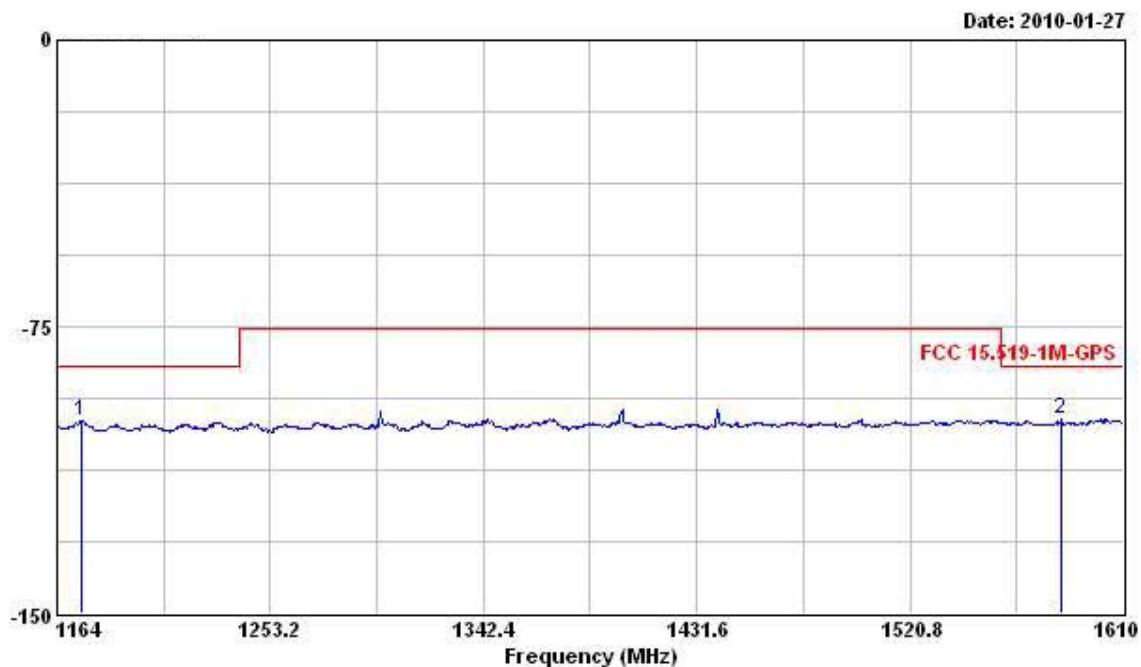


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Line	Limit	Line	Level	Factor	Loss	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	1174.260	-99.63	-14.33	-85.30	-91.59	24.68	1.95	34.67
2	1584.130	-99.29	-13.99	-85.30	-93.42	25.97	2.36	34.20

Note: Measurements made with 10kHz RBW/10KHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC4)

Test Distance: 1m

Horizontal

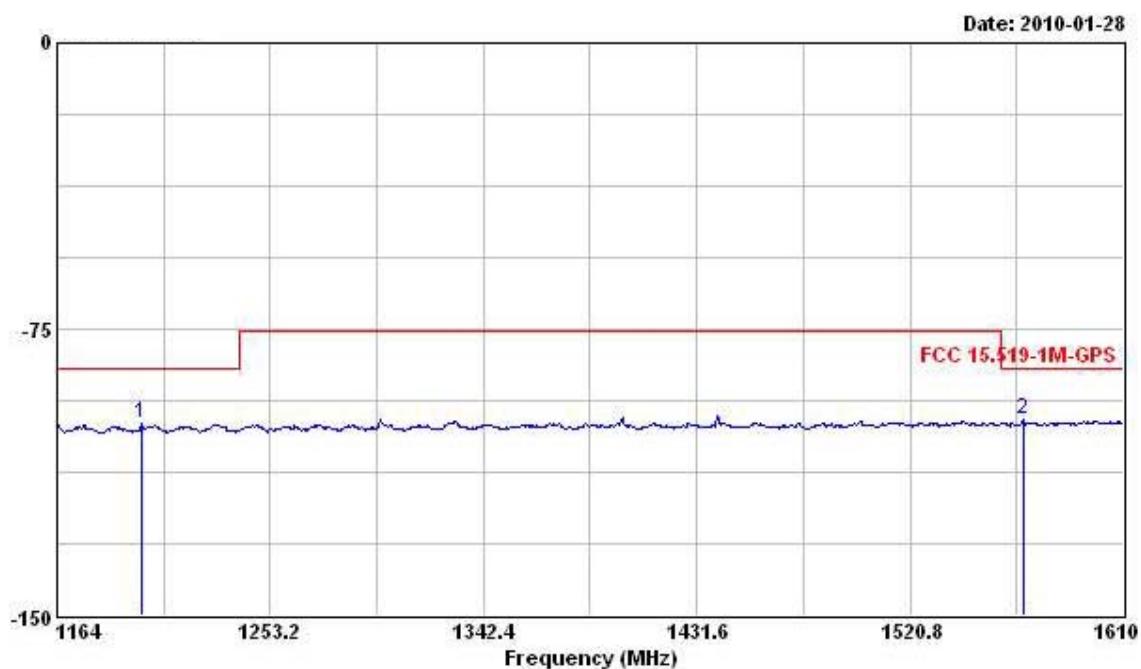


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Line	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	1199.230	-99.67	-14.37	-85.30	-91.80	24.78	1.99	34.64
2	1568.080	-98.92	-13.62	-85.30	-92.93	25.89	2.36	34.24

Note: Measurements made with 10kHz RBW/10KHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

Test Distance: 1m

Vertical

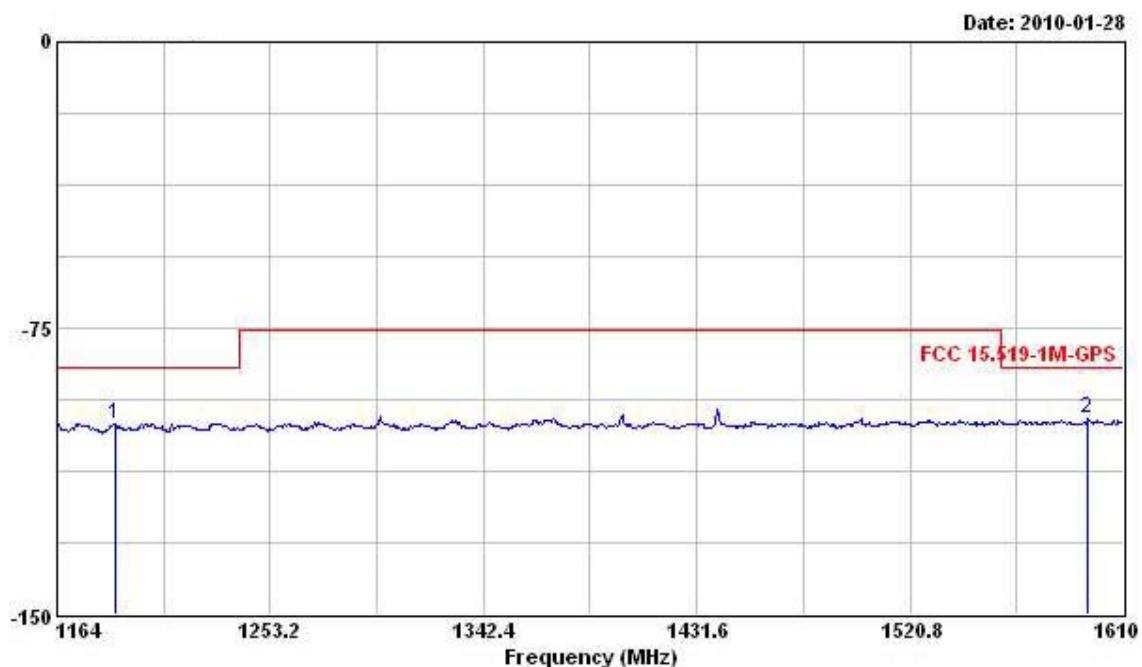

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Line	Limit	Line	Level Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	1188.080	-99.98	-14.68	-85.30	-92.03	24.73	1.99	34.67
2	1595.280	-98.88	-13.58	-85.30	-93.08	26.04	2.36	34.20

Note: Measurements made with 10kHz RBW/10KHz VBW (RMS detector) at 1m distances. 1 msec averaging time were used for these frequencies per bin point measurements.

3.5 Peak Emissions within a 50 MHz Bandwidth Measurement

3.5.1 Limit

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, EIRP limit has to be adjusted by the resolution bandwidth ratio of $20\log(RBW/50)$ dB, where RBW is the resolution bandwidth used for the measurement expressed in MHz. In addition, This may be converted to a peak field strength level at 3 meters using $E(dBuV/m) = P(dBm EIRP) + 95.2$ dB.

Peak EIRP limit dBm (RB / VB : 50MHz)	Peak EIRP limit dBm (RB / VB: 10MHz)
0	-13.97

3.5.2 Measuring Instruments and Setting


Please refer to equipments list in section 4 of this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Sweep Time	Auto
RBW / VBW	10MHz / 10MHz for Peak

3.5.3 Test Procedures

1. The EUT was placed on the top of the turntable that is non-conductive material (glass fiber) and 0.8 meter above ground. The EUT was flush on the back of the tabletop. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. The horn receiving antenna was varied between 1 meter and 4 meters, 1 meter step above ground while maintaining bore sight alignment to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For maximum peak emission amplitude, the antenna tower was scanning (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_M .
4. The individual UWB bandwidths were measured for each BAND_ID (n_b) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.
5. A spectrum analyzer was used for the final measurement utilizing a peak detector at the frequency with the largest amplitude. The spectrum analyzer did not support the prescribed resolution bandwidth of 50 MHz. However, when a peak measurement is required, The resolution bandwidth for this measurement was set to 10 MHz, and the measurement was centered on the frequency at which the highest radiated emission occurred, f_M . The video bandwidth was 10 MHz.

3.5.4 Test Setup Layout

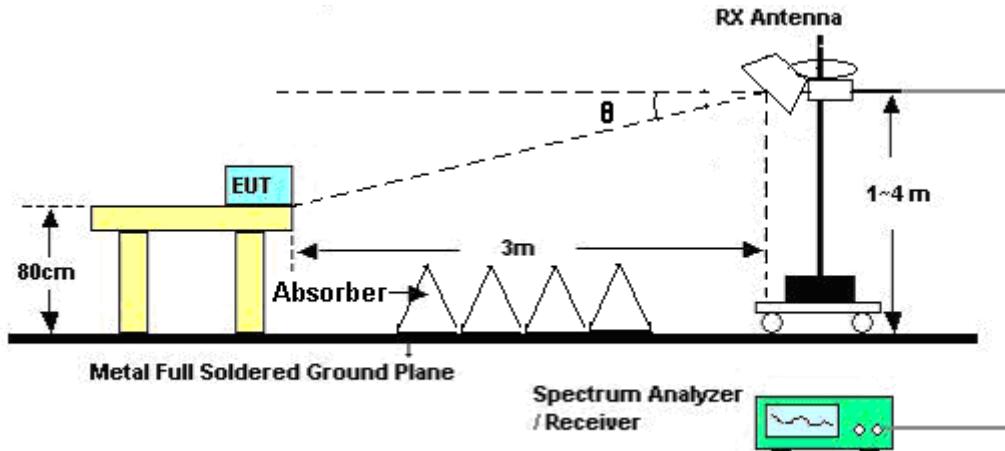

Note: The Horn Antenna maintaining bore sight alignment.

$$\theta = \tan^{-1} \left(\frac{\text{The Antenna's Height} - \text{The Table's Height}}{\text{The Test Distance}} \right)$$

3.5.5 Test Deviation


There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode, and TFC 4 and data rate is 53.3Mbps.

3.5.7 Test Result of Peak Emissions within a 50 MHz Bandwidth


Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 1 (TFC 4)

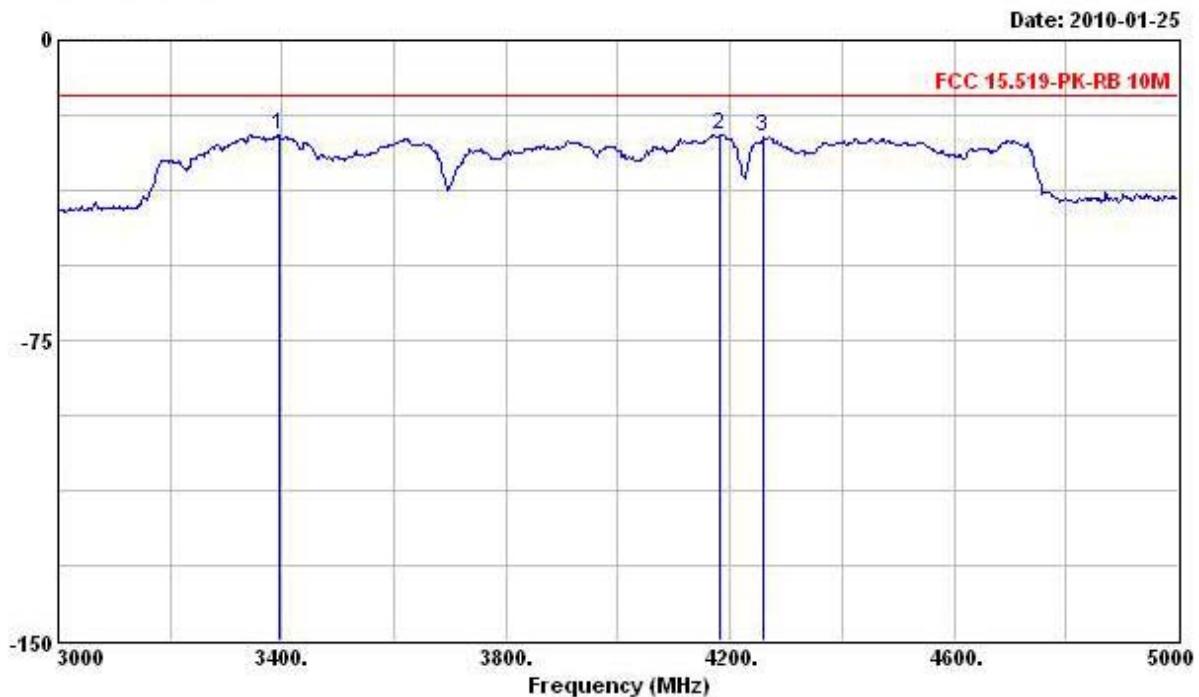Horizontal

Freq	Level	Over Limit	Limit	Read		Antenna Level	Cable Factor	Preamp Factor	Remark
				Line	dBm				
1	3396.000	-23.69	-9.72	-13.97	-24.42	31.55	3.75	34.57	
2	4182.000	-23.56	-9.59	-13.97	-26.07	32.96	4.22	34.67	
3	4260.000	-24.35	-10.38	-13.97	-26.81	32.95	4.24	34.73	

Note:

1. Test distance: 3m, the antenna height 1 to 4 meters, 1-meter steps, bore sighted to EUT.
2. There are the absorber on ground plane between the antenna tower and turntable.

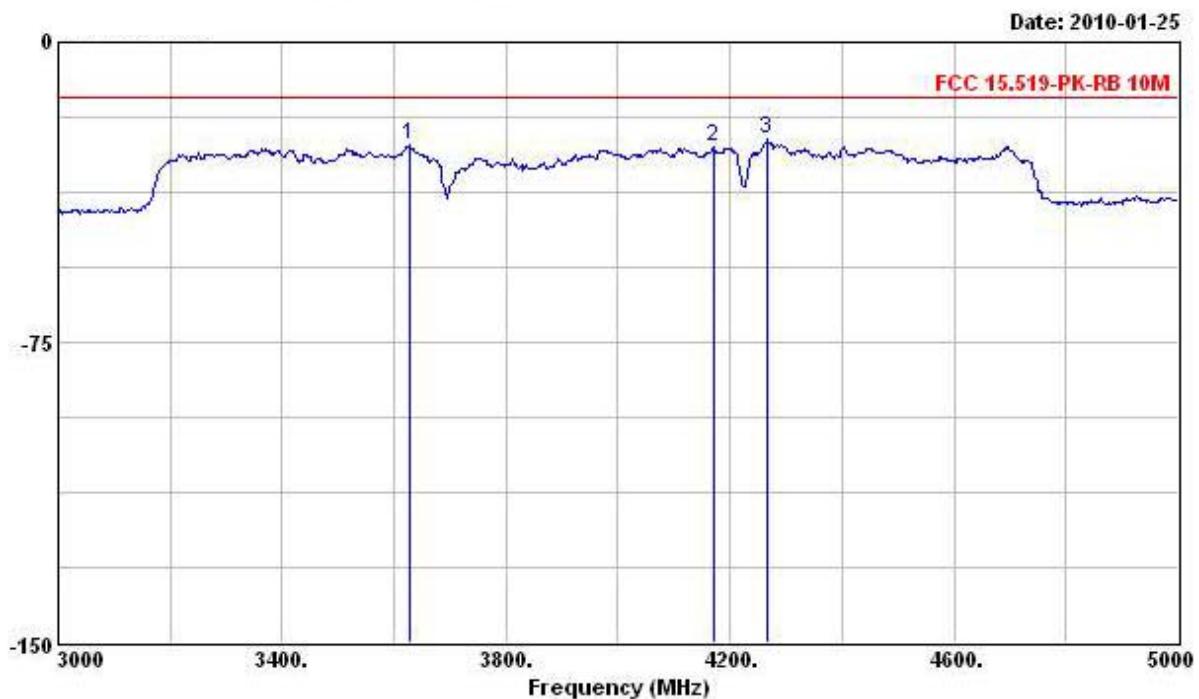
Vertical

Freq	Level	Over Limit		Read Line	Antenna Level	Cable Preamp		Remark
		MHz	dBm	dB	dBm	dB/m	dB	
1	3628.000	-25.90	-11.93	-13.97	-27.29	32.13	3.92	34.66
2	4172.000	-26.33	-12.36	-13.97	-28.85	32.96	4.20	34.64
3	4268.000	-24.42	-10.45	-13.97	-26.88	32.95	4.24	34.73

Note:

1. Test distance: 3m, the antenna height 1 to 4 meters, 1-meter steps, bore sighted to EUT.
2. There are the absorber on ground plane between the antenna tower and turntable.


Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 3 (TFC 4)

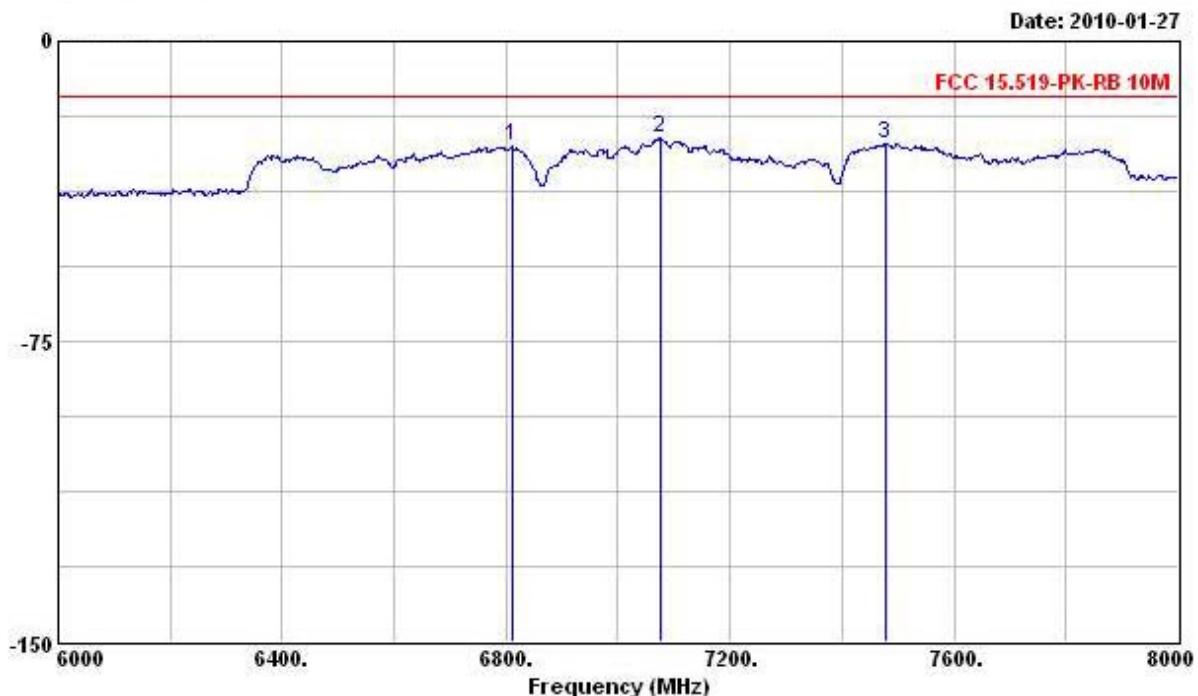Horizontal

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	
1	6812.000	-26.05	-12.08	-13.97	-33.01	35.68	5.56	34.28
2	7076.000	-23.99	-10.02	-13.97	-31.59	36.27	5.61	34.28
3	7478.000	-25.57	-11.60	-13.97	-34.20	37.26	5.66	34.29

Note:

1. Test distance: 3m, the antenna height 1 to 4 meters, 1-meter steps, bore sighted to EUT.
2. There are the absorber on ground plane between the antenna tower and turntable.

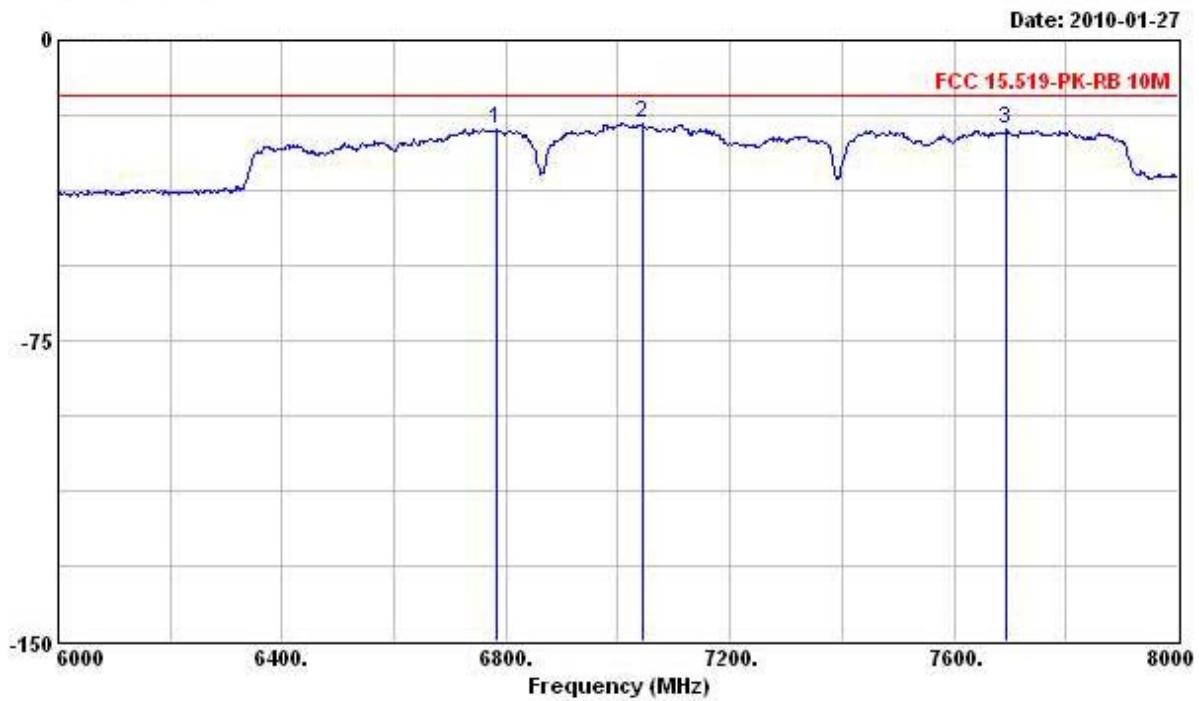
Vertical

Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Remark
				dBm	dB	dBm	dB/m	
MHz								
1	6782.000	-21.98	-8.01	-13.97	-28.85	35.61	5.55	34.29
2	7044.000	-20.78	-6.81	-13.97	-28.32	36.22	5.60	34.28
3	7694.000	-22.36	-8.39	-13.97	-31.26	37.50	5.72	34.32

Note:

1. Test distance: 3m, the antenna height 1 to 4 meters, 1-meter steps, bore sighted to EUT.
2. There are the absorber on ground plane between the antenna tower and turntable.


Temperature	27 °C	Humidity	57 %
Test Engineer	Kobe	Configuration	Band_Group 6 (TFC 4)

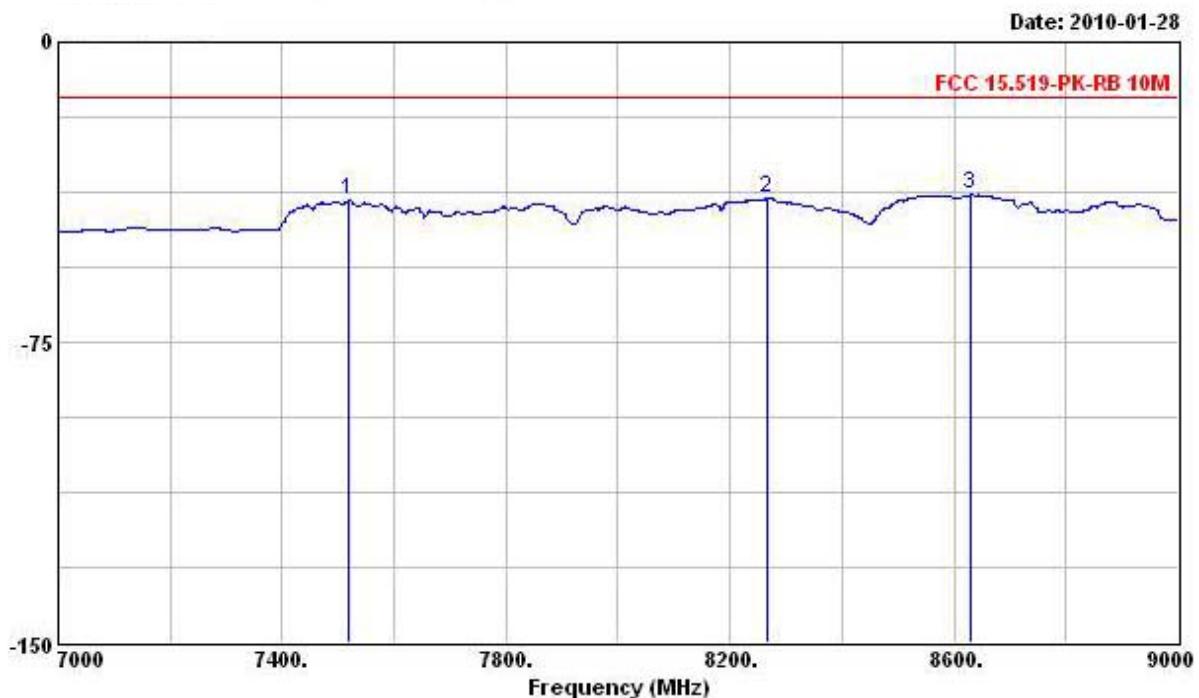Horizontal

Freq	Level	Over Limit	Limit	Read		Antenna	Cable	Preamp	Remark
				Line	Level				
MHz	dBm	dB	dBm	dBm	dB/m	dB	dB	dB	
1 7518.000	-39.46	-25.49	-13.97	-48.14	37.32	5.66	34.30		
2 8268.000	-39.04	-25.07	-13.97	-48.72	38.08	5.88	34.28		
3 8630.000	-38.18	-24.21	-13.97	-48.23	38.38	6.01	34.34		

Note:

1. Test distance: 3m, the antenna height 1 to 4 meters, 1-meter steps, bore sighted to EUT.
2. There are the absorber on ground plane between the antenna tower and turntable.

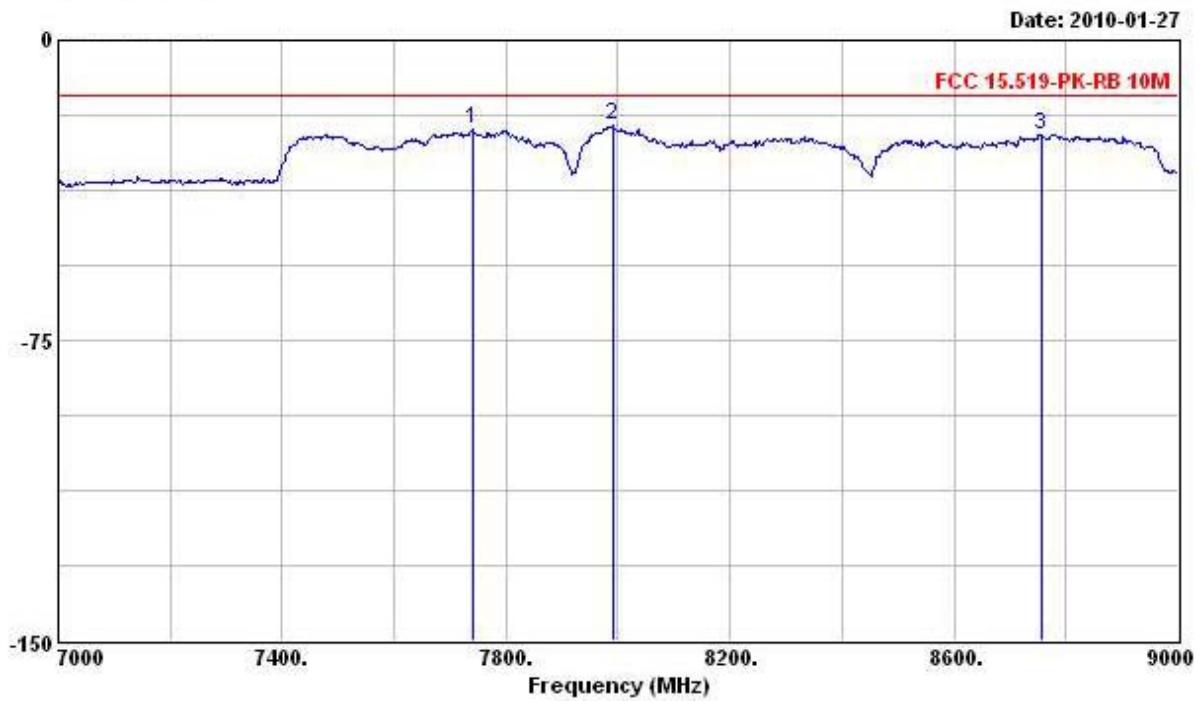Vertical

Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Remark
				dBm	dB	dBm	dB/m	
MHz								
1	7740.000	-22.43	-8.46	-13.97	-31.36	37.53	5.73	34.33
2	7990.000	-21.41	-7.44	-13.97	-30.62	37.78	5.80	34.37
3	8756.000	-23.63	-9.66	-13.97	-33.67	38.45	6.06	34.47

Note:

1. Test distance: 3m, the antenna height 1 to 4 meters, 1-meter steps, bore sighted to EUT.
2. There are the absorber on ground plane between the antenna tower and turntable.

3.6 Labeling and Instruction Manual Requirements

UWB device subject to certification shall be labeled as followed in a conspicuous location on the device: "This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation."

(1) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified directly above this section is required to be affixed only to the main control unit.

(2) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

The users' manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

3.7.2 Antenna Connector Construction

Please refer to section 2.1 in this test report, antenna connector complied with the requirements.

4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 13, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 15, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 06, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2010*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Sep. 27, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2009*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz - 1 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 05, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 19, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.

** Calibration Interval of instruments listed above is two year.

5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-100107

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005

Accreditation Number : 1190

Originally Accredited : December 15, 2003

Effective Period : January 10, 2010 to January 09, 2013

Accredited Scope : Testing Field, see described in the Appendix

Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection

Accreditation Program for Telecommunication Equipment
Testing Laboratory

Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 07, 2010

P1, total 21 pages