



RADIO TEST REPORT

No. 606442R1

EQUIPMENT UNDER TEST

Equipment:

Fixed Reader

Type / model:

CG-FR03

Manufacturer:

Low volume

High volume

AB Distatic Gotlundagatan 2-4 Bandhagen S-124 71 GE Security, Tualatin 12345 SW Leveton Drive Tualatin, OR 97062-6001

Sweden

USA

Tested by request of:

GE CommerceGuard AB

SUMMARY

The equipment complies with the requirements of the following standards:

FCC, Part 15, Subpart B (2005) and Subpart C (2005); RSS-210, Issue 6 (September 2005); RSS-Gen, Issue 1 (September 2005).

Industry Canada listed test facility No. IC 3481

This test report replaces earlier issued test report with the same ref. no. dated 2006-07-13 due to editorial corrections.



Date of issue: 2006-09-27



Tested by: Approved by:



Björn Utermöhl

Lars-Olov Johansson



This report may not be reproduced other than in full, except with the prior written approval by SEMKO.





Intertek Semko AB



CONTENTS

	Pag
1. Client information	3
2. Equipment under test (EUT) 2.1 Identification of the EUT according to the manufacturer/client declaration 2.2 Additional hardware information about the EUT 2.3 Additional software information about the EUT 2.4 Peripheral equipment 2.5 Modifications during the test	3 4 4
3. Test specifications 3.1 Standards 3.2 Additions, deviations and exclusions from standards 3.3 Test set-up 3.4 Operating environment	5 5
4.Test summary	6
5. Peak output power	7
6. 6 dB Bandwidth	
7. Band edge compliance (Conducted measurements)	10 10
11. Power spectral density	
12. Radiated spurious emissions 12.1 Measurement uncertainty 12.2 Test equipment 12.3 Measurement set-up 12.4 Test protocol 12.5 Duty cycle calculations	12 12 13 15
13. Conducted spurious emissions at antenna port	20
14. Conducted disturbance voltage in the frequency range 0,15 - 30 MHz	21 21 21
Appendix I – Photos of the EUT	23













1. CLIENT INFORMATION

The EUT has been tested by request of

Company:

GE CommerceGuard AB

Name of contact:

Gustavslundsvägen 151A S-167 51 Bromma, Sweden

Contact: Ola Myrin, Project Manager Telephone: +46 (709) 2221 85 E Mail: ola.myrin@allset.se

2. EQUIPMENT UNDER TEST (EUT)

2.1 Identification of the EUT according to the manufacturer/client declaration

Equipment:

Fixed Reader

Type/Model:

CG-FR03

Brand name:

CommerceGuard Fixed Reader

Manufacturer (low volume):

AB Distatic

Gotlundagatan 2-4 Bandhagen S-124 71

Sweden

Manufacturer (high volume):

GE Security, Tualatin 12345 SW Leveton Drive Tualatin, OR 97062-6001

USA

Rating/Supplying voltage:

9V DC

Rating RF output power (conducted):

2.2 dBm

Antenna gain:

14 dBi or lower

External antenna connector:

Yes

Operating temperature range:

-20 to +60 °C

Frequency range:

2400 - 2483,5 MHz

Number of channels:

1 channel at 2440 MHz

Modulation characteristics:

OFDM

Stand by mode supported:

Yes













2.2 Additional hardware information about the EUT

The EUT consists of the following units:

Unit

Type and version information on label Serial number on

label

Used for

Fixed reader

Label only states "TX"

Fixed reader

Label only states "RX"

Unit used for TX mode tests

Antenna

Hyperlink Technologies

No serial number printed on label

Unit used for RX mode tests

Model WGEI900-0002 Gain: 14 dBi

Hyperlink Technologies

No serial number

Inject supplying DC power to the

Passive PoE Injector

Model BT-CAT5-P1

printed on label

Fixed Reader via Ethernet Cable

2.3 Additional software information about the EUT

During the tests the EUT supported the following software:

Software

Version

Comment

CRUE-TRA1

R1A

Used to set the Fixed reader to continuously

transmit at maximum output power.

CRUE-REC

R1A

Used to set the Fixed reader to continuously

receive

2.4 Peripheral equipment

Peripheral equipment is defined as equipment needed for correct operation of the EUT during the tests, but not included as a part of the testing and evaluation of the EUT.

Equipment

Manufacturer / Type

Serial number

AC-DC adaptor

Nordic Power

Model:0052L-090050

No serial number printed

Input: AC 100-240V 50/60Hz 180mA

Output: DC 9V 500mA

on label

2.5 Modifications during the test




One reader unit was supplied from the manufacturer with software to continuously transmit at maximum output power. (Measurements called "TX mode" in this report)



One reader unit was supplied from the manufacturer with software to continuously receive. (Measurements called "RX mode" in this report)











3. TEST SPECIFICATIONS

3.1 Standards

FCC 47 CFR part 15 (2005) Subpart B – Unintentional radiators FCC 47 CFR part 15 (2005) Subpart C – Intentional Radiators; §15.247 Operation within the bands 902-928 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz.

Measurements methods according to ANSI C63.4-2003

RSS-210, Issue 6 (September 2005): Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment.

RSS-Gen, Issue 1 (September 2005): General Requirements and Information for the Certification of Radiocommunication Equipment.

3.2 Additions, deviations and exclusions from standards

No additions, deviations or exclusions have been made from standards.

3.3 Test set-up

Measurement set-ups for the test of conducted disturbance voltage in the frequency range 0,15-30 MHz and out-of-band spurious emissions test are described in corresponding sections. During other tests the EUT was connected to the spectrum analyser by cable.

3.4 Operating environment

If not additionally specified, the tests were performed under the following environmental conditions:

Air temperature:

20 - 26 °C

Relative humidity:

30 - 60 %













4. TEST SUMMARY

The results in this report apply only to the sample tested.

FCC reference	Industry Canada reference	Test	Result	Note
15.247(b)	A8.4(2)	Peak output power	PASS	1
15.247(a)	A8.1(1)	6 dB Bandwidth	PASS	1
15.247	A8.1	Band edge compliance	PASS	1
15.247(e)	A8.2	Power spectral density	PASS	1
15.247(d)	2.7, A2.9(1), A8.5	Out of band spurious emissions, radiated	PASS	1
15.247(d)	2.7, A8.5	Out of band spurious emissions, conducted	PASS	1
15B	6 (a)(Table1)	Out of band spurious emissions, radiated	PASS	2
15B	7.2.2 (Table 2)	Conducted emission at AC port	PASS	2

Notes:

1. Industry Canada reference: RSS-210, Issue 6 (September 2005)

2. Industry Canada reference: RSS-Gen, Issue 1 (September 2005)













5. PEAK OUTPUT POWER

5.1 Test protocol

Date of test: 2006-07-07

EUT mode of operation: TX.

The peak output power was measured at the antenna port.

The EUT can be equipped with a 14dBi antenna. According to 15.247(b)(4) the limit of 30 dBm (1Watt) is reduced by 8 dB to 22 dBm since the antenna gain is 8 dB above 6 dBi.

Spectrum analyzer settings:

Span: 10 MHz RBW: 3 MHz VBW: 3 MHz Sweep time: Auto Detector: Peak Trace: Max Hold

Channel (MHz)	Peak Output Power (dBm)	Limit value (dBm)
2440	2.2	22

Measurement results are corrected for attenuations in the set-up.

Example calculation:

Peak output power [dBm] = Analyser reading [dBm] + cable loss [dB] + attenuator loss [dB]













5.2 MPE calculations

Directives

OET Bulletin 65, supplement C RSS 102 (Issue 2), November 2005

Calculations

EIRP = Peak Power to the Antenna port [dBm] + Maximum Antenna gain [dBi]

The product has a duty cycle (dc) of less than 40 % according to the manufacturer. The manual recommends that the operator is not closer than (r) 20 cm to the transmitter's antenna.

A worst case calculation is as follows:

$$S = \frac{4 \times dc \times EIRP}{4 \times \pi \times r^2}$$
 (Power density with 100 % reflection)

$$S = 4 \times 0.4 \times 42 / (4 \times \pi \times 20^{2}) = 0.013 \text{ mW/cm}^{2}$$

Reference level limit according to OET Bulletin 65, supplement C and RSS 102 for power density at 2400 MHz is 1 mW/cm².

Considering the calculations above it is determined that the requirements according to the referred directive are fulfilled without further testing.













6. 6 dB BANDWIDTH

6.1 Test protocol

Date of test: 2006-06-02

EUT mode of operation: TX.

Spectrum analyzer settings:

Span: 25 MHz RBW: 30 kHz VBW: 30 kHz Sweep time: Auto Detector: Peak Trace: Max Hold

Ref Lvl	Delta :	-	26 dB	RBW VBW	30 k		F Att 10	đВ
10 dBm	1:	1.022044	09 MHz	Sw't	70 π	ns Ur	nit	₫Bm
21.3 dB Offs	et.				w ₁	[T1]	-3.88 2.43718236	
1		7]]	1 1	Δ ²		-10.26 1.02204409 -0.46	MHE
-10						2	4.00801603	
-20 1MAE		WW						IMA
-30) • · ·	•				· ////		EXT
-40							M	
-50								
-70								
-80								
Center 2.44116	5331 GH:	z	2.5	MHz/		,	Span 25	MHz

Date:

2.JUN.2006 11:17:28
















7. BAND EDGE COMPLIANCE (CONDUCTED MEASUREMENTS)


7.1 Test protocol

Date of test: 2006-07-07


EUT mode of operation: TX

Measured with spectrum analyzer connected to the antenna port of th EUT.

Sweep with peak detector measuring the highest emission in the TX band.

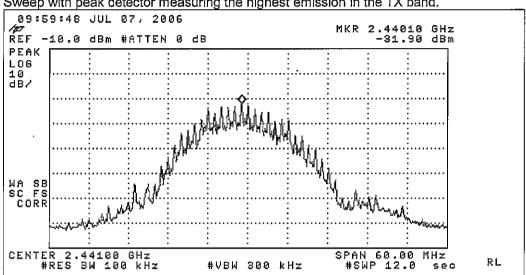

Sweep with peak detector measuring emissions outside the TX band (limit line is 20dB below the highest emission in the TX band)

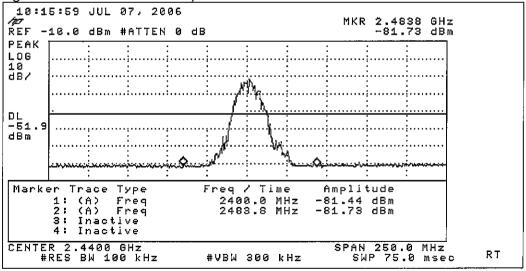













11. POWER SPECTRAL DENSITY

11.1 Test protocol

Date of test: 2006-07-07

EUT mode of operation: TX.


The power spectral density was measured at the antenna port with a spectrum analyzer.

Spectrum analyzer settings:

Span: 1 MHz RBW: 3 kHz VBW: 10 kHz Sweep time: Auto Detector: Peak Trace: Max Hold

Plot

21.3dB reference level offset to compensate for attenuations in the measurement setup

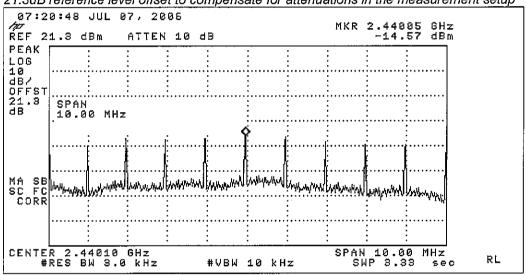

Channel	Peak Power Spectral	Limit value
	Density	
(MHz)	(dBm)	(dBm)
2402	-14.6	< 8
_ : •	. 11-	



Measurement results are corrected for attenuations in the set-up configuration.



Example calculation:



Peak output power [dBm] = Analyser reading [dBm] + cable loss [dB] + attenuator loss [dB]







12. RADIATED SPURIOUS EMISSIONS

12.1 Measurement uncertainty

Radiated disturbance electric field intensity, 30 - 1000 MHz: $\pm 4,6$ dB Radiated disturbance electric field intensity, 1000 - 18000 MHz: $\pm 6,0$ dB

The measurement uncertainty describes the overall uncertainty of the given measured value during operation of the EUT.

Measurement uncertainty is calculated in accordance with EA-4/02-1997. The measurement uncertainty is given with a confidence of 95%.

12.2 Test equipment

Equipment	Manufacturer	Type	SEMKO No.
Test site: Semi-anechoic shield	30300		
Software:	Rohde & Schwarz	ES-K1, V1.71	
Measurement receiver:	Rohde & Schwarz	ESAI	2973/2974
Antenna amplifier: Antenna, bilog:	SEMKO Chase	CBL6111A	7992/7993 971
Test site: Bluetooth anechoic s	12285		
Software: Signal analyser:	Rohde & Schwarz Rohde & Schwarz	ES-K1, V1.70 FSIQ 40	40023
Preamplifier:	MITEQ	AFS6/AFS44	12335
Antennas: Double Ridge Guide Horn: Horn antenna: Horn antenna:	EMCO EMCO EMCO	3115 3160-08 3160-09	4936 30099 30101
Band rejection filter Transformer	K & L Tufvassons	6N45-2450/T 100-0/0 AFM-1500	12389 30317













12.3 Measurement set-up

Test site: Semi-anechoic shielded chamber (30 – 1000 MHz)


The radiated disturbance electric field intensity was measured in a semi-anechoic chamber at a distance of 10 m and the EUT was placed on a non-metallic table, 0,8 m above the reference ground plane. The specified test mode was enabled. Test set-up photos are given below.

An overview sweep with peak detection of the electric field intensity was performed with the measurement receiver in max-hold and with the antenna placed 1,5 m, 2,5 m and 3,5 m above the floor. The polarisation was horizontal and vertical. The measurements were repeated with the EUT rotated in 90-degree steps.

At the frequencies where high disturbance levels were found a search for max disturbance level was performed. With the EUT and antenna in the worst-case configuration new measurements with quasi-peak detector were carried out.

The EUT was supplied with 120 V AC (60 Hz) during the test.

Test set-up photo:

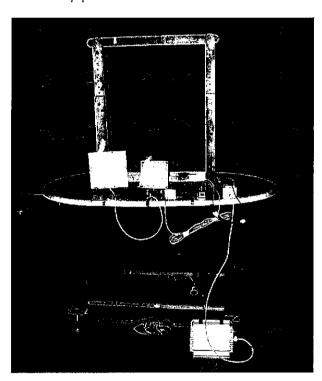













Test site: Bluetooth anechoic shielded chamber (1 - 26 GHz)


In the Bluetooth anechoic chamber the EUT was placed on a non-metallic table, 1,4 m above the floor. The radiated disturbance electric field intensity was measured at a distance of 3 m. The specified test mode was enabled.

An overview sweep with peak detection of the electric field intensity was performed with the spectrum analyser in max-hold and with the antenna height adjusted at the level of the EUT center. The polarisation was horizontal and vertical. The measurements were repeated with the EUT rotated in 90-degree steps.

At the frequencies where high disturbance levels were found a search for max disturbance level was performed. With the EUT and antenna in the worst-case configuration new measurements with peak and average detectors were carried out.

The EUT was supplied by 120 V AC (50 Hz) during the test.

Test set-up photo:

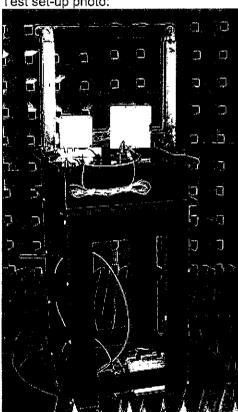













12.4 Test protocol

Semi-anechoic shielded chamber

Date of test: 2006-05-19

 $30-1000\ \text{MHz}$, max peak at a distance of 10 m in TX mode

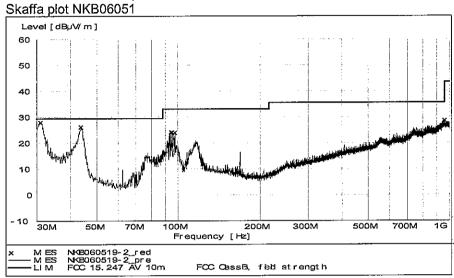

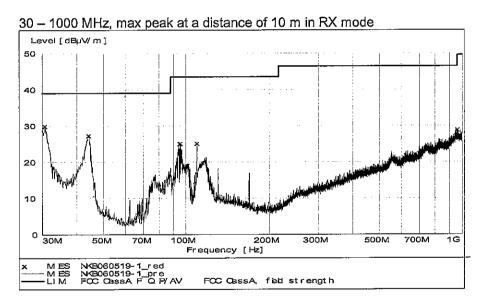














Bluetooth anechoic shielded chamber

Date of test: 2006-05-24

1000 – 13000 MHz, max peak at a distance of 3 m in TX mode

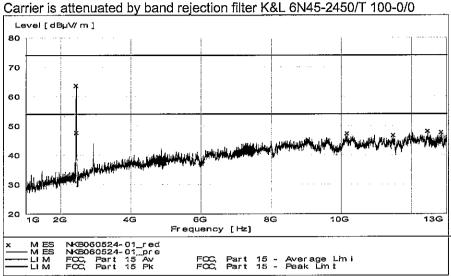



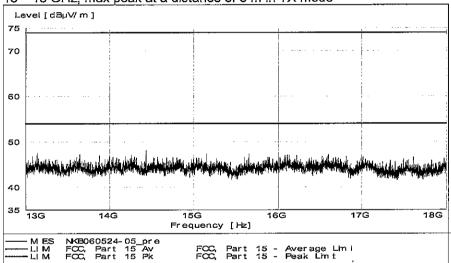













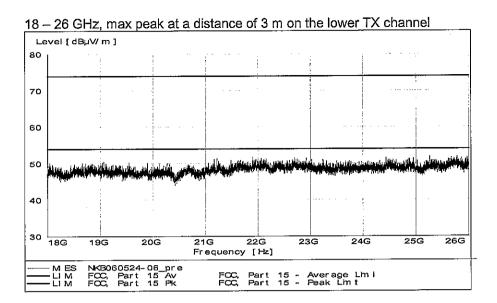

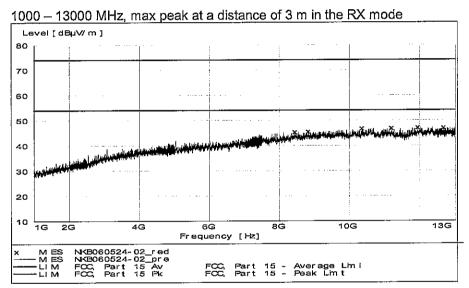













Data summary (TX mode)

	Field strength of spurious emissions					
Frequency	RBW	Meas	sured	Limit		Note
		level				
		Peak	QP/AV	Peak	QP/AV	
[MHz]	[kHz]	[dB(µV/m)]	[dB(μV/m)]	[dB(μV/m)]	$[dB(\mu V/m)]$	
31,1	120		21,2	-	29,5	10 m distance
43,7	120	-	19,4		29,5	10 m distance
95,5	120	-	20,7		33	10 m distance
97,7	120	-	21,0	-	33	10 m distance
216 – 960	120	< 28	1		35,6	Noise floor
960 – 1000	120	< 29	-	-	43,5	Noise floor
2928,4	1000	46,9	-	74	54	3 m distance
4869,3	1000	44,1	-	74	54	3 m distance
4880,9	1000	43,8	-	74	54	3 m distance
4892,2	1000	42,7		74	54	3 m distance
13000 - 18000	1000	< 48	-	74	54	Noise floor
18000 - 26000	1000	< 52	H	74	54	Noise floor

Data summary (RX mode)

Field strength of spurious emissions						
Frequency	RBW	Measured level		Lin	nit*	Note
		Peak	QP/AV	Peak	QP/AV	
[MHz]	[kHz]	[dB(µV/m)]	[dB(µV/m)]	[dB(μV/m)]	[dB(μV/m)]	
30,7	120	-	22,0	-	39,1	10 m distance
44,3	120	-	20,0	-	39,1	10 m distance
94,2	120	_	22,1	_	39,1	10 m distance
110,0	120		24,1	_	43,5	10 m distance
960 - 1000	120	< 29	1	-	49,5	10 m distance,
						Noise floor
1000 – 13000	1000	< 48	-	80	60	3 m distance, noise floor

^{*} The limit is for Class A equipment.

Example calculation:

Measured level [dB μ V/m] = Analyser reading [dB μ V] + cable loss [dB] – preamplifier gain [dB] + antenna factor [1/m]














12.5 Duty cycle calculations

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEEP function on the analyzer was set to ZERO SPAN. The transmitter ON time was determined from the resultant time-amplitude display:

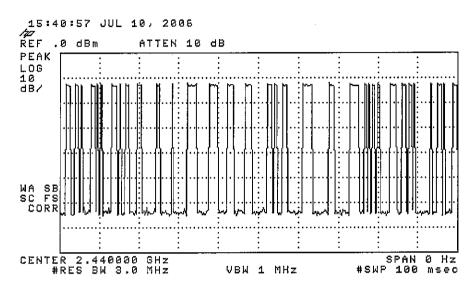

RL

Counting the ON and OFF samples in this sweep gives a 39,15 % duty cycle.

This gives a correction factor of 20 * log_{10} (0,3915) dB = -8,2 dB













13. CONDUCTED SPURIOUS EMISSIONS AT ANTENNA PORT

13.1 Measurement uncertainty

Measurement uncertainty for conducted disturbances at the antenna port: ± 3,6 dB

The measurement uncertainty describes the overall uncertainty of the given measured value during operation of the EUT. Measurement uncertainty is calculated in accordance with EA-4/02-1997. The uncertainty is given with a level of confidence of approximately 95% (k=2).

13.2 Test protocol

Date of test: 2006-07-07

	Strength of conducted spurious emissions						
Frequency [MHz]	RBW [kHz]	Measured peak level [dBm]	Limit* [dBm}	Note			
30 - 500	100	< -83	-51,9	Noise floor			
500 - 1000	100	< -83	-51,9	Noise floor			
1000 - 2000	100	< -82	-51,9	Noise floor			
2000 - 2400	100	< -82	-51,9	Noise floor			
2483,5 - 2700	100	< -80	-51,9	Noise floor			
2700 - 5000	100	< -80	-51,9	Noise floor			
5000 - 10000	100	< -74	-51,9	Noise floor			
10000 - 15000	100	< -71	-51,9	Noise floor			
15000 - 20000	100	< -66	-51,9	Noise floor			
20000 - 25000	100	< -65	-51,9	Noise floor			

^{*} Measured level of emission in the operating frequency band is equal to -18,4 dBm.

<u>Limit:</u> In any 100 kHz bandwidth outside the operating frequency band (2400 – 2483,5 MHz), the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Measurement results are corrected for attenuation in the set-up configuration and antenna gain declared by the manufacturer.

Example calculation:

Measured level [dB(μ V)] = Analyser reading [dB(μ V)] + cable loss [dB] + EUT antenna gain [dBi]













14. CONDUCTED DISTURBANCE VOLTAGE IN THE FREQUENCY RANGE 0,15 - 30 MHZ

14.1 Measurement uncertainty

Conducted disturbance voltage, quasi-peak detection:

±2.0 dB

The measurement uncertainty describes the overall uncertainty of the given measured value during operation of the EUT.

Measurement uncertainty is calculated in accordance with EA-4/02-1997. The measurement uncertainty is given with a confidence of 95%.

14.2 Test equipment

Test site:	FCC		
Equipment	Manufacturer	Туре	SEMKO No.
Software:	Rohde & Schwarz	ES-K1 V1.60	
Measurement receiver:	Rohde & Schwarz	ESHS 30	4946
Artificial mains network:	Rohde & Schwarz	ESH3-Z5	2727
Transformer	Tufvassons	AFM-1500	30317

14.3 Measurement set-up

The mains terminal disturbance voltage was measured with the EUT located 0,8 m above the ground plane and 0,4 m from the vertical ground plane. The EUT was connected to an artificial mains network (AMN). The AMN was placed on the ground plane. Amplitude measurements were performed with a quasi-peak detector. The EUT was supplied by 120 VAC (60 Hz) during the test.

Test set-up photo:
















14.4 Test protocol

Date of test: 2006-06-19

	Quasi-Peak			
Frequency	Disturbance Level	Permitted limit		
/MHz	/dB(µV)	/dB(µV)		
0,275	54,7	79		
0,800	42,6	73		
1,695	47,7	_73		
3,370	55,1	73		
6,960	34,2	73		
13,125	33,3	73		
27,160	44,2	73		

Overview sweeps performed with peak and average detectors

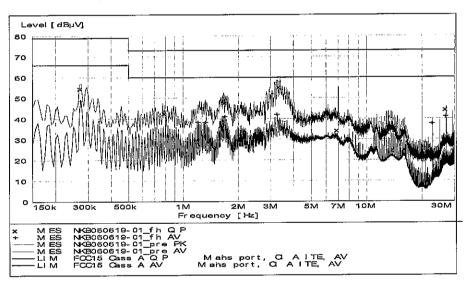















APPENDIX I - PHOTOS OF THE EUT


EUT, front side



EUT (TX unit), lower side



EUT (RX unit), lower side

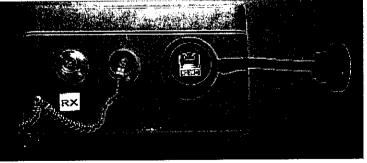















Antenna, front side



Antenna, back side



Antenna, identification label
















PoE Injector



PoE Injector, identification label











