FCC TEST REPORT

FCC ID : UAJVIDEO-FC-FM

Applicant : **EFORCITY CORPORATION**

Address : 12339 Denholm Drive El Monte, California 91770 U.S.A

Equipment Under Test (EUT):

Product Name : FM Transmitter

Model No. : VIDEO-FC-FM

Standards : FCC 15 Paragraph 15.203, Paragraph 15.205, Paragraph 15.209,

Paragraph 15.31, Paragraph 15.33, Paragraph 15.35, Paragraph 15.239

Date of Test : May 25, 2006

Test Engineer : Tiger Su

Reviewed By : Thelo 2hous

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen518045, Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

2 Contents

			Page
1		COVER PAGE	
2	C	CONTENTS	2
3	T	TEST SUMMARY	5
4	(GENERAL INFORMATION	6
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF E.U.T.	
	4.3	DETAILS OF E.U.T.	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	STANDARDS APPLICABLE FOR TESTING TEST FACILITY	
	4.6 4.7	TEST FACILITY	
5		EQUIPMENT USED DURING TEST	
6		CONDUCTED EMISSION TEST	
	6.1	TEST EQUIPMENT	
	6.2	TEST PROCEDURE	
	6.3 6.4	EUT OPERATING CONDITION	
	6.5	CONDUCTED EMISSION LIMITS	
	6.6	CONDUCTED EMISSION TEST RESULT	
7	F	RADIATION EMISSION TEST	
	7.1	TEST EQUIPMENT	12
	7.2	MEASUREMENT UNCERTAINTY	
	7.3	TEST PROCEDURE	12
	7.4	RADIATED TEST SETUP	
	7.5	SPECTRUM ANALYZER SETUP	
	7.6	CORRECTED AMPLITUDE & MARGIN CALCULATION	
	7.7	SUMMARY OF TEST RESULTSEUT OPERATING CONDITION	
	7.8 7.9	RADIATED EMISSIONS LIMIT	
	7.10		
8		BAND EDGE	
	8.1	TEST EQUIPMENT	
	8.2	TEST PROCEDURE	
		RADIATED TEST SETUP	
	8.3	EUT OPERATION	
	8.4	BAND EDGE LIMIT	
	8.5	BAND EDGE TEST RESULT	
9	P	PHOTOGRAPHS OF TESTING	
	9.1	RADIATION EMISSION TEST VIEW	21

10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	22
10.1 EUT - Front View	22
10.2 EUT - BACK VIEW	22
10.3 PCB 1-Front View	23
10.4 PCB 1-BACK VIEW	23
10.5 PCB 2 – FRONT VIEW	24
10.6 PCB 2 - BACK VIEW	24
11 FCC ID LABEL	25

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

4 General Information

4.1 Client Information

Applicant: **EFORCITY CORPORATION**

Address of Applicant: 12339 Denholm Drive El Monte, California, 91770 U.S.A

Manufacturer: POTO TECHNOLOGY CO., LTD

Address of Manufacturer: Industrial Yin Hu, Jio-Yi Tang, Tang-Xia Town, Dong Guan,

Guang dong

4.2 General Description of E.U.T.

Product Name: FM Transmitter

Model No.: VIDEO-FC-FM

4.3 Details of E.U.T.

Power Supply: 12.0 VDC Battery

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a FM Transmitter. The standards used were FCC 15 Paragraph 15.209 and Paragraph 15.239.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC – Registration No.: 759357

Solid Industrial (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 759357, November 04, 2003.

4.7 Test Location

All Emissions testswere performed at:-

Solid Industrial (Shenzhen) Co., Ltd. at 333 Bulong Highway Buji Longgang, Shenzhen, Guangdong, China.

Its' VCCI – Registration No.: 2153

5 Equipment Used during Test

Equipment	Brand Name	Model	Cal. Int Months	Last Cal. Date
3m Anechoic chamber				
EMC Analyzer	Agilent	E7402A	12	2005-08
EMI Test Receiver	R&S	ESS	12	2005-08
Pre Amplifier	Anritsu	MH648A	12	2005-08
Bilog Antenna	SCHAFFNER	CBL6111C	12	2005-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2005-08
Signal Generator	R&S	SMG	12	2005-08
RF Selector	TOYO	NS4901A	N/A	N/A
Turn Disc	HD	DS4150S	N/A	N/A
Antenna Mast	HD	MA2400	N/A	N/A
Stereo radio cassette recorder	AIWA	HS-JL958	N/A	N/A
Battery	IP	12	N/A	N/A
EMI Shielded Room				
Spectrum analyzer	ADVANTEST	R3261C	12	2005-08
EMI Test Receiver	R&S	ESS	12	2005-08
Pre Amplifier	Anritsu	MH648A	12	2005-08
LISN	Kyoritsu	KNW-403D	12	2005-08
LISN	Kyoritsu	KNW-407	12	2005-08
Absorbing Clamp	R&S	MDS-21	12	2005-08
Absorbing Clamp	R&S	MDS-21	12	2005-08
Absorbing Clamp	Kyoritsu	KT-20	12	-
Distortion Meter	MEGURO	MAK-6578A	12	2005-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2005-08
Oscilloscope	LEADER	LS1020	12	2005-08
Function Generator	National	VP-7422A	12	2005-08
Signal Generator	R&S	SMG	12	2005-08

6 Conducted Emission Test

Product Name: FM Transmitter

Test Requirement: FCC Part15 Paragraph 15.207

Test Method: Based on FCC Part15 Paragraph 15.207

Test Date:

Frequency Range: 150kHz to 30MHz

Class B

Detector: Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak & Average if maximised peak within 6dB of

Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

- 1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
- 2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

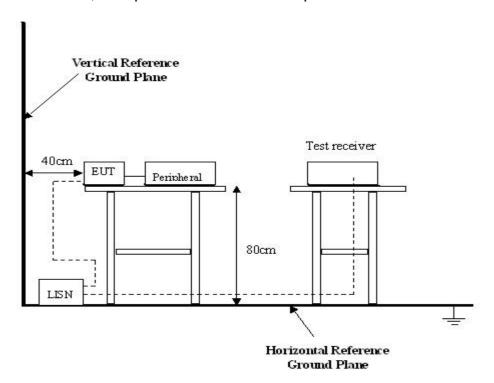

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

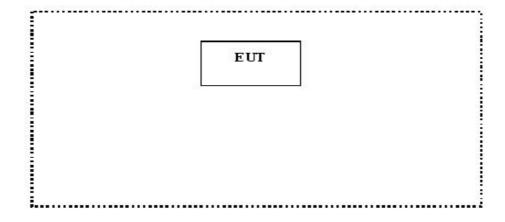

6.5 Conducted Emission Limits

 $66\text{-}56~dB\mu V/m$ between 0.15MHz & 0.5MHz $56~dB\mu V/m$ between 0.5MHz & 5MHz $60~dB\mu V/m$ between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Product Name: FM Transmitter

Test Requirement: FCC Part15 Paragraph 15.209 and Paragraph 15.239

Test Method: Based on FCC Part15 Paragraph 15.209 and Paragraph 15.239

Test Date: May 25,2006 Frequency Range: 30MHz to 1GHz

Measurement Distance: 3m

Detector: Peak for pre-scan (120kHz resolution bandwidth)

Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Solid EMC Laboratory is +4.0 dB.

7.3 Test Procedure

- 1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
- 2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
- 3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
- 4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.239 limits.

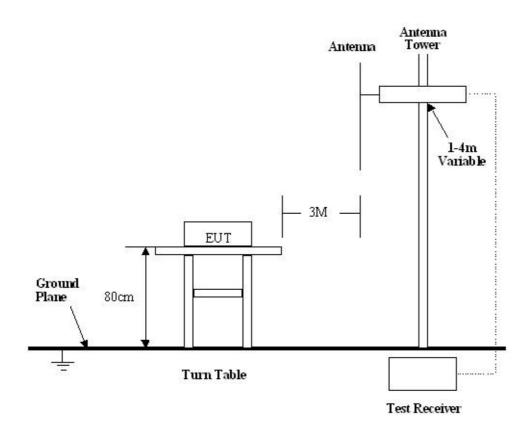

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209 and Paragraph 15.239 Rules, the system was tested to 1000 MHz.

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed Auto	
IF Bandwidth	100 kHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-7dB\mu V$ means the emission is $7dB\mu V$ below the maximum limit for Class B. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – Class B Limit

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.239 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report. The EUT TX on mode and connected with the Stereo radio cassette recorder.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.239 Limit

Fundamental	Field Strength of Fundamental		
Frequency(MHZ)	uV/m	dBuV/m	
88-108	250	48	

Note: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)

- (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)

- (2) In the Above Table, the tighter limit applies at the band edges.
- (3) Distance refers to the distance in meters between the measuring instrument antenna.

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

7.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was egtablished by adding The meter reading of the spectrum analyer (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna Correction factors are stared in terms of dB. The gain of the pressletor was accounted For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

A. Fundamental Radiated Emission Data

Test Item: Fundamental Radiated Emission Data

Test Voltage: 12.0 VDC Battery

Test Mode: On TX mode and connected with the Stereo radio cassette

recorder.

Temperature: 24 °C Humidity: 52%RH Test Result: PASS

Frequency	Antenna	Emission	Limit	Margin	Antenna	Turntable
(MHz)	Polarization	Level (dBuV/m)	(dBuV/m)	(dB)	Height (m)	Angle (°C)
88.524	Vertical	42.53	48.00	5.47	1.5	180
88.524	Horizonta	39.80	48.00	8.20	1.5	150

Note: (1) All Reading are Peak Value.

- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.

B. General Radiated Emission Data

Test Item: General Radiated Emission Data

Test Voltage: 12.0 VDC Battery

Test Mode: On TX mode and connected with the Stereo radio cassette

recorder.

Temperature: 24 °C Humidity: 52%RH Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)
177.100	Horizontal	38.0	43.5	5.5	1.5	120
265.600	Horizontal	40.6	46.0	5.4	1.2	80
354.098	Horizontal	38.5	46.0	7.5	1.8	180
177.100	Vertical	37.6	43.5	5.9	2.0	90
265.600	Vertical	38.2	46.0	7.8	1.5	45
354.098	Vertical	37.6	46.0	8.4	1.2	180

Note: (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.

(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

8 Band Edge


8.1 Test Equipment

Please refer to Section 5 this report.

8.2 Test Procedure

- 1.The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.
- 2. The frequency spectrum from 30MHz to 1GHz was investigated. All reading from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120KHz. All reading are above 1GHz, peak values with a resolution bandwidth of 1MHz. Measurements were made at 3 meters.
- 3. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
- 4. Maximizing procedure was performed on the highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak reading was performed only when an emission was found to be marginal (within -4 dBμV of specification limits), and are distinguished with a "QP" in the data table.
- 5. The antenna polarization: Vertical polarization and horizontal polarization.

8.3 Radiated Test Setup

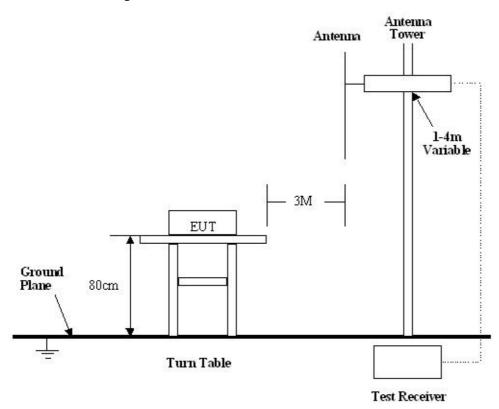

8.3 EUT Operation

Same as section 6.4 of this report.

8.4 Band Edge Limit

Attenuation below the general limits specified in setction 15.231 (e) is not required .Inaddition, radiated emissions which fall in the restricted bands, as defined in Section15.231(e), must also comply with the radiated emission limits specified in Section15.231(e).

8.5 Band Edge Test Result

Product Name: FM Transmitter
Test Item: Band Edge Test
Test Voltage: 12.0 VDC Battery


Test Mode: TX ON
Temperature: 24 °C
Humidity: 52%RH



- **Note:** (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
 - (2) The average measurement was not performed when the peak measured data under the limit of average detection.


9 Photographs of Testing

9.1 Radiation Emission Test View

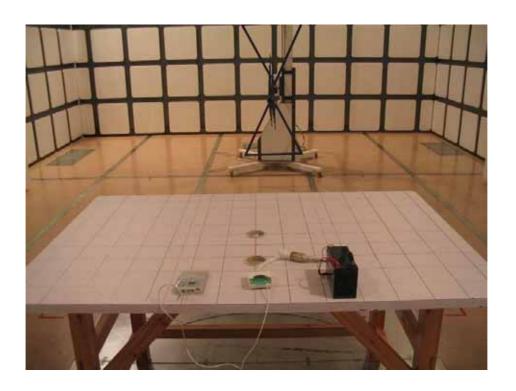

10 Photographs - Constructional Details


10.1 EUT - Front View

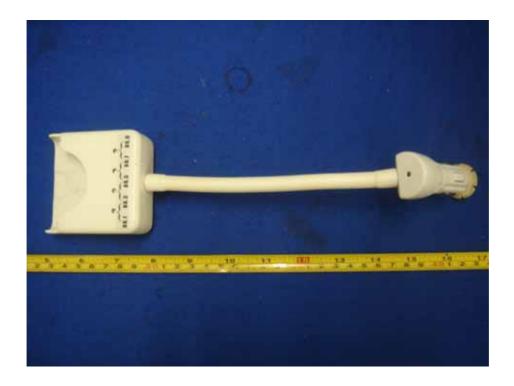


10.2 EUT - Back View




10.3 PCB 1-Front View

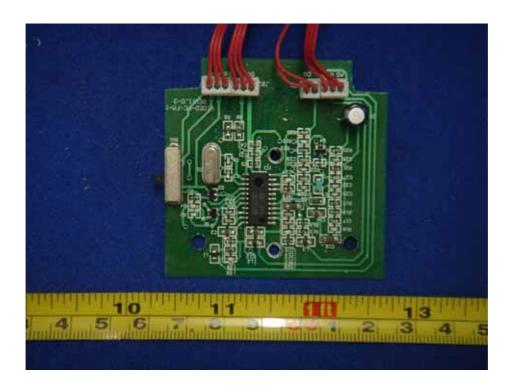


10.4 PCB 1-Back View

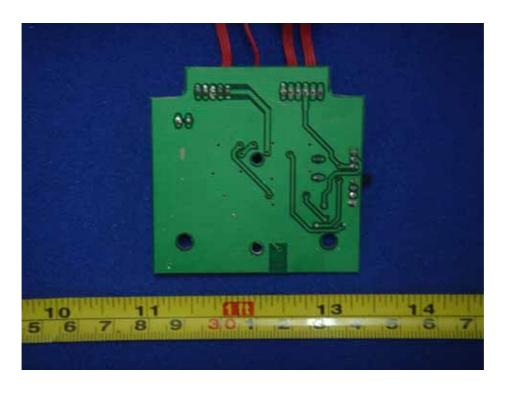

10.5 PCB 2 – Front View

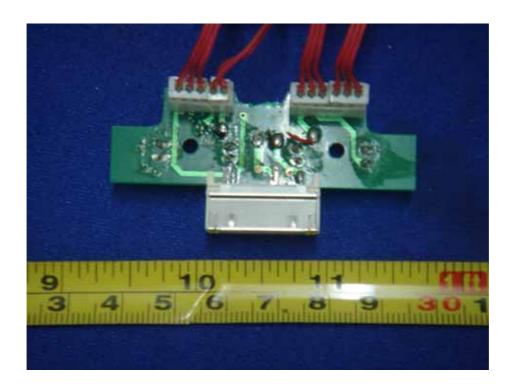

10.6 PCB 2 - Back View

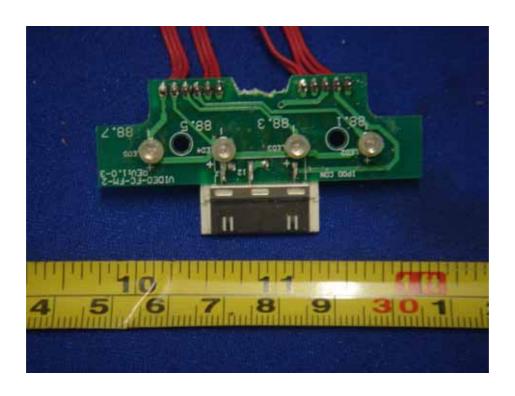

11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2)this device must accept any interference received, including interference that may cause undesired operation. The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

