# FCC TEST REPORT

FCC ID : UAKSM-902

**Applicant** : Shenzhen Sen Jin Zhe Electronics Co.,Ltd.

Zhenyingtai Park, Hebei Industrial Zone, Sanlian, Longhua

Town, Shenzhen, China

**Equipment Under Test (EUT):** 

Product description : Wireless Optical Mouse

Model No. : SM-902

Standards : FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.227,

Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

**Date of Test** : May 29, 2006

**Test Engineer** : Tiger Su

Reviewed By : Thelo 2hous

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen518045, Guangdong, China.

Tel: 86-755-83551033 Fax: 86-755-83552400

# 2 Contents

|   |             |  | Page |
|---|-------------|--|------|
| 1 | C           | COVER PAGE                               | 1    |
| 2 | C           | CONTENTS                                 | 2    |
| _ |             |  |      |
| 3 | T           | EST SUMMARY                              | 3    |
| 4 | G           | GENERAL INFORMATION                      | 4    |
|   | 4.1         | CLIENT INFORMATION                       |      |
|   | 4.2         | GENERAL DESCRIPTION OF E.U.T.            |      |
|   | 4.3         | DETAILS OF E.U.T.                        |      |
|   | 4.4         | DESCRIPTION OF SUPPORT UNITS             |      |
|   | 4.5         | STANDARDS APPLICABLE FOR TESTING         |      |
|   | 4.6         | TEST FACILITY                            | 5    |
|   | 4.7         | TEST LOCATION                            | 5    |
| 5 | E           | QUIPMENT USED DURING TEST                | 6    |
| 6 | •           | CONDUCTED EMISSION TEST                  | -    |
| 0 | C           |  |      |
|   | 6.1         | TEST EQUIPMENT                           |      |
|   | 6.2         | TEST PROCEDURE                           |      |
|   | 6.3         | CONDUCTED TEST SETUP                     |      |
|   | 6.4         | EUT OPERATING CONDITION                  |      |
|   | 6.5         | CONDUCTED EMISSION LIMITS                |      |
|   | 6.6         | CONDUCTED EMISSION TEST RESULT           |      |
| 7 | R           | RADIATION EMISSION TEST                  | 10   |
|   | 7.1         | TEST EQUIPMENT                           | 10   |
|   | 7.2         | MEASUREMENT UNCERTAINTY                  |      |
|   | 7.3         | TEST PROCEDURE                           |      |
|   | 7.4         | RADIATED TEST SETUP                      |      |
|   | 7.5         | SPECTRUM ANALYZER SETUP                  |      |
|   | 7.6         | CORRECTED AMPLITUDE & MARGIN CALCULATION |      |
|   | 7.7         | SUMMARY OF TEST RESULTS.                 |      |
|   | 7.8<br>7.9  | EUT OPERATING CONDITION                  |      |
|   | 7.9<br>7.10 |  |      |
| 8 |             | OCCUPIED BANDWIDTH                       |      |
| 0 |             |  |      |
|   | 8.1         | TEST PROCEDURE                           | 17   |
| a | TC.         | CC IN LADEL                              | 10   |

# **3** Test Summary

| Test                                 | Test Requirement  | Test Method      | Class / Severity | Result |
|--------------------------------------|-------------------|------------------|------------------|--------|
| Radiated Emission (25MHz to 1GHz)    | FCC PART 15: 2003 | ANSI C63.4: 2003 | Class B          | PASS   |
| Conducted Emission (150KHz to 30MHz) | FCC PART 15: 2003 | ANSI C63.4: 2003 | Class B          | N/A    |

#### FCC ID: UAKSM-902

# 4 General Information

### 4.1 Client Information

Applicant: Shenzhen Sen Jin Zhe Electronics Co.,Ltd.

Address: Zhenyingtai Park, Hebei Industrial Zone, Sanlian, Longhua

Town, Shenzhen, China

Manufacturer: Shenzhen Sen Jin Zhe Electronics Co.,Ltd.

Address: Zhenyingtai Park, Hebei Industrial Zone, Sanlian, Longhua

Town, Shenzhen, China

# 4.2 General Description of E.U.T.

Product description: Wireless Optical Mouse

Model No.: SM-902

### 4.3 Details of E.U.T.

Power Supply: Transmitter: 3.0VDC Battery

## 4.4 Description of Support Units

The EUT has been tested as an independent device unit.

# 4.5 Standards Applicable for Testing

The customer requested FCC tests for a Wireless Optical Mouse. The standards used were FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.227, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

#### FCC ID: UAKSM-902

### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

# • FCC – Registration No.: 759357

Solid Industrial (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 759357, November 04, 2003.

### 4.7 Test Location

All Emissions testswere performed at:-

Solid Industrial (Shenzhen) Co., Ltd. at 333 Bulong Highway Buji Longgang, Shenzhen, Guangdong, China.

Its' VCCI - Registration No.: 2153.

# 5 Equipment Used during Test

| Equipment                        | Brand Name | Model     | Cal. Int Months | Last Cal. Date |
|----------------------------------|------------|-----------|-----------------|----------------|
| 3m Anechoic chamber              |            |           |                 |                |
| EMC Analyzer                     | Agilent    | E7402A    | 12              | 2005-08        |
| EMI Test Receiver                | R&S        | ESS       | 12              | 2005-08        |
| Pre Amplifier                    | Anritsu    | MH648A    | 12              | 2005-08        |
| Bilog Antenna                    | SCHAFFNER  | CBL6111C  | 12              | 2005-08        |
| LOOP Antenna                     | R&S        | 6108      | 12              | 2005-08        |
| AM/FM Stereo Signal<br>Generator | Panasonic  | VP-8122A  | 12              | 2005-08        |
| Signal Generator                 | R&S        | SMG       | 12              | 2005-08        |
| RF Selector                      | TOYO       | NS4901A   | -               | -              |
| Turn Disc                        | HD         | DS4150S   | -               | -              |
| Antenna Mast                     | HD         | MA2400    | -               | -              |
| EMI Shielded Room                |            |           |                 |                |
| Spectrum analyzer                | ADVANTEST  | R3261C    | 12              | 2005-08        |
| EMI Test Receiver                | R&S        | ESS       | 12              | 2005-08        |
| Pre Amplifier                    | Anritsu    | MH648A    | 12              | 2005-08        |
| LISN                             | Kyoritsu   | KNW-403D  | 12              | 2005-08        |
| LISN                             | Kyoritsu   | KNW-407   | 12              | 2005-08        |
| LISN                             | Kyoritsu   | KNW-242C  | 12              | 2005-08        |
| Absorbing Clamp                  | R&S        | MDS-21    | 12              | 2005-08        |
| Absorbing Clamp                  | R&S        | MDS-21    | 12              | 2005-08        |
| Distortion Meter                 | MEGURO     | MAK-6578A | 12              | 2005-08        |
| AM/FM Stereo Signal              | Panasonic  | VP-8122A  | 12              | 2005-08        |
| Generator                        |            |           |                 |                |
| Oscilloscope                     | LEADER     | LS1020    | 12              | 2005-08        |
| Function Generator               | National   | VP-7422A  | 12              | 2005-08        |
| Signal Generator                 | R&S        | SMG       | 12              | 2005-08        |
| RF Selector                      | TOYO       | NS4000    | -               | -              |

## 6 Conducted Emission Test

Product Name: Wireless Optical Mouse

Test Requirement: FCC Part15 Paragraph 15.207

Test Method: Based on FCC Part15 Paragraph 15.207

Test Date: .....

Frequency Range: 150kHz to 30MHz

Class B

Detector: Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak & Average if maximised peak within 6dB of

Average Limit

## 6.1 Test Equipment


Please refer to Section 5 this report.

### **6.2** Test Procedure

- 1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
- 2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

# **6.3** Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

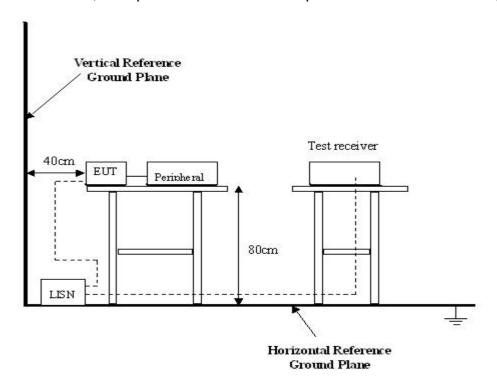

# **6.4 EUT Operating Condition**

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

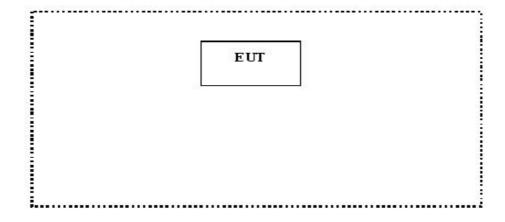

# 6.5 Conducted Emission Limits

 $66\text{-}56~dB\mu V/m$  between 0.15MHz~&~0.5MHz  $56~dB\mu V/m$  between 0.5MHz~&~5MHz  $60~dB\mu V/m$  between 5MHz~&~30MHz

**Note**: In the above limits, the tighter limit applies at the band edges.

## 6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

#### FCC ID: UAKSM-902

# 7 Radiation Emission Test

Product Name: Wireless Optical Mouse

Test Requirement: FCC Part15 Paragraph 15.209, Paragraph 15.227

Test Method: Based on FCC Part15 Paragraph 15.33

Test Date: May 29, 2006 Frequency Range: 25MHz to 1GHz

Measurement Distance: 3m

Detector: Peak for pre-scan (120kHz resolution bandwidth)

Quasi-Peak if maximised peak within 6dB of limit

### 7.1 Test Equipment

Please refer to Section 5 this report.

### 7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Solid EMC Laboratory is +4.0 dB.

### 7.3 Test Procedure

- 1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
- 2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
- 3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
- 4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

# 7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209, Paragraph 15.227 limits.

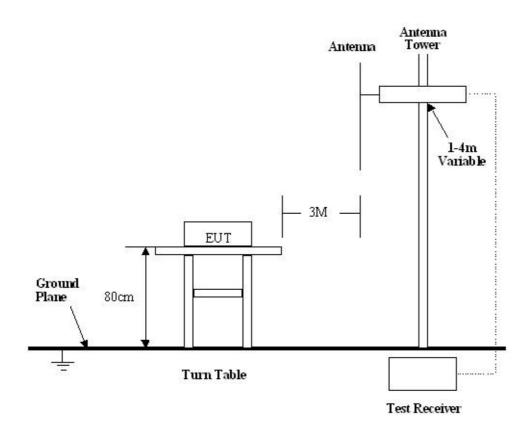

### 7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209, Paragraph 15.227 Rules, the system was tested to 1000 MHz.

| Start Frequency              | 25 MHz   |
|------------------------------|----------|
| Stop Frequency               | 1000 MHz |
| Sweep Speed Auto             |          |
| IF Bandwidth                 | 100 kHz  |
| Video Bandwidth              | 1 MHz    |
| Quasi-Peak Adapter Bandwidth | 120 kHz  |
| Quasi-Peak Adapter Mode      | Normal   |
| Resolution Bandwidth         | 1MHz     |

# 7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-7dB\mu V$  means the emission is  $7dB\mu V$  below the maximum limit for Class B. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – Class B Limit

# 7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.227 standards.

# 7.8 EUT Operating Condition

Same as section 6.4 of this report.

## 7.9 Radiated Emissions Limit

# A. FCC Part 15 subpart C Paragraph 15.227 Limit

| Fundamental    | Field Strength of Fundamental |
|----------------|-------------------------------|
| Frequency(MHZ) | dBuV/m                        |
| 27.042         | 80                            |

**Note**:(1) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

# B. Frequencies in restricted band are complied to limit on Paragraph 15.209

|                |             | I                      |
|----------------|-------------|------------------------|
| Frequency(MHZ) | Distance(m) | Field strength(dBuV/m) |
| 30-88          | 3           | 40.0                   |
| 88-216         | 3           | 43.5                   |
| 216-960        | 3           | 46.0                   |
| Above 960      | 3           | 54.0                   |

**Note**: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)

- (2) In the Above Table, the tighter limit applies at the band edges.
- (3) Distance refers to the distance in meters between the measuring instrument antenna.

### 7.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was egtablished by adding The meter reading of the spectrum analyer (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna Correction factors are stared in terms of dB. The gain of the pressletor was accounted For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

### A. Fundamental Radiated Emission Data for 27.042MHz

Test Item: Fundamental Radiated Emission Data

Test Voltage: 3.0VDC Battery

Test Mode: TX On
Temperature: 24 °C
Humidity: 52%RH
Test Result: PASS

| Frequency<br>(MHz) | Antenna<br>Polarization | Emission<br>Level<br>(dBuV/m) | FCC 15<br>Subpart C<br>Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Turntable Angle (°) |
|--------------------|-------------------------|-------------------------------|--|----------------|--------------------------|---------------------|
| 27.042             | Vertical                | 65.33                         | 80.0                                     | 14.67          | 1.5                      | 60                  |
| 27.042             | Horizontal              | 61.75                         | 80.0                                     | 18.25          | 1.5                      | 120                 |

# **B.** General Radiated Emission Data

Test Item: General Radiated Emission Data

Test Voltage: 3.0VDC Battery

Test Mode: TX On
Temperature: 24 °C
Humidity: 52%RH
Test Result: PASS

| Frequency (MHz) | Antenna<br>Polarization | Emission<br>Level<br>(dBuV/m) | FCC 15 Subpart C Limit (dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Turntable Angle (°) |
|-----------------|-------------------------|-------------------------------|---------------------------------|----------------|--------------------------|---------------------|
| 54.084          | Horizontal              | 34.15                         | 40.0                            | 5.85           | 1.5                      | 140                 |
| 81.126          | Horizontal              | 18.80                         | 40.0                            | 21.20          | 1.8                      | 30                  |
| 108.200         | Horizontal              | 25.12                         | 43.5                            | 14.82          | 1.8                      | 60                  |
| 54.084          | Vertical                | 30.75                         | 40.0                            | 9.25           | 1.5                      | 60                  |
| 81.126          | Vertical                | 23.43                         | 40.0                            | 16.57          | 1.5                      | 45                  |
| 135.275         | Vertical                | 27.56                         | 43.5                            | 15.94          | 1.5                      | 180                 |

# 8 Occupied Bandwidth

Test Requirement: FCC Part15 C

Test Method: Based on FCC Part15 Paragraph 15.227

Operation winthin the band 26.77-27.77MHz


Test Date: May 29, 2006

Test mode: TX On
Temperature: 24 °C
Humidity: 52%RH

### 8.1 Test Procedure

- 1. The field strength of any emissions which appear outside of the band shall not exceed the general radiated emission limits in section 15.209.
- 2. The useful radiated emission form the EUT was detected by the spectrum analyser with peak detector.

The graph as below.

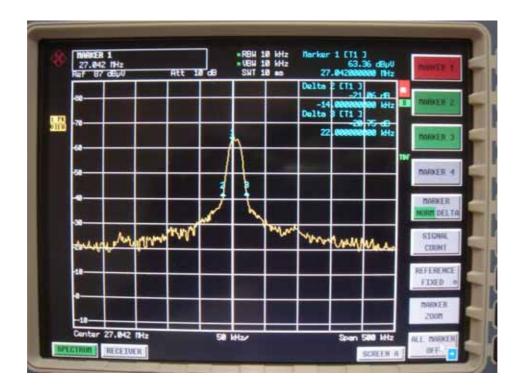

# 9 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

