

FCC CERTIFICATION
On Behalf of
Thakral Electronics

FM Transmitter
Model No.: YIA-FMT02

FCC ID: UAQFMT02

Prepared for : Thakral Electronics
Address : 15/F., Hong Kong Pacific Centre, 28 Hankow Road, Tsim
Sha Tsui, Kowloon, Hongkong
Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20060912
Date of Test : May 25, 2006
Date of Report : May 29, 2006

TABLE OF CONTENTS

| Description | Page |
|---|-----------|
| Test Report Certification | |
| 1. GENERAL INFORMATION | 4 |
| 1.1. Description of Device (EUT)..... | 4 |
| 1.2. Description of Test Facility | 4 |
| 1.3. Measurement Uncertainty | 4 |
| 2. MEASURING DEVICE AND TEST EQUIPMENT | 5 |
| 3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)..... | 6 |
| 3.1. Block Diagram of Test Setup..... | 6 |
| 3.2. The Emission Limit for section 15.239(c) | 6 |
| 3.3. Configuration of EUT on Measurement | 7 |
| 3.4. Operating Condition of EUT | 7 |
| 3.5. Test Procedure | 7 |
| 3.6. The Field Strength of Radiation Emission Measurement Results | 8 |
| 4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(B) | 11 |
| 4.1. Block Diagram of Test Setup..... | 11 |
| 4.2. The Emission Limit For Section 15.239(b) | 11 |
| 4.3. EUT Configuration on Measurement | 12 |
| 4.4. Operating Condition of EUT | 12 |
| 4.5. Test Procedure | 12 |
| 4.6. The Emission Measurement Result | 13 |
| 5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION 15.239(A)..... | 14 |
| 5.1. The Requirement For Section 15.239(a)..... | 14 |
| 5.2. EUT Configuration on Measurement | 14 |
| 5.3. Operating Condition of EUT | 14 |
| 5.4. Test Procedure | 14 |
| 5.5. Test Result | 15 |
| APPENDIX I (TEST CURVES) (9ages) | |

Test Report Certification

Applicant : Thakral Electronics
 Manufacturer : Micro Electronics Ltd.
 EUT Description : FM Transmitter
 (A) MODEL NO.: YIA-FMT02
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: 3.3V DC

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.239: 2004
 & ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.239 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : May 25, 2006

Prepared by :




(Engineer)

Reviewer :



(Quality Manager)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : FM Transmitter
 Model Number : YIA-FMT02
 Power Supply : 3.3V DC (Power supplied by i-Pod)
 Occupant Frequency : 88M-108MHz
 i-Pod Manufacturer: Apple
 M/N: A1059
 S/N: JQ5309CJPS9
 Applicant : Thakral Electronics
 Address : 15/F., Hong Kong Pacific Centre, 28 Hankow Road, Tsim Sha Tsui, Kowloon, Hongkong
 Manufacturer : Micro Electronics Ltd.
 Address : 7/F., Enterprise Square Three, 39 Wang Chiu Road, Kowloon Bay, Hongkong
 Date of sample received : May 22, 2006
 Date of Test : May 25, 2006

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004
 Accredited by FCC, May 10, 2004
 The Certificate Registration Number is 253065
 Accredited by Industry Canada, May 18, 2004
 The Certificate Registration Number is IC 5077
 Name of Firm : ACCURATE TECHNOLOGY CO. LTD
 Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 4.12dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

| Kind of equipment | Manufacturer | Type | S/N | Calibrated until |
|-------------------|---------------|----------|------------|------------------|
| EMI Test Receiver | Rohde&Schwarz | ESCS30 | 100307 | 03.31.2007 |
| EMI Test Receiver | Rohde&Schwarz | ESI26 | 838786/013 | 01.02.2007 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 9163-194 | 03.31.2007 |
| Bilog Antenna | Chase | CBL6112B | 2591 | 03.31.2007 |
| Horn Antenna | Rohde&Schwarz | HF906 | 100013 | 01.02.2007 |
| Spectrum Analyzer | Anritsu | MS2651B | 6200238856 | 03.31.2007 |
| Pre-Amplifier | Agilent | 8447D | 2944A10619 | 03.31.2007 |
| Audio Generator | GW | GAG-810 | 0913317 | 01.02.2007 |

3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)


3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators



(EUT: FM Transmitter)

3.1.2. Anechoic Chamber Test Setup Diagram

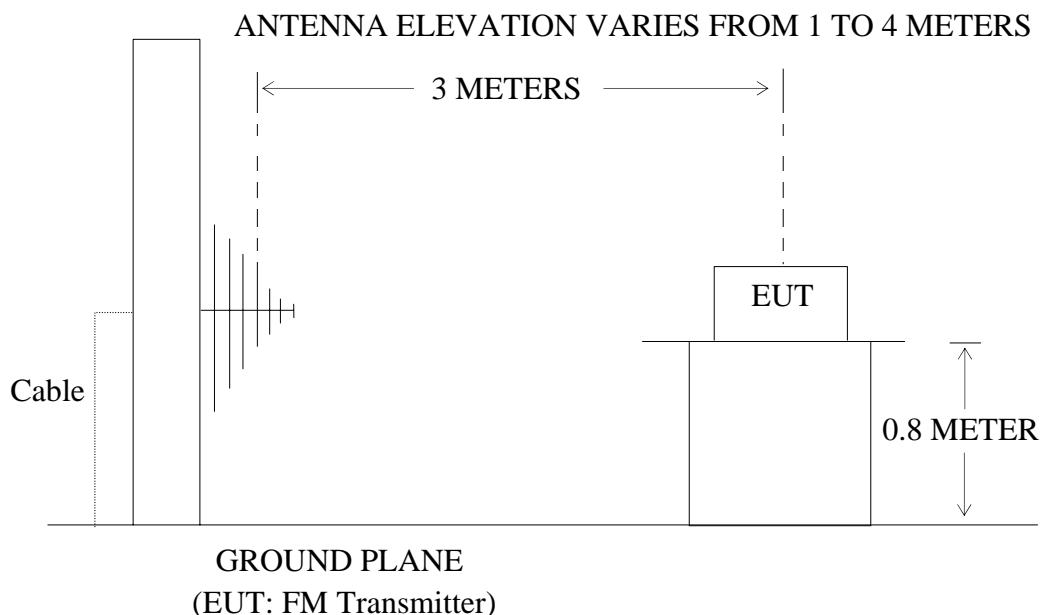

3.2. The Emission Limit for section 15.239(c)

3.2.1 The field strength of any emissions radiated on any frequency outside of the specified 200kHz band shall not exceed the general radiated emission limits in section 15.209

Radiation Emission Measurement Limits According to Section 15.209

| Frequency (MHz) | Limit, | | |
|--------------------|---|---|---|
| | Field Strength of Quasi-peak Value (microvolts/m) | Field Strength of Quasi-peak Value (dB μ V/m) | The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with |
| 30 - 88 | 100 | 40 | |

| | | | |
|-----------|-----|------|---|
| 88 - 216 | 150 | 43.5 | Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. |
| 216 - 960 | 200 | 46 | |
| Above 960 | 500 | 54 | |

3.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1.FM Transmitter(EUT)

Model Number : YIA-FMT02
 Serial Number : N/A
 Manufacturer : Micro Electronics Ltd.

3.4.Operating Condition of EUT

3.4.1.Setup the EUT and simulator as shown as Section 3.1.

3.4.2.Turn on the power of all equipment.

Let the EUT work in TX modes (On with 1kHz signal) measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz; Set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 1100MHz is checked.\

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

3.6.The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range 30MHz to 1100MHz is investigated.

| | | | |
|---------------|----------------|----------------|---------|
| Date of Test: | May 25, 2006 | Temperature: | 22°C |
| EUT: | FM Transmitter | Humidity: | 50% |
| Model No.: | YIA-FMT02 | Power Supply: | 3.3V DC |
| Test Mode: | TX 88.1MHz | Test Engineer: | Andy |

| Polarization | Frequency (MHz) | Reading(dB μ V/m) QP | Factor Corr.(dB) | Result(dB μ V/m) QP | Limits(dB μ V/m) QP | Margin(dB μ V/m) QP |
|--------------|-----------------|-----------------------------|-------------------|----------------------------|----------------------------|----------------------------|
| Horizontal | 176.230 | 16.8 | 8.8 | 25.6 | 43.5 | 17.9 |
| Horizontal | 264.270 | 16.7 | 9.6 | 26.3 | 46.0 | 19.7 |
| Horizontal | 352.420 | 13.1 | 13.1 | 26.2 | 46.0 | 19.8 |
| Horizontal | 440.570 | 19.4 | 14.5 | 33.9 | 46.0 | 12.1 |
| Horizontal | 528.650 | 25.7 | 15.8 | 41.5 | 46.0 | 4.5 |
| Horizontal | 616.710 | 17.9 | 17.3 | 35.2 | 46.0 | 10.8 |
| Vertical | 176.210 | 8.1 | 8.8 | 16.9 | 43.5 | 26.6 |
| Vertical | 352.440 | 8.6 | 13.1 | 21.7 | 46.0 | 24.3 |
| Vertical | 440.560 | 13.2 | 14.5 | 27.7 | 46.0 | 18.3 |
| Vertical | 528.662 | 13.2 | 15.8 | 29.0 | 46.0 | 17.0 |
| Vertical | 616.725 | 16.4 | 17.3 | 33.7 | 46.0 | 12.3 |

The spectral diagrams in appendix I display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Date of Test: May 25, 2006
 EUT: FM Transmitter
 Model No.: YIA-FMT02
 Test Mode: TX 98.1MHz

Temperature: 22°C
 Humidity: 50%
 Power Supply: 3.3V DC
 Test Engineer: Andy

| Polarization | Frequency (MHz) | Reading(dB μ V/m) QP | Factor Corr.(dB) | Result(dB μ V/m) QP | Limits(dB μ V/m) QP | Margin(dB μ V/m) QP |
|--------------|-----------------|-----------------------------|-------------------|----------------------------|----------------------------|----------------------------|
| Horizontal | 196.200 | 15.0 | 9.8 | 24.8 | 43.5 | 18.7 |
| Horizontal | 294.310 | 14.0 | 11.7 | 25.7 | 46.0 | 20.3 |
| Horizontal | 392.430 | 15.4 | 13.8 | 29.2 | 46.0 | 16.8 |
| Horizontal | 490.520 | 25.8 | 15.1 | 40.9 | 46.0 | 5.1 |
| Horizontal | 588.630 | 18.1 | 17.0 | 35.1 | 46.0 | 10.9 |
| Vertical | 196.202 | 1.5 | 9.8 | 11.3 | 43.5 | 32.2 |
| Vertical | 294.330 | 5.5 | 11.7 | 17.2 | 46.0 | 28.8 |
| Vertical | 392.442 | 7.7 | 13.8 | 21.5 | 46.0 | 24.5 |
| Vertical | 490.513 | 10.9 | 15.1 | 26.0 | 46.0 | 20.0 |
| Vertical | 588.635 | 14.0 | 17.0 | 31.0 | 46.0 | 15.0 |

The spectral diagrams in appendix I display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

| | | | |
|---------------|----------------|----------------|---------|
| Date of Test: | May 25, 2006 | Temperature: | 22°C |
| EUT: | FM Transmitter | Humidity: | 50% |
| Model No.: | YIA-FMT02 | Power Supply: | 3.3V DC |
| Test Mode: | TX 107.9MHz | Test Engineer: | Andy |

| Polarization | Frequency (MHz) | Reading(dB μ V/m) QP | Factor Corr.(dB) | Result(dB μ V/m) QP | Limits(dB μ V/m) QP | Margin(dB μ V/m) QP |
|--------------|-----------------|-----------------------------|-------------------|----------------------------|----------------------------|----------------------------|
| Horizontal | 215.812 | 17.5 | 9.5 | 27.0 | 43.5 | 16.5 |
| Horizontal | 323.696 | 22.5 | 12.6 | 35.1 | 46.0 | 10.9 |
| Horizontal | 431.668 | 22.7 | 14.3 | 37.0 | 46.0 | 9.0 |
| Horizontal | 539.522 | 23.1 | 16.0 | 39.1 | 46.0 | 6.9 |
| Horizontal | 647.446 | 19.7 | 17.5 | 37.2 | 46.0 | 8.8 |
| Vertical | 215.820 | 6.7 | 9.5 | 16.2 | 43.5 | 27.3 |
| Vertical | 323.702 | 7.9 | 12.6 | 20.5 | 46.0 | 25.5 |
| Vertical | 431.700 | 9.4 | 14.3 | 23.7 | 46.0 | 22.3 |
| Vertical | 539.521 | 15.7 | 16.0 | 31.7 | 46.0 | 14.3 |
| Vertical | 647.445 | 13.2 | 17.5 | 30.7 | 54.0 | 15.3 |


The spectral diagrams in appendix I display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

Reviewer :



4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15

SECTION 15.239(B)

4.1. Block Diagram of Test Setup


4.1.1. Block diagram of connection between the EUT and simulators



(EUT: FM Transmitter)

4.1.2. Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

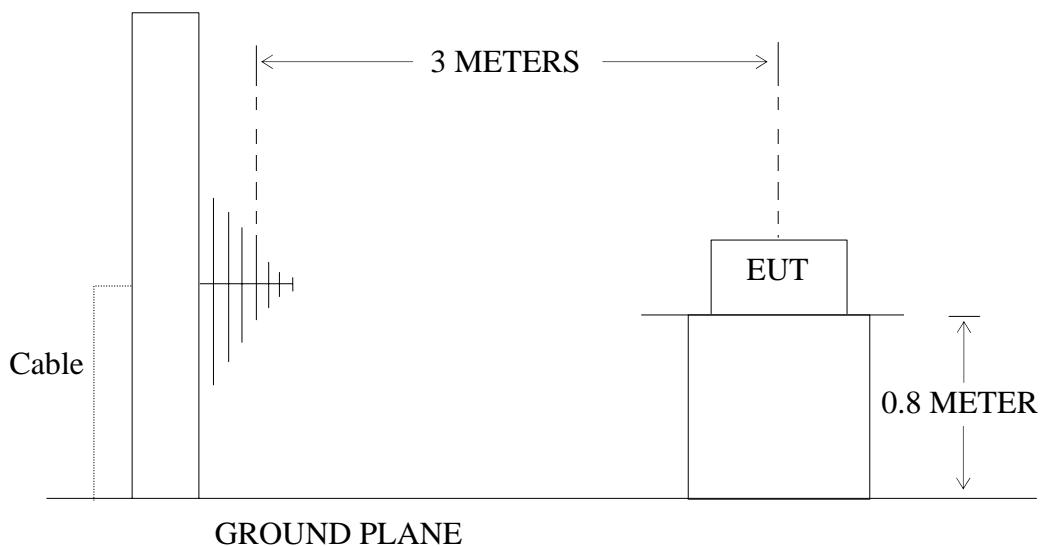

(EUT: FM Transmitter)

4.2. The Emission Limit For Section 15.239(b)

4.2.1 The field strength of any emission within the permitted 200kHz band shall not exceed 250microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1.FM Transmitter (EUT)

| | | |
|---------------|---|------------------------|
| Model Number | : | YIA-FMT02 |
| Serial Number | : | N/A |
| Manufacturer | : | Micro Electronics Ltd. |

4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

Let the EUT work in TX modes (On with 1kHz signal) measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

4.6.The Emission Measurement Result

PASS.

| | | | |
|---------------|----------------|----------------|---------|
| Date of Test: | May 25, 2006 | Temperature: | 22°C |
| EUT: | FM Transmitter | Humidity: | 50% |
| Model No.: | YIA-FMT02 | Power Supply: | 3.3V DC |
| Test Mode: | TX | Test Engineer: | Andy |

Fundamental Radiated Emissions

| Test conditions | | Fundamental Frequency | |
|------------------------|------------|------------------------------|-----------------------------|
| | | 88.1MHz | |
| $T_{nom}(22^{\circ}C)$ | Unit | (dB μ V/m)/ (μ V/m) | (dB μ V/m)/(μ V/m) |
| | Horizontal | AV | PEAK |
| | Vertical | 41.8/123 | 45.5/188 |
| limit | | 33.7/48 | 36.4/66 |
| limit | | 48/250 | 68/2500 |

Note: Measurement was performed with modulated signal with average detector and peak detector.


| Test conditions | | Fundamental Frequency | |
|------------------------|------------|------------------------------|-----------------------------|
| | | 98.1MHz | |
| $T_{nom}(22^{\circ}C)$ | Unit | (dB μ V/m)/ (μ V/m) | (dB μ V/m)/(μ V/m) |
| | Horizontal | AV | PEAK |
| | Vertical | 34.9/56 | 38.5/84 |
| limit | | 24.6/17 | 28.1/25 |
| limit | | 48/250 | 68/2500 |

Note: Measurement was performed with modulated signal with average detector and peak detector.

| Test conditions | | Fundamental Frequency | |
|------------------------|------------|------------------------------|-----------------------------|
| | | 107.9MHz | |
| $T_{nom}(22^{\circ}C)$ | Unit | (dB μ V/m)/ (μ V/m) | (dB μ V/m)/(μ V/m) |
| | Horizontal | AV | PEAK |
| | Vertical | 25.6/19 | 29.1/29 |
| limit | | 19.8/10 | 23.2/14 |
| limit | | 48/250 | 68/2500 |

Note: Measurement was performed with modulated signal with average detector and peak detector.

Reviewer :



5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION

15.239(A)

5.1. The Requirement For Section 15.239(a)

5.1.1. Emission from the device shall be confined within a band 200kHz wide centered on the operating frequency. The 200kHz band shall lie wholly within the frequency range of 88-108MHz.

5.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.2.1. FM Transmitter (EUT)

| | | |
|---------------|---|------------------------|
| Model Number | : | YIA-FMT02 |
| Serial Number | : | N/A |
| Manufacturer | : | Micro Electronics Ltd. |

5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 4.1.

5.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes (On with 1kHz signal) measure it. The transmit frequency are 88.1-107.9MHz. We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.


5.4. Test Procedure

The zero level was set without modulation. A small sample of the transmitter output was fed into the spectrum analyzer and above photo was taken. The vertical scale is set to 10dB per division; the horizontal scale is set to 20kHz per division.

5.5. Test Result


The EUT does meet the FCC requirement.

Reviewer :



APPENDIX I

(Test Curves)

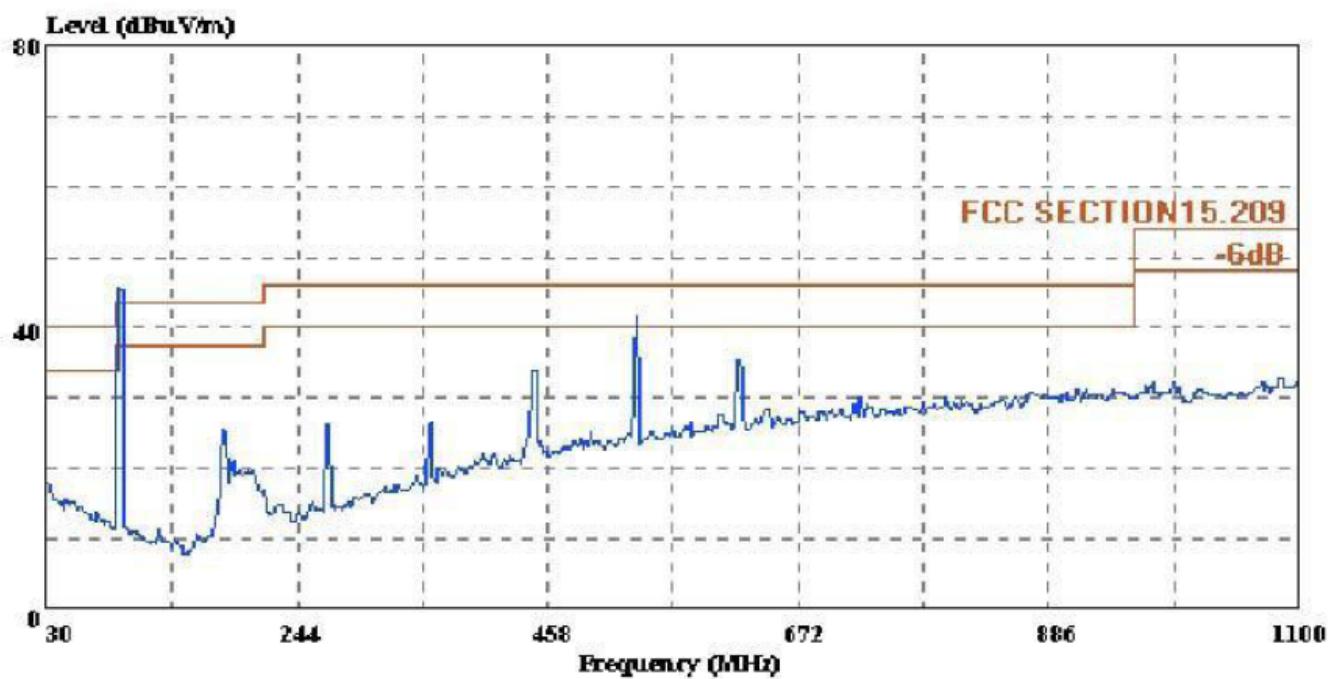



Trace:

Condition: FCC SECTION15.209 3m
eut : FM Transmitter M/N:YIA-FMT02
power: DC 3.3V
memo : FM 88.1MHz
manuf: Thakral

Ref Trace:

HORIZONTAL

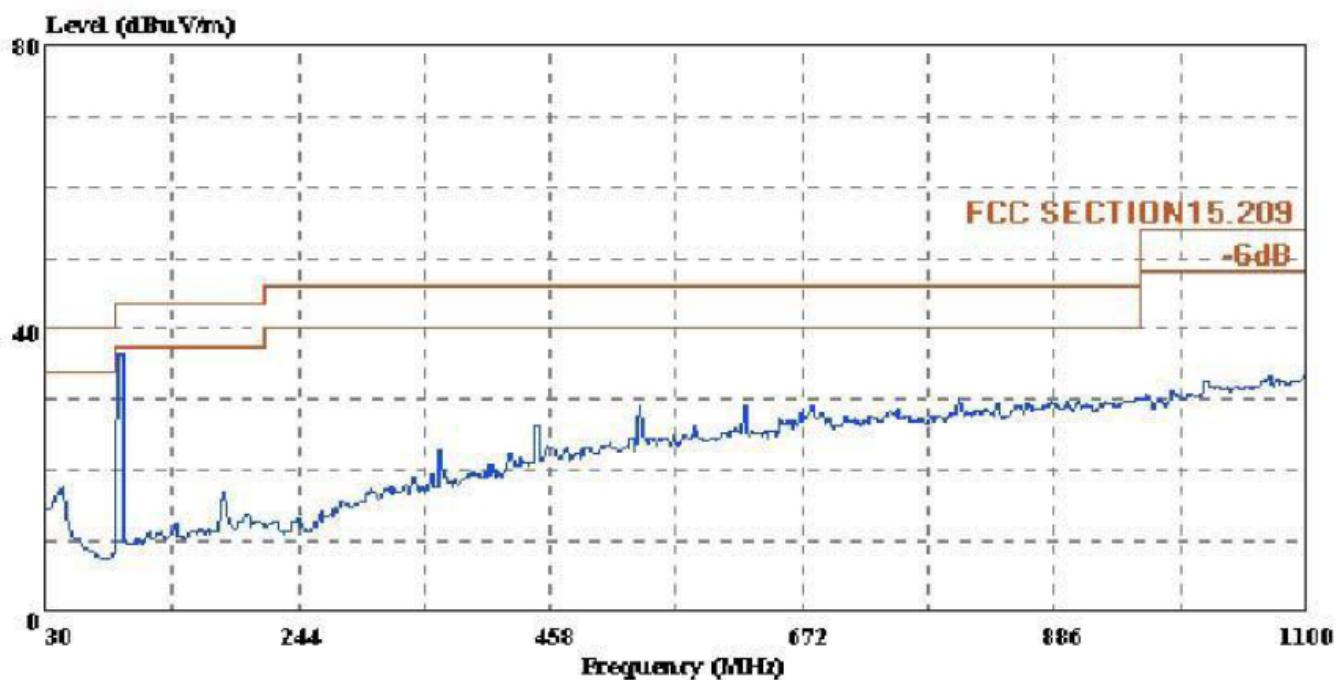

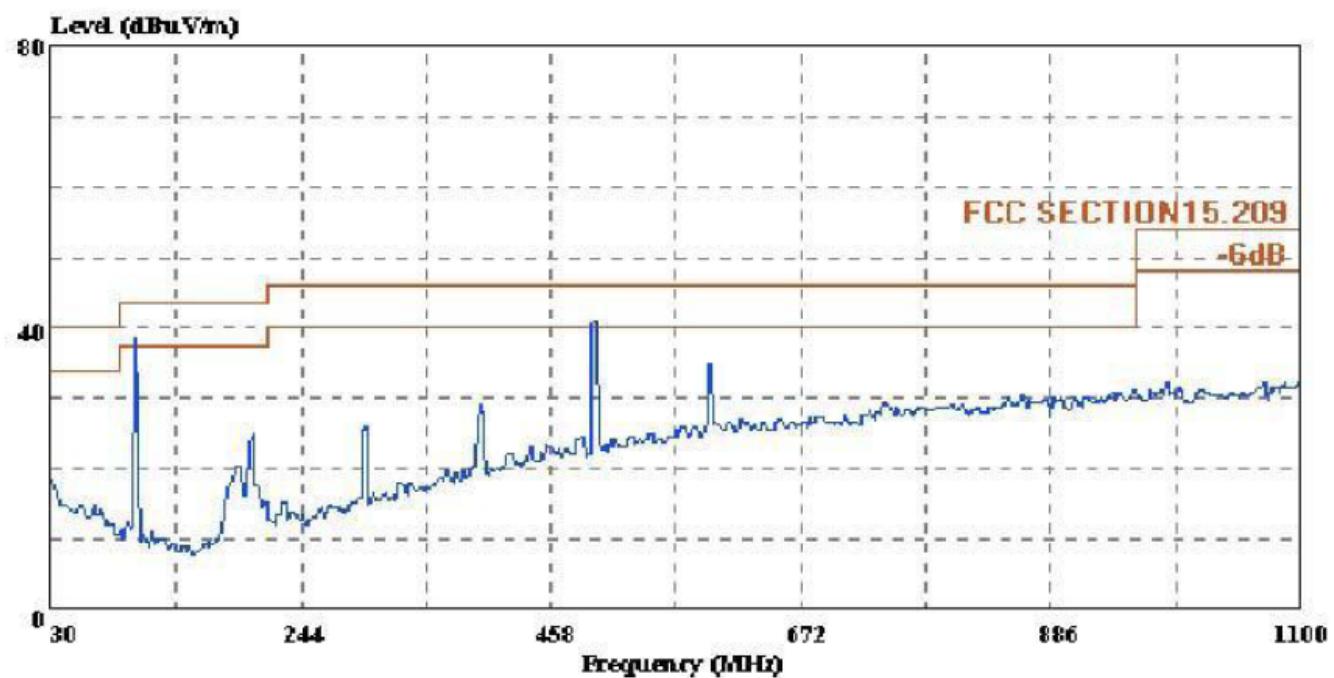


Trace:

Condition: FCC SECTION15.209 3m
eut : FM Transmitter M/N:YIA-FMT02
power: DC 3.3V
memo : FM 98.1MHz
manuf: Thakral

Ref Trace:

HORIZONTAL

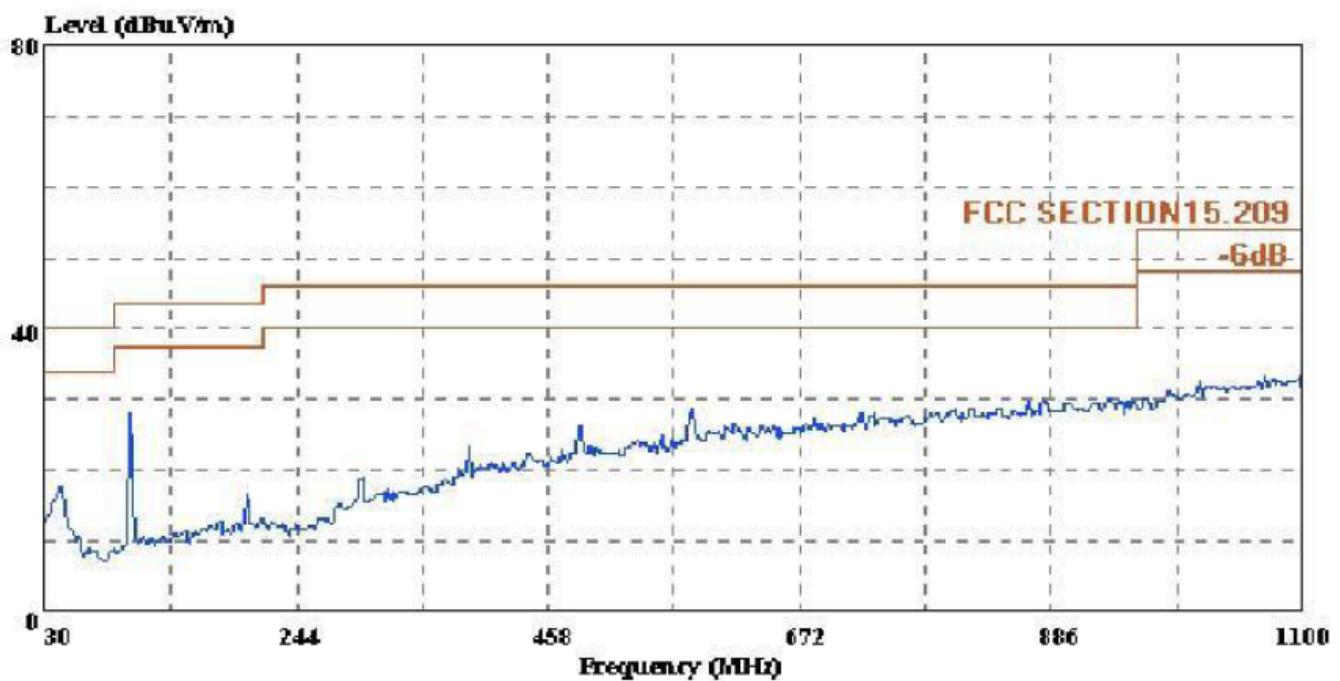


Trace:

Condition: FCC SECTION15.209 3m
eut : FM Transmitter M/N:YIA-FMT02
power: DC 3.3V
memo : FM 98.1MHz
manuf: Thakral

Ref Trace:

VERTICAL

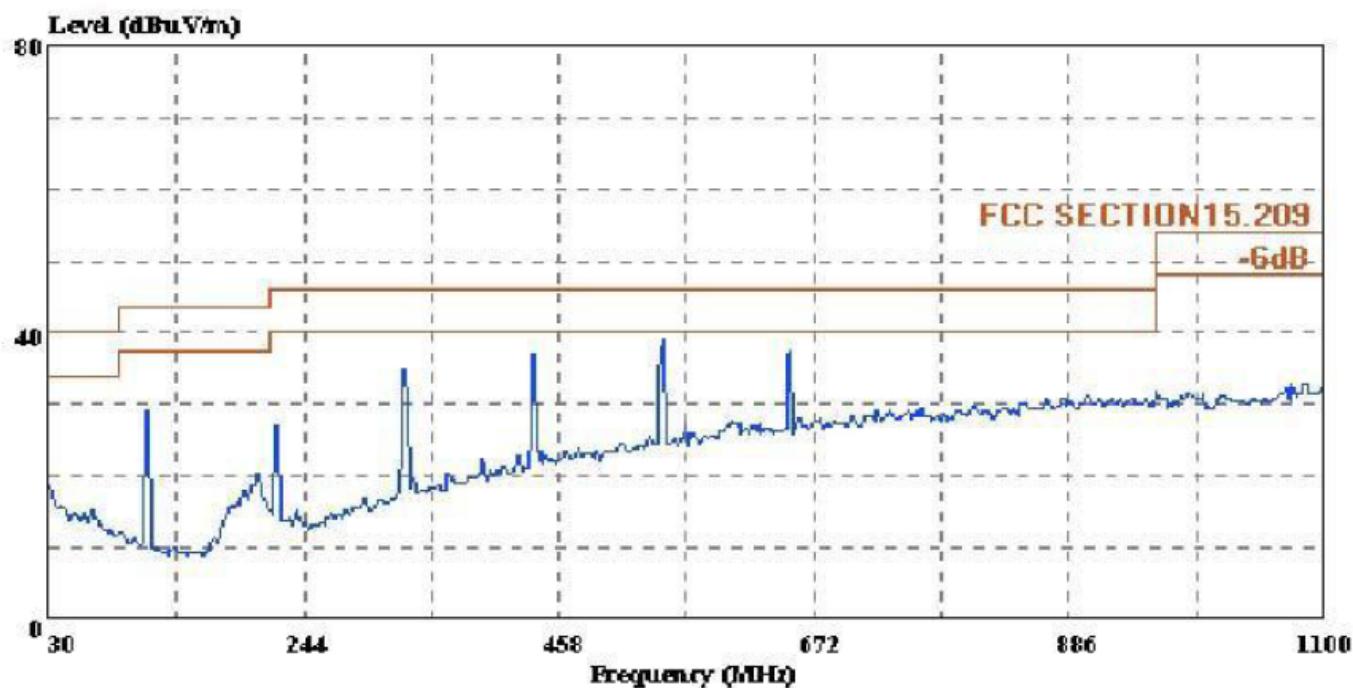


Trace:

Condition: FCC SECTION15.209 3m
 eut : FM Transmitter M/N:YIA-FMT02
 power: DC 3.3V
 memo : FM 107.9MHz
 manuf: Thakral

Ref Trace:

HORIZONTAL

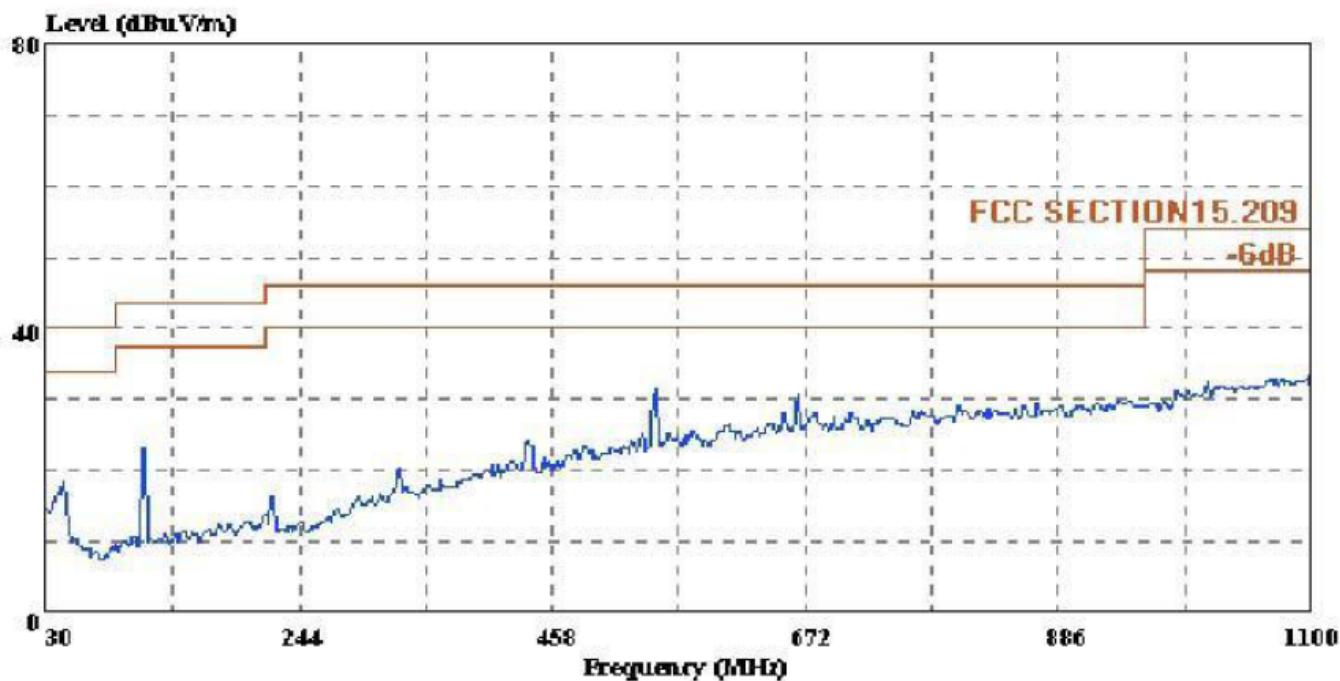

Trace:

Condition: FCC SECTION15.209 3m
eut : FM Transmitter M/N:YIA-FMT02
power: DC 3.3V
memo : FM 107.9MHz
manuf: Thakral

Ref Trace:

VERTICAL

