

# A Test Lab Techno Corp.

Changan Lab: No. 140-1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.

Tel: 886-3-271-0188 / Fax: 886-3-271-0190

## SAR EVALUATION REPORT





Test Report No. : 0701FS11

Applicant : GoPass Technology Corp.

FCC ID : UBHAVL9X

Trade Name : GoPass

Model Number : AVL-900, AVL-9xx, GPS-9xx.

Product Type : GPS Tracke

Dates of Test : Feb. 12, 2007

Test Environment : Ambient Temperature : 22  $\pm$  3  $^{\circ}$  C

Relative Humidity: 40 - 70 %

Test Specification : Standard C95.1-1999

IEEE Std. 1528-2003

Max. SAR : 0.293 W/kg Body SAR (GSM 850 / GPRS)

0.283 W/kg Body SAR (PCS 1900 / GPRS)

FCC Rule Part(s) : 2.1093;FCC/OET Bulletin 65 Supplement C [July 2001]

Test Lab : Changan Lab



- 1. The test operations have to be performed with cautious behavior, the test results are as attached.
- The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
- 3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full.

Country Huang 2

**Measurement Center Manager** 

Testing Engineer

20070518

©2005 A Test Lab Techno Corp.

Page 1 of 59



# **Contents**

1.	Descri	iption of Equipment Under Test (EUT)	3
2.	Other	Accessories	5
3.	Introd	uction	6
4.	SAR D	Pefinition	7
5.	SAR N	leasurement Setup	8
6.	Syster	n Components	10
	6.1	DASY4 E-Field Probe System	10
	6.2	Data Acquisition Electronic (DAE) System	12
	6.3	Robot	13
	6.4	Measurement Server	13
	6.5	Device Holder for Transmitters	13
	6.6	Phantom - SAM v4.0	14
	6.7	Data Storage and Evaluation	14
7.	Test E	quipment List	17
8.	Tissue	Simulating Liquids	18
	8.1 I	Liquid Confirmation	19
9.	Measu	rement Process	21
	9.1	Device and Test Conditions	21
	9.2	System Performance Check	22
	9.3	Dosimetric Assessment Setup	24
	9.4	Spatial Peak SAR Evaluation	26
10.	Measu	rement Uncertainty	27
11.	SAR T	est Results Summary	29
	11.1	GSM 850MHz / GPRS - Body SAR	29
	11.2	PCS 1900MHz / GPRS - Body SAR	30
	11.3	Setup Photo	31
	11.4	Std. C95.1-1999 RF Exposure Limit	32
12.	Concl	usion	33
13.	Refere	nces	34
Ар	pendix	A - System Performance Check	35
Ар	pendix	B - SAR Measurement Data	42
Ар	pendix	C - Calibration	59



## 1. <u>Description of Equipment Under Test (EUT)</u>

Applicant : GoPass Technology Corp

17F.,866-1 Chung-Cheng Road, Chung Ho City, Taipei, Taiwan

**Manufacturer** : GoPass Technology Corp.

Manufacturer Address : 17F.,866-1 Chung-Cheng Road, Chung Ho City,

Taipei, Taiwan

Product Type : GPS Tracker

Trade Name : GoPass

Model Number : AVL-900, AVL-9xx, GPS-9xx.

Test Device : Production Unit

**Tx Frequency** : 824.2 - 848.8 MHz (GSM 850 / GPRS)

1850.2 - 1909.8 MHz (PCS 1900 / GPRS)

Max. RF Conducted Power : 1.871 W - 32.75 dBm (GSM 850 / GPRS)

0.933 W - 29.70 dBm (PCS 1900 / GPRS)

Max. SAR Measurement : 0.293 W/kg Body SAR (GSM 850 / GPRS)

0.283 W/kg Body SAR (PCS 1900 / GPRS)

HW Version : R0D SW Version : 2.8

Antenna Type : Detachable antenna

Antenna Gain OdBi


Device Category : Portable

RF Exposure Environment : General Population / Uncontrolled

Battery Option : Standard Application Type : Certification

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.



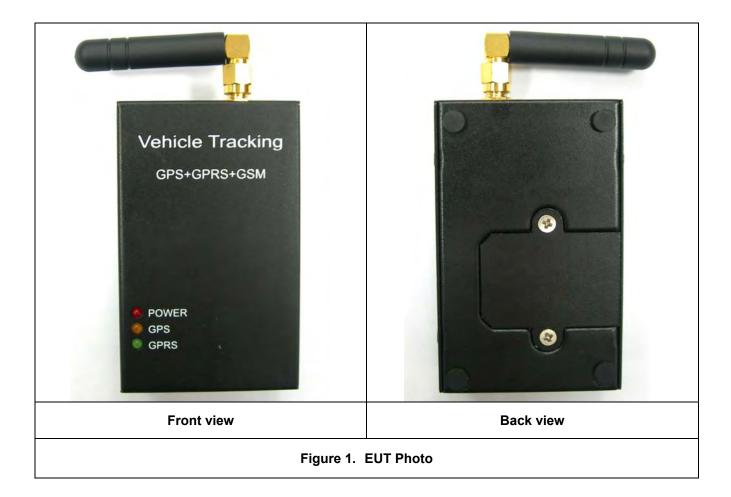



## 2. Other Accessories



Figure 2. DC Adaptor



Figure 3. USB Cable



Figure 4. GPS Antenna

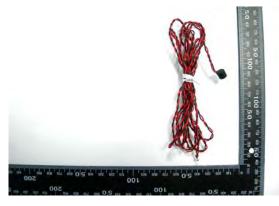


Figure 5. Microphone



## 3. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of GoPass Technology Corp. Trade Name: GoPass Model(s): AVL-900, AVL-9xx, GPS-9xx. The test procedures, as described in American National Standards, Institute C95.1 - 1999 [1], FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.



## 4. SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

SAR = 
$$\frac{d}{dt} \left( \frac{dw}{dm} \right) = \frac{d}{dt} \left( \frac{dw}{\rho dv} \right)$$

Figure 6. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma E^2}{\rho}$$

Where:

 $\sigma$  = conductivity of the tissue (S/m)

 $\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

E = RMS electric field strength (V/m)

#### \*Note:

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]



## 5. SAR Measurement Setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than  $\pm 0.025mm$ . Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Measurement Server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chipdisk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The PC consists of the Intel Pentium 4 2.4GHz computer with Windows2000 system and SAR Measurement Software DASY4, Post Processor SEMCAD, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection...etc. is connected to the Electro-optical converter (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the Measurement Server.

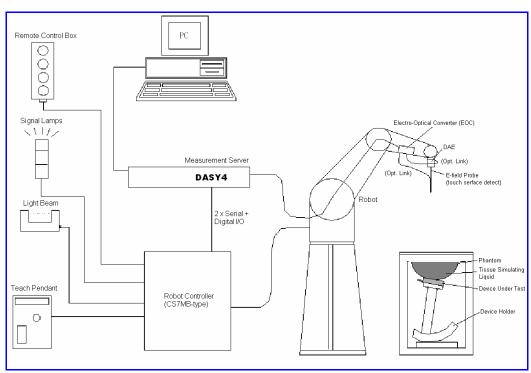


Figure 7. SAR Lab Test Measurement Setup



The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [3].



## 6. System Components

## 6.1 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probes is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.



#### 6.1.1 EX3DV3 E-Field Probe Specification

**Construction** Symmetrical design with triangular core

Built-in optical fiber for surface detection

System (EX3DV3 only)

Built-in shielding against static charges

PEEK enclosure material

(resistant to organic solvents, e.q., glycol)

**Calibration** In air from 10 MHz to 6 GHz

In brain and muscle simulating tissue at

frequencies of 900MHz, 1800MHz, 5200MHz and 5500MHz and 5800MHz (accuracy  $\pm 8\%$ )

Calibration for other liquids and frequencies upon request

Frequency 10 MHz to > 6 GHz; Linearity:  $\pm 0.2$  dB

(30 MHz to 3 GHz)

**Directivity**  $\pm 0.3$  dB in brain tissue (rotation around probe axis)

 $\pm 0.5 \text{ dB}$  in brain tissue (rotation normal probe axis)

**Dynamic Range**  $10 \mu \text{ W/g to} > 100 \text{mW/g}$ ; Linearity:  $\pm 0.2 \text{dB}$ 

**Surface Detection** ±0.2 mm repeatability in air and clear liquids

over diffuse reflecting surface(EX3DV3 only)

**Dimensions** Overall length: 330mm

Tip length: 20mm

Body diameter: 12mm

Tip diameter: 2.5mm

Distance from probe tip to dipole centers: 1.0mm

**Application** General dosimetry up to 6GHz

Compliance tests of mobile phones

Fast automatic scanning in arbitrary phantoms



Figure 8. EX3DV3 E-field Probe



Figure 9.
Probe setup on robot



#### 6.1.2 EX3DV3 E-Field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in  $\{4\}$  with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated with the procedure described in  $\{5\}$  and found to be better than  $\pm 0.25$ dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1GHz, and in a wave guide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

 $\Delta t$  = Exposure time (30 seconds),

**C** = Heat capacity of tissue (head or body),

**Δ T** = Temperature increase due to RF exposure.

Or 
$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

**σ** = Simulated tissue conductivity,

 $\rho$  = Tissue density (kg/m<sup>3</sup>).

#### 6.2 Data Acquisition Electronic (DAE) System

**Cell Controller** 

Processor: Intel Pentium 4

Clock Speed: 2.4GHz

Operating System: Windows 2000 Professional

**Data Converter** 

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 v4.7 (Build 53) & SEMCAD v1.8 (Build 172)

Connecting Lines: Optical downlink for data and status info

Optical uplink for commands and clock



#### 6.3 Robot

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ±0.025 mm

No. of Axis: 6

#### 6.4 Measurement Server

Processor: PC/104 with a 166MHz low-power Pentium

I/O-board: Link to DAE3

16-bit A/D converter for surface detection system

Digital I/O interface Serial link to robot

Direct emergency stop output for robot

#### 6.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the IEEE SCC34-SC2 and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

\*Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [6]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Larger DUT cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



Figure 10. Device Holder



#### 6.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.



Figure 11.SAM Twin Phantom

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	810×1000×500 mm (H×L×W)

Table 1. Specification of SAM v4.0

## 6.7 Data Storage and Evaluation

#### 6.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.



#### 6.7.2 Data Evaluation

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai0, ai1, ai2

- Conversion factor ConvFi

- Diode compression point dcpi

**Device parameters**: - Frequency f

- Crest factor cf

**Media parameters** : - Conductivity  $\sigma$ 

- Density ho

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)

 $U_i$  = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes : 
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$



H-field probes : 
$$H_{i} = \sqrt{V_{i}} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^{2}}{f}$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)

 $Norm_i$  = sensor sensitivity of channel i (i = x, y, z)

 $\mu \text{ V/(V/m)}^2$  for E-field Probes

ConvF = sensitivity enhancement in solution

 $a_{ii}$  = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

 $E_i$  = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

 $E_{tot}$  = total field strength in V/m

 $\sigma$  = conductivity in [mho/m] or [Siemens/m]

 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

\*Note: that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$
 or  $P_{pwe} = \frac{H_{tot}^2}{37.7}$ 

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

 $E_{tot}$  = total electric field strength in V/m

 $H_{tot}$  = total magnetic field strength in A/m



## 7. <u>Test Equipment List</u>

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration		
Manufacturer	Name of Equipment	турелиочен	Serial Number	Last Cal.	Due Date	
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1530	Sep. 21, 2006	Sep. 21, 2007	
SPEAG	900MHz System Validation Kit	D900V2	SN:172	Jan. 22, 2007	Jan. 22, 2008	
SPEAG	1800MHz System Validation Kit	D1800V2	SN:265	Oct. 17, 2006	Oct. 17, 2007	
SPEAG	Data Acquisition Electronics	DAE4	SN:541	Oct. 16, 2006	Oct. 16, 2007	
SPEAG	Device Holder	N/A	N/A	NCR	NCR	
SPEAG	Phantom	SAM V4.0	1009	NCR	NCR	
SPEAG	Robot	Staubli RX90L	F00/589B1/A/01	NCR	NCR	
SPEAG	Software	DASY4 V4.7 Build 53	N/A	NCR	NCR	
SPEAG	Software	SEMCAD V1.8 Build 172	N/A	NCR	NCR	
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR	
Agilent	Wireless Communication Test Set	8960(E5515C)	GB41450409	Mar. 01, 2006	Mar. 01, 2007	
Agilent	S-Parameter Network Analyzer	8720ES	8720ES US39172472		Aug. 15, 2007	
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	NCR	
Agilent	Power Meter	E4418B	GB40206143	Apr. 24, 2006	Apr. 24, 2007	
Agilent	Power Sensor	8481H	3318A20779	Apr. 25, 2006	Apr. 25, 2007	
Agilent	Signal Generator	8648C	3847A05201	Jul. 06, 2006	Jul. 06, 2007	
Agilent	Dual Directional Coupler	778D	50334	NCR	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	NCR	
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	NCR	

Table 2. Test Equipment List



## 8. <u>Tissue Simulating Liquids</u>

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an 8720ES Network Analyzer.

INGREDIENT	FREQUENCY					
	HSL5G (Head)	MSL5G (Body)				
Water	64%	78%				
Mineral Oil	18%	11%				
Emulsifiers	15%	9%				
Additives and Salt	3%	2%				

Table 3. Recipes for Head & Body Tissue Simulating Liquids

#### IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.



Target Frequency	He	ad	Во	dy
(MHz)	٤r	<b>σ</b> (S/m)	٤r	<b>σ</b> (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00
( $\mathbf{\epsilon}_{\mathbf{r}}$ = relative pe	ermittivity, $\sigma = c$	onductivity and	<b>ρ</b> = 1000 kg/m	<sup>3</sup> )

Table 4. Tissue dielectric parameters for head and body phantoms

## 8.1 Liquid Confirmation

#### 8.1.1 Parameters

•	Liquid Verify  Ambient Temperature: 22 ± 3 °C; Relative Humidity: 40 -70%																	
Liquid Type Frequency Temp (°C) Parameters Target Value Deviation (%) Limit (%) Measured Date																		
900MHz	900MHz	22.0	εr	55.0	53.6	-2.55	± 5	Feb. 12, 2007										
Body	Body	22.0	σ	1.05	1.05	0.00	± 5	reb. 12, 2007										
1800MHz	40001411-	40000411-	22.0	εr	53.3	51.9	-2.63	± 5	Fab. 40, 2007									
Body	1800MHz	22.0	σ	1.52	1.56	2.63	± 5	Feb. 12, 2007										
900MHz	900MHz	000MH=	000MH=	0000011	000MH-	000MH=	0000011-	0000411-	Z	000011-	000MLI=	41.1	εr	55.0	55.30	0.55	± 5	May 40, 2007
Body		22.0	σ	1.05	1.02	-2.86	± 5	May. 18, 2007										
1800MHz	1800MHz	00MHz 22.0	εr	53.3	51.90	-2.63	± 5	May 40, 2007										
Body			σ	1.52	1.56	2.63	± 5	May. 18, 2007										

Table 5. Measured Tissue dielectric parameters for head and body phantoms



## 8.1.2 Liquid Depth

The liquid level was during measurement 15cm  $\pm 0.5$ cm.

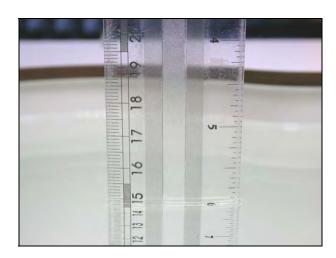


Figure 12. Head-Tissue-Simulating-Liquid

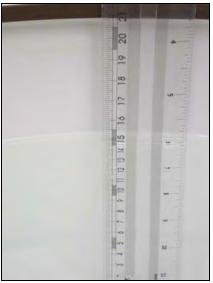


Figure 13. Body-Tissue-Simulating-Liquid



## 9. Measurement Process

#### 9.1 Device and Test Conditions

The Test Device was provided by **GoPass Technology Corp.** for this evaluation. The spatial peak SAR values were assessed for the lowest, middle and highest channels defined by **GSM 850** (#128=824.2MHz, #190=836.6MHz, #251=848.8MHz) and **PCS 1900** (#512=1850.2MHz, #661=1880.0MHz, #810=1909.8MHz) systems. The antenna(s), battery and accessories shall be those specified by the manufacturer. The battery shall be fully charged before each measurement and there shall be no external connections.

Usage		tes with a built-in mode by client	Distance between antenna axis at the joint and the liquid surface:	For Body, EUT front to phantom, 15mm separation.  Fully-charged with DC Acaptor.		
Simulating human Head/Body		Body	EUT Battery			
		Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)	
l	0014070	Lowest CH - 128	824.2	32.72	32.70	
Conducted power	GSM850 GPRS	Middle CH - 190	836.6	32.62	32.61	
power	0110	Highest CH - 251	848.8	31.60	31.60	
	DCC1000	Lowest CH - 512	1850.2	29.70	29.68	
	PCS1900 GPRS	Middle CH - 661	1880.0	29.52	29.50	
		Highest CH - 810	1909.8	29.32	29.31	

#### Note:

- 1. The EUT has built-in test mode that used to evaluate SAR.
- 2. The EUT take DC Acaptor as its power source. Each test was preceded under the condition of fully-charged EUT.



## 9.2 System Performance Check

## 9.2.1 Symmetric Dipoles for System Validation

**Construction** Symmetrical dipole with I/4 balun enables measurement

of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input

power at the flat phantom in head simulating solutions.

**Frequency** 450, 900, 1800, 2000, 2450, 5000MHz

**Return Loss** > 20 dB at specified validation position

**Power Capability** > 100 W (f < 1 GHz); > 40 W (f > 1 GHz)

Options Dipoles for other frequencies or solutions and other

calibration conditions are available upon request

**Dimensions** D450V2: dipole length 270 mm; overall height 330 mm

D900V2 : dipole length 149 mm; overall height 330 mm

D1800V2: dipole length 72 mm; overall height 300 mm

D2000V2: dipole length 65 mm; overall height 300 mm

D2450V2: dipole length 51.5 mm; overall height 300 mm D5GHzV2: dipole length 20.6 mm; overall height 450 mm



Figure 14. Validation Kit



#### 9.2.2 Validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm$  7%. The validation was performed at 850MHz and 1900MHz.

Valid	dation kit	Mixture Type	SAR <sub>1g</sub> [mW/g]		SAR <sub>10g</sub> [mW/g]		Date of Calibration	
D900	D900V2-SN172		10.52		6.88		Jan. 22, 2007	
D1800	D1800V2-SN265		39.0	)4	20	.88	Oct. 17, 2006	
Frequen cy	Power	SAR <sub>1g</sub>	SAR <sub>10g</sub>	Drift (dB)		rence entage	Date	
(MHz)	(dBm)	(mW/g)	(mW/g)	(dB)	1g	10g		
900	250mW	2.56	1.78	-0.061	-2.7 %	3.5 %	Feb. 12 ,2007	
(Body)	Normalize to 1 Watt	10.24	7.12	-0.061		3.5 %	1 65. 12 ,2007	
1800	250mW	9.46	5.19	-0.196	-3.1 %	-0.6 %	Fob 42 2007	
(Body)	Normalize to 1 Watt	37.84	20.76	-0.196	-3.1 %	-0.6 %	Feb. 12 ,2007	
900	250mW	2.6	1.69	0.440	-1.1 %	4 - 0/		
(Body)	Normalize to 1 Watt	10.4	6.76	-0.110	-1.1 70	-1.7 %	May. 18, 2007	
1800	250mW	9.35	5	0.440	-0.5 %	0.4.9/	Mars 40, 0007	
(Body)	Normalize to 1 Watt	37.4	20	-0.149	<b>-U.5</b> %	-0.4 %	May. 18, 2007	



## 9.3 Dosimetric Assessment Setup

#### 9.3.1 Headset Test Position – Body-Worn

**Body-Worn Configuration** 

Body—worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a handset output should be tested with a handset connected to the device.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances.

#### For this test:

- The EUT is placed into the holster/belt clip and the holster is positioned against the surface of the phantom in a normal operating position.
- Since this EUT doesn't supply any body-worn accessory to the end user, a distance of 15 mm was tested to confirm the necessary "minimum SAR separation distance".

(\*Note: This distance includes the 2 mm phantom shell thickness.)



#### 9.3.2 Measurement Procedures

The evaluation was performed with the following procedures:

Surface Check:

A surface checks job gathers data used with optical surface detection. It determines the distance from the phantom surface where the reflection from the optical detector has its peak. Any following measurement jobs using optical surface detection will then rely on this value. The surface check performs its search a specified number of times, so that the repeatability can be verified. The probe tip distance is 1.3mm to phantom inner surface during scans.

Reference:

The reference job measures the field at a specified reference position, at 4 mm from the selected section's grid reference point.

Area Scan:

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines can find the maximum locations even in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. Any following zoom scan within the same procedure will then perform fine scans around these maxima. The area covered the entire dimension of the EUT and the horizontal grid spacing was  $15 \text{ mm} \times 15 \text{ mm}$ .

Zoom Scan:

Zoom scans are used to assess the highest averaged SAR for cubic averaging volumes with 1 g and 10 g of simulated tissue. The zoom scan measures 5 x 5 x 7 points in a 32 x 32 x 30 mm cube whose base faces are centered around the maxima returned from a preceding area scan within the same procedure.

Drift:

The drift job measures the field at the same location as the most recent reference job within the same procedure, with the same settings. The drift measurement gives the field difference in dB from the last reference measurement. Several drift measurements are possible for each reference measurement. This allows monitoring of the power drift of the device in the batch process. If the value changed by more than 5%, the evaluation was repeated.



#### 9.4 Spatial Peak SAR Evaluation

The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. Based on the Draft: SCC-34, SC-2, WG-2 - Computational Dosimetry, IEEE P1529/D0.0 (Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) Associated with the Use of Wireless Handsets - Computational Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement in a volume of  $(32\times32\times30)$ mm<sup>3</sup>  $(5\times5\times7$  points). The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location.

The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into three stages:

#### Interpolation and Extrapolation

The probe is calibrated at the center of the dipole sensors which is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY4, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and SAR extrapolation routines. The interpolation, Maxima Search and extrapolation routines are all based on the modified Quadratic Shepard's method [7].



## 10. Measurement Uncertainty

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than  $\pm 27~\%$  (8).

According to Std. C95.3  $\{9\}$ , the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of  $\pm 1$  to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least  $\pm 2$ dB can be expected.

According to CENELEC ( 10 ) , typical worst-case uncertainty of field measurements is  $\pm$  5 dB. For well-defined modulation characteristics the uncertainty can be reduced to  $\pm$  3 dB.



Source of Uncertainty	Uncertainty Value	Probability Distribution	Divisor	Ci	Standard Uncertainty ±1%(1-g)	v <sub>i</sub> or V <sub>eff</sub>
Type-A	0.9 %	Normal	1	1	0.9	9
Measurement System						
Probe Calibration	7 %	Normal	2	1	3.5	8
Axial Isotropy	0.2dB	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	1.9	8
Hemispherical Isotropy	9.6 %	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	3.9	8
Spatial Resolution	0 %	Rectangular	$\sqrt{3}$	1	0	8
Boundary Effect	11.0 %	Rectangular	$\sqrt{3}$	1	6.4	8
Linearity	0.2dB	Rectangular	$\sqrt{3}$	1	2.7	8
Detection Limit	1.0 %	Rectangular	$\sqrt{3}$	1	0.6	8
Readout Electronics	1.0 %	Normal	1	1	1.0	8
RF Ambient Conditions	3.0 %	Rectangular	$\sqrt{3}$	1	1.73	8
Probe Positioner Mech. Const.	0.4 %	Rectangular	$\sqrt{3}$	1	0.2	8
Probe Positioning	0.35 %	Rectangular	$\sqrt{3}$	1	0.2	8
Extrapolation and Integration	3.9 %	Rectangular	$\sqrt{3}$	1	2.3	8
Test sample Related						
Test sample Positioning	4.7 %	Normal	1	1	4.7	5
Device Holder Uncertainty	6.1 %	Normal	1	1	6.1	5
Drift of Output Power	5.0 %	Rectangular	$\sqrt{3}$	1	2.9	8
Phantom and Setup						
Phantom Uncertainty (Including temperature effects)	4.0%	Rectangular	$\sqrt{3}$	1	2.3	8
Liquid Conductivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	8
Liquid Conductivity (meas.)	10.0%	Rectangular	$\sqrt{3}$	0.6	3.4	8
Liquid Permittivity (target)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	8
Liquid Permittivity (meas.)	5.0%	Rectangular	$\sqrt{3}$	0.6	1.7	8
Combined standard uncertainty		RSS			13.5	88.7
Expanded uncertainty (Coverage factor = 2)		Normal (k=2)			27	

Table 6. Uncertainty Budget of DASY



## **SAR Test Results Summary**

## 11.1 GSM 850MHz / GPRS - Body SAR

Ambient:

Relative HUMIDITY (%): Temperature ( $^{\circ}$ ): **22** ± **3** 40-70

Liquid:

Mixture Type: Liquid Temperature (°C) : 22.0 MSL900

Depth of liquid (cm): 15

Measurement:

Crest Factor: 4.2 Probe S/N: 1530

Freque	ency	Band	Power	Phantom	Antenna	Accessory	SAR <sub>1g</sub>	Power Drift	Remark
MHz	СН	Dana	(dBm)	(dBm) Position	Position	Accessiy	[mW/g]	(dB)	Roman
824.2	128	GSM 850	32.72	Flat	Detachable	N/A	0.154	-0.083	Тор
836.6	190	GSM 850	32.62	Flat	Detachable	N/A	0.207	-0.043	Тор
848.8	251	GSM 850	31.60	Flat	Detachable	N/A	0.247	0.081	Тор
824.2	128	GSM 850	32.72	Flat	Detachable	N/A	0.133	-0.111	Back
836.6	190	GSM 850	32.62	Flat	Detachable	N/A	0.214	-0.013	Back
848.8	251	GSM 850	31.60	Flat	Detachable	N/A	0.293	-0.108	Back
S	Std. C95.1-1999 - Safety Limit					4.6.187	/\A//\		

**Spatial Peak** 

1.6 W/kg (mW/g) Averaged over 1 gram **Uncontrolled Exposure/General Population** 

Ambient:

Temperature (°C): **22** ± **3** Relative HUMIDITY (%): 40-70

Liquid:

Liquid Temperature (°C) : Mixture Type: MSL900 22.0

Depth of liquid (cm): 15

Measurement:

Probe S/N: Crest Factor: 2 1530

Freque	ency	Band	Power	Phantom	Antenna	Accessory	SAR <sub>1g</sub>	Power Drift	Remark	
MHz	СН	Band	Danu	(dBm)	Position	Position	Accessory	[mW/g]	(dB)	Remark
848.8	251	GSM 850	31.60	Flat	Detachable	N/A	0.116	-0.176	Back	
		1-1999 - S Spatial Pe posure/G	ak			1.6 W/k Averaged	(g (mW/g) over 1 gr			



## 11.2 PCS 1900MHz / GPRS - Body SAR

Ambient:

Relative HUMIDITY (%): Temperature ( $^{\circ}$ ): **22** ± **3** 40-70

Liquid:

Mixture Type: Liquid Temperature (°C) : MSL1800 22.0 15

Depth of liquid (cm):

Measurement:

Crest Factor: 4.2 Probe S/N: 1530

Freque	Frequency Band Power		Phantom	Antenna	Accessory	SAR <sub>1g</sub>	Power Drift	Remark		
MHz	СН	200	(dBm)	Position	Position	7.00000. <b>y</b>	[mW/g]	(dB)		
1850.2	512	PCS	29.70	Flat	Detachable	N/A	0.239	0.063	Тор	
1880.0	661	PCS	29.52	Flat	Detachable	N/A	0.193	-0.008	Тор	
1909.8	810	PCS	29.32	Flat	Detachable	N/A	0.164	0.025	Тор	
1850.2	512	PCS	29.70	Flat	Detachable	N/A	0.283	-0.180	Back	
1880.0	661	PCS	29.52	Flat	Detachable	N/A	0.255	0.043	Back	
1909.8	1909.8 810 PCS 29.32		Flat	Detachable	N/A	0.248	-0.160	Back		
Sto	Std. C95.1-1999 - Safety Limit					1.6 W/kg (mW/g)				

**Spatial Peak Uncontrolled Exposure/General Population** 

**Uncontrolled Exposure/General Population** 

Averaged over 1 gram

Ambient:

Temperature (°C): **22** ± **3** Relative HUMIDITY (%): 40-70

Liquid:

Liquid Temperature ( $^{\circ}$ ) : Mixture Type: MSL1800 22.0

> Depth of liquid (cm): 15

Measurement:

Crest Factor: Probe S/N: 2 1530

Frequenc		ency	Band	Power	Phantom	Antenna	Accessory	SAR <sub>1g</sub>	Power Drift	Remark
	MHz	СН	Dana	(dBm)	Position	Position	Accessory	[mW/g]	(dB)	Kemark
	1850.2	512	PCS	29.70	Flat	Detachable	N/A	0.190	-0.127	Back
	Std. C95.1-1999 - Safety Limit Spatial Peak					1.6 W/kg (mW/g) Averaged over 1 gram				

Test Report No: 0702FS11 ©2005 A Test Lab Techno Corp.



## 11.3 Setup Photo

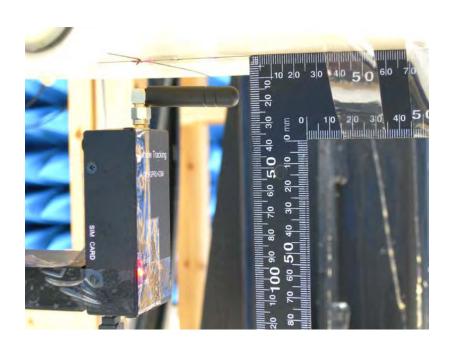


Figure 15.Body SAR Test Setup (Flat Section)\_ Top



Figure 16.Body SAR Test Setup (Flat Section) \_ Back



### 11.4 Std. C95.1-1999 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure ( W/kg ) or (mW/g)	Occupational Controlled Exposure ( W/kg ) or (mW/g)		
Spatial Peak SAR* (head)	1.60	8.00		
Spatial Peak SAR** (Whole Body)	0.08	0.40		
Spatial Peak SAR*** (Partial-Body)	1.60	8.00		
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist )	4.00	20.00		

Table 7. Safety Limits for Partial Body Exposure

#### Notes:

- \* The Spatial Peak value of the SAR averaged over any 1 gram of tissue.( defined as a tissue volume in the shape of a cube ) and over the appropriate averaging time.
- \*\* The Spatial Average value of the SAR averaged over the whole body.
- \*\*\* The Spatial Average value of the SAR averaged over the partial body.
- \*\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue.

  ( defined as a tissue volume in the shape of a cube ) and over the appropriate averaging time.

**Population / Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational** / **Controlled Environments**: are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



## 12. Conclusion

The SAR test values found for the portable mobile phone **GoPass Technology Corp. Trade Name**: **GoPass Model(s)**: **AVL-900**, **AVL-9xx**, **GPS-9xx**. are below the maximum recommended level of 1.6 W/kg (mW/g).



## 13. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, *Dosimetric evaluation of mobile communications equipment with known precision*, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields RF and Microwave, New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-frequency*: 10KHz-300GHz, Jan. 1995.



## Appendix A - System Performance Check

See following Attached Pages for System Performance Check.



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 4:13:21 PM

## System Performance Check for 900 MHz\_20070212\_Body

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:172** 

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 900 MHz;  $\sigma = 1.05 \text{ mho/m}$ ;  $\varepsilon_r = 53.6$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### System Performance Check at 900MHz/Area Scan (51x121x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.08 mW/g

### System Performance Check at 900MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.8 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.78 mW/g

Maximum value of SAR (measured) = 2.76 mW/g

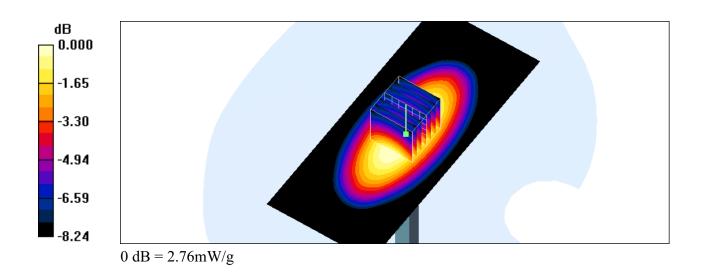



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 8:17:08 AM

# System Performance Check for 1800 MHz\_20070212\_Body

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:265

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1800 MHz;  $\sigma = 1.56 \text{ mho/m}; \ \epsilon_r = 51.9; \ \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# System Performance Check at 1800MHz/Area Scan (51x71x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.6 mW/g

#### System Performance Check at 1800MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.3 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 14.9 W/kg

SAR(1 g) = 9.46 mW/g; SAR(10 g) = 5.19 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

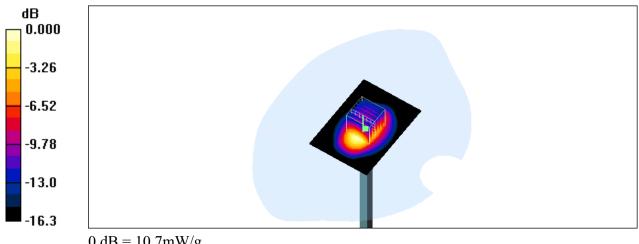

0 dB = 10.7 mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/18/2007 7:20:49 PM

# System Performance Check for 900MHz\_20070518\_Body

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:172

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 900 MHz;  $\sigma = 1.02 \text{ mho/m}$ ;  $\varepsilon_r = 55.3$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# System Performance Check for 900MHz/Area Scan (51x121x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.80 mW/g

### System Performance Check for 900MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.5 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 2.6 mW/g; SAR(10 g) = 1.69 mW/g

Maximum value of SAR (measured) = 2.83 mW/g

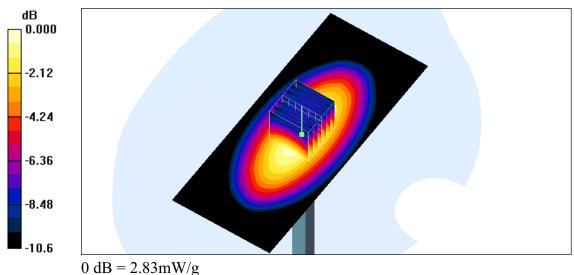



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/18/2007 9:30:00 PM

# System Performance Check at 1800MHz\_20070518\_Body

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:265

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1800 MHz;  $\sigma = 1.56 \text{ mho/m}$ ;  $\varepsilon_r = 51.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# System Performance/Area Scan (51x71x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.0 mW/g

### **System Performance/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.6 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 15.3 W/kg


SAR(1 g) = 9.35 mW/g; SAR(10 g) = 5 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

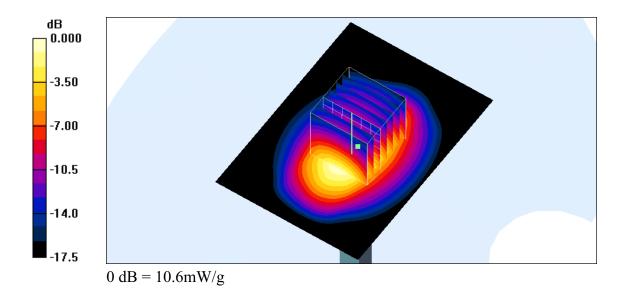




# **Z-axis Plot of System Performance Check**

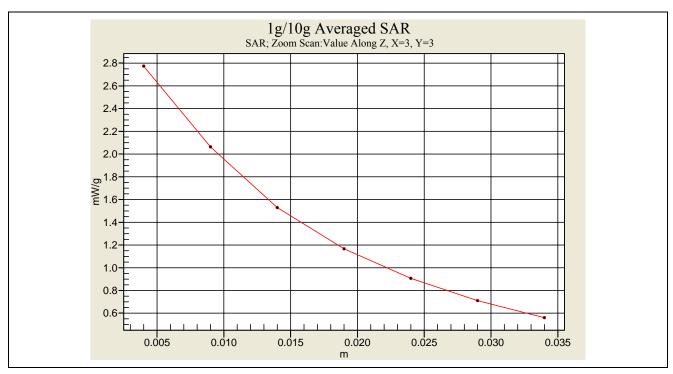


**Body-Tissue-Simulating-Liquid 900MHz** 

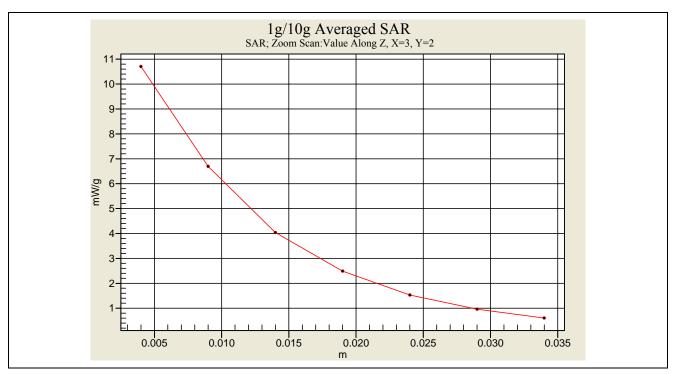


Body-Tissue-Simulating-Liquid 1800MHz



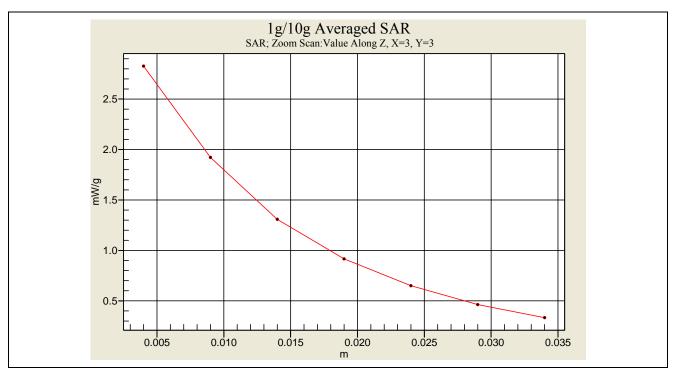

Body-Tissue-Simulating-Liquid 900MHz \_ 2007.05.18

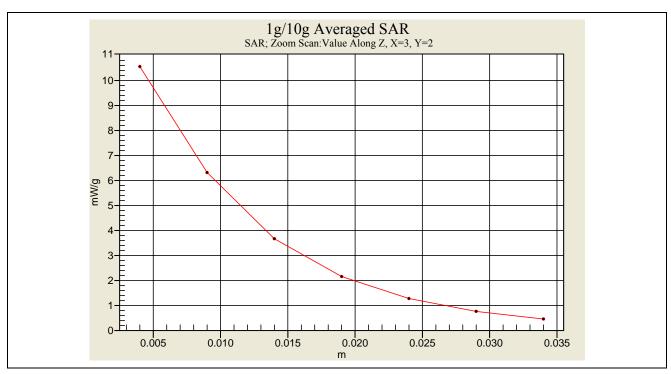

Body-Tissue-Simulating-Liquid 1800MHz \_ 2007.05.18



# Appendix B - SAR Measurement Data

See following Attached Pages for SAR Measurement Data.



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 11:44:30 AM

# Flat\_GSM850 GPRS CH128\_Test Mode\_Top\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: GSM 850 (3Down, 2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.2 Medium parameters used (interpolated): f = 824.2 MHz;

 $\sigma$  = 0.971 mho/m;  $\epsilon_r$  = 54.3;  $\rho$  = 1000 kg/m  $^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### Flat/Area Scan (91x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.169 mW/g

#### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.98 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

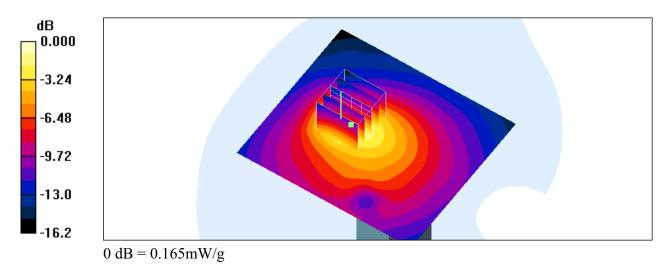



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 11:28:44 AM

# Flat\_GSM850 GPRS CH190\_Test Mode\_Top\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: GSM 850 (3Down, 2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.2 Medium parameters used: f = 836.6 MHz;  $\sigma = 0.984 \text{ mho/m}$ ;  $\varepsilon_r = 54.2$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### Flat/Area Scan (91x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.228 mW/g

### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.221 mW/g

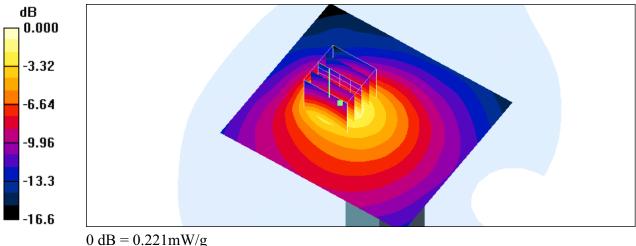



Date/Time: 2/12/2007 11:12:52 AM Test Laboratory: A Test Lab Techno Corp.

# Flat\_GSM850 GPRS CH251\_Test Mode\_Top\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: GSM 850 (3Down, 2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium parameters used: f = 848.8 MHz;

 $\sigma = 0.996 \text{ mho/m}; \ \varepsilon_r = 54.1; \ \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

# DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# Flat/Area Scan (81x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.277 mW/g

# Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.261 mW/g

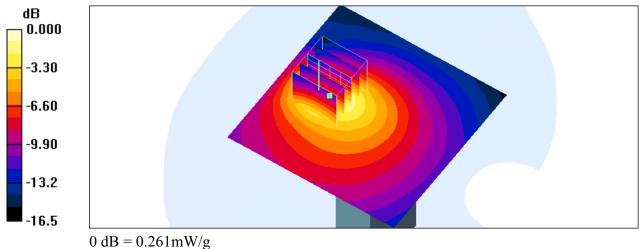



Date/Time: 2/12/2007 10:13:14 AM Test Laboratory: A Test Lab Techno Corp.

# Flat\_GSM850 GPRS CH128\_Test Mode\_Back\_15mm

# DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: GSM 850 (3Down, 2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.2

Medium parameters used (interpolated): f = 824.2 MHz;

 $\sigma = 0.971 \text{ mho/m}; \, \varepsilon_r = 54.3; \, \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### **Flat/Area Scan (71x101x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.143 mW/g

### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.141 mW/g

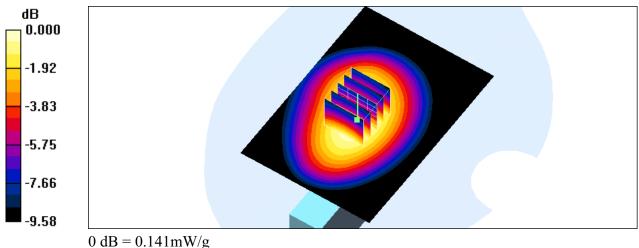



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 10:28:58 AM

# Flat\_GSM850 GPRS CH190\_Test Mode\_Back\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: GSM 850 (3Down, 2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.2

Medium parameters used: f = 836.6 MHz;

 $\sigma = 0.984 \text{ mho/m}; \ \varepsilon_r = 54.2; \ \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### Flat/Area Scan (71x91x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.229 mW/g

#### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.229 mW/g

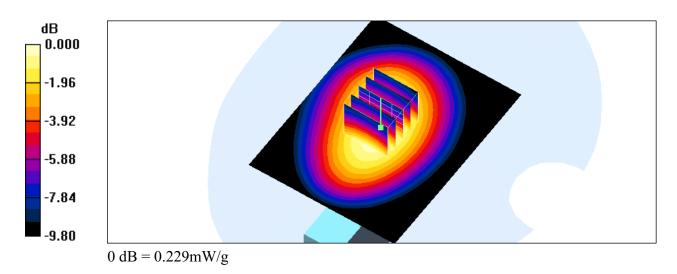



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 10:53:15 AM

# Flat\_GSM850 GPRS CH251\_Test Mode\_Back\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: GSM 850 (3Down, 2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.2

Medium parameters used: f = 848.8 MHz;

 $\sigma = 0.996 \text{ mho/m}; \, \varepsilon_r = 54.1; \, \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

#### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# Flat/Area Scan (71x91x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.314 mW/g

### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

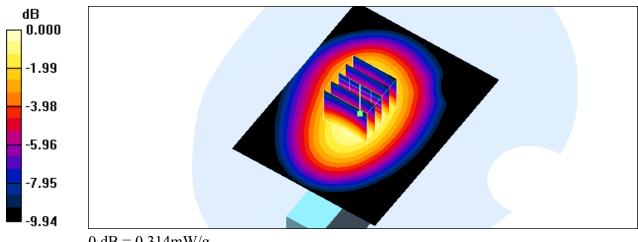

0 dB = 0.314 mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/18/2007 9:01:30 PM

# Flat\_GSM850 GPRS CH251\_Test Mode\_Back\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: GSM 850 (1Down, 4Up); Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium parameters used: f = 848.8 MHz;  $\sigma = 0.973$  mho/m;  $\epsilon_r = 55.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

Probe: ET3DV6 - SN1530; ConvF(5.66, 5.66, 5.66); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### Flat/Area Scan (71x91x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.127 mW/g

### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.123 mW/g

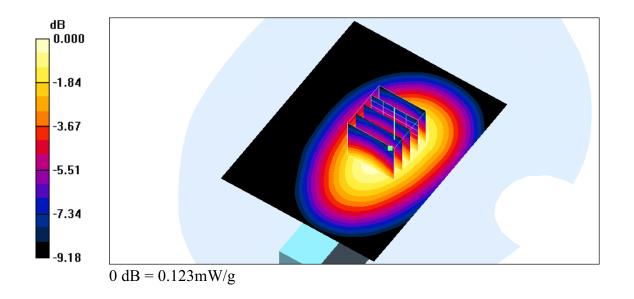



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 12:19:24 PM

# Flat\_PCS GPRS CH512\_Test Mode\_Top\_15mm

### DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: PCS 1900 GPRS(3Down,2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4.2 Medium parameters used (interpolated): f = 1850.2 MHz;

 $\sigma = 1.52 \text{ mho/m}; \ \varepsilon_r = 52.9; \ \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

- Probe: ET3DV6 SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 10/16/2006
- Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Flat/Area Scan (91x81x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.270 mW/g


Flat/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.264 mW/g

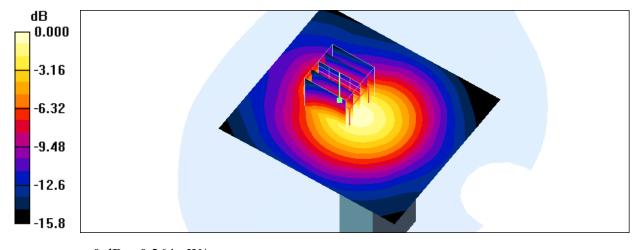

0 dB = 0.264 mW/g



Date/Time: 2/12/2007 12:34:49 PM Test Laboratory: A Test Lab Techno Corp.

# Flat\_PCS GPRS CH661\_Test Mode\_Top\_15mm

### DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: PCS 1900 GPRS(3Down,2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.2 Medium parameters used: f = 1880 MHz;

 $\sigma = 1.55 \text{ mho/m}; \ \epsilon_r = 52.9; \ \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### Flat/Area Scan (91x81x1):

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.296 mW/g

### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

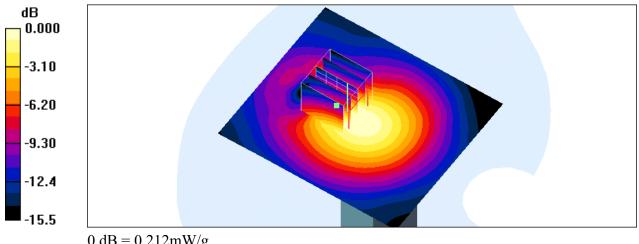

0 dB = 0.212 mW/g



Date/Time: 2/12/2007 12:49:48 PM Test Laboratory: A Test Lab Techno Corp.

# Flat\_PCS GPRS CH810\_Test Mode\_Top\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: PCS 1900 GPRS(3Down,2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium parameters used: f = 1909.8 MHz;

 $\sigma$  = 1.57 mho/m;  $\epsilon_r$  = 52.7;  $\rho$  = 1000 kg/m  $^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# Flat/Area Scan (91x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.187 mW/g

#### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.178 mW/g

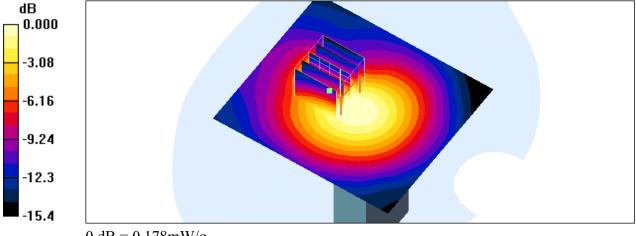

0 dB = 0.178 mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 3:35:17 PM

# Flat\_PCS GPRS CH512\_Test Mode\_Back\_15mm

# DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: PCS 1900 GPRS(3Down,2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.2 Medium parameters used (interpolated): f = 1850.2 MHz;

 $\sigma$  = 1.52 mho/m;  $\epsilon_r$  = 52.9;  $\rho$  = 1000 kg/m  $^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### **Flat/Area Scan (71x111x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.307 mW/g

#### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

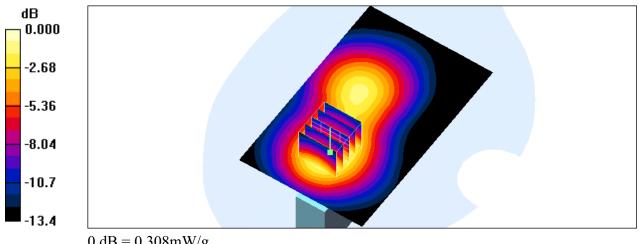

0 dB = 0.308 mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 5/18/2007 11:32:03 PM

# Flat PCS GPRS CH512 Test Mode Back 15mm

# DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: PCS 1900 GPRS(1Down, 4Up); Frequency: 1850.2 MHz; Duty Cycle: 1:2 Medium parameters used (interpolated): f = 1850.2 MHz;

$$\sigma$$
 = 1.48 mho/m;  $\epsilon_{r}^{}$  = 52.4;  $\rho$  = 1000 kg/m  $^{3}$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# **Flat/Area Scan (71x111x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.213 mW/g

# Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.206 mW/g

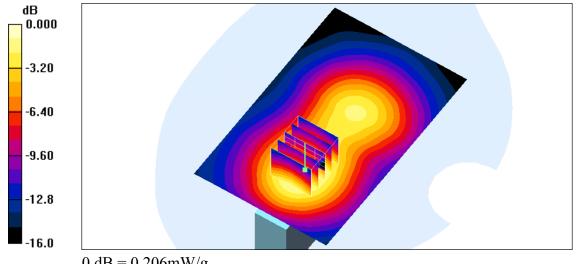



Date/Time: 2/12/2007 3:57:46 PM Test Laboratory: A Test Lab Techno Corp.

# Flat\_PCS GPRS CH661\_Test Mode\_Back\_15mm

### DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: PCS 1900 GPRS(3Down,2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.2 Medium parameters used: f = 1880 MHz;

 $\sigma = 1.55 \text{ mho/m}; \ \epsilon_r = 52.9; \ \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

# **Flat/Area Scan (71x111x1):**

Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.279 mW/g

# Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.55 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.274 mW/g

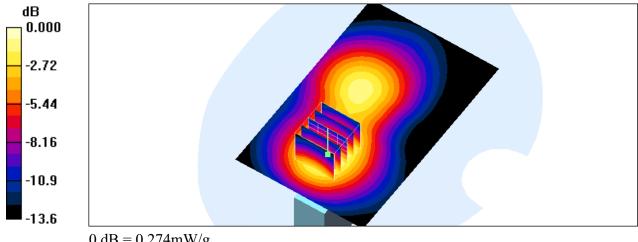

0 dB = 0.274 mW/g



Test Laboratory: A Test Lab Techno Corp. Date/Time: 2/12/2007 4:13:48 PM

# Flat\_PCS GPRS CH810\_Test Mode\_Back\_15mm

DUT: AVL-900; Type: GPS Tracker; FCC ID: UBHAVL9X

Communication System: PCS 1900 GPRS(3Down,2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium parameters used: f = 1909.8 MHz;

 $\sigma = 1.57 \text{ mho/m}; \ \epsilon_r = 52.7; \ \rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

• Probe: ET3DV6 - SN1530; ConvF(4.4, 4.4, 4.4); Calibrated: 9/21/2006

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn541; Calibrated: 10/16/2006

• Phantom: SAM 12; Type: SAM v4.0; Serial: TP:1009

• Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

### **Flat/Area Scan (71x111x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.279 mW/g

#### Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.90 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.248 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.269 mW/g

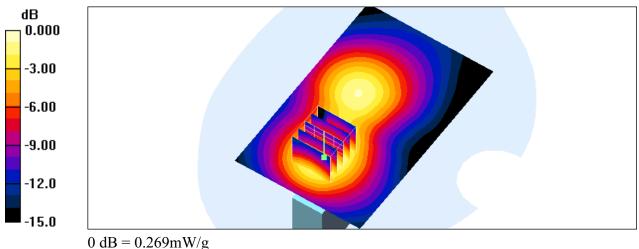



#### **Z-axis Plot of SAR Measurement**

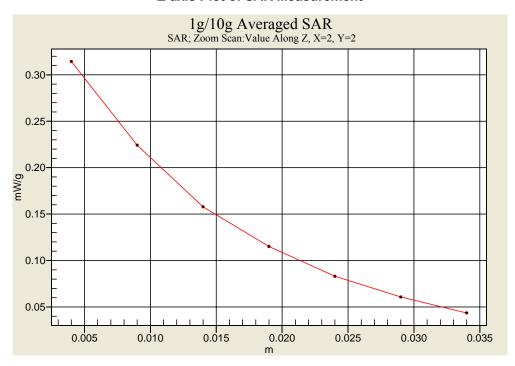


Figure 17. Z-axis Plot of GSM850 CH251

### **Z-axis Plot of SAR Measurement k**

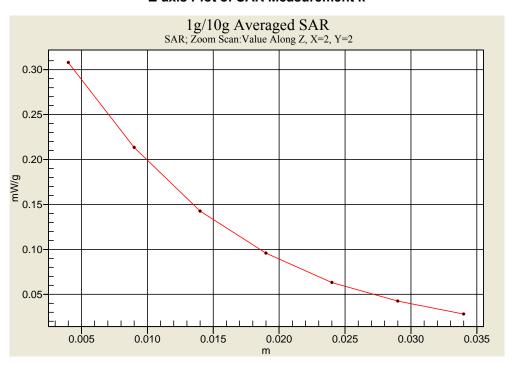


Figure 18. Z-axis Plot of PCS CH512



#### **Z-axis Plot of SAR Measurement**

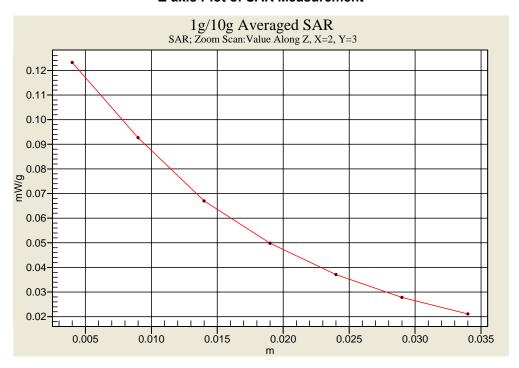


Figure 19. Z-axis Plot of GSM850 CH251 \_ 2007.05.18

### **Z-axis Plot of SAR Measurement k**

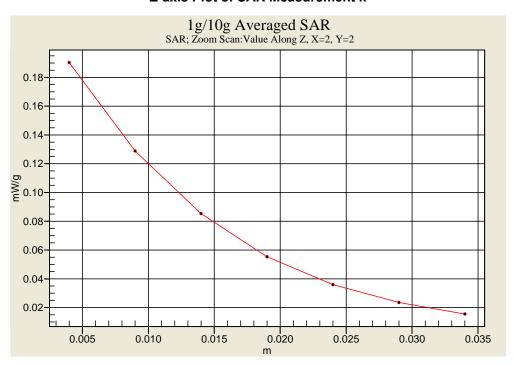


Figure 20. Z-axis Plot of PCS CH512 \_ 2007.05.18



# Appendix C - Calibration

All of the instruments Calibration information are listed below.

- D900V2 SN:172 Calibration No.D900V2-172\_Jan07
- Dipole \_ D1800V2 SN: 2d265 Calibration No.D1800V2d265\_Oct06
- Probe \_ ET3DV6 SN:1530 Calibration No.ET3-1530\_Sep06
- DAE \_ DAE4 SN:541Calibration No.DAE4-541\_Oct06