FCC 47 CFR PART 15 SUBPART C

Report No.: C130422Z02-RP1

TEST REPORT

For

BT Headphone Model: H-0002 Brand: Intech

Test Report Number: C130422Z02-RP1

Prepared for

Intech Electronics Corp.

Hall B3, Yuan-Hu Industry Park, Golf Blvd., Song-Yuan Village, Guan-Lan,
Shenzhen, China

Prepared by

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000 FAX: 86-755-28055221 Issued Date: April 26, 2013



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.

FCC ID: UC3H0002BT00 Page 1 / 60

Revision History

Report No.: C130422Z02-RP1

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C130422Z02-RP1	Initial Issue	ALL	Sunny Wang

FCC ID: UC3H0002BT00 Page 2 of 60

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION	4
2.	EUT DESCRIPTION	5
3.	TEST METHODOLOGY	6
	3.1 DESCRIPTION OF TEST MODES	6
4.	FACILITIES AND ACCREDITATIONS	7
	4.1 FACILITIES	7
	4.2 ACCREDITATIONS	
5.	SETUP OF EQUIPMENT UNDER TEST	8
	5.1 SETUP CONFIGURATION OF EUT	8 8
6.	FCC PART 15.247 REQUIREMENTS	9
	6.1 20dB BANDWIDTH	9
	6.2 PEAK POWER	14
	6.3 PEAK POWER SPECTRAL DENSITY	
	6.4 BAND EDGES MEASUREMENT	
	6.5 FREQUENCY SEPARATION	27
	6.6 NUMBER OF HOPPING FREQUENCY	
	6.7 TIME OF OCCUPANCY (DWELL TIME)	
	6.8 SPURIOUS EMISSIONS	
	6.9 POWERLINE CONDUCTED EMISSIONS	58

Report No.: C130422Z02-RP1

1. TEST RESULT CERTIFICATION

Product:	BT Headphone
Model:	H-0002
Brand:	Intech
Tested:	April 22~26, 2013
Applicant:	Intech Electronics Corp. Hall B3, Yuan-Hu Industry Park, Golf Blvd., Song-Yuan Village, Guan-Lan, Shenzhen, China
Manufacturer:	Intech Electronics Corp. Hall B3, Yuan-Hu Industry Park, Golf Blvd., Song-Yuan Village, Guan-Lan, Shenzhen, China

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tom Gan

Supervisor of EMC Dept.

Compliance Certification Service Inc.

Reviewed by:

Ruby Zhang

Supervisor of Report Dept.

Compliance Certification Service Inc.

Report No.: C130422Z02-RP1

2. EUT DESCRIPTION

Product	BT Headphone		
Model Number	H-0002		
Brand	Intech		
Model Discrepancy	N/A		
Identify Number	C130422Z02-RP1		
Power Supply	DC5V supplied by the Notebook or DC3.7V supplied by the battery		
Received Date	April 22, 2013		
Frequency Range	2402 ~ 2480 MHz		
Transmit Power	GFSK : -0.85dBm π/4-DQPSK : -4.00dBm		
Modulation Technique	FHSS (GFSK for 1Mbps, π /4-DQPSK for 2Mbps)		
Number of Channels	79 Channels		
Antenna Specification	PCB Antenna with 3.85dBi gain(Max)		
Temperature Range	0°C ~ +40°C		

Report No.: C130422Z02-RP1

Note: This submittal(s) (test report) is intended for FCC ID: <u>UC3H0002BT00</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

FCC ID: UC3H0002BT00 Page 5 of 60

3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Report No.: C130422Z02-RP1

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charging	
Radiated Emission	Mode 1: TX	

Above 1G, Channel Low (2402MHz) \cdot Mid (2441MHz) and High (2480MHz) were chosen for full testing for GFSK and $\pi/4$ -DQPSK.

FCC ID: UC3H0002BT00 Page 6 of 60

4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Report No.: C130422Z02-RP1

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA A2LA China CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA FCC
Japan VCCI(C-3478, R-3135, T-652, G-624)
Canada INDUSTRY CANADA
Taiwan BSMI
Norway Nemko

Copies of granted accreditation certificates are available for downloading from our web site, http://www.ccsrf.com

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty		
Conducted emissions	9kHz~30MHz	+/- 3.18dB		
	30MHz ~ 200MHz	+/- 3.79dB		
Radiated emissions	200MHz ~1000MHz	+/- 3.62dB		
	Above 1000MHz	+/- 5.04dB		
Band Edges				

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.

FCC ID: UC3H0002BT00 Page 7 of 60

5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1.	Notebook	Lenovo	Wb04591721	N/A	Lenovo	N/A	Unshielded 2.8m

Report No.: C130422Z02-RP1

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

FCC ID: UC3H0002BT00 Page 8 of 60

6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH

None; for reporting purpose only.


MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Report No.: C130422Z02-RP1

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
- 4. Mark the peak frequency and 20dB (upper and lower) frequency.
- 5. Repeat until all the test channels are investigated.


TEST RESULTS

No non-compliance noted

FCC ID: UC3H0002BT00 Page 9 of 60


Test plot (GFSK)

20dB Bandwidth(CH Low)

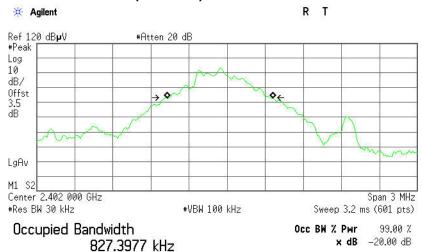

Transmit Freq Error -54.517 kHz x dB Bandwidth 832.576 kHz


20dB Bandwidth (CH Mid)

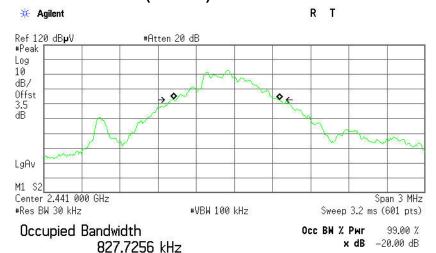

Transmit Freq Error -60.564 kHz x dB Bandwidth 853.313 kHz

FCC ID: UC3H0002BT00 Page 10 of 60

20dB Bandwidth (CH High)

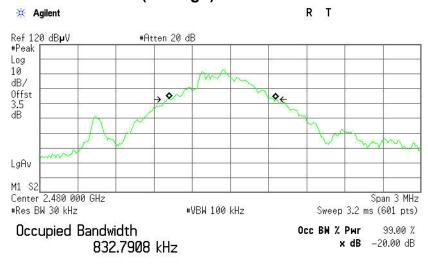


Transmit Freq Error x dB Bandwidth

-62.257 kHz 838.061 kHz

Test plot ($\pi/4$ -DQPSK)

20dB Bandwidth (CH Low)

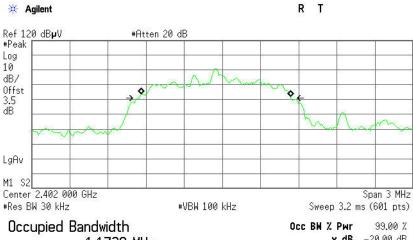


1.1738 MHz

x dB -20.00 dB

Report No.: C130422Z02-RP1

Transmit Freq Error -52.642 kHz x dB Bandwidth 1.192 MHz

20dB Bandwidth (CH Mid)

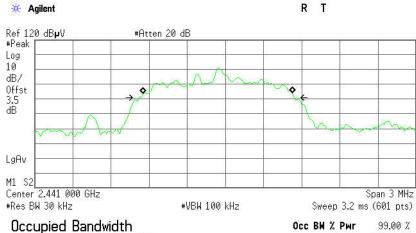


x dB -20.00 dB

Transmit Freq Error -62.715 kHz x dB Bandwidth 1.222 MHz

1.1705 MHz



20dB Bandwidth (CH High)

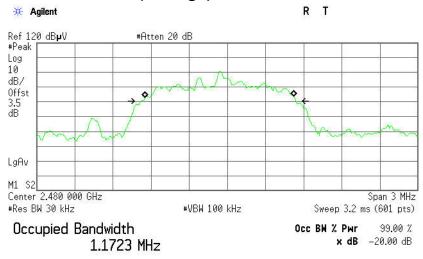

Transmit Freq Error x dB Bandwidth

-64.774 kHz 1.220 MHz

6.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

Report No.: C130422Z02-RP1


- 1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
- 2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
- 3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	03/09/2013	03/08/2014
Power Sensor	Anritsu	MA2411B	1126150	03/09/2013	03/08/2014
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

FCC ID: UC3H0002BT00 Page 14 of 60

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-4.35	3.50	-0.85	0.00082		PASS
Mid	2441	-4.63	3.50	-1.13	0.00077	1	PASS
High	2480	-5.18	3.50	-1.68	0.00068		PASS

Report No.: C130422Z02-RP1

π/4-DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-7.50	3.50	-4.00	0.00040		PASS
Mid	2441	-8.16	3.50	-4.66	0.00034	1	PASS
High	2480	-9.09	3.50	-5.59	0.00028		PASS

FCC ID: UC3H0002BT00 Page 15 of 60

6.3 PEAK POWER SPECTRAL DENSITY

LIMIT

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Report No.: C130422Z02-RP1


2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.

FCC ID: UC3H0002BT00 Page 16 of 60

6.4 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

Report No.: C130422Z02-RP1

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)									
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration				
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014				
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014				
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014				
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014				
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2012	06/21/2013				
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014				
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014				
Loop Antenna	A、R、A	PLA-1030/B	1029	03/23/2013	03/23/2014				
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R				
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R				
Controller	СТ	N/A	N/A	N.C.R	N.C.R				
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014				
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R				
Test S/W FARAD		LZ-RF / CCS-SZ-3A2							

Test Configuration

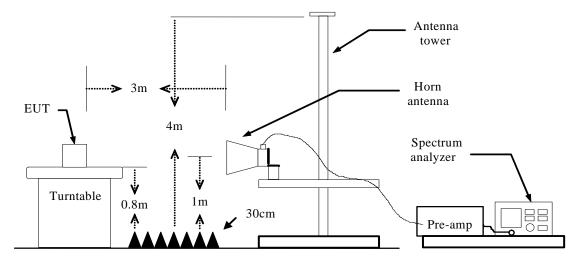

FCC ID: UC3H0002BT00 Page 17 of 60

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Report No.: C130422Z02-RP1


- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=510Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.

Test Data (GFSK)


Band Edges (CH-Low)

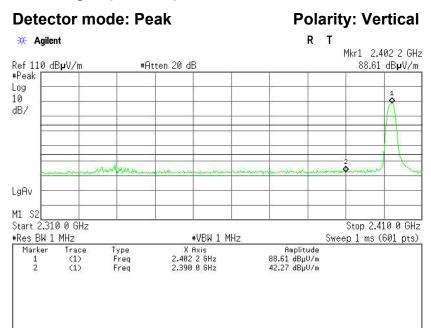


Detector mode: Average Polarity: Vertical

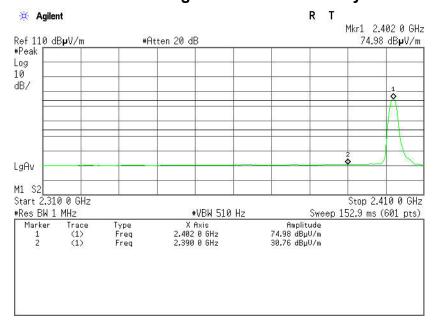


FCC ID: UC3H0002BT00 Page 19 of 60



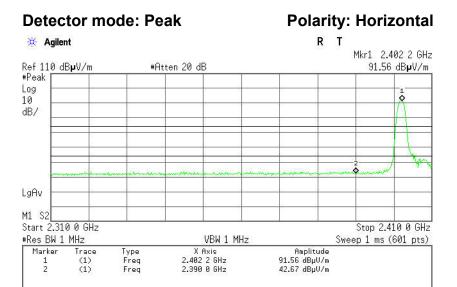

Detector mode: Average Polarity: Horizontal

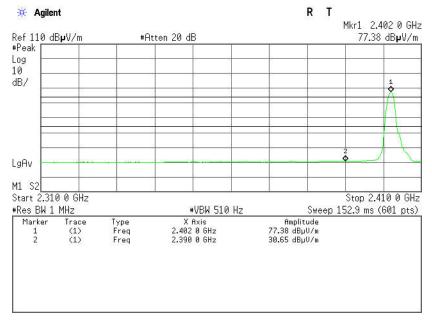


FCC ID: UC3H0002BT00 Page 20 of 60


Services Inc. Report No.: C130422Z02-RP1

Band Edges (CH-High)



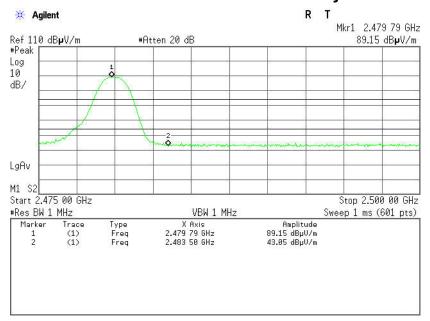


Detector mode: Average Polarity: Vertical

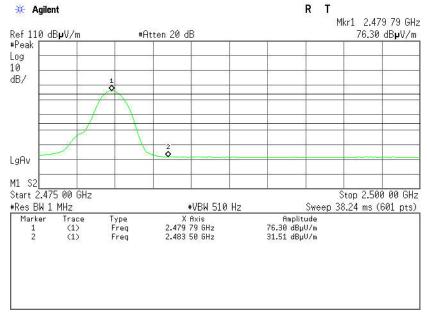


FCC ID: UC3H0002BT00 Page 21 of 60



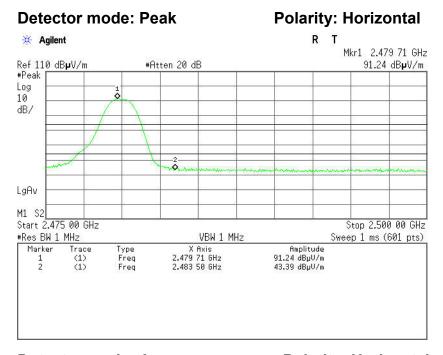


Polarity: Horizontal Detector mode: Average Agilent Mkr1 2.479 79 GHz 77.78 dB**µ**V/m Ref 110 dBpV/m #Atten 20 dB

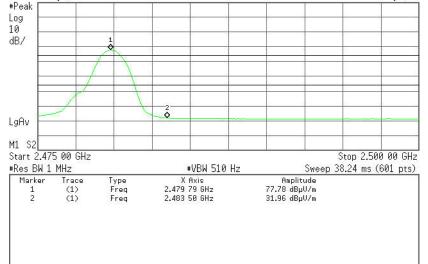


Test Data ($\pi/4$ -DQPSK)

Band Edges (CH-Low)


Detector mode: Peak Polarity: Vertical

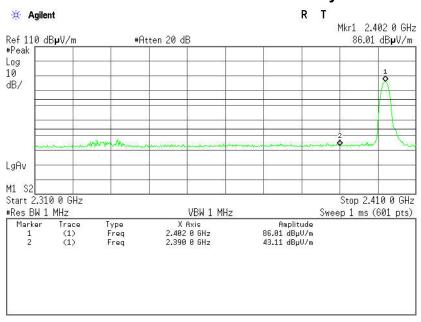


Detector mode: Average Polarity: Vertical

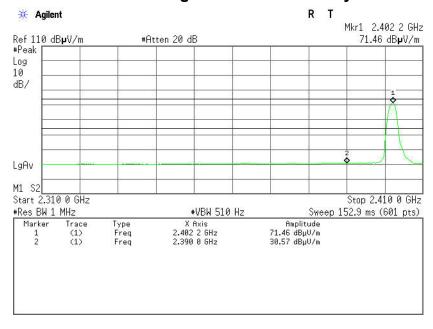

FCC ID: UC3H0002BT00 Page 23 of 60

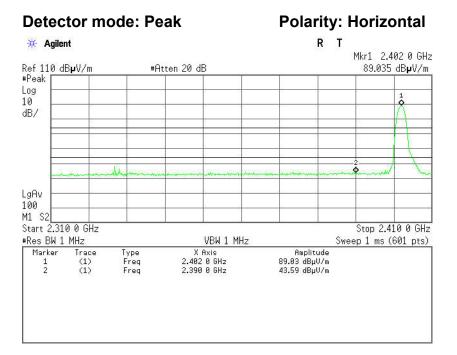


Polarity: Horizontal Detector mode: Average # Agilent

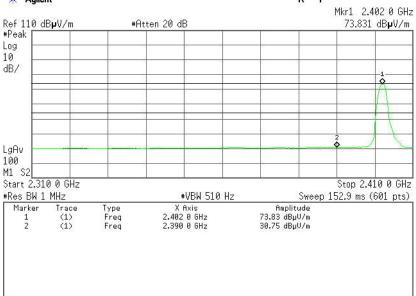

tion Services Inc. Report No.: C130422Z02-RP1


Band Edges (CH-High)




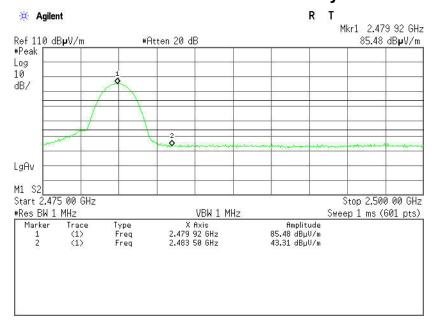

Detector mode: Average Po

Polarity: Vertical

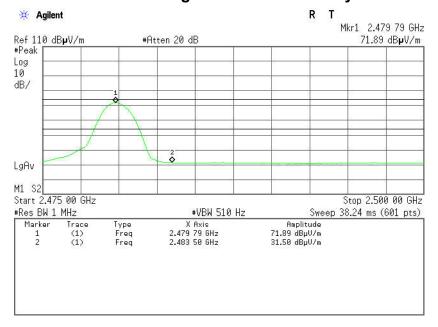

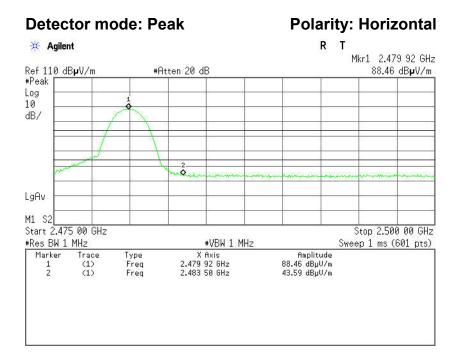

Polarity: Horizontal Detector mode: Average Agilent Mkr1 2.479 87 GHz 74.18 dB**µ**V/m Ref 110 dBpV/m #Atten 20 dB #Peak Log 10 dB/ LgAv M1 S2 Stop 2.500 00 GHz Start 2.475 00 GHz #Res BW 1 MHz #VBW 510 Hz Sweep 38.24 ms (601 pts) X Axis 2.479 87 GHz 2.483 50 GHz Type Freq Freq Amplitude Marker Trace 74.18 dBµU/m 31.98 dBµU/m

6.5 FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Report No.: C130422Z02-RP1

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation Two-thirds of the 20 dB (MHz) Bandwidth (kHz)		Channel Separation Limit	Result
1.000	568.875	> Two-thirds of the 20 dB Bandwidth	Pass

π/4-DQPSK


Channel Separation (MHz) Two-thirds of the 20 dB Bandwidth (kHz)		Channel Separation Limit	Result
1.000	814.667	> Two-thirds of the 20 dB Bandwidth	Pass

FCC ID: UC3H0002BT00 Page 27 of 60


GFSK

Test Plot

Measurement of Channel Separation

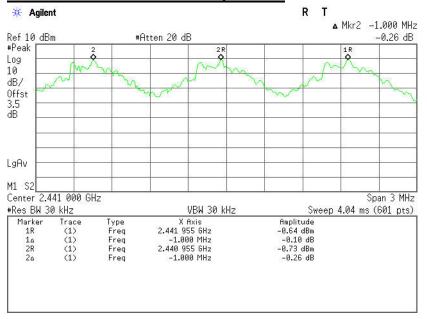

20 dB bandwidth(CH Mid)

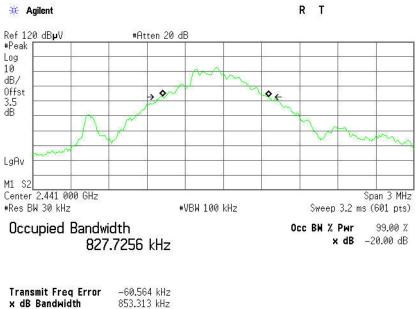


FCC ID: UC3H0002BT00 Page 28 of 60


π/4-DQPSK

Test Plot

Measurement of Channel Separation

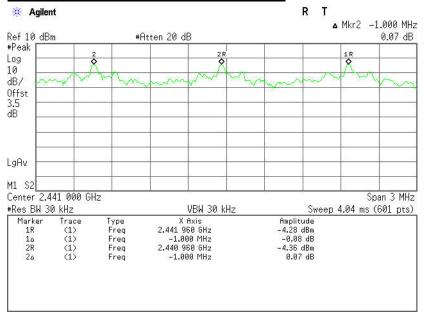

20 dB bandwidth(CH Mid)

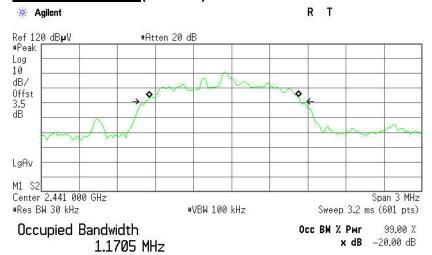

Transmit Freq Error -62.715 kHz x dB Bandwidth 1.222 MHz

6.6 NUMBER OF HOPPING FREQUENCY

<u>LIMIT</u>

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.


Report No.: C130422Z02-RP1

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.
- 4. Set the spectrum analyzer as RBW, VBW=300kHz,
- 5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data


Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

FCC ID: UC3H0002BT00 Page 30 of 60


Test Plot (GFSK)

Channel Number

2.400 GHz - 2.4415 GHz

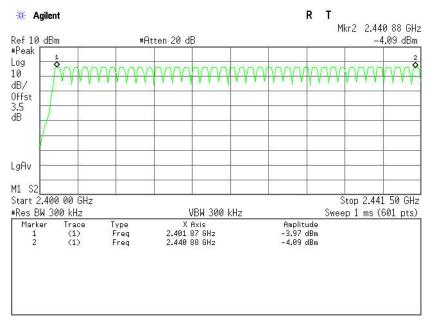


2.4415 GHz -2.4835 GHz

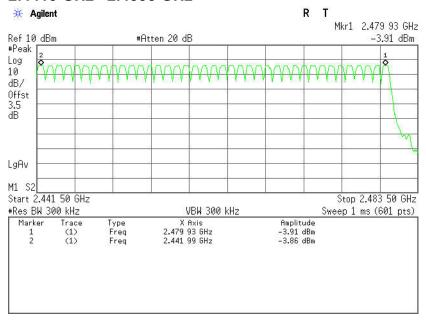


Test Plot (π/4-DQPSK)

Channel Number

2.400 GHz - 2.4415 GHz

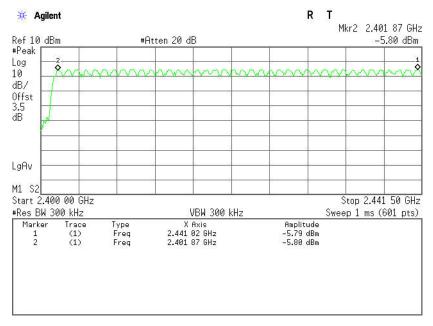

2.4415 GHz -2.4835 GHz

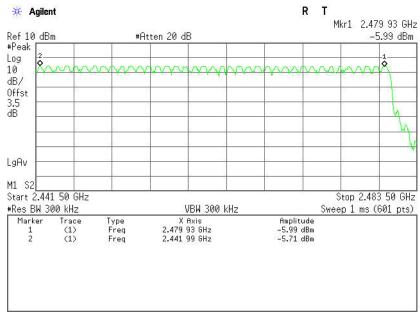

6.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.


Report No.: C130422Z02-RP1

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 5. Repeat above procedures until all frequency measured were complete.

FCC ID: UC3H0002BT00 Page 33 of 60

TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Mid: 0.522* (1600/2)/79*31.6 = 167.040(ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.522	167.040	31.60	400.00	PASS

Report No.: C130422Z02-RP1

DH 3

CH Mid: 1.775* (1600/4)/79 * 31.6 = 284.000 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.775	284.000	31.60	400.00	PASS

<u>DH 5</u>

CH Mid: 3.025* (1600/6)/79 * 31.6 = 322.667(ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.025	322.667	31.60	400.00	PASS

FCC ID: UC3H0002BT00 Page 34 of 60

Test Data

π/4-DQPSK

<u>DH 1</u>

CH Mid: 0.535* (1600/2)/79*31.6 = 171.200 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.535	171.200	31.60	400.00	PASS

Report No.: C130422Z02-RP1

<u>DH 3</u>

CH Mid: 1.785* (1600/4)/79 * 31.6 = 285.600 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.785	285.600	31.60	400.00	PASS

<u>DH 5</u>

CH Mid: 3.025* (1600/6)/79* 31.6 = 322.667 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.025	322.667	31.60	400.00	PASS


FCC ID: UC3H0002BT00 Page 35 of 60

Test Plot

GFSK


DH 1


(CH Mid)

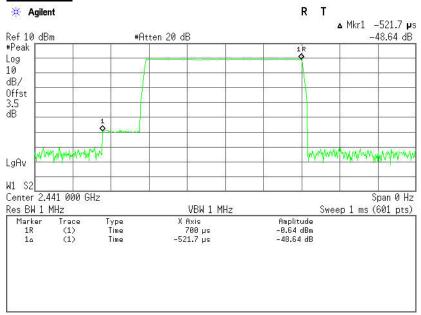


DH 3

(CH Mid)

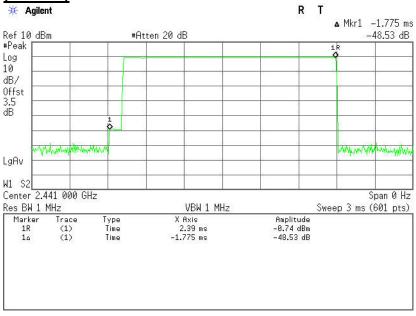




DH 5

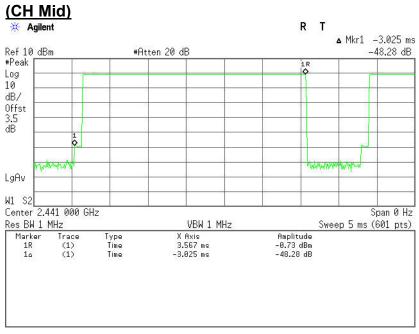

Test Plot π/4-DQPSK


DH 1

(CH Mid)

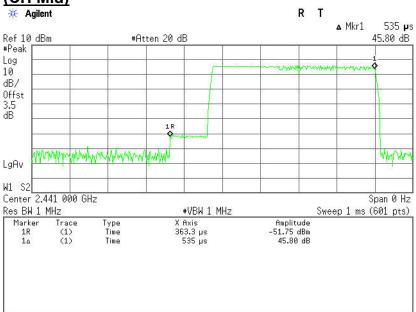


DH 3


(CH Mid)

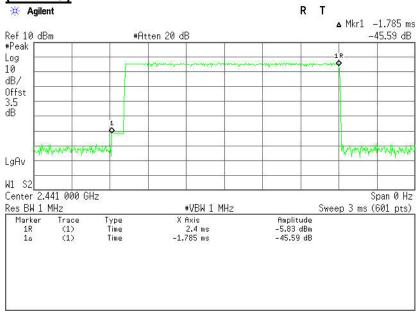

FCC ID: UC3H0002BT00 Page 38 of 60



DH 5

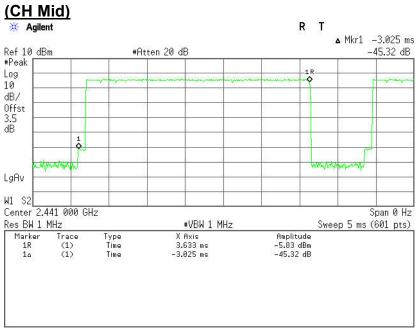

6.8 SPURIOUS EMISSIONS

6.8.1. Conducted Measurement

LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


Report No.: C130422Z02-RP1

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

FCC ID: UC3H0002BT00 Page 40 of 60


Test Plot (GFSK)

CH Low

30MHz ~2.9GHz

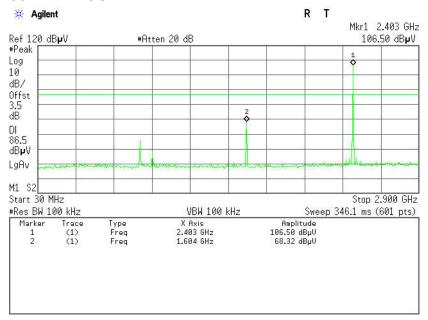


2.9GHz ~26.5GHz

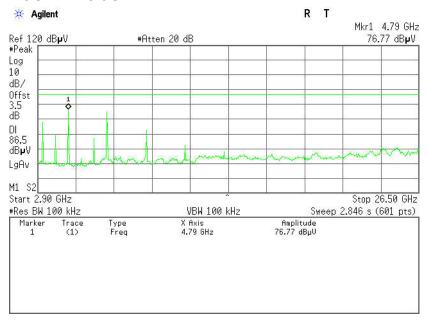


CH Mid

30MHz ~ 2.9GHz

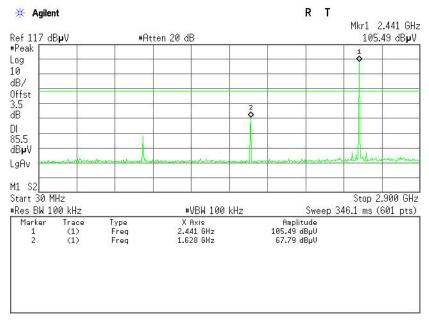


2.9GHz ~ 26.5GHz

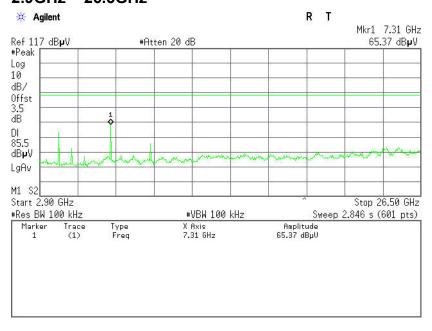


CH High

30MHz ~ 2.9GHz

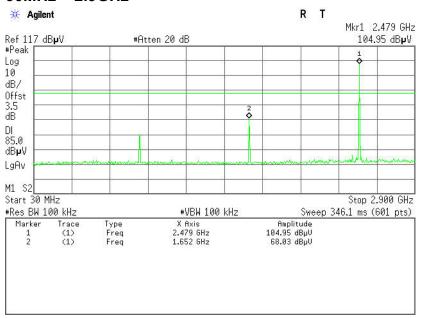


2.9GHz ~ 26.5GHz

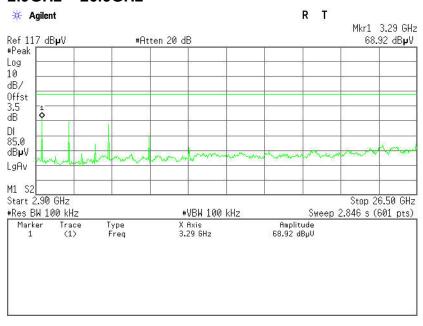


Test Plot (π/4-DQPSK)

CH Low

30MHz ~2.9GHz

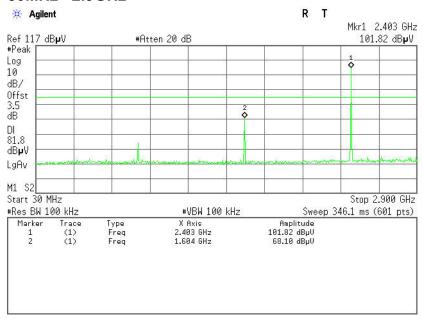


2.9GHz ~26.5GHz

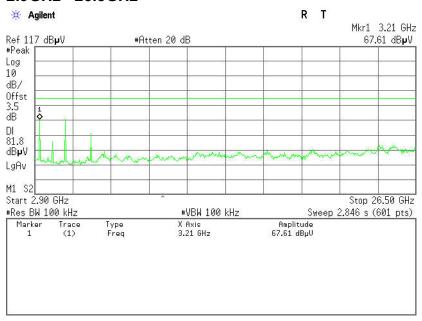


CH Mid

30MHz ~ 2.9GHz

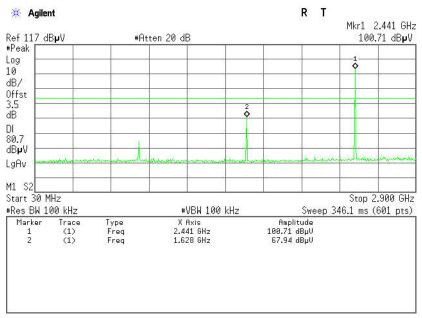


2.9GHz ~ 26.5GHz

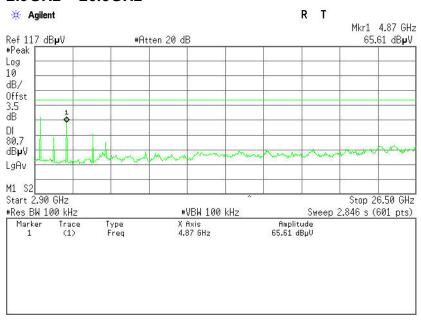


CH High

30MHz ~ 2.9GHz

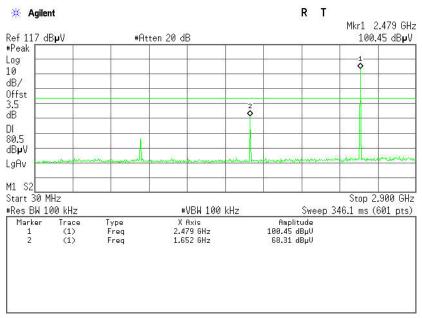

2.9GHz ~ 26.5GHz

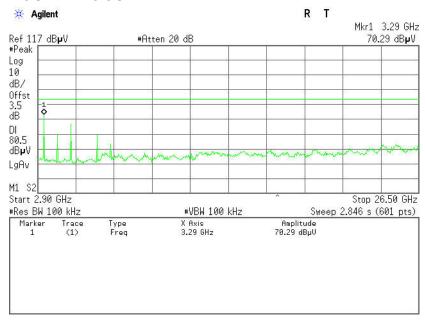

6.8.2. Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Report No.: C130422Z02-RP1

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)	
30-88	100	40	
88-216	150	43.5	
216-960	200	46	
Above 960	500	54	

FCC ID: UC3H0002BT00 Page 47 of 60

MEASUREMENT EQUIPMENT USED

	Radiated Er	mission Test S	ite 966 (2)		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2012	06/21/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A、R、A	PLA-1030/B	1029	03/23/2013	03/23/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	СТ	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CC	S-SZ-3A2	


Report No.: C130422Z02-RP1

Remark: Each piece of equipment is scheduled for calibration once a year.

FCC ID: UC3H0002BT00 Page 48 of 60


Test Configuration

Below 1 GHz

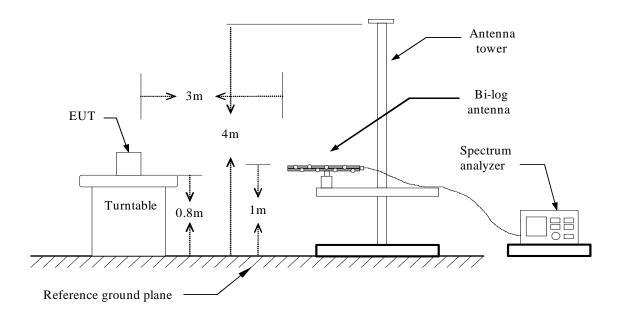

Report No.: C130422Z02-RP1

Above 1 GHz

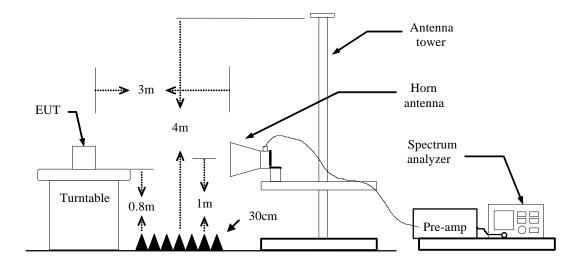

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Report No.: C130422Z02-RP1

- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

Below 1 GHz

Operation Mode: TX Test Date: April 25, 2013

Report No.: C130422Z02-RP1

Temperature: 24°C Tested by: Leevin Li

Humidity: 52% RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
144.7833	40.59	-19.12	21.47	43.50	-22.03	V	QP
246.6333	36.76	-17.43	19.33	46.00	-26.67	V	QP
502.0667	35.86	-14.16	21.70	46.00	-24.30	V	QP
736.4833	39.38	-10.75	28.63	46.00	-17.37	V	QP
827.0167	39.38	-10.55	28.83	46.00	-17.17	V	QP
901.3833	36.72	-9.66	27.06	46.00	-18.94	V	QP
274.1167	33.69	-18.47	15.22	46.00	-30.78	Н	QP
359.8000	33.84	-16.80	17.04	46.00	-28.96	Н	QP
516.6167	34.15	-14.69	19.46	46.00	-26.54	Н	QP
644.3333	33.33	-12.82	20.51	46.00	-25.49	Н	QP
733.2500	34.26	-10.71	23.55	46.00	-22.45	Н	QP
801.1500	36.35	-10.52	25.83	46.00	-20.17	Н	QP

^{**}Remark: No emission found between lowest internal used/generated frequency to 30MHz. **Notes:**

- 1. Measuring frequencies from 9kHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.

5. Frequency (MHz). = Emission frequency in MHz

Reading (dBuV) = Receiver reading

Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)

Limit (dBuV/m) = Limit stated in standard

Margin(dB) = Measured (dBuV/m) - Limits (dBuV/m)Antenna Pole(V/H) = Current carrying line of reading

FCC ID: UC3H0002BT00 Page 51 of 60



Above 1 GHz GFSK

Operation Mode:TX(CH Low)Test Date:April 25, 2013Temperature:24°CTested by:Leevin LiHumidity:52% RHPolarity:Ver. / Hor.

Report No.: C130422Z02-RP1

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1240.0000	51.98	-8.55	43.43	74.00	-30.57	V	peak
1600.0000	53.55	-8.68	44.87	74.00	-29.13	V	peak
2005.0000	55.42	-11.22	44.20	74.00	-29.80	V	peak
3205.0000	55.01	-4.09	50.92	74.00	-23.08	V	peak
4810.0000	60.79	0.46	61.25	74.00	-12.75	V	peak
4810.0000	39.21	0.46	39.67	54.00	-14.33	V	AVG
7210.0000	48.74	7.38	56.12	74.00	-17.88	V	peak
7210.0000	35.51	7.38	42.89	54.00	-11.11	V	AVG
1435.0000	50.62	-7.98	42.64	74.00	-31.36	Н	peak
1600.0000	55.37	-8.68	46.69	74.00	-27.31	Н	peak
3205.0000	57.04	-4.09	52.95	74.00	-21.05	Н	peak
3205.0000	41.61	-4.09	37.52	54.00	-16.48	Н	AVG
4000.0000	47.98	-2.53	45.45	74.00	-28.55	Н	peak
4810.0000	62.12	0.46	62.58	74.00	-11.42	Н	peak
4810.0000	40.74	0.46	41.20	54.00	-12.80	Н	AVG
7210.0000	49.78	7.38	57.16	74.00	-16.84	Н	peak
7210.0000	34.97	7.38	42.35	54.00	-11.65	Н	AVG

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms. b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading $(dB\mu V/m)$ = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$

Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)

Pk = Peak ReadingAV. = Average Reading

Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid) Test Date: April 25, 2013

Report No.: C130422Z02-RP1

Temperature:24°CTested by:Leevin LiHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1990.0000	56.41	-11.21	45.20	74.00	-28.80	V	peak
3250.0000	55.86	-4.07	51.79	74.00	-22.21	V	peak
4060.0000	46.85	-2.24	44.61	74.00	-29.39	V	peak
4885.0000	58.39	0.80	59.19	74.00	-14.81	V	peak
4885.0000	37.96	0.80	38.76	54.00	-15.24	V	AVG
6295.0000	45.00	3.97	48.97	74.00	-25.03	V	peak
7315.0000	48.63	7.49	56.12	74.00	-17.88	V	peak
7315.0000	35.99	7.49	43.48	54.00	-10.52	V	AVG
		_	T			T	Ī
1630.0000	54.84	-8.79	46.05	74.00	-27.95	Н	peak
3250.0000	55.16	-4.07	51.09	74.00	-22.91	Н	peak
4450.0000	45.89	-0.73	45.16	74.00	-28.84	Н	peak
4885.0000	61.96	0.80	62.76	74.00	-11.24	Н	peak
4885.0000	39.83	0.80	40.63	54.00	-13.37	Н	AVG
6280.0000	45.11	3.92	49.03	74.00	-24.97	Н	peak
7330.0000	47.42	7.50	54.92	74.00	-19.08	Н	peak
7330.0000	33.86	7.50	41.36	54.00	-12.64	Н	AVG

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading $(dB\mu V/m)$ = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$

Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

FCC ID: UC3H0002BT00 Page 53 of 60



Operation Mode: April 25, 2013 TX(CH High) Test Date:

Report No.: C130422Z02-RP1

24°C Temperature: Tested by: Leevin Li **Humidity:** 52% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1660.0000	54.31	-8.91	45.40	74.00	-28.60	V	peak
2005.0000	55.70	-11.22	44.48	74.00	-29.52	V	peak
3310.0000	58.76	-4.04	54.72	74.00	-19.28	V	peak
3310.0000	41.97	-4.04	37.93	54.00	-16.07	V	AVG
4960.0000	57.37	1.14	58.51	74.00	-15.49	V	peak
4960.0000	38.42	1.14	39.56	54.00	-14.44	V	AVG
6265.0000	45.61	3.88	49.49	74.00	-24.51	V	peak
7435.0000	48.72	7.61	56.33	74.00	-17.67	V	peak
7435.0000	35.66	7.61	43.27	54.00	-10.73	V	AVG
		T					
1660.0000	56.90	-8.91	47.99	74.00	-26.01	Н	peak
3310.0000	57.54	-4.04	53.50	74.00	-20.50	Н	peak
3310.0000	41.01	-4.04	36.97	54.00	-17.03	Н	AVG
4135.0000	46.02	-1.89	44.13	74.00	-29.87	Н	peak
4960.0000	62.26	1.14	63.40	74.00	-10.60	Н	peak
4960.0000	41.25	1.14	42.39	54.00	-11.61	Н	AVG
6175.0000	45.39	3.61	49.00	74.00	-25.00	Н	peak
7435.0000	49.74	7.61	57.35	74.00	-16.65	Н	peak
7435.0000	37.21	7.61	44.82	54.00	-9.18	Н	AVG

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading (dBµV/m) =Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBµV/m) = Limit stated in standard

Margin (dB) = Result ($dB\mu V/m$)- Limit ($dB\mu V/m$)

Pk = Peak Reading AV. = Average Reading

= Mark Peak Reading or Average Reading Remark

FCC ID: UC3H0002BT00 Page 54 of 60 π /4-DQPSK

Operation Mode: TX(CH Low) Test Date: April 25, 2013

Report No.: C130422Z02-RP1

Temperature:24°CTested by:Leevin LiHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1600.0000	53.23	-8.68	44.55	74.00	-29.45	V	peak
1990.0000	58.09	-11.21	46.88	74.00	-27.12	V	peak
3205.0000	57.26	-4.09	53.17	74.00	-20.83	V	peak
3205.0000	41.59	-4.09	37.50	54.00	-16.50	V	AVG
4000.0000	45.94	-2.53	43.41	74.00	-30.59	V	peak
4810.0000	55.83	0.46	56.29	74.00	-17.71	V	peak
4810.0000	35.93	0.46	36.39	54.00	-17.61	V	AVG
5395.0000	44.87	1.52	46.39	74.00	-27.61	V	peak
		T	<u> </u>			<u> </u>	
1600.0000	54.07	-8.68	45.39	74.00	-28.61	Н	peak
2515.0000	48.93	-6.13	42.80	74.00	-31.20	Н	peak
3205.0000	57.04	-4.09	52.95	74.00	-21.05	Н	peak
3205.0000	41.65	-4.09	37.56	54.00	-16.44	Н	AVG
3580.0000	47.08	-3.11	43.97	74.00	-30.03	Н	peak
4810.0000	53.49	0.46	53.95	74.00	-20.05	Н	peak
4810.0000	34.73	0.46	35.19	54.00	-18.81	Н	AVG
5350.0000	45.22	1.53	46.75	74.00	-27.25	Н	peak

Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading $(dB\mu V/m)$ = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$

Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid) Test Date: April 25, 2013

Temperature:24°CTested by:Leevin LiHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1990.0000	54.62	-11.21	43.41	74.00	-30.59	V	peak
3250.0000	56.74	-4.07	52.67	74.00	-21.33	V	peak
3250.0000	41.75	-4.07	37.68	54.00	-16.32	V	AVG
4330.0000	45.55	-1.09	44.46	74.00	-29.54	V	peak
4885.0000	52.04	0.80	52.84	74.00	-21.16	V	peak
4885.0000	35.05	0.80	35.85	54.00	-18.15	V	AVG
5800.0000	45.14	2.78	47.92	74.00	-26.08	V	peak
6535.0000	45.39	4.64	50.03	74.00	-23.97	V	peak
		_	T			T	
1630.0000	55.31	-8.79	46.52	74.00	-27.48	Н	peak
2560.0000	48.86	-5.98	42.88	74.00	-31.12	Н	peak
3250.0000	56.51	-4.07	52.44	74.00	-21.56	Н	peak
3250.0000	40.94	-4.07	36.87	54.00	-17.13	Н	AVG
4480.0000	45.44	-0.68	44.76	74.00	-29.24	Н	peak
4885.0000	56.70	0.80	57.50	74.00	-16.50	Н	peak
4885.0000	35.79	0.80	36.59	54.00	-17.41	Н	AVG
5740.0000	44.96	2.52	47.48	74.00	-26.52	Н	peak

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading $(dB\mu V/m)$ = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$

Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

Report No.: C130422Z02-RP1

Operation Mode: TX(CH High) Test Date: April 25, 2013

Temperature:24 °CTested by:Leevin LiHumidity:52% RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1435.0000	51.38	-7.98	43.40	74.00	-30.60	V	peak
3310.0000	58.15	-4.04	54.11	74.00	-19.89	V	peak
3310.0000	42.08	-4.04	38.04	54.00	-15.96	Н	AVG
4555.0000	45.90	-0.54	45.36	74.00	-28.64	V	peak
4960.0000	54.22	1.14	55.36	74.00	-18.64	V	peak
4960.0000	35.23	1.14	36.37	54.00	-17.63	Н	AVG
5770.0000	45.18	2.65	47.83	74.00	-26.17	V	peak
6250.0000	45.27	3.83	49.10	74.00	-24.90	V	peak
		1	Т			Т	Т
1660.0000	56.54	-8.91	47.63	74.00	-26.37	Н	peak
3310.0000	58.41	-4.04	54.37	74.00	-19.63	Н	peak
3310.0000	42.51	-4.04	38.47	54.00	-15.53	Н	AVG
4135.0000	46.37	-1.89	44.48	74.00	-29.52	Н	peak
4960.0000	55.80	1.14	56.94	74.00	-17.06	Н	peak
4960.0000	36.06	1.14	37.20	54.00	-16.80	Н	AVG
5770.0000	44.94	2.65	47.59	74.00	-26.41	Н	peak
6325.0000	44.87	4.05	48.92	74.00	-25.08	Н	peak

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- 5. Frequency (MHz) = Emission frequency in MHz

Reading (dBµV/m) = Uncorrected Analyzer / Receiver Reading Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

 $Limit (dB\mu V/m) = Limit stated in standard$

Margin (dB) = Result (dB μ V/m)- Limit (dB μ V/m)

Pk = Peak Reading
AV. = Average Reading

Remark = Mark Peak Reading or Average Reading

Report No.: C130422Z02-RP1

6.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Report No.: C130422Z02-RP1

Eroguanov Bango (MUz)	Limits (dBµV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site											
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration						
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014						
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	09/20/2012	09/20/2013						
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014						
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014						
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE									

Remark: Each piece of equipment is scheduled for calibration once a year.

FCC ID: UC3H0002BT00 Page 58 of 60

Test Configuration

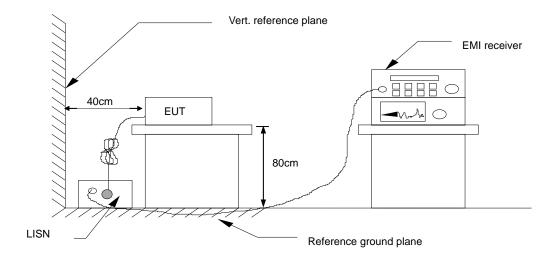

Report No.: C130422Z02-RP1

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

FCC ID: UC3H0002BT00 Page 59 of 60

Test Data

Operation Mode: Normal Test Date: April 23, 2013

Report No.: C130422Z02-RP1

Temperature: 22°C Humidity: 45% RH

Tested by: Eve Wang

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.6419	27.14	13.77	9.69	36.83	23.46	56.00	46.00	-19.17	-22.54	L1
0.8740	28.03	10.38	9.68	37.71	20.06	56.00	46.00	-18.29	-25.94	L1
0.9980	28.84	16.61	9.67	38.51	26.28	56.00	46.00	-17.49	-19.72	L1
1.7540	30.04	17.56	9.69	39.73	27.25	56.00	46.00	-16.27	-18.75	L1
2.1540	28.44	17.93	9.69	38.13	27.62	56.00	46.00	-17.87	-18.38	L1
4.5260	29.69	17.38	9.77	39.46	27.15	56.00	46.00	-16.54	-18.85	L1
0.2500	32.36	18.38	9.63	41.99	28.01	61.75	51.76	-19.76	-23.75	L2
0.5820	29.74	16.39	9.70	39.44	26.09	56.00	46.00	-16.56	-19.91	L2
1.0020	30.85	20.05	9.67	40.52	29.72	56.00	46.00	-15.48	-16.28	L2
1.9780	31.35	21.27	9.69	41.04	30.96	56.00	46.00	-14.96	-15.04	L2
5.0500	32.77	21.14	9.79	42.56	30.93	60.00	50.00	-17.44	-19.07	L2
5.8100	35.17	19.77	9.79	44.96	29.56	60.00	50.00	-15.04	-20.44	L2

Note:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
- 3. "---" denotes the emission level was or more than 2dB below the Average limit.
- 4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
- 5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)