



## FCC RADIO TEST REPORT

Applicant's company	<b>Altai Technologies Limited</b>
Applicant Address	Unit 209, 2/F, Lakeside 2, 10 Science Park West Avenue, Hong Kong Science Park, Shatin, Hong Kong, China
FCC ID	<b>UCC-WA1011N-G</b>
Manufacturer's company	<b>Abocom Systems, Inc</b>
Manufacturer Address	No.77, Yu-Yih Rd., Chu-Nan, Miao-Lih County 35059, Taiwan R.O.C.

Product Name	C1n Super WiFi CPE/AP
Brand Name	Altai Super WiFi
Model Name	WA1011N-G
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Dec. 14, 2012
Final Test Date	Dec. 25, 2012
Submission Type	Original Equipment



### Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009**,

**47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v02, KDB 662911 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION.....</b>	<b>3</b>
3.1. Product Details .....	3
3.2. Accessories .....	4
3.3. Table for Filed Antenna .....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes .....	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units .....	7
3.8. Table for Parameters of Test Software Setting .....	8
3.9. Test Configurations.....	9
<b>4. TEST RESULT.....</b>	<b>11</b>
4.1. AC Power Line Conducted Emissions Measurement .....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement.....	18
4.4. 6dB Spectrum Bandwidth Measurement .....	24
4.5. Radiated Emissions Measurement.....	29
4.6. Band Edge Emissions Measurement.....	47
4.7. Antenna Requirements .....	60
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>61</b>
<b>6. TEST LOCATION.....</b>	<b>63</b>
<b>APPENDIX A. TEST PHOTOS.....</b>	<b>A1 ~ A5</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>



## History of This Test Report



Report No.: FR310506

Certificate No.: CB10201066

## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : C1n Super WiFi CPE/AP  
**Brand Name** : Altai Super WiFi  
**Model Name** : WA1011N-G  
**Applicant** : Altai Technologies Limited  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 14, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Sam Chen

**Sam Chen**

**SPORTON INTERNATIONAL INC.**

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	18.66 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	1.78 dB
4.3	15.247(e)	Power Spectral Density	Complies	4.45 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.89 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.01 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter and PoE
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 17.84 MHz ; MCS0 (40MHz): 36.48 MHz
Maximum Conducted Output Power	MCS0 (20MHz): 19.61 dBm ; MCS0 (40MHz): 20.10 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### IEEE 802.11b/g

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter and PoE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 13.52 MHz ; 11g: 16.64 MHz
Maximum Conducted Output Power	11b: 23.70 dBm ; 11g: 20.25 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### Antenna & Band width

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	✓	✗
IEEE 802.11g	✓	✗
IEEE 802.11n	✓	✓

**IEEE 802.11n spec**

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz		40MHz		20MHz		40MHz	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

### 3.2. Accessories

Power	Brand Holder	Model	Rating
Adapter	Keen Ocean Industrial Ltd.	S09-012-0180-00660 SWP-23682-00	INPUT: 100~240Vac, 50/60Hz, 0.40A max OUTPUT: 18.0Vdc, 660mA
PoE	Abocom	FIE6POE	INPUT: 18Vdc OUTPUT: 18Vdc

Note: There are two DDR2 of EUT. < DDR2 (Brand: EtronTech) and DDR2 (Brand: Winbond)>


After evaluating, DDR2 (Brand: EtronTech) generated the worst test result, so it was recorded in the report.

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	SmartAnt	ABO12-050100	Dual Polarization Directional Antenna	N/A	10.52	TX / RX Ant.
2	SmartAnt	ABO12-050100	Dual Polarization Directional Antenna	N/A	10.52	TX / RX Ant.

Note: The EUT has two antennas.

Ant. 1 & Ant. 2 could transmit/receive simultaneously.

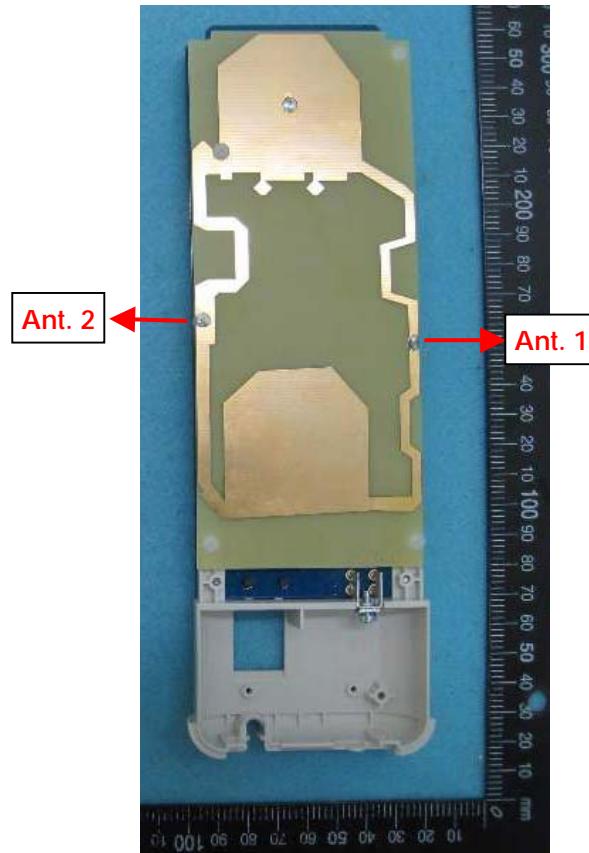

### 3.4. Table for Carrier Frequencies

For IEEE 802.11b/g, use Channel 1~Channel 11.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

1. There are two DDR2 of EUT. < DDR2 (Brand: EtronTech) and DDR2 (Brand: Winbond)>

After evaluating, DDR2 (Brand: EtronTech) generated the worst test result, so it was recorded in the report.

2. Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	MCS0/20MHz	6.5 Mbps	1/6/11	1/2
	MCS0/40MHz	13.5 Mbps	3/6/9	1/2
	11b/BPSK	1 Mbps	1/6/11	1/2
	11g/BPSK	6 Mbps	1/6/11	1/2
6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

Band Edge Emissions	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/BPSK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

<For Radiated Emissions and Band Edge Emissions test:>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D420	E2KWM3945ABG
Notebook	DELL	E6220	QDS-BRCM1005-D

<For AC Power Line Conducted Emissions test:>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	QDS-BRCM1005-D
Notebook	DELL	E6220	QDS-BRCM1005-D

<For Maximum Conducted Output Power, Power Spectral Density, 6dB Spectrum Bandwidth test:>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2KWM3945ABG

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11n

Test Software Version	ART2-GUI Version:2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	14.5	15.5	15.5
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	10.5	15.5	10

#### Power Parameters of IEEE 802.11b/g


Test Software Version	ART2-GUI Version:2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	17.5	18	19.5
IEEE 802.11g	14.5	15.5	16

During the test, "ART2-GUI Version:2.3" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

### 3.9. Test Configurations


#### 3.9.1. Radiation Emissions 30MHz~1GHz and AC Power Line Conduction Emissions

##### Test Configuration

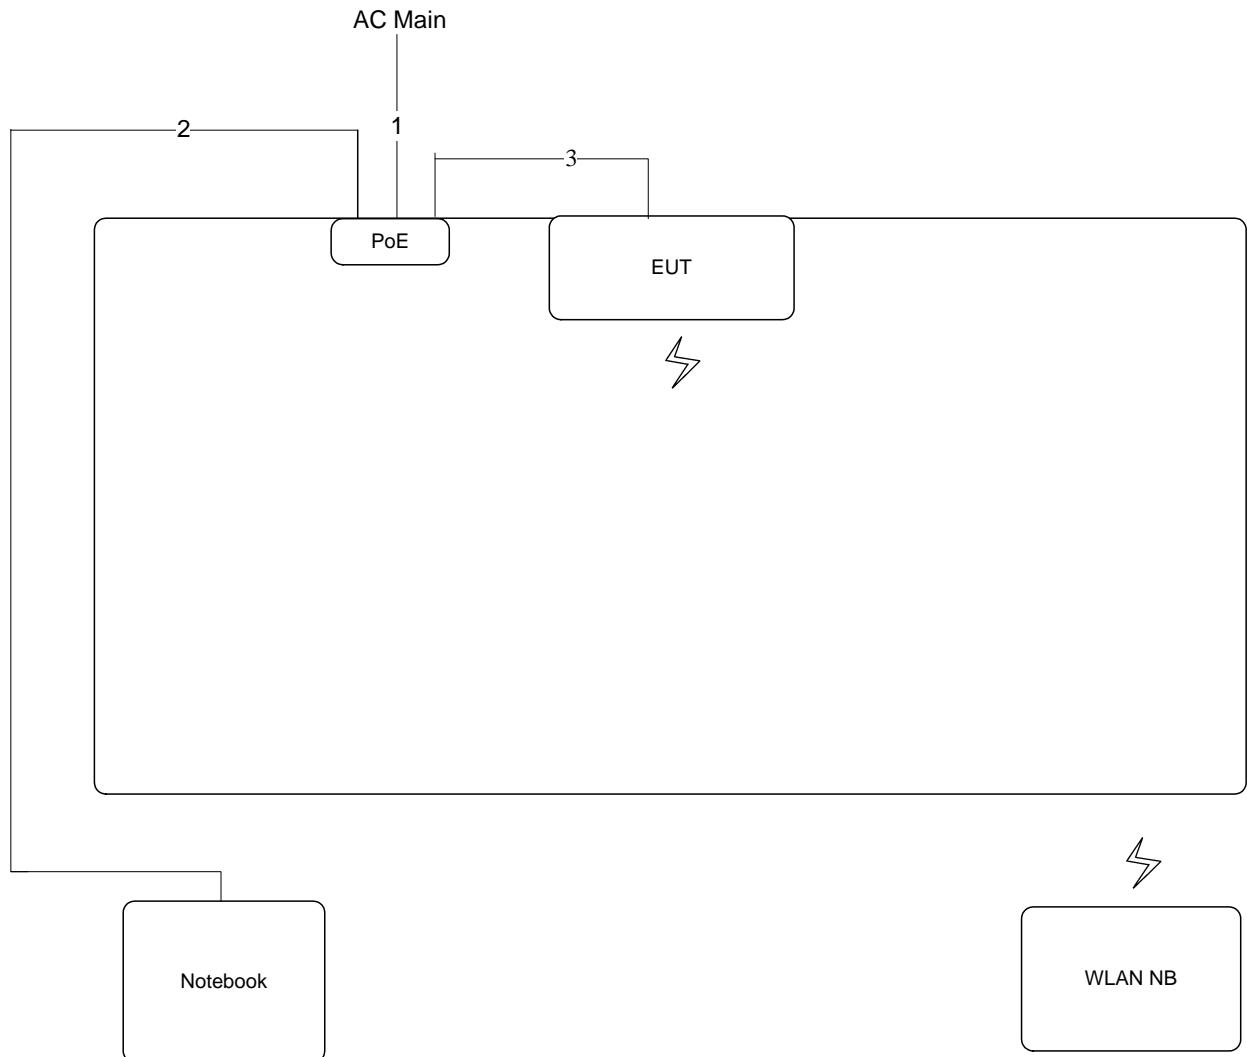

Item	Connection	Shield	Length
1	Power Cable	No	1.8m
2	RJ-45 Cable	No	10m
3	RJ-45 Cable	No	1.5m

### 3.9.2. Radiation Emissions above 1GHz Test Configuration

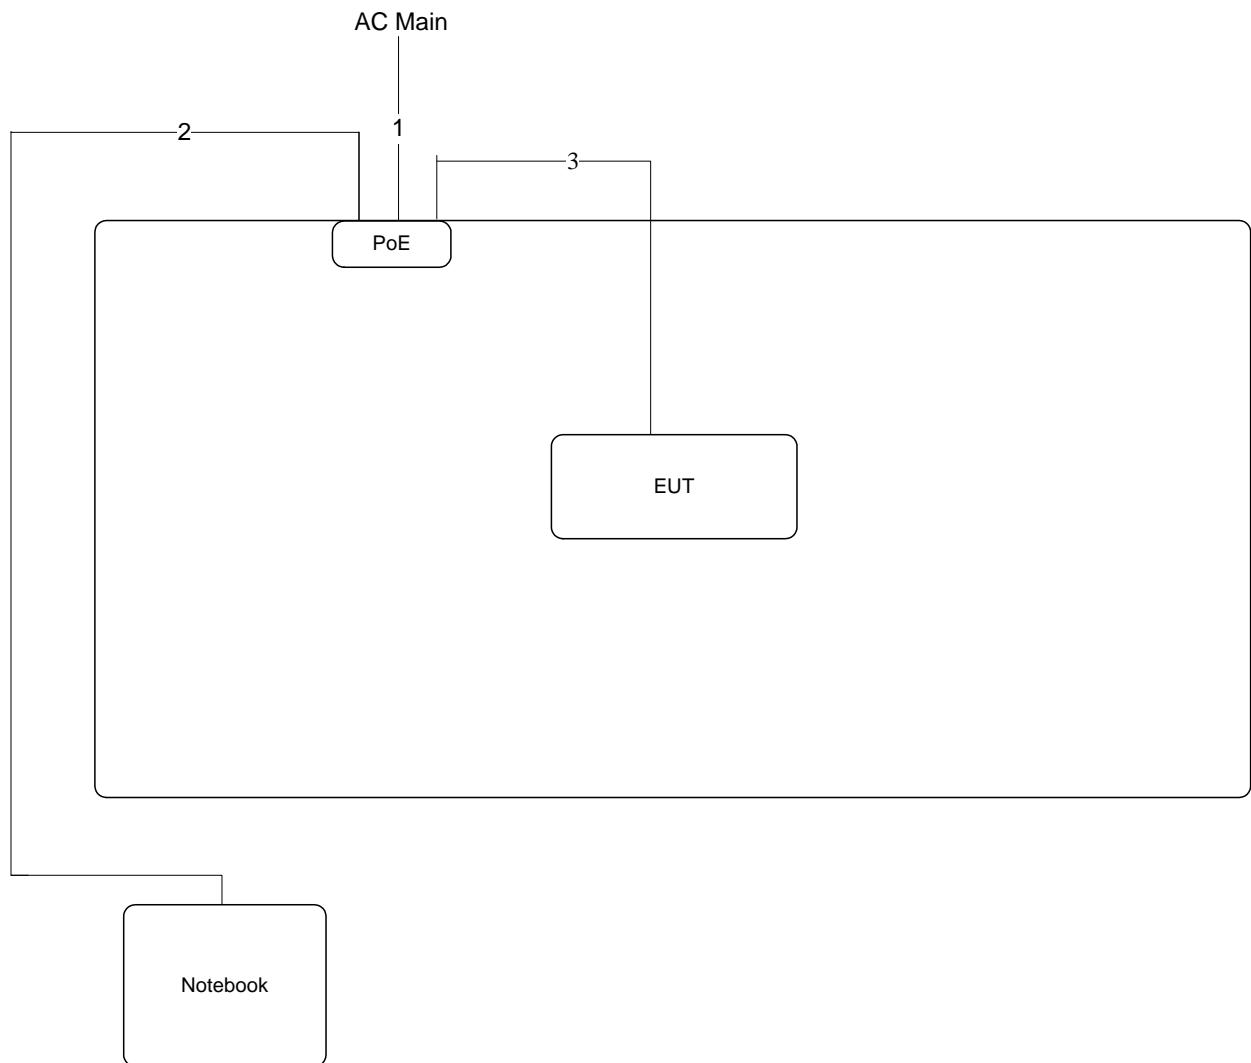

Item	Connection	Shield	Length
1	Power Cable	No	1.8m
2	RJ-45 Cable	No	10m
3	RJ-45 Cable	No	1.5m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

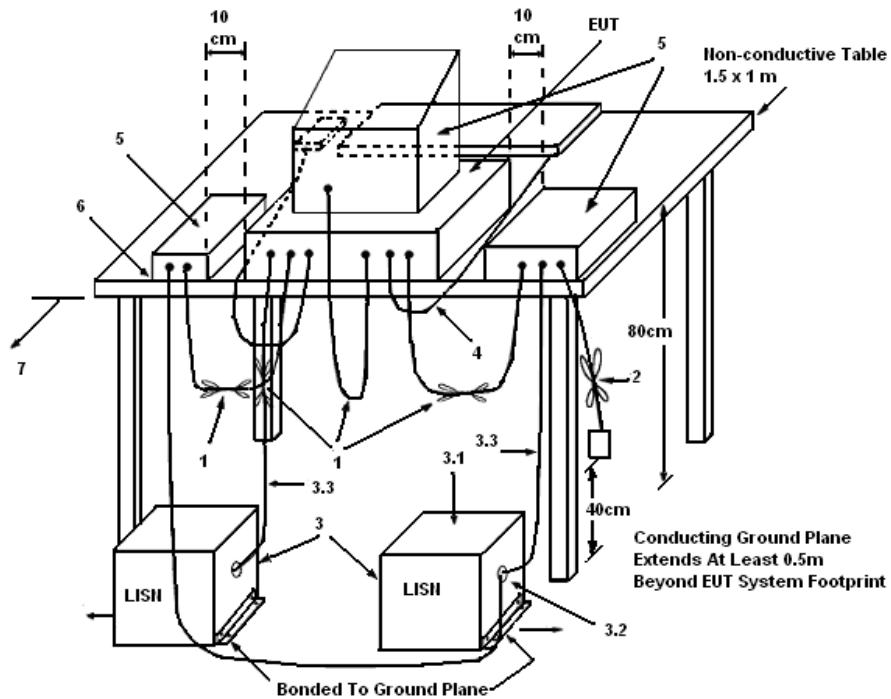

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20°C	Humidity	63%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link		

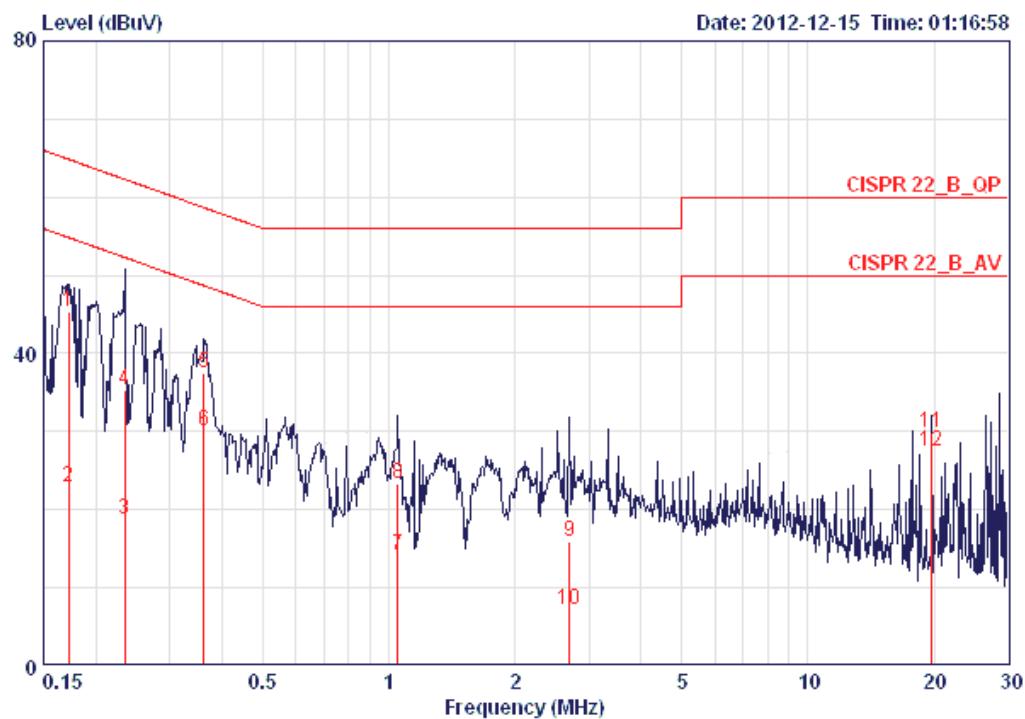

Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss		Remark
						dBuV	dB	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1	0.17215	45.25	-19.61	64.86	44.90	0.16	0.19	LINE QP
2	0.17215	22.82	-32.04	54.86	22.47	0.16	0.19	LINE AVERAGE
3	0.23409	18.80	-33.50	52.30	18.45	0.15	0.20	LINE AVERAGE
4	0.23409	35.24	-27.06	62.30	34.89	0.15	0.20	LINE QP
5	0.36146	37.54	-21.15	58.69	37.19	0.15	0.20	LINE QP
6	0.36146	30.03	-18.66	48.69	29.68	0.15	0.20	LINE AVERAGE
7	1.049	14.21	-31.79	46.00	13.84	0.17	0.20	LINE AVERAGE
8	1.049	23.41	-32.59	56.00	23.04	0.17	0.20	LINE QP
9	2.692	15.82	-40.18	56.00	15.38	0.20	0.24	LINE QP
10	2.692	7.26	-38.74	46.00	6.82	0.20	0.24	LINE AVERAGE
11	19.709	29.88	-30.12	60.00	28.90	0.48	0.50	LINE QP
12	19.709	27.44	-22.56	50.00	26.46	0.48	0.50	LINE AVERAGE

Temperature	20°C	Humidity	63%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link		

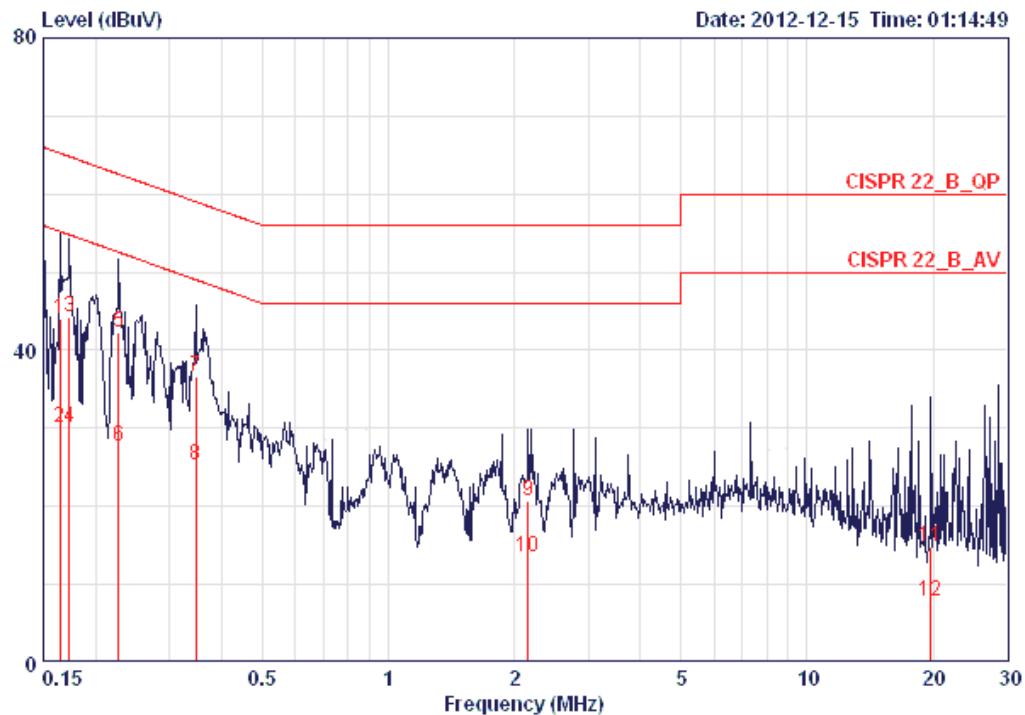

Freq	Over		Limit	Read	LISN	Cable	Pol/Phase	Remark
	Line	Level						
	MHz	dBuV	dB	dBuV	dB	dB		
1	0.16414	44.07	-21.19	65.25	43.80	0.08	0.19	NEUTRAL QP
2	0.16414	30.07	-25.19	55.25	29.80	0.08	0.19	NEUTRAL AVERAGE
3	0.17307	44.25	-20.56	64.81	43.98	0.08	0.19	NEUTRAL QP
4	0.17307	30.15	-24.66	54.81	29.88	0.08	0.19	NEUTRAL AVERAGE
5	0.22676	42.34	-20.23	62.57	42.06	0.08	0.20	NEUTRAL QP
6	0.22676	27.66	-24.91	52.57	27.38	0.08	0.20	NEUTRAL AVERAGE
7	0.34646	36.65	-22.40	59.05	36.37	0.08	0.20	NEUTRAL QP
8	0.34646	25.27	-23.78	49.05	24.99	0.08	0.20	NEUTRAL AVERAGE
9	2.155	20.78	-35.22	56.00	20.43	0.11	0.23	NEUTRAL QP
10	2.155	13.55	-32.45	46.00	13.20	0.11	0.23	NEUTRAL AVERAGE
11	19.740	14.84	-45.16	60.00	13.95	0.39	0.50	NEUTRAL QP
12	19.740	7.76	-42.24	50.00	6.87	0.39	0.50	NEUTRAL AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 v01 r02 section 8.2.3 option 3.
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout



### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Denis Su	Configurations	IEEE 802.11n
Test Date	Dec. 25, 2012		

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 1+ Ant. 2 (2TX)

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	16.51	15.42	19.01	25.48	Complies
6	2437 MHz	16.62	16.58	19.61	25.48	Complies
11	2462 MHz	16.76	16.24	19.52	25.48	Complies

Note: Conducted Output Power Limit =10.52dB<sub>i</sub> >6dB<sub>i</sub>, So Limit =30-(10.52-6)=25.48 dBm.

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 1+ Ant. 2 (2TX)

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
3	2422 MHz	12.18	12.01	15.11	25.48	Complies
6	2437 MHz	17.11	17.07	20.10	25.48	Complies
9	2452 MHz	10.79	10.64	13.73	25.48	Complies

Note: Conducted Output Power Limit =10.52dB<sub>i</sub> >6dB<sub>i</sub>, So Limit =30-(10.52-6)=25.48 dBm.

Temperature	25°C	Humidity	56%
Test Engineer	Denis Su	Configurations	IEEE 802.11 b/g
Test Date	Dec. 25, 2012		

**Configuration IEEE 802.11b / Ant. 1+ Ant. 2 (2TX)**

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	19.24	18.14	21.74	25.48	Complies
6	2437 MHz	19.27	18.68	22.00	25.48	Complies
11	2462 MHz	20.92	20.45	23.70	25.48	Complies

Note: Conducted Output Power Limit =10.52dB<sub>i</sub> >6dB<sub>i</sub>, So Limit =30-(10.52-6)=25.48 dBm.

**Configuration IEEE 802.11g / Ant. 1+ Ant. 2 (2TX)**

Channel	Frequency	Conducted Power (dBm)		Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 1	Ant. 2			
1	2412 MHz	16.41	15.58	19.03	25.48	Complies
6	2437 MHz	16.69	16.62	19.67	25.48	Complies
11	2462 MHz	17.44	17.02	20.25	25.48	Complies

Note: Conducted Output Power Limit =10.52dB<sub>i</sub> >6dB<sub>i</sub>, So Limit =30-(10.52-6)=25.48 dBm.

## 4.3. Power Spectral Density Measurement

### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

### 4.3.3. Test Procedures

1. Test procedures refer KDB558074 v01 r02 section 9.1 option 1
2. Spectrum analyzer must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of  $\leq$  RBW/2 so that narrowband signals are not lost between frequency bins.
3. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
4. Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW (use of a greater number of measurement points than this minimum requirement is recommended).
5. Use the peak marker function to determine the maximum level in any 100 kHz band segment within the fundamental EBW.
6. Scale the observed power level to an equivalent level in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where:  $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .
7. The resulting PSD level must be  $\leq 8\text{ dBm}$ .
8. When measuring power spectral density with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

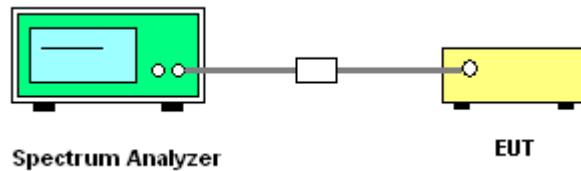

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Denis Su	Configurations	IEEE 802.11n

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 1+ Ant. 2 (2TX)

Channel	Frequency	Power Density (dBm/100kHz)		BWCF factor (100KHz to 3KHz)	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		Ant. 1	Ant. 2		
1	2412 MHz	4.95	4.29	-15.23	-10.28	-10.94	0.47	Complies
6	2437 MHz	5.07	4.98	-15.23	-10.16	-10.25	0.47	Complies
11	2462 MHz	5.39	4.73	-15.23	-9.84	-10.50	0.47	Complies

Note: PSD Limit =10.52dBi >6dBi, So Limit =8-(10.52-6)-10log(2)=0.47dBm/3kHz.

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 1+ Ant. 2 (2TX)

Channel	Frequency	Power Density (dBm/100kHz)		BWCF factor (100KHz to 3KHz)	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		Ant. 1	Ant. 2		
3	2422 MHz	-2.34	-1.73	-15.23	-17.57	-16.96	0.47	Complies
6	2437 MHz	2.63	2.78	-15.23	-12.60	-12.45	0.47	Complies
9	2452 MHz	-3.60	-3.65	-15.23	-18.83	-18.88	0.47	Complies

Note: PSD Limit =10.52dBi >6dBi, So Limit =8-(10.52-6)-10log(2)=0.47dBm/3kHz.

Temperature	25°C	Humidity	56%
Test Engineer	Denis Su	Configurations	IEEE 802.11b/g

**Configuration IEEE 802.11b / Ant. 1+ Ant. 2 (2TX)**

Channel	Frequency	Power Density (dBm/100kHz)		BWCF factor (100KHz to 3KHz)	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		Ant. 1	Ant. 2		
1	2412 MHz	9.72	8.69	-15.23	-5.51	-6.54	0.47	Complies
6	2437 MHz	9.61	8.72	-15.23	-5.62	-6.51	0.47	Complies
11	2462 MHz	11.25	10.03	-15.23	-3.98	-5.20	0.47	Complies

Note: PSD Limit =10.52dBi >6dBi, So Limit =8-(10.52-6)-10log(2)=0.47dBm/3kHz.


**Configuration IEEE 802.11g / Ant. 1+ Ant. 2 (2TX)**

Channel	Frequency	Power Density (dBm/100kHz)		BWCF factor (100KHz to 3KHz)	Power Density (dBm/3kHz)		Single Port Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2		Ant. 1	Ant. 2		
1	2412 MHz	4.90	4.23	-10.33	-10.33	-11.00	0.47	Complies
6	2437 MHz	5.13	5.36	-10.10	-10.10	-9.87	0.47	Complies
11	2462 MHz	6.00	5.16	-9.23	-9.23	-10.07	0.47	Complies


Note: PSD Limit =10.52dBi >6dBi, So Limit =8-(10.52-6)-10log(2)=0.47dBm/3kHz.

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

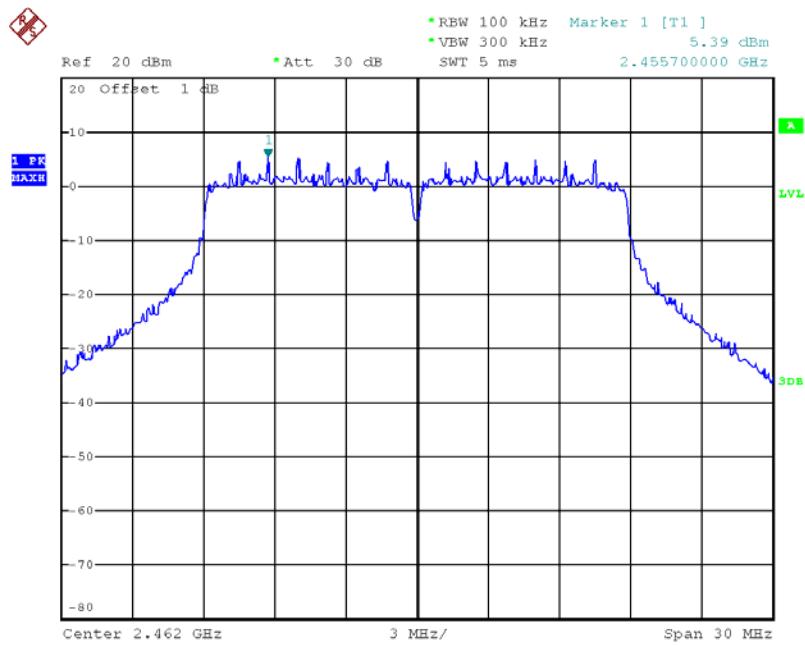
**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz / Ant. 1 (2TX)**


Date: 25.DEC.2012 21:49:02

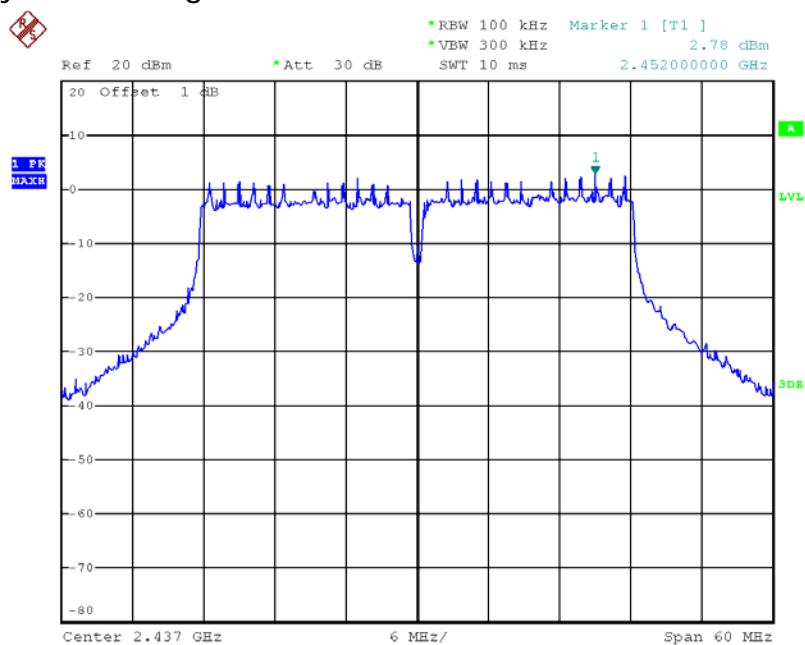**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Ant. 2 (2TX)**


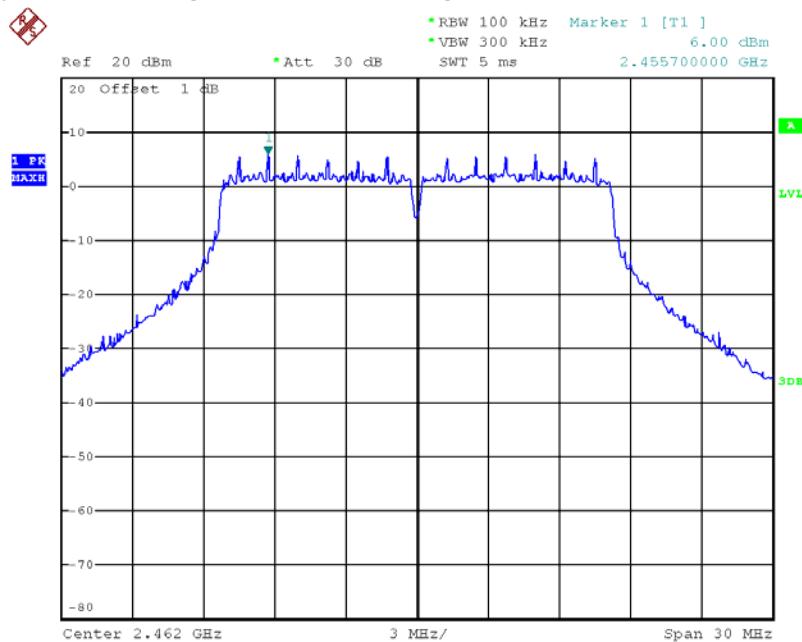
Date: 25.DEC.2012 21:54:56

### Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Ant. 1 (2TX)

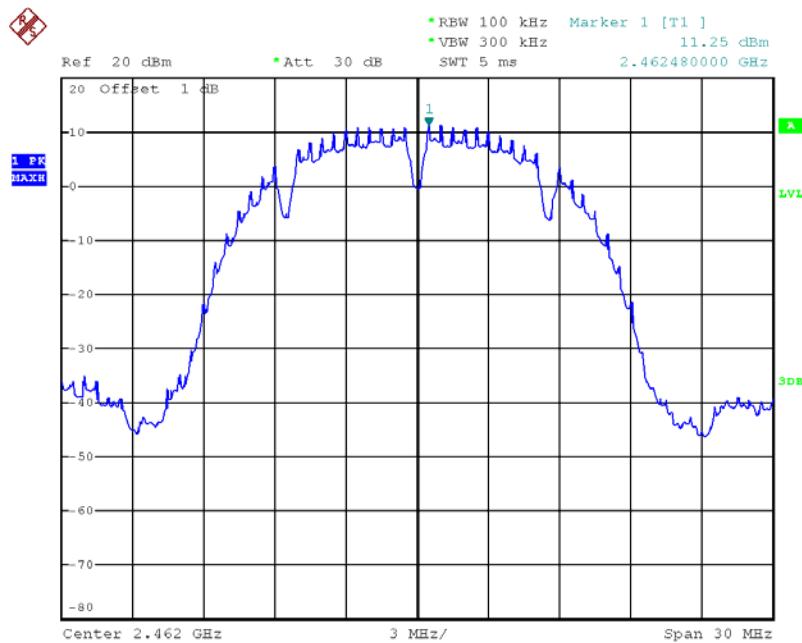

Date: 25.DEC.2012 21:41:30

### Power Density Plot on Configuration IEEE 802.11g / 2462 MHz / Ant. 1 (2TX)



Date: 25.DEC.2012 21:44:13

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	1-5 % or DTS BW, not exceed 100KHz
VB	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 5.1.1 EBW Measurement Procedure
3. Multiple antenna system was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

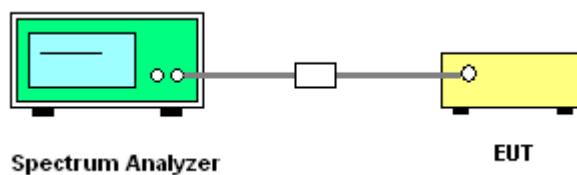

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Denis Su	Configurations	IEEE 802.11n
Test Date	Dec. 25, 2012		

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2 (2TX)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.84	500	Complies
6	2437 MHz	15.36	17.60	500	Complies
11	2462 MHz	17.60	17.84	500	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2 (2TX)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.48	500	Complies
6	2437 MHz	36.48	36.48	500	Complies
9	2452 MHz	36.00	36.32	500	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Denis Su	Configurations	IEEE 802.11b/g
Test Date	Dec. 25, 2012		


**Configuration IEEE 802.11b / Ant. 1 + Ant. 2 (2TX)**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.52	13.52	500	Complies
6	2437 MHz	9.52	13.52	500	Complies
11	2462 MHz	9.60	13.52	500	Complies

**Configuration IEEE 802.11g / Ant. 1 + Ant. 2 (2TX)**


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.08	16.64	500	Complies
6	2437 MHz	16.32	16.56	500	Complies
11	2462 MHz	16.32	16.64	500	Complies

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Ant. 1 + Ant. 2 (2TX)

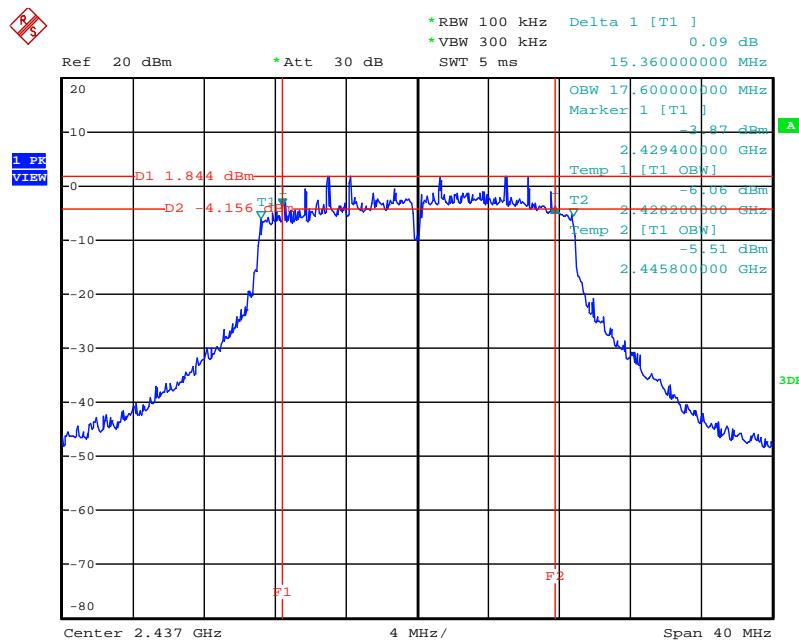


Date: 25.DEC.2012 22:29:52

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz / Ant. 1 + Ant. 2 (2TX)

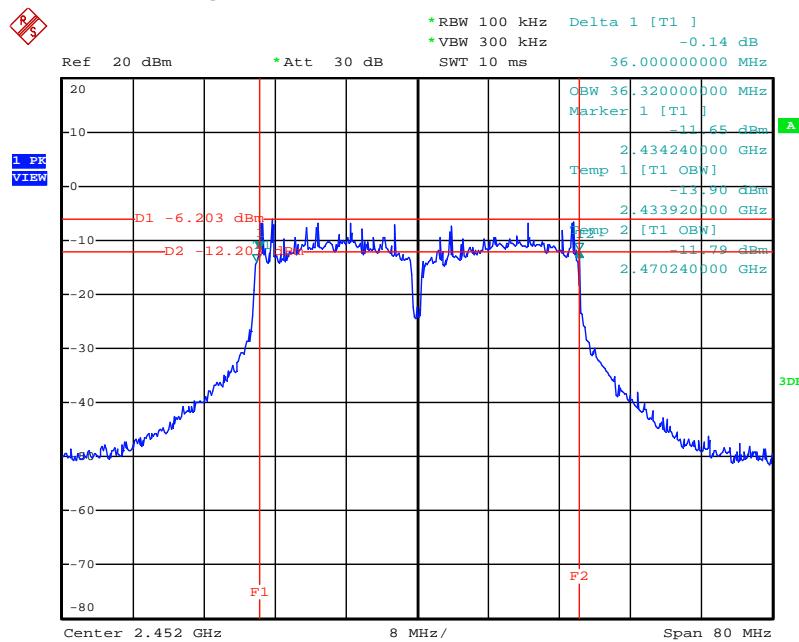


Date: 25.DEC.2012 22:32:09

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1 + Ant. 2 (2TX)

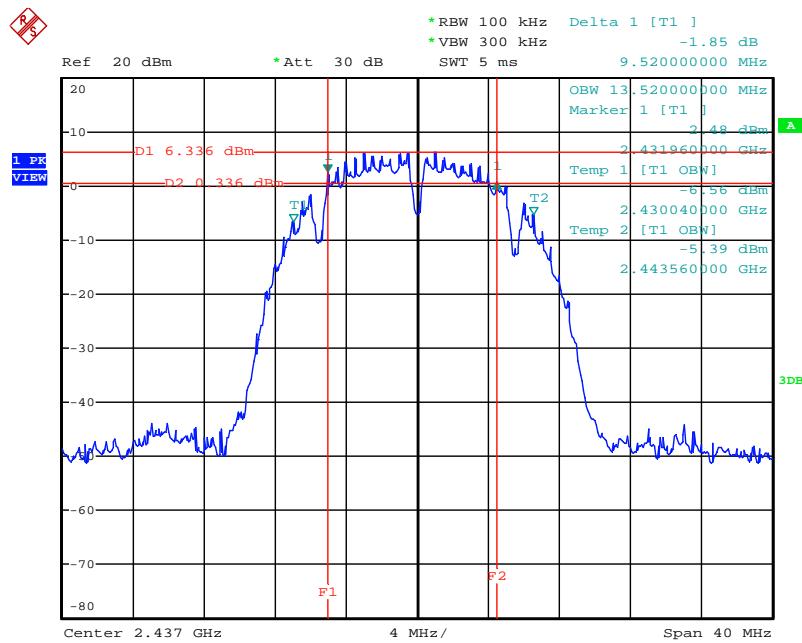

Date: 25.DEC.2012 22:26:10

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1 + Ant. 2 (2TX)

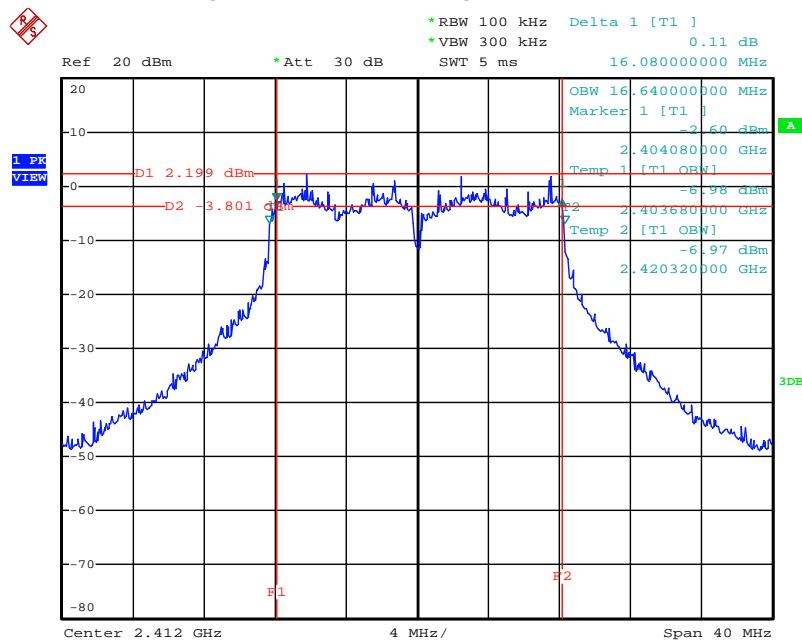

Date: 25.DEC.2012 22:27:39

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10 Hz for Average
RB / VB (Emission in non-restricted band)	100 kHz/300 kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For Radiated Emissions below 1GHz

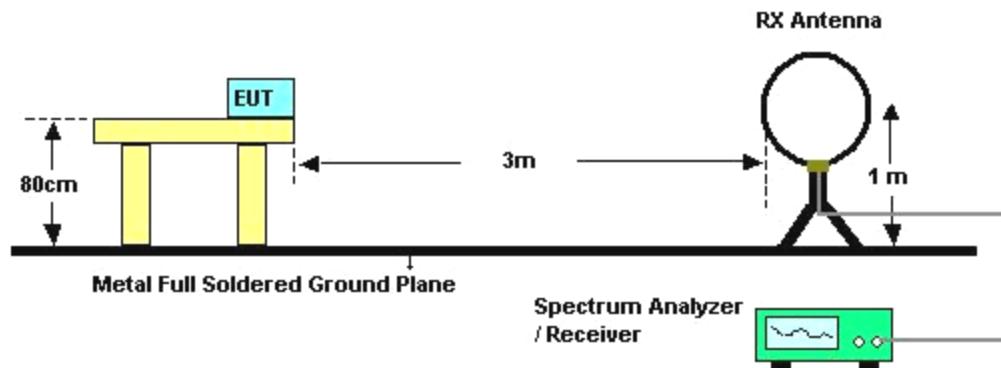

For Radiated Emissions above 1GHz

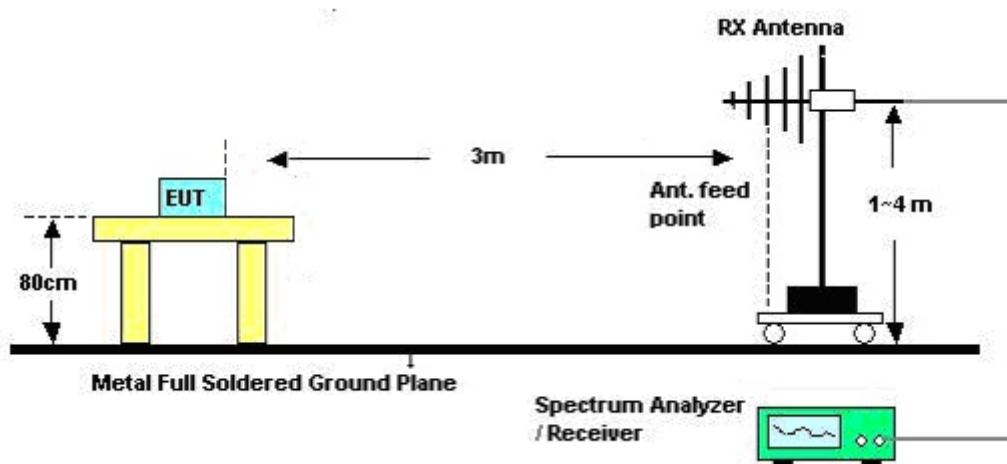

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	Normal Link
Test Date	Dec. 20, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


## 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	26°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	Normal Link

Horizontal

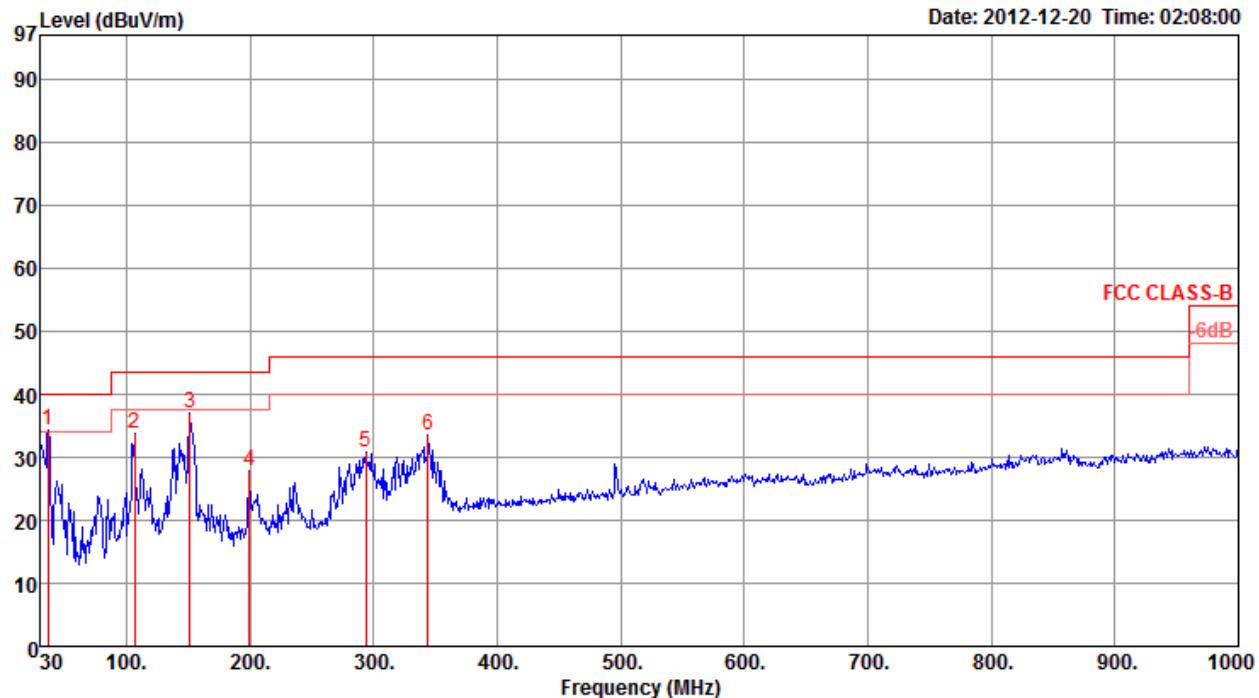

Freq	Level	Limit	Over	Read	Cable			Antenna	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level				
1 p	36.79	34.23	40.00	-5.77	45.66	0.95	28.00	15.62 Peak	0	400	HORIZONTAL
2	106.63	33.75	43.50	-9.75	47.72	1.55	27.76	12.24 Peak	0	400	HORIZONTAL
3	151.25	37.09	43.50	-6.41	51.64	1.80	27.49	11.14 Peak	0	400	HORIZONTAL
4	199.75	27.71	43.50	-15.79	42.47	2.09	27.25	10.40 Peak	0	400	HORIZONTAL
5	293.84	30.73	46.00	-15.27	41.25	2.52	26.84	13.80 Peak	0	400	HORIZONTAL
6	344.28	33.37	46.00	-12.63	42.51	2.77	27.04	15.13 Peak	0	400	HORIZONTAL

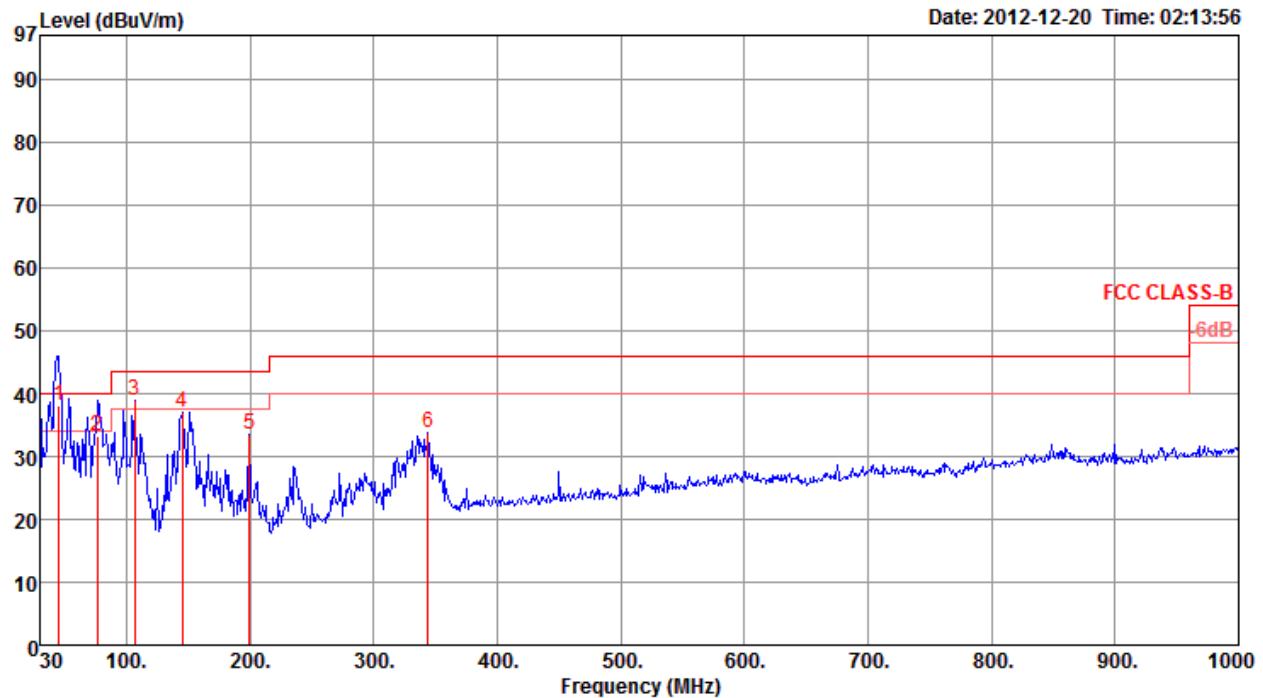*Vertical*


Freq	Level	Limit	Over	Read	Cable			Preamp	Antenna	T/Pos	A/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB	dB/m		deg	cm	
1 q	45.57	38.11	40.00	-1.89	54.60	1.00	27.94	10.45	QP	155	100	VERTICAL
2	76.53	33.14	40.00	-6.86	52.49	1.31	27.91	7.25	QP	254	100	VERTICAL
3 p	106.63	39.02	43.50	-4.48	52.99	1.55	27.76	12.24	Peak	0	100	VERTICAL
4	145.43	36.98	43.50	-6.52	51.14	1.76	27.53	11.61	Peak	0	100	VERTICAL
5	199.75	33.53	43.50	-9.97	48.29	2.09	27.25	10.40	Peak	0	100	VERTICAL
6	344.28	33.81	46.00	-12.19	42.95	2.77	27.04	15.13	Peak	0	100	VERTICAL

## Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

*Horizontal*

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Pol/Phase
		Line	dBuV/m			Loss	dB	dBuV			
1 a	4822.79	31.05	54.00	-22.95	28.97	4.21	34.69	32.56	Average	155	100 HORIZONTAL
2 p	4825.60	43.03	74.00	-30.97	40.95	4.21	34.69	32.56	Peak	155	100 HORIZONTAL

*Vertical*

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Pol/Phase
		Line	dBuV/m			Loss	dB	dBuV			
1 a	4823.27	31.28	54.00	-22.72	29.20	4.21	34.69	32.56	Average	92	100 VERTICAL
2 p	4825.09	43.58	74.00	-30.42	41.50	4.21	34.69	32.56	Peak	92	100 VERTICAL

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

*Horizontal*

Freq	Level	Limit		Over Line	Read Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1 a	4872.71	31.31	54.00	-22.69	29.10	4.22	34.67	32.66	Average	249	100	HORIZONTAL
2 p	4876.09	43.76	74.00	-30.24	41.55	4.22	34.67	32.66	Peak	249	100	HORIZONTAL

*Vertical*

Freq	Level	Limit		Over Line	Read Limit	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1 a	4872.91	31.26	54.00	-22.74	29.05	4.22	34.67	32.66	Average	277	100	VERTICAL
2 p	4874.68	44.09	74.00	-29.91	41.88	4.22	34.67	32.66	Peak	277	100	VERTICAL

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 20MHz Ch11 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4922.50	43.63	74.00	-30.37	41.29	4.23	34.65	32.76	Peak	105	100 HORIZONTAL
2 a	4923.79	31.44	54.00	-22.56	29.10	4.23	34.65	32.76	Average	105	100 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4925.25	31.37	54.00	-22.63	29.03	4.23	34.65	32.76	Average	59	100 VERTICAL
2 p	4925.36	43.23	74.00	-30.77	40.89	4.23	34.65	32.76	Peak	59	100 VERTICAL

<b>Temperature</b>	20°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3 / Ant. 1 + Ant. 2 (2TX)
<b>Test Date</b>	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4842.29	30.99	54.00	-23.01	28.87	4.21	34.68	32.59	Average	259	100 HORIZONTAL
2 p	4843.51	43.59	74.00	-30.41	41.47	4.21	34.68	32.59	Peak	259	100 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4842.27	30.84	54.00	-23.16	28.72	4.21	34.68	32.59	Average	319	100 VERTICAL
2 p	4844.87	43.09	74.00	-30.91	40.97	4.21	34.68	32.59	Peak	319	100 VERTICAL

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV				deg	cm	
1 a	4872.19	31.27	54.00	-22.73	29.06	4.22	34.67	32.66	Average	245	100	HORIZONTAL	
2 p	4875.91	43.52	74.00	-30.48	41.31	4.22	34.67	32.66	Peak	245	100	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV				deg	cm	
1 a	4872.61	31.29	54.00	-22.71	29.08	4.22	34.67	32.66	Average	183	100	VERTICAL	
2 p	4872.72	43.32	74.00	-30.68	41.11	4.22	34.67	32.66	Peak	183	100	VERTICAL	

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		deg	cm	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB	dB/m			
1 p	4903.01	43.82	74.00	-30.18	41.53	4.22	34.66	32.73	Peak	90	100 HORIZONTAL
2 a	4903.83	31.27	54.00	-22.73	28.98	4.22	34.66	32.73	Average	90	100 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		deg	cm	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB	dB/m			
1 p	4904.87	43.91	74.00	-30.09	41.62	4.22	34.66	32.73	Peak	2	100 VERTICAL
2 a	4904.91	31.44	54.00	-22.56	29.15	4.22	34.66	32.73	Average	2	100 VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	20°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11b CH 1 / Ant. 1 + Ant. 2 (2TX)
<b>Test Date</b>	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4823.88	34.86	54.00	-19.14	32.78	4.21	34.69	32.56	Average	214	100 HORIZONTAL
2 p	4823.90	45.03	74.00	-28.97	42.95	4.21	34.69	32.56	Peak	214	100 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.95	46.62	74.00	-27.38	44.54	4.21	34.69	32.56	Peak	37	100 VERTICAL
2 a	4823.99	37.98	54.00	-16.02	35.90	4.21	34.69	32.56	Average	37	100 VERTICAL

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 6 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	4874.00	32.08	54.00	-21.92	29.87	4.22	34.67	32.66	Average			96	100	HORIZONTAL
2	4874.00	43.83	74.00	-30.17	41.62	4.22	34.67	32.66	Peak			96	100	HORIZONTAL
3 p	7306.28	48.24	74.00	-25.76	40.86	5.34	34.93	36.97	Peak			176	100	HORIZONTAL
4 a	7314.20	35.90	54.00	-18.10	28.53	5.34	34.94	36.97	Average			176	100	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Level	Cable Loss			Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1 a	4873.93	38.34	54.00	-15.66	36.13	4.22	34.67	32.66	Average			39	100	VERTICAL
2	4873.97	46.87	74.00	-27.13	44.66	4.22	34.67	32.66	Peak			39	100	VERTICAL
3 p	7311.60	48.71	74.00	-25.29	41.34	5.34	34.94	36.97	Peak			146	100	VERTICAL
4	7312.36	36.16	54.00	-17.84	28.79	5.34	34.94	36.97	Average			146	100	VERTICAL

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11b CH 11 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m		deg	cm	
1 a	4923.56	31.22	54.00	-22.78	28.88	4.23	34.65	32.76	Average	75	100	HORIZONTAL
2 p	4924.49	44.77	74.00	-29.23	42.43	4.23	34.65	32.76	Peak	75	100	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		Line	dB									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m		deg	cm	
1 p	4923.76	47.26	74.00	-26.74	44.92	4.23	34.65	32.76	Peak	42	100	VERTICAL
2 a	4924.02	39.37	54.00	-14.63	37.03	4.23	34.65	32.76	Average	42	100	VERTICAL

Temperature	20°C	Humidity	63%
Test Engineer	Magic Lai	Configurations	IEEE 802.11g CH 1 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

*Horizontal*

Freq	Level	Limit		Over Line	Read Limit	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm
1 p	4820.82	43.80	74.00	-30.20	41.72	4.21	34.69	32.56	Peak	226	100 HORIZONTAL
2 a	4821.12	31.24	54.00	-22.76	29.16	4.21	34.69	32.56	Average	226	100 HORIZONTAL

*Vertical*

Freq	Level	Limit		Over Line	Read Limit	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm
1 p	4820.50	45.06	74.00	-28.94	42.98	4.21	34.69	32.56	Peak	334	100 VERTICAL
2 a	4825.82	31.36	54.00	-22.64	29.28	4.21	34.69	32.56	Average	334	100 VERTICAL

<b>Temperature</b>	20°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11g CH 6 / Ant. 1 + Ant. 2 (2TX)
<b>Test Date</b>	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable			Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	4869.20	43.73	74.00	-30.27	41.52	4.22	34.67	32.66	Peak			62	100	HORIZONTAL
2	4877.40	31.40	54.00	-22.60	29.19	4.22	34.67	32.66	Average			62	100	HORIZONTAL
3 p	7306.94	48.16	74.00	-25.84	40.78	5.34	34.93	36.97	Peak			123	100	HORIZONTAL
4 a	7312.32	35.74	54.00	-18.26	28.37	5.34	34.94	36.97	Average			123	100	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable			Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	4874.06	43.73	74.00	-30.27	41.52	4.22	34.67	32.66	Peak			7	100	VERTICAL
2	4877.78	31.43	54.00	-22.57	29.22	4.22	34.67	32.66	Average			7	100	VERTICAL
3 p	7314.84	47.32	74.00	-26.68	39.95	5.34	34.94	36.97	Peak			154	100	VERTICAL
4 a	7315.38	35.93	54.00	-18.07	28.56	5.34	34.94	36.97	Average			154	100	VERTICAL

<b>Temperature</b>	20°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11g CH 11 / Ant. 1 + Ant. 2 (2TX)
<b>Test Date</b>	Dec. 18, 2012		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4921.96	43.63	74.00	-30.37	41.29	4.23	34.65	32.76	Peak	287	100 HORIZONTAL
2 a	4925.02	31.08	54.00	-22.92	28.74	4.23	34.65	32.76	Average	287	100 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Pol/Phase	
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4921.52	44.07	74.00	-29.93	41.73	4.23	34.65	32.76	Peak	359	100 VERTICAL
2 a	4927.80	31.60	54.00	-22.40	29.26	4.23	34.65	32.76	Average	359	100 VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz / 300 KHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.5°C	Humidity	57%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

##### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz		dBuV/m	dBuV/m									cm	deg
1	2360.00	52.42	54.00	-1.58	20.15	4.30	27.97	0.00	Average		197	358	HORIZONTAL
2	2360.00	63.42	74.00	-10.58	31.15	4.30	27.97	0.00	Peak		197	358	HORIZONTAL
3	2390.00	52.97	54.00	-1.03	20.58	4.34	28.05	0.00	Average		197	358	HORIZONTAL
4	2390.00	64.88	74.00	-9.12	32.49	4.34	28.05	0.00	Peak		197	358	HORIZONTAL
5	2416.40	116.56			84.11	4.36	28.09	0.00	Peak		197	358	HORIZONTAL
6	2417.20	104.72			72.23	4.36	28.13	0.00	Average		197	358	HORIZONTAL

Item 5, 6 are the fundamental frequency at 2412 MHz.

##### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz		dBuV/m	dBuV/m									cm	deg
1	2359.60	52.57	54.00	-1.43	20.30	4.30	27.97	0.00	Average		196	356	HORIZONTAL
2	2360.00	63.67	74.00	-10.33	31.40	4.30	27.97	0.00	Peak		196	356	HORIZONTAL
3	2439.80	117.42			84.86	4.38	28.18	0.00	Peak		196	356	HORIZONTAL
4	2441.80	104.96			72.40	4.38	28.18	0.00	Average		196	356	HORIZONTAL
5	2483.50	51.69	54.00	-2.31	19.03	4.40	28.26	0.00	Average		196	356	HORIZONTAL
6	2483.90	64.21	74.00	-9.79	31.55	4.40	28.26	0.00	Peak		196	356	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

##### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz		dBuV/m	dBuV/m									cm	deg
1	2465.60	104.75			72.13	4.40	28.22	0.00	Average		154	350	HORIZONTAL
2	2467.00	117.11			84.49	4.40	28.22	0.00	Peak		154	350	HORIZONTAL
3	2483.50	52.94	54.00	-1.06	20.28	4.40	28.26	0.00	Average		154	350	HORIZONTAL
4	2483.50	68.60	74.00	-5.40	35.94	4.40	28.26	0.00	Peak		154	350	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24.5°C	Humidity	57%
Test Engineer	Jim Huang	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

### Channel 3

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	2390.00	52.65	54.00	-1.35	20.26	4.34	28.05	0.00	Average			150	314	HORIZONTAL
2	2390.00	71.30	74.00	-2.70	38.91	4.34	28.05	0.00	Peak			150	314	HORIZONTAL
3	2406.80	95.93			63.50	4.34	28.09	0.00	Average			150	314	HORIZONTAL
4	2437.60	110.69			78.13	4.38	28.18	0.00	Peak			150	314	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	2390.00	52.86	54.00	-1.14	20.47	4.34	28.05	0.00	Average			154	332	HORIZONTAL
2	2390.00	69.57	74.00	-4.43	37.18	4.34	28.05	0.00	Peak			154	332	HORIZONTAL
3	2449.80	115.23			82.67	4.38	28.18	0.00	Peak			154	332	HORIZONTAL
4	2450.60	102.55			69.99	4.38	28.18	0.00	Average			154	332	HORIZONTAL
5	2483.50	52.84	54.00	-1.16	20.18	4.40	28.26	0.00	Average			154	332	HORIZONTAL
6	2483.50	70.60	74.00	-3.40	37.94	4.40	28.26	0.00	Peak			154	332	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	2465.20	96.30			63.68	4.40	28.22	0.00	Average			151	328	HORIZONTAL
2	2465.20	108.89			76.27	4.40	28.22	0.00	Peak			151	328	HORIZONTAL
3	2483.50	52.91	54.00	-1.09	20.25	4.40	28.26	0.00	Average			151	328	HORIZONTAL
4	2483.50	72.63	74.00	-1.37	39.97	4.40	28.26	0.00	Peak			151	328	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.5°C	Humidity	57%
Test Engineer	Jim Huang	Configurations	IEEE 802.11b Ch 1, 6, 11 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2360.00	52.83	54.00	-1.17	20.56	4.30	27.97	0.00	Average	168	359	HORIZONTAL	
2	2382.80	68.47	74.00	-5.53	36.14	4.32	28.01	0.00	Peak	168	359	HORIZONTAL	
3	2410.00	113.34			80.91	4.34	28.09	0.00	Average	168	359	HORIZONTAL	
4	2410.40	117.14			84.71	4.34	28.09	0.00	Peak	168	359	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2359.60	52.79	54.00	-1.21	20.52	4.30	27.97	0.00	Average	191	359	HORIZONTAL	
2	2359.60	64.77	74.00	-9.23	32.50	4.30	27.97	0.00	Peak	191	359	HORIZONTAL	
3	2439.80	116.00			83.44	4.38	28.18	0.00	Peak	191	359	HORIZONTAL	
4	2440.20	111.67			79.11	4.38	28.18	0.00	Average	191	359	HORIZONTAL	
5	2500.00	51.04	54.00	-2.96	18.32	4.42	28.30	0.00	Average	191	359	HORIZONTAL	
6	2500.00	62.74	74.00	-11.26	30.02	4.42	28.30	0.00	Peak	191	359	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2359.40	64.97	74.00	-9.03	32.70	4.30	27.97	0.00	Peak	193	360	HORIZONTAL	
2	2359.60	52.75	54.00	-1.25	20.48	4.30	27.97	0.00	Average	193	360	HORIZONTAL	
3	2459.60	118.50			85.90	4.38	28.22	0.00	Peak	193	360	HORIZONTAL	
4	2460.20	114.64			82.04	4.38	28.22	0.00	Average	193	360	HORIZONTAL	
5	2483.50	52.12	54.00	-1.68	19.46	4.40	28.26	0.00	Average	193	360	HORIZONTAL	
6	2484.70	72.98	74.00	-1.02	40.32	4.40	28.26	0.00	Peak	193	360	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2462 MHz.

Temperature	24.5°C	Humidity	57%
Test Engineer	Jim Huang	Configurations	IEEE 802.11g Ch 1, 6, 11 / Ant. 1 + Ant. 2 (2TX)
Test Date	Dec. 18, 2012		

### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB				cm	deg	
1	2360.00	52.61	54.00	-1.39	20.34	4.30	27.97	0.00	Average			197	356	HORIZONTAL
2	2360.00	63.95	74.00	-10.05	31.68	4.30	27.97	0.00	Peak			197	356	HORIZONTAL
3	2417.60	116.87			84.38	4.36	28.13	0.00	Peak			197	356	HORIZONTAL
4	2418.00	105.08			72.59	4.36	28.13	0.00	Average			197	356	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				cm	deg	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB				cm	deg	
1	2359.20	65.22	74.00	-8.78	32.95	4.30	27.97	0.00	Peak			198	354	HORIZONTAL
2	2359.99	52.60	54.00	-1.40	20.33	4.30	27.97	0.00	Average			198	354	HORIZONTAL
3	2440.20	104.73			72.17	4.38	28.18	0.00	Average			198	354	HORIZONTAL
4	2440.20	116.45			83.89	4.38	28.18	0.00	Peak			198	354	HORIZONTAL
5	2483.50	51.66	54.00	-2.34	19.00	4.40	28.26	0.00	Average			198	354	HORIZONTAL
6	2485.10	63.13	74.00	-10.87	30.43	4.40	28.30	0.00	Peak			198	354	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				cm	deg	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB				cm	deg	
1	2455.40	105.38			72.78	4.38	28.22	0.00	Average			197	357	HORIZONTAL
2	2455.40	117.25			84.65	4.38	28.22	0.00	Peak			197	357	HORIZONTAL
3	2483.50	52.99	54.00	-1.01	20.33	4.40	28.26	0.00	Average			197	357	HORIZONTAL
4	2483.50	65.00	74.00	-9.00	32.34	4.40	28.26	0.00	Peak			197	357	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

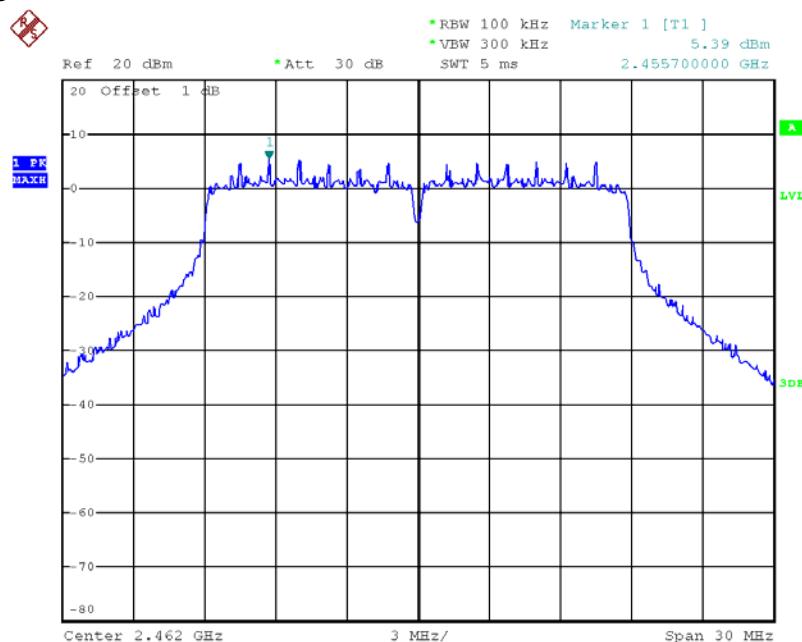


Date: 25.DEC.2012 21:49:02

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 (down 30dBc)

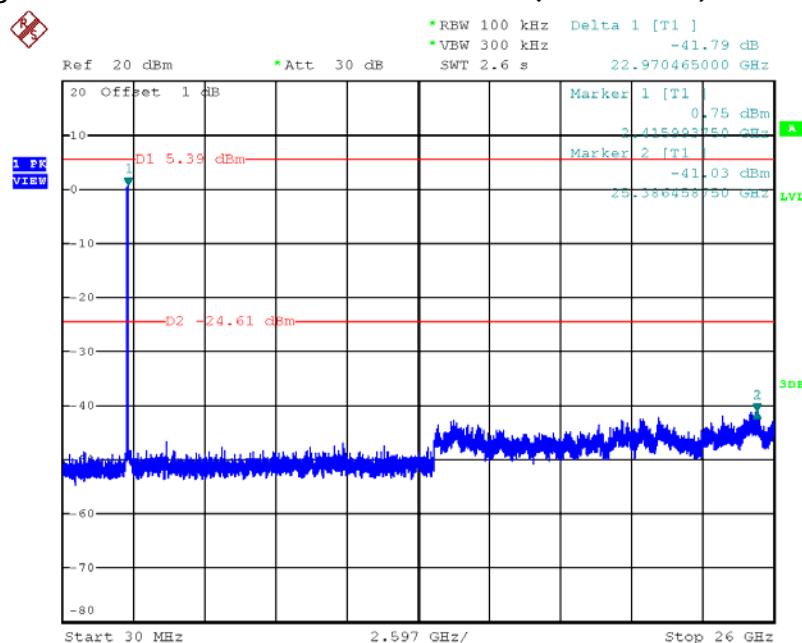


Date: 25.DEC.2012 22:16:47

### Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 6 (down 30dBc)

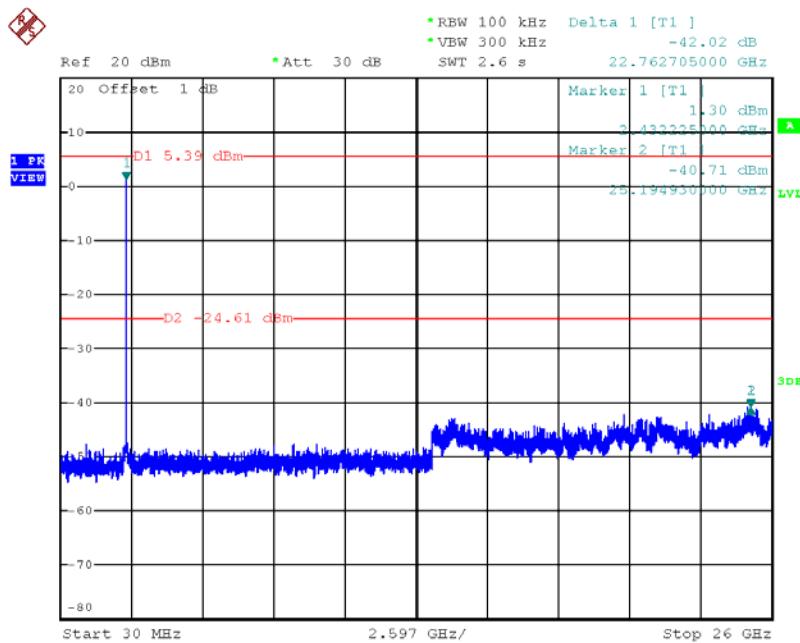


Date: 25.DEC.2012 22:17:26

### Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 (down 30dBc)

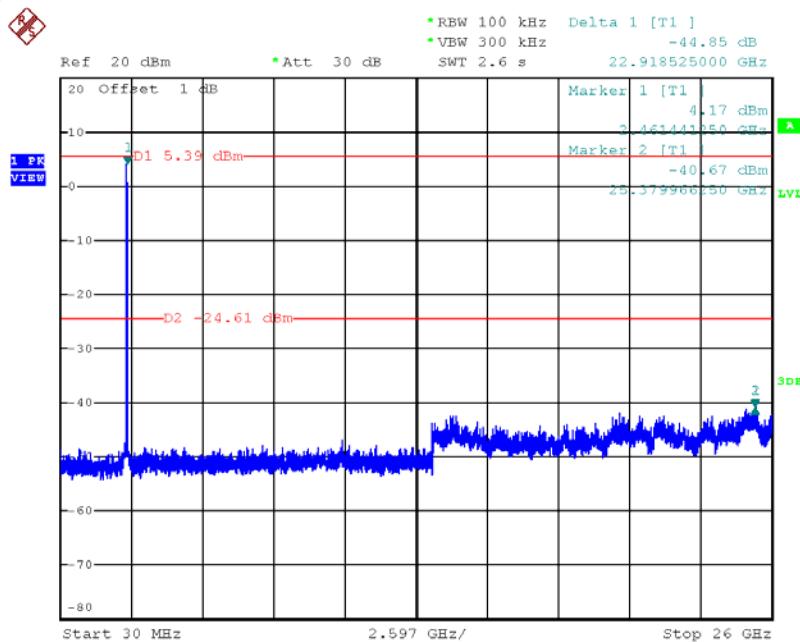


Date: 25.DEC.2012 22:18:03

### Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

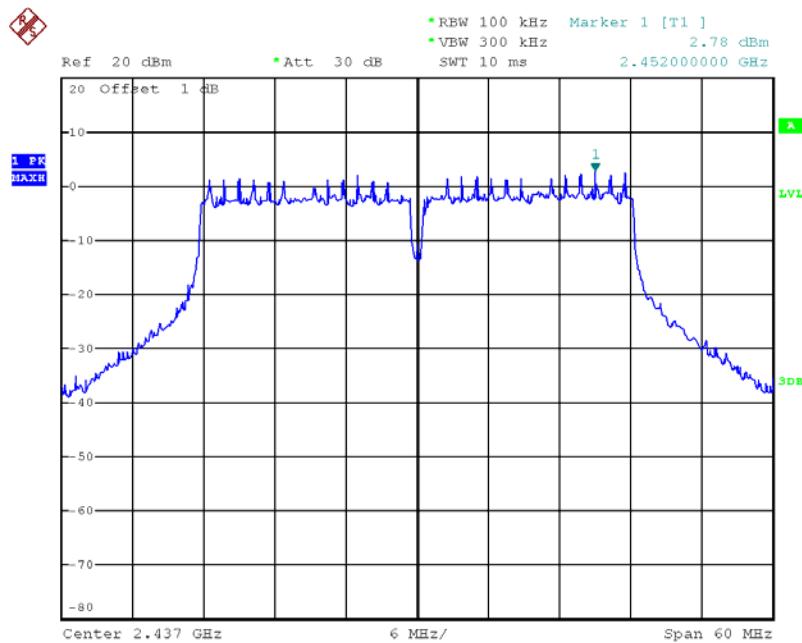


Date: 25.DEC.2012 21:54:56

### Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 (down 30dBc)

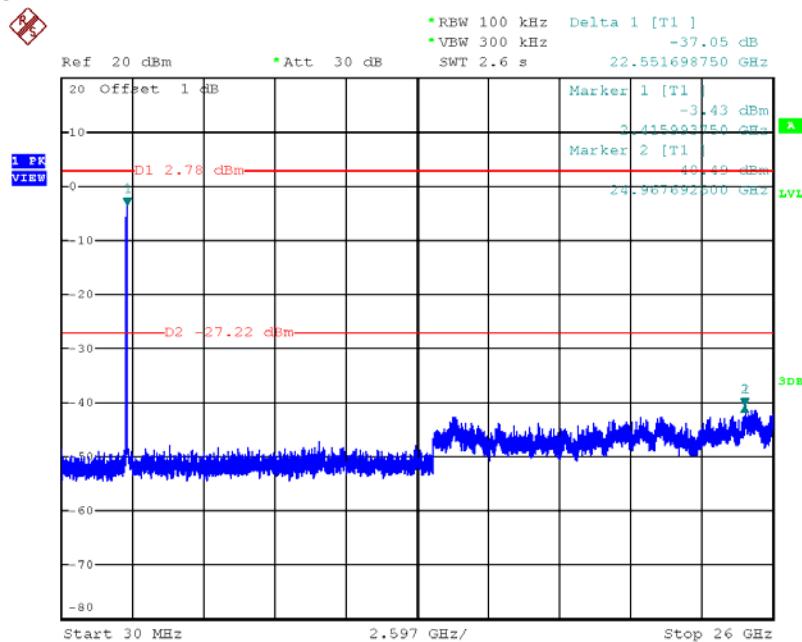


Date: 25.DEC.2012 22:19:18

### Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 6 (down 30dBc)

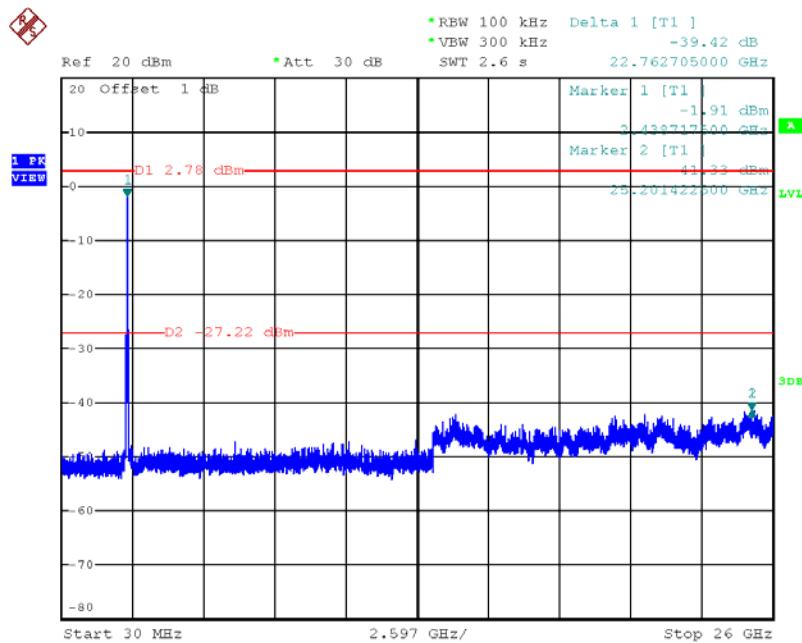


Date: 25.DEC.2012 22:19:59

### Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 (down 30dBc)

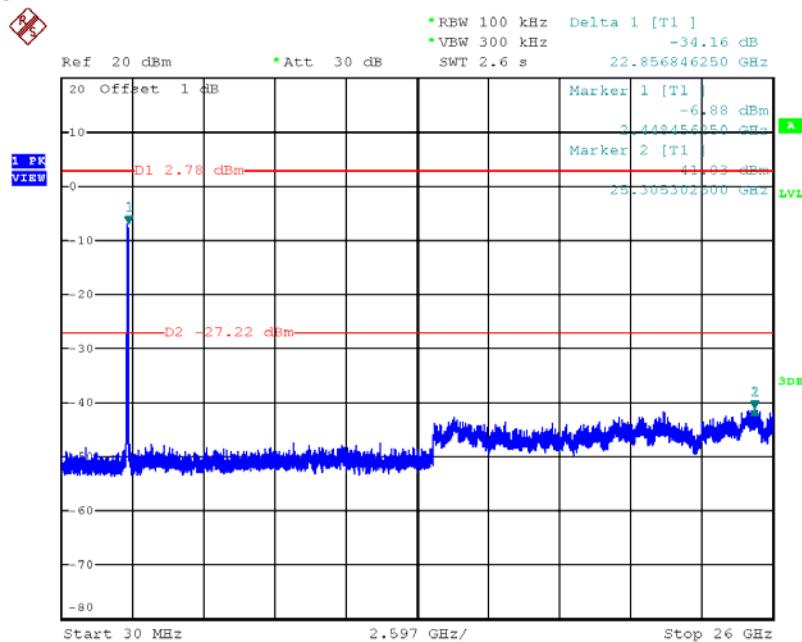


Date: 25.DEC.2012 22:20:50

### Plot on Configuration IEEE 802.11b / Reference Level

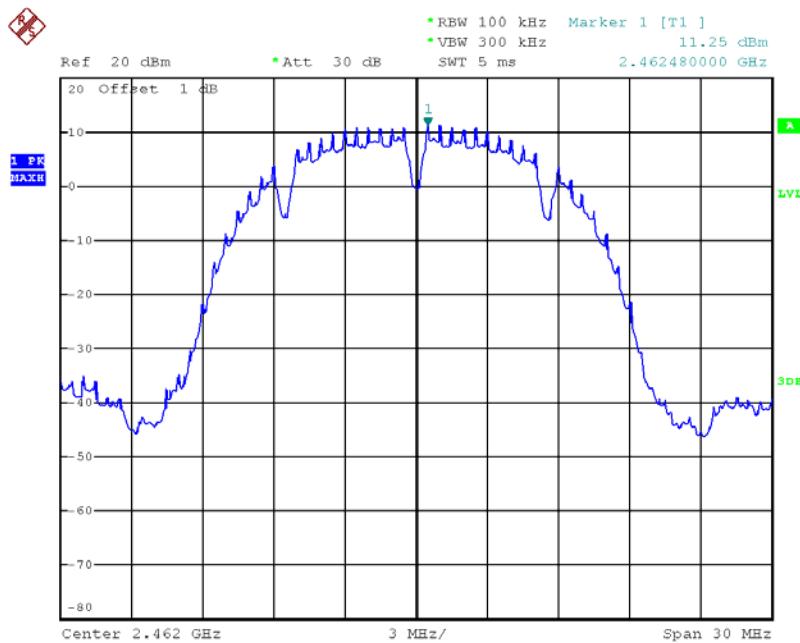


Date: 25.DEC.2012 21:41:30

### Plot on Configuration IEEE 802.11b / CH 1 (down 30dBc)

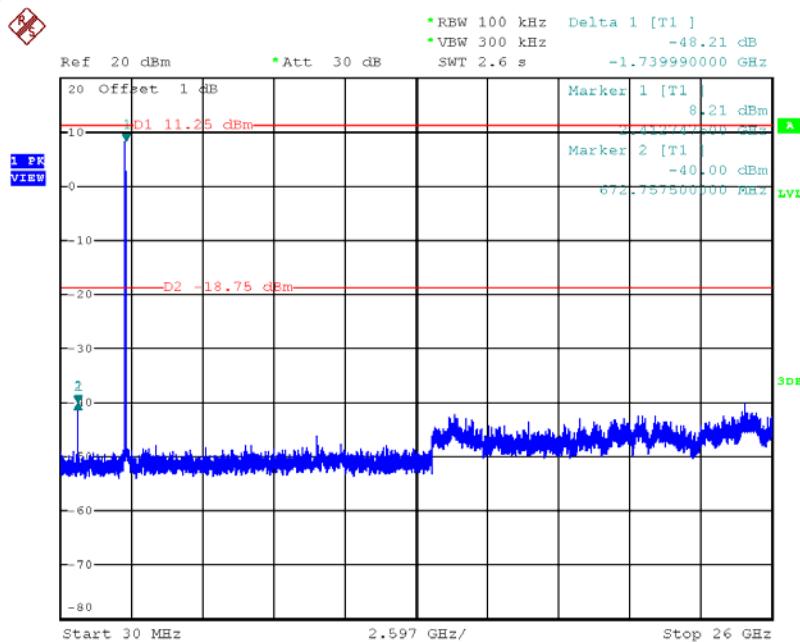


Date: 25.DEC.2012 22:11:02

### Plot on Configuration IEEE 802.11b / CH 6 (down 30dBc)

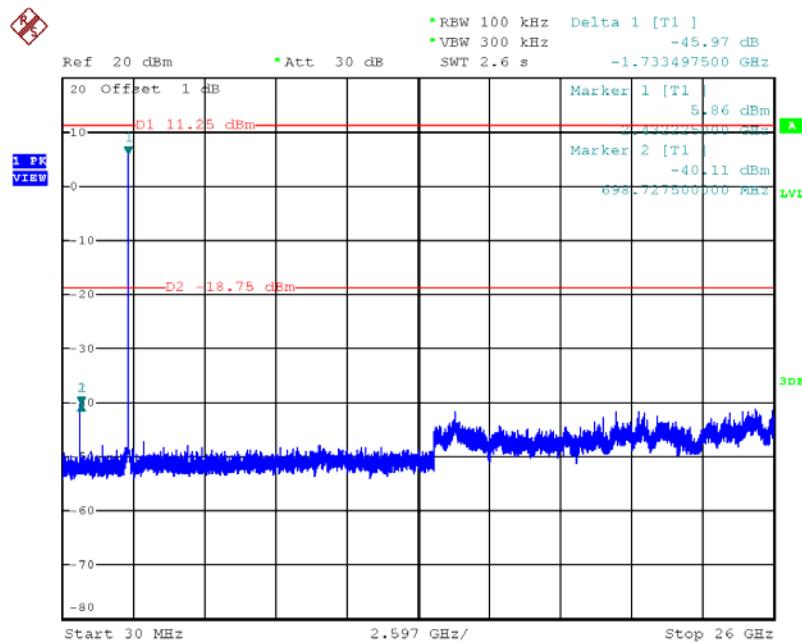


Date: 25.DEC.2012 22:11:52

### Plot on Configuration IEEE 802.11b / CH 11 (down 30dBc)

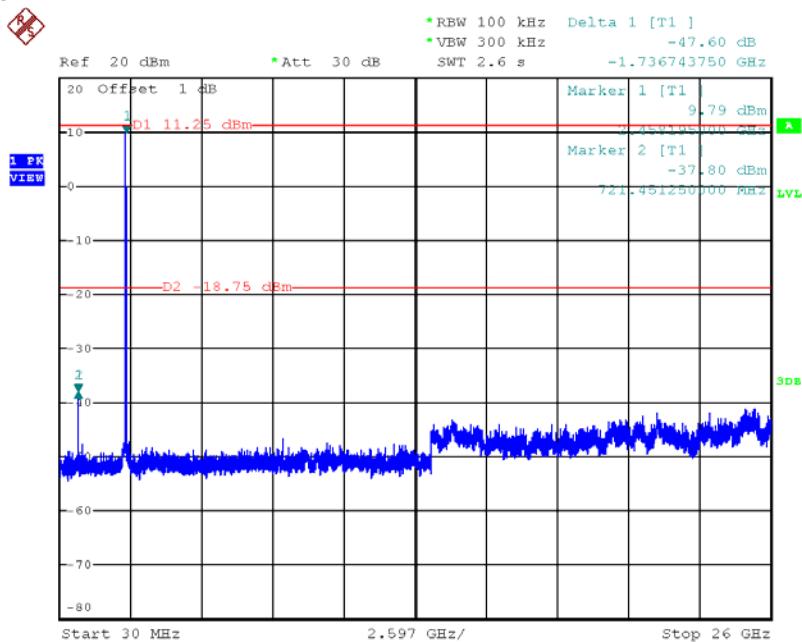


Date: 25.DEC.2012 22:12:41

### Plot on Configuration IEEE 802.11g / Reference Level

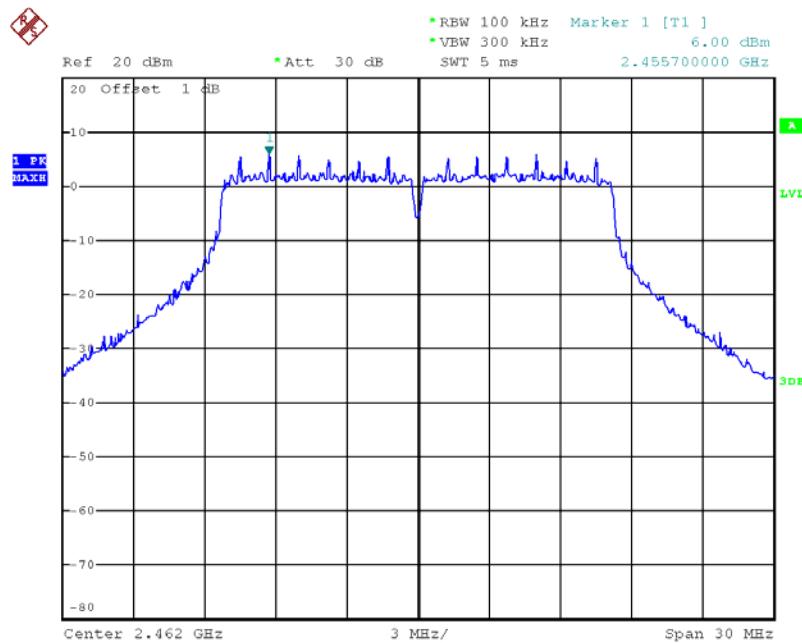


Date: 25.DEC.2012 21:44:13

### Plot on Configuration IEEE 802.11g / CH 1 (down 30dBc)

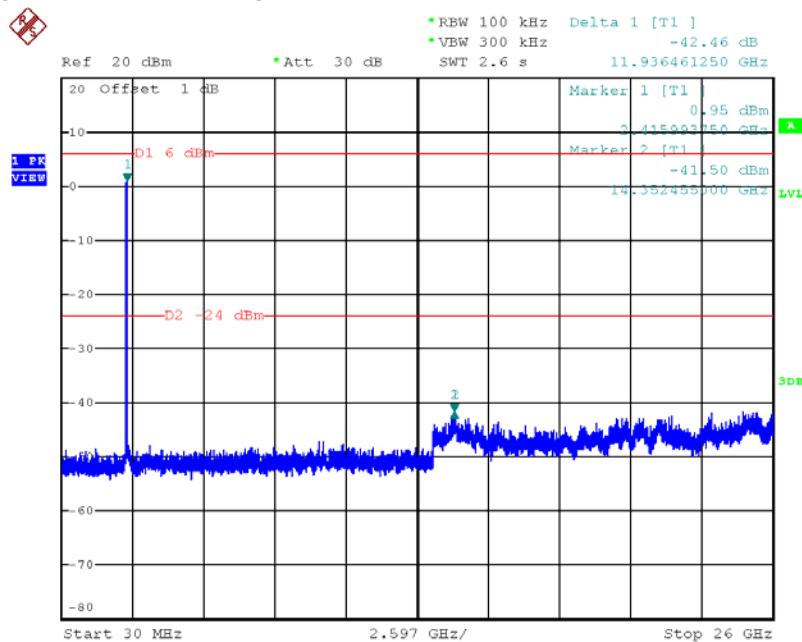


Date: 25.DEC.2012 22:13:52

### Plot on Configuration IEEE 802.11g / CH 6 (down 30dBc)

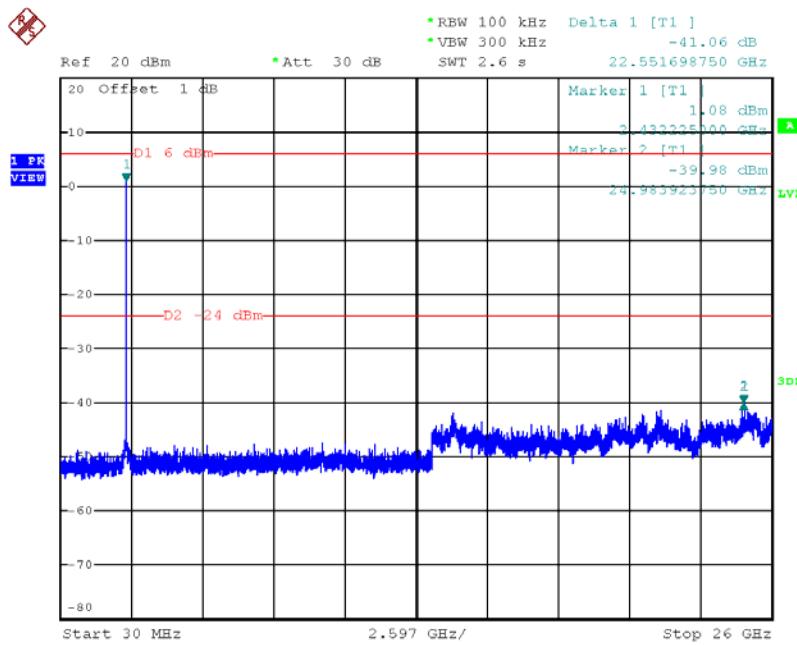

Date: 25.DEC.2012 22:14:36

### Plot on Configuration IEEE 802.11g / CH 11 (down 30dBc)

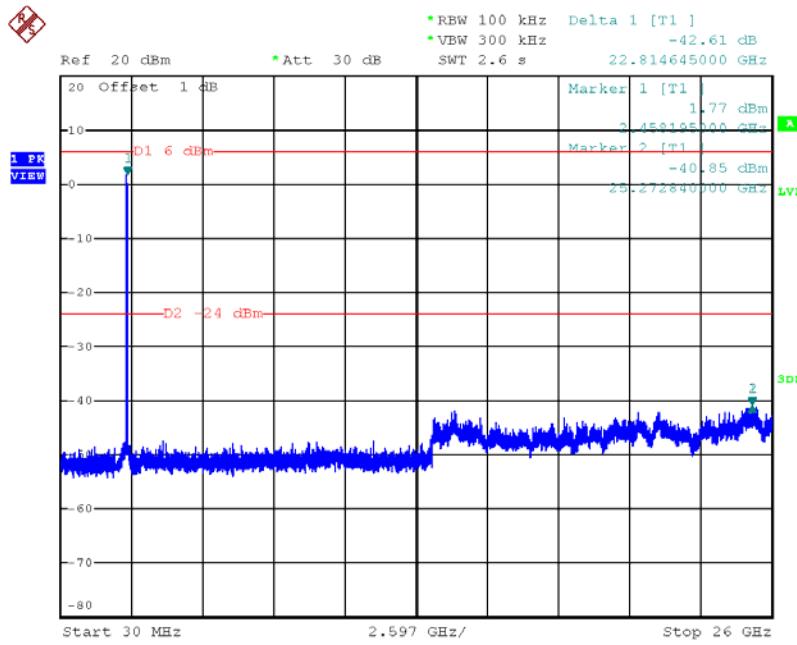

Date: 25.DEC.2012 22:15:12

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov.26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	----	----	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (05CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085