

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: Panasonic Mobile Comms Dev of Europe Ltd.
VS70 Dual Mode (3G/GSM) Mobile Station

To: FCC Part 15.247: 2005

Test Report Serial No:
RFI/MPTE1/RP71978JD03A

**This Test Report Is Issued Under The Authority
Of Andrew Brown, Operations Manager:**



Tested By: Steven Wong



Checked By: Tony Henriques



Report Copy No: PDF01

Issue Date: 21 July 2006

Test Dates: 21 June 2006 to 06 July 2006

The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by RFI Global Services Ltd. is under license. Other trademarks and trade names are those of their respective owners.

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station

To: **FCC Part 15.247: 2005**

This page has been left intentionally blank.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

Table of Contents

1. Client Information	4
2. Equipment Under Test (EUT)	5
3. Test Results	9
4. Deviations from the Test Specification	10
5. Operation of the EUT during Testing	11
6. Summary of Test Results.....	12
7. Measurements, Examinations and Derived Results.....	13
8. Measurement Uncertainty	36
9. Measurement Methods	37
Appendix 1. Test Equipment Used.....	45
Appendix 2. Test Configuration Drawings	46

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station

To: **FCC Part 15.247: 2005**

1. Client Information

Company Name:	Panasonic Mobile Comms Dev of Europe Ltd.
Address:	2 Gables Way Colthrop Thatcham Berkshire RG19 4ZB
Contact Name:	Mr M Hargreaves

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification of Equipment Under Test (EUT)

Brand Name:	Panasonic
Model Name or Number:	VS70
IMEI Number:	004401030025858
Hardware Revision:	D
Software Revision:	V705PVA13
FCC ID Number:	UCE206001A
Country of Manufacture:	Japan
Date of Receipt:	21 June 2006

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

2.2. Accessories

The following accessories were supplied with the EUT:

Description:	DC Charger
Brand Name:	Panasonic
Model Name or Number:	EB-CD001
Serial Number:	None Stated
Cable Length and Type:	2 metre twin core
Connected to Port:	Comms/Charger

Description:	DC Charger
Brand Name:	Panasonic
Model Name or Number:	EB-CD002
Serial Number:	None Stated
Cable Length and Type:	2 metre twin core
Connected to Port:	Comms/Charger

Description:	Personal Hands Free
Brand Name:	Panasonic
Model Name or Number:	EB-EM003
Serial Number:	None Stated
Cable Length and Type:	1.8 metre multi-core
Connected to Port:	Audio

Description:	Mains AC Charger
Brand Name:	Panasonic
Model Name or Number:	EB-CA001
Serial Number:	None Stated
Cable Length and Type:	1.5 metre twin core
Connected to Port:	Comms/Charger

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station

To: **FCC Part 15.247: 2005**

2.3. Description of EUT

The equipment under test is a dual mode (3G/GSM) mobile station with *Bluetooth* technology incorporated.

2.4. Modifications Incorporated in EUT

During the course of testing the EUT was not modified.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

2.5. Additional Information Related to Testing

Power Supply Requirement:	Internal battery supply of 3.7 V Nominal 110 V, 60 Hz AC mains supply (via AC charger) DC supply of 13.6 V (via car charger)		
Equipment Category:	<i>Bluetooth</i>		
Type of Unit:	Portable Transceiver		
Transmit Frequency Range:	2402 to 2480 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2402
	Middle	40	2441
	Top	79	2480
Receive Frequency Range:	2402 to 2480 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2402
	Middle	40	2441
	Top	79	2480
Maximum Power Output (EIRP)	-0.4 dBm (measured)		

2.6. Port Identification

Port	Description
1	Hands free Port
2	USIM
3	Communications/Charger

2.7. Support Equipment

No support equipment was used to exercise the EUT during testing:

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station

To: **FCC Part 15.247: 2005**

3. Test Results

Reference:	FCC Part 15.247: 2005 Subpart C
Title:	Code of Federal Regulations, Part 15.247 (47CFR22) (Intentional Radiators operating within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz)

3.1. Methods and Procedures

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2003

Land Mobile Communications Equipment, Measurements and performance Standards

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

DA00-705 (2000)

Title: Filing and Frequency Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

3.2. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

4. Deviations from the Test Specification

There were no deviations from the test specification.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

5. Operation of the EUT during Testing

5.1. Operating Modes

The EUT was tested in the following operating modes, unless otherwise stated.

For all transmit mode measurements the *Bluetooth* test mode was active and set to transmit on top, middle and bottom channels and hopping on all channels as necessary with the longest data packet size. Receive mode measurements were performed with the EUT in *Bluetooth* mode and in its normal search mode.

5.2. Configuration and Peripherals

The EUT was tested in the following configuration:

For all tests apart from AC conducted emissions the EUT was configured with the PHF, model EB-EM003, and DC charger, model EB-CD002, connected. This configuration was tested as it was found to be the worst case configuration after radiated emissions pre-scans were performed with all the other supplied accessories.

For the AC conducted emission test the EUT was configured with the PHF, model EB-EM003, and AC charger, model EB-CA001, connected.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

6. Summary of Test Results

Range of Measurements	Specification Reference	Port Type	Compliance Status
Idle Mode AC Conducted Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2005 Section 15.107	AC Mains	Complied
Idle Mode Radiated Spurious Emissions	C.F.R. 47 FCC Part 15: 2005 Section 15.109	Antenna	Complied
Transmitter AC Conducted Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2005 Section 15.207	AC Mains	Complied
Transmitter 20 dB Bandwidth	C.F.R. 47 FCC Part 15: 2005 Section 15.247(a)(1)	Antenna	Complied
Transmitter Carrier Frequency Separation	C.F.R. 47 FCC Part 15: 2005 Section 15.247(a)(1)	Antenna	Complied
Transmitter Average Time of Occupancy	C.F.R. 47 FCC Part 15: 2005 Section 15.247(a)(1)(iii)	Antenna	Complied
Transmitter Maximum Peak Output Power	C.F.R. 47 FCC Part 15: 2005 Section 15.247(b)(1)	Antenna	Complied
Transmitter Radiated Emissions	C.F.R. 47 FCC Part 15: 2005 Sections 15.247(d) & 15.209(a)	Antenna	Complied
Transmitter Band Edge Radiated Emissions	C.F.R. 47 FCC Part 15: 2005 Sections 15.247(d) & 15.209(a)	Antenna	Complied

6.1. Location of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7. Measurements, Examinations and Derived Results

7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2. Test Results

7.2.1. Idle Mode AC Conducted Spurious Emissions: Section 15.107

The EUT was configured as for AC conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

Results:

Quasi-Peak Detector Measurements on Live and Neutral Lines


Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.29899	Neutral	37.74	60.27	22.53	Complied
1.09613	Neutral	43.74	56.00	12.29	Complied
1.19765	Neutral	47.08	56.00	8.92	Complied
1.29693	Neutral	48.66	56.00	7.34	Complied
1.39604	Neutral	46.04	56.00	9.96	Complied
1.49654	Neutral	41.52	56.00	14.48	Complied
2.38645	Neutral	40.76	56.00	15.24	Complied
2.48630	Neutral	39.90	56.00	16.10	Complied

Average Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.29899	Neutral	32.91	50.27	17.36	Complied
1.09613	Neutral	33.40	46.00	12.60	Complied
1.19765	Neutral	35.91	46.00	10.09	Complied
1.29693	Neutral	37.48	46.00	8.52	Complied
1.39604	Neutral	34.29	46.00	11.71	Complied
1.49654	Neutral	29.97	46.00	16.03	Complied
2.38645	Neutral	28.14	46.00	17.86	Complied
2.48630	Neutral	27.13	46.00	18.57	Complied

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

Idle Mode AC Conducted Spurious Emissions: Section 15.107 (Continued)

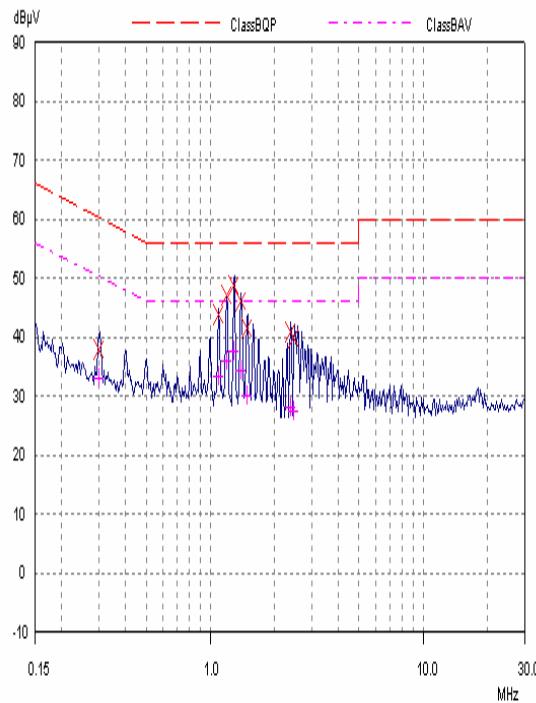

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**


7.2.2. Idle Mode Radiated Spurious Emissions: Section 15.109

The EUT was configured as for radiated emission testing as described in section 9 of this report. Tests were performed to identify the maximum receiver or standby radiated emission levels.

Results:

Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)

Frequency (MHz)	Antenna Polarity	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
48.246	Vertical	32.8	40.0	7.2	Complied
104.018	Vertical	21.2	43.5	22.3	Complied
155.424	Vertical	27.6	43.5	15.9	Complied
399.699	Vertical	20.6	46.0	25.4	Complied
584.950	Horizontal	30.0	46.0	16.0	Complied
798.968	Horizontal	29.6	46.0	16.4	Complied

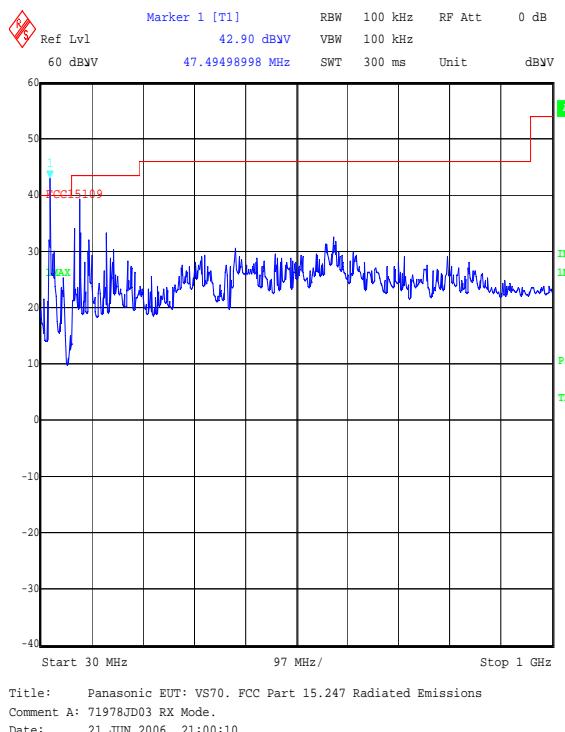

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.3. Idle Mode Radiated Spurious Emissions: Section 15.109

Results:

Electric Field Strength Measurements (Frequency Range: 1 to 12.5 GHz)

Highest Peak Level:


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
12.004	Horizontal	34.4	-4.0	30.4	54.0	23.6	Complied

Note(s):


1. *No spurious emissions were detected above the noise floor of the measuring receiver; therefore, the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.*

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**


Idle Mode Radiated Spurious Emissions: Section 15.109 (Continued)

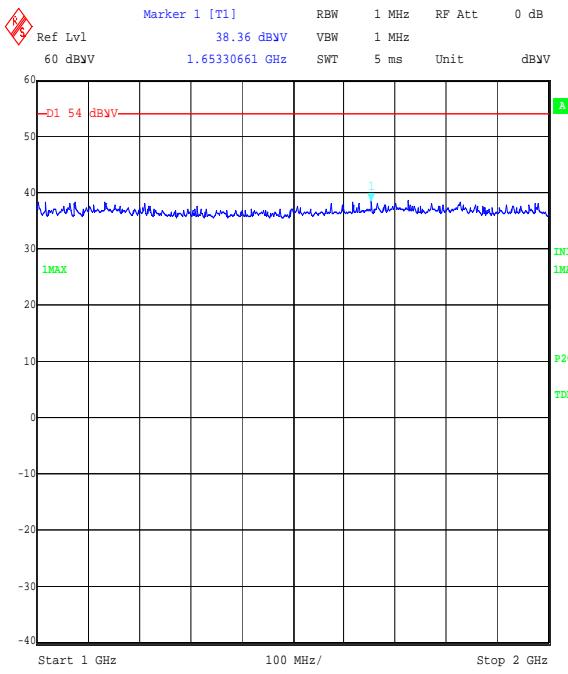


Title: Panasonic EUT: VS70. FCC Part 15.247 Radiated Emissions
Comment A: 71978JD03 RX Mode.
Date: 21.JUN.2006 21:06:33

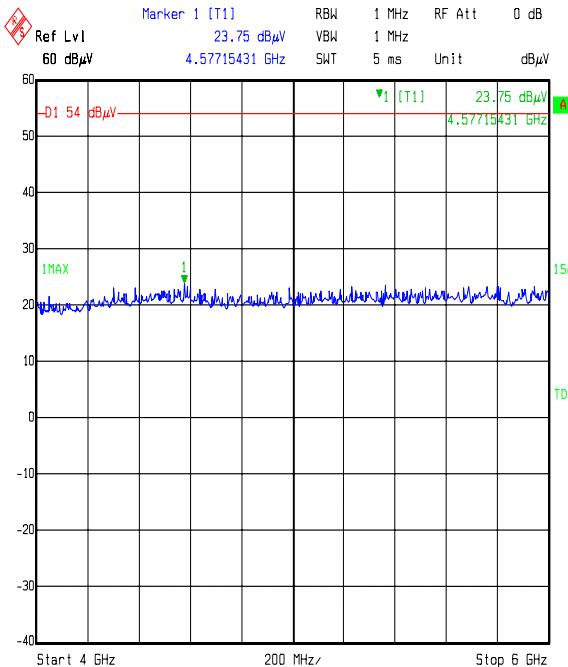

Title: Panasonic Mobile EUT: VS70. FCC Part 15.247
Comment A: 71978JD03 BT Mode, Hopping off, Rx Mode.
Date: 03.JUL.2006 16:27:14

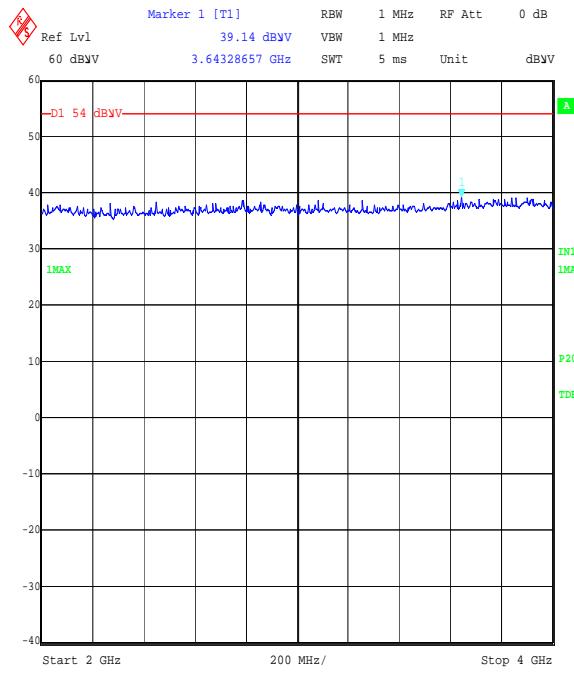

Title: Panasonic EUT: VS70. FCC Part 15.247 Radiated Emissions
Comment A: 71978JD03 RX Mode.
Date: 21.JUN.2006 21:09:49

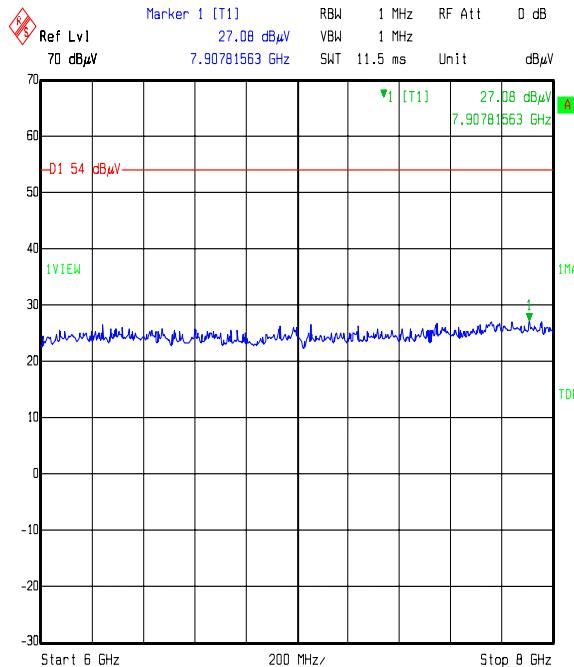


Title: Panasonic Mobile EUT: VS70. FCC Part 15.247
Comment A: 71978JD03 BT Mode, Hopping off, Rx Mode.
Date: 03.JUL.2006 16:20:08

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

Idle Mode Radiated Spurious Emissions: Section 15.109 (Continued)

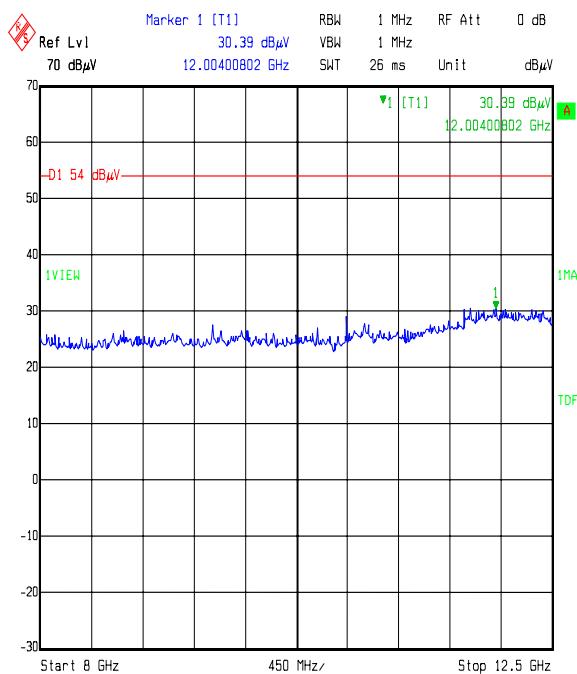

Title: Panasonic Mobile EUT: VS70, FCC Part 15.247
 Comment A: 71978JD03 BT Mode, Hopping off, Rx Mode.
 Date: 03.JUL.2006 16:30:48

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.4. Transmitter AC Conducted Spurious Emissions: Section 15.207

The EUT was configured for ac conducted emission measurements as described in section 9 of this report. Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

Results:

Quasi-Peak Detector Measurements on Live and Neutral Lines

Top Channel


Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.18209	Neutral	44.09	64.39	20.30	Complied
0.30561	Neutral	37.46	60.09	22.63	Complied
1.32139	Neutral	47.77	56.00	8.23	Complied
1.41923	Neutral	45.28	56.00	10.72	Complied
2.42846	Neutral	40.96	56.00	15.04	Complied
18.20674	Neutral	23.16	60.00	36.84	Complied

Average Detector Measurements on Live and Neutral Lines

Top Channel

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.18209	Live	20.09	54.39	34.30	Complied
0.30561	Neutral	32.86	50.09	17.23	Complied
1.32139	Neutral	36.65	46.00	9.35	Complied
1.41923	Neutral	34.11	46.00	11.89	Complied
2.42846	Neutral	28.65	46.00	17.35	Complied
18.20674	Neutral	9.78	50.00	40.22	Complied

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

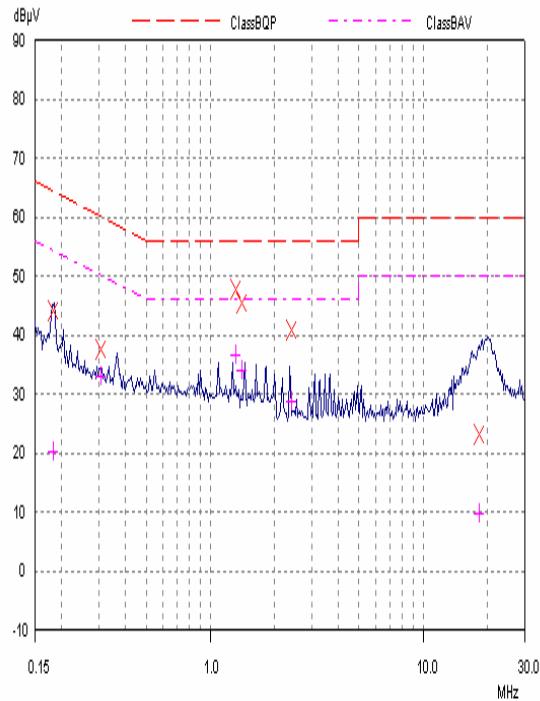Transmitter AC Conducted Spurious Emissions: Section 15.207 (Continued)

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.


Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.5. Transmitter 20 dB Bandwidth: Section 15.247(a)(1)

The EUT was configured for 20 dB bandwidth measurements as described in section 9 of this report. Tests were performed to identify the 20 dB bandwidth.

Results:

Transmitter 20 dB Bandwidth (kHz)	Limit (kHz)
926.719	None specified

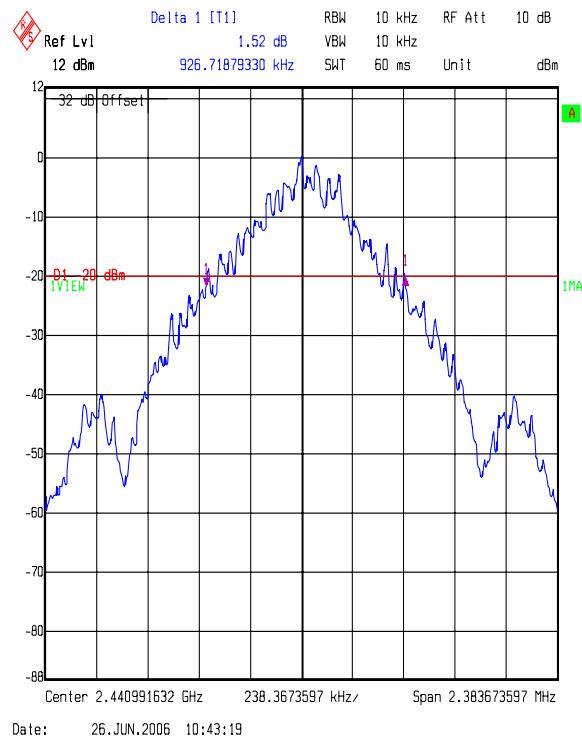

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.6. Transmitter Carrier Frequency Separation: Section 15.247(a)(1)

The EUT was configured for carrier frequency separation measurements as described in section 9 of this report.

Tests were performed to identify the carrier frequency separation.

Results:

Transmitter Carrier Frequency Separation (kHz)	Limit (> 20 dB BW) (kHz)	Margin (kHz)	Result
1000.000	926.719	73.281	Complied



Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.7. Transmitter Average Time of Occupancy: Section 15.247(a)(1)(iii)

The EUT was configured for average time of occupancy measurements as described in section 9 of this report.


Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.

Results:


Emission Width (μs)	Number of Hops in 31.6 Seconds	Average Time of Occupancy (s)	Limit (s)	Margin (s)	Result
2886.573	126	0.3637	0.4	0.0363	Complied

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**


Transmitter Average Time of Occupancy: Section 15.247(a)(1)(iii) (Continued)

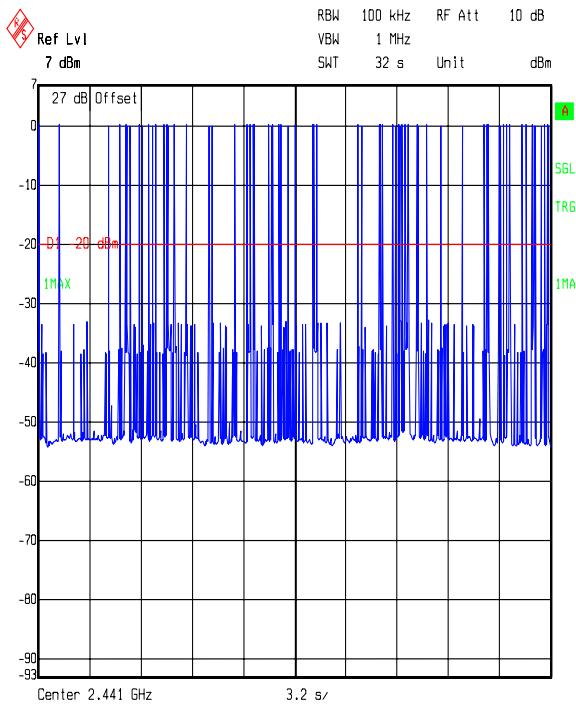

Date: 26.JUN.2006 10:53:27

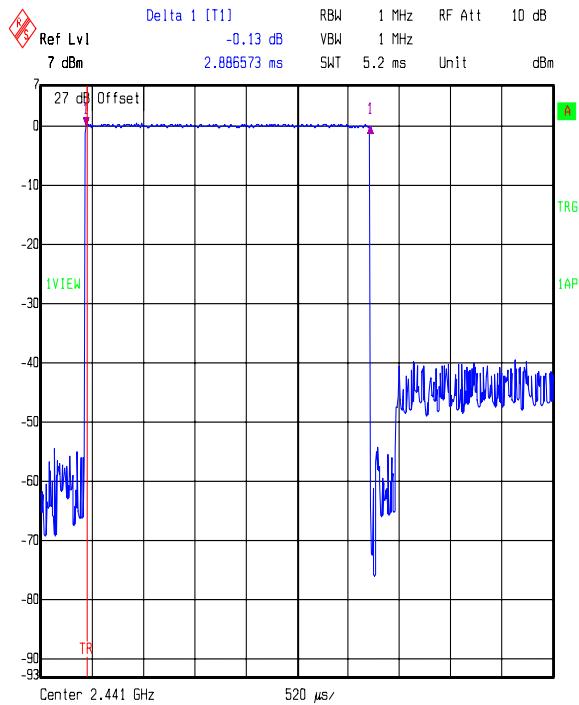

Date: 26.JUN.2006 10:56:06

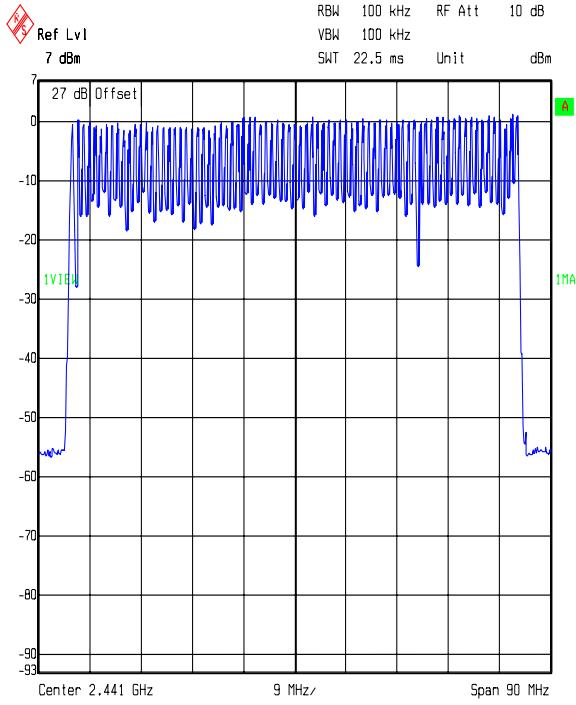

Date: 26.JUN.2006 10:58:07

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.8. Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1)

The EUT was configured for transmitter peak output power measurements as described in Section 9 of this report.

Tests were performed to identify the transmitter maximum peak output power (EIRP) of the EUT.

Results:

Battery Powered Devices


Channel	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	-1.1	30.0	31.1	Complied
Middle	-0.6	30.0	30.6	Complied
Top	-0.4	30.0	30.4	Complied

Note(s):


1. *These tests were performed radiated; therefore the EUT antenna gain is encompassed in the final result and not measurable.*

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**


Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1) (Continued)

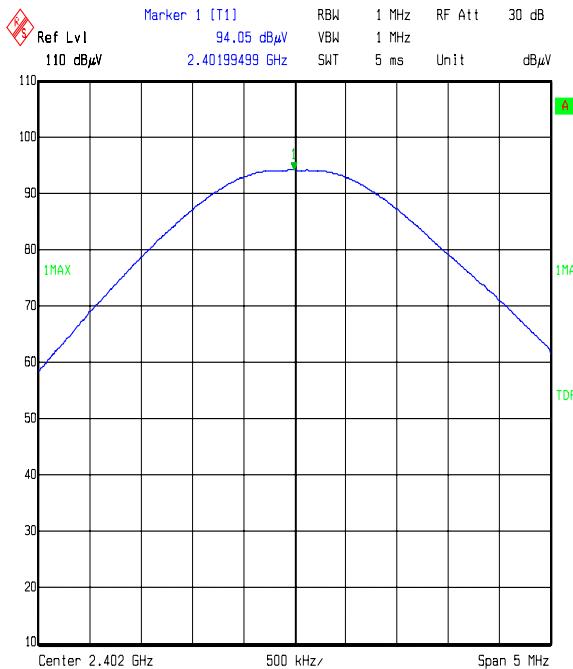

Title: Panasonic EUT:VS70. FCC Part 15.247 Peak Output Power
Comment A: 71978JD03 Tx Mode (BT), Bottom Channel
Date: 04.JUL.2006 10:44:26

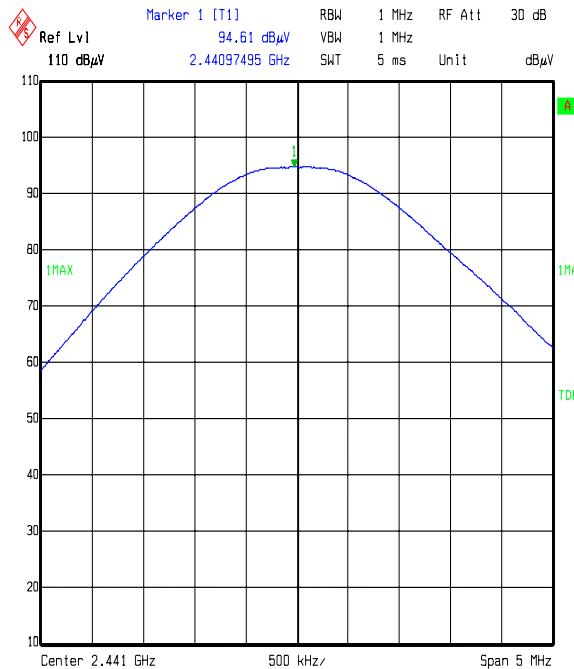

Title: Panasonic EUT:VS70. FCC Part 15.247 Peak Output Power
Comment A: 71978JD03 Tx Mode (BT), Middle Channel
Date: 04.JUL.2006 10:50:00

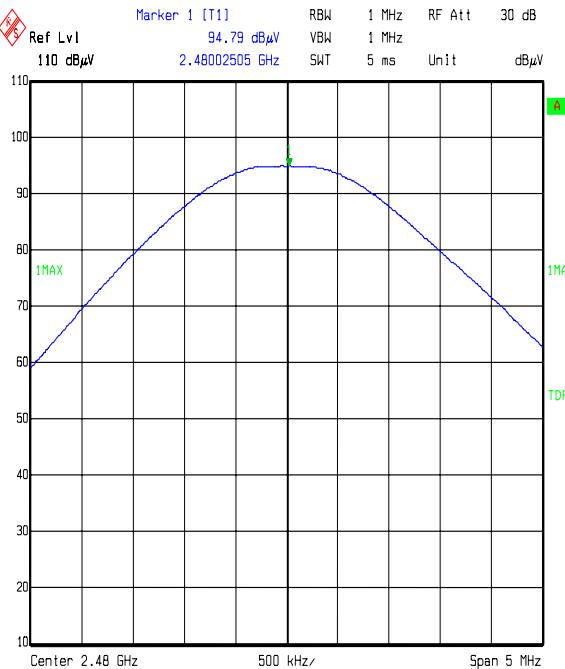

Title: Panasonic EUT:VS70. FCC Part 15.247 Peak Output Power
Comment A: 71978JD03 Tx Mode (BT), Top Channel
Date: 04.JUL.2006 10:54:08

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.9. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:**Electric Field Strength Measurements: 30 to 1000 MHz
(emissions occurring in the restricted bands)****Top Channel**

Frequency (MHz)	Antenna Polarity	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
334.293	Horizontal	28.0	46.0	18.0	Complied

Note(s):

1. *The preliminary scans showed similar emission levels for each mode below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the top channel only.*

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.10. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:


Electric Field Strength Measurements: 30 to 1000 MHz
(emissions outside the restricted bands)

Top Channel

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
48.246	Vertical	32.8	74.6	41.8	Complied
104.033	Vertical	21.2	74.6	53.4	Complied
155.424	Vertical	27.6	74.6	47.0	Complied
397.028	Vertical	21.9	74.6	52.7	Complied
854.078	Horizontal	31.0	74.6	43.6	Complied

Note(s):

1. The preliminary scans showed similar emission levels for each mode below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the top channel only.

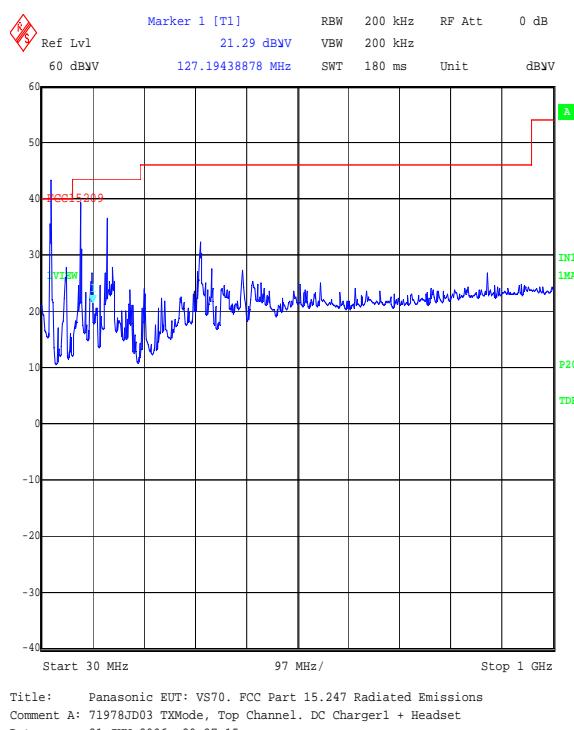

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.11. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Electric Field Strength Measurements (Frequency Range: 1 to 25.0 GHz)

Highest Peak Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.804125	Horizontal	27.9	-6.5	34.4	74.0	39.6	Complied

Highest Average Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.804125	Horizontal	21.6	-6.5	28.1	54.0	25.9	Complied

Highest Peak Level: Middle Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.881735	Horizontal	29.1	-6.2	35.3	74.0	38.7	Complied

Highest Average Level: Middle Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.881735	Horizontal	22.6	-6.2	28.8	54.0	25.2	Complied

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)

Highest Peak Level: Top Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.961920	Horizontal	32.9	-5.9	38.8	74.0	35.2	Complied

Highest Average Level: Top Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.961920	Horizontal	28.8	-5.9	34.7	54.0	19.3	Complied

Highest Peak Level: Hopping Mode


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.960168	Horizontal	33.9	-5.9	39.8	74.0	34.2	Complied

Highest Average Level: Hopping Mode


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.960168	Horizontal	32.0	-5.9	37.9	54.0	16.1	Complied

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**


Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)

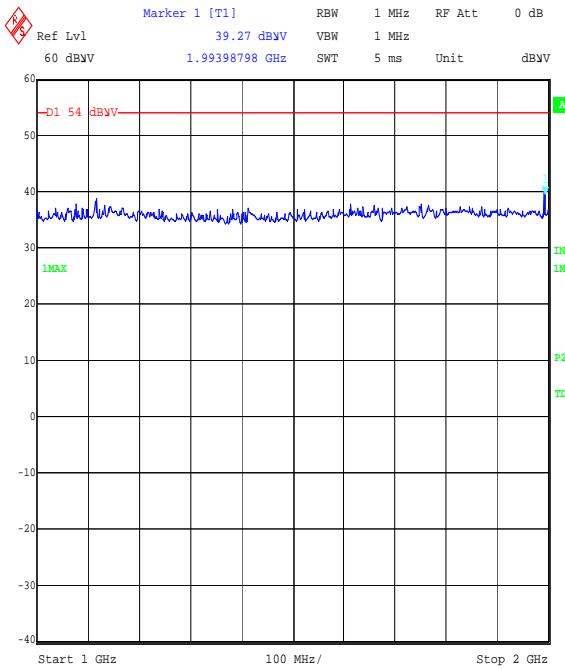


Title: Panasonic EUT: VS70. FCC Part 15.247 Radiated Emissions
 Comment A: 71978JD03 TX Mode, Top Channel. DC Charger1 + Headset
 Date: 21.JUN.2006 21:20:38

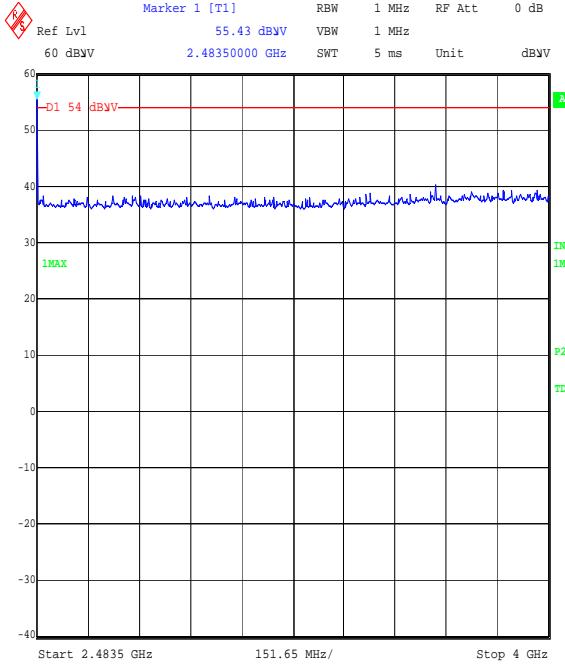

Title: Panasonic EUT: VS70. FCC Part 15.247 Radiated Emissions
 Comment A: 71978JD03 TX Mode, Top Channel. DC Charger1 + Headset
 Date: 21.JUN.2006 21:12:57

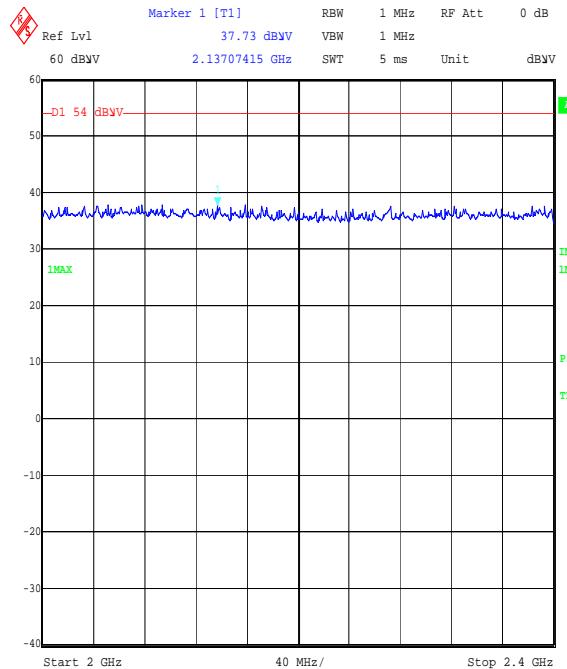

Title: Panasonic EUT: VS70. FCC Part 15.247 Radiated Emissions
 Comment A: 71978JD03 TX Mode, Top Channel. DC Charger1 + Headset
 Date: 21.JUN.2006 21:14:07

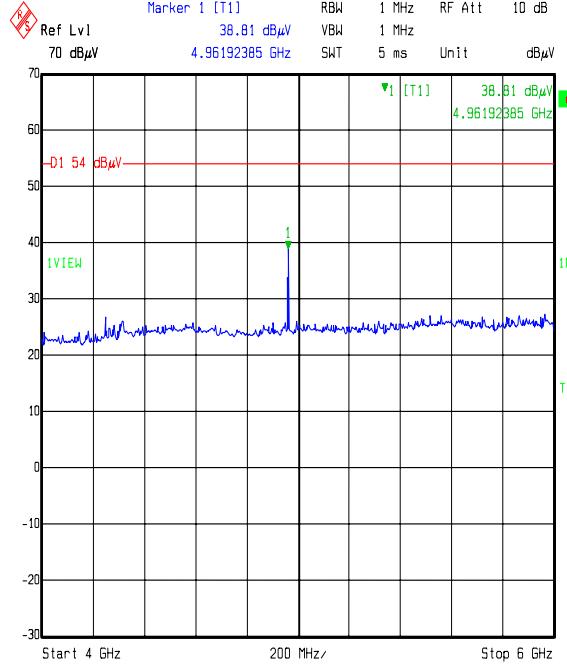


Title: Panasonic Mobile EUT: VS70. FCC Part 15.247
 Comment A: 71978JD03 BT Mode, Hopping off, Top Channel.
 Date: 03.JUL.2006 12:15:16


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**


Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)

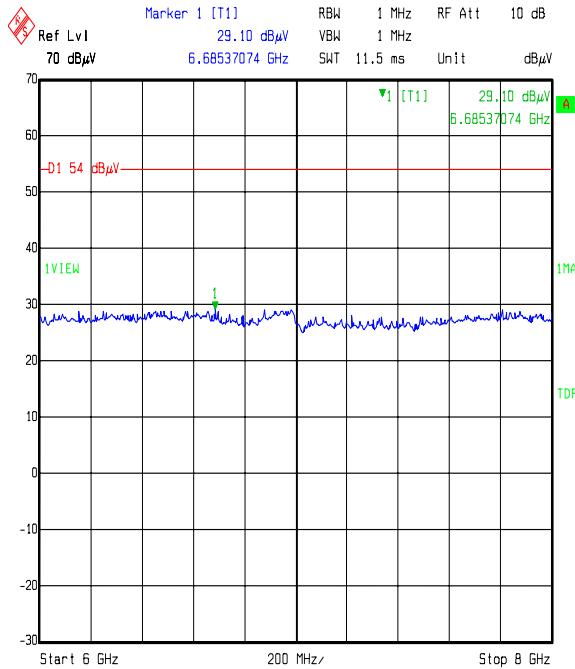


Title: Panasonic Mobile EUT: VS70. FCC Part 15.247
Comment A: 71978JD03 BT Mode, Hopping off, Top Channel.
Date: 03.JUL.2006 14:55:30

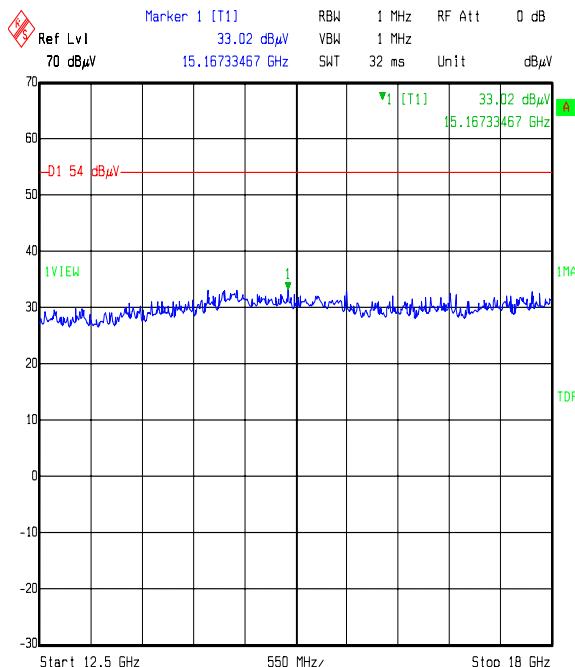

Title: Panasonic Mobile EUT: VS70. FCC Part 15.247
Comment A: 71978JD03 BT Mode, Hopping off, Top Channel.
Date: 03.JUL.2006 15:33:11

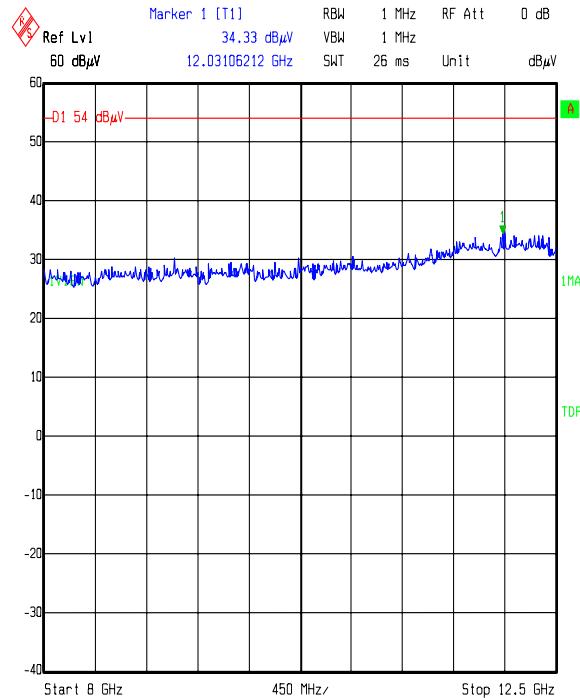

Date: 29.JUN.2006 16:23:03

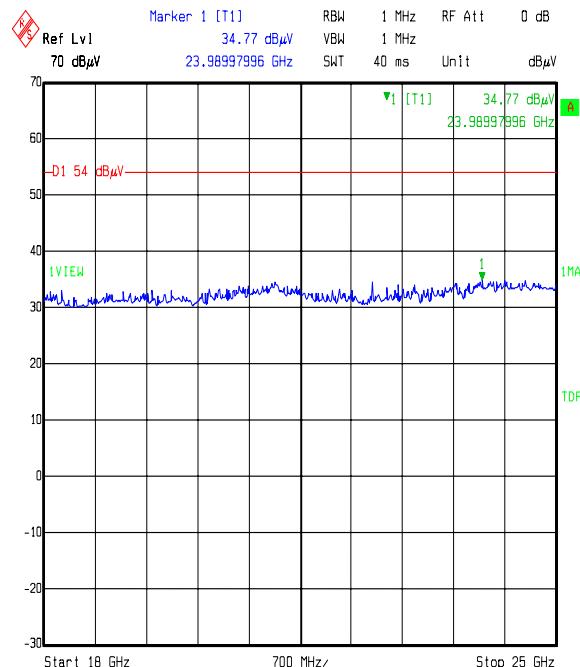

Title: Panasonic Mobile EUT: VS70. FCC Part 15.247
Comment A: 71978JD03 BT Mode, Hopping off, Top Channel.
Date: 03.JUL.2006 15:40:03

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.12. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum radiated band edge emissions.

Results:

Electric Field Strength Measurements


Peak Power Level Hopping Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4000	Horizontal	47.7	-11.4	36.3	73.9*	37.2	Complied
2.4835	Horizontal	57.9	-11.0	46.9	74.0	27.1	Complied


*-20 dBc limit

Average Power Level Hopping Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4835	Horizontal	54.7	-11.0	43.7	54.0	10.3	Complied

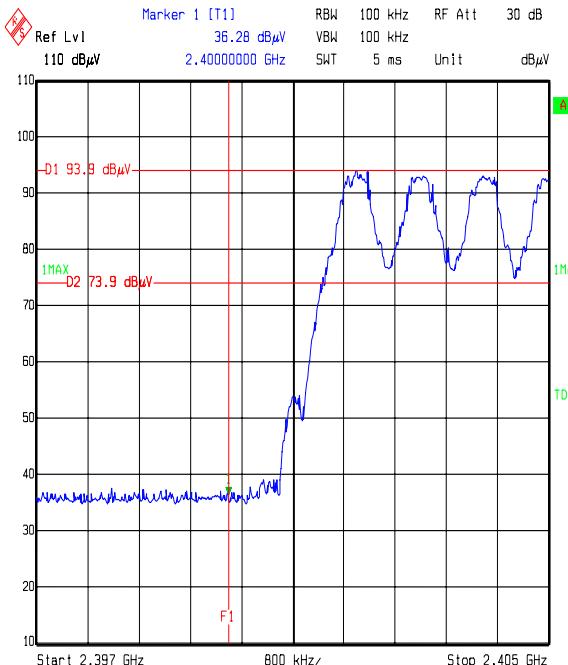

Title: Panasonic EUT:VS70. FCC Part 15.247 Radiated BandEdge
 Comment A: 71978JD03 Tx Mode (BT), Hopping on All Channels.
 Date: 04.JUL.2006 11:13:09

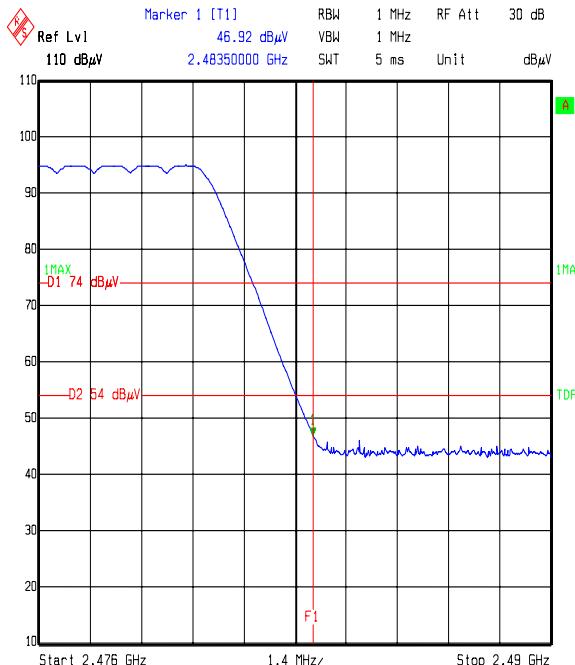

Title: Panasonic EUT:VS70. FCC Part 15.247 Radiated BandEdge
 Comment A: 71978JD03 Tx Mode (BT), Hopping on All Channels.
 Date: 04.JUL.2006 11:01:22

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

7.2.13. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the average radiated band edge emissions.

Results:


Peak Power Level Static Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4000	Horizontal	49.3	-11.4	37.9	73.9*	36.0	Complied
2.4835	Horizontal	58.2	-11.0	47.2	74.0	26.8	Complied


*-20 dBc limit

Average Power Level Static Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4835	Horizontal	55.8	-11.0	44.8	74.0	9.2	Complied

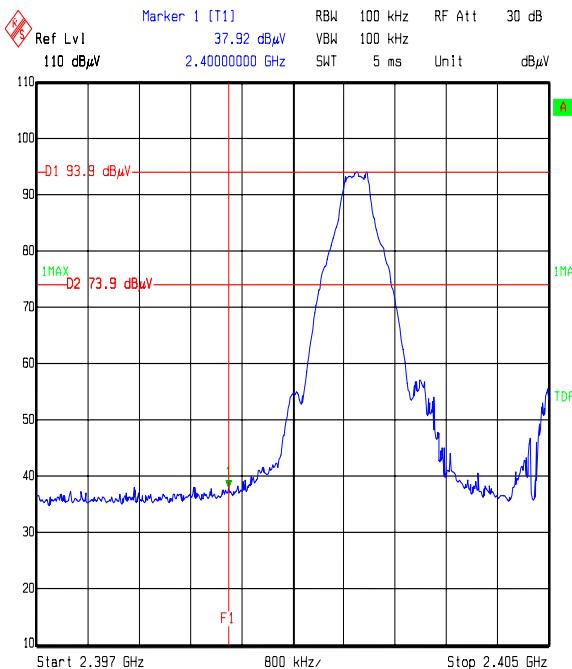

Title: Panasonic EUT:VS70. FCC Part 15.247 Radiated BandEdge
 Comment A: 71978JD03 Tx Mode (BT), Bottom Channel.
 Date: 04.JUL.2006 11:10:12

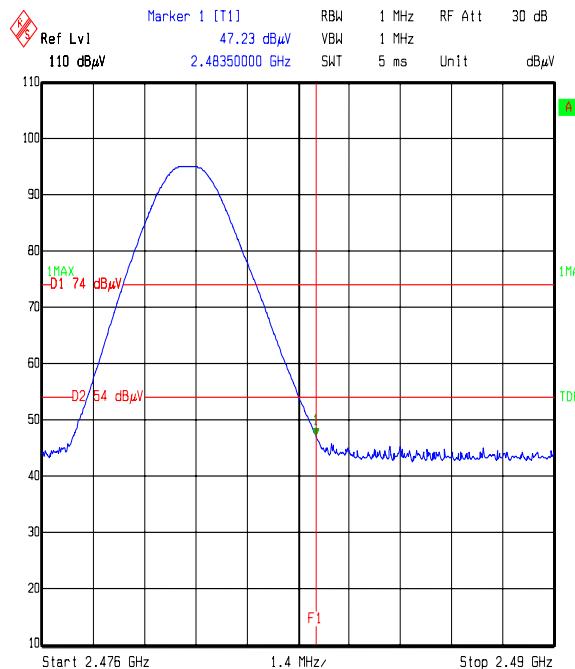

Title: Panasonic EUT:VS70. FCC Part 15.247 Radiated BandEdge
 Comment A: 71978JD03 Tx Mode (BT), Top Channel.
 Date: 04.JUL.2006 11:06:45

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station

To: **FCC Part 15.247: 2005**

8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.72 dB
Transmitter Maximum Peak Output Power	Not applicable	95%	±2.94 dB
Transmitter Carrier Frequency Separation	Not applicable	95%	±11.4 ppm
Transmitter Average Time of Occupancy	Not applicable	95%	±0.3 ns
20 dB Bandwidth	Not applicable	95%	± 11.4 ppm
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±4.64 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

9. Measurement Methods

9.1. AC Mains Conducted Emissions

AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane. The EUT was powered with 110V 60 Hz ac mains supplied via a line impedance stabilisation network (LISN).

Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)/Average
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	>1 s
Observation Time:	Not applicable	>15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

9.2. Radiated Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. Any emission within 20 dB of the limit were then measured on the open area test site, except in cases where the noise floor was within 20 dB of the limit, in these cases the highest point of the noise floor was measured.

Where an emission fell inside a restricted band, measurements were made at the appropriate test distance using a measuring receiver with a quasi peak detector for measurements below 1000 MHz and an average and peak detector for measurements above 1000 MHz. A peak detector was used for all other measurements.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4.

All measurements on the open area test site were performed using broadband antennas in both vertical and horizontal polarisations.

On the open area test site, at each frequency where a signal was to be measured, the trace was maximised by rotating a turntable through 360°. The angle at which the maximum signal was observed was locked out. For frequencies below 1000 MHz the test antenna was varied in height between 1 m and 4 m in order to further maximise the target emission.

For frequencies above 1000 MHz where a horn antenna was used, height searching was performed to locate the optimal height of the horn with respect to the EUT. At this point the horn was locked off and the turntable was again rotated through 360° to maximise the target signal. It should be noted that the received signal from the EUT would diminish very quickly after it exits the beam width of the horn antenna, for this reason it may not be necessary to fully height search with the horns.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

Radiated Emissions (Continued)

At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Scans were performed to the upper frequency limits as stated in section 15.33

The final field strength was determined as the indicated level in dB μ V plus cable loss and antenna factor.

The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements <1 GHz	Final Measurements \geq1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak / Average
Mode:	Max Hold	Not applicable	Max Hold
Bandwidth:	(120 kHz <1 GHz) (1 MHz \geq 1 GHz)	120 kHz	1 MHz
Amplitude Range:	100 dB	100 dB	100 dB
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

9.3. Carrier Frequency Separation / 20 dB Bandwidth

The EUT and spectrum analyser was configured as for radiated measurements, and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine the bandwidth and separation of each transmission channel the measurement analyser was configured to measure two adjacent channels whilst the EUT was in hopping mode. The spectrum analyser was configured with a resolution bandwidth and video bandwidth greater than 1% of the frequency span.

The analyser was set for a maximum hold scan to capture the profile of the signal. The peak points on the two adjacent channels were noted and the separation between them recorded.

To determine the occupied bandwidth, a resolution bandwidth of 10 kHz was used, which is greater than 1% of the 20 dB bandwidth. A video bandwidth of, at least, the same value was used.

The analyser was set for a maximum hold scan to capture the profile of the signal. The peak level was then determined, and a reference line was drawn 20 dB below the peak level.

The bandwidth was determined at the points where the 20 dB reference line intercepted the power envelope of the emission.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station

To: **FCC Part 15.247: 2005**

9.4. Average Time of Occupancy

The EUT and spectrum analyser was configured as for radiated measurements, and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

First the maximum packet length was determined on the centre channel.

The measurement analyser was configured to the time domain mode by setting the span to zero with a sweep time sufficiently wide enough to measure one pulse.

The EUT was configured to operate in normal mode of operation. The pulse width of one transmission was then recorded. The measurement analyser was then configured in zero span i.e. in the time domain and the sweep time was set to 32 seconds (the closest allowable setting to 31.6 seconds). This 31.6 second period was determined by multiplying the number of channels the device operates over (79) by 0.4 seconds.

The number of transmissions within this period was noted and multiplied by the pulse width recorded earlier. This gives the maximum occupancy over 31.6 seconds.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

9.5. Effective Isotropic Radiated Power (EIRP)

EIRP measurements were performed in accordance with the standard, against appropriate limits.

The EIRP was measured with the EUT arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4. The transmitter was fitted with an integral antenna; therefore all radiated tests were performed with the unit operating into the integral antenna.

The level of the EIRP was measured using a spectrum analyser.

The test antenna was positioned in the horizontal plane. The EUT was oriented in the X plane. The test antenna was then raised and lowered until a maximum peak was observed. The turntable was then rotated through 360 degrees and the maximum peak reading obtained. The height search was then repeated to take into consideration the new angular position of the turntable. The maximum reading observed was then recorded. This procedure was then repeated with the EUT oriented in the Y and Z planes. The highest reading taken in all 3 planes was recorded. The entire procedure was then repeated with the test antenna set in the vertical polarity.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a horn antenna. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The EIRP was calculated as:-

$$\text{EIRP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

Effective Isotropic Radiated Power (EIRP) (Continued)

Circumstances where the signal generator could not produce the desired a power substitution was performed with the signal generator set to 0 dBm. The radiated signal was maximised as previously described. The level indicated on the measuring receiver was noted. The delta between this level and the maximum level for the EUT was calculated and also noted. The EIRP of the signal generator was calculated using the above formulae. The recorded delta was added to the calculated EIRP to obtain the substituted EUT EIRP.

Delta (dB) = EUT – SG

where :

EUT = spectrum analyser indicated EUT raw level

SG = spectrum analyser indicated signal generator raw level

The signal generator actual EIRP is calculated as:

EIRP SG= Signal Generator Level - Cable Loss + Antenna Gain

The EUT EIRP is calculated as:

EIRP EUT = EIRP SG + Delta.

The test equipment settings for EIRP measurements were as follows:

Receiver Function	Setting
Detector Type:	Peak
Mode:	Not applicable
Bandwidth:	1 MHz
Amplitude Range:	100 dB
Sweep Time:	Coupled

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

9.6. Band Edge Compliance of RF Radiated Emissions

The EUT and spectrum analyser were configured as for radiated measurements and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine band edge compliance, the analyser resolution bandwidth was set to $\geq 1\%$ of the analyser span. The video bandwidth was set to be \geq the resolution bandwidth. The sweep was set to auto and the detector to peak. The trace was set to max hold and a trace was produced.

A plot of the lower band edge of the allocated frequency band was produced. A marker was set to the level of the highest in band emission with a limit line set to 20 dB below this. The marker was then placed on the highest out of band emission (the specification states that either the band edge level must be measured or the highest out of band emission, whichever is the greater). The plots show that the highest out of band emission complies with the -20 dBc limit.

The above procedure was then repeated for the upper band edge except that, as the upper band edge fell on a restricted band edge (as defined in section 15.205(a)), the limit for the restricted band was applied instead of the -20 dBc limit i.e. the general limits defined in section 15.209(a).

Final measurements were performed on the worst-case configuration as described in Part 15.31(i).

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Calibration Date:
A027	Horn Antenna	Eaton	9188-2	301	08/06/06
A031	Horn Antenna	Eaton	91889-2	557	08/06/06
A1069	LISN	Rohde & Schwarz	ESH3-Z5	837469/012	31/01/06
A1361	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	A1361-20112003	29/04/06
A1534	Preamplifier	Hewlett Packard	8449B	3008A00405	Cal before use
A1537	Dual Directional Coupler	Hewlett Packard	778D	1144A05122	Cal before use
A255	Horn Antenna	Flann	16240-20	519	12/01/06
A259	Bilog Antenna	Chase	CBL6111	1513	21/02/05
A427	Horn Antenna	Flann	14240-20	150	12/01/06
A428	Horn Antenna	Flann	12240-20	134	12/01/06
A430	Horn Antenna	Flann	18240-20	425	12/01/06
A436	Horn Antenna	Flann	20240-20	330	24/04/06
A442	Horn Antenna	Narda	645	8608	12/01/06
M003	Spectrum Monitor	Rohde & Schwarz	EZM	883 580/008	Cal not reqd.
M023	Test Receiver	Rohde & Schwarz	ESVP	872 991/027	10/04/06
M090	Receiver / Spectrum Analyser System	Rohde & Schwarz	ESBI	DU:838494/005 RU:836833/001	08/11/05
M1068	Thermometer Digital	Iso-Tech	RS55	93102884	09/06/06
M1149	Bluetooth Test Set	Anritsu	MT8852A	6K00001529	Cal not reqd.
M1229	Digital Multimeter	Fluke	179	87640015	06/03/06
M1242	Spectrum Analyser	Rohde & Schwarz	FSEM30	845986_022	25/08/05
M1263	Spectrum Analyser	Rohde & Schwarz	ESIB7	100265	12/01/06
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	21/06/05
S0520	DC Power Supply	GW Instek	GPC-3030	E835141	Cal not reqd.
S0529	DC Power Supply	ISO-Tech	IPS2302A	504E005G2	Cal not reqd.
S202	Site 2	RFI	2		Cal before use
S212	Site 1	RFI	1		22/07/05

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
To: **FCC Part 15.247: 2005**


Appendix 2. Test Configuration Drawings

This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\71978JD03\EMICON	Test configuration for measurement of conducted emissions.
DRG\71978JD03\EMIRAD	Test configuration for measurement of radiated emissions.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
 To: **FCC Part 15.247: 2005**

DRG\71978JD03\EMICON

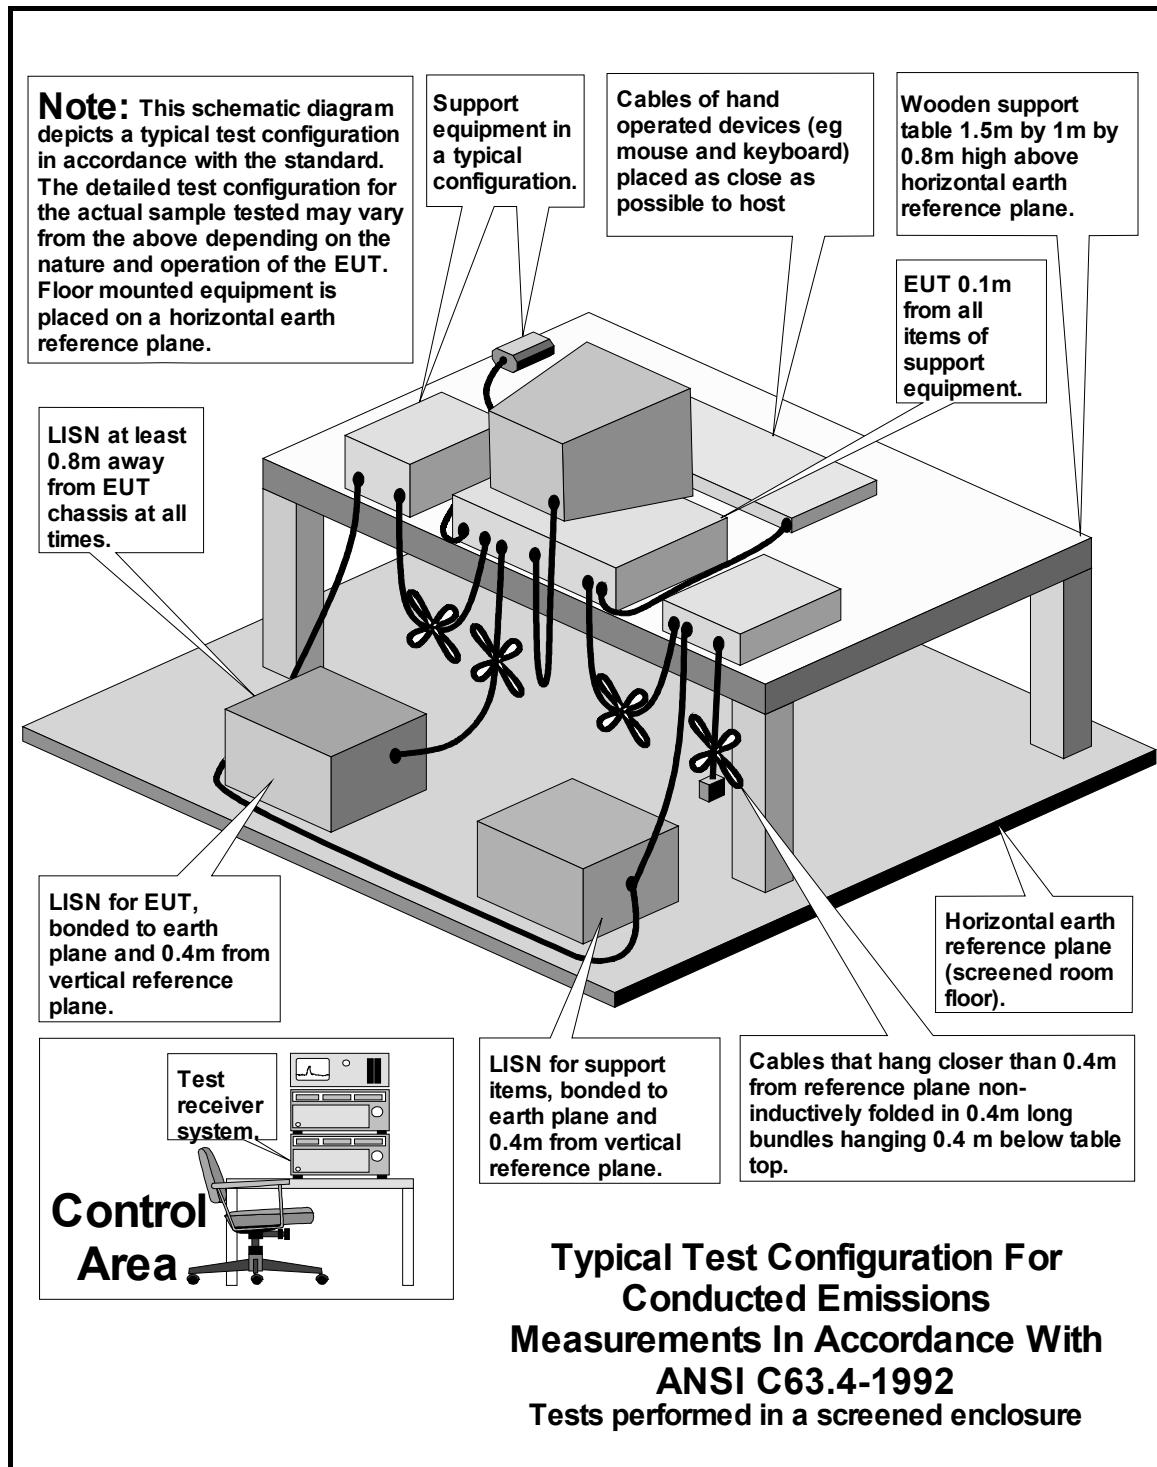

Test of: **Panasonic Mobile Comms Dev of Europe Ltd.**
VS70 Dual Mode (3G/GSM) Mobile Station
 To: **FCC Part 15.247: 2005**

DRG\71978JD03\EMIRAD

