



FCC 47 CFR PART 22 SUBPART H AND PART 24 SUBPART E

TEST REPORT

For

Mobile Data Acquisition

Model: W618e

Trade Name: Waveon

Issued to

Infowave Pte Ltd
600 Sin Ming Avenue 4th Floor CityCab Building
Singapore 575733

Issued by



Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsemc.com.tw>
service@ccsrf.com



Testing Laboratory
1309

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

| | |
|---|-----------|
| 1. TEST RESULT CERTIFICATION..... | 3 |
| 2. EUT DESCRIPTION | 4 |
| 3. TEST METHODOLOGY | 5 |
| 3.1 EUT CONFIGURATION | 5 |
| 3.2 EUT EXERCISE | 5 |
| 3.3 GENERAL TEST PROCEDURES | 5 |
| 3.4 DESCRIPTION OF TEST MODES..... | 6 |
| 4. INSTRUMENT CALIBRATION..... | 7 |
| 4.1 MEASURING INSTRUMENT CALIBRATION | 7 |
| 4.2 MEASUREMENT EQUIPMENT USED | 8 |
| 4.3 MEASUREMENT UNCERTAINTY | 9 |
| 5. FACILITIES AND ACCREDITATIONS | 10 |
| 5.1 FACILITIES | 10 |
| 5.2 EQUIPMENT | 10 |
| 5.3 TABLE OF ACCREDITATIONS AND LISTINGS | 11 |
| 6. SETUP OF EQUIPMENT UNDER TEST | 12 |
| 6.1 SETUP CONFIGURATION OF EUT | 12 |
| 6.2 SUPPORT EQUIPMENT..... | 12 |
| 7. FCC PART 22 & 24 REQUIREMENTS | 13 |
| 7.1 PEAK POWER..... | 13 |
| 7.2 AVERAGE POWER..... | 14 |
| 7.3 ERP & EIRP MEASUREMENT | 15 |
| 7.4 OCCUPIED BANDWIDTH MEASUREMENT | 19 |
| 7.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS | 24 |
| 7.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT | 32 |
| 7.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT..... | 46 |
| 7.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT | 48 |
| 7.9 POWERLINE CONDUCTED EMISSIONS | 50 |
| APPENDIX I RADIO FREQUENCY EXPOSURE..... | 51 |
| APPENDIX II PHOTOGRAPHS OF TEST SETUP | 55 |



1. TEST RESULT CERTIFICATION

Applicant: Infowave Pte Ltd
600 Sin Ming Avenue 4th Floor CityCab Building
Singapore 575733

Equipment Under Test: Mobile Data Acquisition

Trade Name: Waveon

Model Number: W618e

Date of Test: June 1 ~ 3, 2009

| APPLICABLE STANDARDS | |
|--|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 22 Subpart H & Part 24 Subpart E | No non-compliance noted |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C: 2004 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 Subpart H and PART 24 Subpart E.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

| | |
|--|--|
| Product | Mobile Data Acquisition |
| Trade Name | Waveon |
| Model Number | W618e |
| Model Discrepancy | N/A |
| Power Supply | Powered from host device (DC 12V) |
| Frequency Range | TX: 824 ~ 849 MHz / 1850 ~ 1910 MHz RX: 869 ~ 894 MHz / 1930 ~ 1989.8 MHz |
| Transmit Power (ERP & EIRP Power) | GPRS 850 MHz: 10.22 dBm (0.0105W) GPRS 1900 MHz: 19.20 dBm (0.0832W) |
| Modulation Technique | GPRS: GMSK |
| Type of Emission | GPRS 850 MHz: 246KGXW GPRS 1900 MHz: 245KGXW |
| Antenna Gain | GPRS 850 MHz: Gain: -11 dBi GPRS 1900 MHz: Gain: -11 dBi |
| Antenna Type | GPRS Antenna |

Remark:

1. *The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
2. *This submittal(s) (test report) is intended for FCC ID: **UCW618E** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.*



3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4: 2003, TIA/EIA-603-C: 2004 and FCC CFR 47, Part 2, PART 22 SUBPART H AND PART 24 SUBPART E

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



3.4 DESCRIPTION OF TEST MODES

The EUT (model: W618e) had been tested under operating condition.

EUT staying in continuous transmitting mode was programmed.

GRPS 850:

Channel Low (CH128), Channel Mid (CH190) and Channel High (CH251) were chosen for full testing.

GRPS 1900:

Channel Low (CH512), Channel Mid (CH661) and Channel High (CH810) were chosen for full testing.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz which worst case was in normal link mode only.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|-----------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY43360131 | 02/23/2010 |
| Power Meter | Agilent | E4416A | GB41291611 | 04/05/2010 |
| Power Sensor | Agilent | E9327A | US40441097 | 06/18/2010 |
| Temp. / Humidity Chamber | Terchy | MHG-150LF | 930619 | 08/05/2010 |
| DC Power Source | Agilent | E3640A | MY40001774 | 01/09/2010 |

| 3M Semi Anechoic Chamber | | | | |
|--------------------------|-----------------|-------------------|--------------------------------------|--------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | US42510252 | 09/09/2010 |
| Test Receiver | Rohde & Schwarz | ESCI | 100064 | 11/30/2009 |
| Switch Controller | TRC | Switch Controller | SC94050010 | 05/02/2010 |
| 4 Port Switch | TRC | 4 Port Switch | SC94050020 | 05/02/2010 |
| Horn-Antenna | TRC | HA-0502 | 06 | 06/03/2010 |
| Horn-Antenna | TRC | HA-0801 | 04 | 06/18/2010 |
| Bilog- Antenna | Sunol Sciences | JB3 | A030205 | 03/27/2010 |
| Loop Antenna | EMCO | 6502 | 8905/2356 | 05/28/2010 |
| Turn Table | Max-Full | MFT-120S | T120S940302 | N.C.R. |
| Antenna Tower | Max-Full | MFA-430 | A440940302 | N.C.R. |
| Controller | Max-Full | MF-CM886 | CC-C-1F-13 | N.C.R. |
| Site NSA | CCS | N/A | FCC MRA: TW1039 IC: IC 2324G-1/-2 | 10/17/2010 11/04/2010 |
| Reject Filter | Micro-Tronics | HPM13194 | 003 | 04/23/2010 |
| S.G. | HP | 83630B | 3844A01022 | 04/16/2010 |
| Substituted Dipole | Schwazbeck | VHAP/UHAP | 998 +999/ 981+982 | 06/08/2010 |
| Substituted Horn | EMCO | 3115 | 00022257 | 12/16/2009 |
| Test S/W | | | LABVIEW (V 6.1) | |



4.3 MEASUREMENT UNCERTAINTY

| PARAMETER | UNCERTAINTY |
|---|-------------|
| 3M Semi Anechoic Chamber / 30MHz ~ 1GHz | +/-3.7046 |
| 3M Semi Anechoic Chamber / Above 1GHz | +/-3.0958 |

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5.3 TABLE OF ACCREDITATIONS AND LISTINGS**

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|--|---|
| USA | FCC | 3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements |  FCC MRA: TW1039 |
| Taiwan | TAF | LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11 |  Testing Laboratory 1309 |
| Canada | Industry Canada | 3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform |  IC 2324G-1 IC 2324G-2 |

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

| No. | Device Type | Model | Series No. | FCC ID | Brand | Data Cable | Power Cord |
|-----|---|--------|------------|--------------|---------|------------|---|
| 1. | Notebook PC | PP19L | GK102 A00 | QDS-BRCM1021 | DELL | N/A | AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core |
| 2 | Car Battery (Remote) | 55D23L | N/A | N/A | Toplite | N/A | N/A |
| 3 | 8960 Series 10 Wireless Communication test set (Remote) | E5515C | GB44051665 | N/A | Agilent | N/A | Unshielded, 1.8m |

Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


7. FCC PART 22 & 24 REQUIREMENTS

7.1 PEAK POWER

LIMIT

According to FCC §2.1046.

Test Configuration

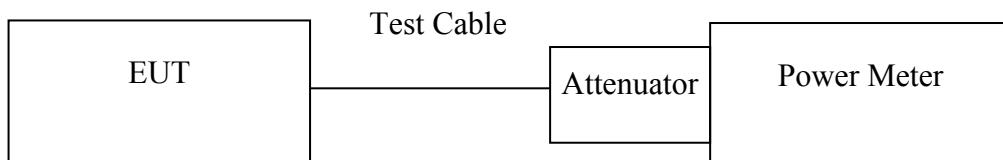

Remark: Measurement setup for testing on Antenna connector

TEST PROCEDURE

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

TEST RESULTS

No non-compliance noted.

Test Data

| Test Mode | CH | Frequency (MHz) | Peak Power (dBm) |
|------------------------|-----|-----------------|------------------|
| GPRS 850 (Class 12) | 128 | 824.20 | 32.96 |
| | 190 | 836.60 | 32.96 |
| | 251 | 848.80 | 32.89 |

| Test Mode | CH | Frequency (MHz) | Peak Power (dBm) |
|-------------------------|-----|-----------------|------------------|
| GPRS 1900 (Class 12) | 512 | 1850.20 | 29.55 |
| | 661 | 1880.00 | 28.92 |
| | 810 | 1910.00 | 28.49 |

Remark: The value of factor includes both the loss of cable and external attenuator




7.2 AVERAGE POWER

LIMIT

For reporting purposes only.

Test Configuration

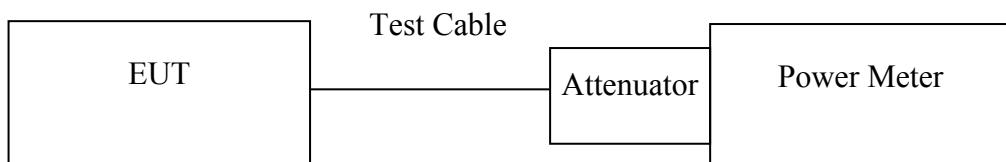

Remark: Measurement setup for testing on Antenna connector

TEST PROCEDURE

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

TEST RESULTS

No non-compliance noted.

Test Data

| Test Mode | CH | Frequency (MHz) | Average Power (dBm) |
|------------------------|-----|-----------------|---------------------|
| GPRS 850 (Class 12) | 128 | 824.20 | 32.85 |
| | 190 | 836.60 | 32.87 |
| | 251 | 848.80 | 32.80 |

| Test Mode | CH | Frequency (MHz) | Average Power (dBm) |
|-------------------------|-----|-----------------|---------------------|
| GPRS 1900 (Class 12) | 512 | 1850.20 | 29.46 |
| | 661 | 1880.00 | 28.84 |
| | 810 | 1910.00 | 28.40 |

Remark: The value of factor includes both the loss of cable and external attenuator



7.3 ERP & EIRP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 22.913(a): The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.


FCC 24.232(b): The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

FCC 24.232 (c): Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.


FCC 24.232 (d): Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.


Test Configuration

Below 1 GHz

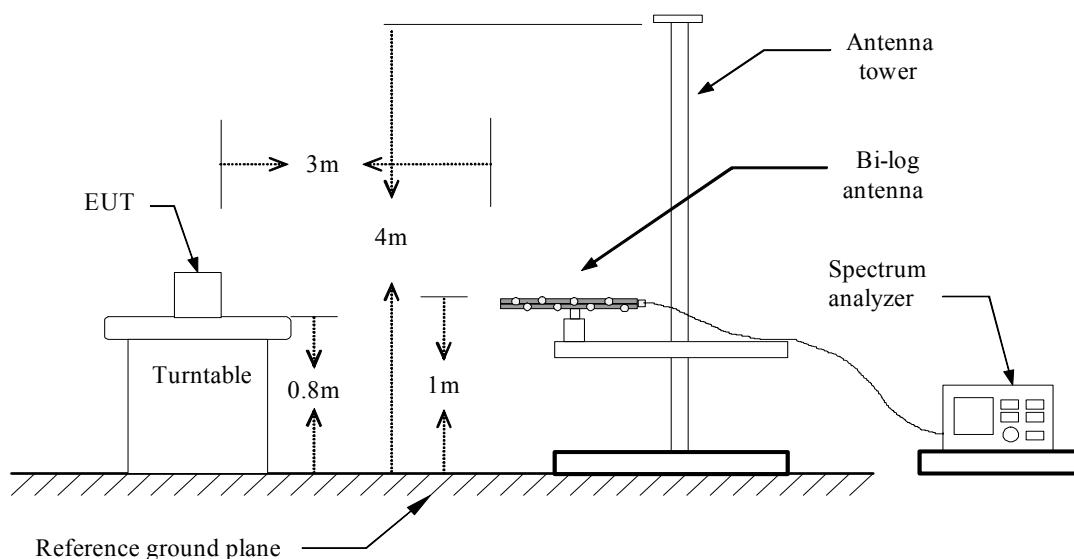

Above 1 GHz

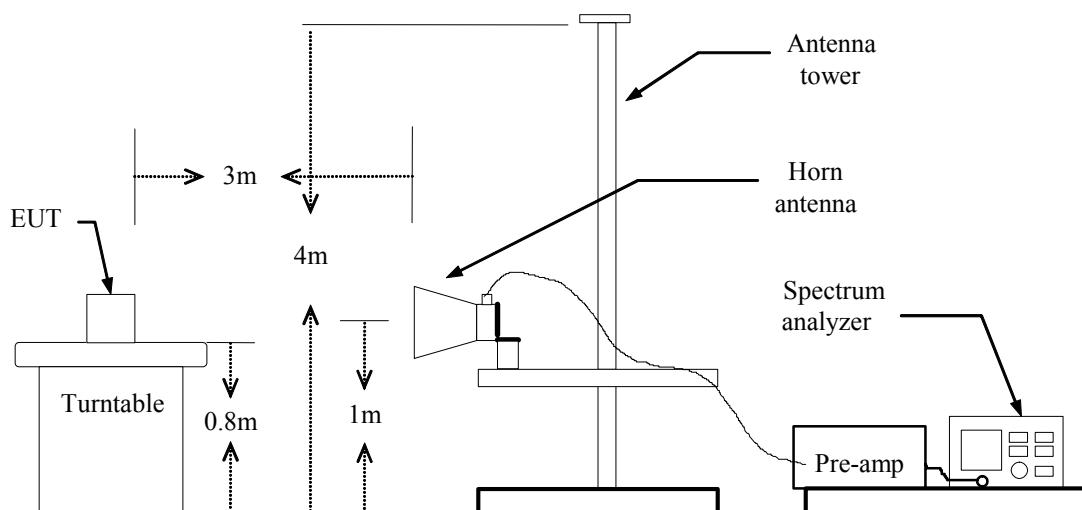

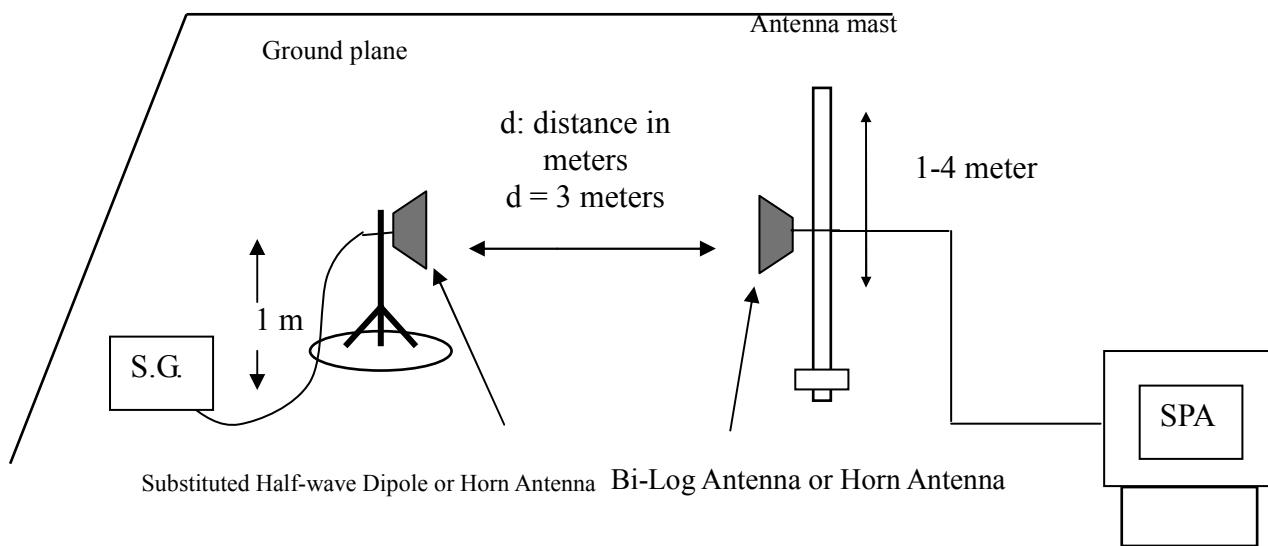For Substituted Method Test Set-UP**TEST PROCEDURE**

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement of the EUT, the resolution bandwidth was set to 3MHz and the average bandwidth was set to 3MHz. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824-849MHz, and EIRP in frequency band 1851.25 –1910MHz were measured using a substitution method. The EUT was replaced by half-wave dipole (824-849MHz) or horn antenna (1851.25-1910MHz) connected to a signal generator. The spectrum analyzer reading was recorded and ERP/EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable (dB)}$$
$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

No non-compliance noted.

**GPRS 850 TEST DATA**

| Channel | Frequency (MHz) | Reading level (dBuV) | Antenna Pol. | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|----------------------|--------------|----------------------|-------------|-------------|
| 128 | 824.20 | -25.45 | V | 10.21 | 38.50 | -28.29 |
| | 824.20 | -33.73 | H | 1.37 | 38.50 | -37.13 |
| 190 | 836.60 | -27.09 | V | 8.29 | 38.50 | -30.21 |
| | 836.60 | -35.91 | H | -0.84 | 38.50 | -39.34 |
| 251 | 848.80 | -25.02 | V | *10.22 | 38.50 | -28.28 |
| | 848.80 | -33.19 | H | 2.01 | 38.50 | -36.49 |

GPRS 1900 TEST DATA


| Channel | Frequency (MHz) | Reading level (dBuV) | Antenna Pol. | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|----------------------|--------------|----------------------|-------------|-------------|
| 512 | 1850.20 | -23.07 | V | *19.20 | 33.00 | -13.80 |
| | 1850.20 | -26.10 | H | 16.41 | 33.00 | -16.59 |
| 661 | 1880.00 | -23.13 | V | 19.03 | 33.00 | -13.97 |
| | 1880.00 | -26.68 | H | 15.78 | 33.00 | -17.22 |
| 810 | 1909.80 | -27.01 | V | 15.02 | 33.00 | -17.98 |
| | 1909.80 | -30.03 | H | 12.35 | 33.00 | -20.65 |

7.4 OCCUPIED BANDWIDTH MEASUREMENT

LIMIT

According to §FCC 2.1049.

Test Configuration

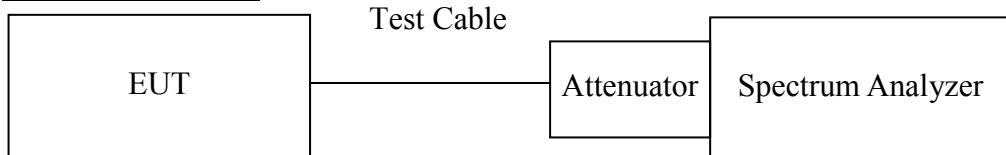

Remark: Measurement setup for testing on Antenna connector

TEST PROCEDURE

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW was set to about 1% of emission BW, VBW is set to 3 times the RBW, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS


No non-compliance noted

Test Data

| Test Mode | CH | Frequency (MHz) | 99% Bandwidth (kHz) |
|-------------------------|-----|-----------------|---------------------|
| GPRS 850 (Class 12) | 128 | 824.200 | 242.5824 |
| | 190 | 836.600 | 240.4033 |
| | 251 | 848.800 | 246.0035 |
| GPRS 1900 (Class 12) | 512 | 1850.200 | 245.9398 |
| | 661 | 1880.000 | 242.5983 |
| | 810 | 1909.800 | 244.0584 |


Test Plot

GPRS 850 (CH Low)

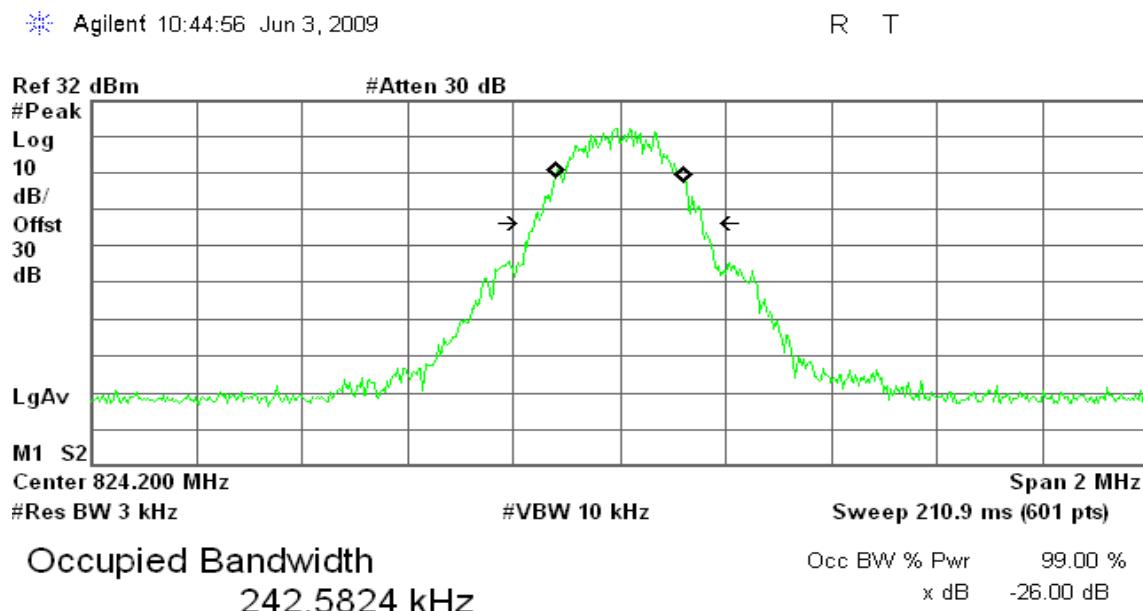

Transmit Freq Error 213.585 Hz
x dB Bandwidth 314.582 kHz

GPRS 850 (CH Mid)

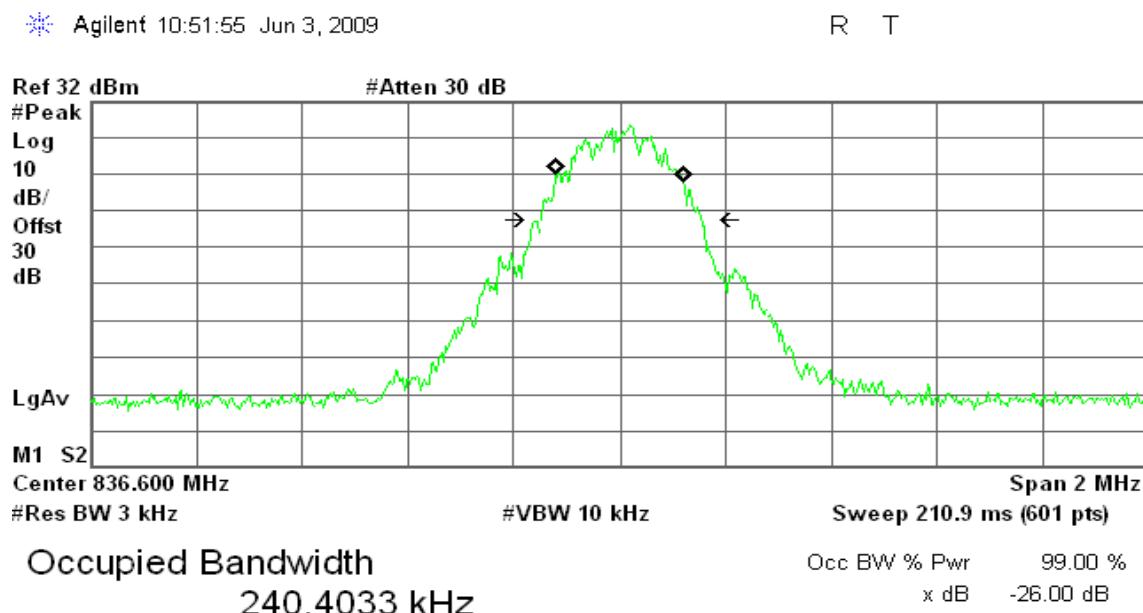


Transmit Freq Error 531.405 Hz
x dB Bandwidth 301.934 kHz

**GPRS 850(CH High)**

Agilent 10:49:01 Jun 3, 2009

R T

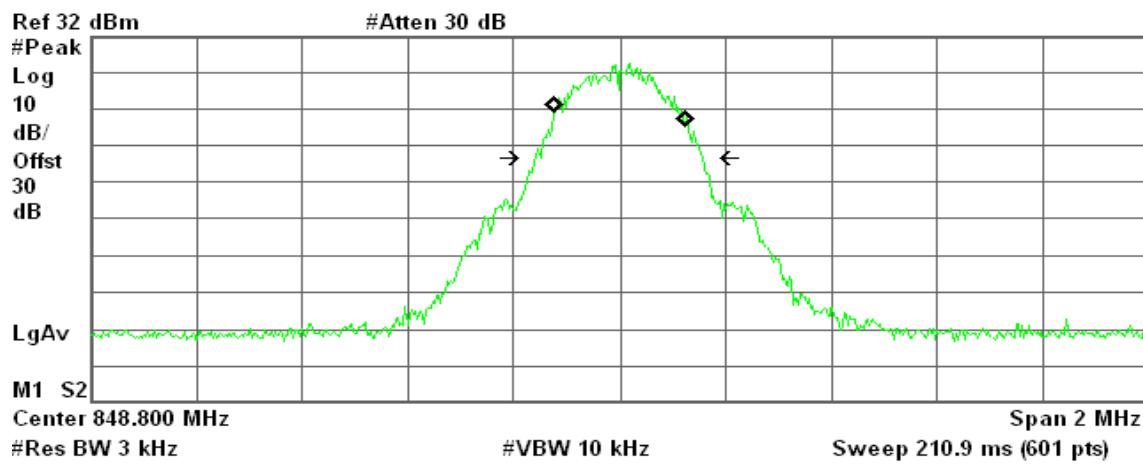


Transmit Freq Error 709.013 Hz
x dB Bandwidth 313.829 kHz

GPRS 1900 (CH Low)

Agilent 15:09:06 Jun 3, 2009

R T

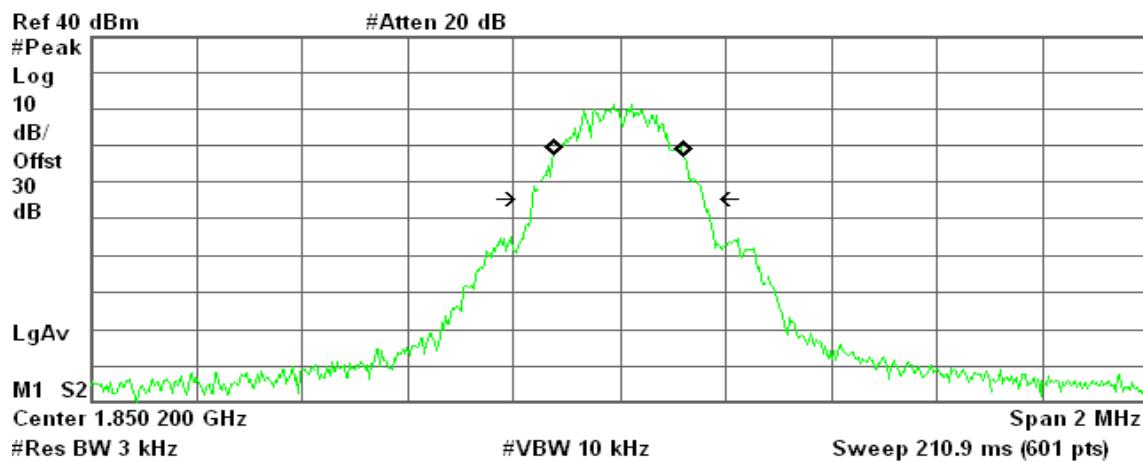


Transmit Freq Error -1.308 kHz
x dB Bandwidth 321.233 kHz

GPRS 1900 (CH Mid)

Agilent 15:12:53 Jun 3, 2009

R T

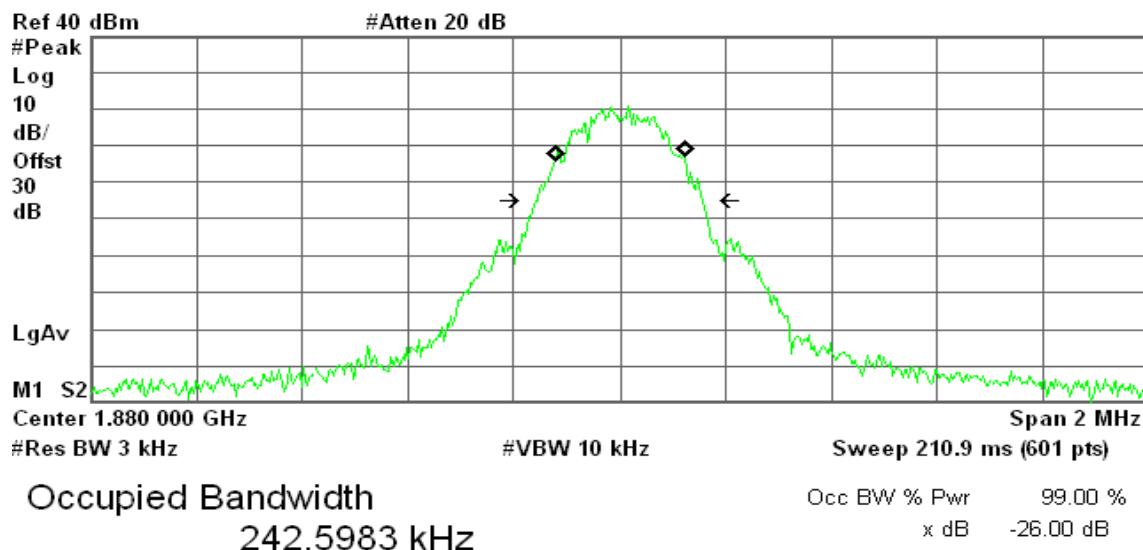


Transmit Freq Error 867.322 Hz
x dB Bandwidth 313.644 kHz

**GPRS 1900 (CH High)**

Agilent 15:15:16 Jun 3, 2009

R T

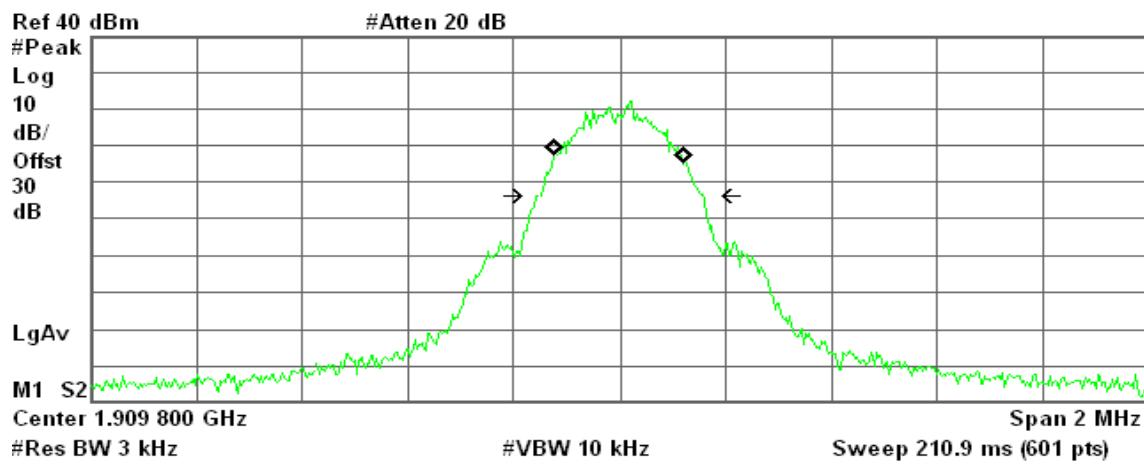

Transmit Freq Error -380.659 Hz
x dB Bandwidth 308.333 kHz

7.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS

LIMIT

According to FCC §2.1051, FCC §22.917, FCC §24.238(a).


Out of Band Emissions: The mean power of emission must be attenuated below the mean power of the non-modulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least $43 + 10 \log P$ dB.

Mobile Emissions in Base Frequency Range: The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not exceed -80 dBm at the transmit antenna connector.

Band Edge Requirements: In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the Out of band Emission

Test Configuration

Out of band emission at antenna terminals:

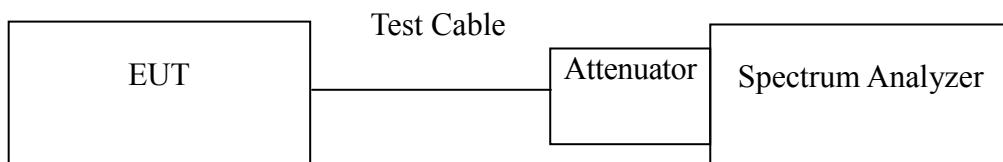

TEST PROCEDURE

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10 th harmonic. Limit = -13 dBm

Band Edge Requirements (824 MHz and 849 MHz /1850MHz and 1910MHz): In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13 dBm.

TEST RESULTS

No non-compliance noted.

**Test Data**

| Mode | CH | Location | Description |
|------------------------|-----------|-----------------|---|
| GPRS 850 (Class 12) | 128 | Figure 7-1 | Conducted spurious emissions, 30MHz - 20GHz |
| | 190 | Figure 7-2 | Conducted spurious emissions, 30MHz - 20GHz |
| | 251 | Figure 7-3 | Conducted spurious emissions, 30MHz - 20GHz |

| Mode | CH | Location | Description |
|-------------------------|-----------|-----------------|---|
| GPRS 1900 (Class 12) | 512 | Figure 8-1 | Conducted spurious emissions, 30MHz - 20GHz |
| | 661 | Figure 8-2 | Conducted spurious emissions, 30MHz - 20GHz |
| | 810 | Figure 8-3 | Conducted spurious emissions, 30MHz - 20GHz |

| Mode | CH | Location | Description |
|------------------------|-----------|-----------------|---------------------|
| GPRS 850 (Class 12) | 128 | Figure 9-1 | Band Edge emissions |
| | 251 | Figure 9-2 | Band Edge emissions |

| Mode | CH | Location | Description |
|-------------------------|-----------|-----------------|---------------------|
| GPRS 1900 (Class 12) | 512 | Figure 10-1 | Band Edge emissions |
| | 810 | Figure 10-2 | Band Edge emissions |

Test Plot**GPRS 850**

Figure 7-1: Out of Band emission at antenna terminals – GPRS CH Low

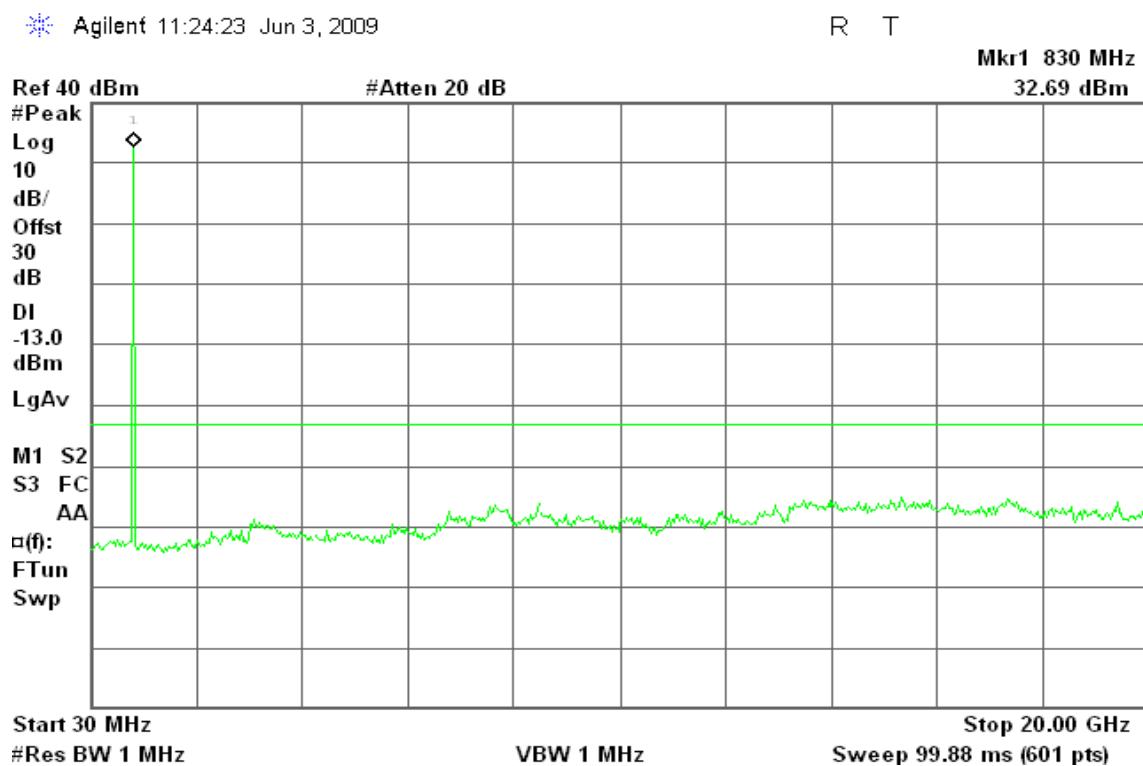


Figure 7-2: Out of Band emission at antenna terminals – GPRS CH Mid


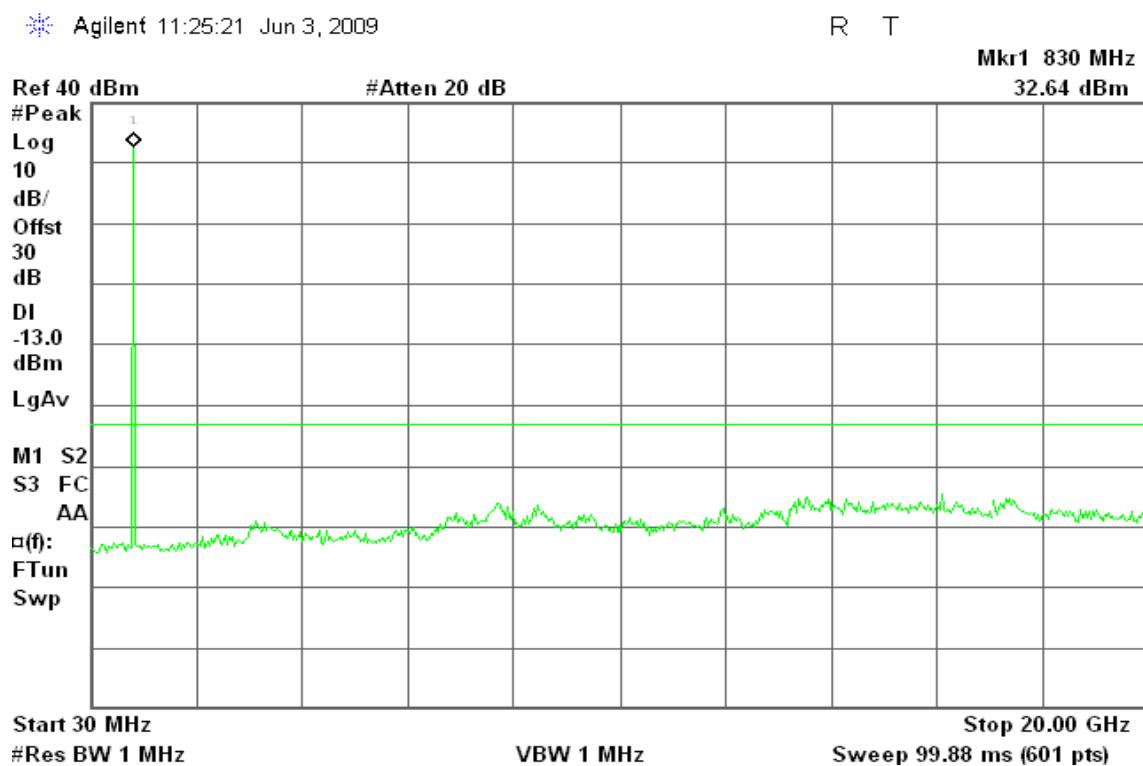


Figure 7-3: Out of Band emission at antenna terminals – GPRS CH High

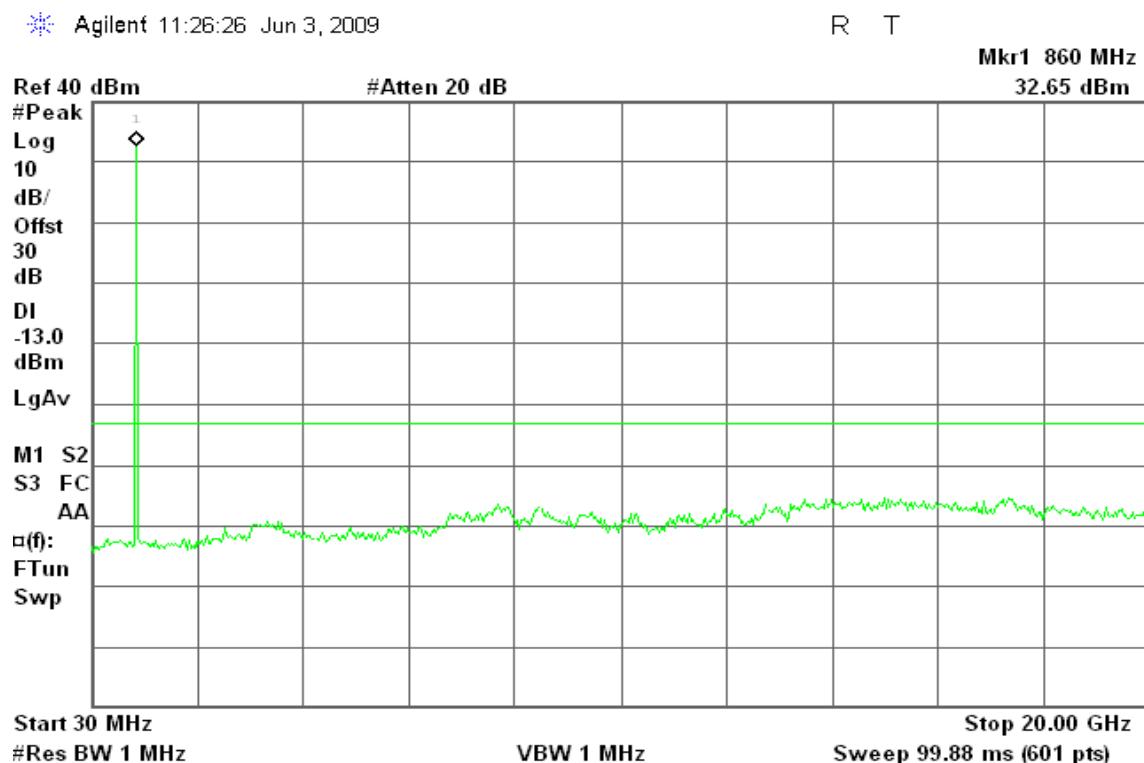

GPRS 1900

Figure 8-1: Out of Band emission at antenna terminals – GPRS CH Low

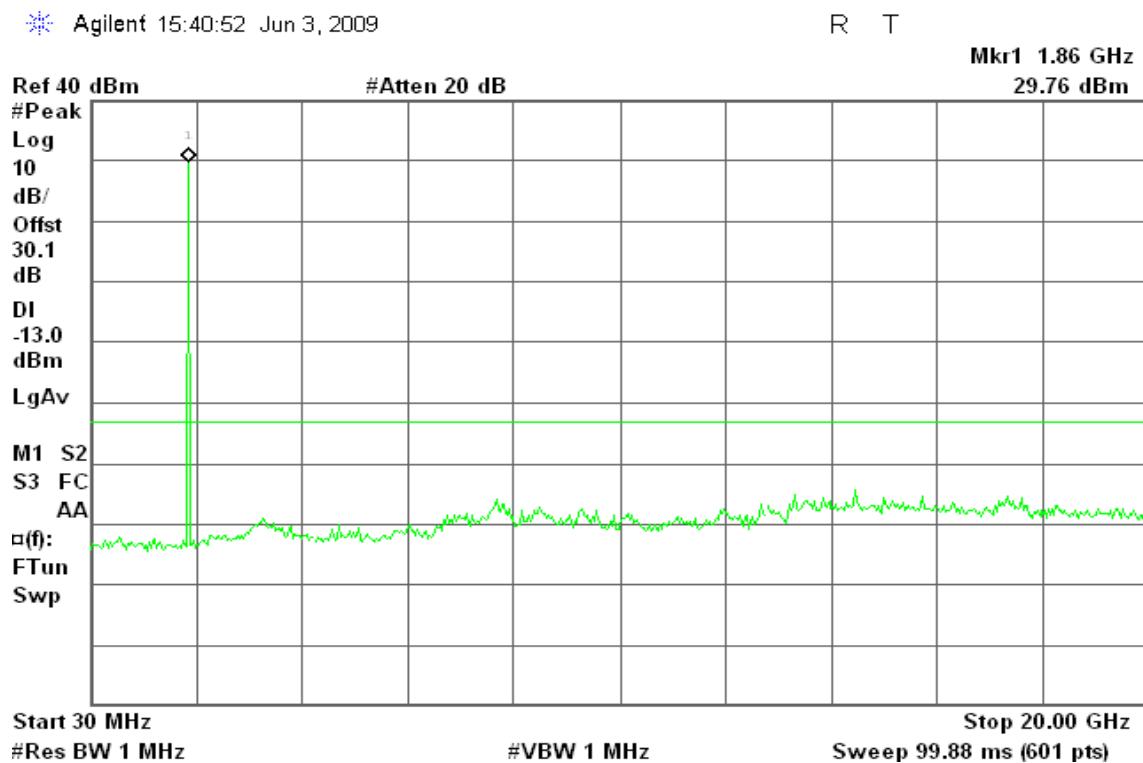


Figure 8-2: Out of Band emission at antenna terminals – GPRS CH Mid


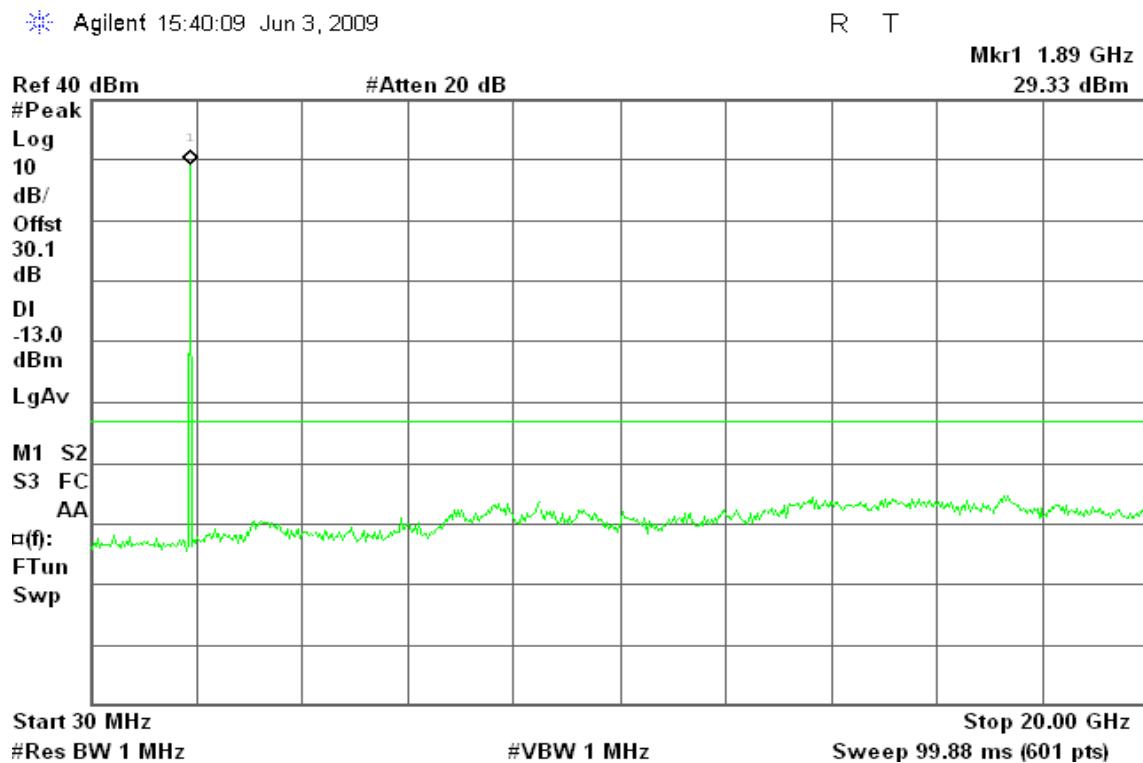


Figure 8-3: Out of Band emission at antenna terminals – GPRS CH High

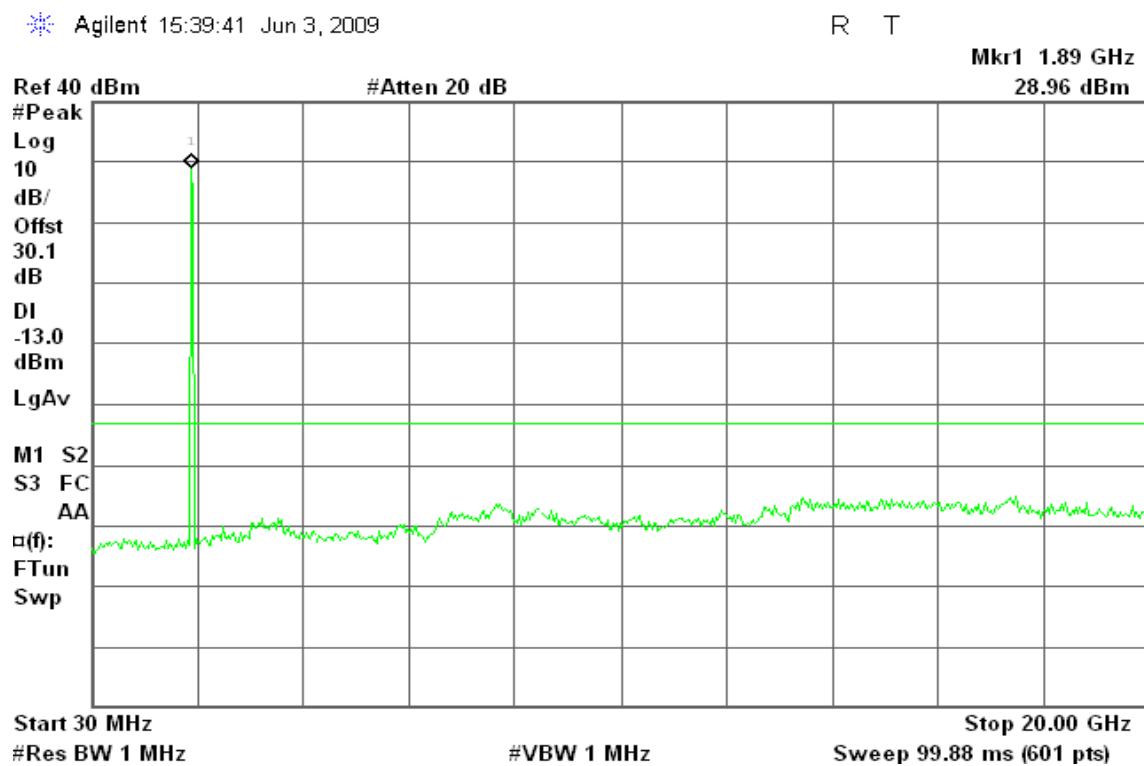

GPRS 850

Figure 9-1: Band Edge emissions – GPRS CH Low


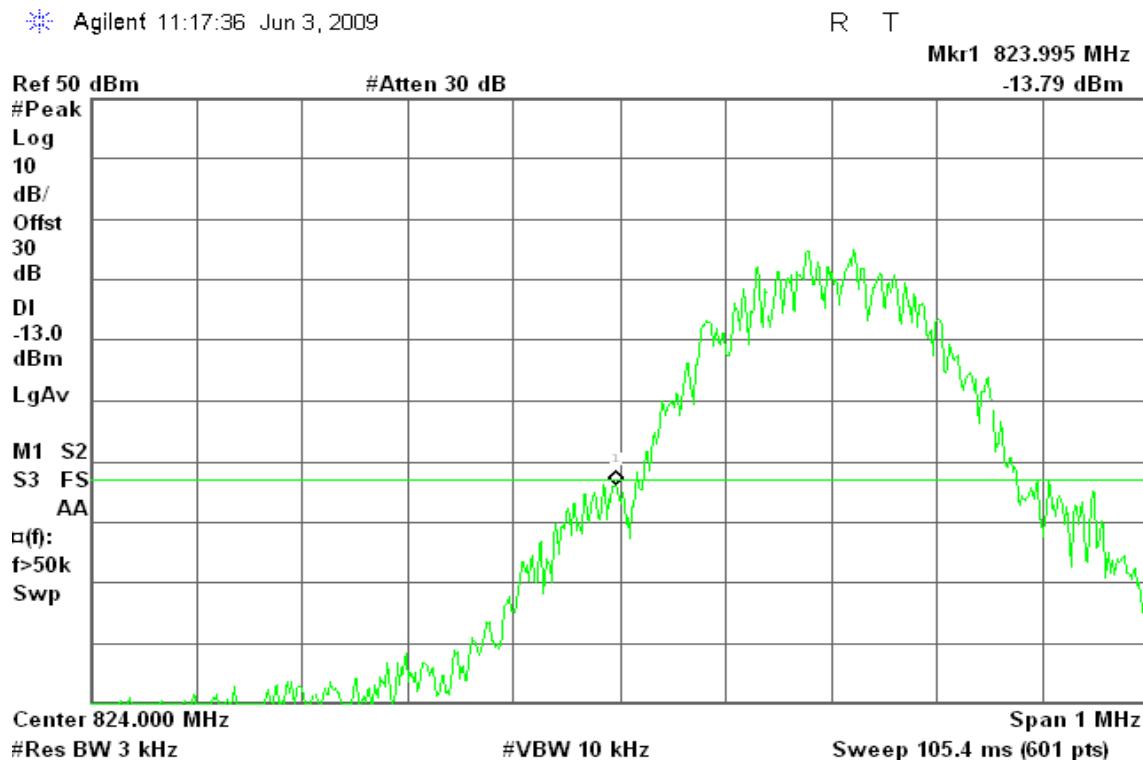


Figure 9-2: Band Edge emissions –GPRS CH High

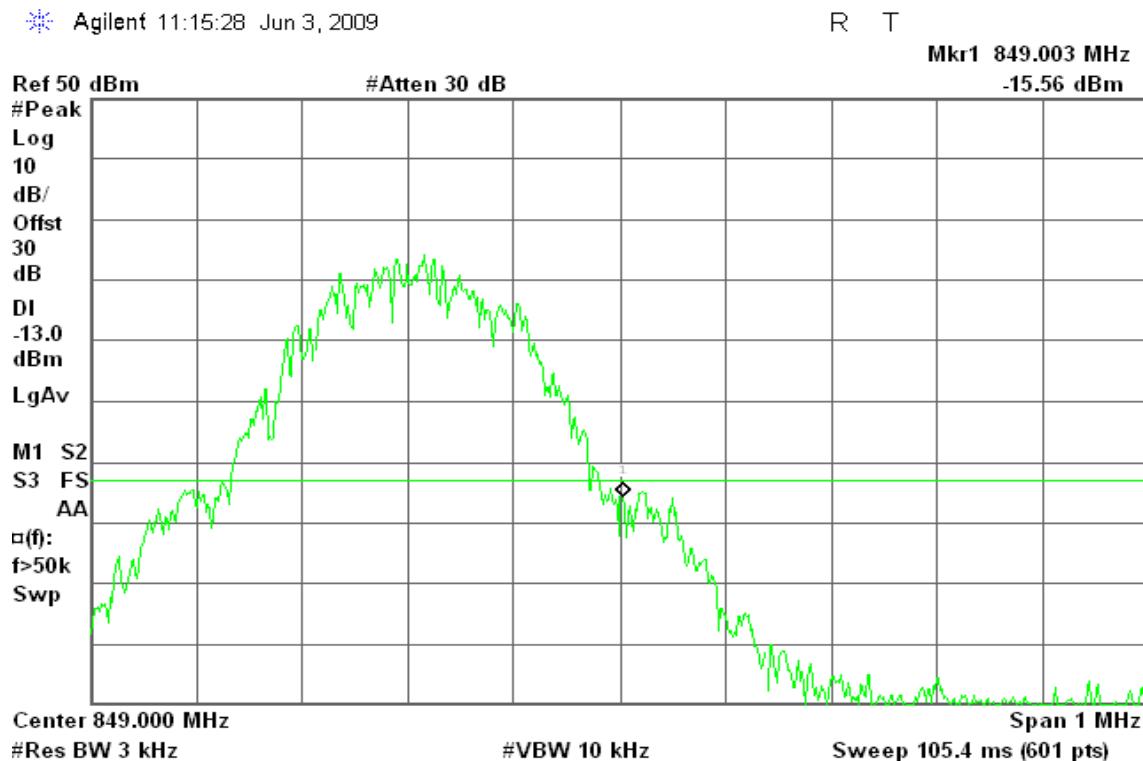

GPRS 1900

Figure 10-1: Band Edge emissions – GPRS CH Low


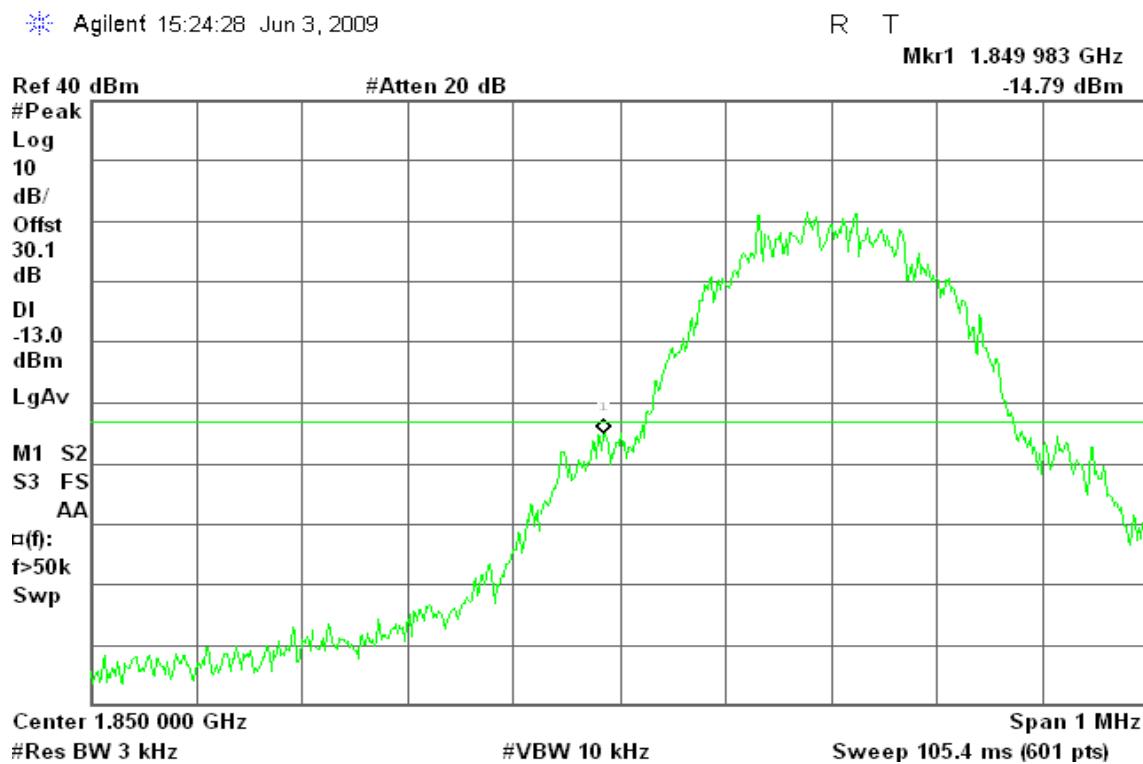


Figure 10-2: Band Edge emissions – GPRS CH High

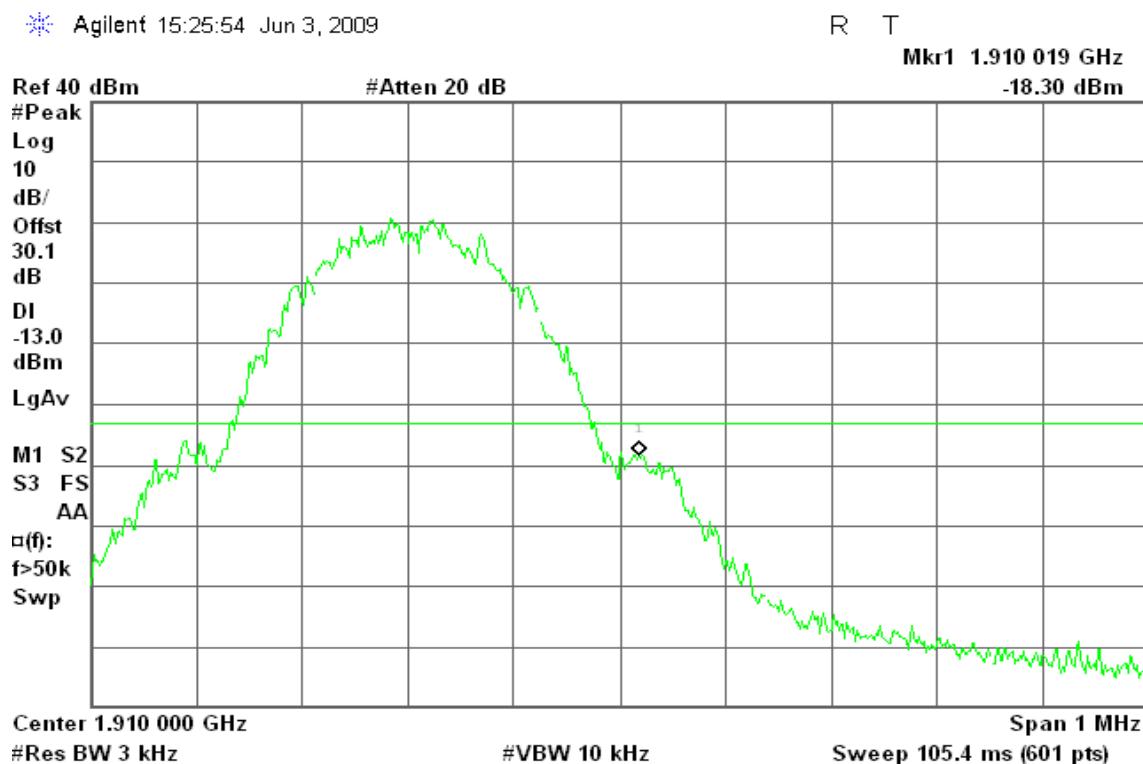


7.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

LIMIT


According to FCC §2.1053

Test Configuration


Below 1 GHz

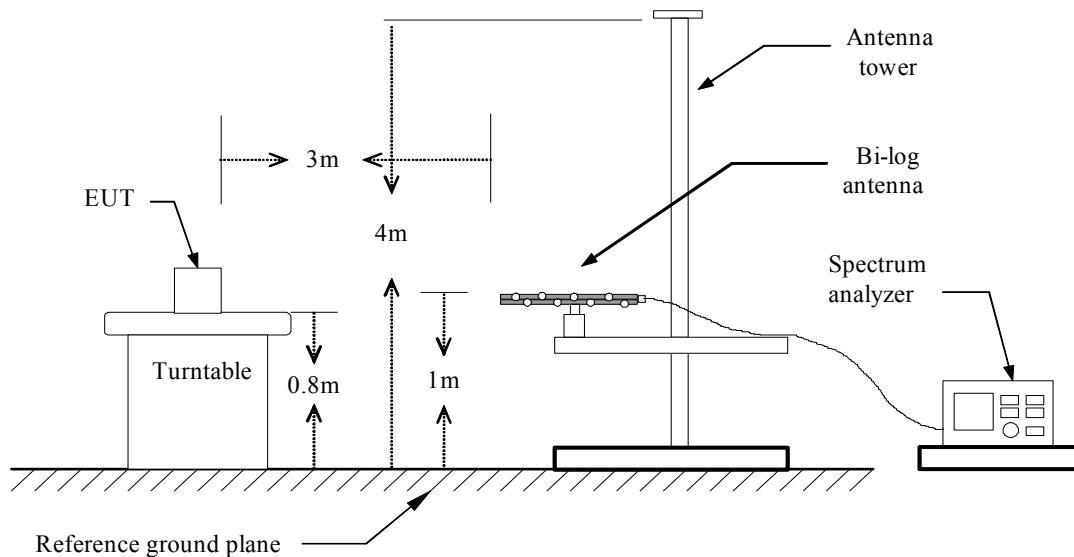

Above 1 GHz

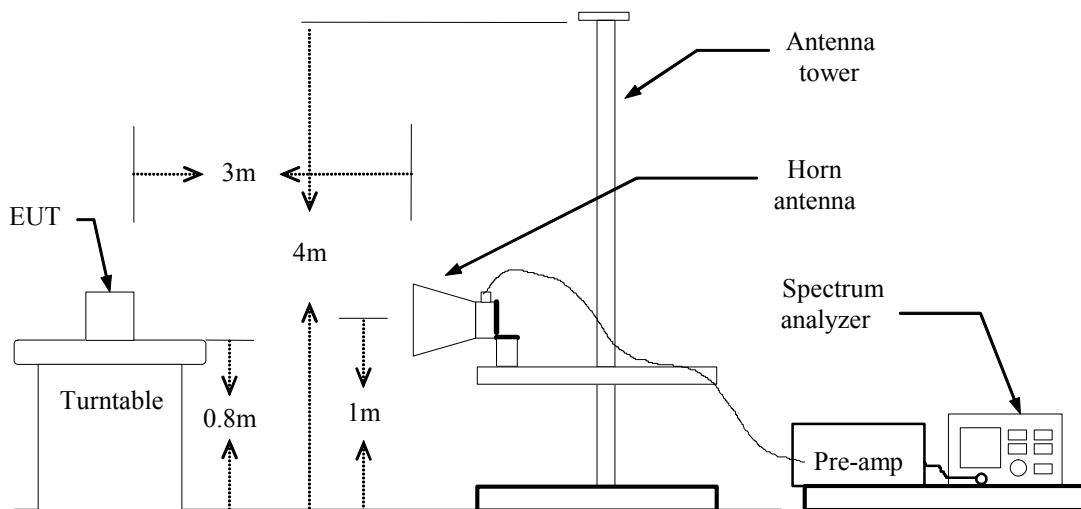

Substituted Method Test Set-up

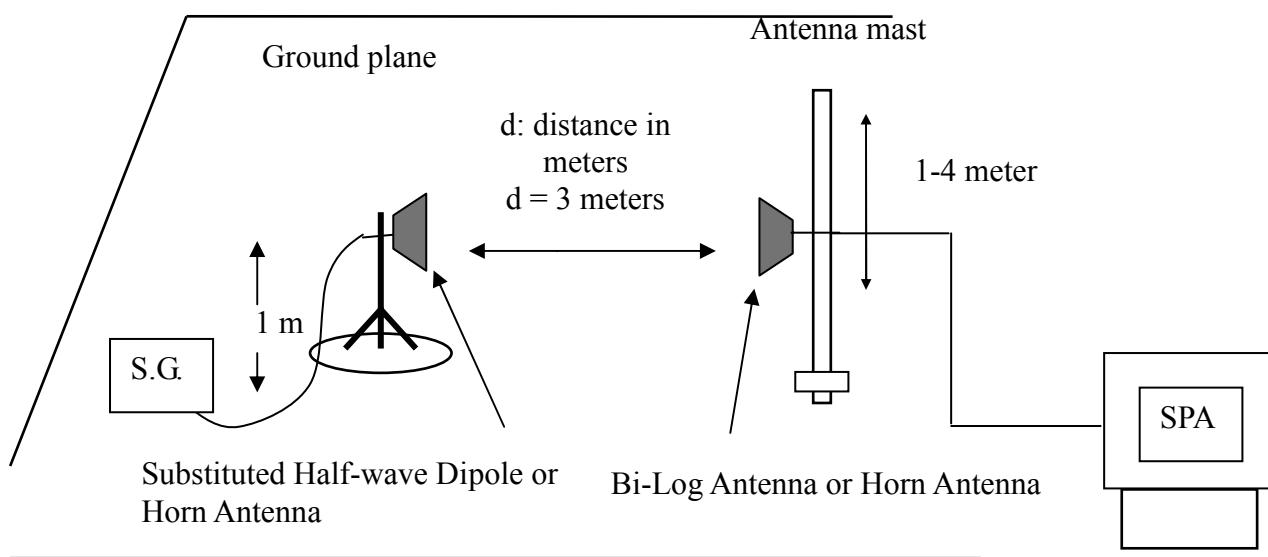

TEST PROCEDURE

The EUT was placed on a non-conductive, the measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

Refer to the attached tabular data sheets.

**Radiated Spurious Emission Measurement Result / Below 1GHz****Operation Mode:** GPRS 850 / TX / CH 128**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 48.43 | V | -37.55 | -15.03 | -52.58 | -13.00 | -39.58 |
| 149.31 | V | -46.78 | -11.90 | -58.68 | -13.00 | -45.68 |
| 288.02 | V | -41.96 | -11.51 | -53.47 | -13.00 | -40.47 |
| 398.60 | V | -41.16 | -10.68 | -51.84 | -13.00 | -38.84 |
| 454.86 | V | -48.69 | -9.00 | -57.69 | -13.00 | -44.69 |
| 532.46 | V | -57.05 | -7.51 | -64.56 | -13.00 | -51.56 |
| <hr/> | | | | | | |
| 48.43 | H | -42.56 | -13.62 | -56.18 | -13.00 | -43.18 |
| 151.25 | H | -45.00 | -12.98 | -57.98 | -13.00 | -44.98 |
| 288.02 | H | -51.66 | -11.93 | -63.60 | -13.00 | -50.60 |
| 397.63 | H | -44.89 | -10.55 | -55.45 | -13.00 | -42.45 |
| 453.89 | H | -40.74 | -8.99 | -49.73 | -13.00 | -36.73 |
| 520.82 | H | -57.80 | -7.81 | -65.61 | -13.00 | -52.61 |

Remark:

1. *The emission behaviour belongs to narrowband spurious emission.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.*

**Operation Mode:** GPRS 850 / TX / CH 190**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 48.43 | V | -37.61 | -15.03 | -52.64 | -13.00 | -39.64 |
| 150.28 | V | -46.50 | -11.94 | -58.44 | -13.00 | -45.44 |
| 288.02 | V | -41.80 | -11.51 | -53.32 | -13.00 | -40.32 |
| 336.52 | V | -42.33 | -12.72 | -55.05 | -13.00 | -42.05 |
| 398.60 | V | -41.10 | -10.68 | -51.77 | -13.00 | -38.77 |
| 454.86 | V | -48.19 | -9.00 | -57.19 | -13.00 | -44.19 |
| <hr/> | | | | | | |
| 48.43 | H | -43.22 | -13.62 | -56.84 | -13.00 | -43.84 |
| 152.22 | H | -44.80 | -13.03 | -57.84 | -13.00 | -44.84 |
| 399.57 | H | -44.99 | -10.46 | -55.45 | -13.00 | -42.45 |
| 454.86 | H | -40.58 | -8.97 | -49.56 | -13.00 | -36.56 |
| 532.46 | H | -53.81 | -7.77 | -61.58 | -13.00 | -48.58 |
| 663.41 | H | -59.99 | -5.92 | -65.92 | -13.00 | -52.92 |

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 850 / TX / CH 251**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 48.43 | V | -37.92 | -15.03 | -52.95 | -13.00 | -39.95 |
| 222.06 | V | -28.63 | -14.63 | -43.26 | -13.00 | -30.26 |
| 398.60 | V | -38.41 | -10.68 | -49.08 | -13.00 | -36.08 |
| 455.83 | V | -48.15 | -8.98 | -57.13 | -13.00 | -44.13 |
| 663.41 | V | -47.92 | -6.13 | -54.05 | -13.00 | -41.05 |
| 709.00 | V | -47.60 | -5.58 | -53.17 | -13.00 | -40.17 |
| <hr/> | | | | | | |
| 48.43 | H | -42.89 | -13.62 | -56.51 | -13.00 | -43.51 |
| 151.25 | H | -44.79 | -12.98 | -57.77 | -13.00 | -44.77 |
| 397.63 | H | -45.45 | -10.55 | -56.00 | -13.00 | -43.00 |
| 455.83 | H | -40.66 | -8.96 | -49.61 | -13.00 | -36.61 |
| 532.46 | H | -54.14 | -7.77 | -61.91 | -13.00 | -48.91 |
| 666.32 | H | -60.83 | -5.94 | -66.77 | -13.00 | -53.77 |

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 512**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 48.43 | V | -38.14 | -15.03 | -53.17 | -13.00 | -40.17 |
| 150.28 | V | -46.00 | -11.94 | -57.94 | -13.00 | -44.94 |
| 288.02 | V | -43.12 | -11.51 | -54.64 | -13.00 | -41.64 |
| 398.60 | V | -41.65 | -10.68 | -52.33 | -13.00 | -39.33 |
| 454.86 | V | -48.28 | -9.00 | -57.28 | -13.00 | -44.28 |
| 665.35 | V | -56.61 | -6.11 | -62.71 | -13.00 | -49.71 |
| <hr/> | | | | | | |
| 48.43 | H | -42.88 | -13.62 | -56.49 | -13.00 | -43.49 |
| 152.22 | H | -44.97 | -13.03 | -58.01 | -13.00 | -45.01 |
| 397.63 | H | -45.36 | -10.55 | -55.91 | -13.00 | -42.91 |
| 455.83 | H | -40.65 | -8.96 | -49.61 | -13.00 | -36.61 |
| 532.46 | H | -54.50 | -7.77 | -62.27 | -13.00 | -49.27 |
| 663.41 | H | -62.56 | -5.92 | -68.48 | -13.00 | -55.48 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 661**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 48.43 | V | -38.25 | -15.03 | -53.28 | -13.00 | -40.28 |
| 151.25 | V | -47.11 | -12.07 | -59.19 | -13.00 | -46.19 |
| 288.02 | V | -42.67 | -11.51 | -54.18 | -13.00 | -41.18 |
| 336.52 | V | -42.70 | -12.72 | -55.41 | -13.00 | -42.41 |
| 399.57 | V | -40.91 | -10.62 | -51.53 | -13.00 | -38.53 |
| 698.33 | V | -57.08 | -5.64 | -62.72 | -13.00 | -49.72 |
| <hr/> | | | | | | |
| 48.43 | H | -42.62 | -13.62 | -56.24 | -13.00 | -43.24 |
| 150.28 | H | -46.54 | -12.93 | -59.48 | -13.00 | -46.48 |
| 288.02 | H | -51.47 | -11.93 | -63.40 | -13.00 | -50.40 |
| 399.57 | H | -45.37 | -10.46 | -55.84 | -13.00 | -42.84 |
| 454.86 | H | -39.94 | -8.97 | -48.91 | -13.00 | -35.91 |
| 530.52 | H | -55.89 | -7.78 | -63.66 | -13.00 | -50.66 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 810**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 48.43 | V | -37.87 | -15.03 | -52.90 | -13.00 | -39.90 |
| 288.02 | V | -42.39 | -11.51 | -53.90 | -13.00 | -40.90 |
| 336.52 | V | -42.03 | -12.72 | -54.75 | -13.00 | -41.75 |
| 399.57 | V | -47.03 | -10.62 | -57.65 | -13.00 | -44.65 |
| 454.86 | V | -48.02 | -9.00 | -57.03 | -13.00 | -44.03 |
| 662.44 | V | -60.61 | -6.15 | -66.76 | -13.00 | -53.76 |
| <hr/> | | | | | | |
| 48.43 | H | -42.68 | -13.62 | -56.30 | -13.00 | -43.30 |
| 151.25 | H | -46.74 | -12.98 | -59.72 | -13.00 | -46.72 |
| 288.02 | H | -50.50 | -11.93 | -62.44 | -13.00 | -49.44 |
| 384.05 | H | -48.14 | -11.21 | -59.35 | -13.00 | -46.35 |
| 454.86 | H | -41.71 | -8.97 | -50.68 | -13.00 | -37.68 |
| 531.49 | H | -54.30 | -7.77 | -62.07 | -13.00 | -49.07 |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Above 1GHz****Operation Mode:** GPRS 850 / TX / CH 128**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization | Reading level (dBuV) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------|----------------------|------------------------|----------------------|-------------|-------------|
| 1651.00 | V | -52.98 | 1.63 | -51.35 | -13.00 | -38.35 |
| 1994.00 | V | -54.12 | 1.78 | -52.34 | -13.00 | -39.34 |
| 2470.00 | V | -57.43 | 4.75 | -52.68 | -13.00 | -39.68 |
| 5767.00 | V | -50.55 | 8.29 | -42.26 | -13.00 | -29.26 |
| N/A | | | | | | |
| | | | | | | |
| 1392.00 | H | -52.53 | 1.08 | -51.45 | -13.00 | -38.45 |
| 1651.00 | H | -49.74 | 1.63 | -48.10 | -13.00 | -35.10 |
| 1994.00 | H | -52.74 | 1.96 | -50.78 | -13.00 | -37.78 |
| 2470.00 | H | -57.97 | 4.74 | -53.23 | -13.00 | -40.23 |
| 2792.00 | H | -59.39 | 5.31 | -54.08 | -13.00 | -41.08 |
| N/A | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 850 / TX / CH 190**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization | Reading level (dBuV) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------|----------------------|------------------------|----------------------|-------------|-------------|
| 1392.00 | V | -55.38 | 1.12 | -54.26 | -13.00 | -41.26 |
| 1672.00 | V | -53.81 | 1.64 | -52.18 | -13.00 | -39.18 |
| 1861.00 | V | -53.86 | 1.72 | -52.14 | -13.00 | -39.14 |
| 1994.00 | V | -53.89 | 1.78 | -52.11 | -13.00 | -39.11 |
| 3191.00 | V | -60.35 | 6.13 | -54.22 | -13.00 | -41.22 |
| N/A | | | | | | |
| 1392.00 | H | -52.94 | 1.08 | -51.85 | -13.00 | -38.85 |
| 1672.00 | H | -54.26 | 1.66 | -52.60 | -13.00 | -39.60 |
| 1994.00 | H | -53.17 | 1.96 | -51.21 | -13.00 | -38.21 |
| 2799.00 | H | -60.63 | 5.32 | -55.31 | -13.00 | -42.31 |
| N/A | | | | | | |
| | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 850 / TX / CH 251**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization | Reading level (dBuV) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------|----------------------|------------------------|----------------------|-------------|-------------|
| 1392.00 | V | -54.42 | 1.12 | -53.31 | -13.00 | -40.31 |
| 1595.00 | V | -55.49 | 1.60 | -53.89 | -13.00 | -40.89 |
| 1994.00 | V | -53.16 | 1.78 | -51.38 | -13.00 | -38.38 |
| 2547.00 | V | -57.17 | 5.02 | -52.15 | -13.00 | -39.15 |
| 3191.00 | V | -61.20 | 6.13 | -55.08 | -13.00 | -42.08 |
| N/A | | | | | | |
| 1392.00 | H | -52.79 | 1.08 | -51.71 | -13.00 | -38.71 |
| 1994.00 | H | -52.83 | 1.96 | -50.87 | -13.00 | -37.87 |
| 2547.00 | H | -58.46 | 4.98 | -53.48 | -13.00 | -40.48 |
| N/A | | | | | | |
| | | | | | | |
| | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 512**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 2785.00 | V | -57.92 | 5.42 | -52.50 | -13.00 | -39.50 |
| 3702.00 | V | -59.66 | 7.57 | -52.09 | -13.00 | -39.09 |
| 5550.00 | V | -45.50 | 8.19 | -37.31 | -13.00 | -24.31 |
| 7405.00 | V | -60.05 | 13.42 | -46.63 | -13.00 | -33.63 |
| N/A | | | | | | |
| | | | | | | |
| 2792.00 | H | -57.73 | 5.31 | -52.42 | -13.00 | -39.42 |
| 3702.00 | H | -53.70 | 6.71 | -46.99 | -13.00 | -33.99 |
| 5550.00 | H | -47.80 | 10.21 | -37.60 | -13.00 | -24.60 |
| N/A | | | | | | |
| | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 661**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 2792.00 | V | -59.91 | 5.43 | -54.48 | -13.00 | -41.48 |
| 3758.00 | V | -60.41 | 7.81 | -52.59 | -13.00 | -39.59 |
| 5641.00 | V | -51.71 | 8.23 | -43.48 | -13.00 | -30.48 |
| 7517.00 | V | -60.67 | 13.62 | -47.06 | -13.00 | -34.06 |
| N/A | | | | | | |
| | | | | | | |
| 3758.00 | H | -59.89 | 6.83 | -53.07 | -13.00 | -40.07 |
| 5641.00 | H | -52.09 | 9.93 | -42.16 | -13.00 | -29.16 |
| N/A | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 810**Test Date:** June 1, 2009**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Antenna Polarization (V/H) | Reading (dBm) | Correction Factor (dB) | Emission level (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|---------------|------------------------|----------------------|-------------|-------------|
| 3821.00 | V | -61.78 | 8.09 | -53.69 | -13.00 | -40.69 |
| 5732.00 | V | -50.06 | 8.27 | -41.79 | -13.00 | -28.79 |
| 7643.00 | V | -60.05 | 13.81 | -46.24 | -13.00 | -33.24 |
| N/A | | | | | | |
| | | | | | | |
| | | | | | | |
| 3821.00 | H | -61.31 | 6.95 | -54.36 | -13.00 | -41.36 |
| 5732.00 | H | -50.84 | 9.65 | -41.19 | -13.00 | -28.19 |
| 7643.00 | H | -62.42 | 13.97 | -48.44 | -13.00 | -35.44 |
| N/A | | | | | | |
| | | | | | | |
| | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.


7.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

LIMIT

According to FCC §2.1055, FCC §22.355, FCC §24.235.

Frequency Tolerance: 2.5 ppm

Test Configuration

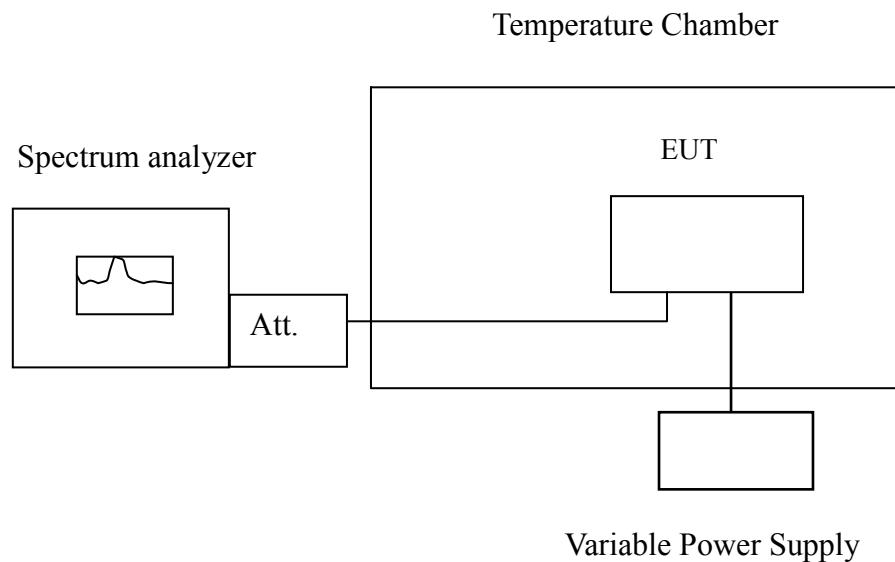

Remark: Measurement setup for testing on Antenna connector



TEST PROCEDURE

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST RESULTS

No non-compliance noted.

| Reference Frequency: GPRS Mid Channel 836.6 MHz @ 20°C | | | | |
|--|---------------------------------|-------------------|---------------|---------------|
| Limit: +/- 2.5 ppm = 2090 Hz | | | | |
| Power Supply Vac | Environment Temperature (°C) | Frequency (Hz) | Delta (Hz) | Limit (Hz) |
| 3.7 | 50 | 83600013 | 29 | 2090 |
| | 40 | 83600006 | 22 | |
| | 30 | 83599995 | 11 | |
| | 20 | 83599984 | 0 | |
| | 10 | 83600005 | 21 | |
| | 0 | 83600007 | 23 | |
| | -10 | 83599991 | 7 | |
| | -20 | 83599995 | 11 | |
| | -30 | 83599999 | 15 | |


| Reference Frequency: GPRS Mid Channel 1880 MHz @ 20°C | | | | |
|---|---------------------------------|-------------------|---------------|---------------|
| Limit: +/- 2.5 ppm = 4700 Hz | | | | |
| Power Supply Vac | Environment Temperature (°C) | Frequency (Hz) | Delta (Hz) | Limit (Hz) |
| 120 | 50 | 1880000009 | 24 | 4700 |
| | 40 | 1879999995 | 10 | |
| | 30 | 1880000000 | 15 | |
| | 20 | 1879999985 | 0 | |
| | 10 | 1880000006 | 21 | |
| | 0 | 1879999992 | 7 | |
| | -10 | 1879999996 | 11 | |
| | -20 | 1880000005 | 20 | |
| | -30 | 1879999986 | 1 | |

7.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

LIMIT

According to FCC §2.1055, FCC §22.355, FCC §24.235,

Test Configuration

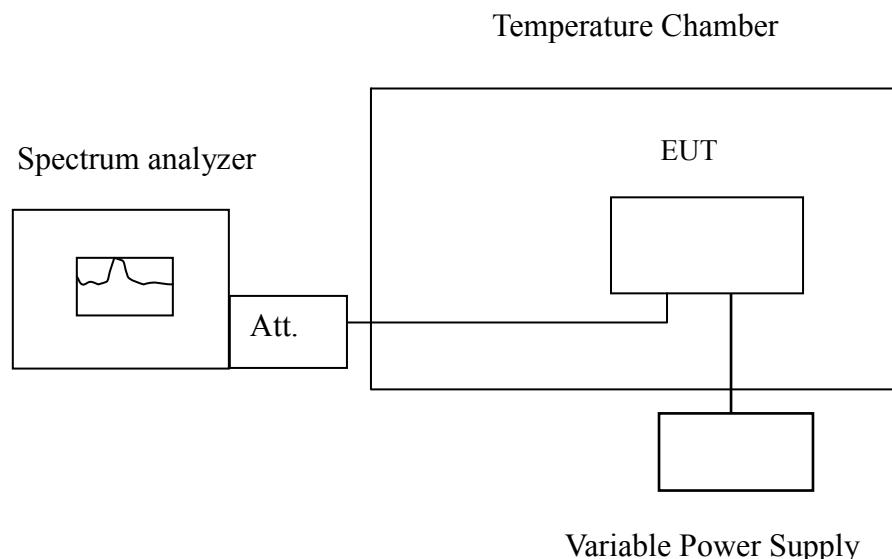

Remark: Measurement setup for testing on Antenna connector.



TEST PROCEDURE

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

No non-compliance noted.

| Reference Frequency: GPRS Mid Channel 836.6 MHz @ 20°C | | | | |
|---|---------------------------------|-------------------|---------------|---------------|
| Limit: ± 2.5 ppm = 2090Hz | | | | |
| Power Supply Vac | Environment Temperature (°C) | Frequency (Hz) | Delta (Hz) | Limit (Hz) |
| 4.255 | 20 | 83599988 | 4 | 2090 |
| 3.7 | | 83599984 | 0 | |
| 3.145 | | 83599992 | 8 | |

| Reference Frequency: GPRS Mid Channel 1880 MHz @ 20°C | | | | |
|--|---------------------------------|-------------------|---------------|---------------|
| Limit: +/- 2.5 ppm = 4700 Hz | | | | |
| Power Supply Vac | Environment Temperature (°C) | Frequency (Hz) | Delta (Hz) | Limit (Hz) |
| 4.255 | 20 | 1879999979 | -6 | 4700 |
| 3.7 | | 1879999985 | 0 | |
| 3.145 | | 1879999980 | -5 | |



7.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

Not applicable, because EUT does not connect to AC Main Source direct.



APPENDIX I

RADIO FREQUENCY EXPOSURE

LIMIT

EUT Specification

| | |
|-----------------------------------|--|
| EUT | Mobile Data Acquisition |
| Frequency band (Operating) | <input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others: GPRS 850MHz: 824 ~ 849 MHz |
| Device category | <input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others |
| Exposure classification | <input type="checkbox"/> Occupational/Controlled exposure ($S = 5\text{mW/cm}^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S=1\text{mW/cm}^2$) |
| Antenna diversity | <input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity |
| Max. output power | ERP: 10.22 dBm (10.52mW) |
| Antenna gain (Max) | 2.3dBi(Numeric gain: 1.70) |
| Evaluation applied | <input checked="" type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A |

Remark:

1. The maximum output power is 10.22dBm (10.52mW) at 848.80MHz (with 1.70 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm^2 even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.

**Calculation**

$$\text{Given } E = \frac{\sqrt{30 \times P \times G}}{d} \quad \& \quad S = \frac{E^2}{3770}$$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = d(\text{m}) / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

Maximum Permissible Exposure

EUT output power = 10.52mW

Numeric Antenna gain = 1.70

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

\Rightarrow Power density = 0.0036 mW / cm²

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)

**EUT Specification**

| | |
|-----------------------------------|--|
| EUT | Mobile Data Acquisition |
| Frequency band (Operating) | <input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.725GHz ~ 5.850GHz <input type="checkbox"/> WLAN: 5.15GHz ~ 5.35GHz <input checked="" type="checkbox"/> Others: 1850 ~ 1910 MHz |
| Device category | <input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others |
| Exposure classification | <input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²) |
| Antenna diversity | <input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity |
| Max. output power | ERP: 19.20 dBm (83.18mW) |
| Antenna gain (Max) | 3.1dBi(Numeric gain: 2.04) |
| Evaluation applied | <input checked="" type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A |

Remark:

1. The maximum output power is 19.20 dBm(83.18mW) at 1850.20MHz (with 2.04 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.

**Calculation**

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

Maximum Permissible Exposure

EUT output power = 83.18mW

Numeric Antenna gain = 2.04

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²


$$\rightarrow \text{Power density} = 0.0338 \text{ mW / cm}^2$$

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)

APPENDIX II

PHOTOGRAPHS OF TEST SETUP

Conducted Emission Set Up Photo

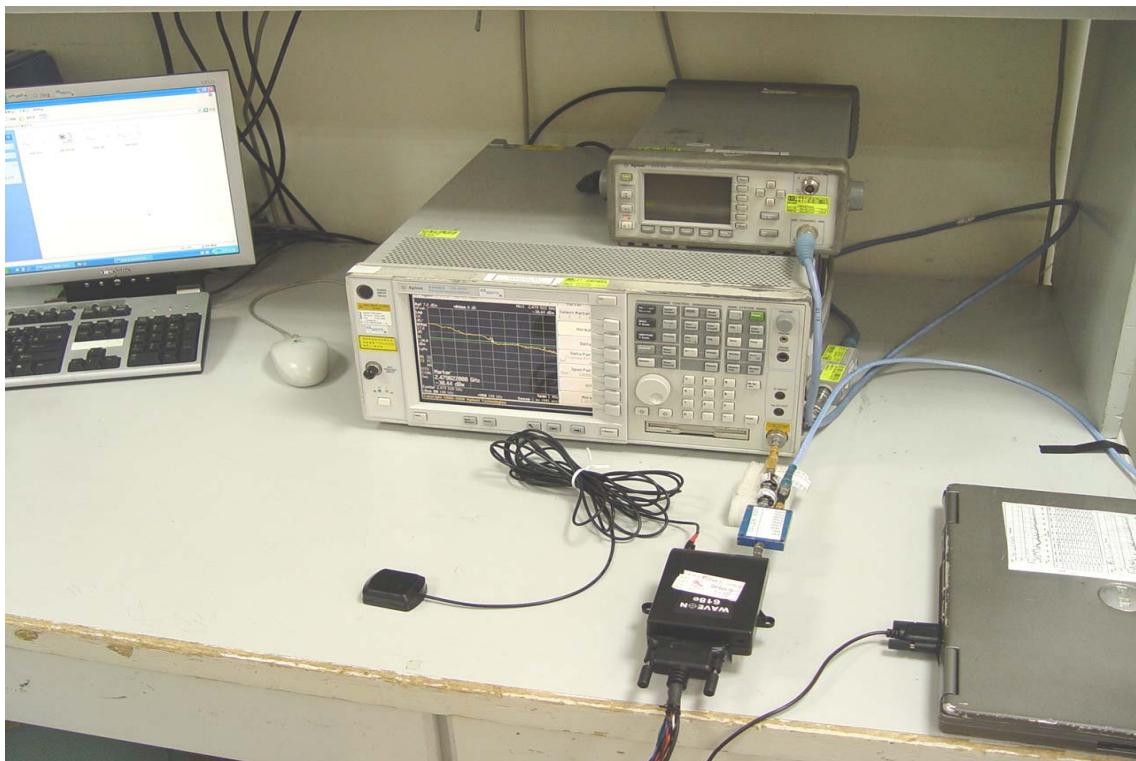

Radiated Emission Set up Photos

