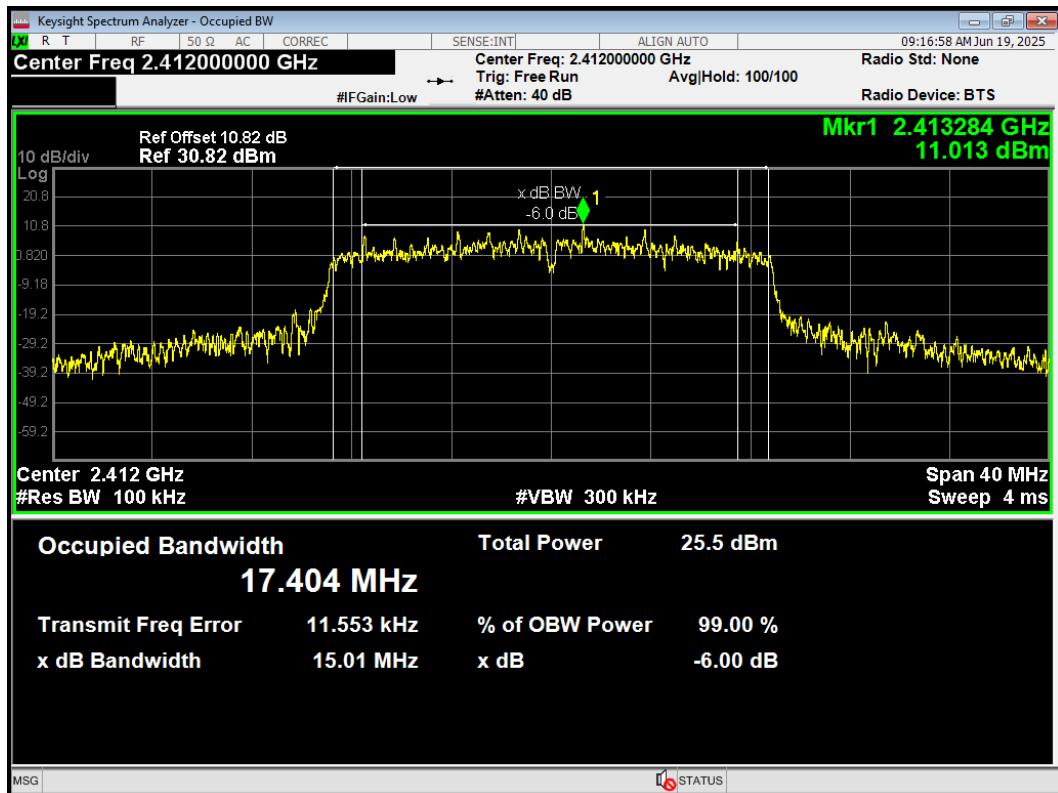
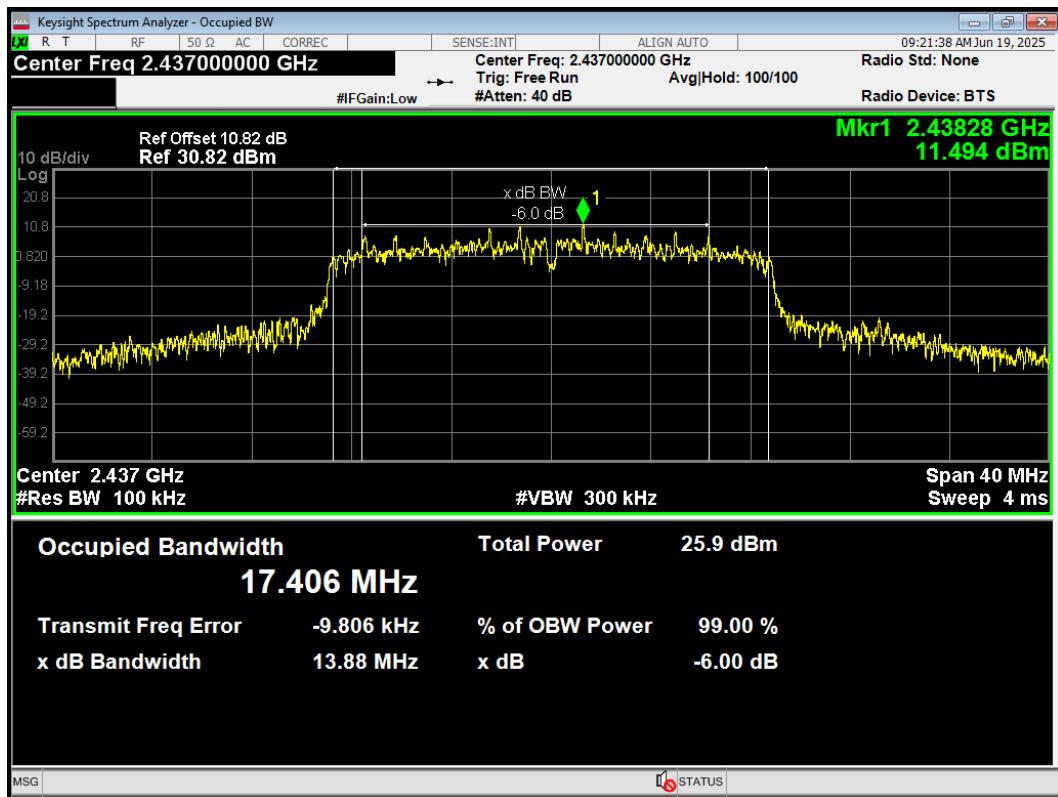
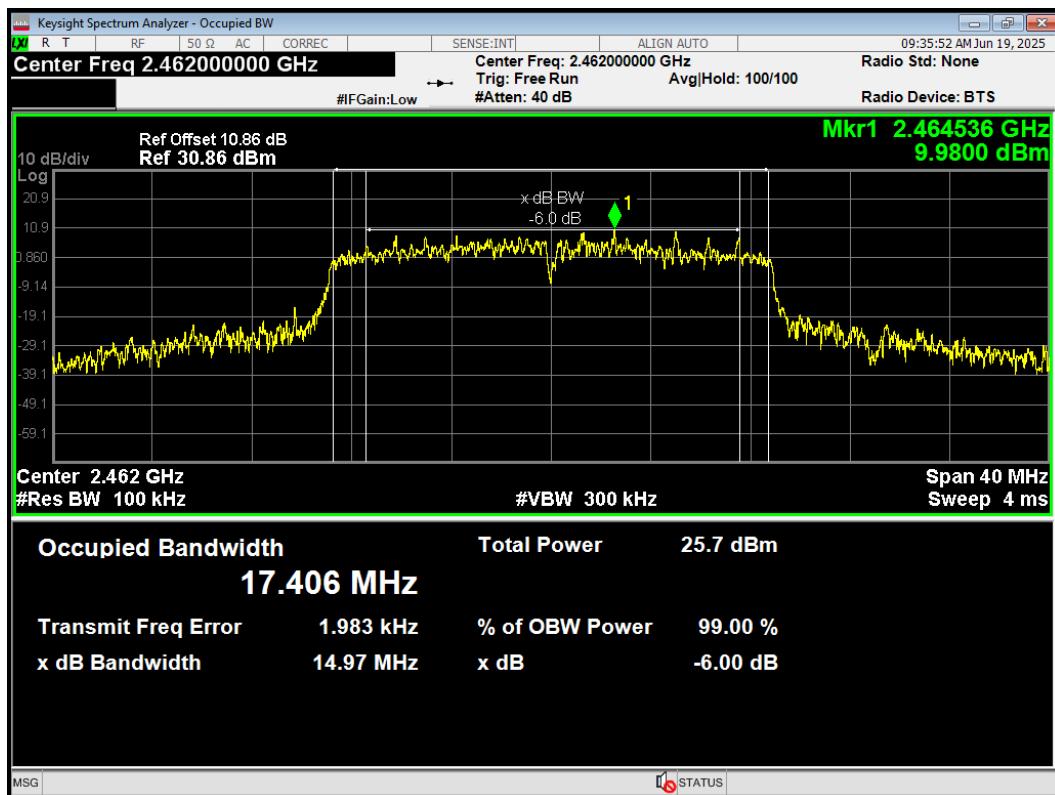
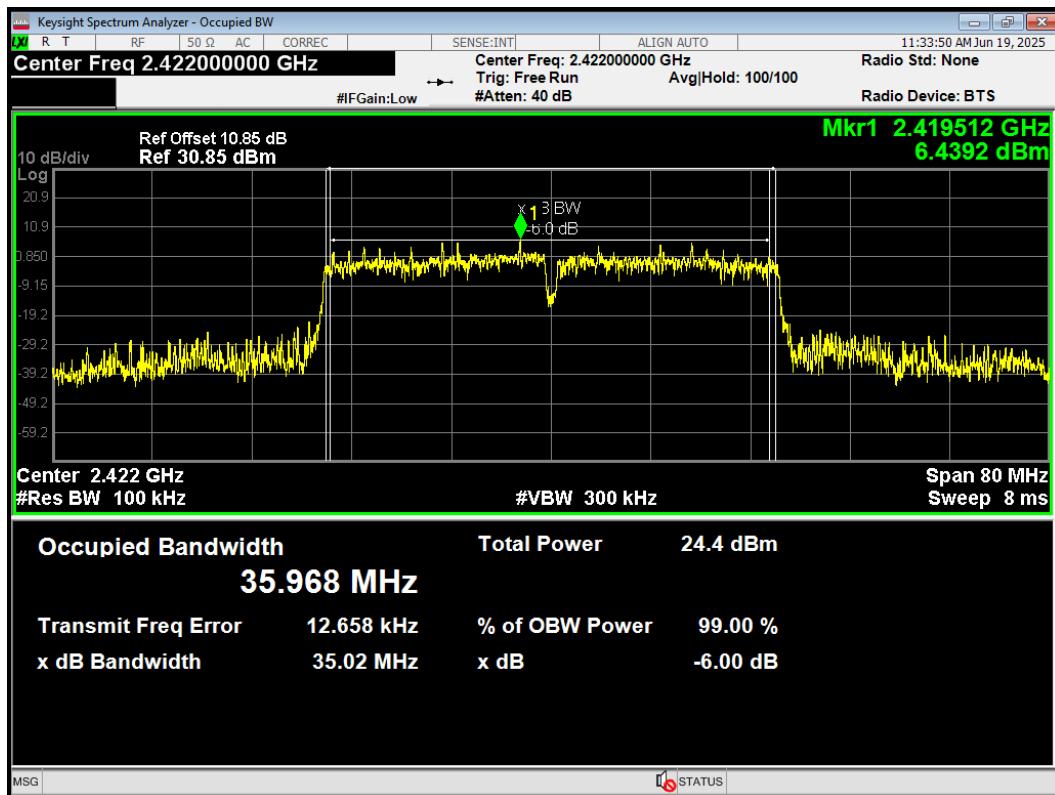
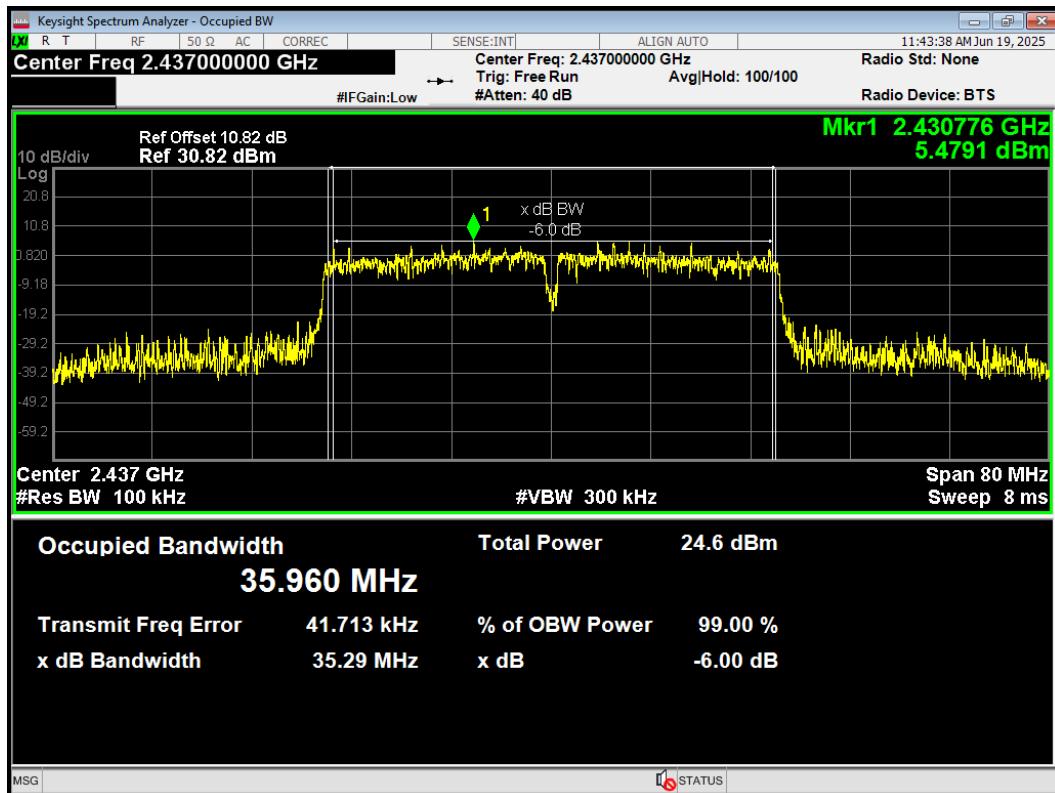



-6dB Bandwidth 802.11n(HT20) 2412MHz

-6dB Bandwidth 802.11n(HT20) 2437MHz


-6dB Bandwidth 802.11n(HT20) 2462MHz

-6dB Bandwidth 802.11n(HT40) 2422MHz


-6dB Bandwidth 802.11n(HT40) 2437MHz

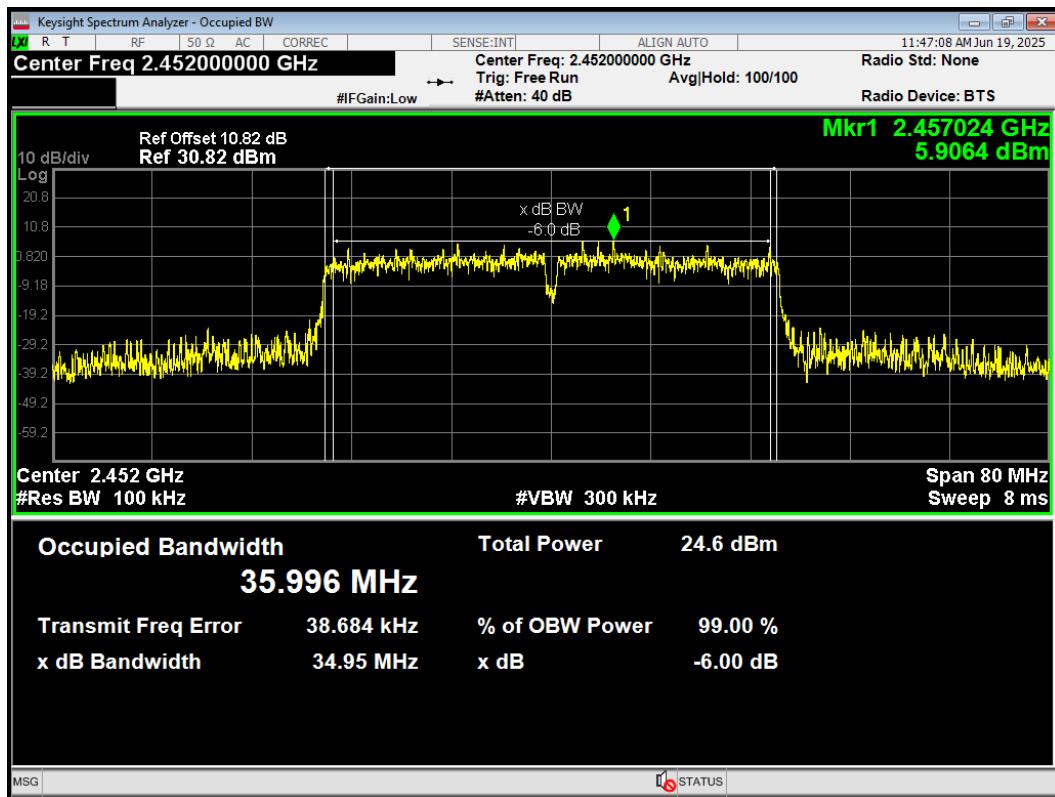


-6dB Bandwidth 802.11n(HT40) 2452MHz




ERSU Mode


-6dB Bandwidth 802.11ax HE20 242-Tones 2412MHz

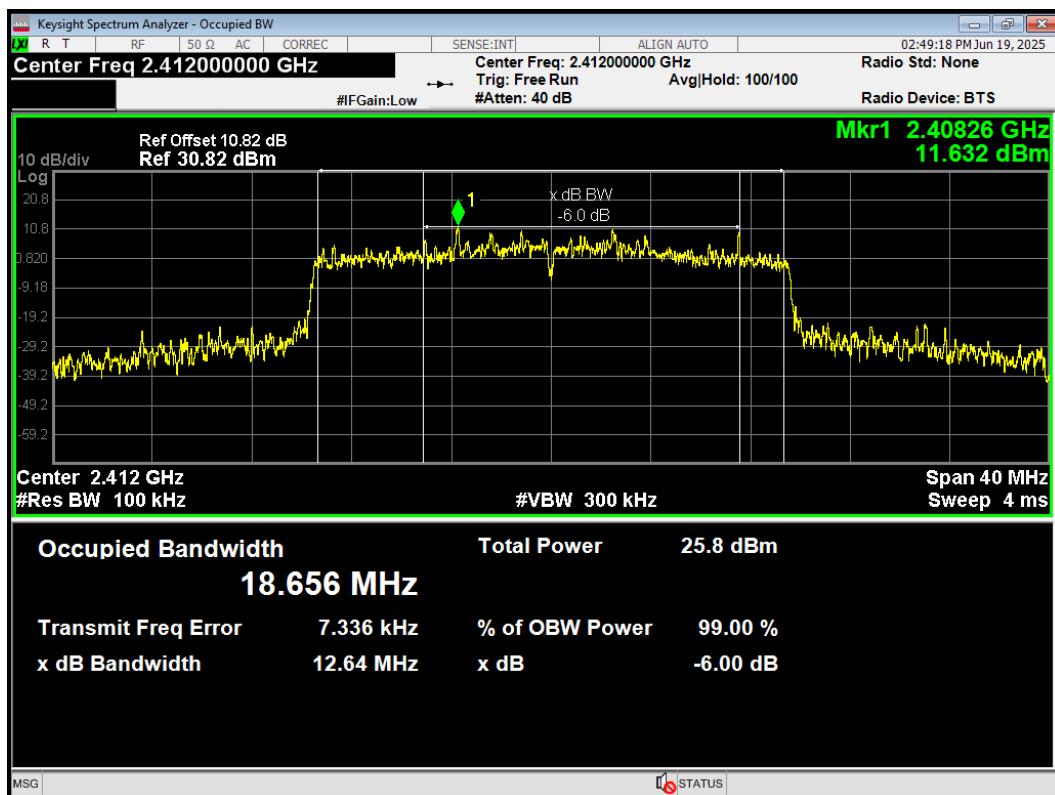

-6dB Bandwidth 802.11ax HE20 242-Tones 2437MHz

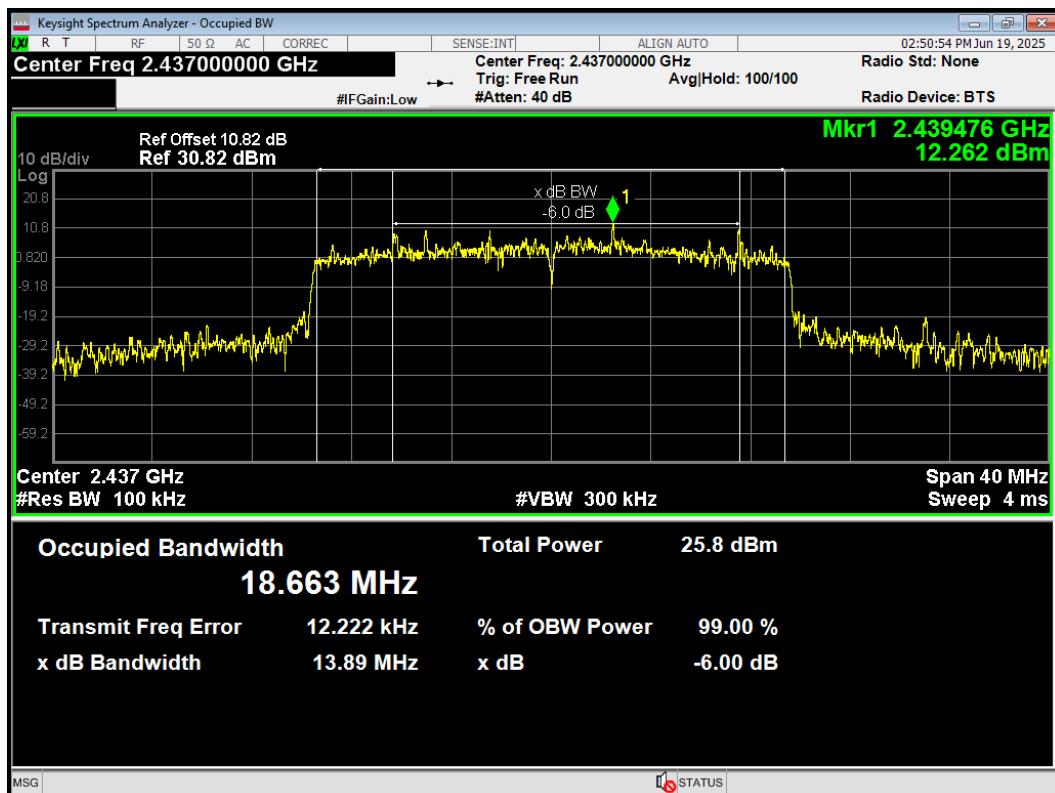

-6dB Bandwidth 802.11ax HE20 242-Tones 2462MHz

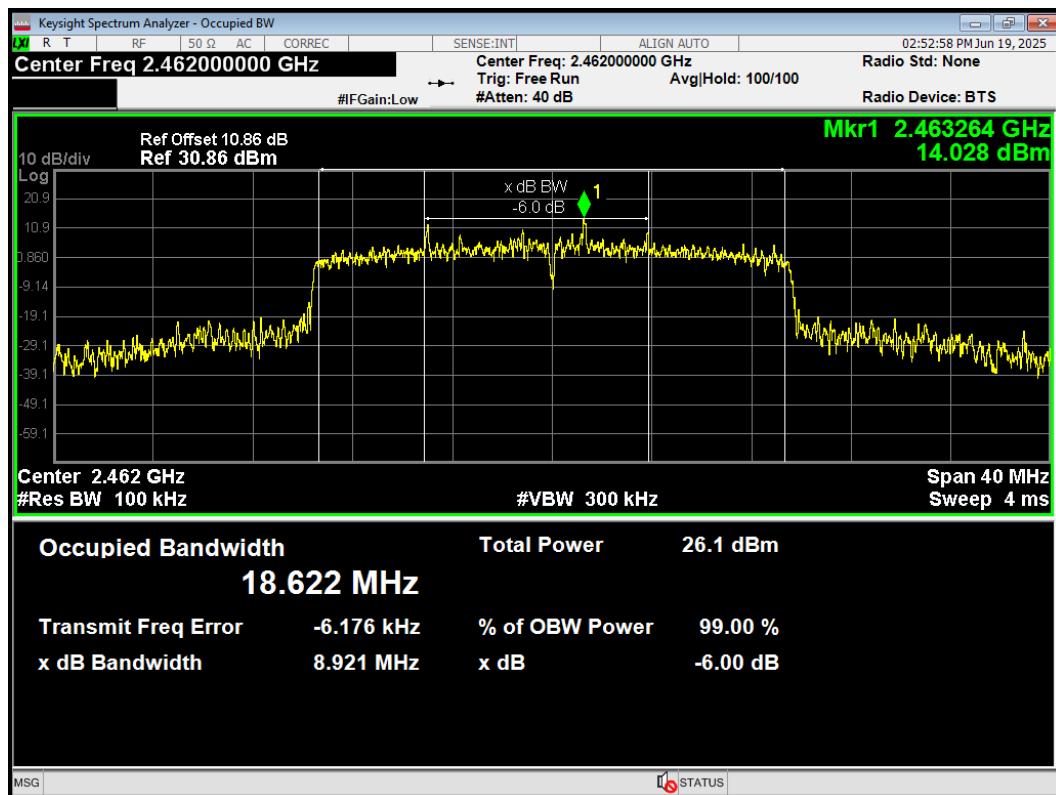

5.3. Band Edge


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB


Test Results: PASS

Bluetooth LE


Band Edge BLE (1M) 2402MHz Ref

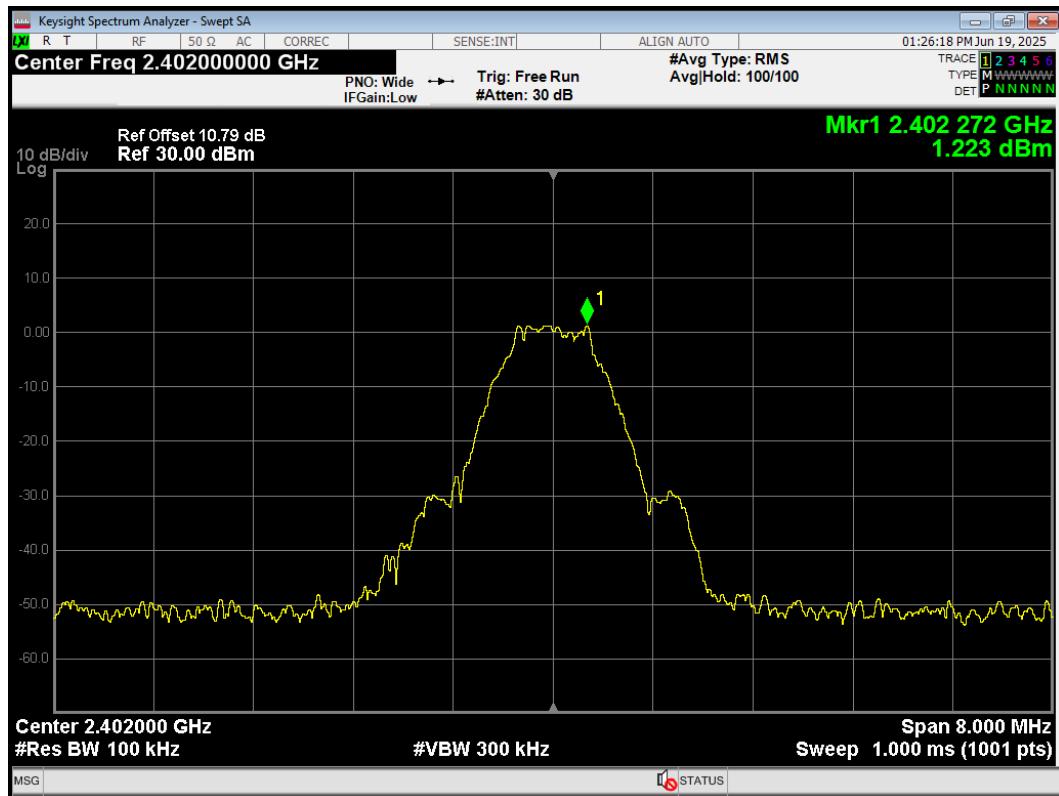


Band Edge BLE (1M) 2402MHz Emission

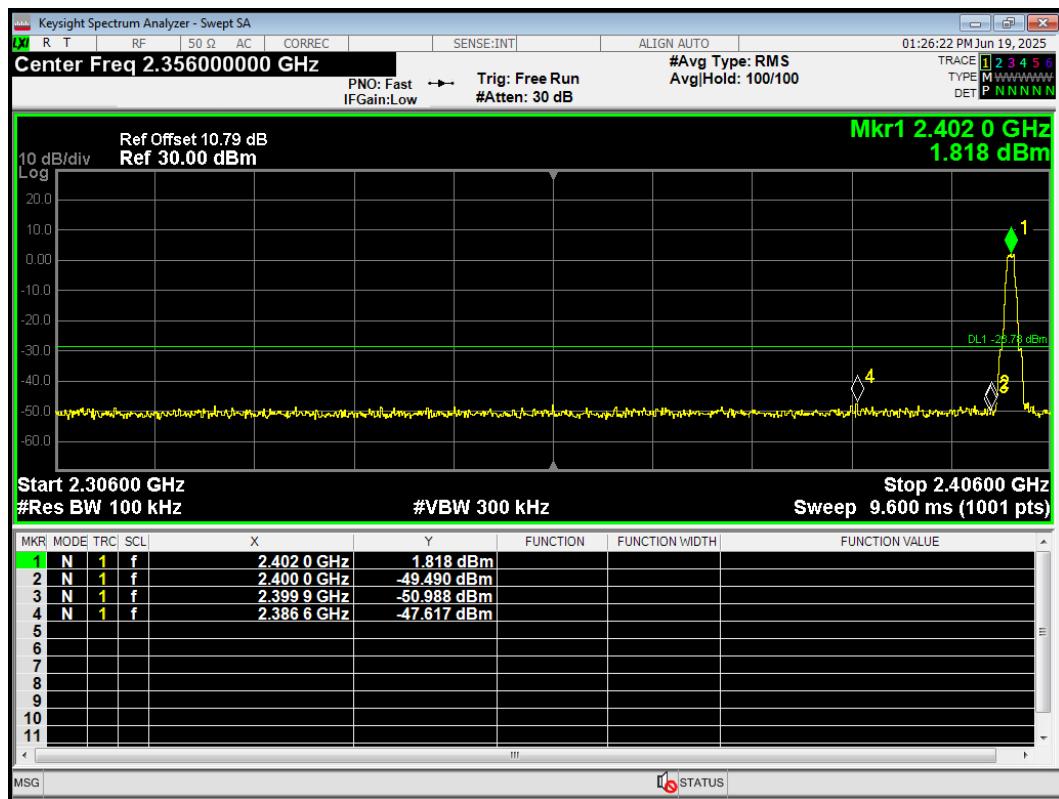

Band Edge BLE (1M) 2480MHz Ref

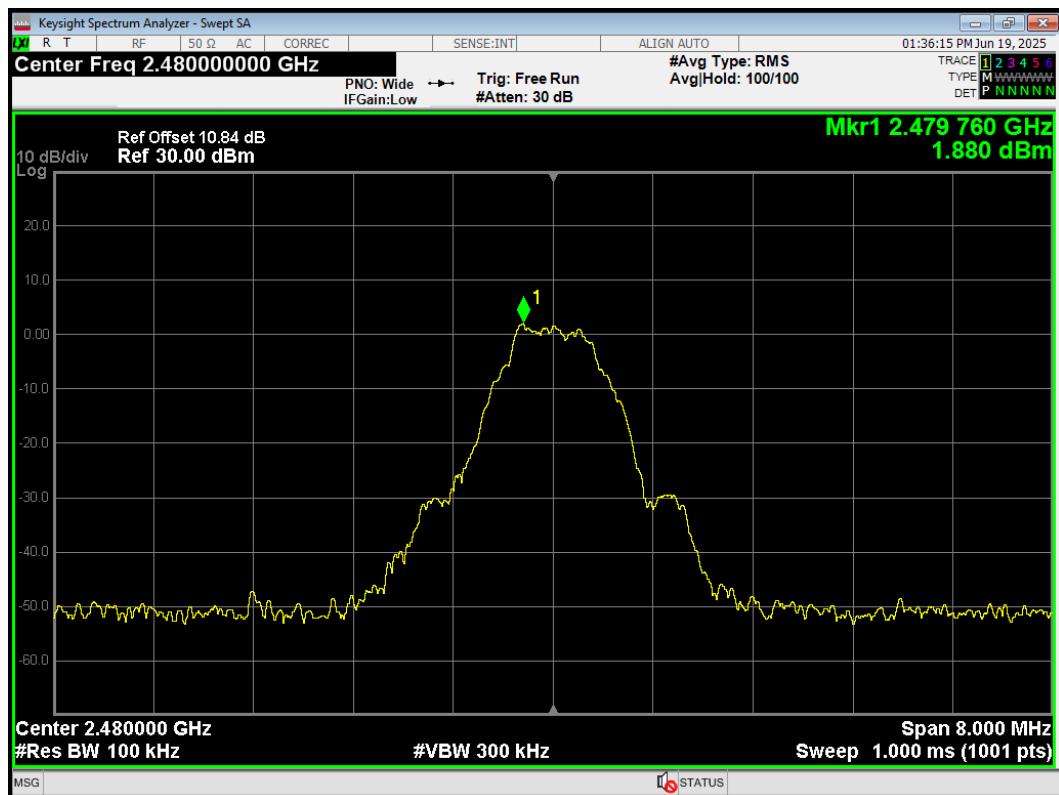


Band Edge BLE (1M) 2480MHz Emission

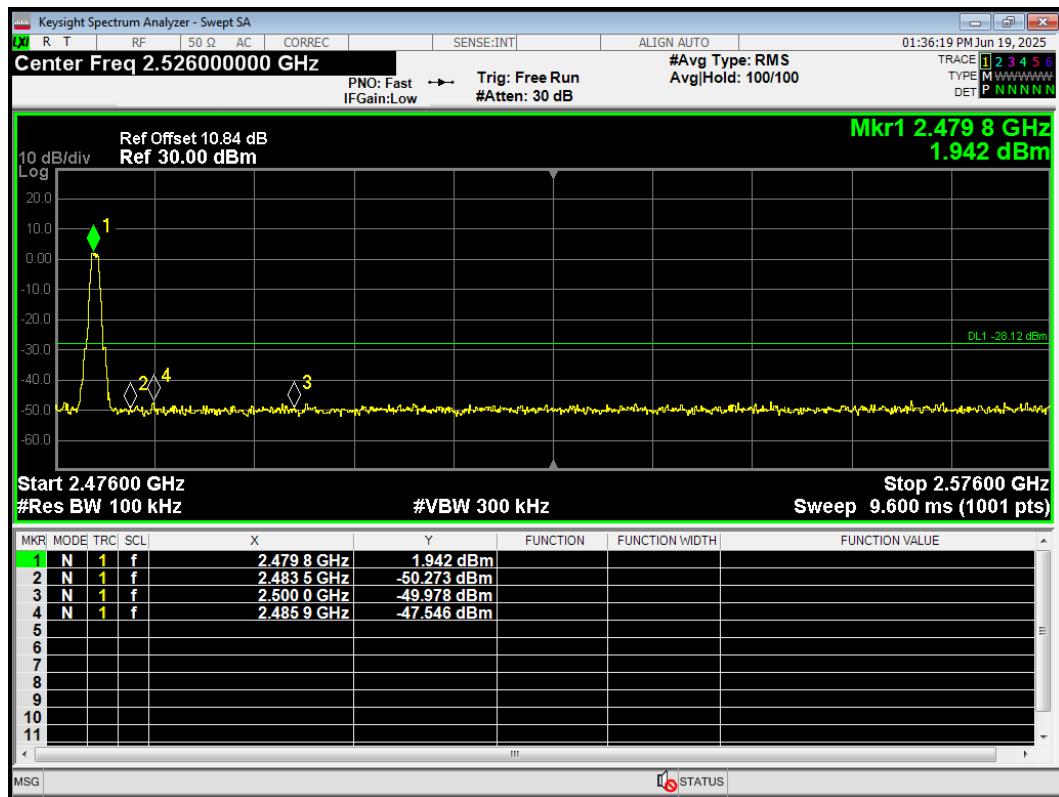


Band Edge BLE (2M) 2402MHz Ref



Band Edge BLE (2M) 2402MHz Emission

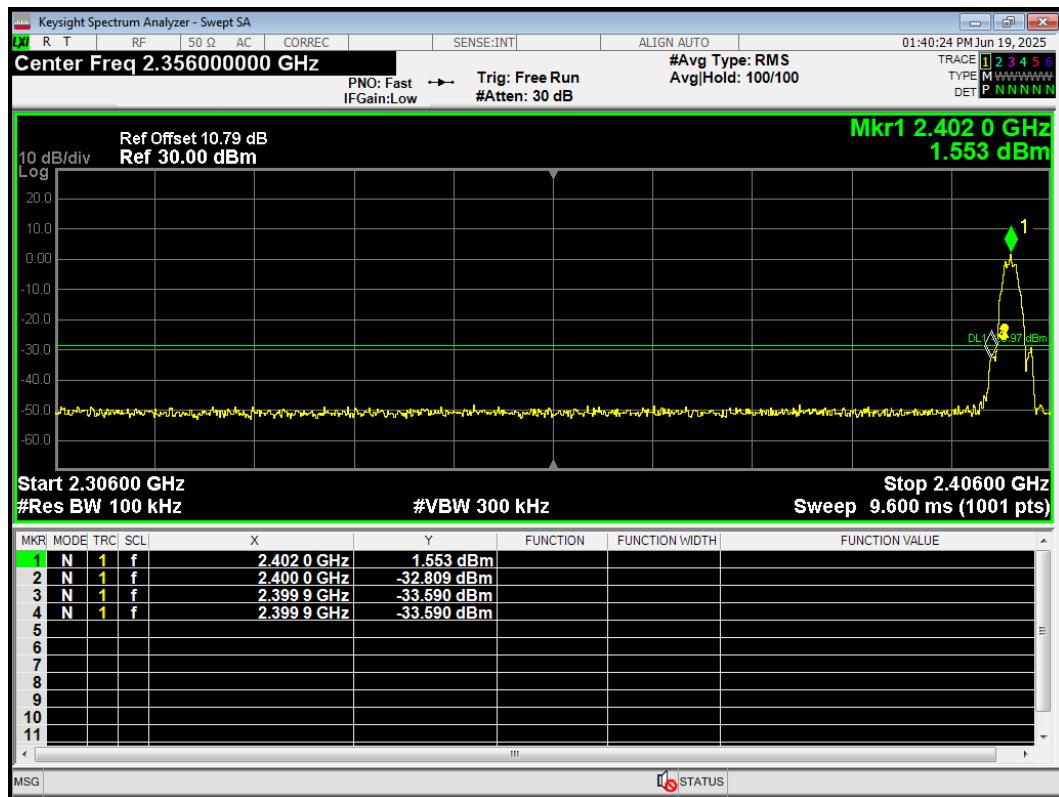


Band Edge BLE (2M) 2480MHz Ref

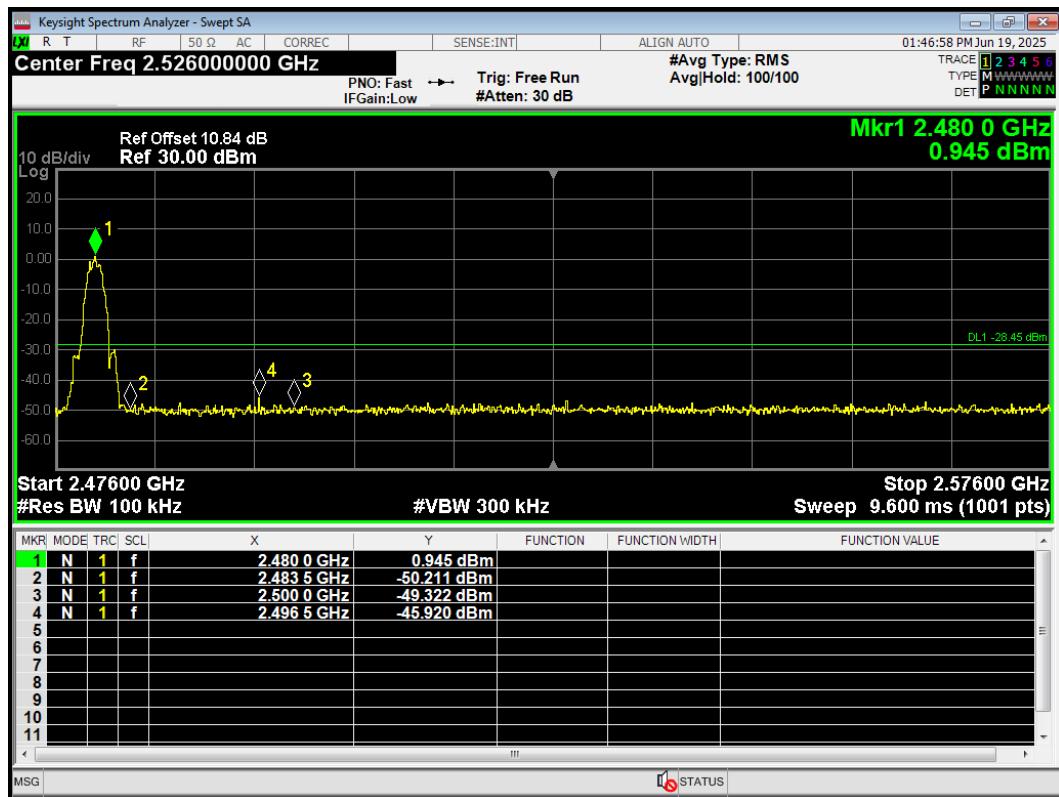
Band Edge BLE (2M) 2480MHz Emission


SU Mode


Band Edge 802.11ax(HE20) 2412MHz Ref

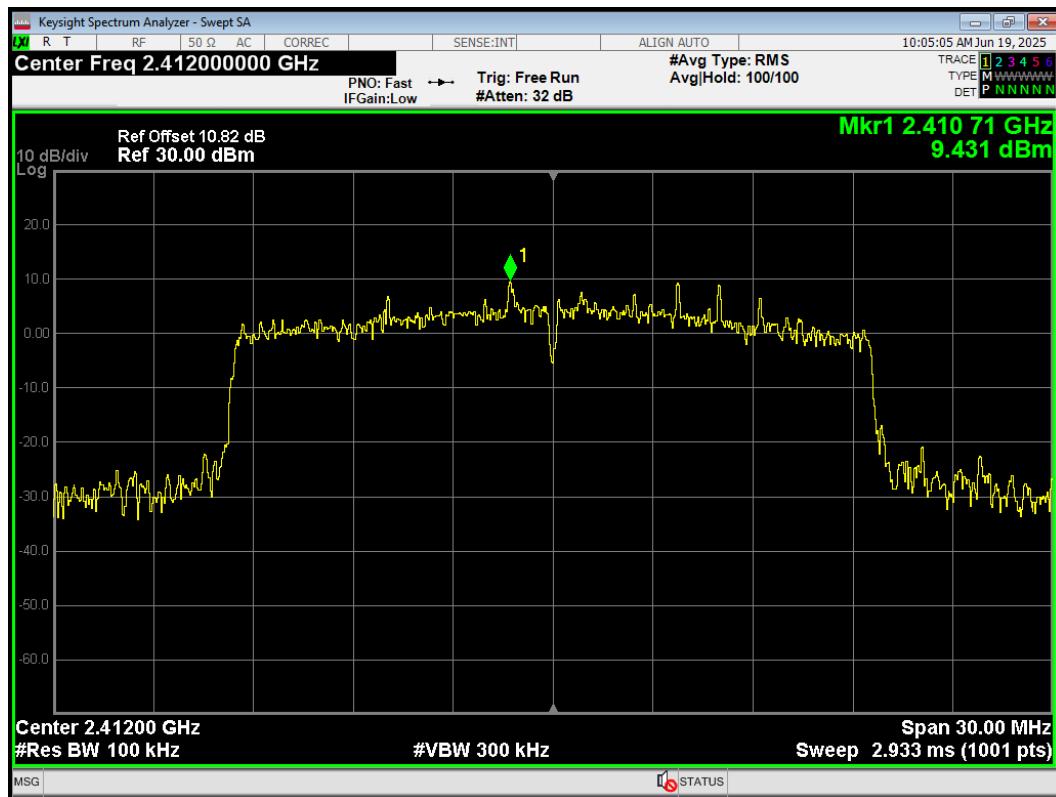

Band Edge 802.11ax(HE20) 2412MHz Emission

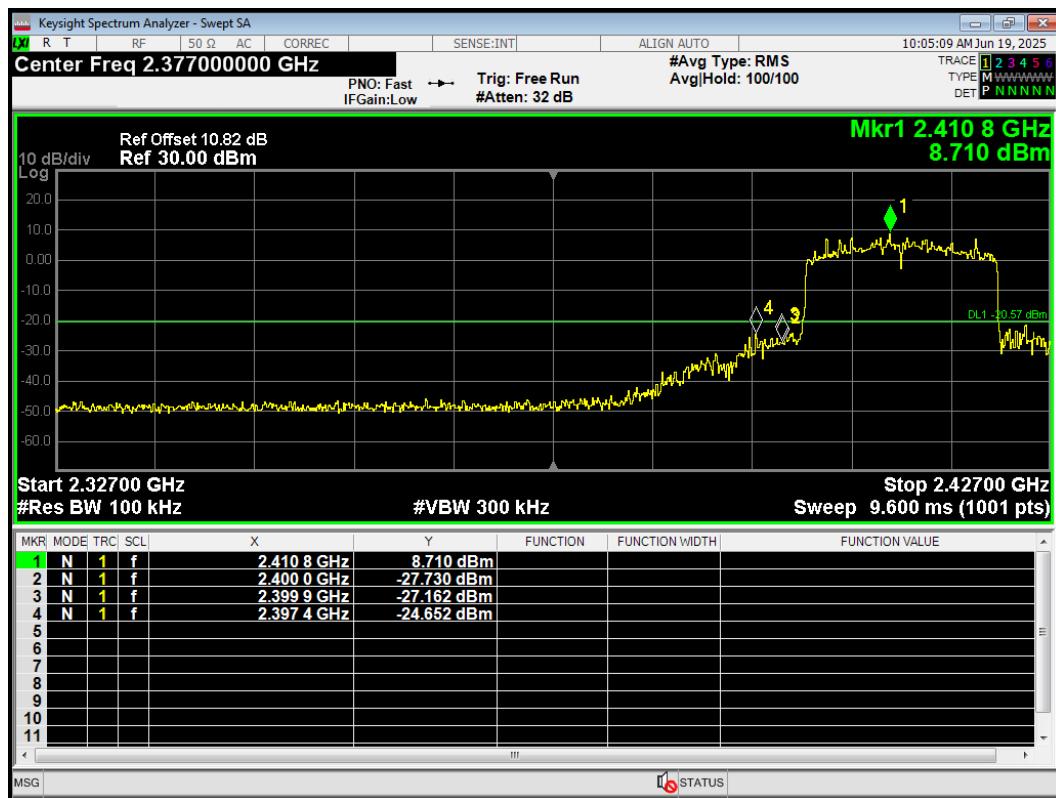


Band Edge 802.11ax(HE20) 2462MHz Ref

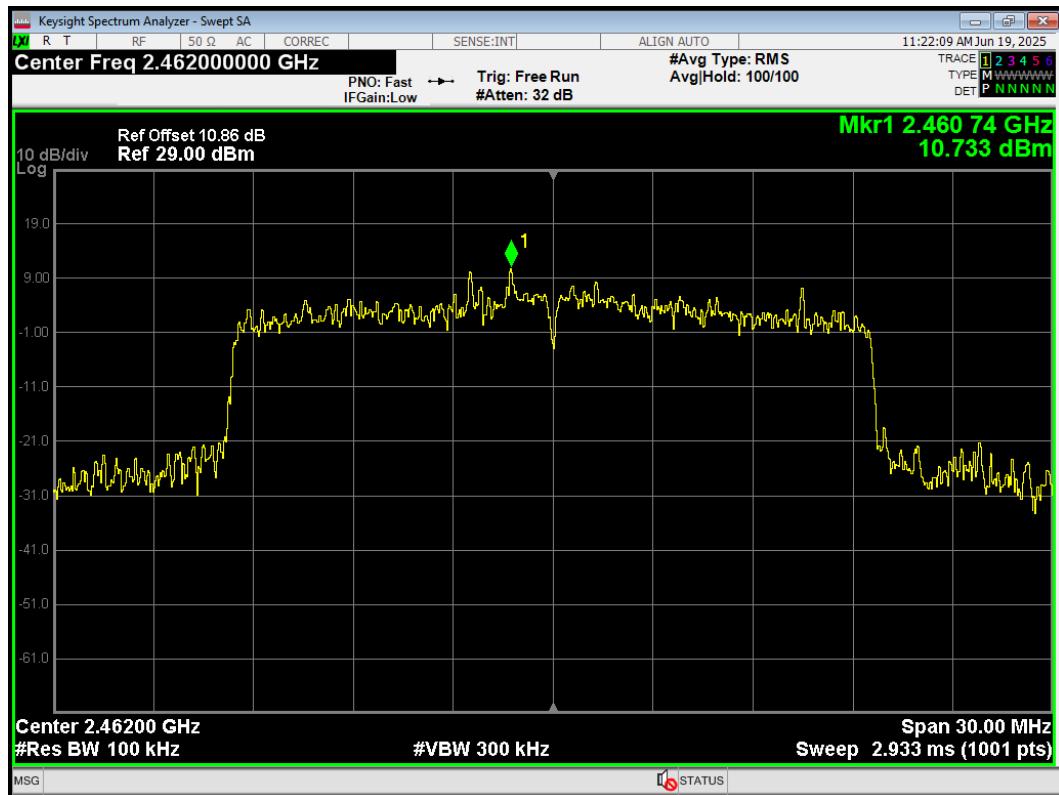


Band Edge 802.11ax(HE20) 2462MHz Emission




Band Edge 802.11ax(HE40) 2422MHz Ref

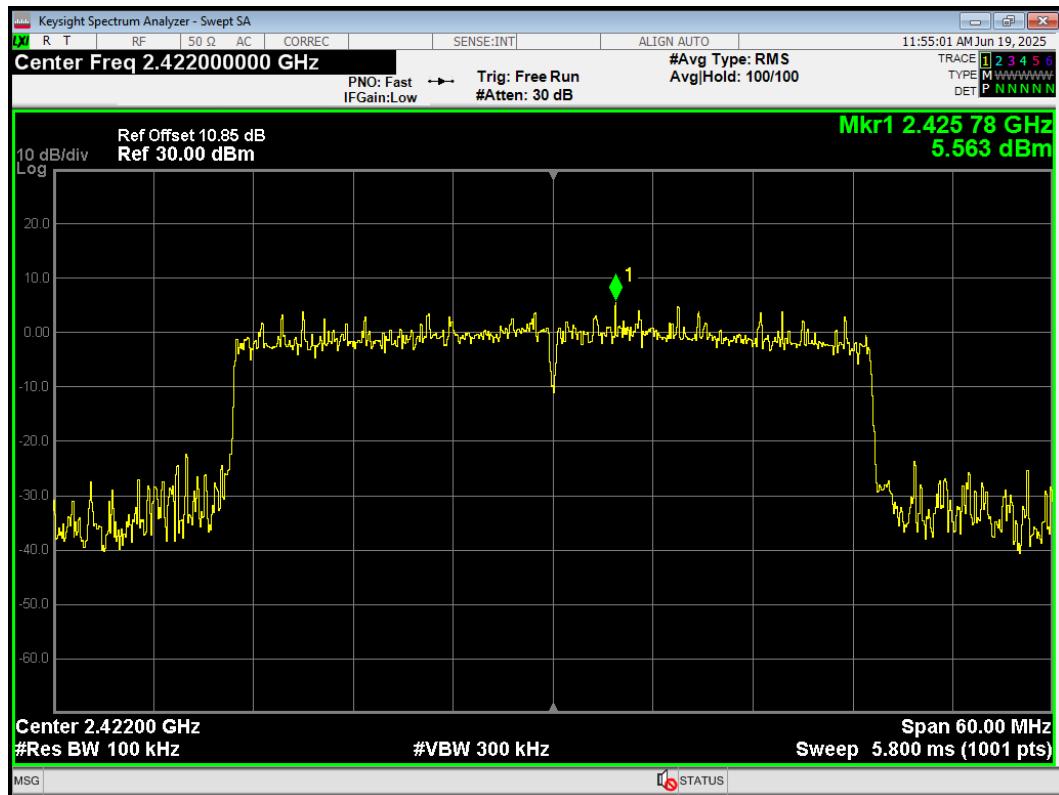


Band Edge 802.11ax(HE40) 2422MHz Emission

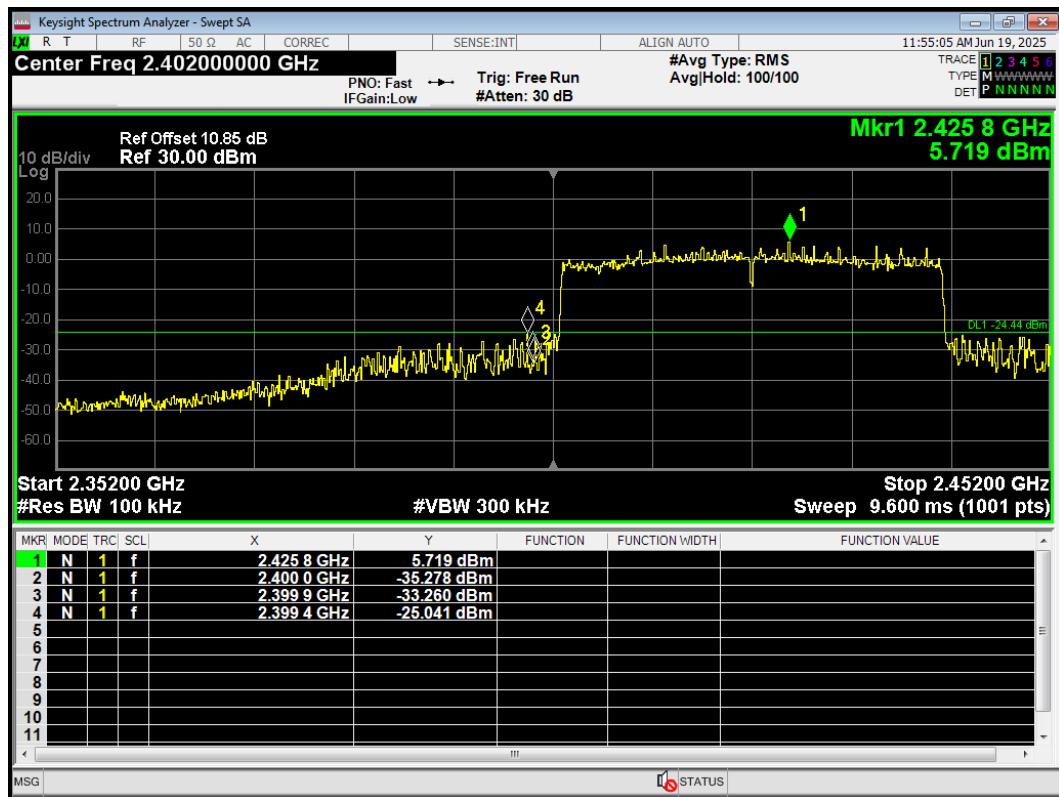


Band Edge 802.11ax(HE40) 2452MHz Ref

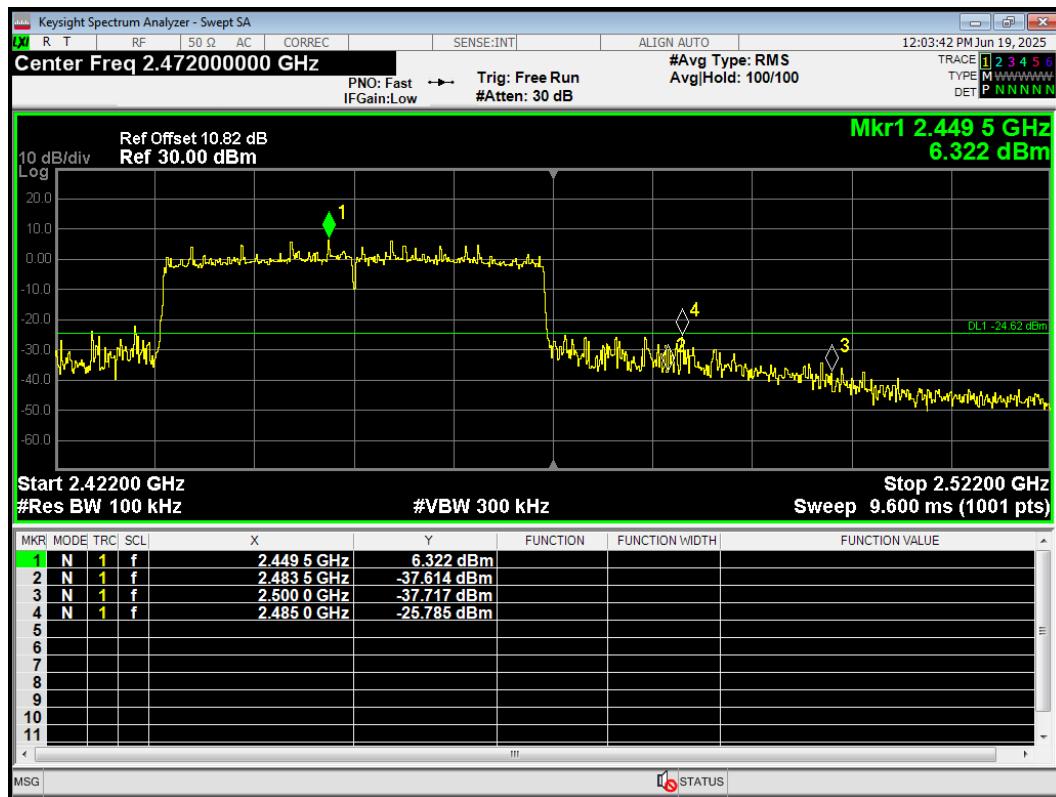Band Edge 802.11ax(HE40) 2452MHz Emission


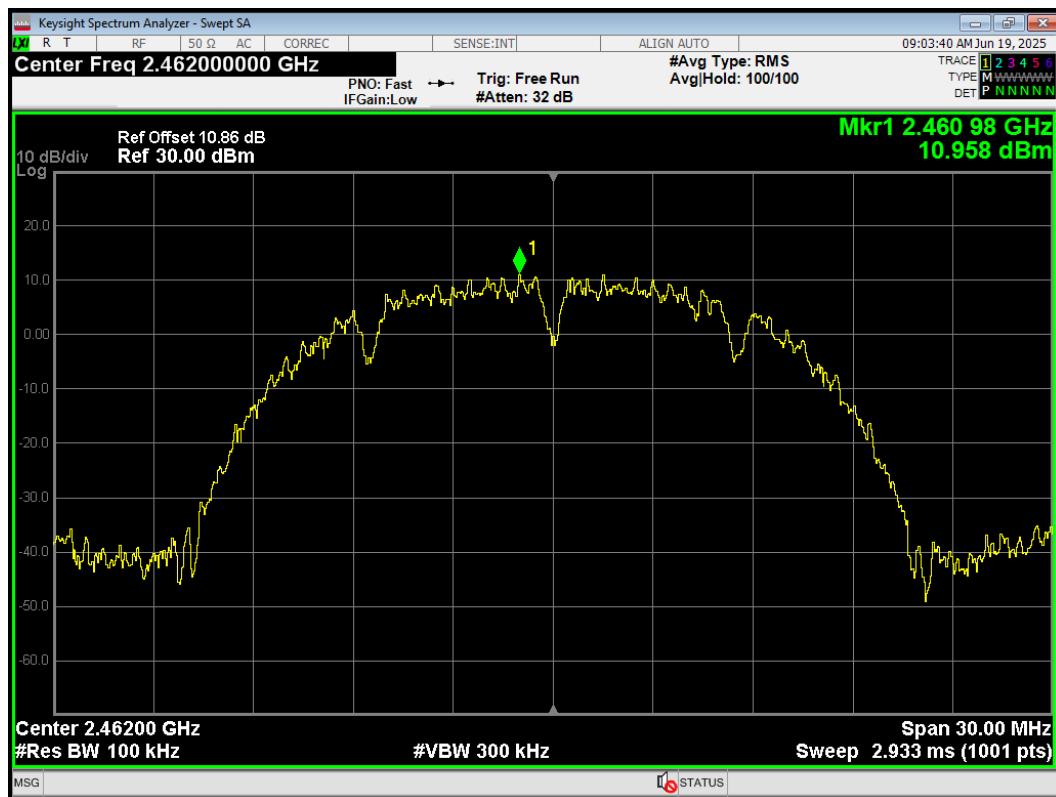
Band Edge 802.11b 2412MHz Ref

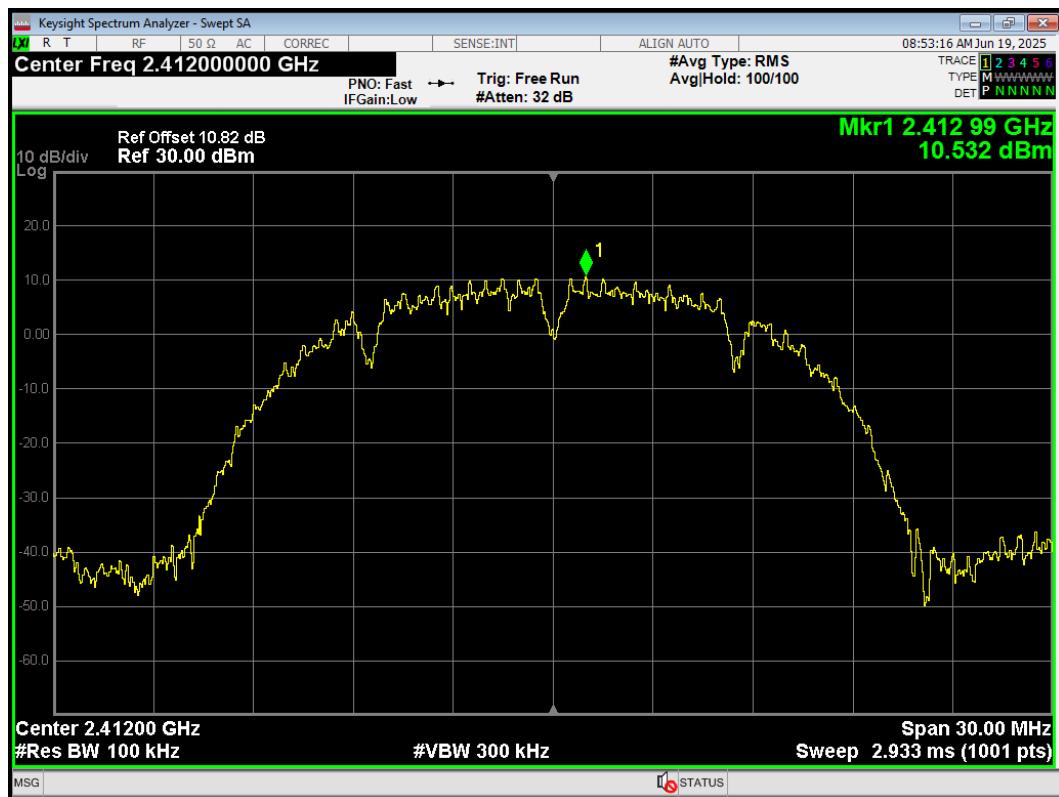


Band Edge 802.11b 2412MHz Emission


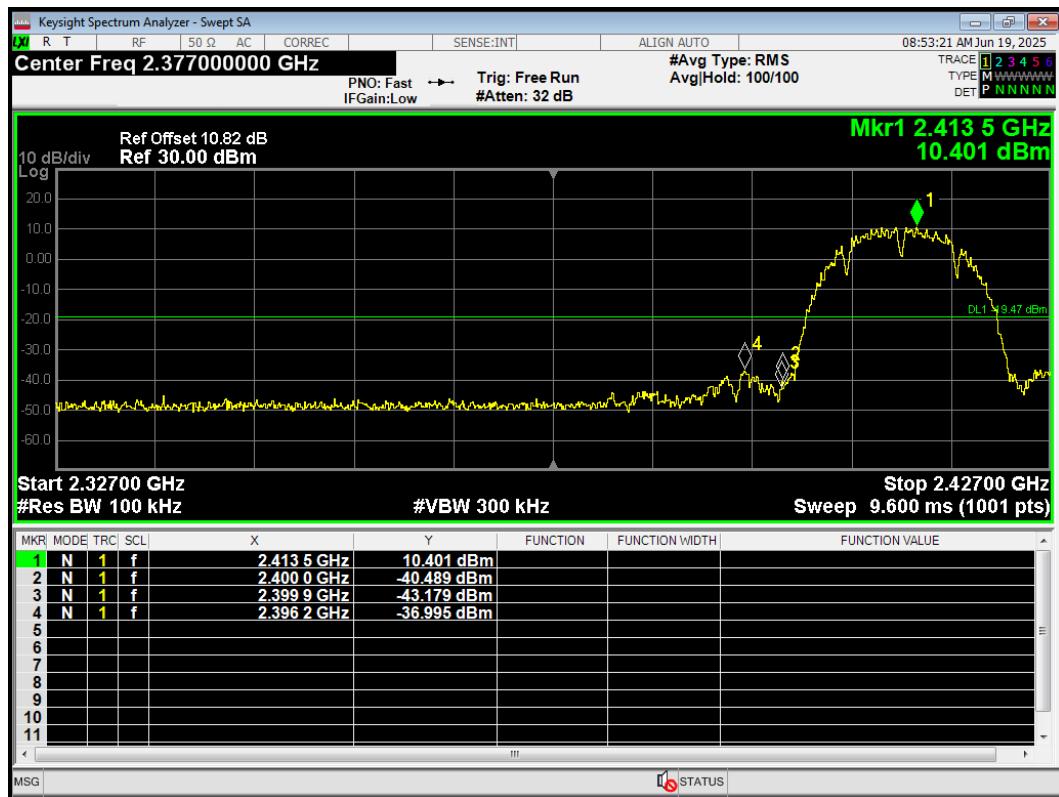



Band Edge 802.11b 2462MHz Ref







Band Edge 802.11b 2462MHz Emission

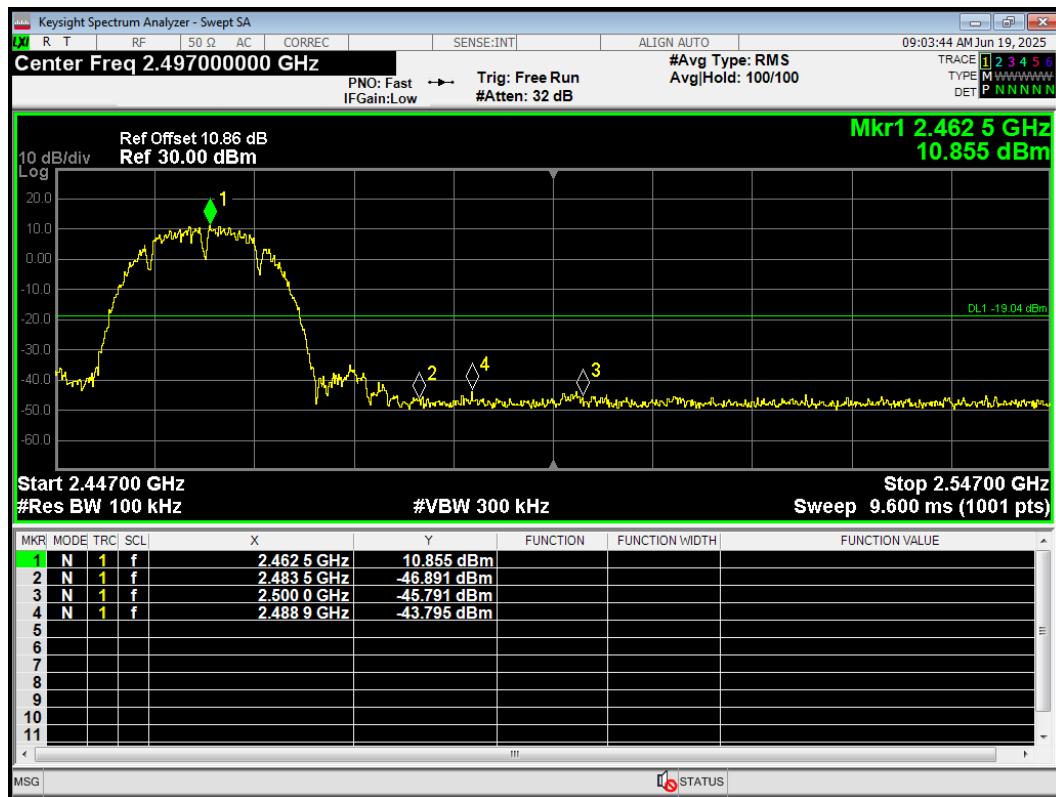

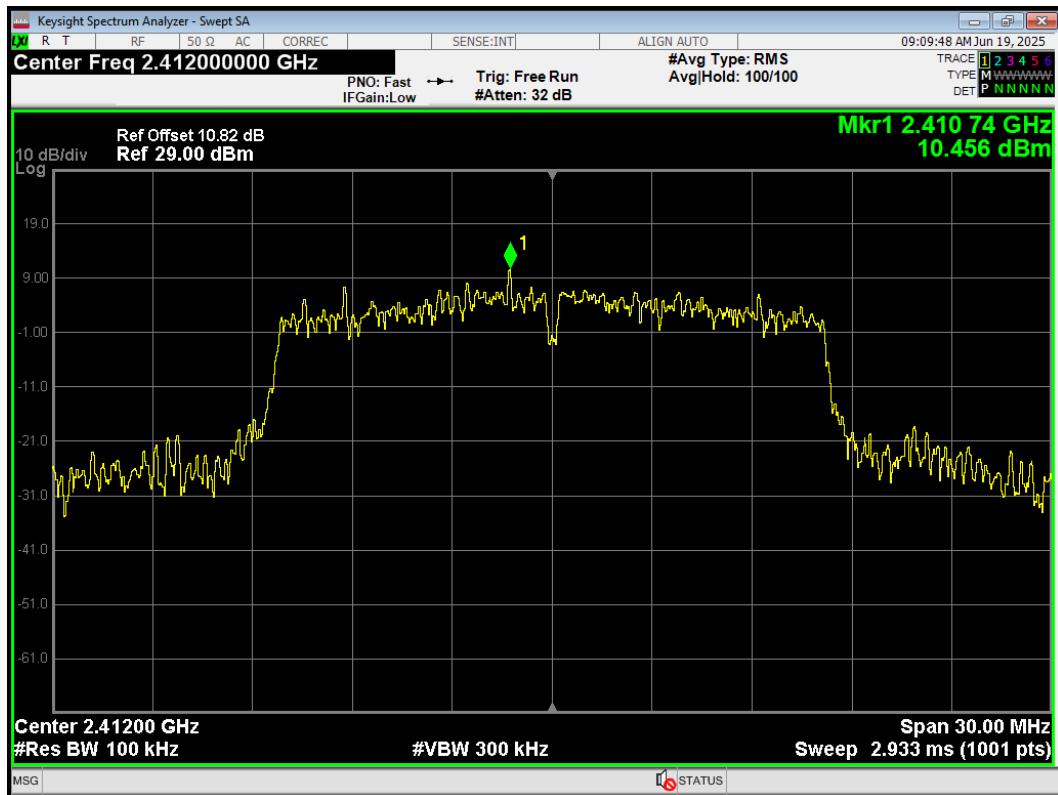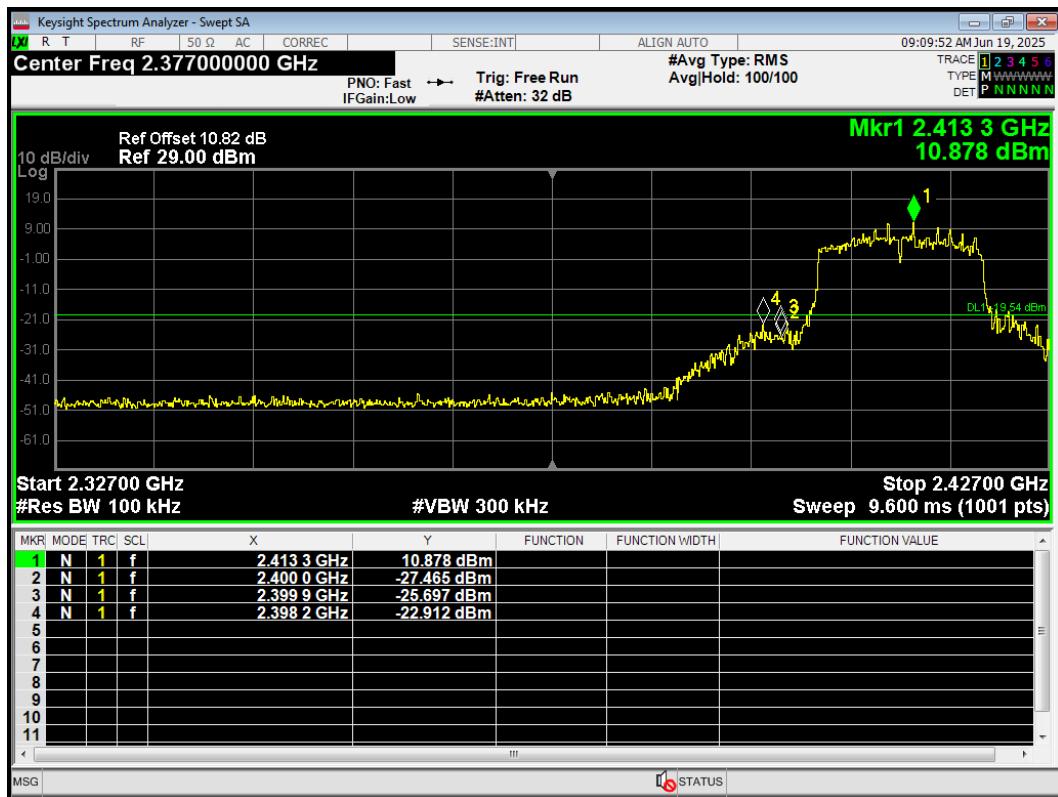
Band Edge 802.11g 2412MHz Ref

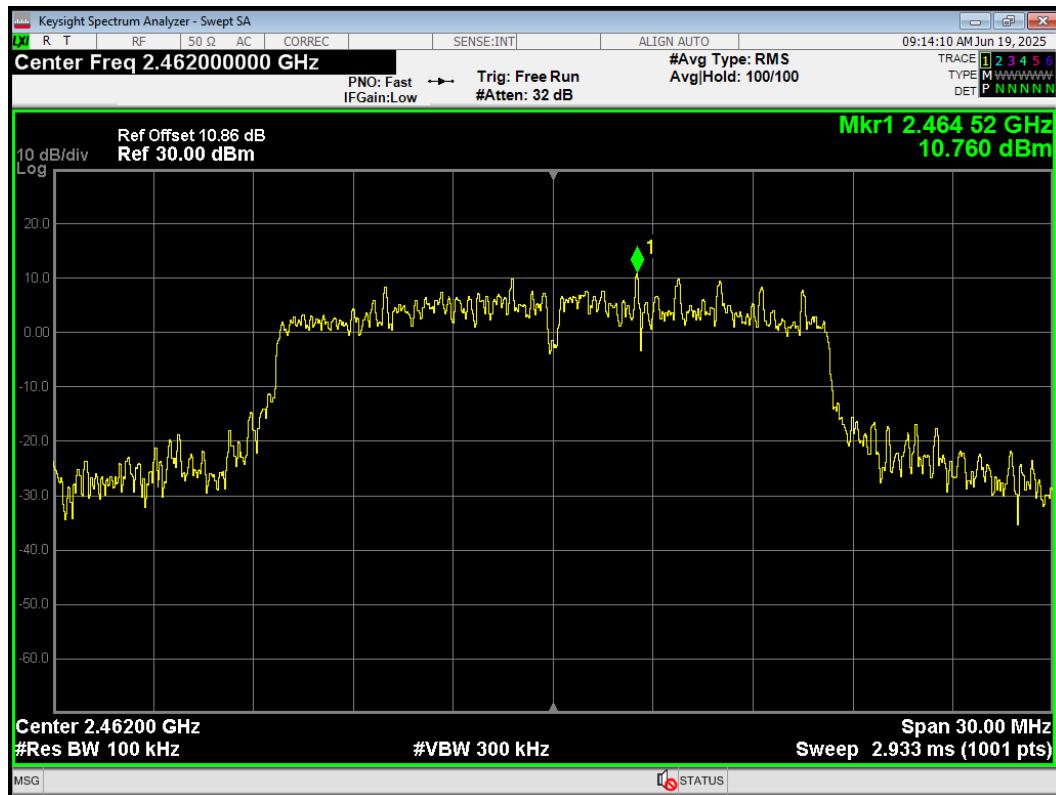Band Edge 802.11g 2412MHz Emission

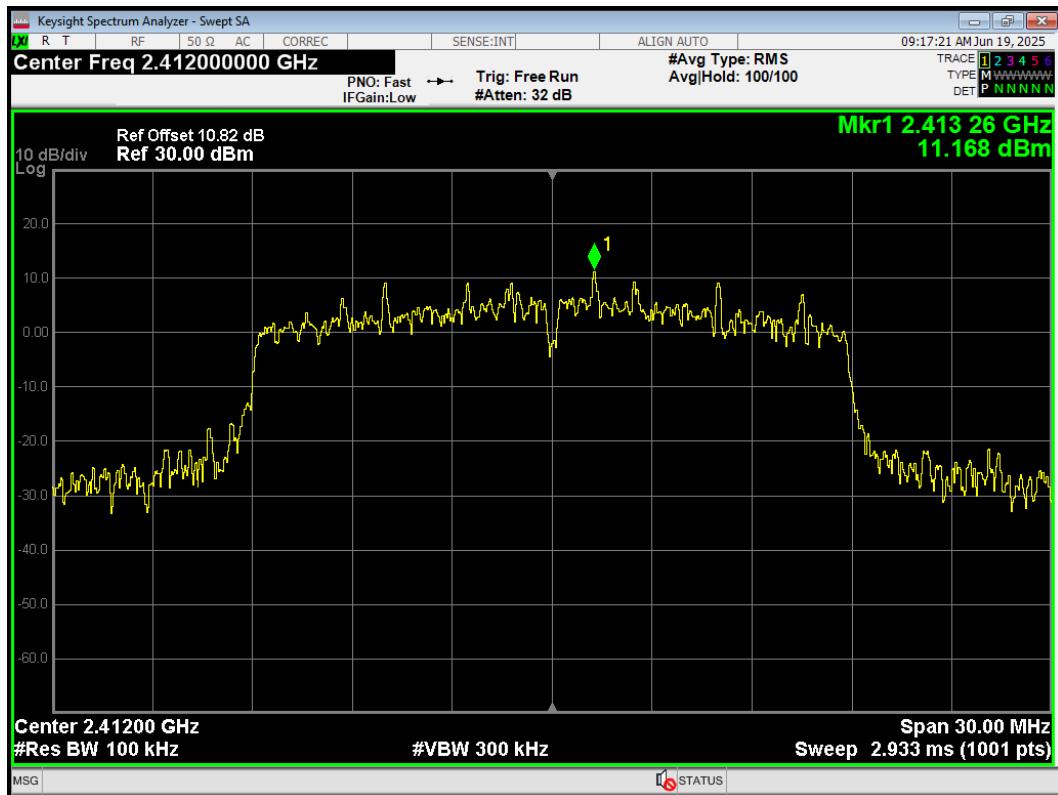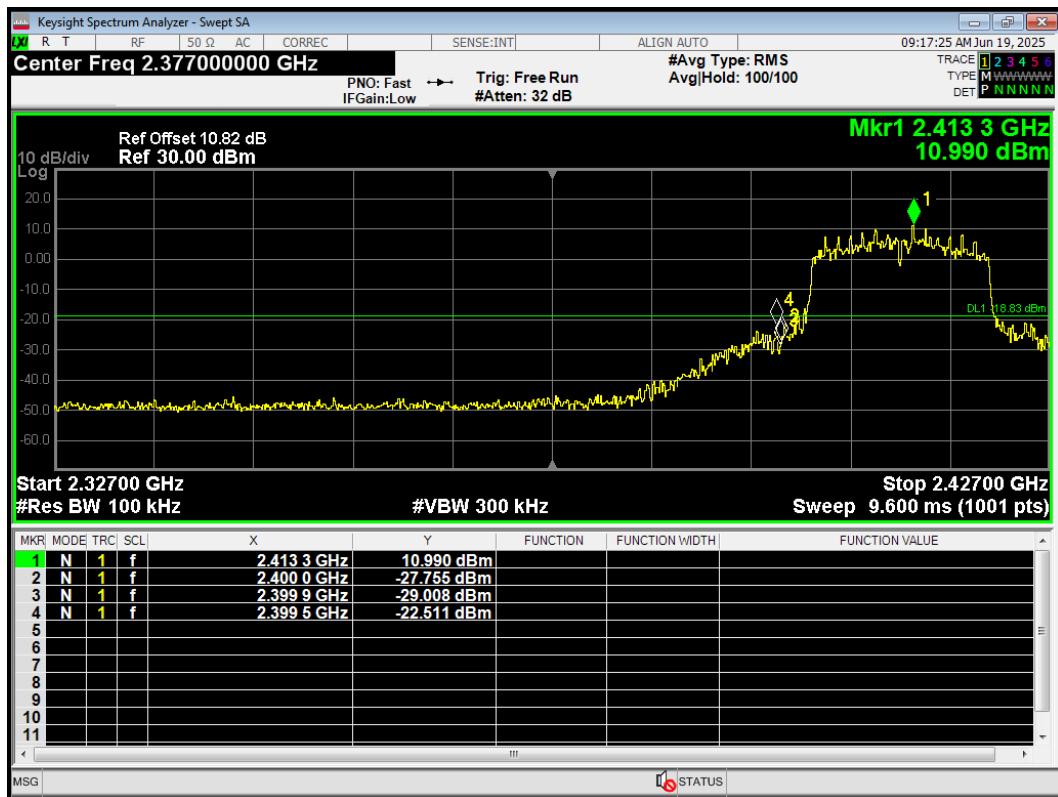
Band Edge 802.11g 2462MHz Ref

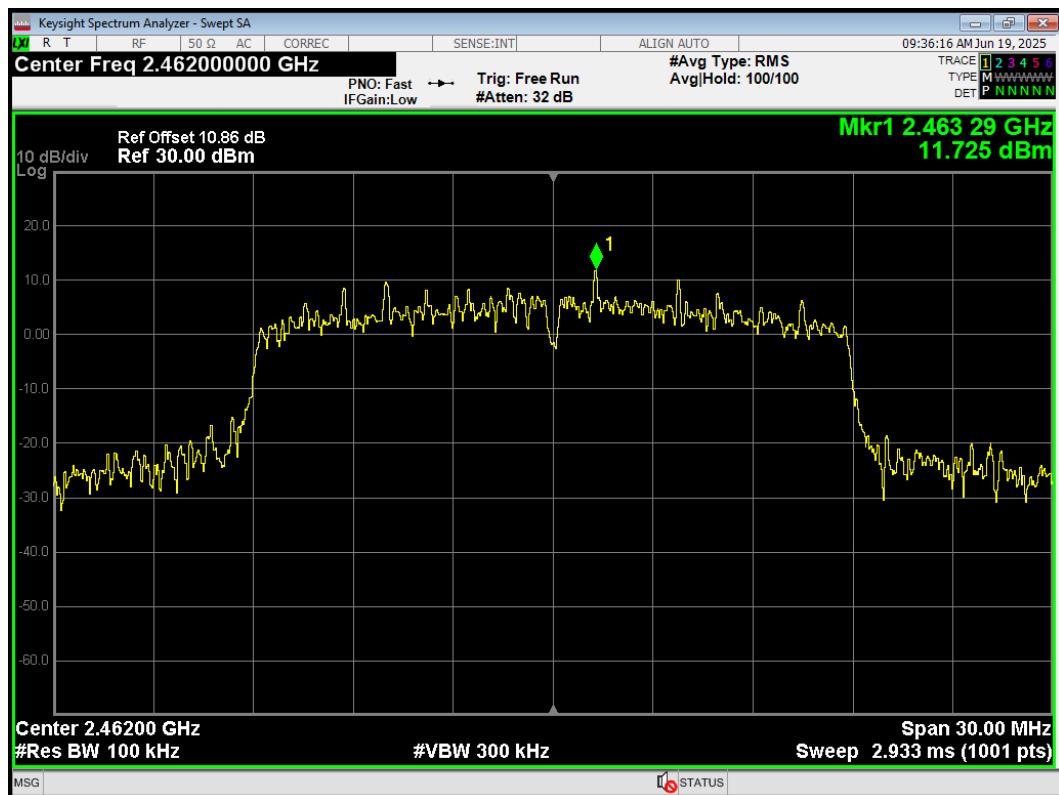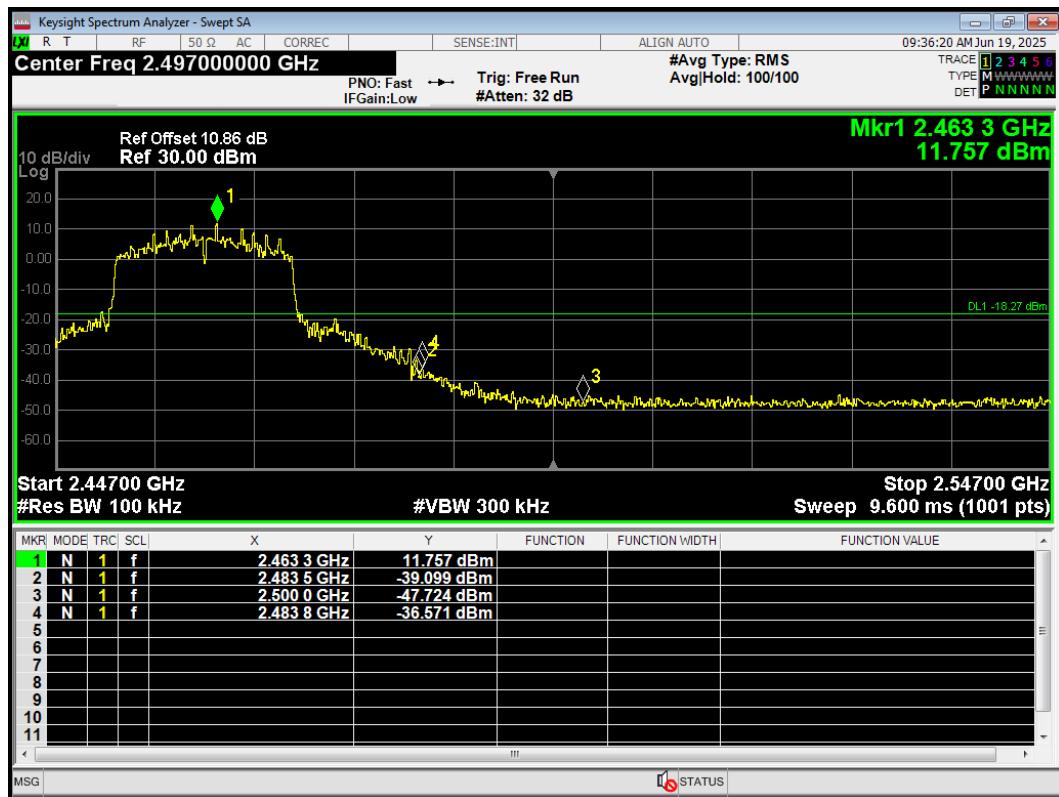Band Edge 802.11g 2462MHz Emission



Band Edge 802.11n(HT20) 2412MHz Ref

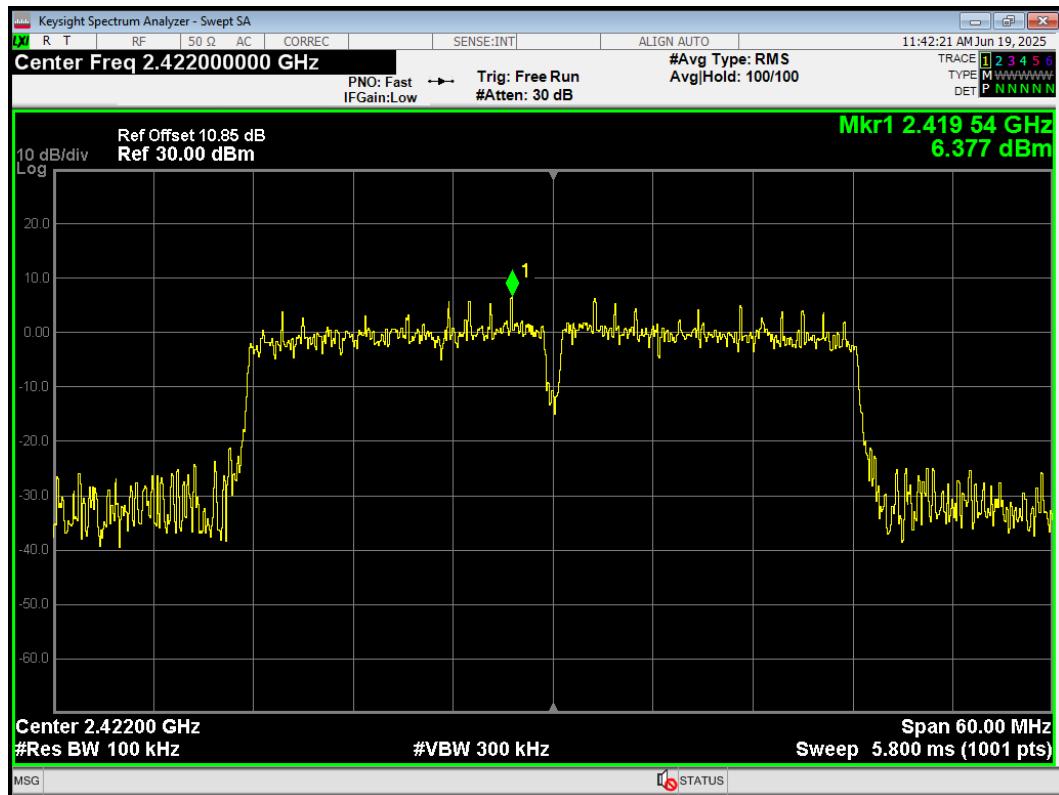Band Edge 802.11n(HT20) 2412MHz Emission


Band Edge 802.11n(HT20) 2462MHz Ref

Band Edge 802.11n(HT20) 2462MHz Emission


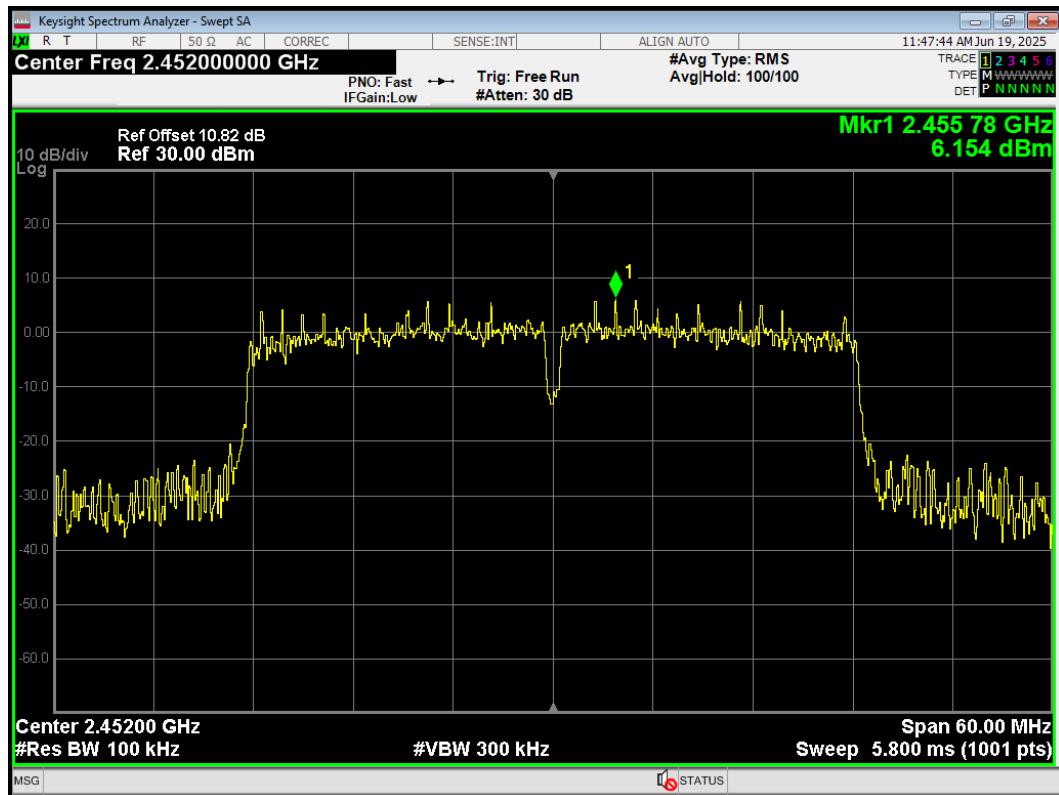
Band Edge 802.11n(HT40) 2422MHz Ref

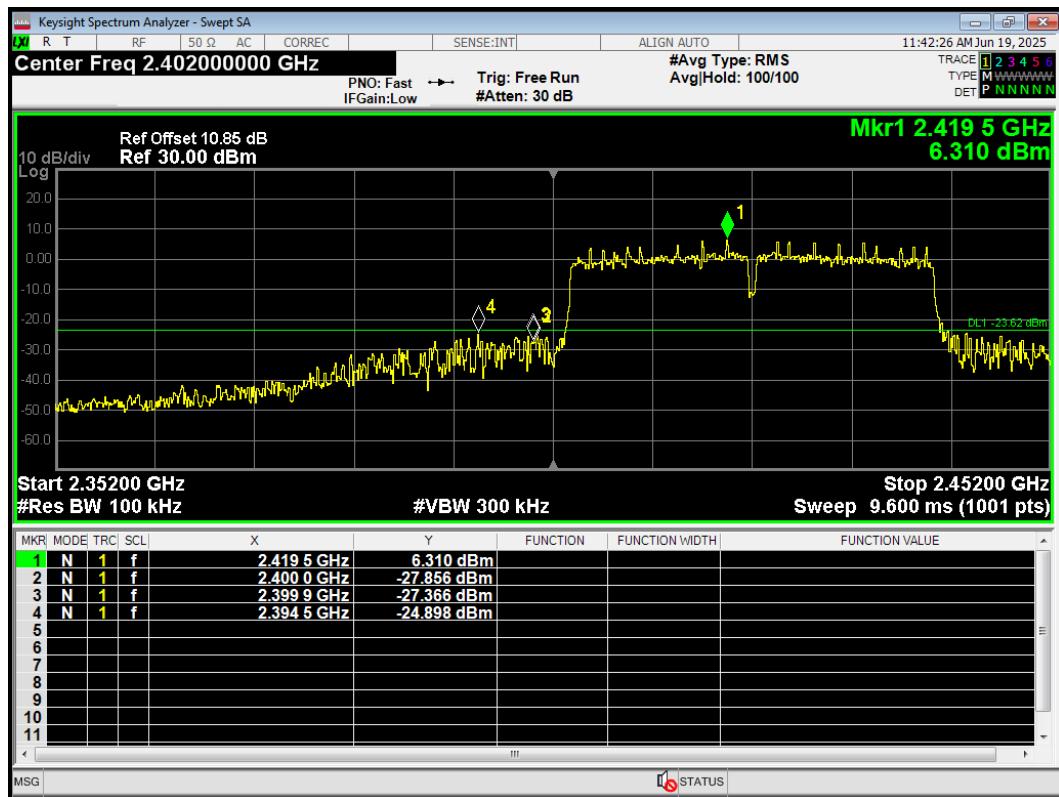


Band Edge 802.11n(HT40) 2422MHz Emission





Band Edge 802.11n(HT40) 2452MHz Ref




Band Edge 802.11n(HT40) 2452MHz Emission

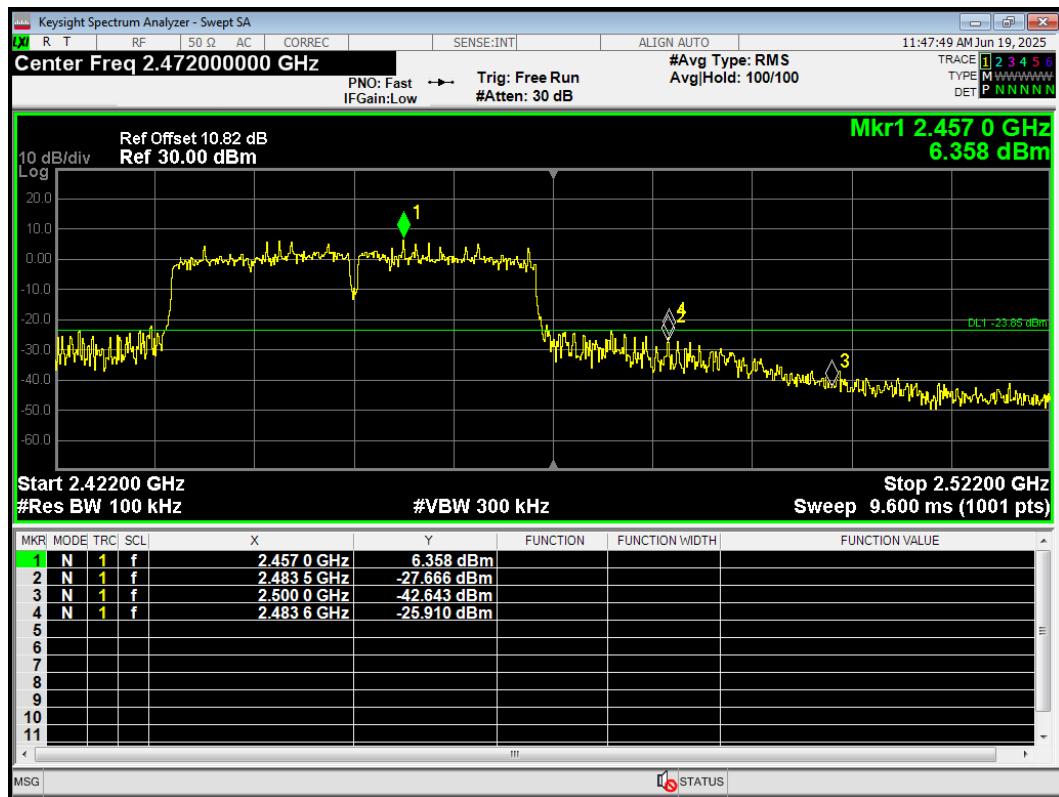

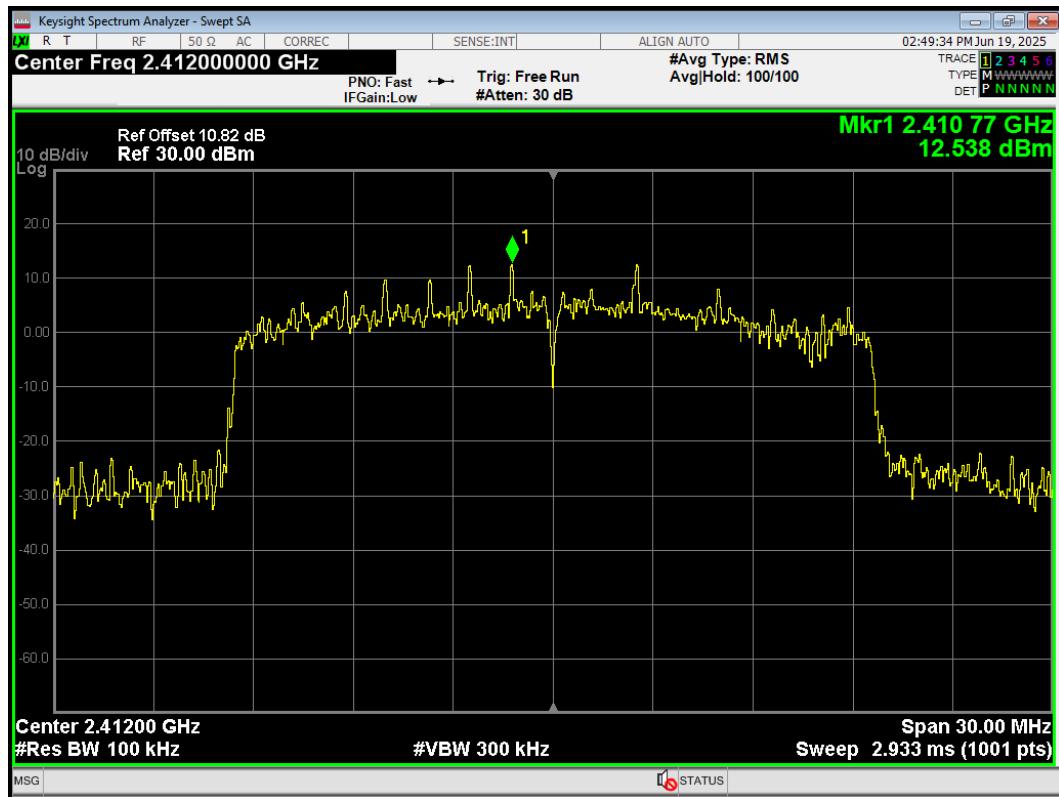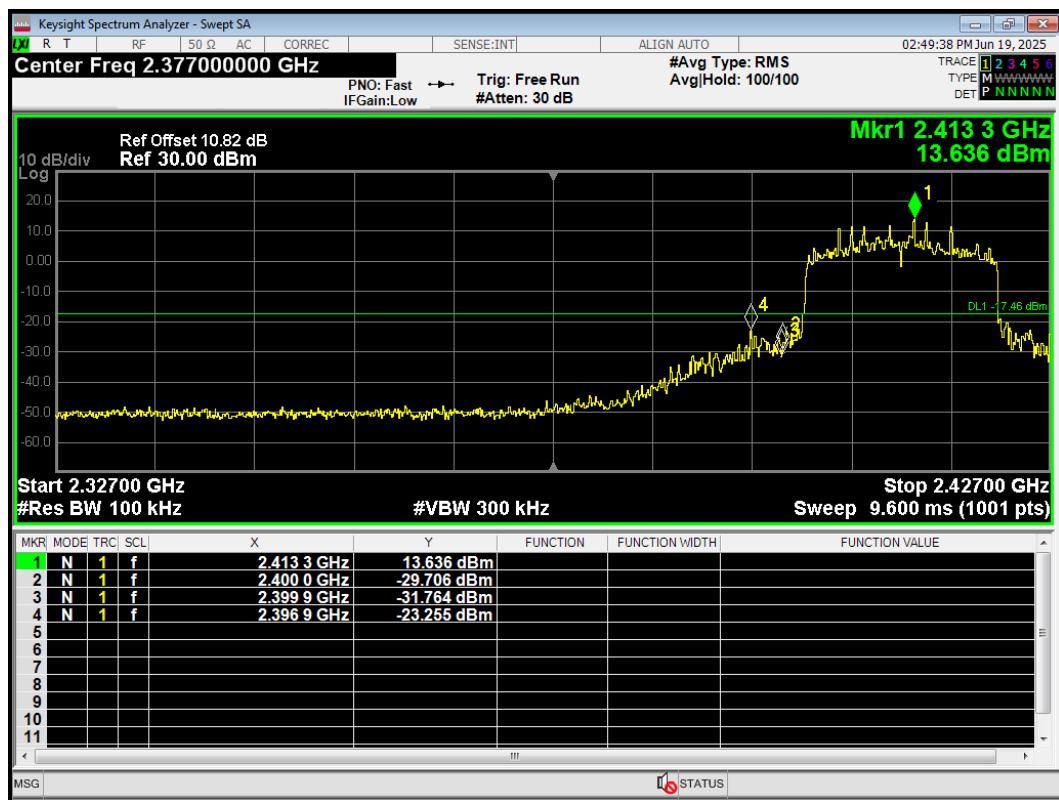ERSU Mode
Band Edge 802.11ax HE20 242-Tones 2412MHz Ref

Band Edge 802.11ax HE20 242-Tones 2412MHz Emission

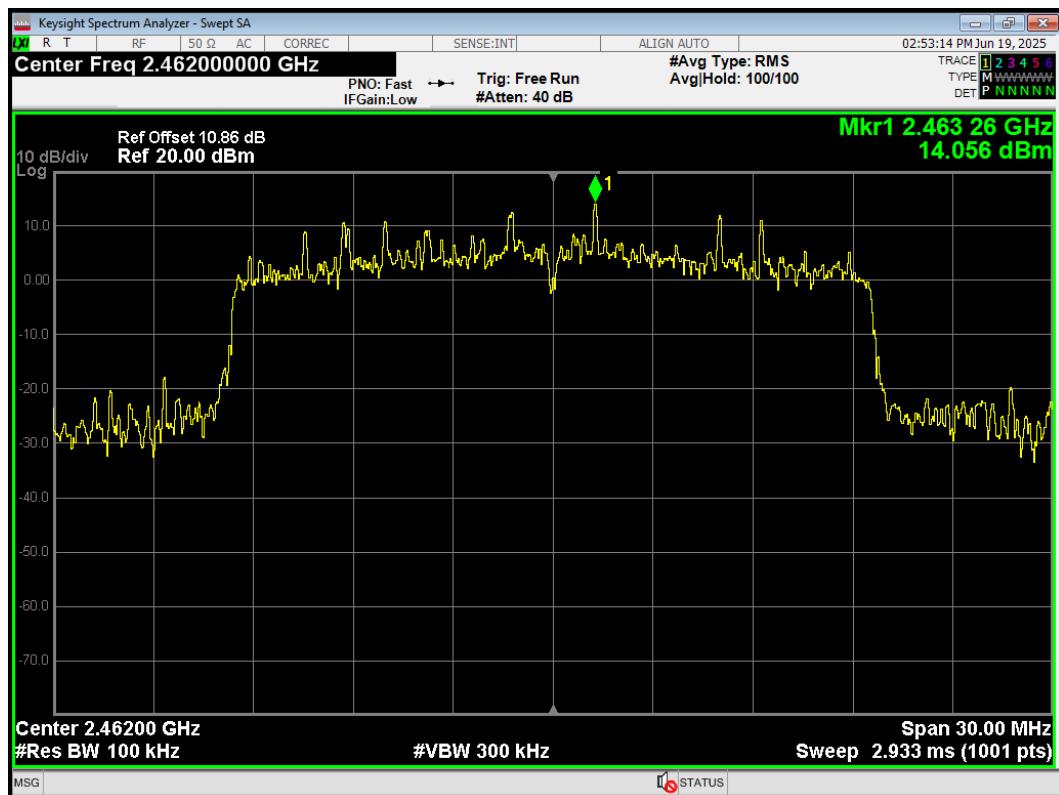
Band Edge 802.11ax HE20 242-Tones 2462MHz Ref



Band Edge 802.11ax HE20 242-Tones 2462MHz Emission



5.4. Power Spectral Density

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPSD-2 was used for this test.

- a) Measure the duty cycle (D) of the transmitter output signal as described in 11.6
- b) Set instrument center frequency to DTS channel center frequency
- c) Set span to at least 1.5 times the OBW
- d) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- e) Set VBW $\geq [3 \times \text{RBW}]$
- f) Detector= power averaging (rms) or sample detector (when rms not available)
- g) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span}/\text{RBW}]$
- h) Sweep time =auto couple
- i) Do not use sweep triggering; allow sweep to "free run"
- j) Employ trace averaging (rms) mode over a minimum of 100 traces
- k) Use the peak marker function to determine the maximum amplitude level
- l) Add $[10 \log(1/D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time
- m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that" For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

Limits	≤ 8 dBm / 3kHz
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:

Test Mode	Carrier frequency (MHz)/ Channel	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy) (1M)	2402/CH0	-19.40	-15.70	8	PASS
	2440/CH19	-18.96	-15.26	8	PASS
	2480/CH39	-19.33	-15.63	8	PASS
Bluetooth (Low Energy) (2M)	2402/CH0	-24.13	-17.53	8	PASS
	2440/CH19	-23.83	-17.23	8	PASS
	2480/CH39	-24.25	-17.65	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

SU Mode

Test Mode	Carrier frequency (MHz)/ Channel	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	-6.17	-9.54	8	PASS
	2437/CH 6	-4.04	-7.41	8	PASS
	2462/CH11	-5.87	-9.24	8	PASS
802.11g	2412/CH 1	-6.40	-7.18	8	PASS
	2437/CH 6	-6.67	-7.45	8	PASS
	2462/CH11	-7.36	-8.14	8	PASS
802.11n HT20	2412/CH 1	-8.03	-9.19	8	PASS
	2437/CH 6	-7.20	-8.36	8	PASS
	2462/CH11	-7.35	-8.51	8	PASS
802.11n HT40	2422/CH3	-11.56	-12.52	8	PASS
	2437/CH6	-11.30	-12.26	8	PASS
	2452/CH9	-11.23	-12.19	8	PASS
802.11ax HE20	2412/CH 1	-10.36	-10.32	8	PASS
	2437/CH 6	-9.98	-9.94	8	PASS
	2462/CH11	-9.29	-9.25	8	PASS
802.11ax HE40	2422/CH3	-14.20	-14.18	8	PASS
	2437/CH6	-14.41	-14.39	8	PASS
	2452/CH9	-15.08	-15.06	8	PASS

Note: Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + $10 \cdot \log_{10}(3/30)$


ERSU Mode

Test Mode	Carrier frequency (MHz)/ Channel	RU Index	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11ax HE20 242-Tones	2412/CH 1	61	-8.48	-8.53	8	PASS
	2437/CH 6	61	-7.28	-7.33	8	PASS
	2462/CH11	61	-8.69	-8.74	8	PASS


Note: Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + $10 \cdot \log_{10}(3/30)$

Bluetooth LE


PSD BLE (1M) 2402MHz

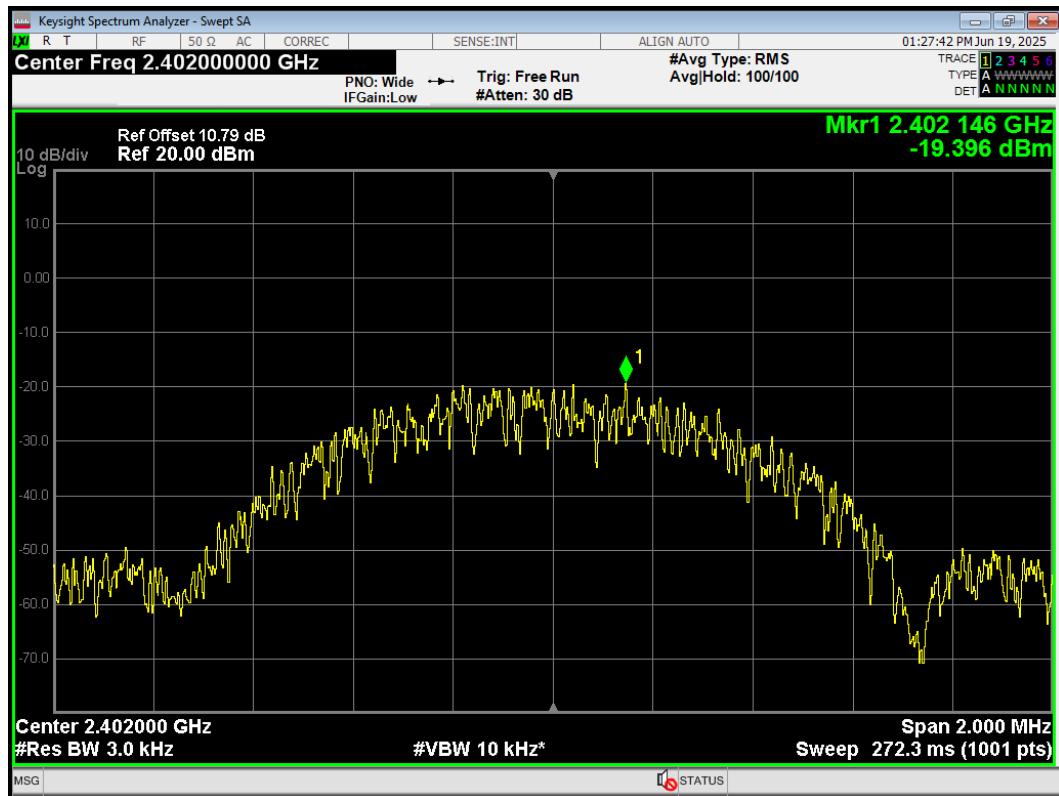


PSD BLE (1M) 2440MHz

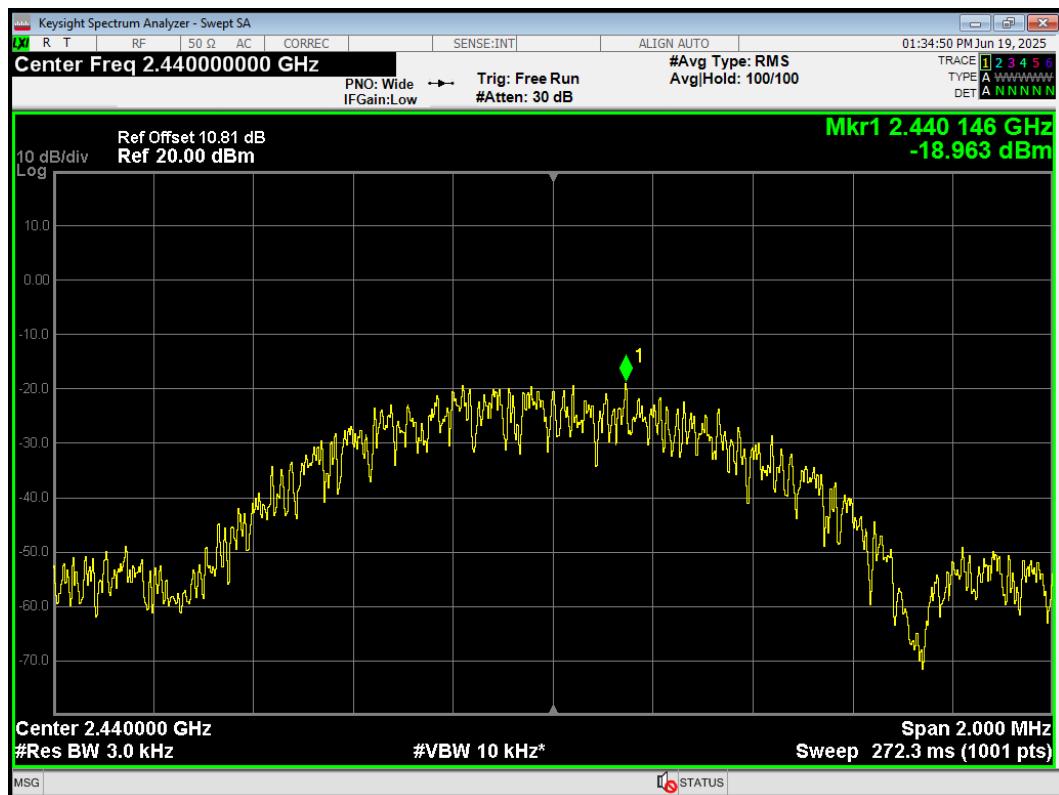


PSD BLE (1M) 2480MHz

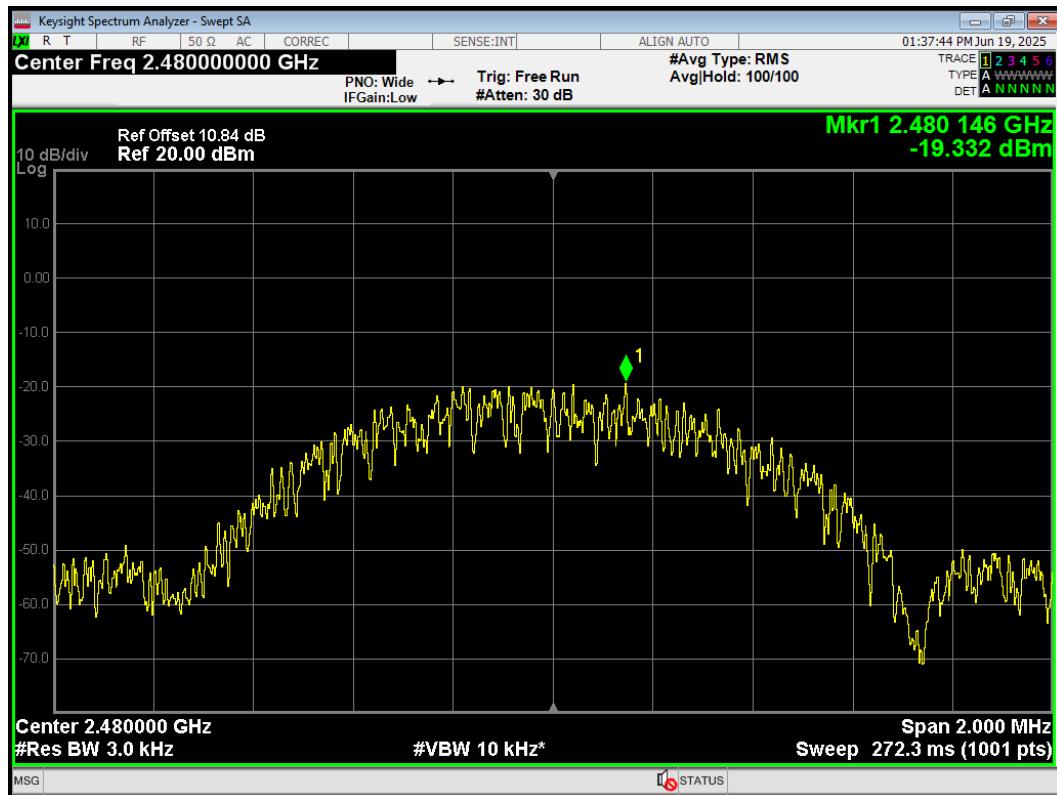


PSD BLE (2M) 2402MHz

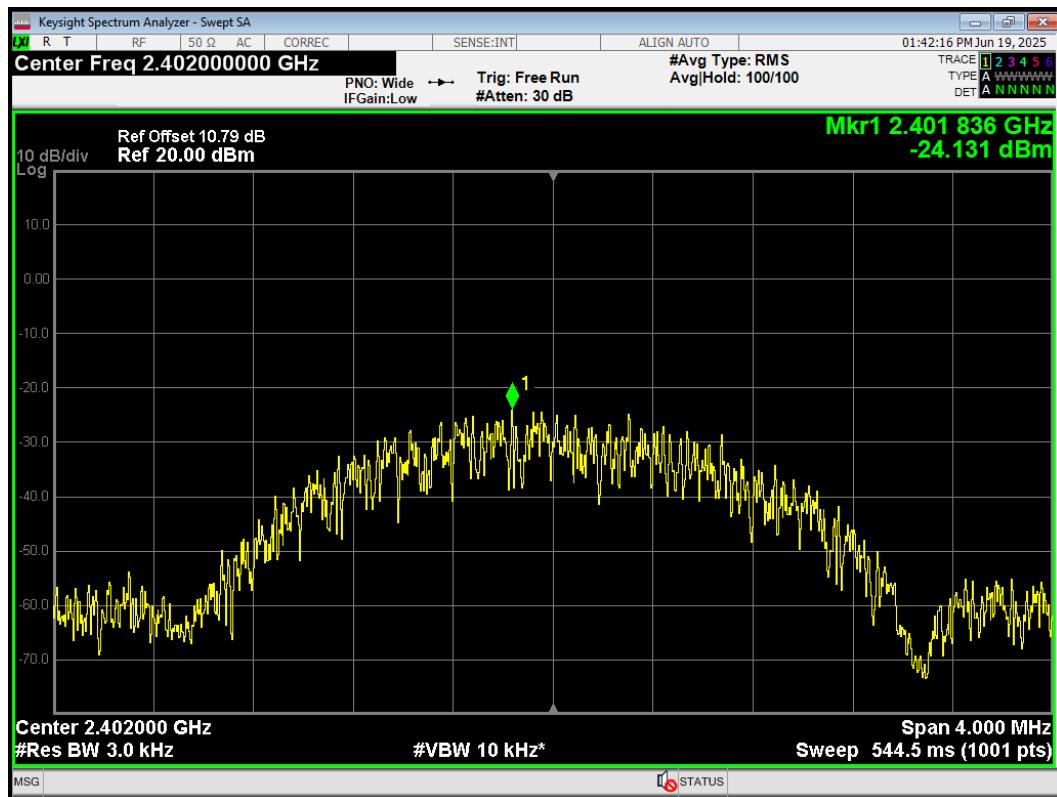

PSD BLE (2M) 2440MHz

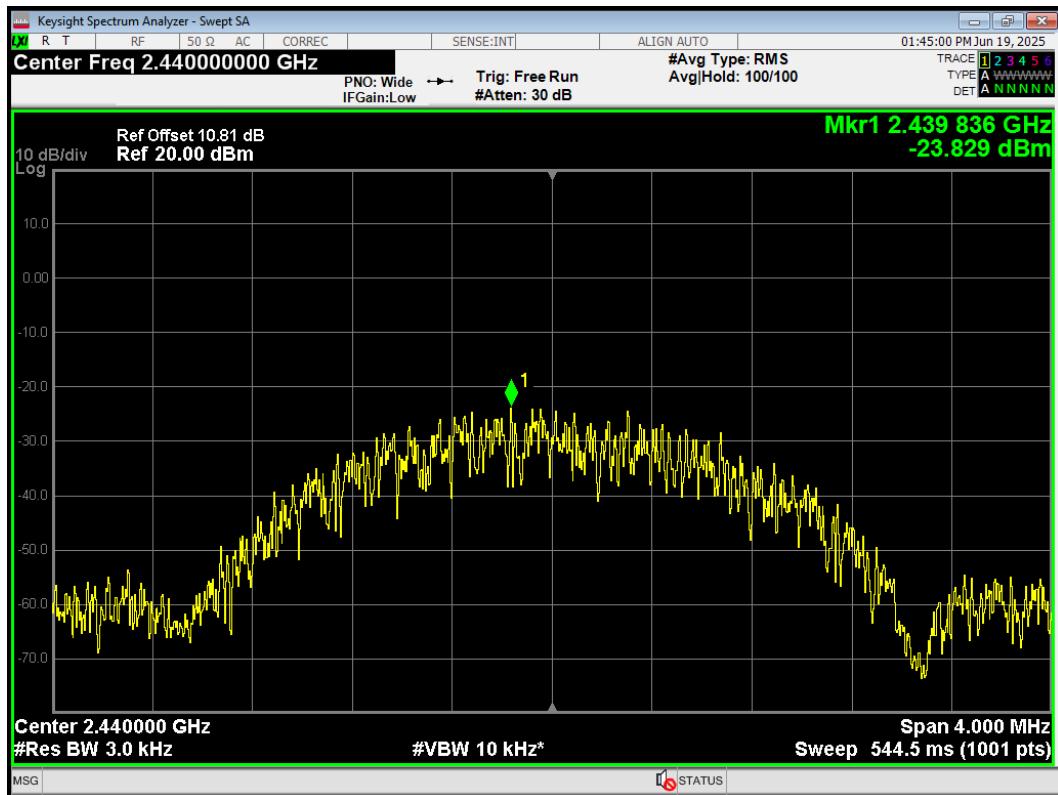


PSD BLE (2M) 2480MHz

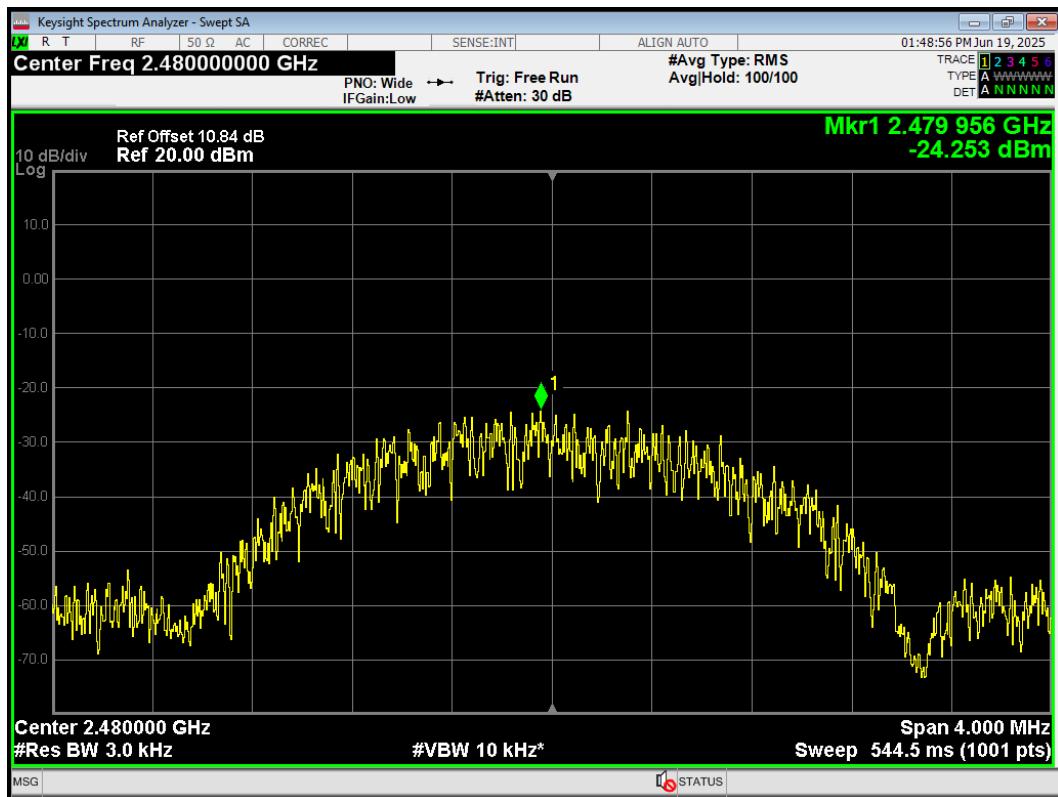


SU Mode


PSD 802.11ax(HE20) 2412MHz

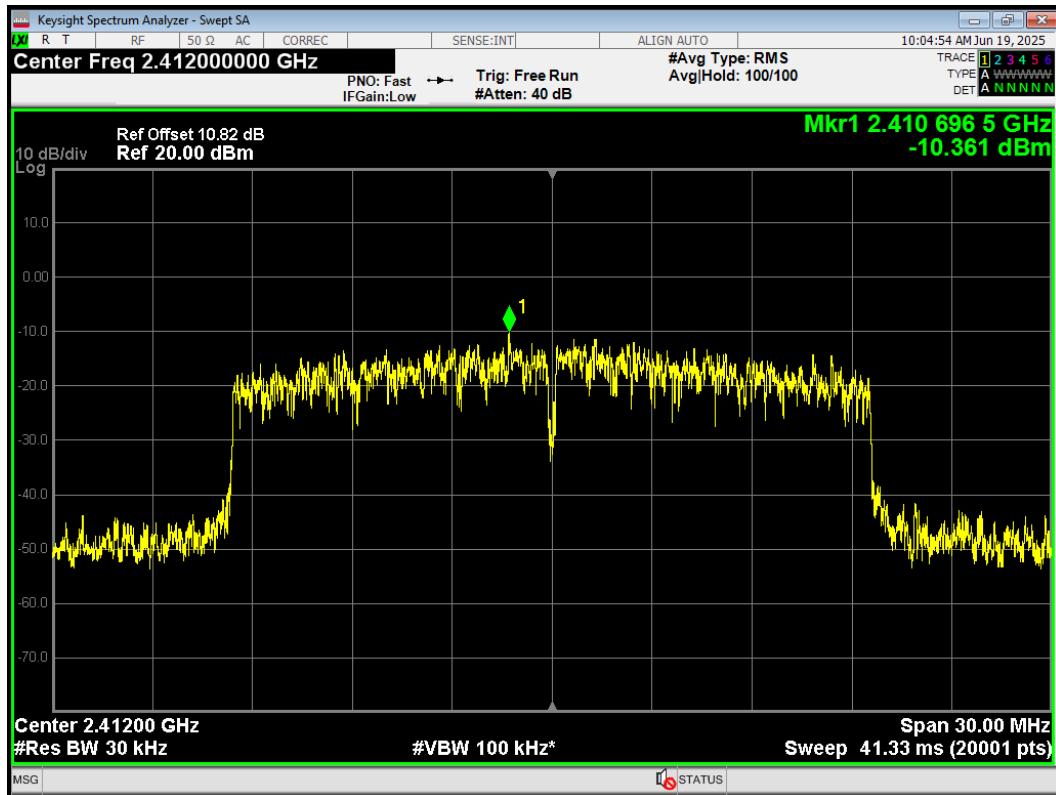


PSD 802.11ax(HE20) 2437MHz

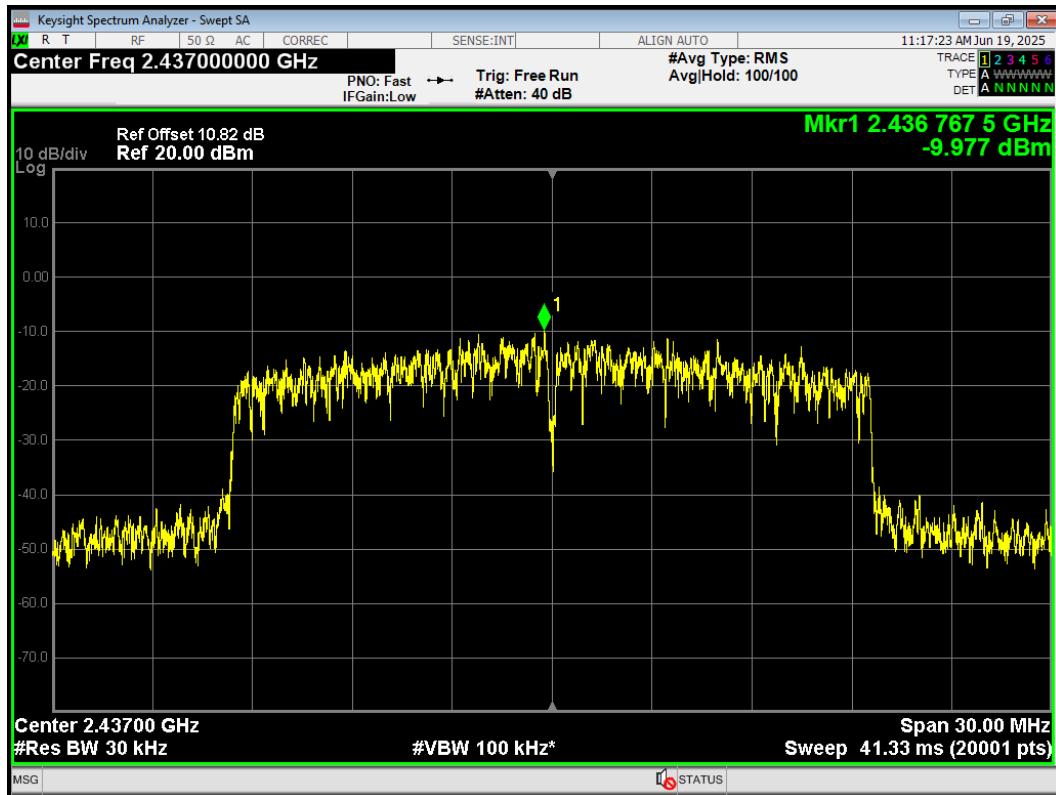


PSD 802.11ax(HE20) 2462MHz

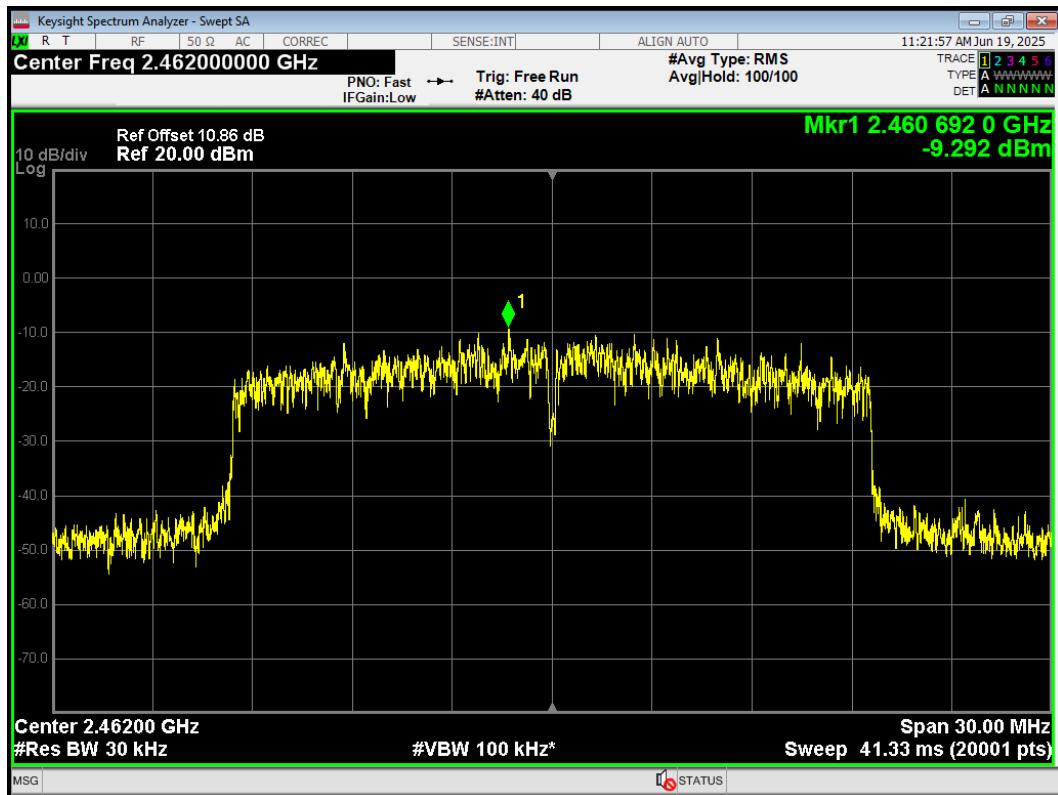


PSD 802.11ax(HE40) 2422MHz

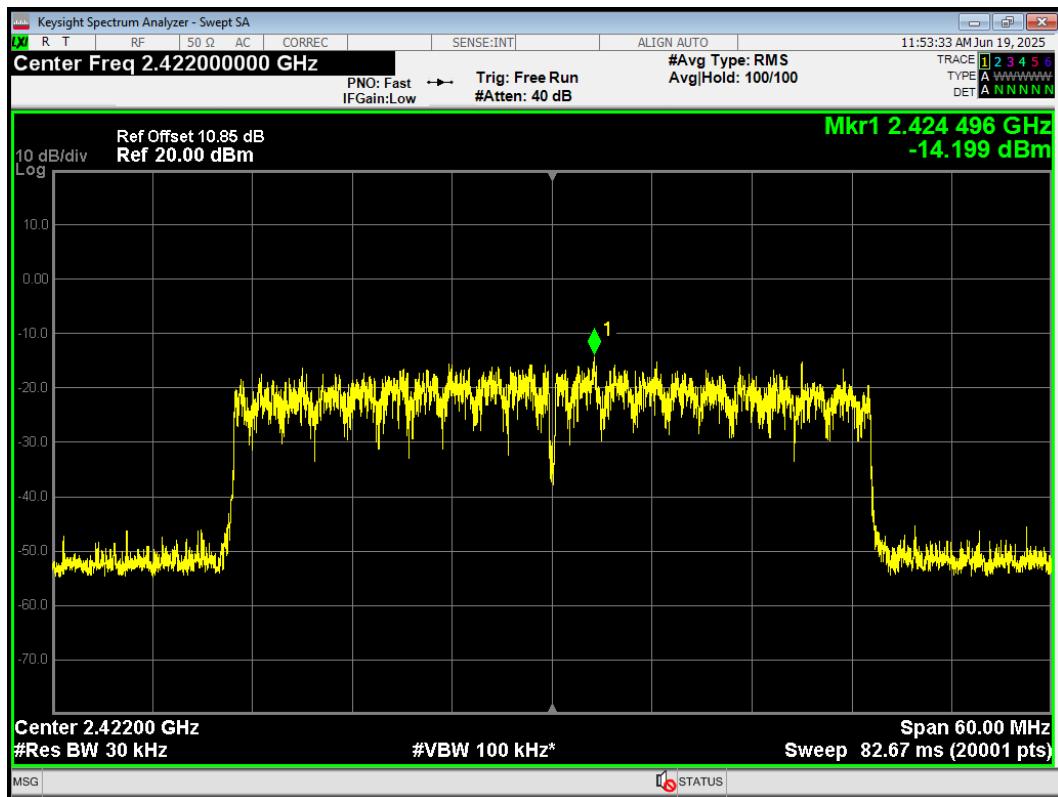


PSD 802.11ax(HE40) 2437MHz

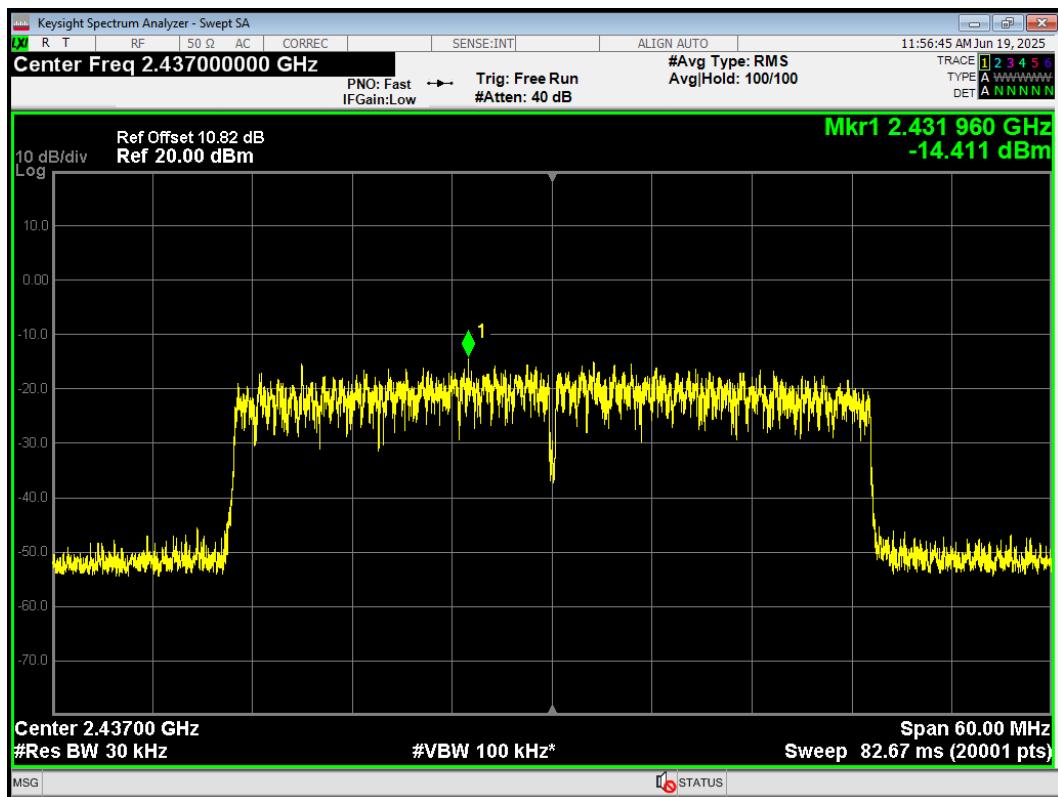

PSD 802.11ax(HE40) 2452MHz

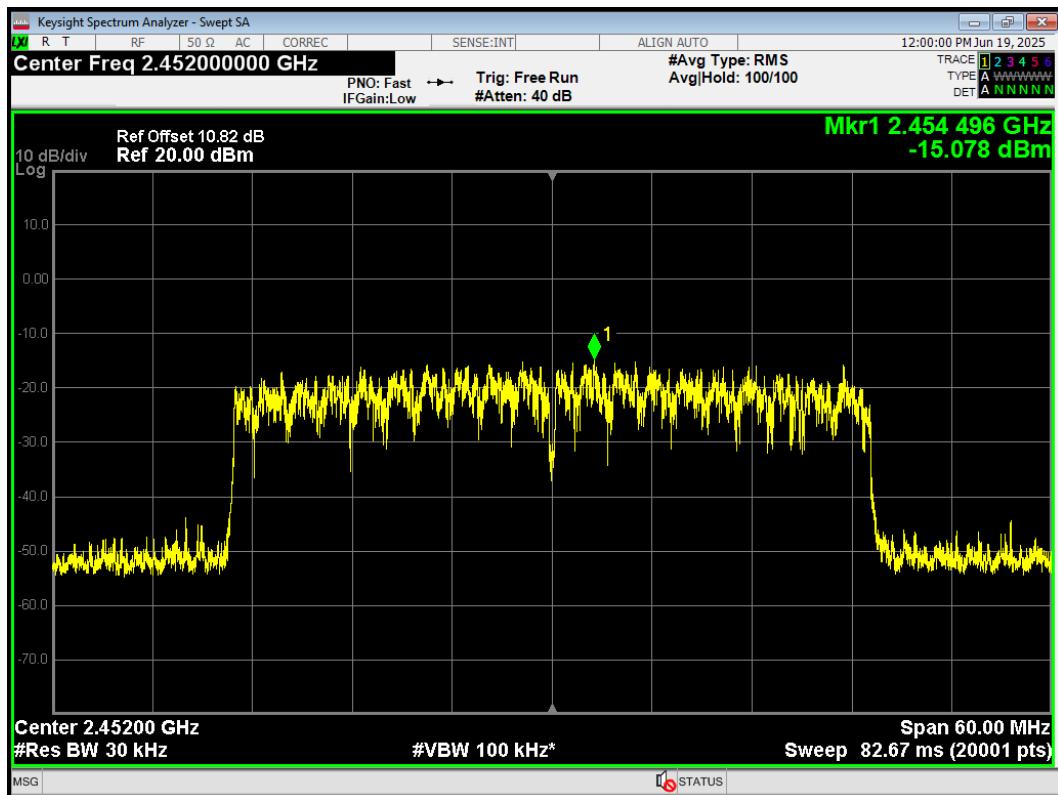

PSD 802.11b 2412MHz

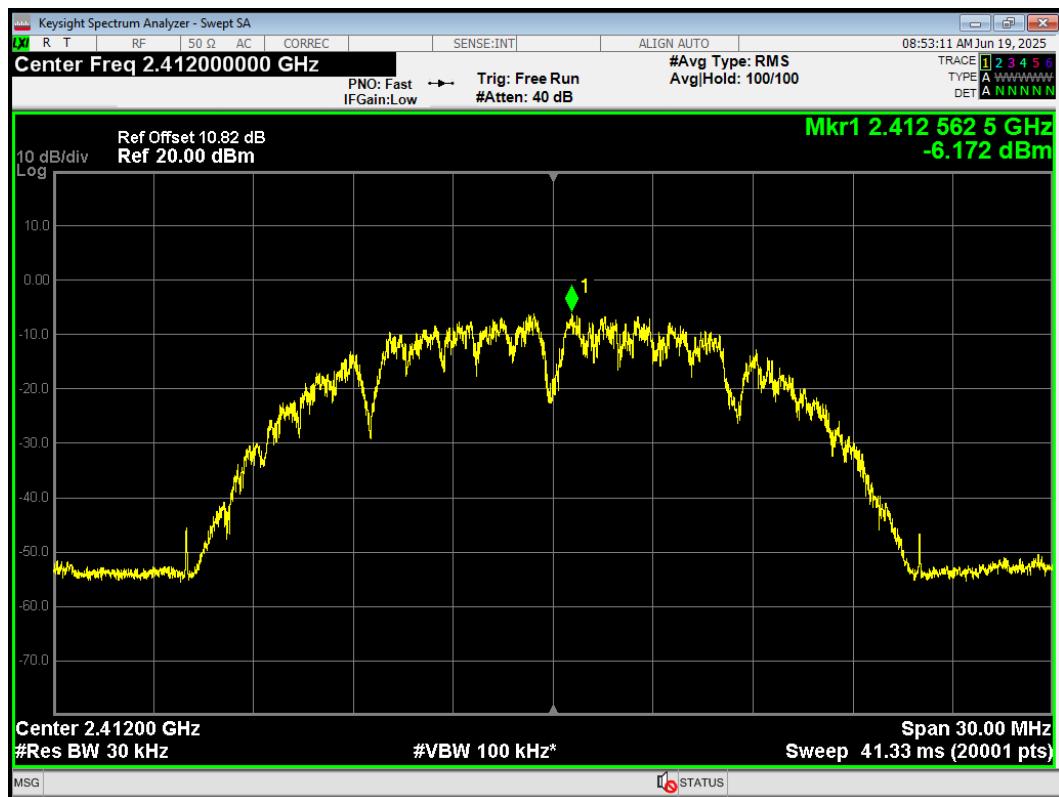


PSD 802.11b 2437MHz




PSD 802.11b 2462MHz




PSD 802.11g 2412MHz

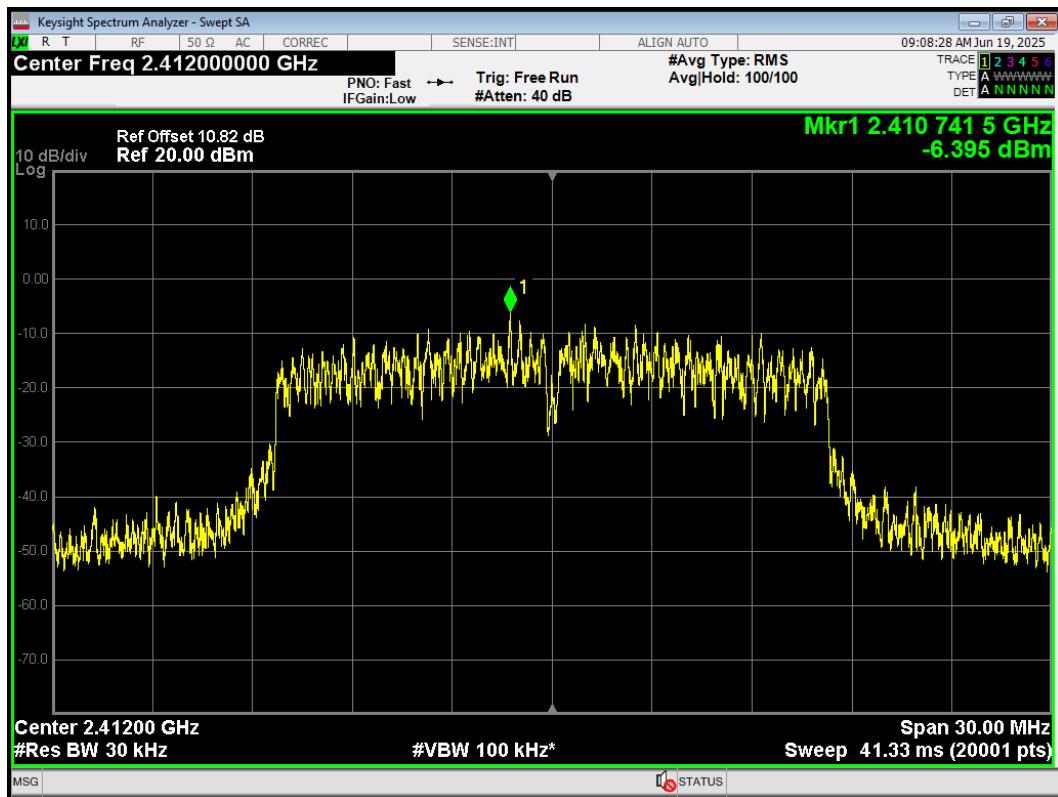


PSD 802.11g 2437MHz

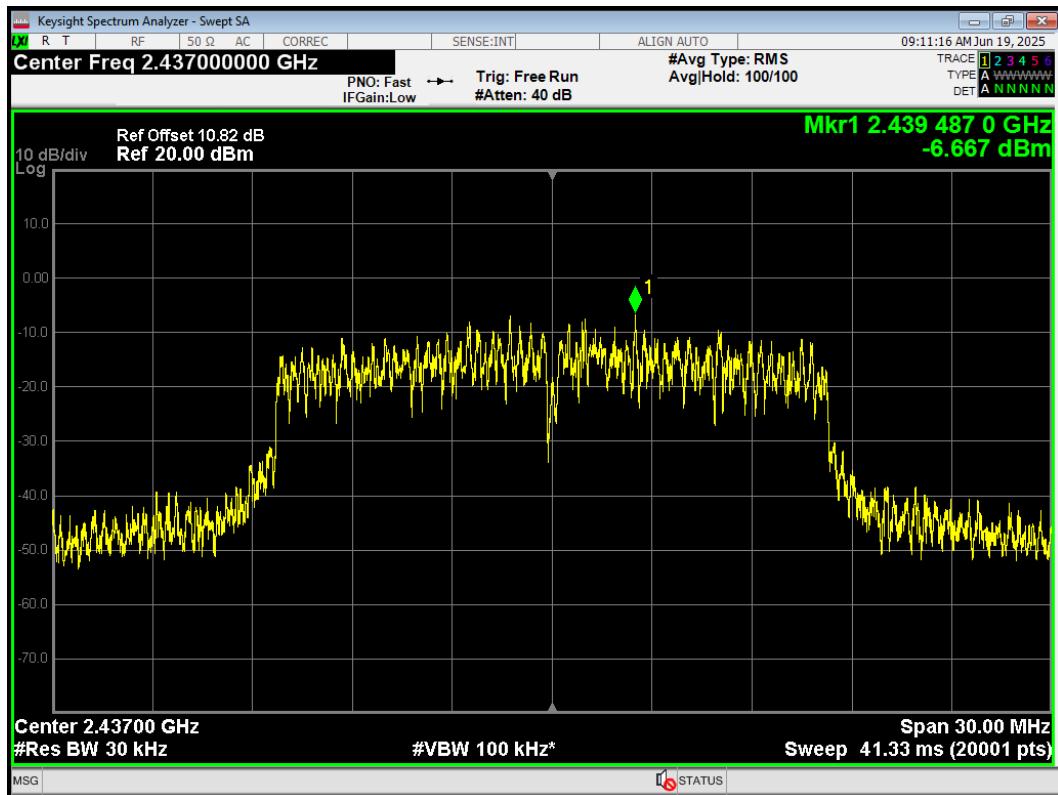


PSD 802.11g 2462MHz

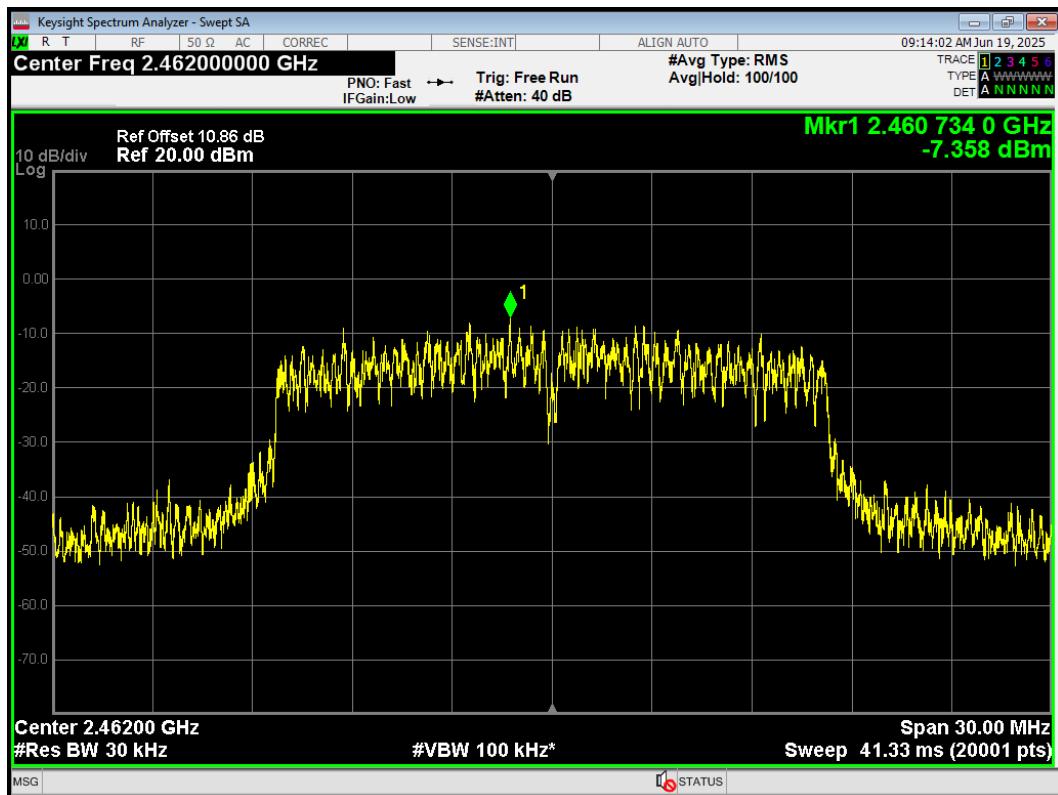


PSD 802.11n(HT20) 2412MHz

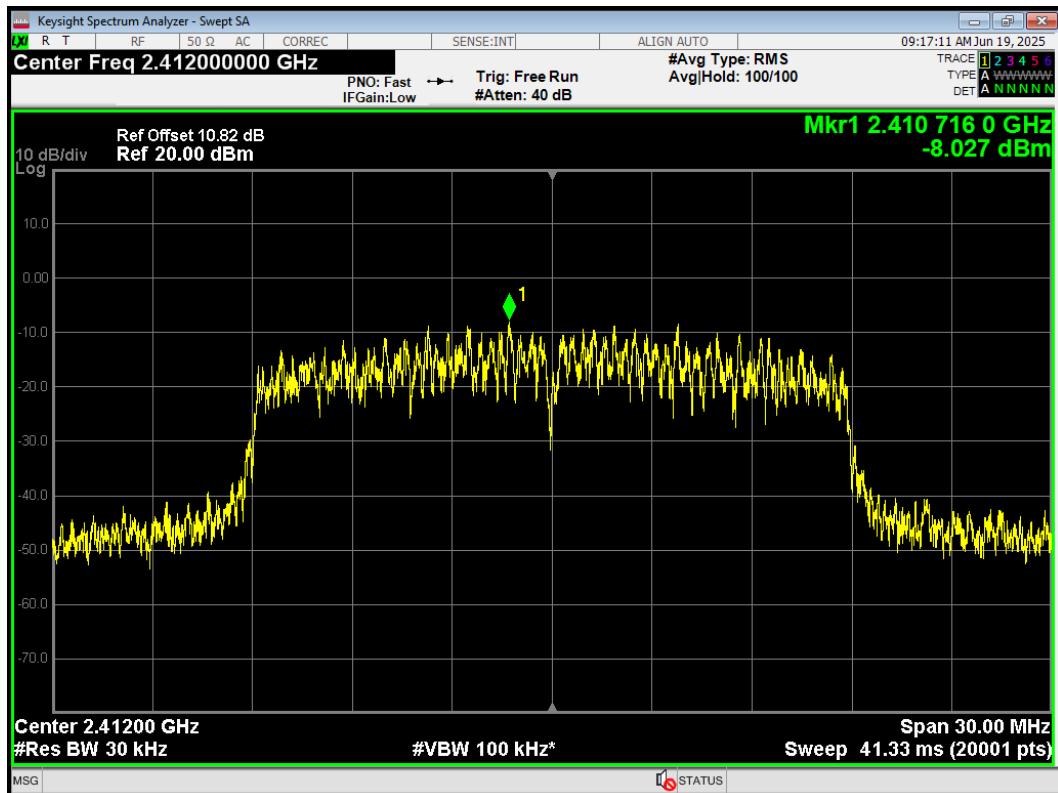


PSD 802.11n(HT20) 2437MHz

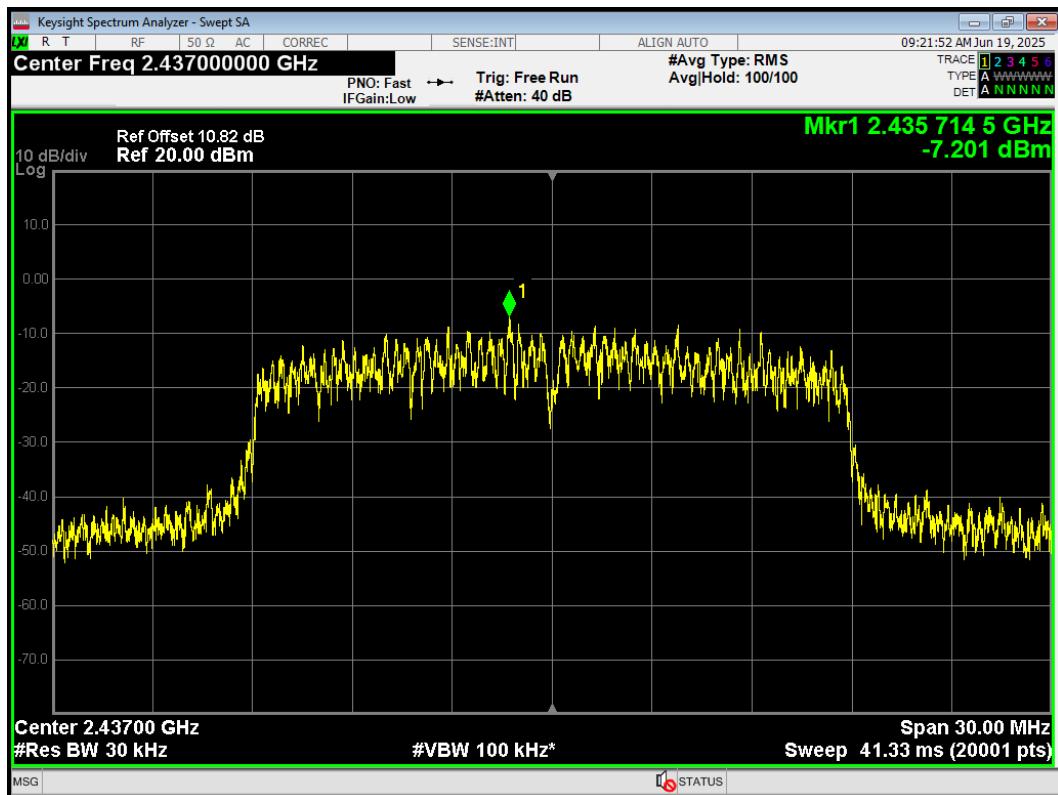


PSD 802.11n(HT20) 2462MHz

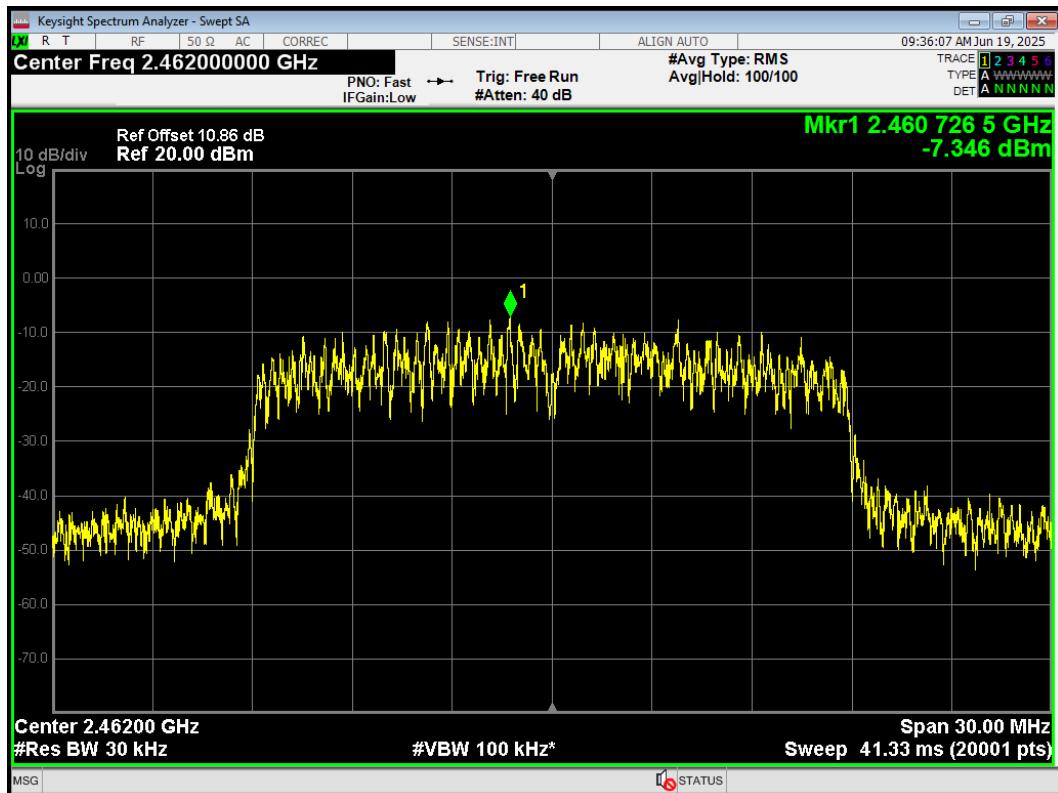


PSD 802.11n(HT40) 2422MHz

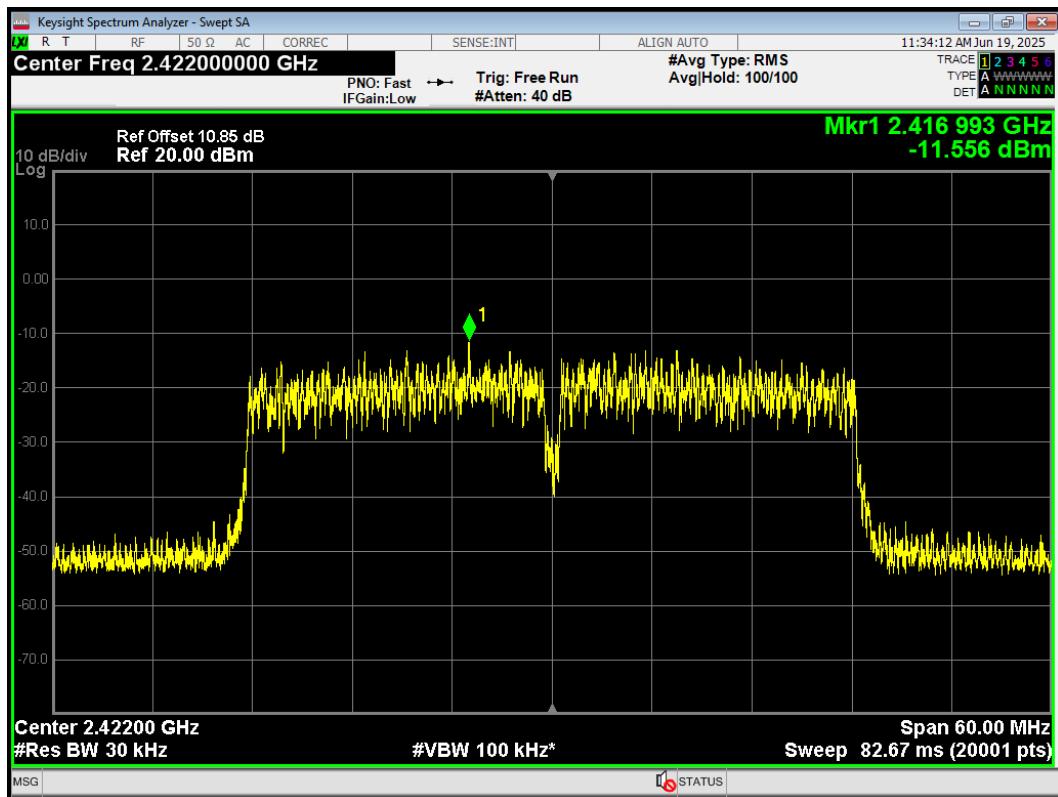

PSD 802.11n(HT40) 2437MHz

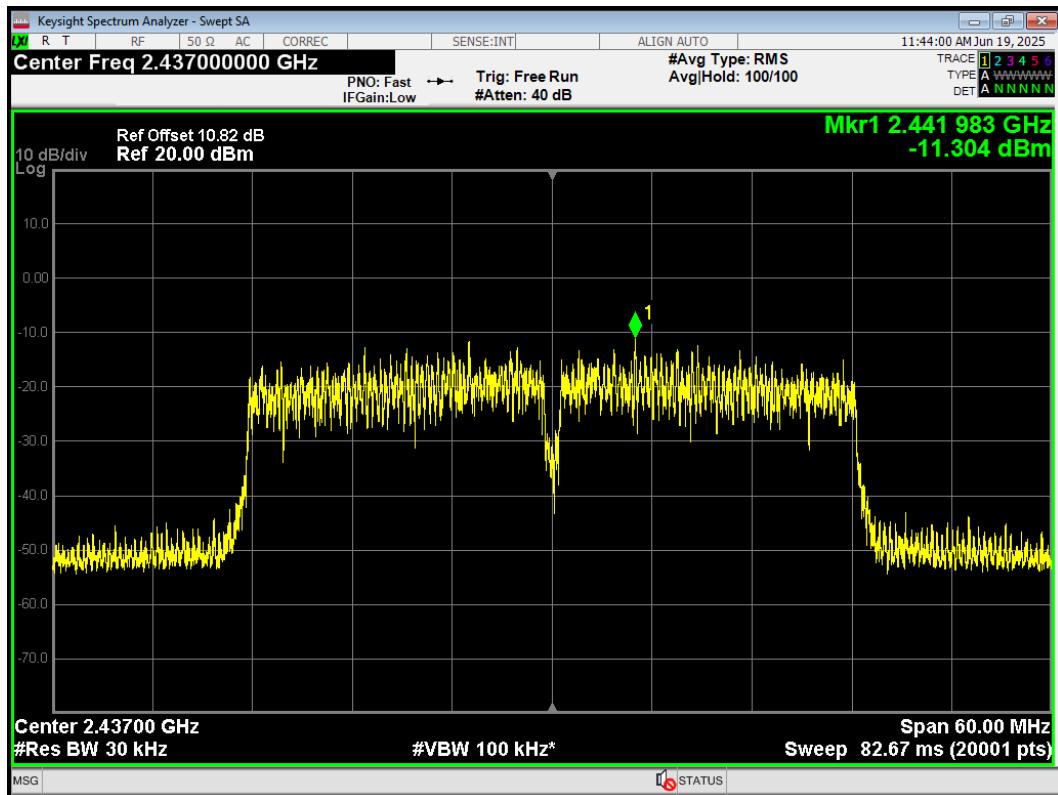


PSD 802.11n(HT40) 2452MHz

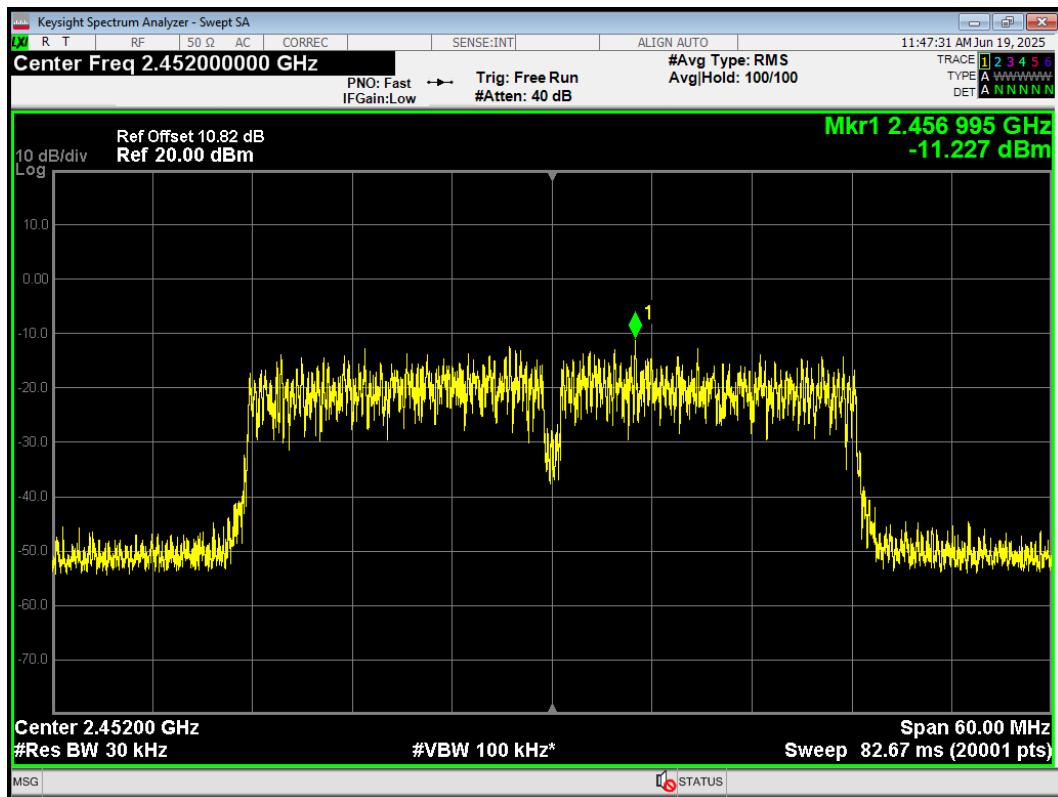


ERSU Mode


PSD 802.11ax HE20 242-Tones 2412MHz

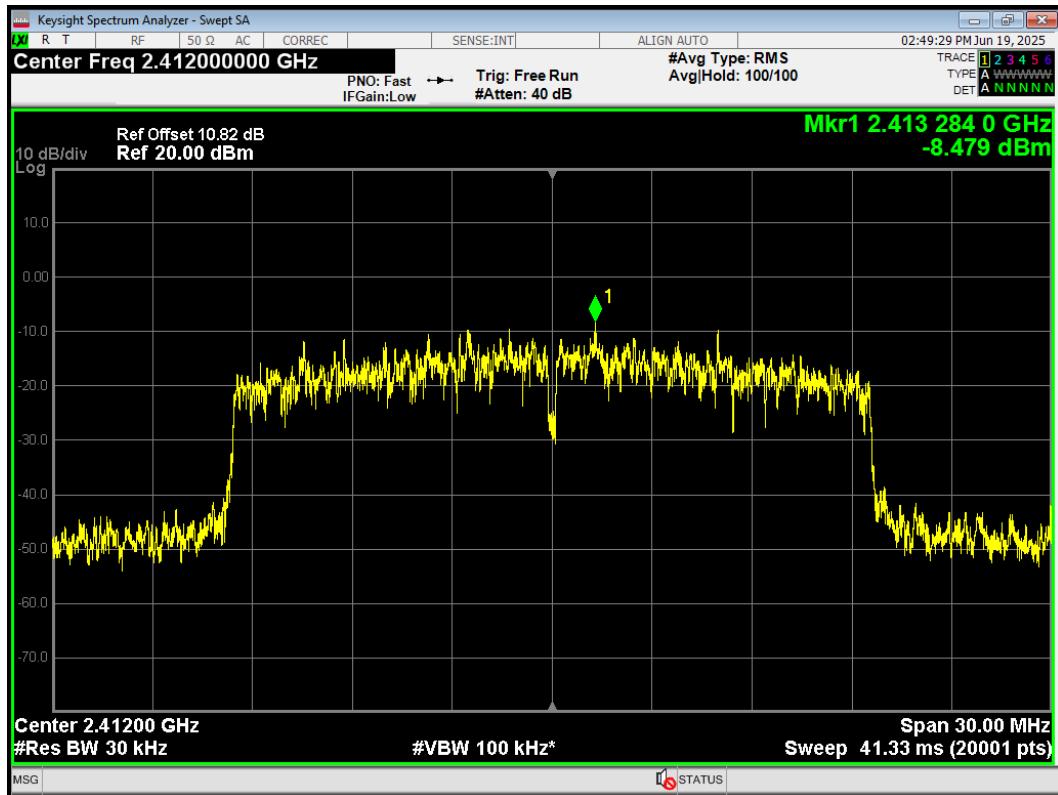

PSD 802.11ax HE20 242-Tones 2437MHz

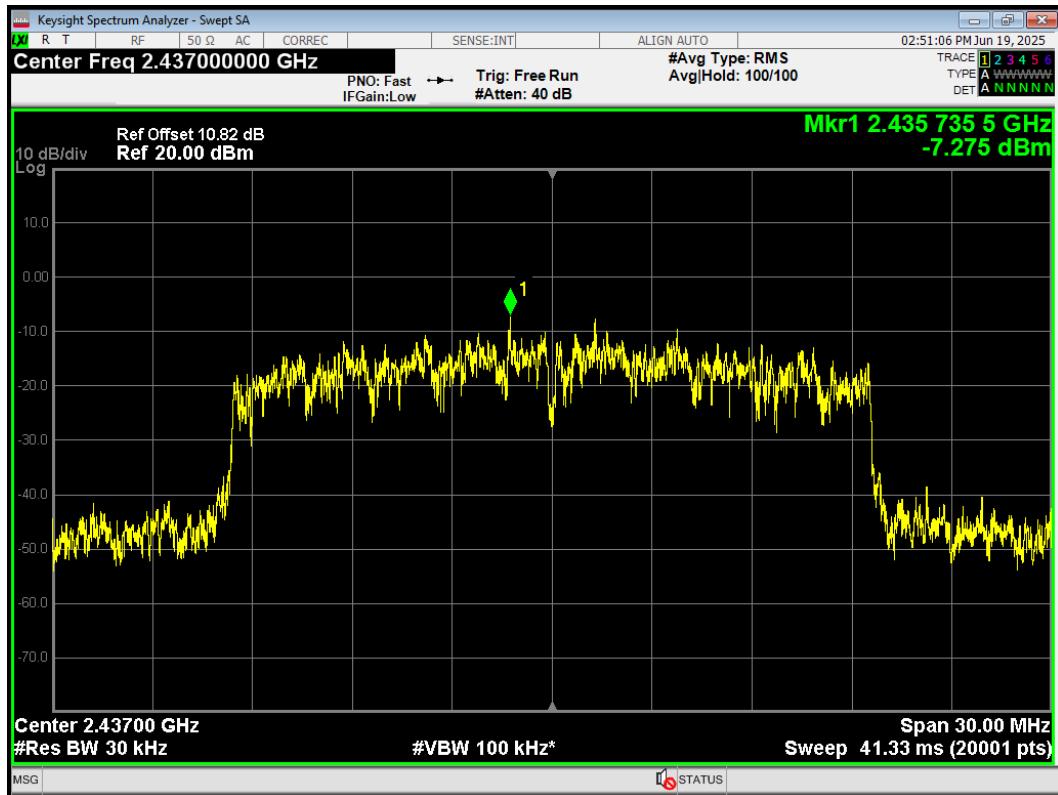

PSD 802.11ax HE20 242-Tones 2462MHz

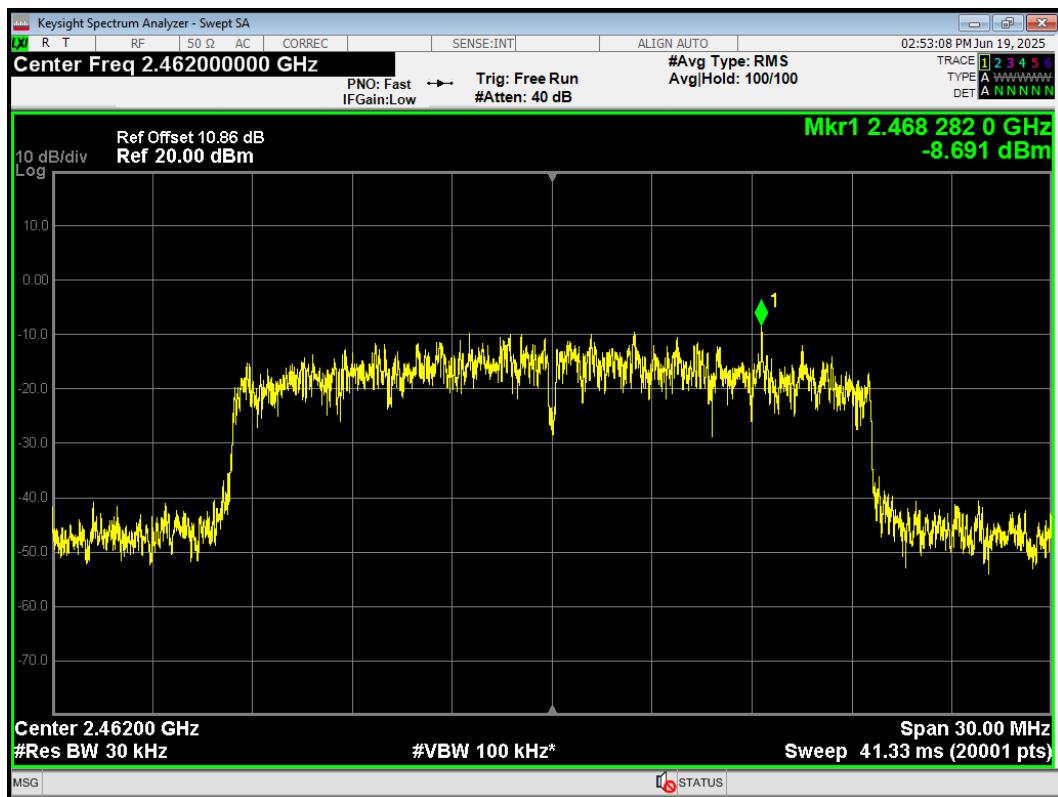

5.5. Spurious RF Conducted Emissions

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to AUTO.

The test is in transmitting mode.

Test Setup

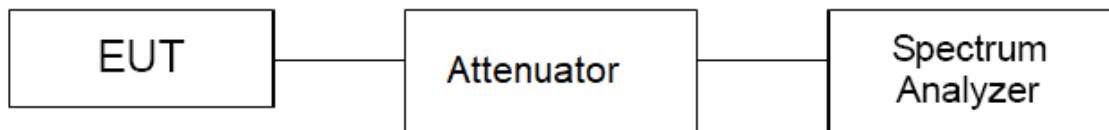

Limits

Rule Part 15.247(d) pacifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. "

Bluetooth LE

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
Bluetooth (Low Energy) (1M)	2402	1.780	-28.22
	2440	2.060	-27.94
	2480	1.770	-28.23
Bluetooth (Low Energy) (2M)	2402	1.440	-28.56
	2440	1.760	-28.24
	2480	1.270	-28.73

SU Mode

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	10.540	-19.46
	2437	10.590	-19.41
	2462	11.060	-18.94
802.11g	2412	9.270	-20.73
	2437	10.050	-19.95
	2462	11.100	-18.90
802.11n HT20	2412	10.460	-19.54
	2437	10.920	-19.08
	2462	11.700	-18.30
802.11n HT40	2422	6.410	-23.59
	2437	6.730	-23.27
	2452	6.360	-23.64
802.11ax HE20	2412	8.620	-21.38
	2437	10.040	-19.96
	2462	11.270	-18.73
802.11ax HE40	2422	5.410	-24.59
	2437	5.540	-24.46
	2452	5.490	-24.51



ERSU Mode



Test Mode	Carrier frequency (MHz)	RU Index	Reference value (dBm)	Limit
802.11ax HE20 242-Tones	2412	61	12.410	-17.59
	2437	61	13.300	-16.70
	2462	61	13.510	-16.49



Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

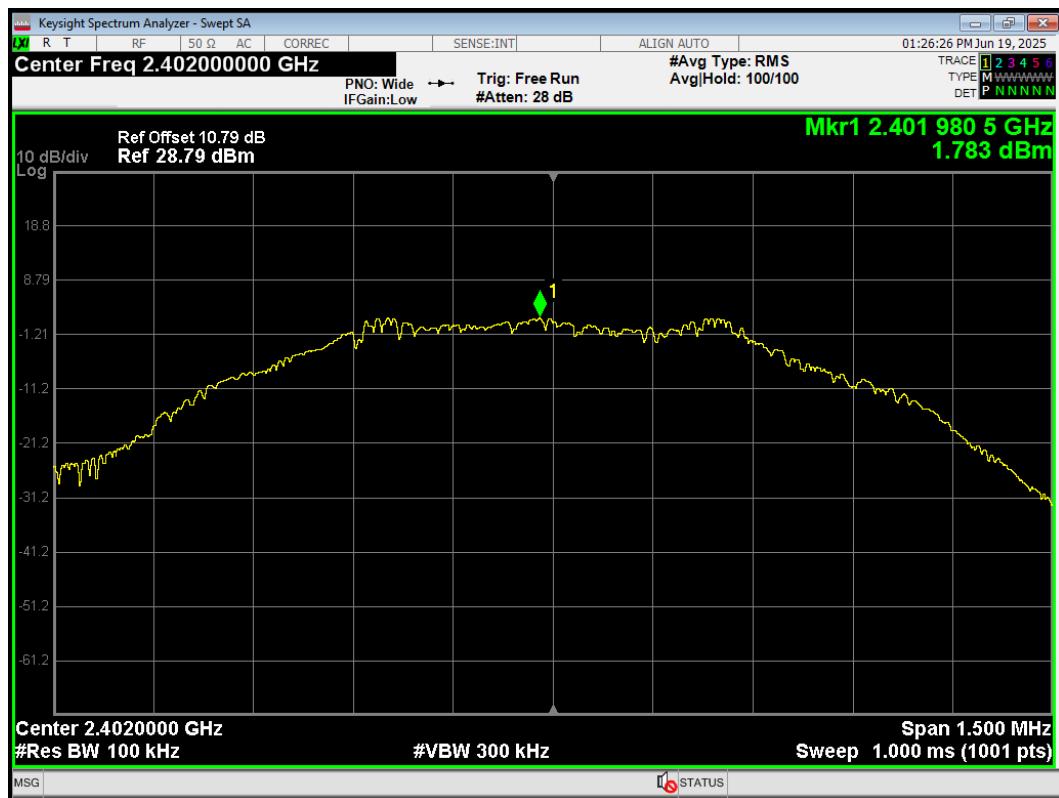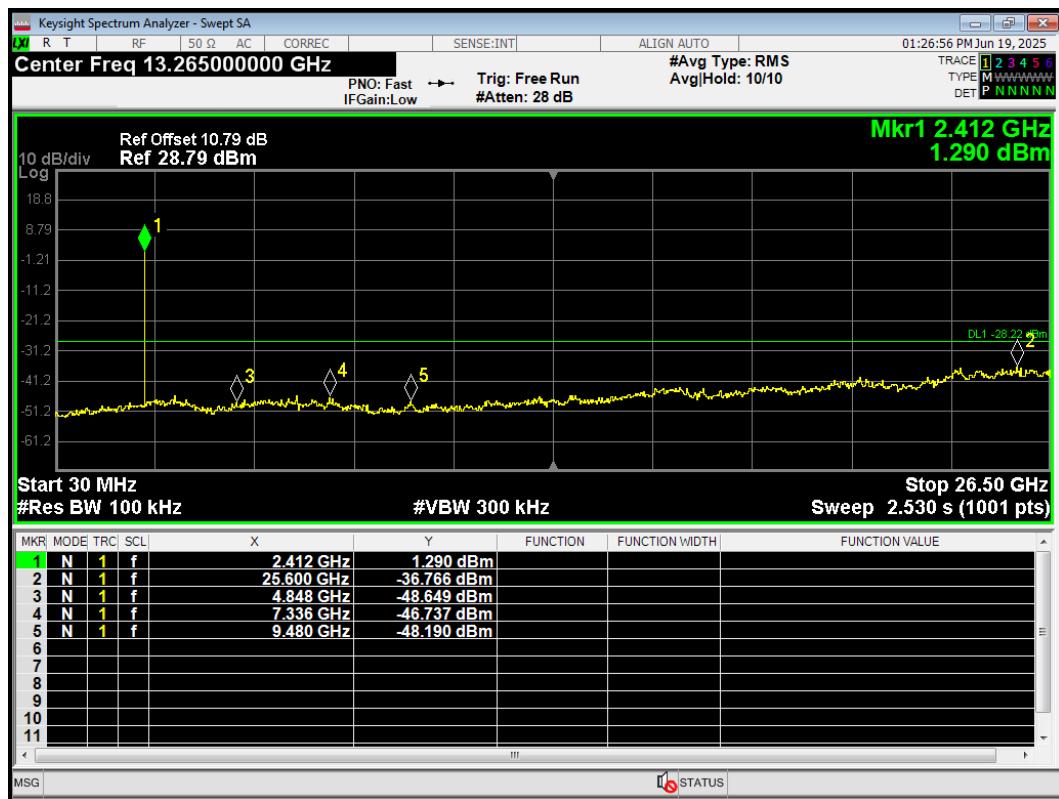Test Results:**Bluetooth LE****Tx. Spurious BLE (1M) 2402MHz Ref****Tx. Spurious BLE (1M) 2402MHz Emission**

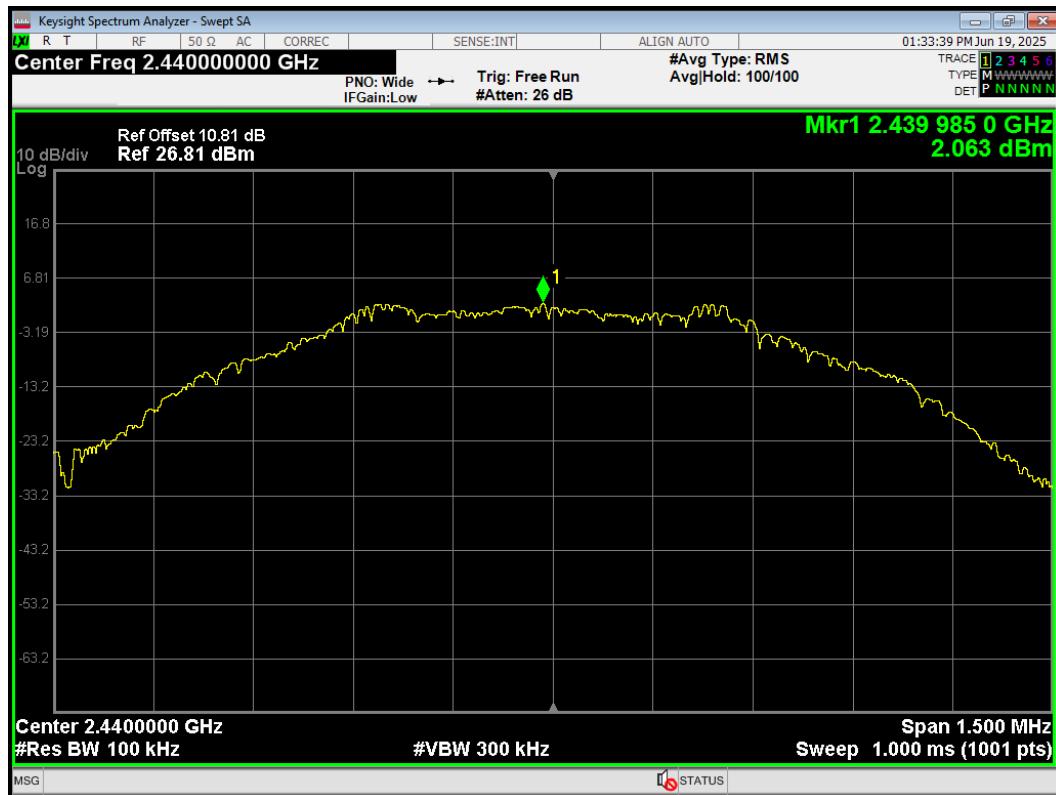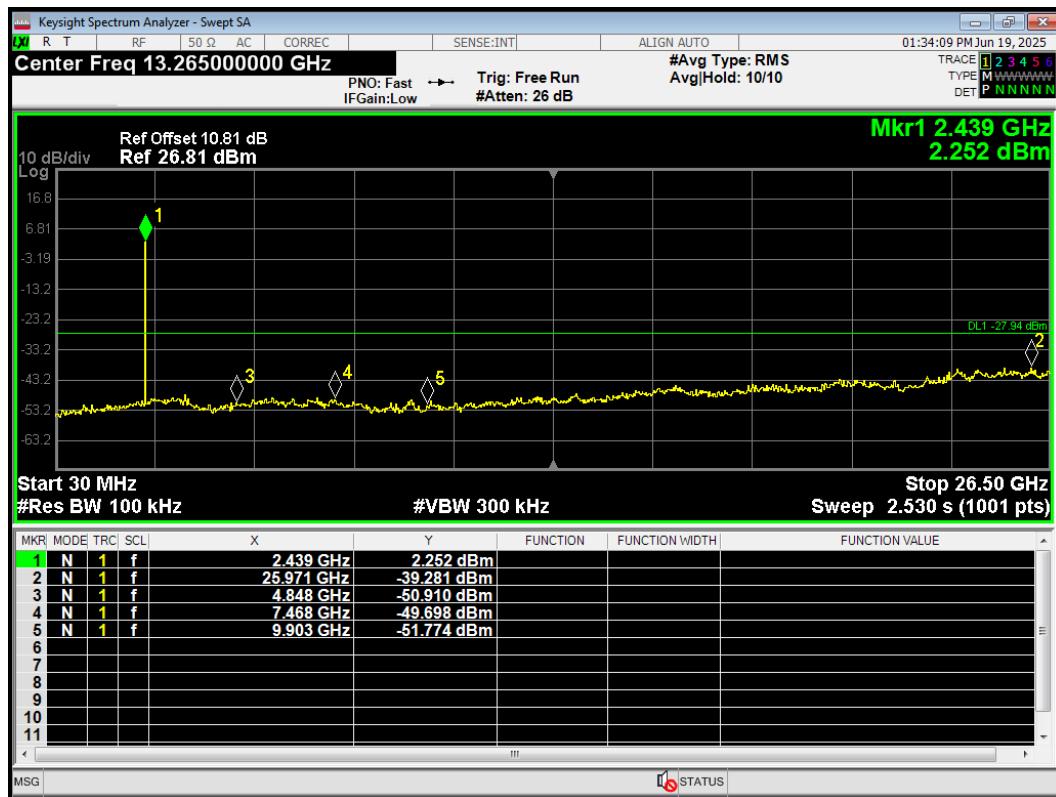
Tx. Spurious BLE (1M) 2440MHz Ref

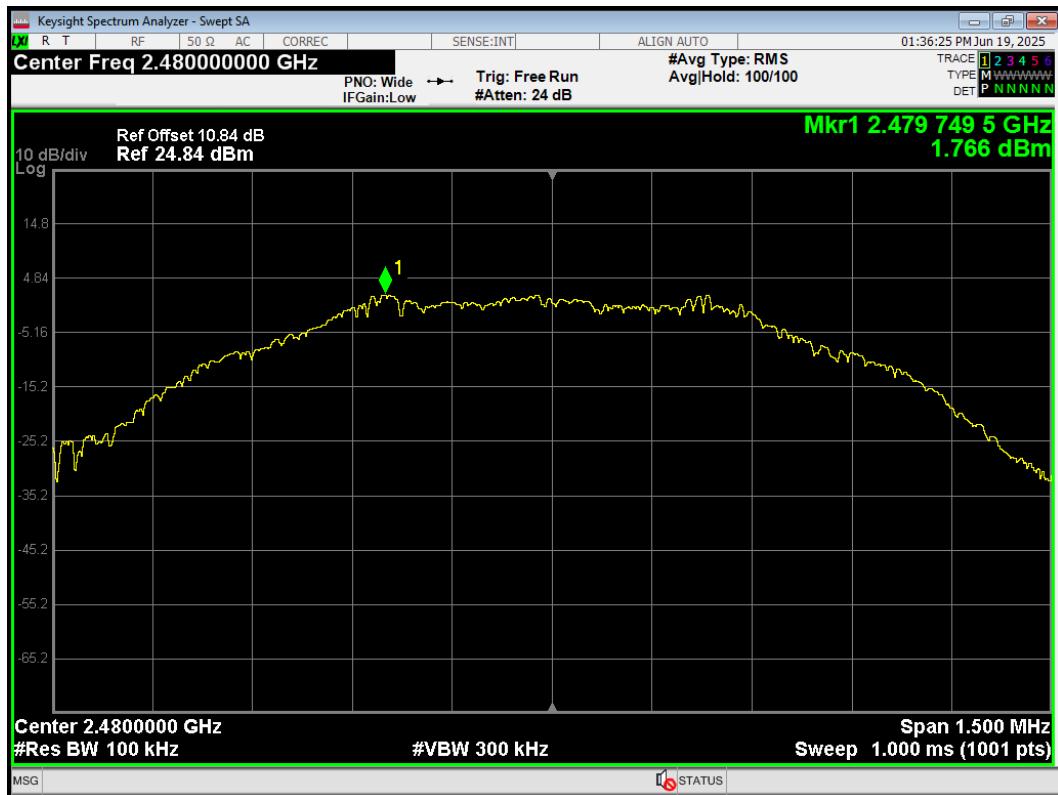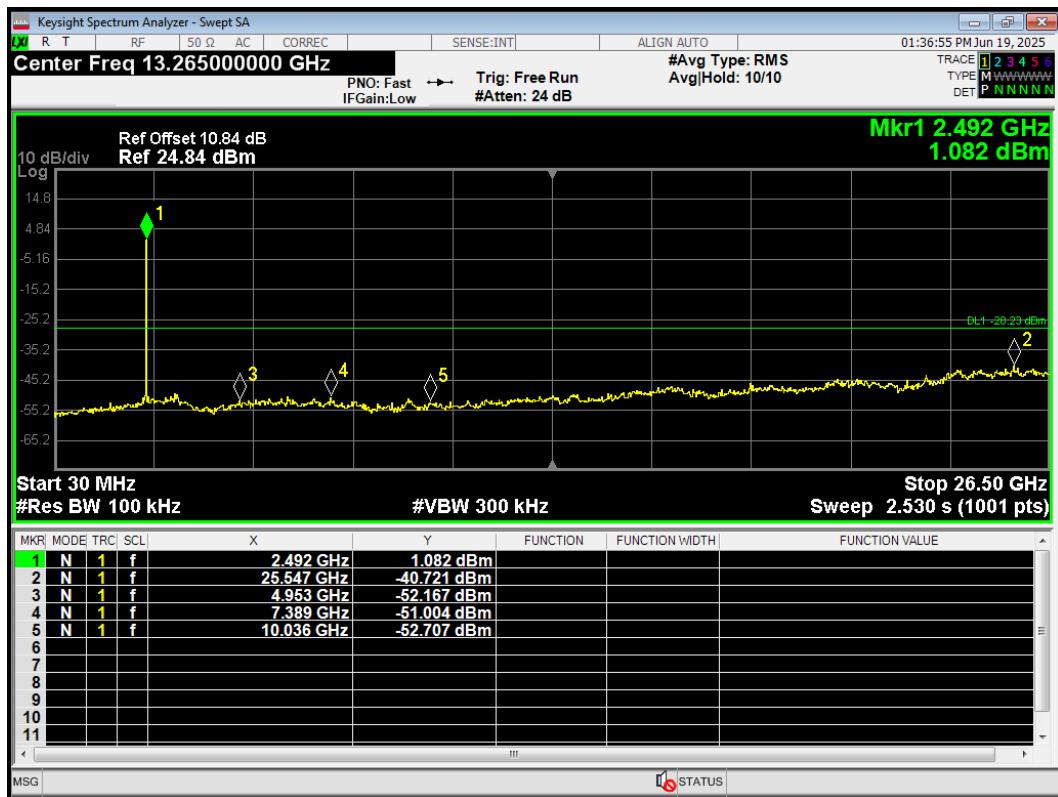Tx. Spurious BLE (1M) 2440MHz Emission


Tx. Spurious BLE (1M) 2480MHz Ref

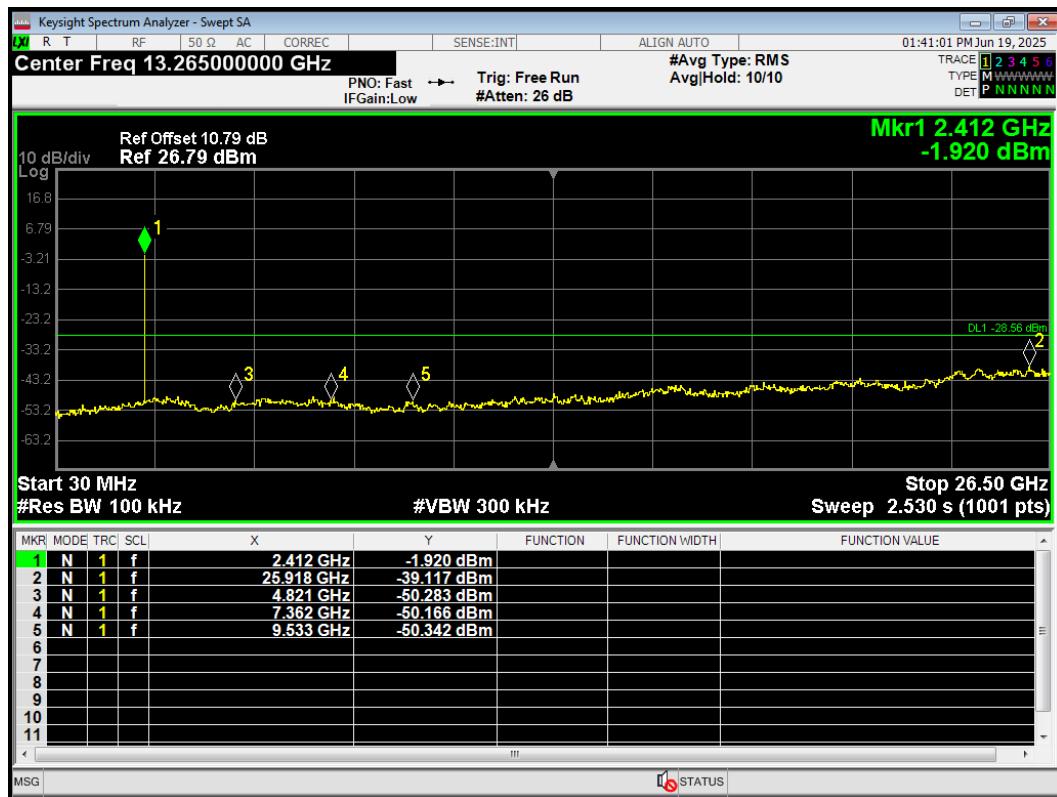Tx. Spurious BLE (1M) 2480MHz Emission


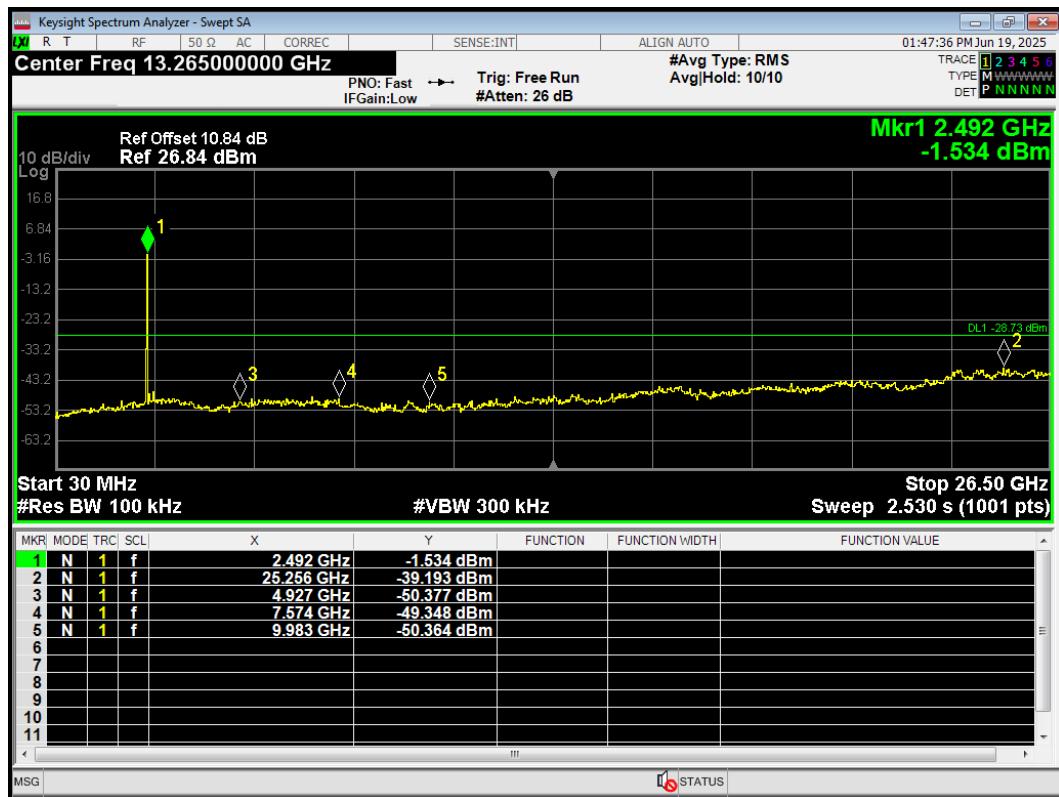
Tx. Spurious BLE (2M) 2402MHz Ref

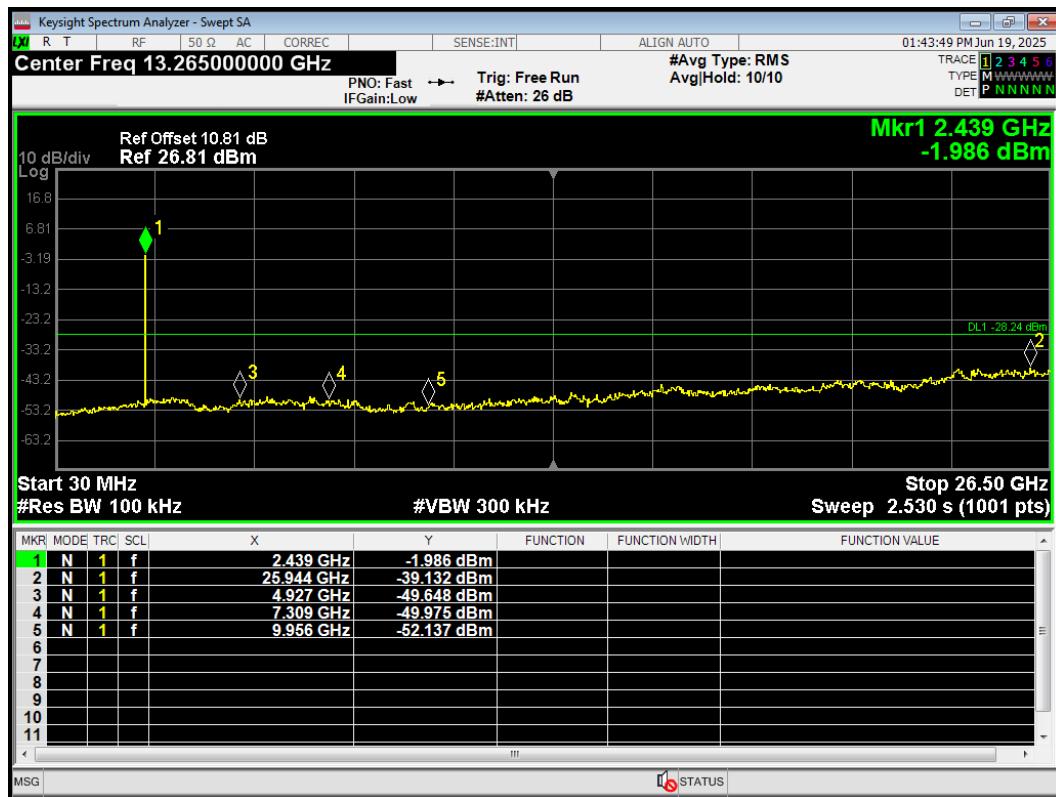Tx. Spurious BLE (2M) 2402MHz Emission


Tx. Spurious BLE (2M) 2440MHz Ref


Tx. Spurious BLE (2M) 2440MHz Emission


Tx. Spurious BLE (2M) 2480MHz Ref


Tx. Spurious BLE (2M) 2480MHz Emission


SU Mode


Tx. Spurious 802.11ax(HE20) 2412MHz Ref

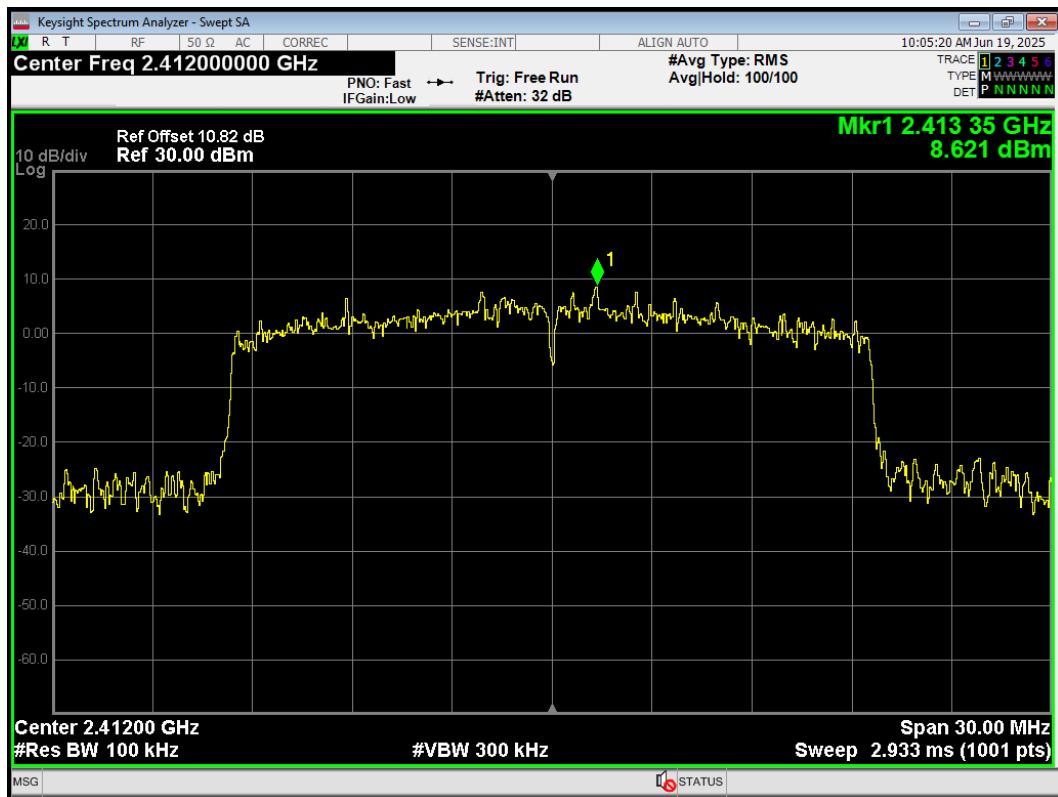


Tx. Spurious 802.11ax(HE20) 2412MHz Emission

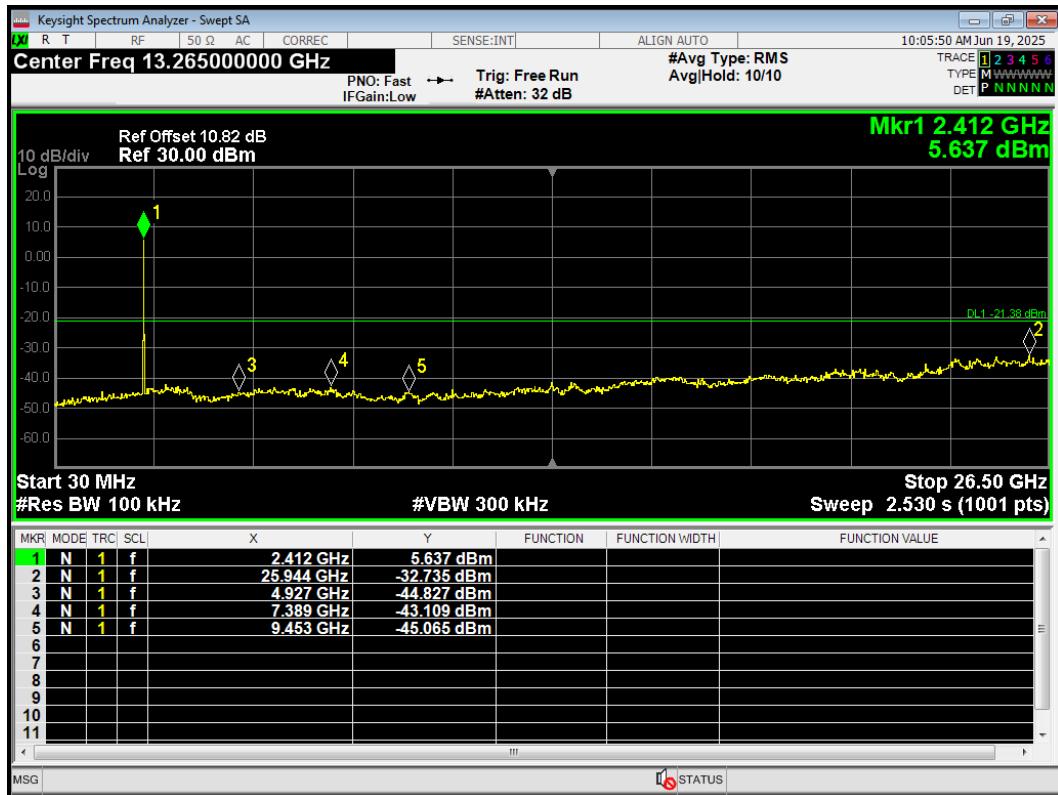


Tx. Spurious 802.11ax(HE20) 2437MHz Ref

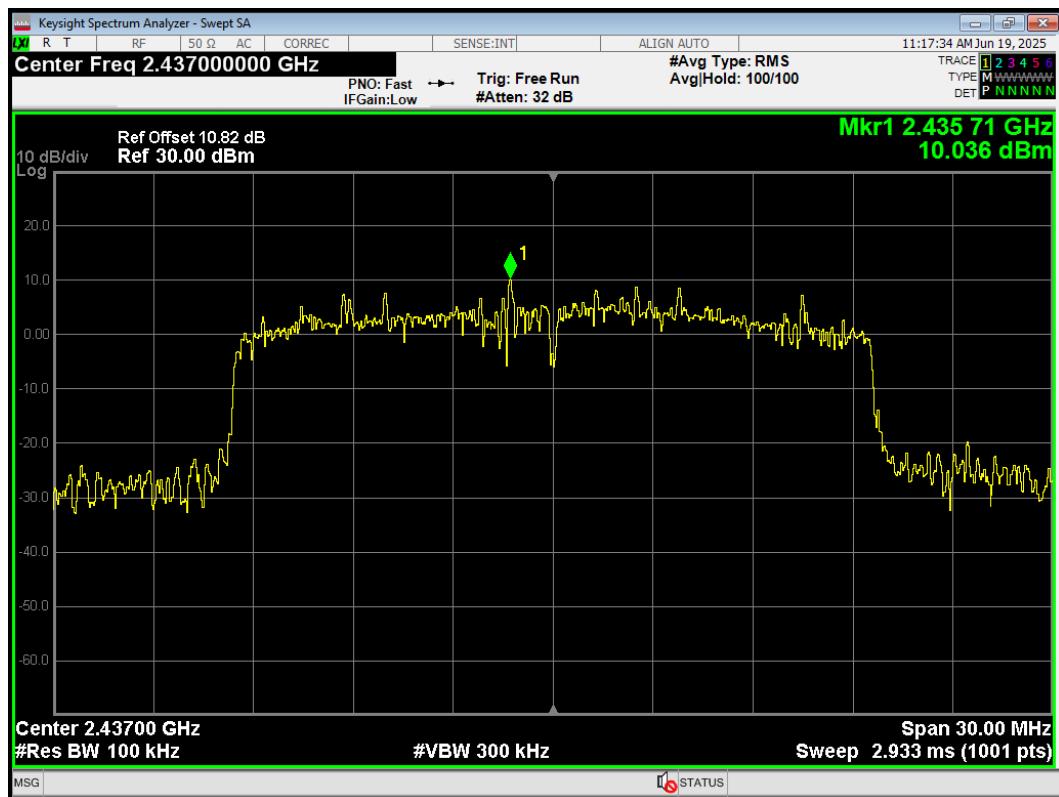


Tx. Spurious 802.11ax(HE20) 2437MHz Emission

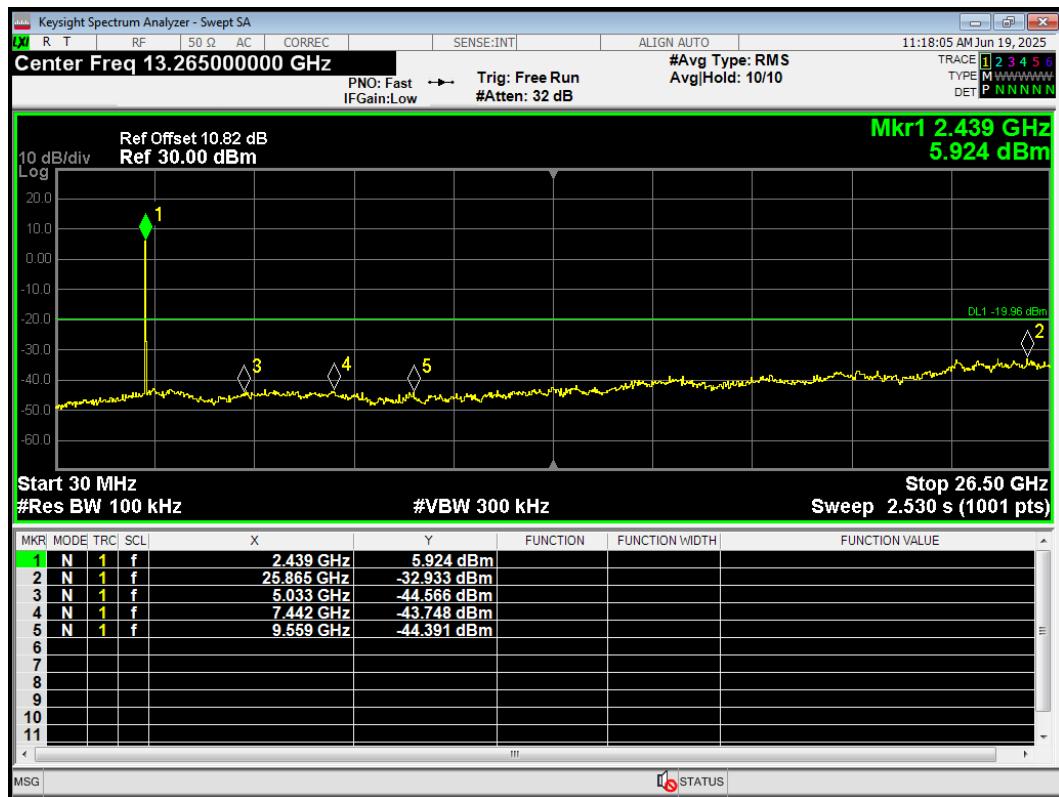


Tx. Spurious 802.11ax(HE20) 2462MHz Ref

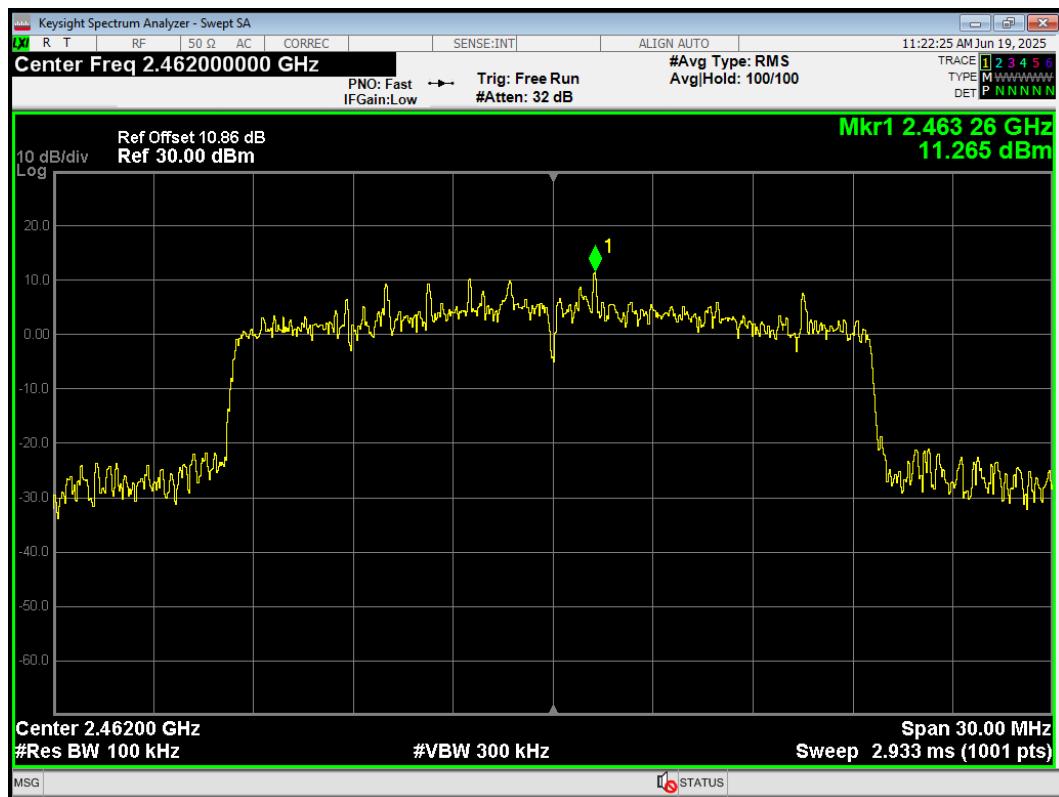


Tx. Spurious 802.11ax(HE20) 2462MHz Emission


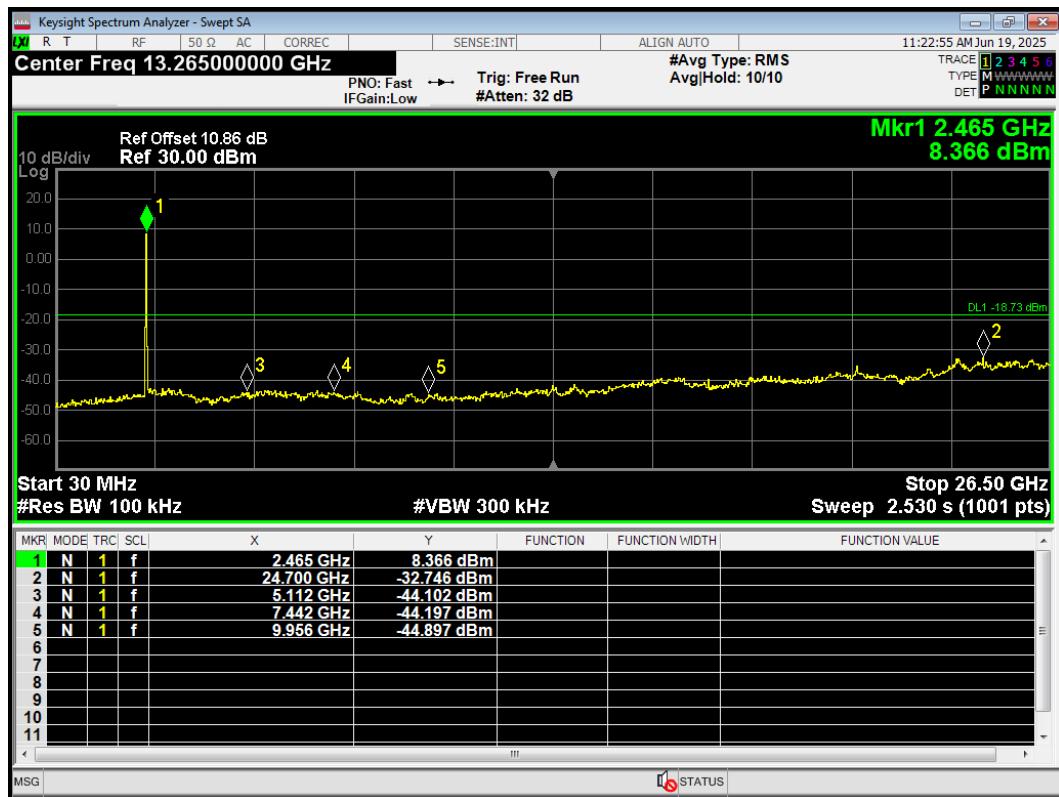




Tx. Spurious 802.11ax(HE40) 2422MHz Ref


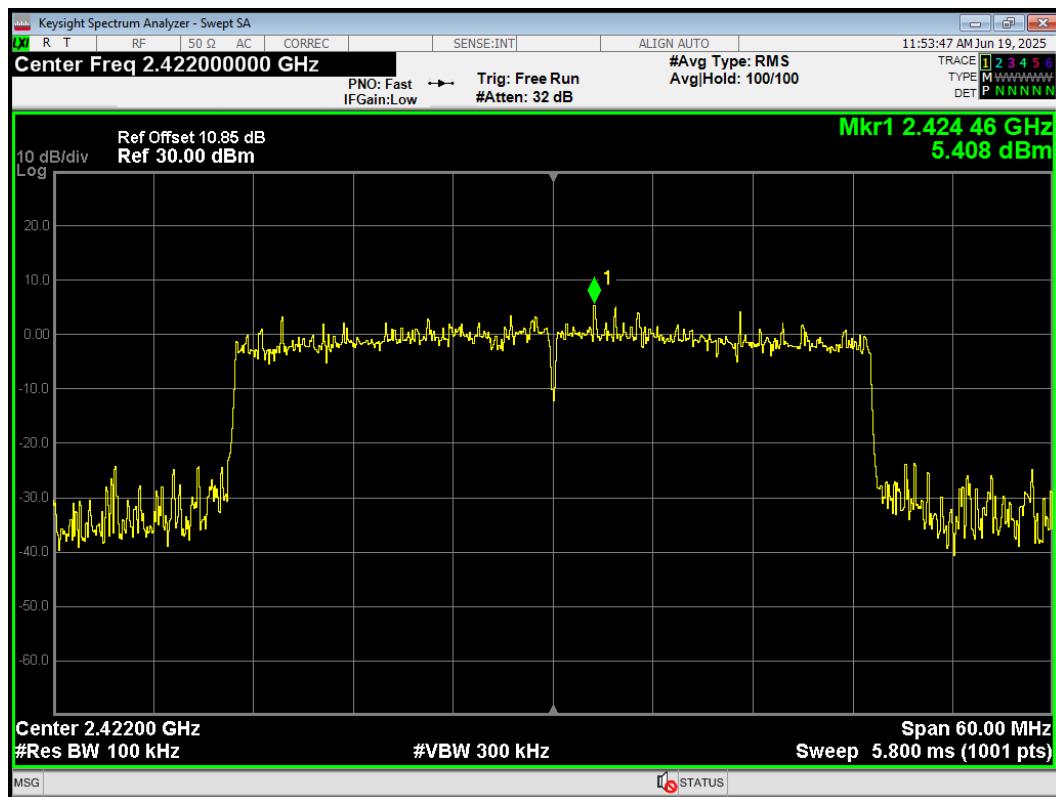


Tx. Spurious 802.11ax(HE40) 2422MHz Emission

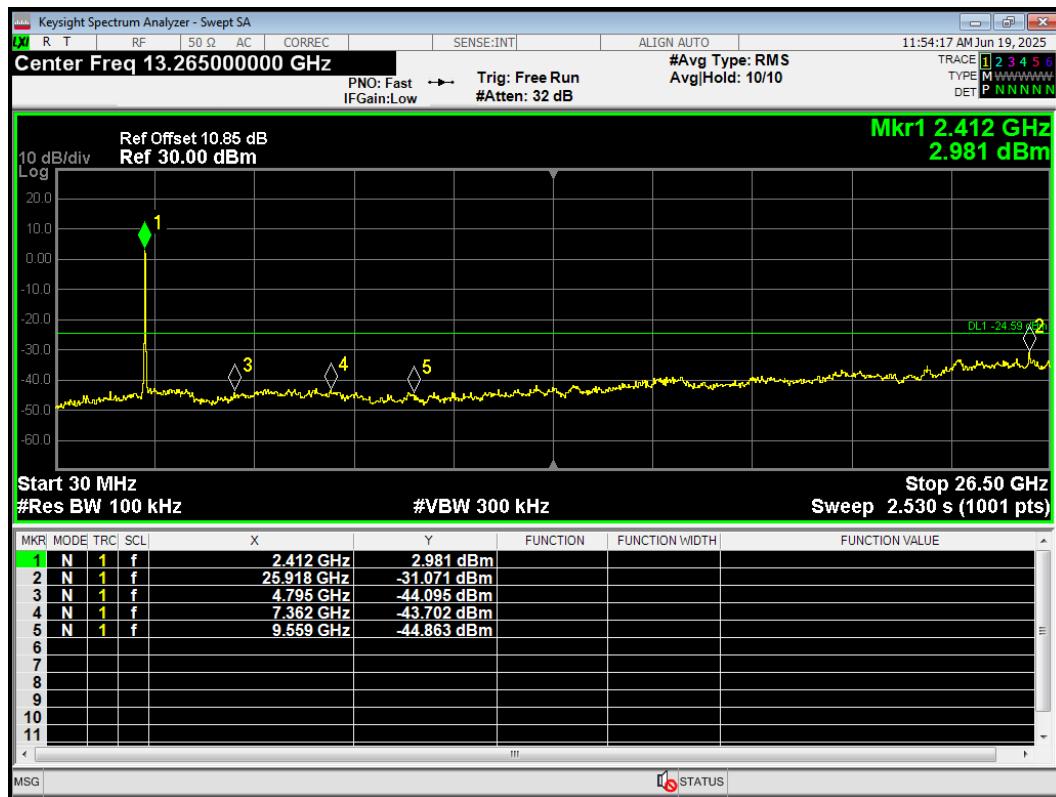


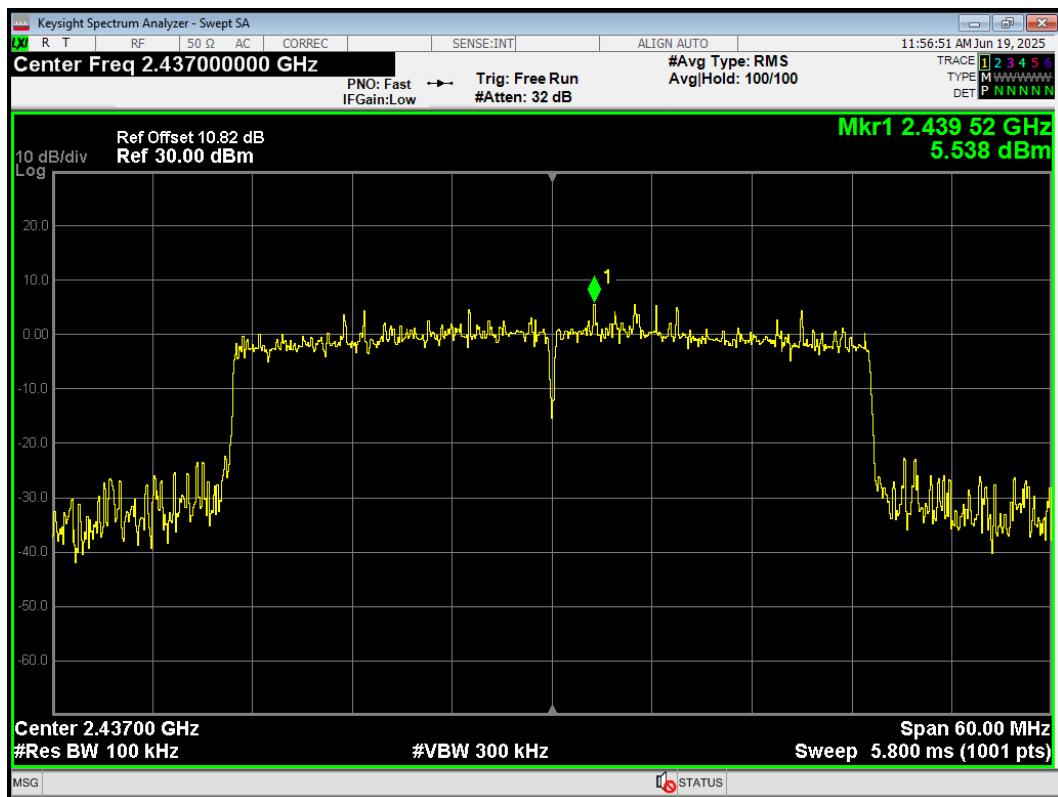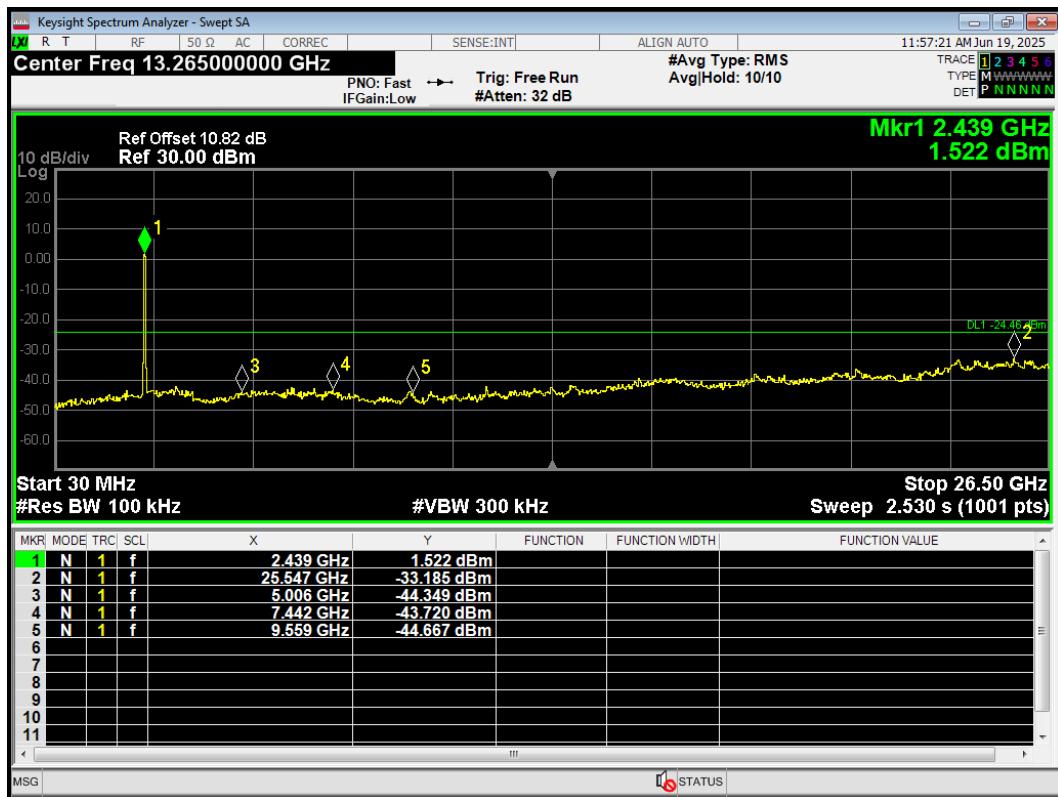Tx. Spurious 802.11ax(HE40) 2437MHz Ref

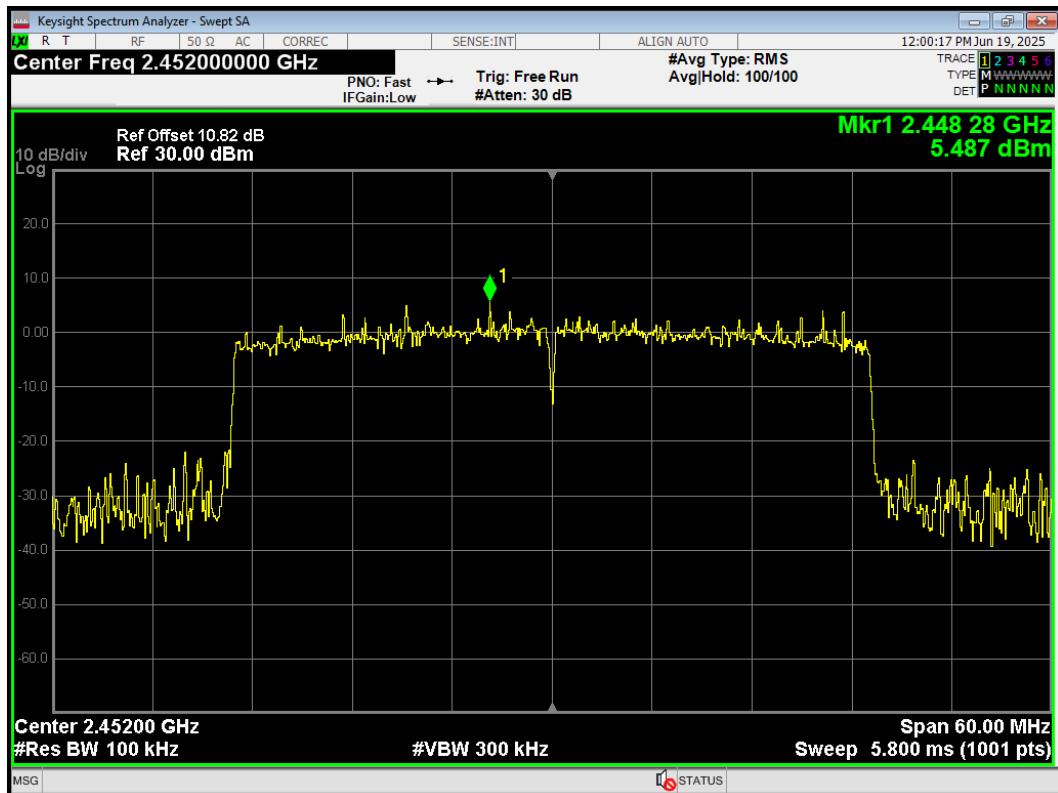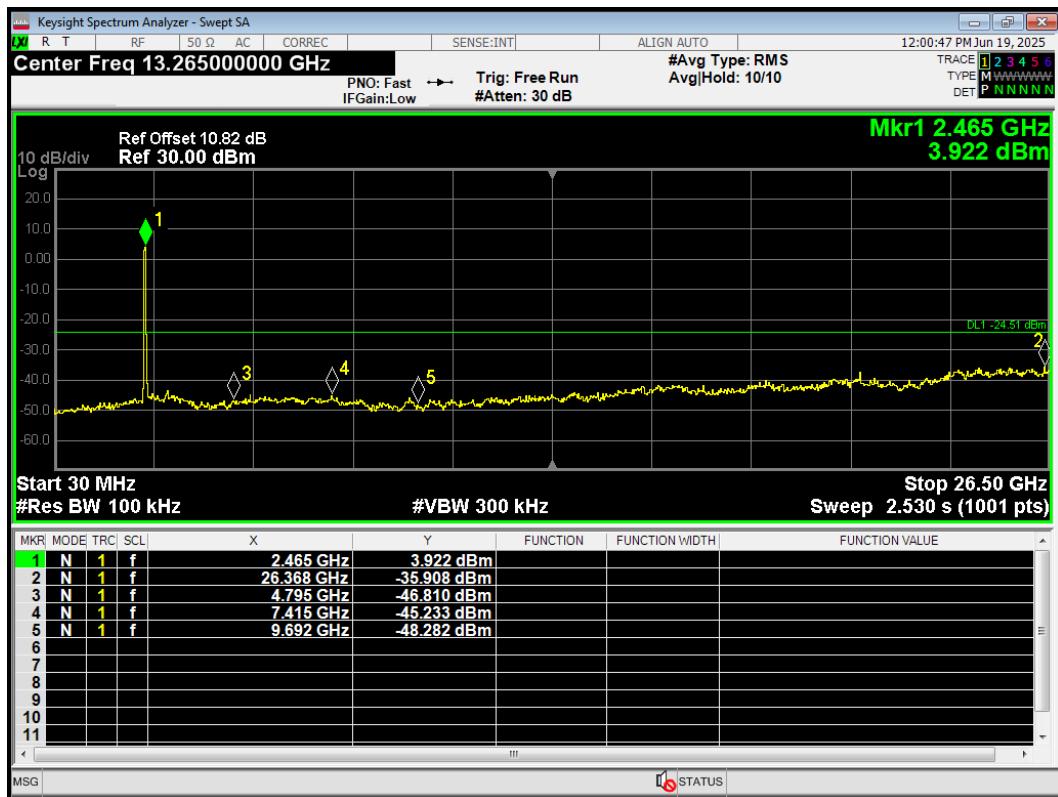Tx. Spurious 802.11ax(HE40) 2437MHz Emission

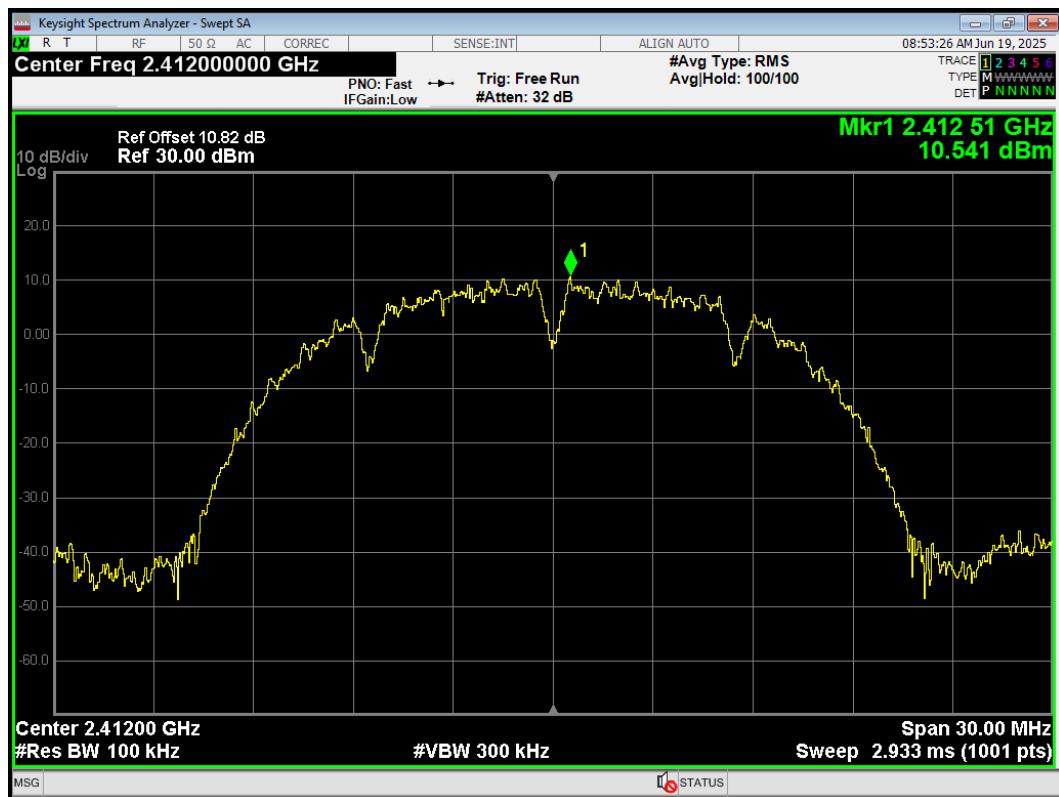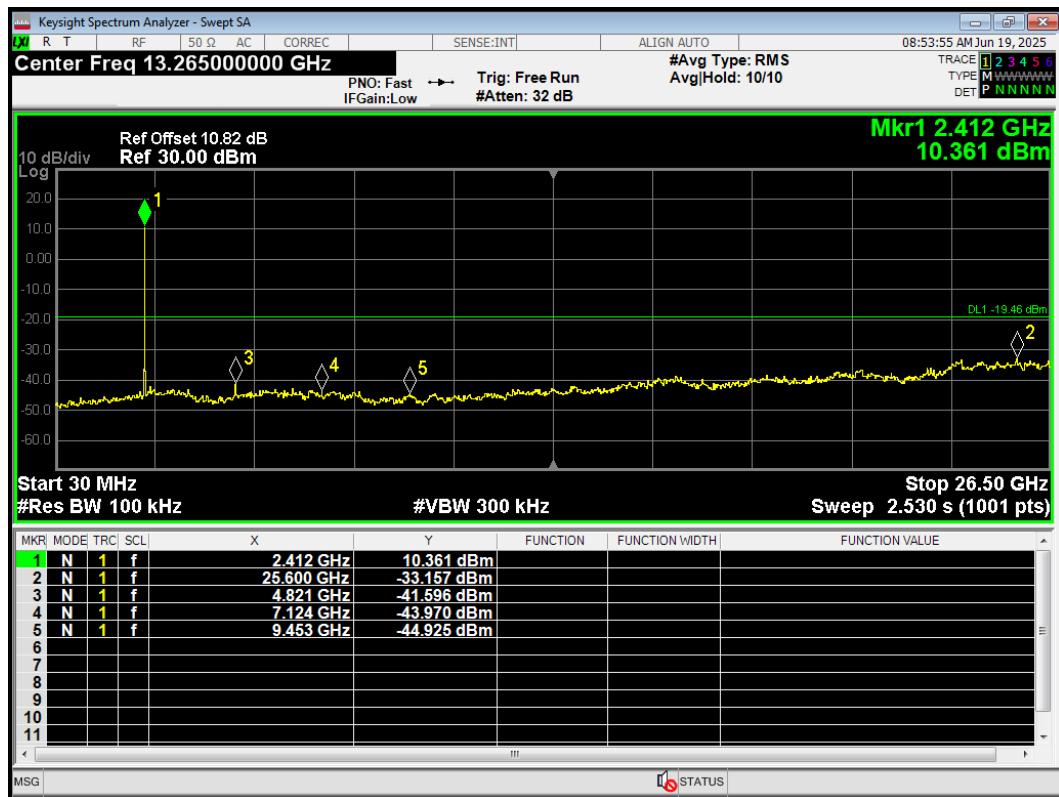
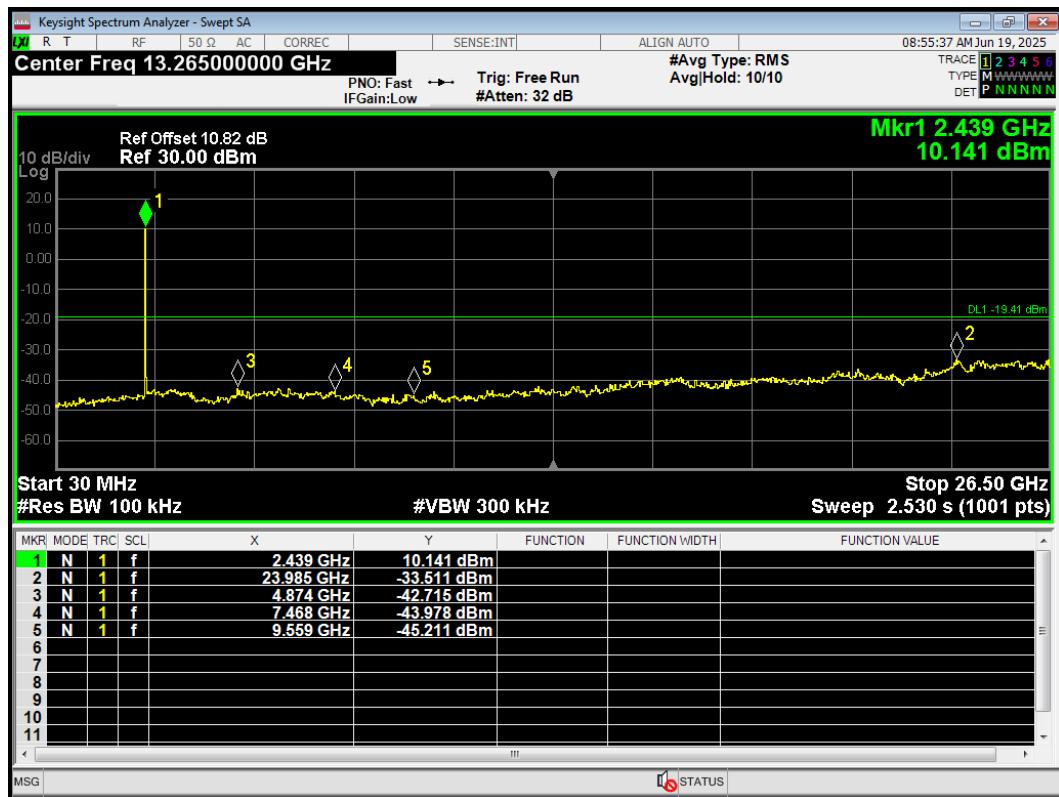
Tx. Spurious 802.11ax(HE40) 2452MHz Ref

Tx. Spurious 802.11ax(HE40) 2452MHz Emission

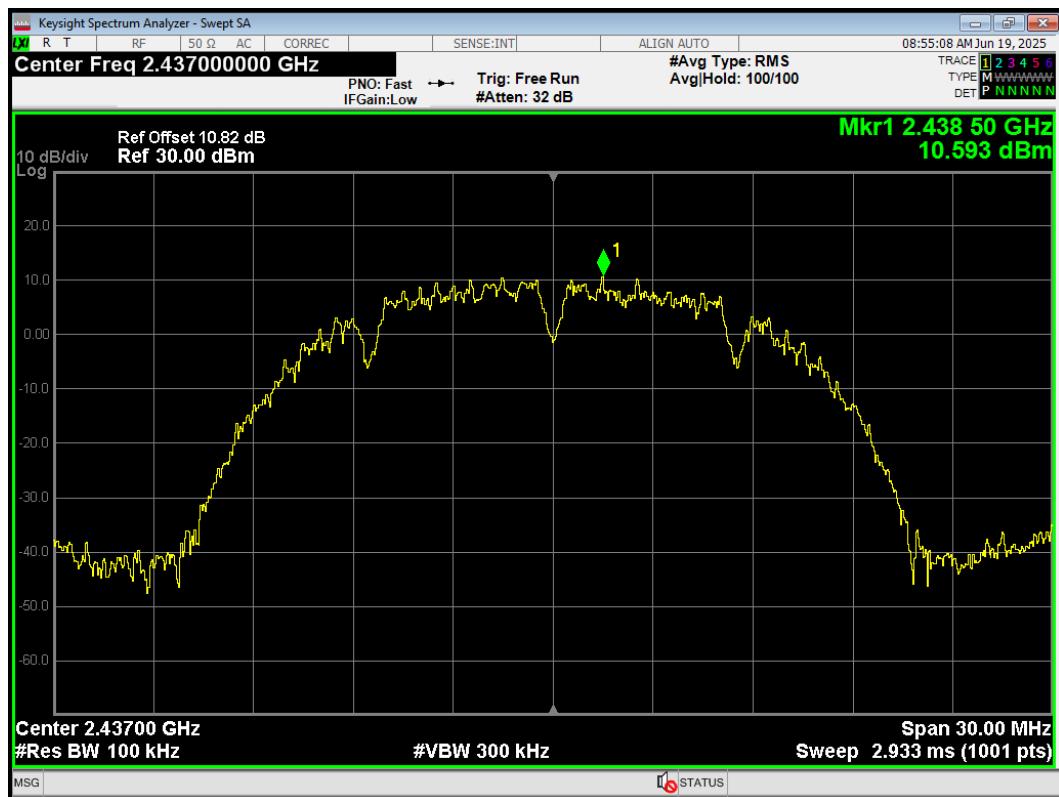
Tx. Spurious 802.11b 2412MHz Ref

Tx. Spurious 802.11b 2412MHz Emission


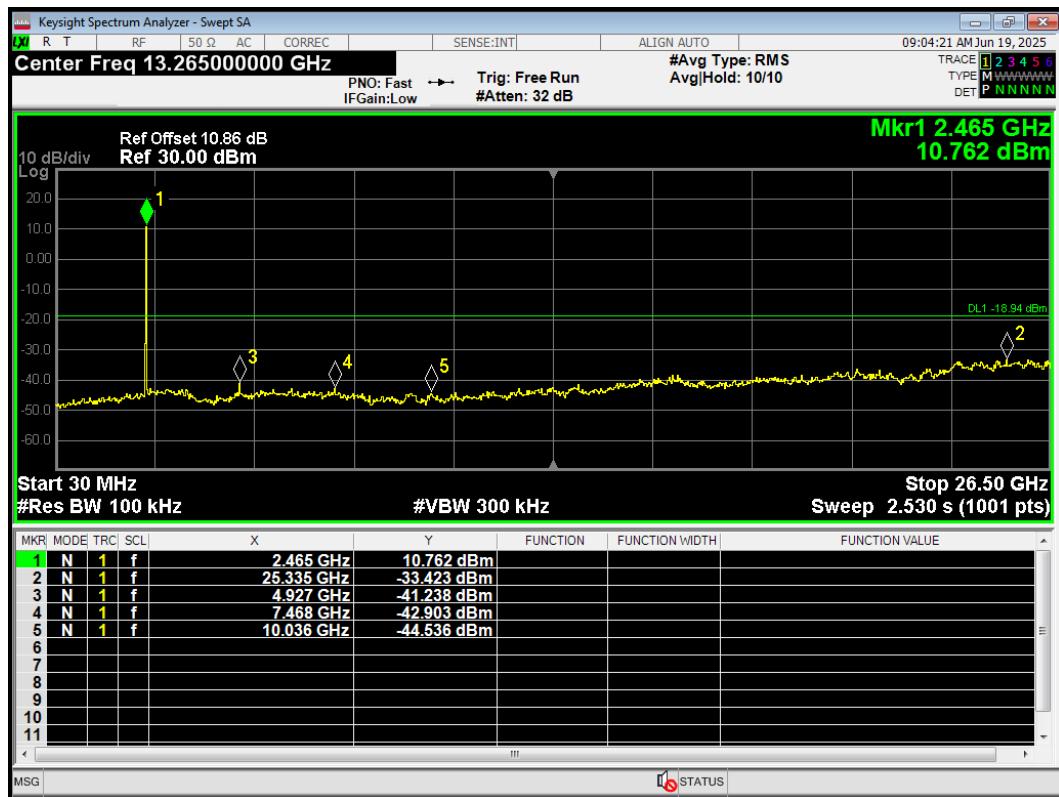
Tx. Spurious 802.11b 2437MHz Ref




Tx. Spurious 802.11b 2437MHz Emission




Tx. Spurious 802.11b 2462MHz Ref

Tx. Spurious 802.11b 2462MHz Emission


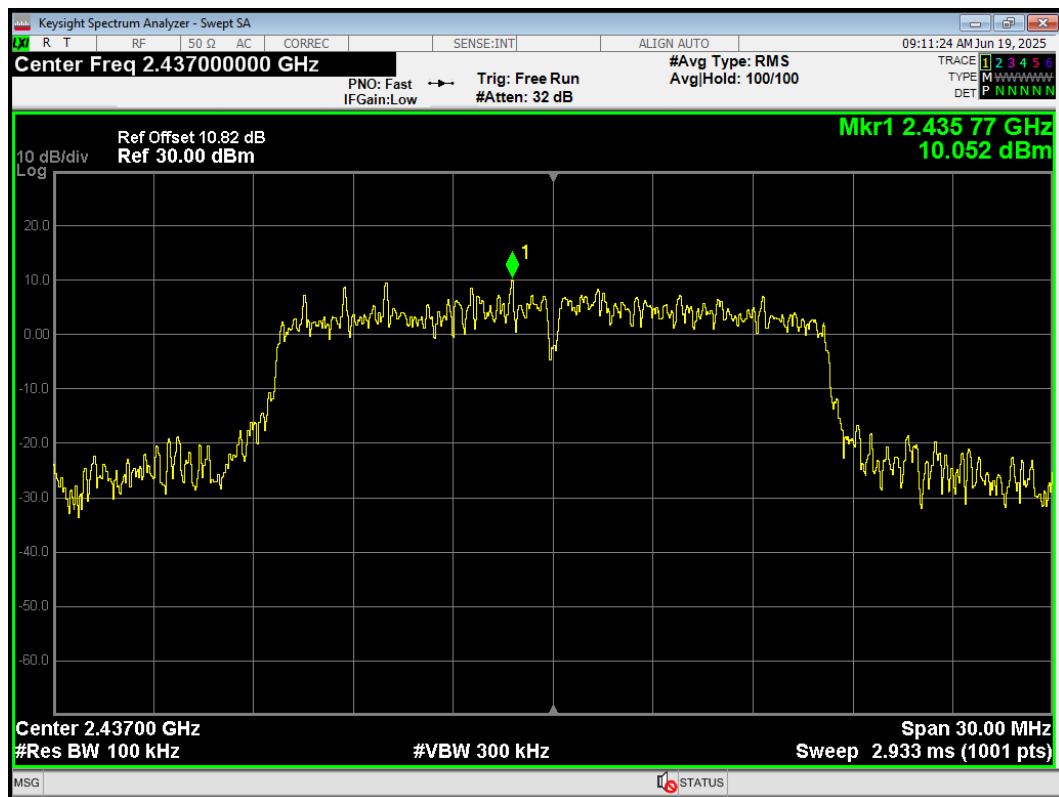
Tx. Spurious 802.11g 2412MHz Ref

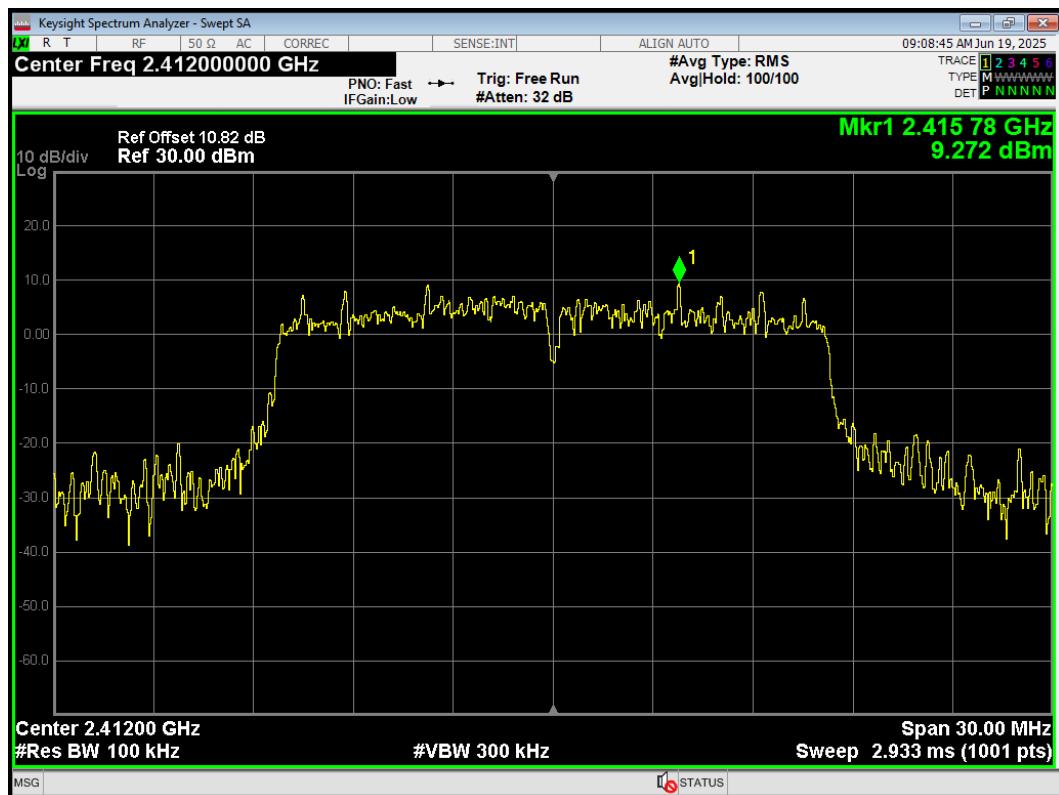


Tx. Spurious 802.11g 2412MHz Emission

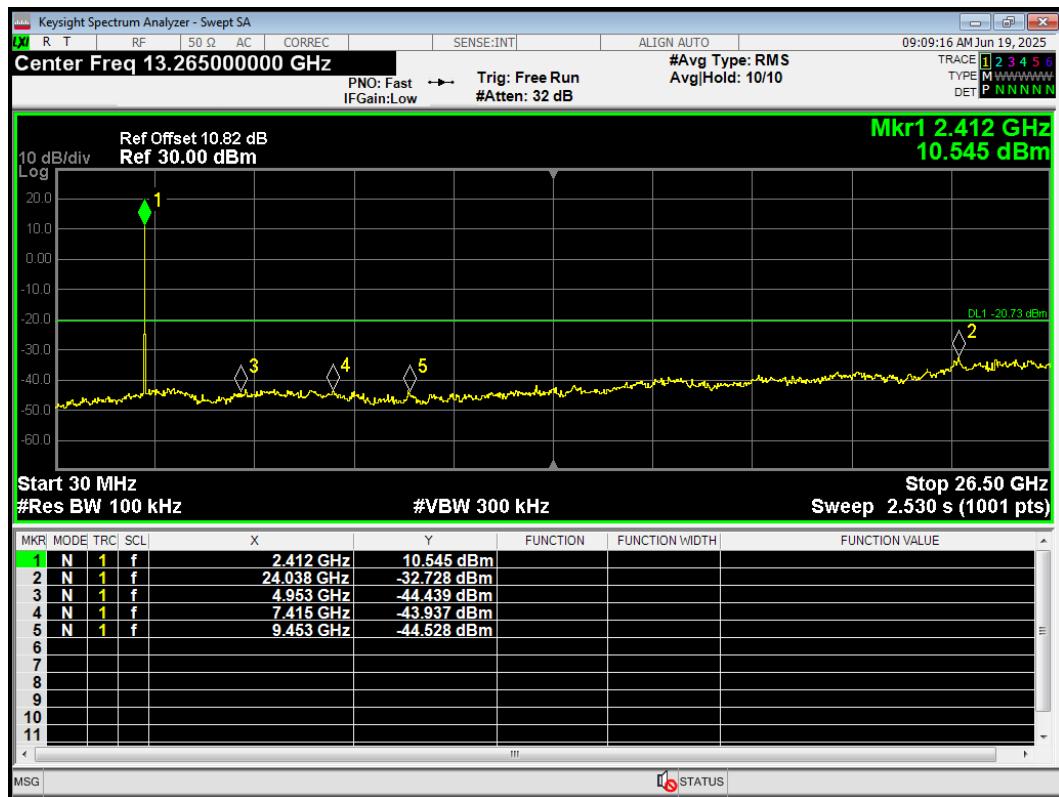


Tx. Spurious 802.11g 2437MHz Ref



Tx. Spurious 802.11g 2437MHz Emission

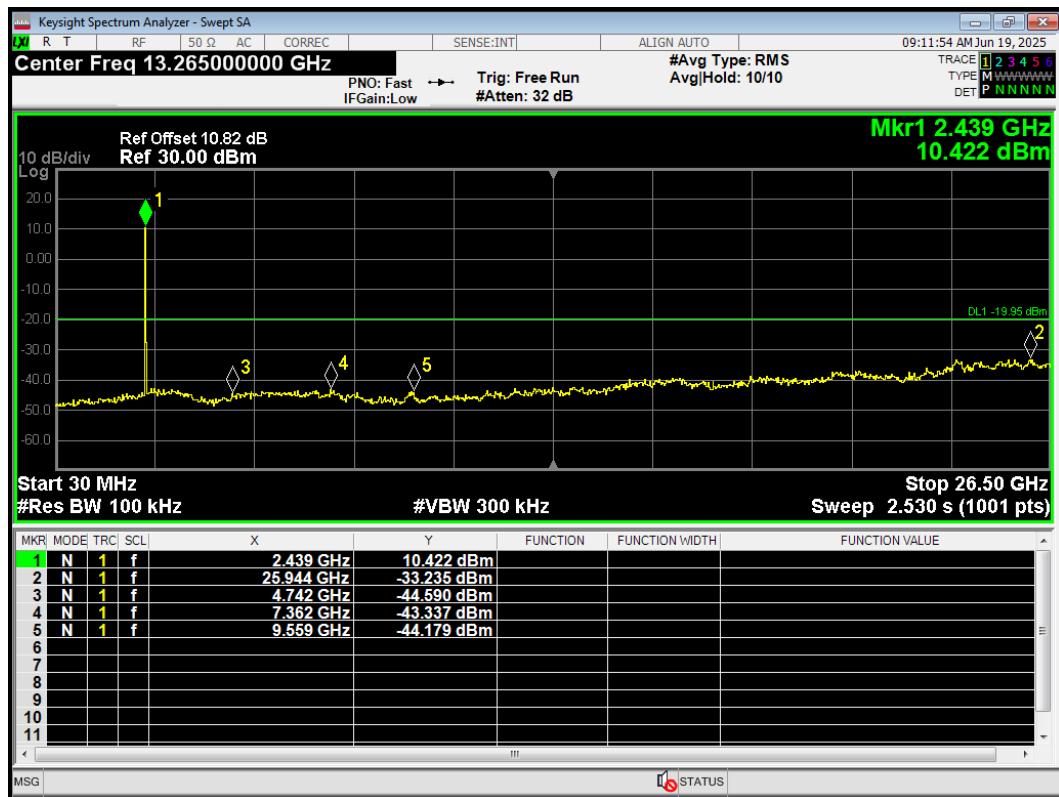

Tx. Spurious 802.11g 2462MHz Ref

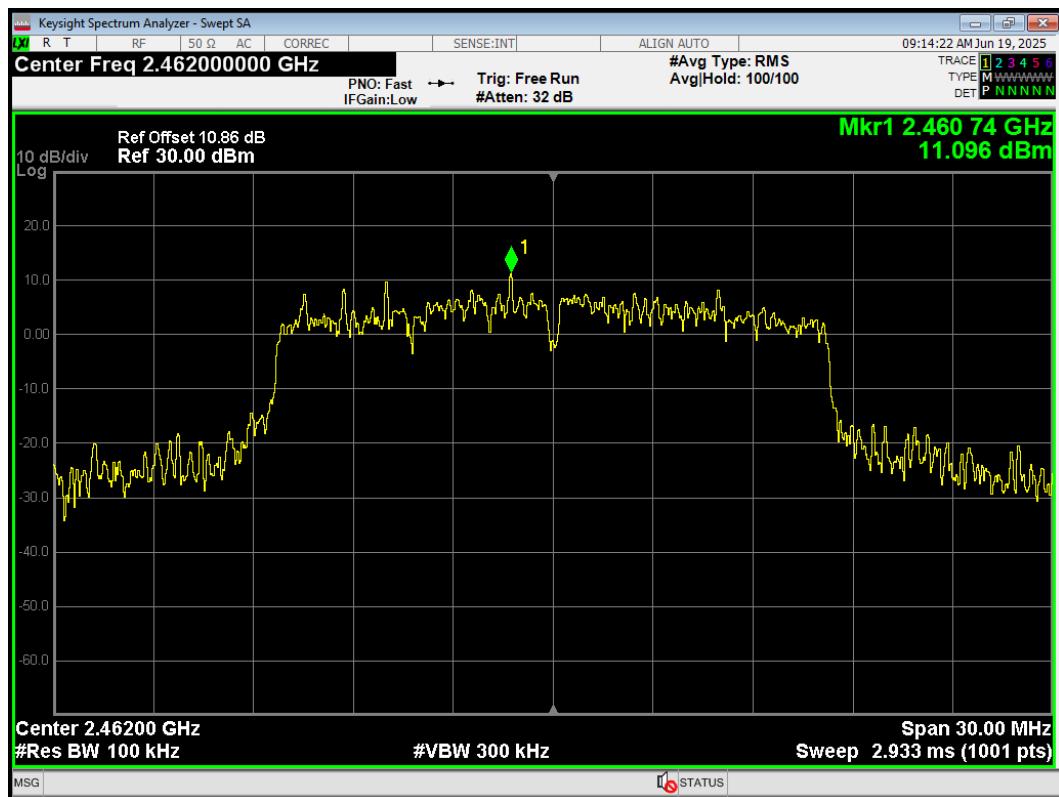

Tx. Spurious 802.11g 2462MHz Emission

