




FCC RADIO TEST REPORT

Applicant	: Lorex Technology Inc.
Address	: 250 Royal Crest Court, Markham, ON L3R 3S1 Canada
Equipment	: 2K Wi-Fi Smart Lightbulb Pan-Tilt Camera
Model No.	: SL301A-46W-AZ1, SL301A-46W-AA1
Trade Name	: Lorex
FCC ID	: UCZ-SL301
Standard	: FCC part 15 Subpart E § 15.407

I HEREBY CERTIFY THAT:

The sample was received on Aug. 14, 2025 and the testing was completed on Aug. 21, 2025 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:



Leevin Li /Supervisor

**CONTENTS**

1.	Summary of Test Procedure and Test Results	5
1.1.	Applicable Standards	5
2.	Test Configuration of Equipment under Test	6
2.1.	Feature of Equipment under Test.....	6
2.2.	Carrier Frequency of Channels	7
2.3.	Test Mode and Test Software	8
2.5.	Description of Test System.....	13
2.6.	General Information of Test.....	14
2.7.	Measurement Uncertainty	14
3.	Test Equipment and Ancillaries Used for Tests	15
4.	Antenna Requirements	17
4.1.	Standard Applicable	17
4.2.	Antenna Construction and Directional Gain.....	17
5.	Test of AC Power Line Conducted Emission	18
5.1.	Test Limit	18
5.2.	Test Procedures	18
5.3.	Typical Test Setup	18
5.4.	Test Result and Data.....	19
6.	Test of Spurious Emission (Radiated).....	21
6.1.	Test Limit	21
6.2.	Test Procedures	21
6.3.	Typical Test Setup	22
6.4.	Test Result and Data (9kHz ~ 30MHz).....	23
6.5.	Test Result and Data (30MHz ~ 1GHz).....	23
6.6.	Test Result and Data (1GHz ~ 40GHz).....	25
6.7.	Restricted Bands of Operation.....	133
7.	On Time, Duty Cycle and Measurement methods.....	214
7.1.	Test Limit	214
7.2.	Test Procedure	214
7.3.	Test Setup Layout	214
7.4.	Test Result and Data.....	214
7.5.	Measurement Methods	214
8.	6dB Bandwidth & 99% Occupied Bandwidth	216
8.1.	Test Limit	216
8.2.	Test Procedure	216
8.3.	Test Setup Layout	216
8.4.	Test Result and Data (6dB Bandwidth)	217
8.5.	Test Result and Data (99% Occupied Bandwidth).....	217
9.	26dB Bandwidth & 99% Occupied Bandwidth	224
9.1.	Test Limit	224
9.2.	Test Procedure	224
9.3.	Test Setup Layout	224
9.4.	Test Result and Data (26dB Bandwidth)	225
9.5.	Test Result and Data (99% Occupied Bandwidth).....	227
10.	Average Power.....	238



10.1.	Test Limit	238
10.2.	Test Procedure	239
10.3.	Test Setup Layout	239
10.4.	Test Result and Data	240
11.	Maximum Power Spectral Density	242
11.1.	Test Limit	242
11.2.	Test Procedure	242
11.3.	Test Setup Layout	242
11.4.	Test Result and Data	243
12.	Frequency Stability	257
12.1.	Test Procedure	257
12.2.	Test Setup Layout	257
12.3.	Test Result and Data	258



History of this test report

Version No.	Report No	Date	Description
Rev.01	25080191-DRFCC02	Aug. 27, 2025	Initial Issue



1. Summary of Test Procedure and Test Results

1.1. Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart E §15.407

FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207(a)	AC Power Line Conducted Emission	PASS
15.407(b) 15.209	Radiated Spurious Emission	PASS
15.407(a)	26 dB & Occupied Bandwidth	PASS
15.407 (a) & (a)(3)	Average Power	PASS
15.407(a)	Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
Note: Deviations Yes ☐ No ☒ *The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.		



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

Equipment	2K Wi-Fi Smart Lightbulb Pan-Tilt Camera
Model Name	SL301A-46W-AZ1, SL301A-46W-AA1
Model Discrepancy	Different models are suitable for different sales channels, and the safety regulations, electromagnetic compatibility, and other aspects of the product are the same.
Frequency Range	BLE/ WIFI 2.4G: 2400MHz-2483.5MHz WIFI 5G: 5150MHz-5250MHz, 5250MHz-5350MHz, 5470MHz -5725MHz, 5725MHz -5850MHz
Modulation Type	BLE: GFSK 2.4GHz 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Data Rate	BLE: GFSK: 1Mbps, 2Mbps, 125kbps, 500kbps WIFI 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0-MCS7, HT20/HT40 802.11ax: MCS0-MCS11, HE20/HE40 WIFI 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0-MCS7, HT20/HT40 802.11ac: MCS0-MCS9, VHT20/40 802.11ax: MCS0-MCS11, HE20/HE40
Working Temperature	-20°C to 60°C
EUT Power Rating:	110~220Vac/0.24A

Note:

1. EUT support Client mode without radar detection.
2. The EUT not support TPC
3. 802.11ax only support full RU.
4. For more details, please refer to the User's manual of the EUT.



2.2. Carrier Frequency of Channels

Band: 5150MHz-5250MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*36	5180	*44	5220
40	5200	*48	5240

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*38	5190	*46	5230

Band: 5250MHz-5350MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*52	5260	*60	5300
56	5280	*64	5320

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*54	5270	*62	5310

Band: 5470MHz-5725MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*100	5500	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
*116	5580	*140	5700
120	5600		

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*102	5510	126	5630
*110	5550	*134	5670
118	5590		

Band: 5725MHz-5850MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*149	5745	161	5805
153	5765	*165	5825
*157	5785		

802.11n HT40, 802.11ac VHT40, 802.11ax HE40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*151	5755	*159	5795

Note: Channels remarked * are selected to perform test.



2.3. Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included support unit and EUT for RF test.
- An executive program, "AtbmWLANFacility.exe (Ver.: 1.0.0.1)" under WIN10 system was executed to transmit and receive data via Wireless.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11a (6Mbps)
2	802.11n HT20 (6.5Mbps)
3	802.11n HT40 (13.5Mbps)
4	802.11ac VHT20 (6.5Mbps)
5	802.11ac VHT40 (13.5Mbps)
6	802.11ax HE20 (7.3Mbps)
7	802.11ax HE40 (14.6Mbps)
caused "Test Mode 1 at CH36:5180MHz" generated the worst case, it was reported as the final data.	
Radiation Emissions (Below 1GHz)	
Test Mode	Operating Description
1	802.11a (6Mbps)
2	802.11n HT20 (6.5Mbps)
3	802.11n HT20 (13.5Mbps)
4	802.11ac VHT20 (6.5Mbps)
5	802.11ac VHT40 (13.5Mbps)
6	802.11ax HE20 (7.3Mbps)
7	802.11ax HE40 (14.6Mbps)
caused "Test Mode 1 at CH36:5180MHz" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 40GHz)	
Test Mode	Operating Description
1	802.11a (6Mbps)
2	802.11n HT20 (6.5Mbps)
3	802.11n HT40 (13.5Mbps)
4	802.11ac VHT20 (6.5Mbps)
5	802.11ac VHT40 (13.5Mbps)
6	802.11ax HE20 (7.3Mbps)
7	802.11ax HE40 (14.6Mbps)
caused "Test Mode 1,4~7" generated the worst case, it was reported as the final data.	

Modulation Type	TX CONFIGURATION
802.11a	1TX
802.11n HT20	1TX
802.11n HT40	1TX
802.11ac VHT20	1TX
802.11ac VHT40	1TX
802.11ax HE20	1TX
802.11ax HE40	1TX
* VHT20/VHT40 covers HT20/HT40, due to same modulation. 802.11ac mode is the worst case for final tests except RF output power test after pretesting all modulation type.	



2.4. Power Parameter Value of the test software

Band: 5150MHz-5250MHz

Mode	Frequency (MHz)	Setting level
802.11a	5180	18
	5220	18
	5240	18
802.11n HT20	5180	18
	5220	18
	5240	18
802.11n HT40	5190	18
	5230	18
802.11ac VHT20	5180	18
	5220	18
	5240	18
802.11ac VHT40	5190	18
	5230	18
802.11ax HE20	5180	18
	5220	18
	5240	18
802.11ax HE40	5190	18
	5230	18



Band: 5250MHz-5350MHz

Mode	Frequency (MHz)	Setting level
802.11a	5260	18
	5300	18
	5320	18
802.11n HT20	5260	18
	5300	18
	5320	18
802.11n HT40	5270	18
	5310	16
802.11ac VHT20	5260	18
	5300	18
	5320	18
802.11ac VHT40	5270	18
	5310	16
802.11ax HE20	5260	18
	5300	18
	5320	18
802.11ax HE40	5270	18
	5310	16



Band: 5470MHz -5725MHz

Mode	Frequency (MHz)	Setting level
802.11a	5500	18
	5580	18
	5700	18
802.11n HT20	5500	18
	5580	18
	5700	18
802.11n HT40	5510	16
	5550	16
	5670	16
802.11ac VHT20	5500	18
	5580	18
	5700	18
802.11ac VHT40	5510	16
	5550	16
	5670	16
802.11ax HE20	5500	18
	5580	18
	5700	18
802.11ax HE40	5510	16
	5550	16
	5670	16




Band: 5725MHz -5850MHz

Mode	Frequency (MHz)	Setting level
802.11a	5745	18
	5785	18
	5825	18
802.11n HT20	5745	18
	5785	18
	5825	18
802.11n HT40	5755	18
	5795	18
802.11ac VHT20	5745	18
	5785	18
	5825	18
802.11ac VHT40	5755	18
	5795	18
802.11ax HE20	5745	18
	5785	18
	5825	18
802.11ax HE40	5755	18
	5795	18



2.5. Description of Test System

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook	SONY	PCG-71811P	27544574 7000251	Non-Shielded, 1.8m

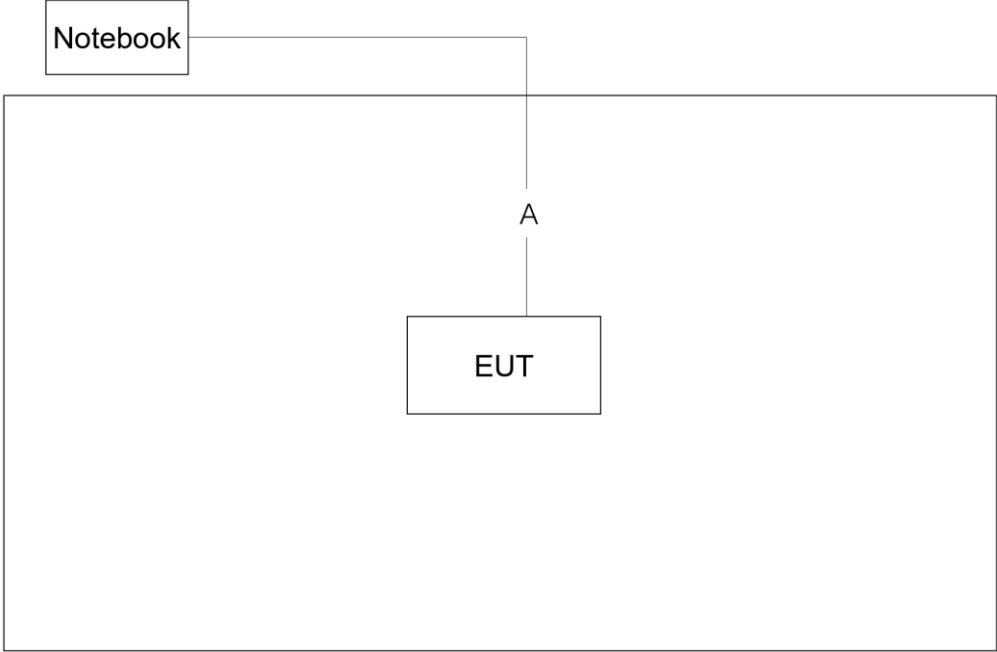Connection Diagram			
 The diagram illustrates the test setup. A 'Notebook' is connected to a central box labeled 'A'. This box 'A' is then connected to a box labeled 'EUT' (Equipment Under Test). The entire setup is enclosed within a larger rectangular frame.			
Signal Cable Type		Quantity	Signal cable Description
A	USB Cable	1	5.0m Shielding



2.6. General Information of Test

Test Site	CerpPASS Technology Corporation(CerpPASS Laboratory) Address: Room 102, No. 5, Xing'an Road, Chang'an Town, Dongguan City, Guangdong Province Tel: +86-769-8547-1212 Fax: +86-769-8547-1912
FCC Designation No.:	CN1288
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 9kHz to 40,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-DG	2025/08/18~2025/08/21	23~25℃ / 52~56%	Amos Zhang
Radiated Emissions	3M01-DG	2025/08/16~2025/08/20	22~25℃ / 51~56%	Amos Zhang
AC Power Line Conducted Emission	CON02-DG	2025/08/20	24℃ / 58%	Amos Zhang

2.7. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±2.60dB
Radiated Spurious Emission(9KHz~30MHz)	±4.10dB
Radiated Spurious Emission(30MHz~1GHz)	±4.51dB
Radiated Spurious Emission(1GHz~18GHz)	±5.36dB
Radiated Spurious Emission(18GHz~40GHz)	±5.43dB
6dB Bandwidth&26dB Bandwidth	±4.8%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±0.94dB
Power Spectral Density	±1.01dB
Frequency Stability	±99.743Hz



3. Test Equipment and Ancillaries Used for Tests

AC Power Line Conducted Emission					
Test Site	CON02-DG				
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
ESR-EMI TEST RECEIYER	R&S	ESR3	102728	2025/07/23	2026/07/22
Two-Line V-Network	R&S	ENV216	100325	2025/07/23	2026/07/22
LISN	SCHWARZBECK	NSLK 8127	8127749	2025/07/22	2026/07/21
Cable	Aoda	RG214	Cable-07	2025/07/23	2026/07/22
Temperature/Humidity Meter	GEMLEAD	STH200A	N/A	2025/07/25	2026/07/24
Software	AUDIX	E3	Version: 8.14806b	N/A	N/A
Test Site	Yiheng	AC-DG-005	N/A	2023/05/06	2026/05/05

Radiated Emissions					
Test Site	3M01-DG				
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	101183	2024/12/30	2025/12/29
Amplifier	EMCI	EMC330	980082	2024/12/30	2025/12/29
Loop Antenna	R&S	HFH2-Z2	100150	2024/01/03	2026/01/02
Bilog Antenna	Sunol Science	JB1	A072414-3	2025/07/28	2027/07/27
Preamplifier	Agilent	8449B	3008A02342	2025/07/23	2026/07/22
Preamplifier	COM-POWER	PA-840	711885	2025/01/02	2026/01/01
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120 D	9120D-619	2024/01/03	2026/01/02
Standard Gain Horn Antenna	TRC	HA-2640	18050	2024/01/03	2026/01/02
Standard Gain Horn Antenna	TRC	HA-1726	18051	2024/01/03	2026/01/02
FSQ Signal Analyzer	R&S	FSQ40	200012	2024/12/31	2025/12/30
Cable	EMCI	EM104-NM SM-8.5M	Cable-03	2024/12/30	2025/12/29
Cable	Jiuzhoubona	T-SMA	SMA48AL-70 00	2024/12/30	2025/12/29
Cable	CH-CoDesign	CCXA81-S MAMNM-1 M	Cable-05	2024/12/30	2025/12/29
Cable	CH-CoDesign	CCXA40-2.92-2.92-1M	21071954	2025/07/24	2026/07/23
Cable	CH-CoDesign	CCX40-2.92 M-2.92M-9 M	21070892	2025/07/24	2026/07/23
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2025/07/25	2026/07/24
Software	AUDIX	E3	Version: 8.14806b	N/A	N/A
Test Site	Yiheng	AC-DG-001	N/A	2023/05/08	2026/05/07



RF Conducted					
Test Site	RFCON01-DG				
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
MXA Signal Analyzer	KEYSIGHT	N9020A	US46220290	2024/12/30	2025/12/29
EXA Signal Analyzer	KEYSIGHT	N9010A	MY53400169	2024/12/30	2025/12/29
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45092582	2024/12/30	2025/12/29
MXG VECTOR SIGNAL GENERATOR	Agilent	N5182B	MY53050127	2024/12/30	2025/12/29
USB Wideband Power Sensor	Boonton	55006	9778	2025/07/22	2026/07/21
Temperature/Humidity Meter	mingle	ETH529	N/A	2025/01/02	2026/01/01



4. Antenna Requirements

4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2. Antenna Construction and Directional Gain

Antenna Type	FPC Antenna
Antenna Gain	5150~5850: 0.24dbi

(Non-Beamforming)

5. Test of AC Power Line Conducted Emission

5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dBμV)	Average (dBμV)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

5.2. Test Procedures


- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.3. Typical Test Setup

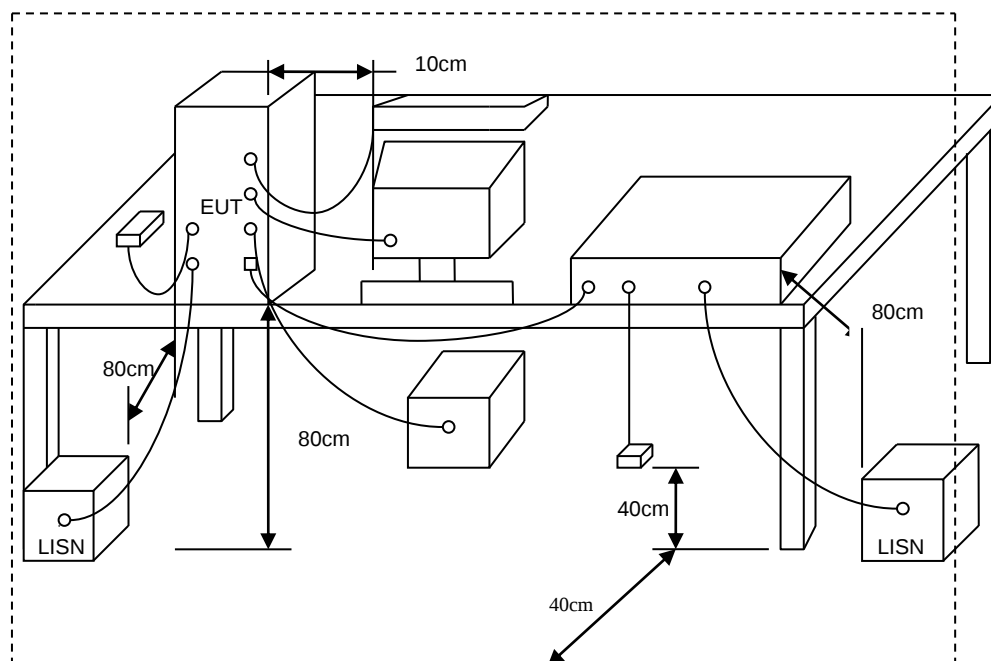




5.4. Test Result and Data

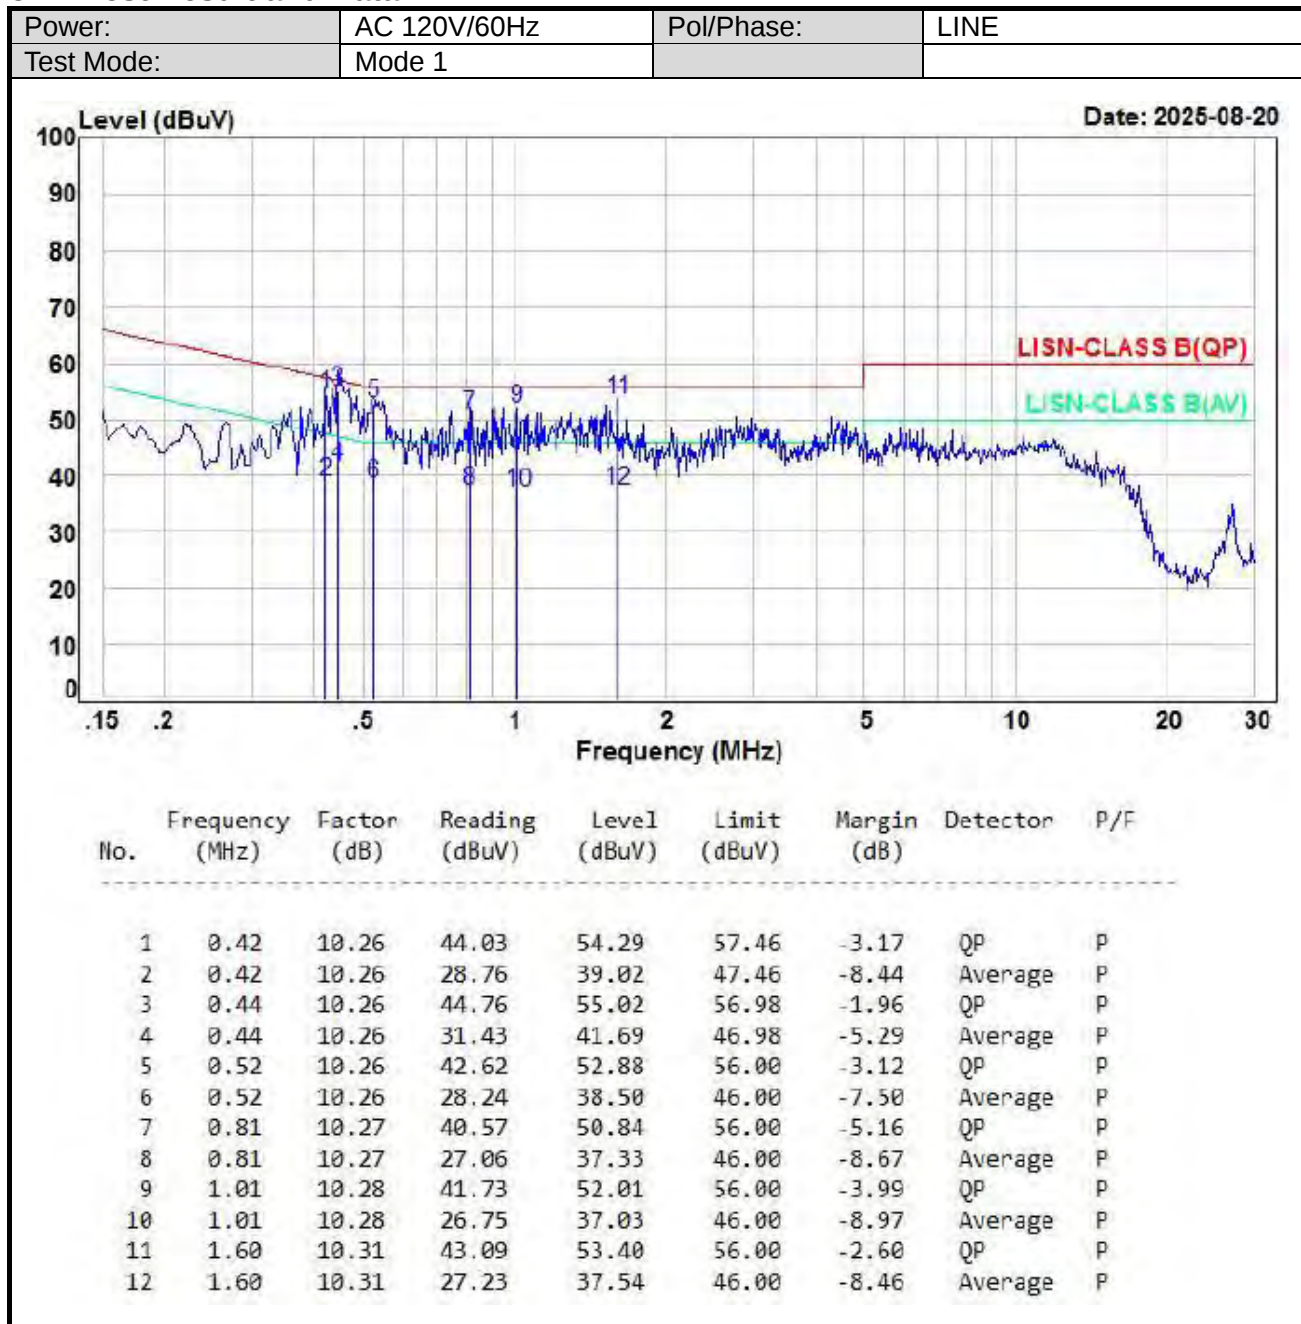

Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator

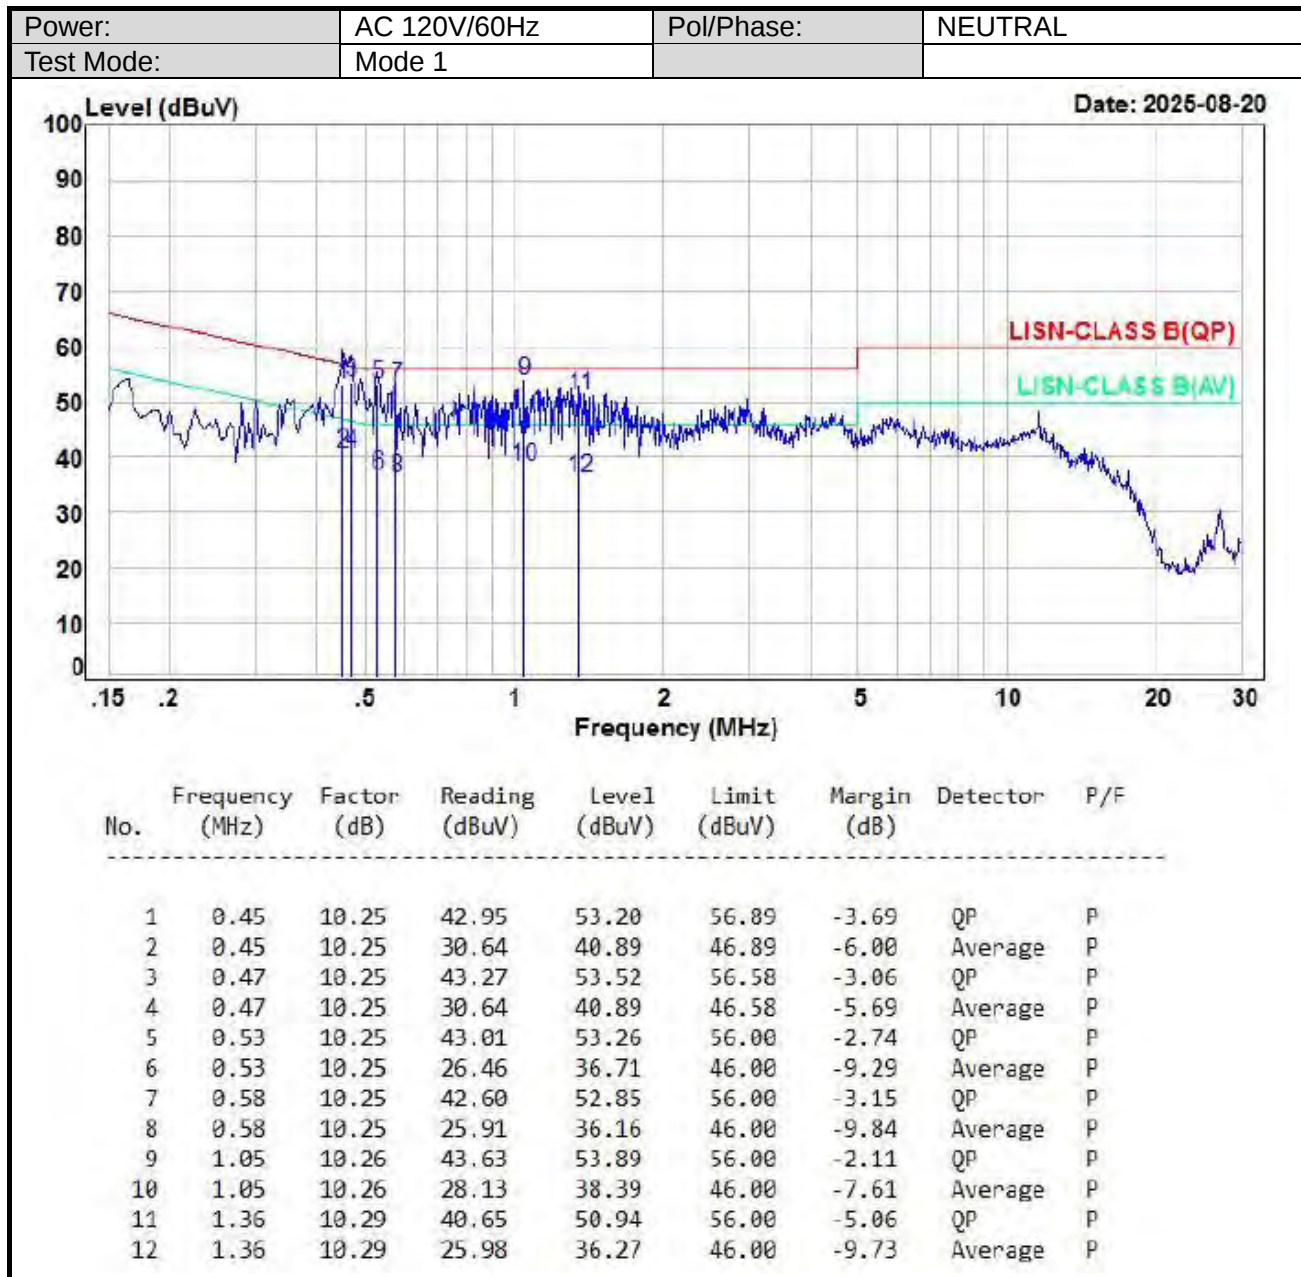

Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN or ISN or PLC or Current Probe) Factor + Cable Loss + Attenuator



6. Test of Spurious Emission (Radiated)

6.1. Test Limit

Undesirable emission limits. Except as shown in paragraph 15.407(b)(9)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.
Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions sch that emissions from the EUT are maximized.(X-AXIS is the worst.)




6.3. Typical Test Setup


Below 30MHz test setup

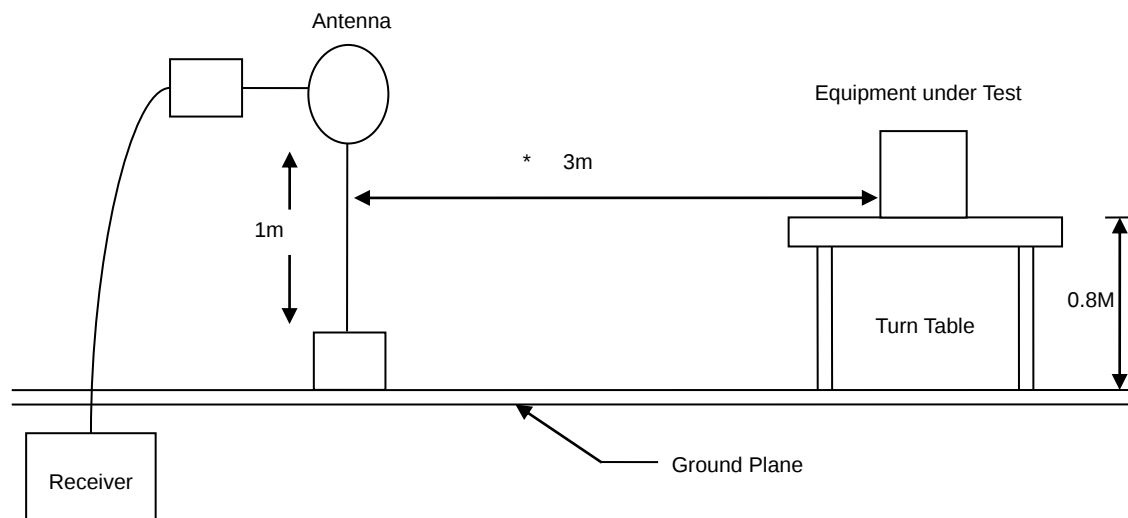

30MHz- 1GHz Test Setup

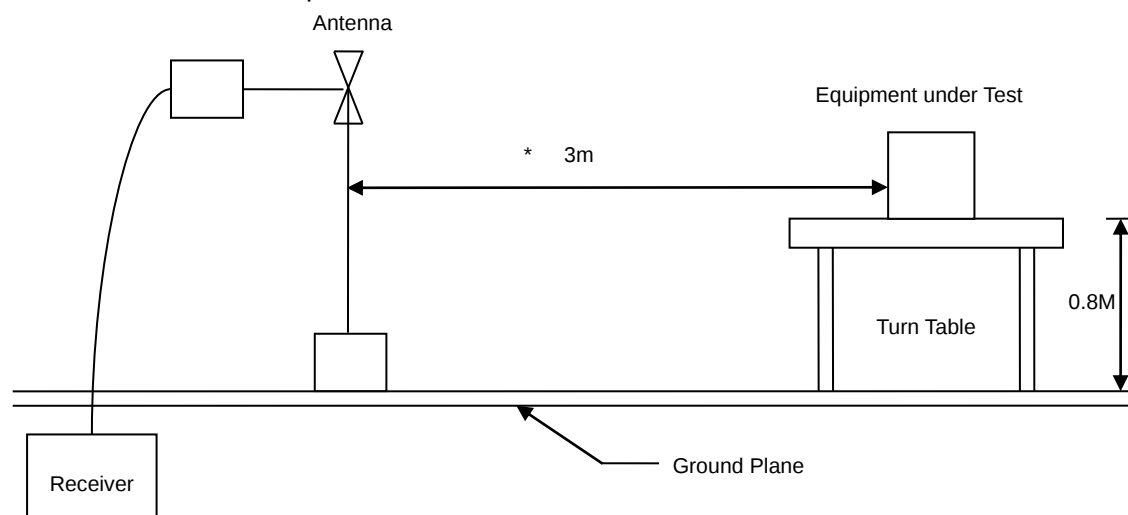

Above 1GHz Test Setup

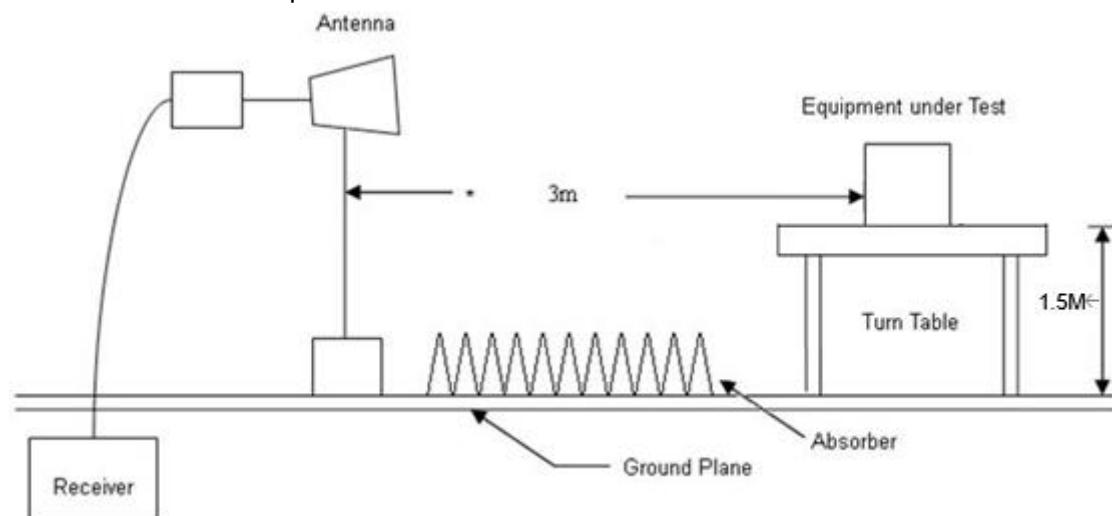




6.4. Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5. Test Result and Data (30MHz ~ 1GHz)

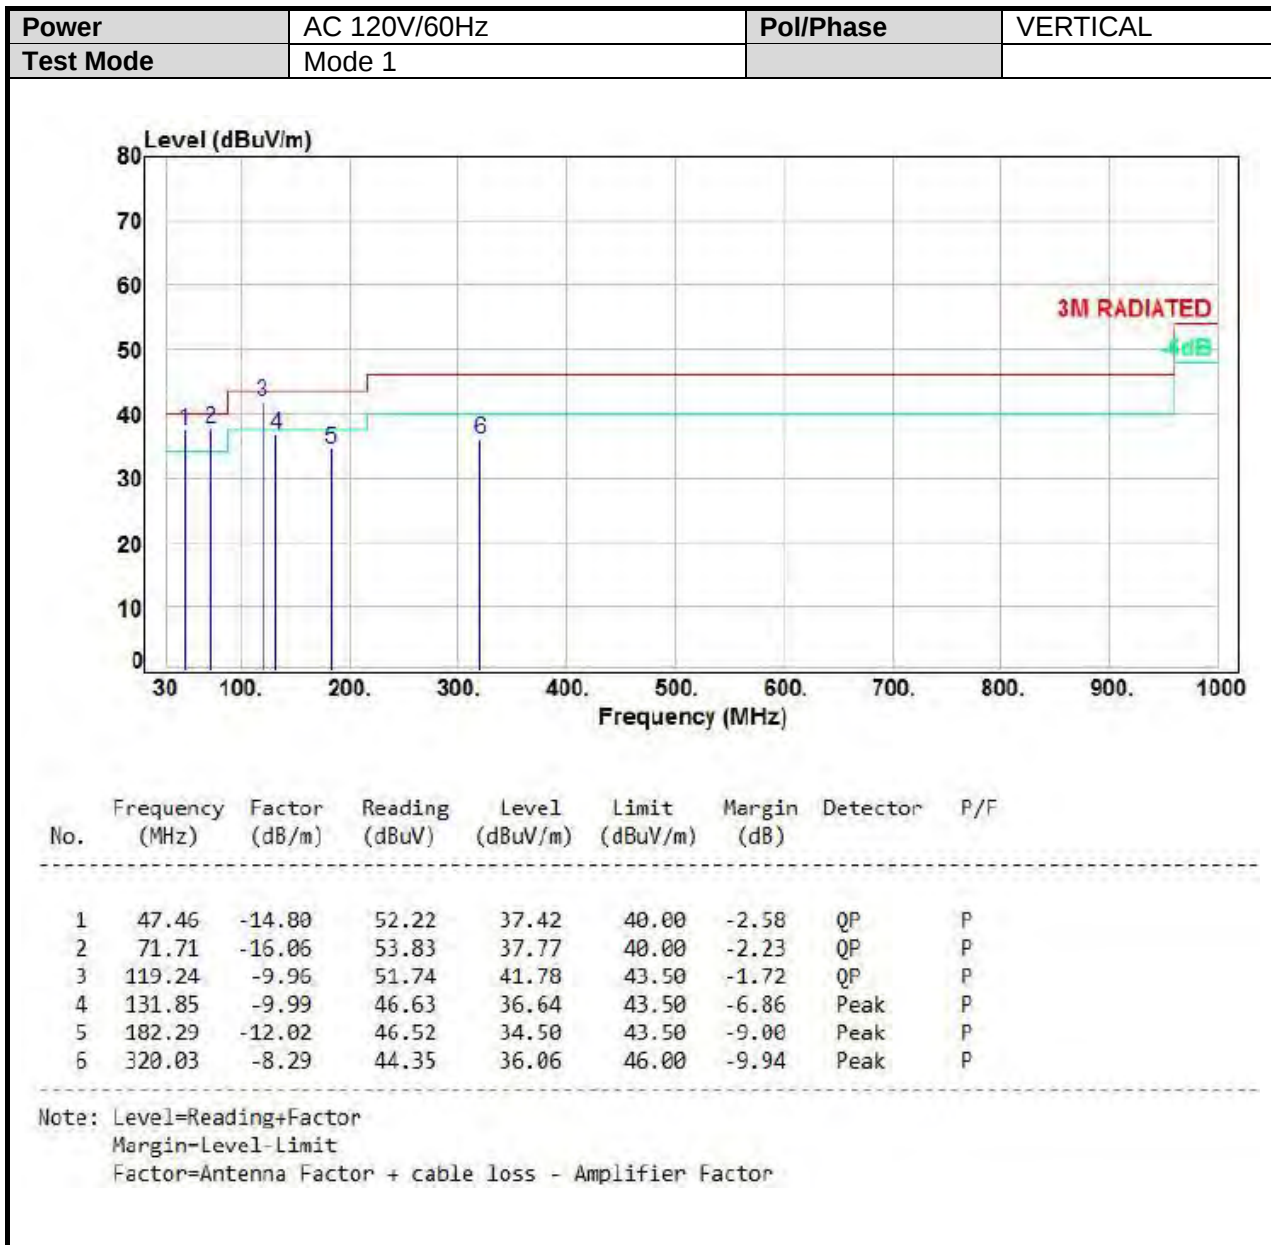






6.6. Test Result and Data (1GHz ~ 40GHz)

UNII-1

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH36 UNII-1		

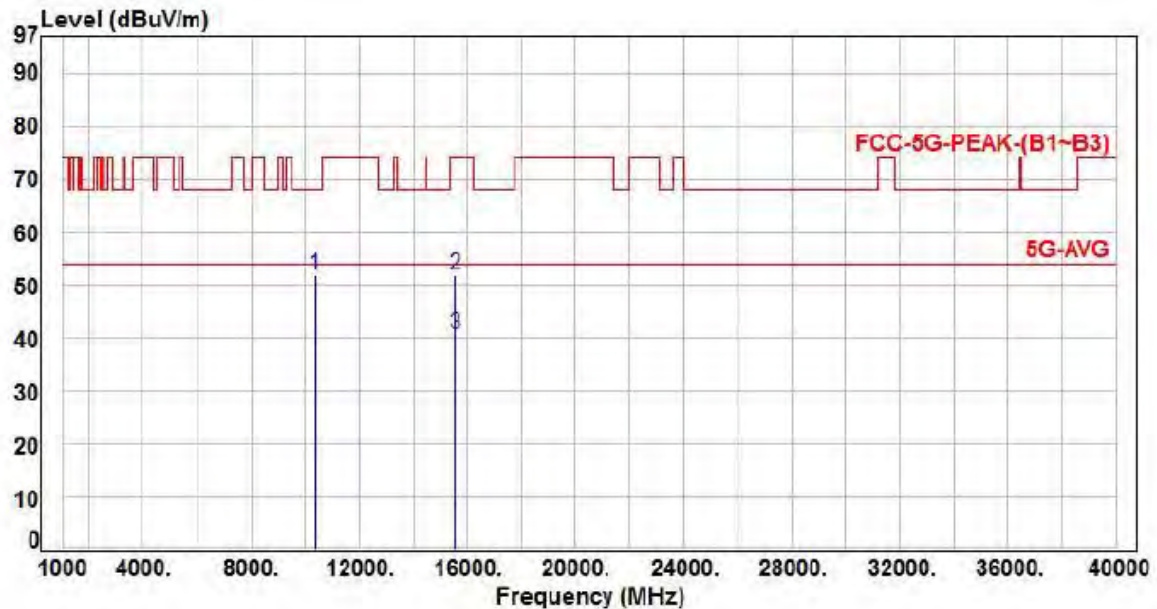



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10360.00	11.85	39.94	51.79	68.20	-16.41	Peak	P
2	15540.00	12.97	38.92	51.89	74.00	-22.11	Peak	P
3	15540.00	12.97	27.75	40.72	54.00	-13.28	Average	P


Note: Level=Reading+Factor


Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor

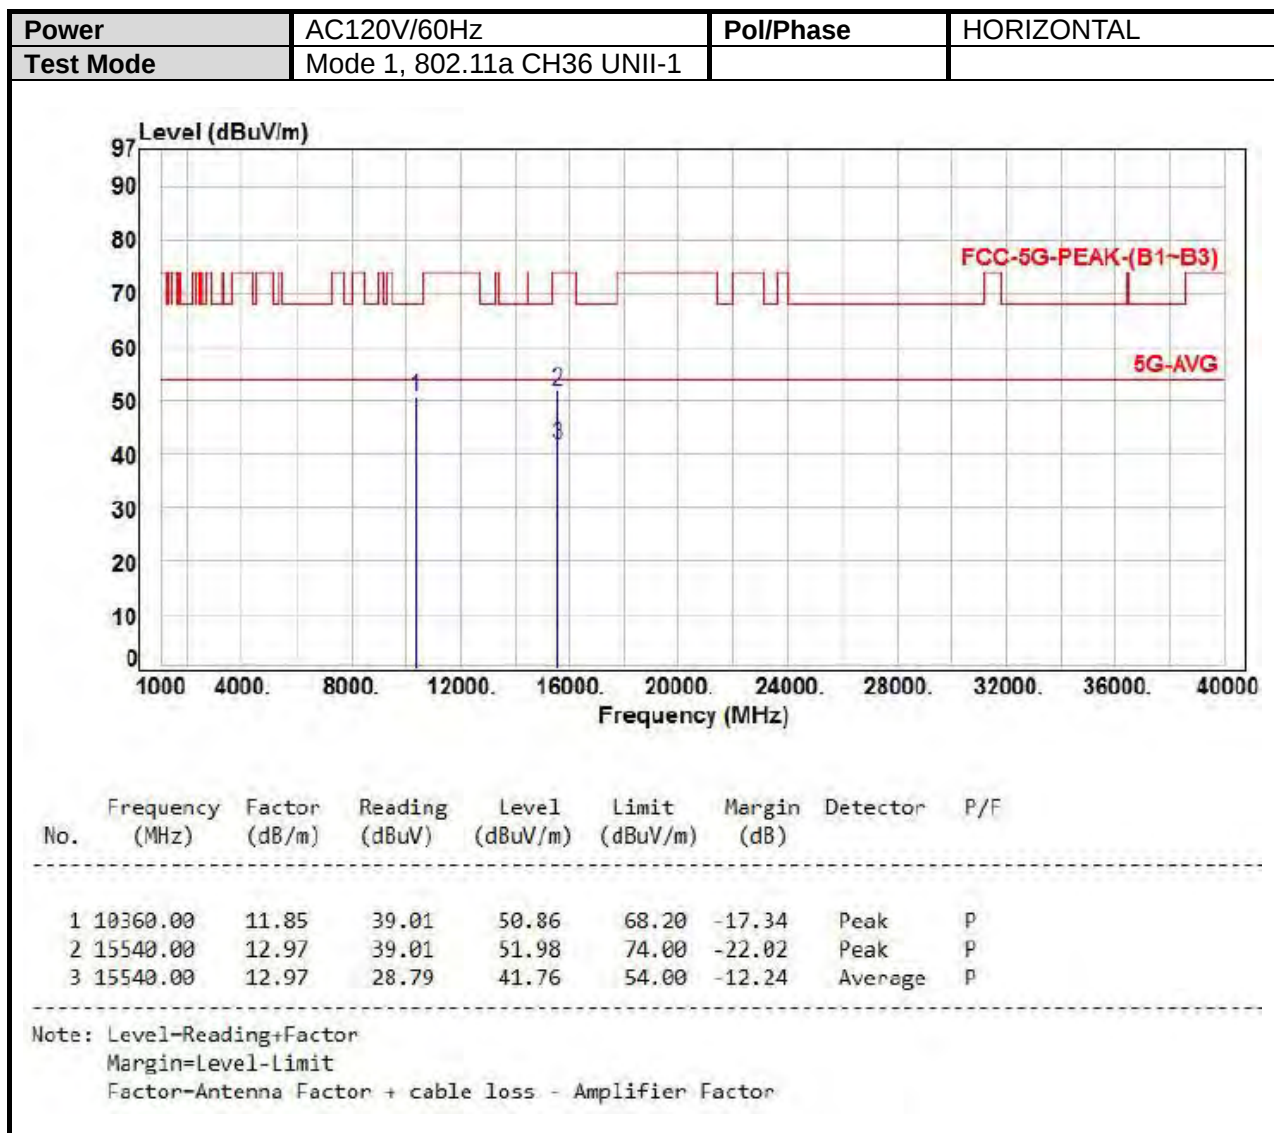

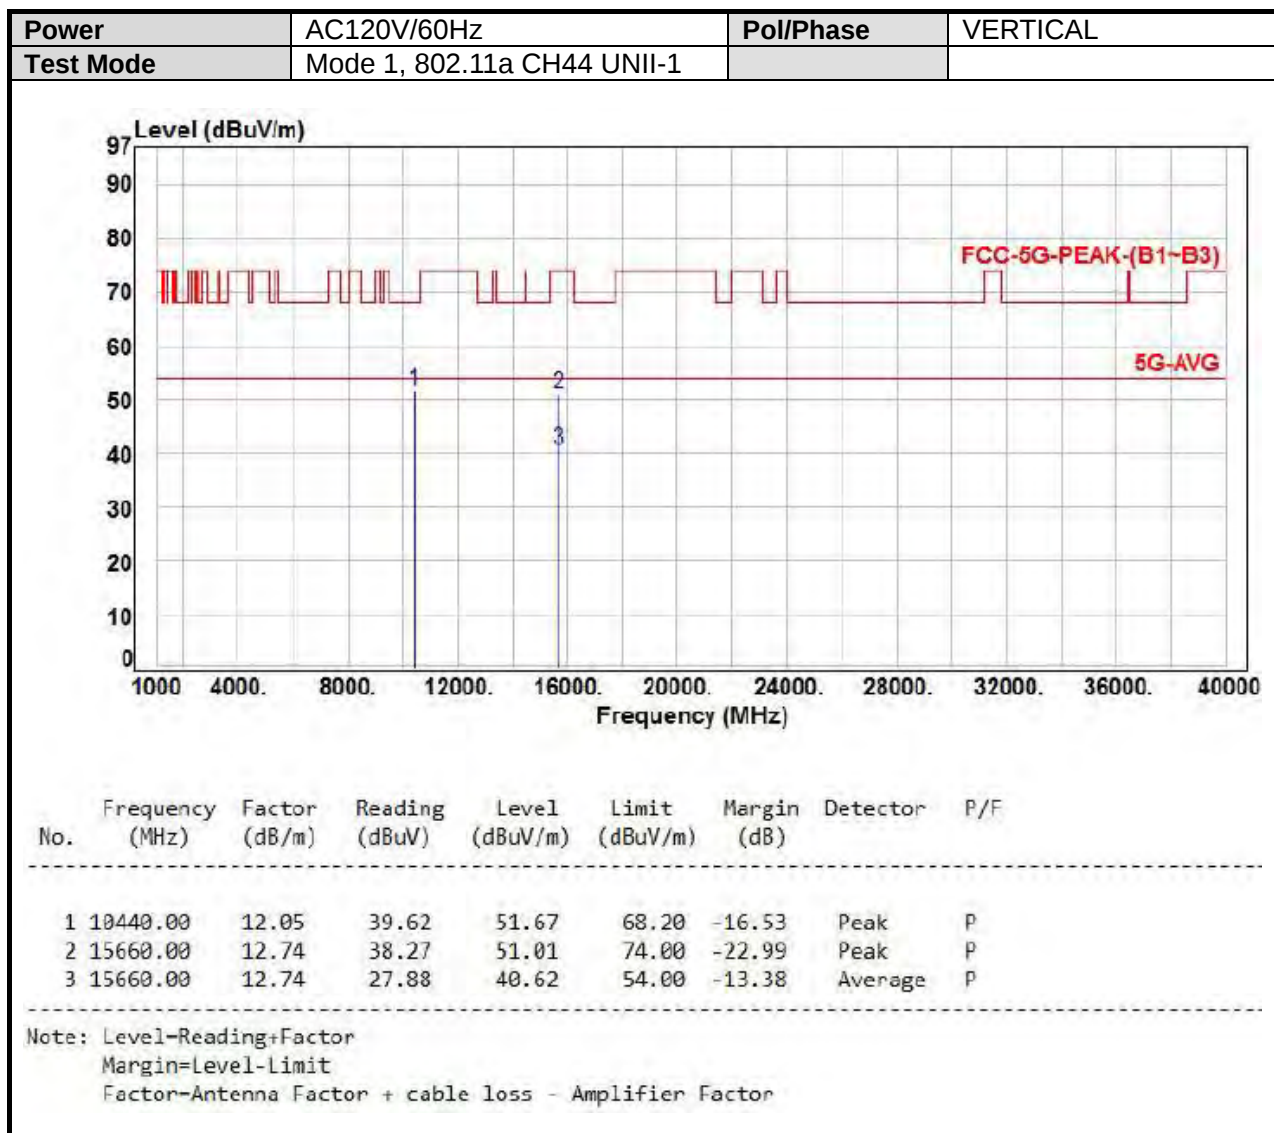

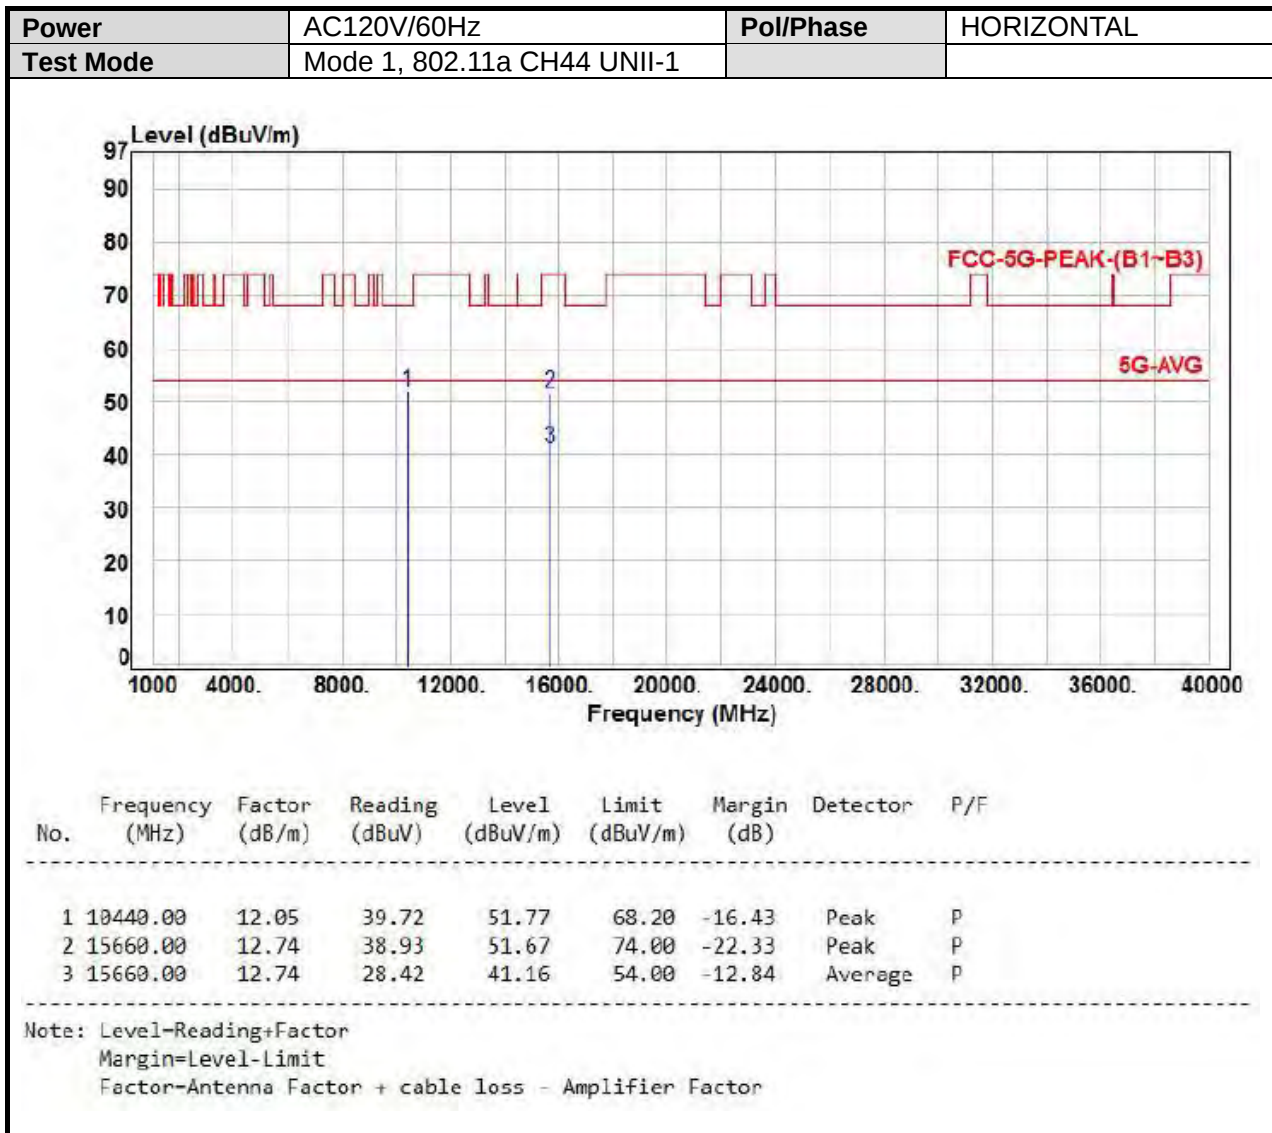


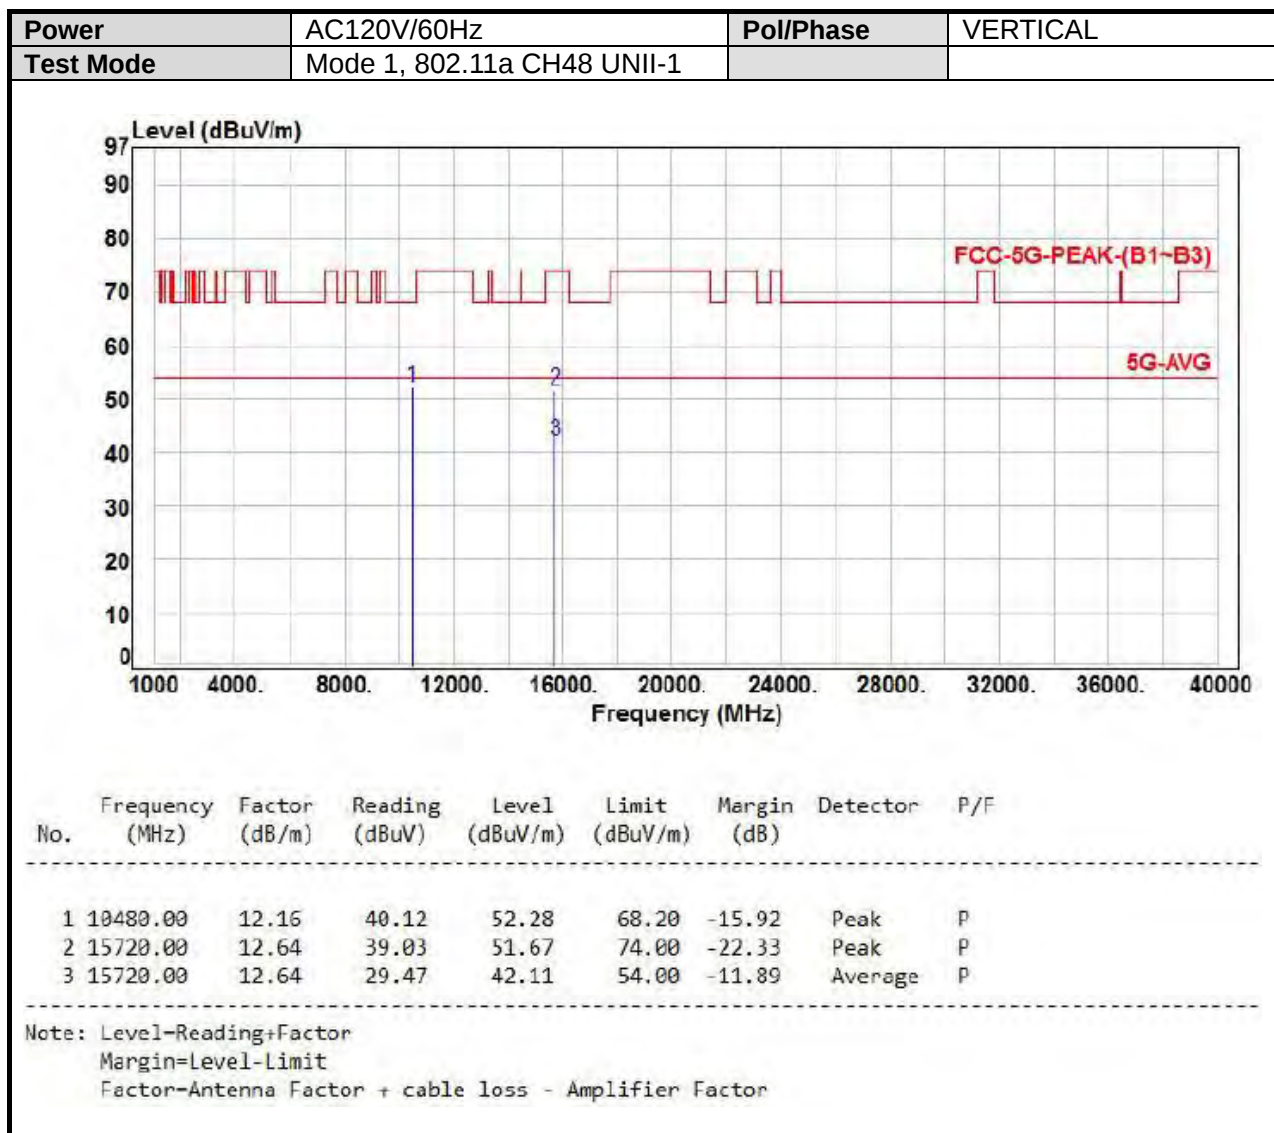


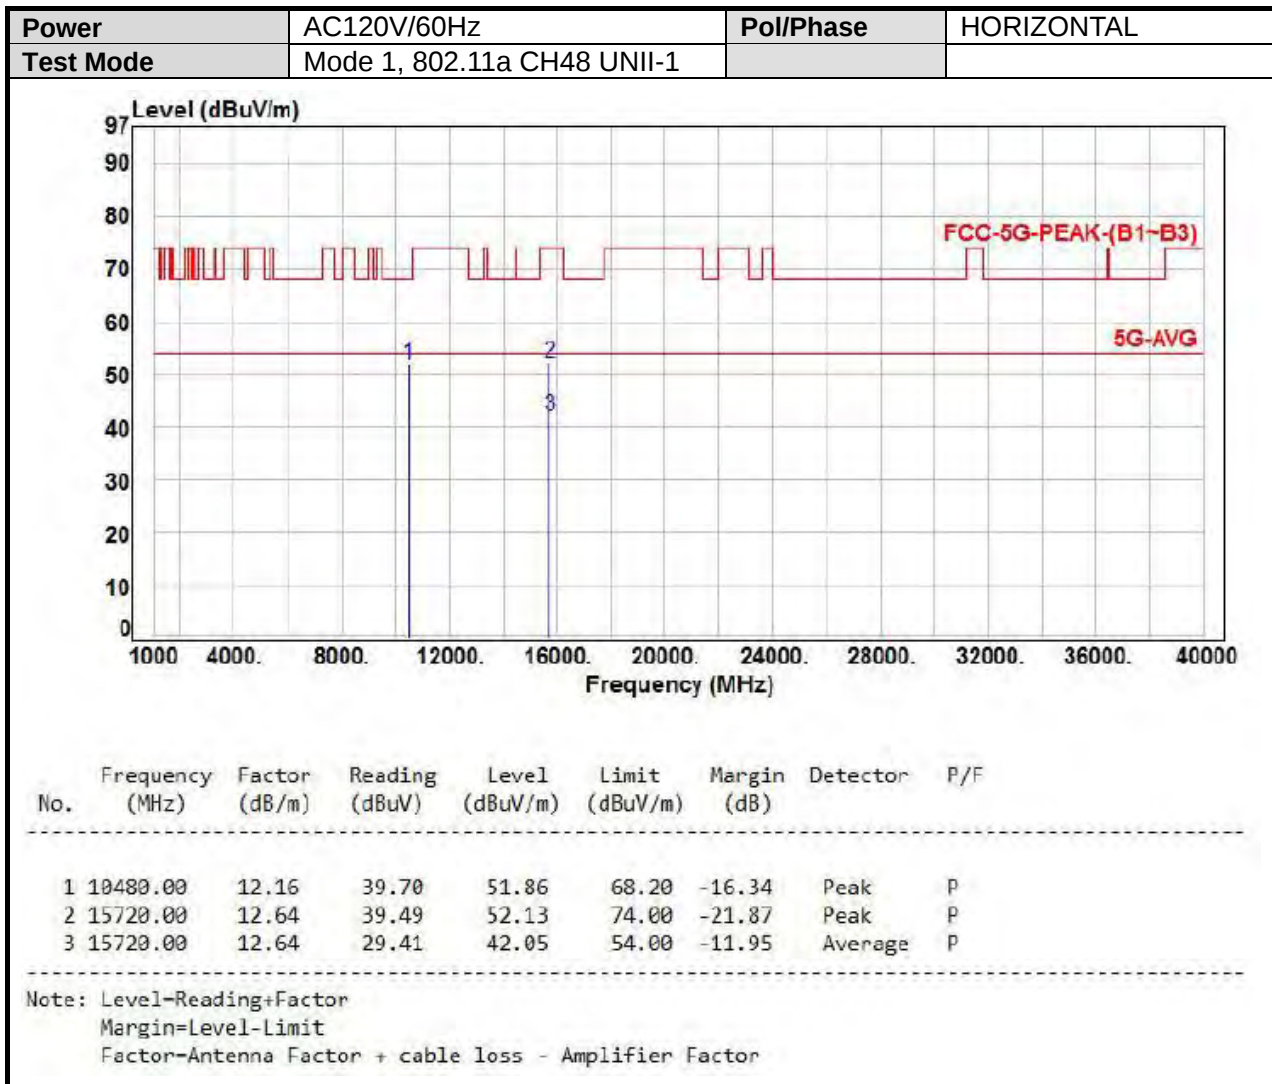






UNII-1

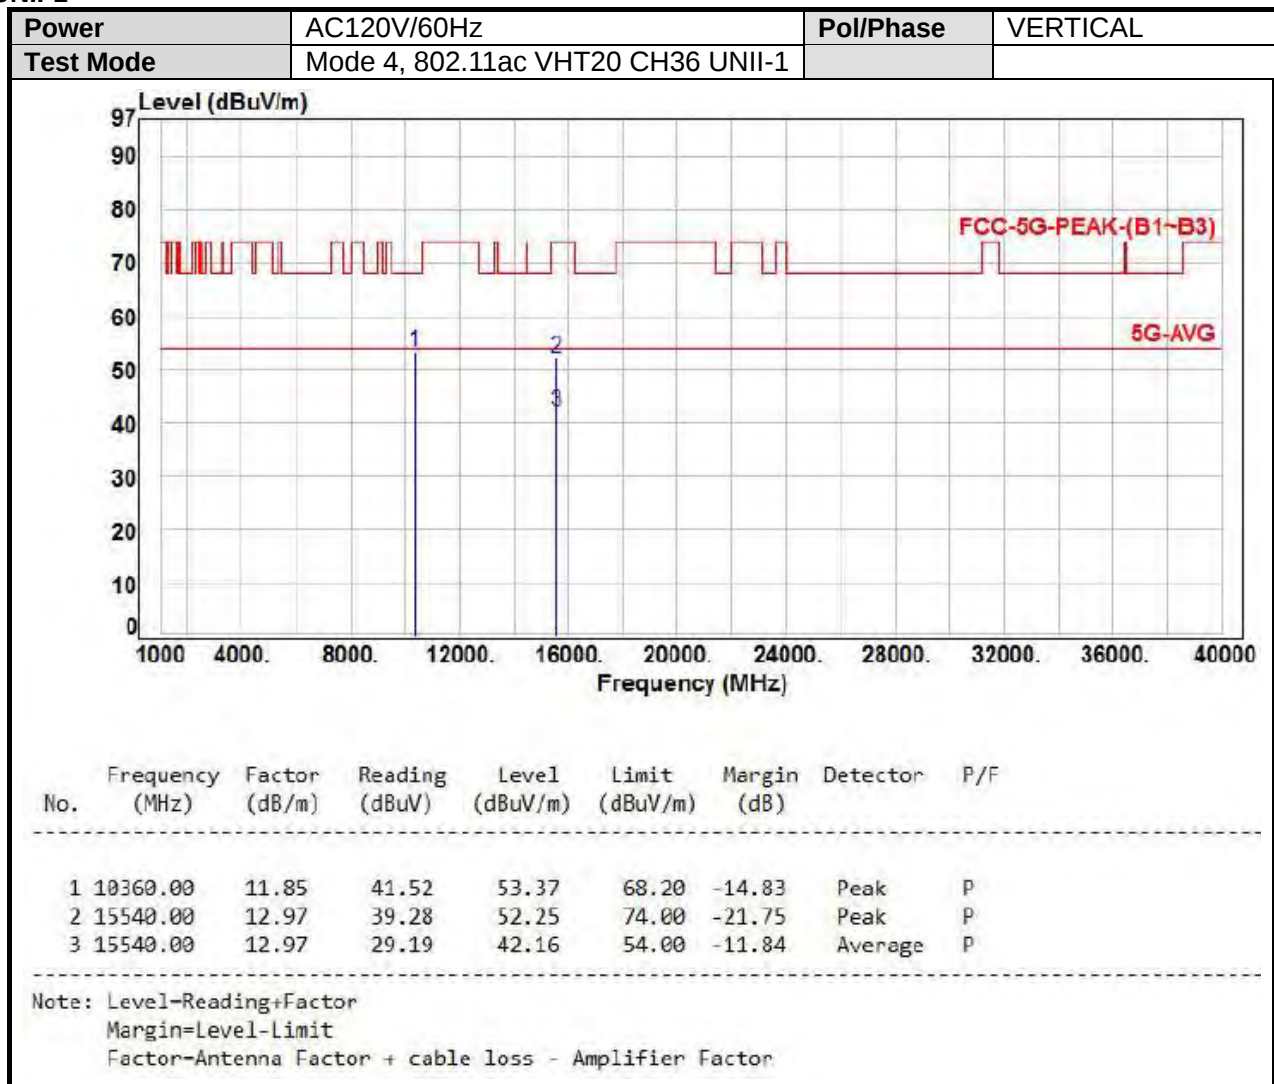


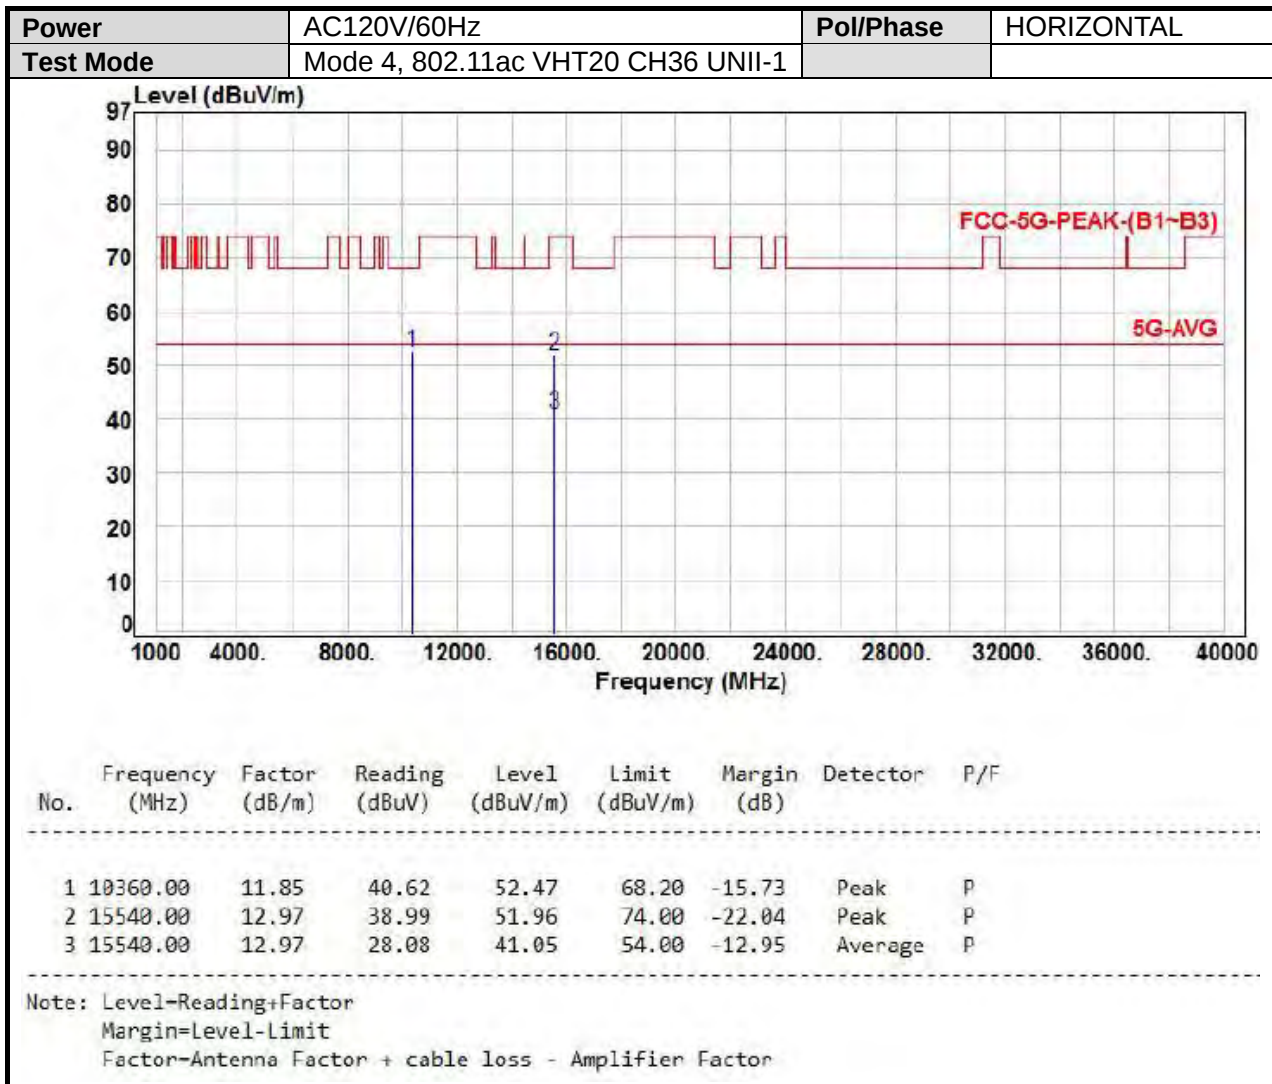


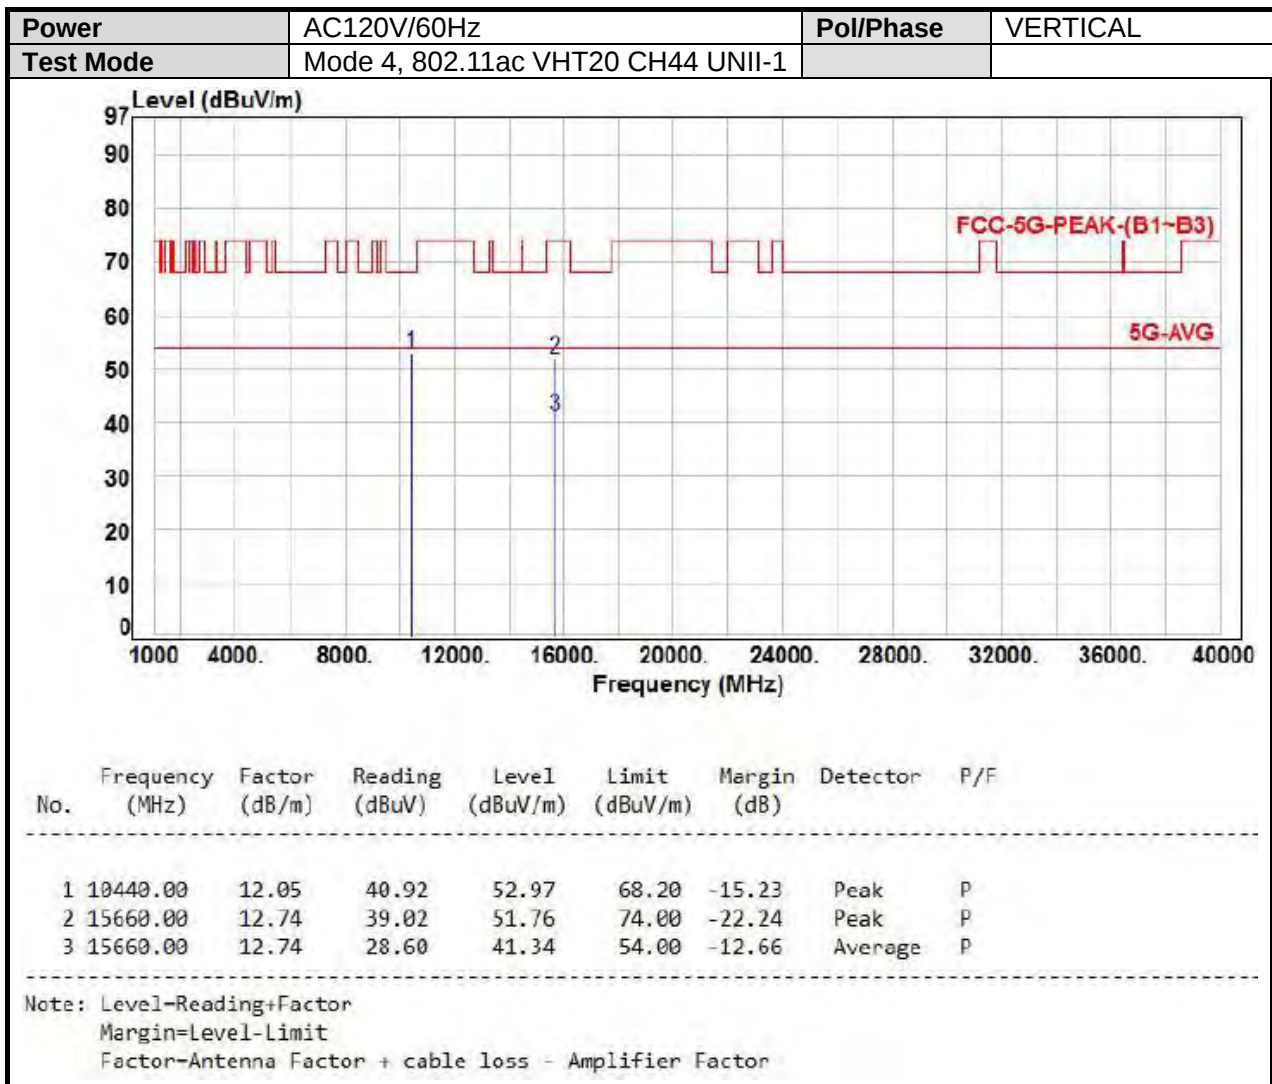


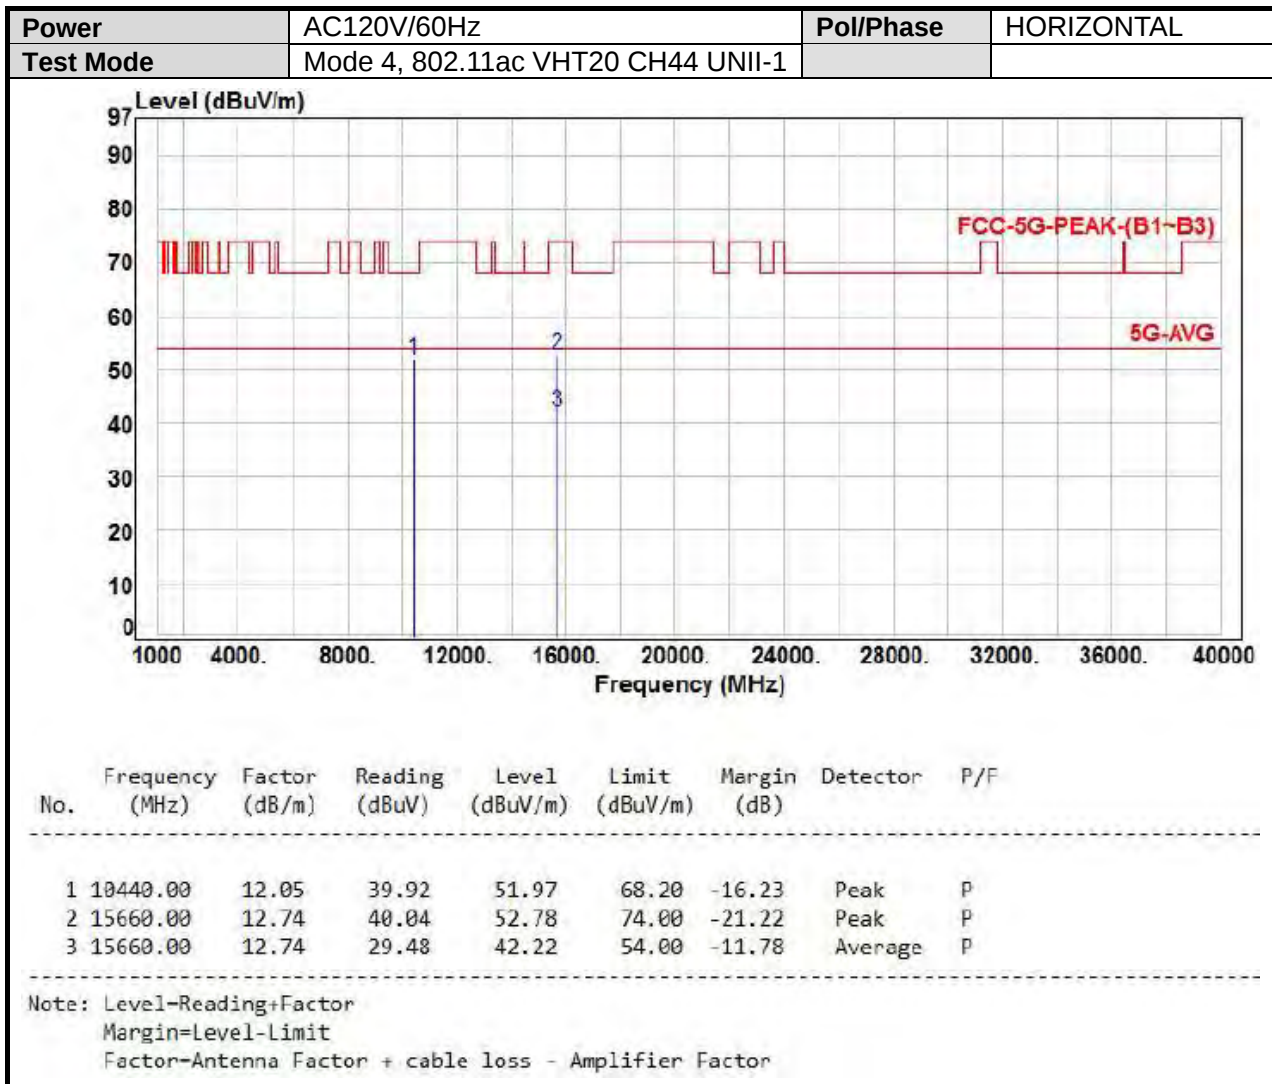


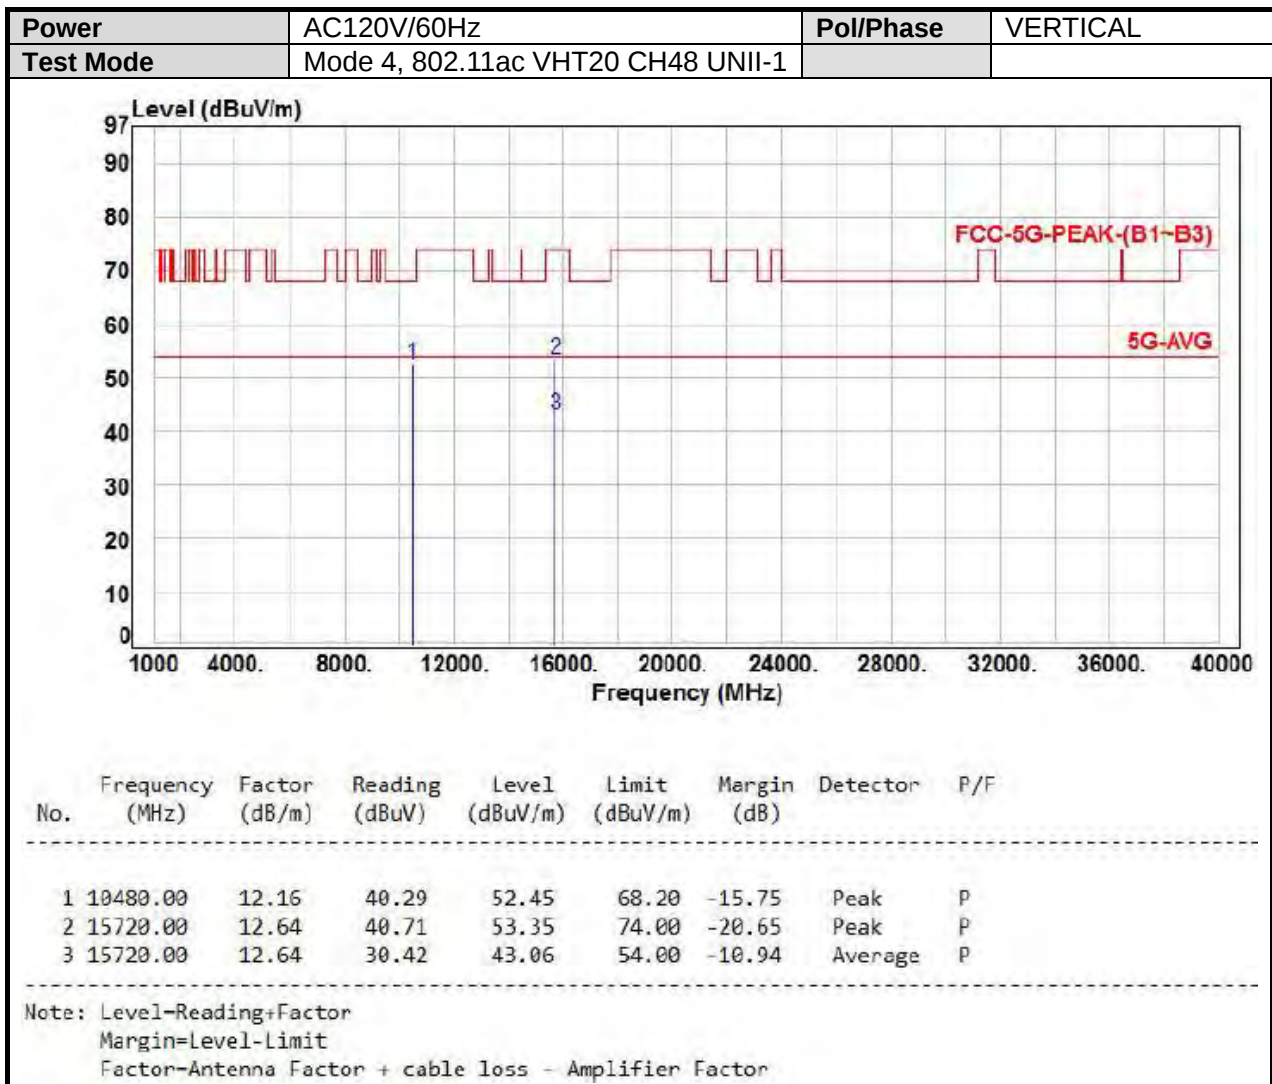


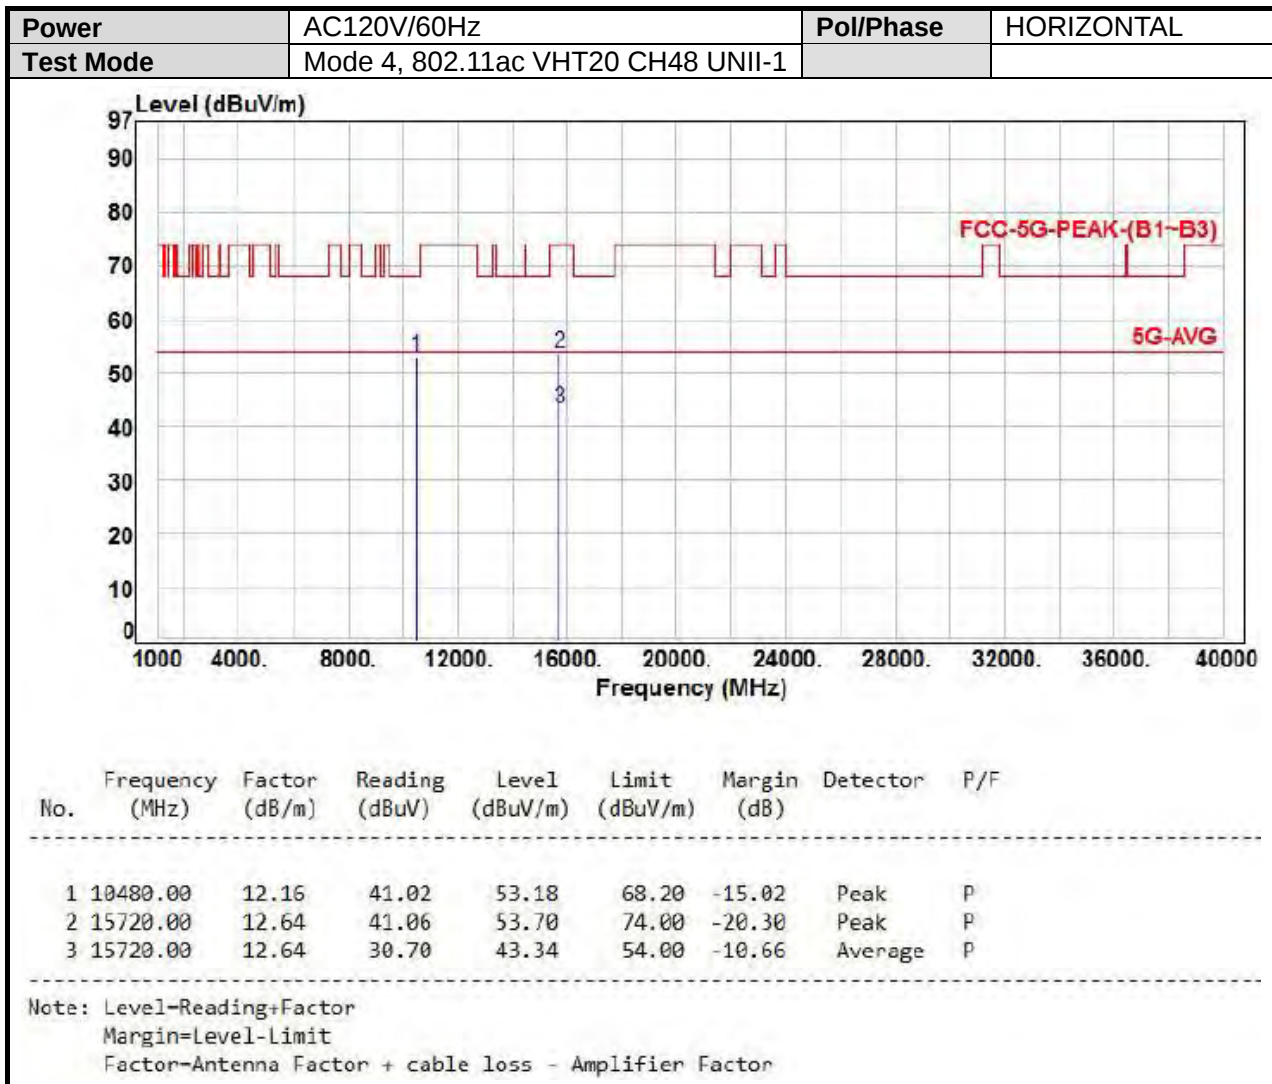


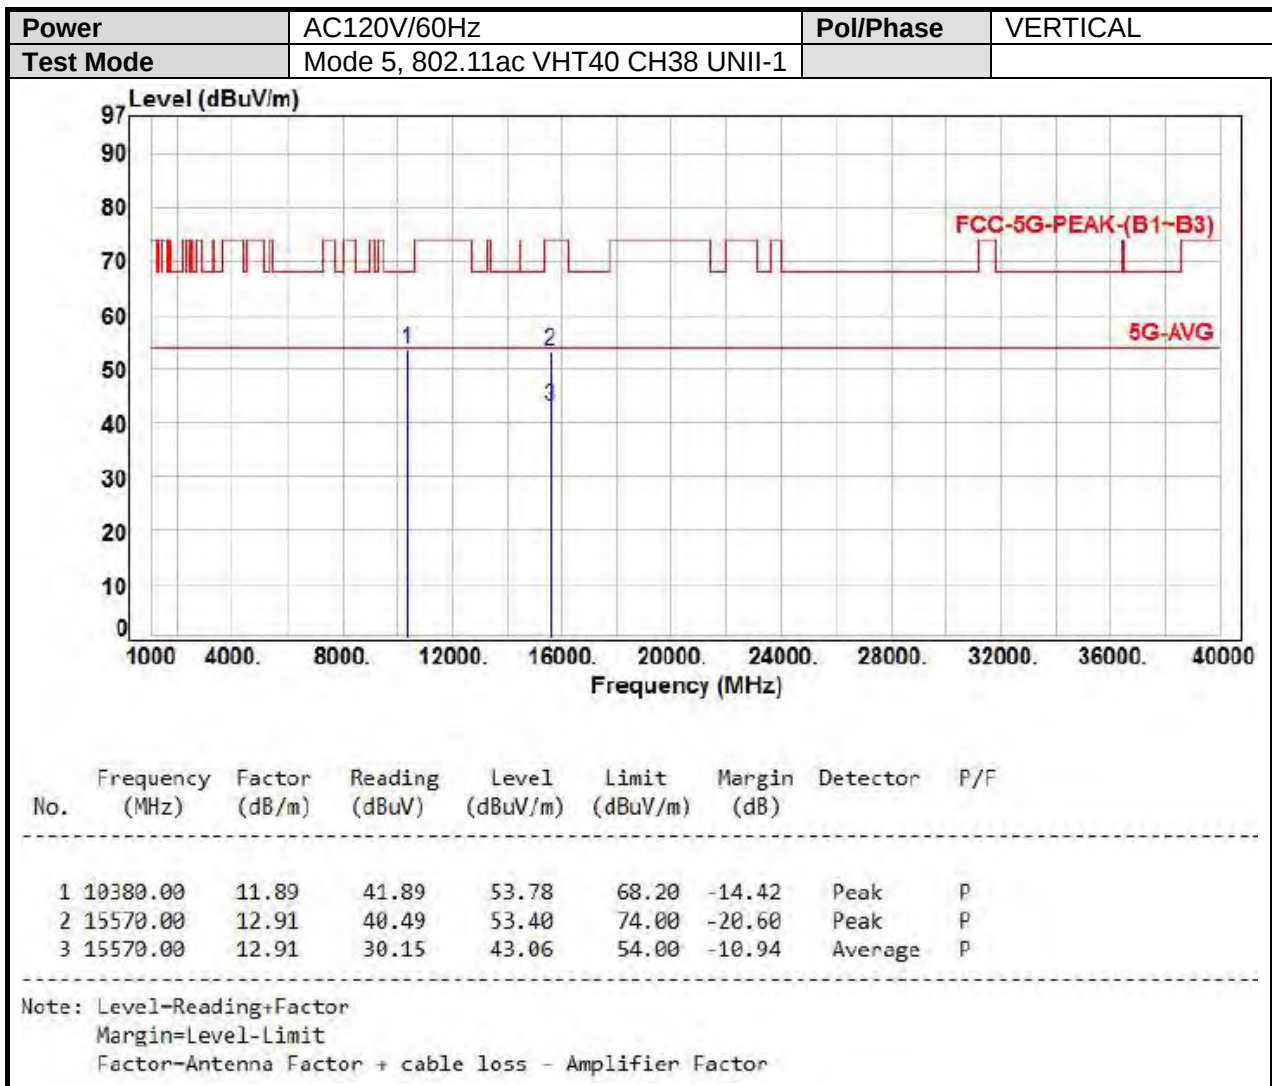


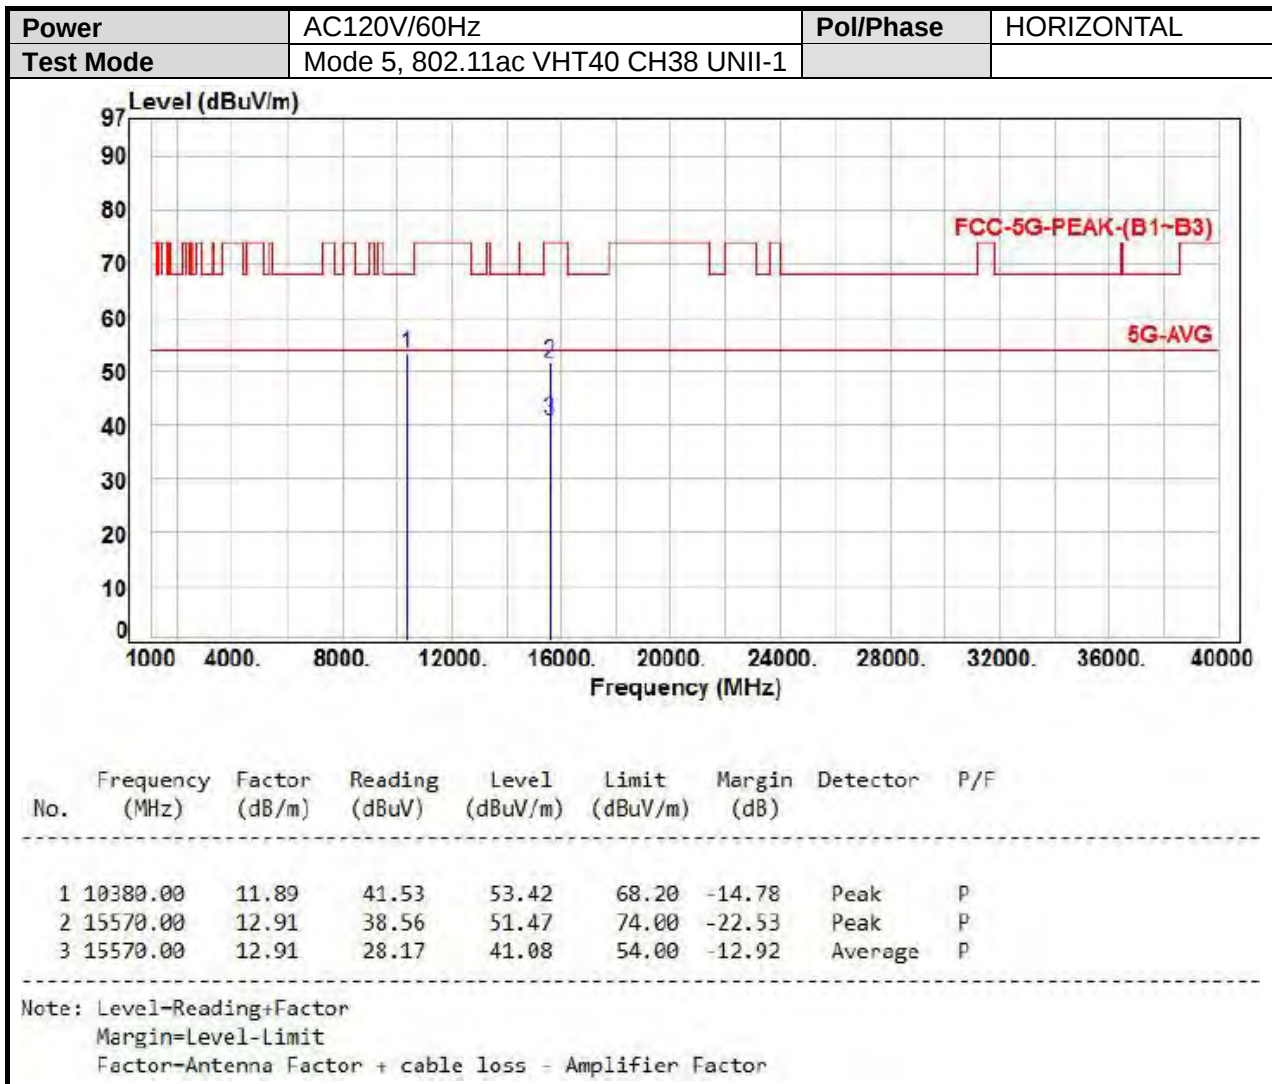


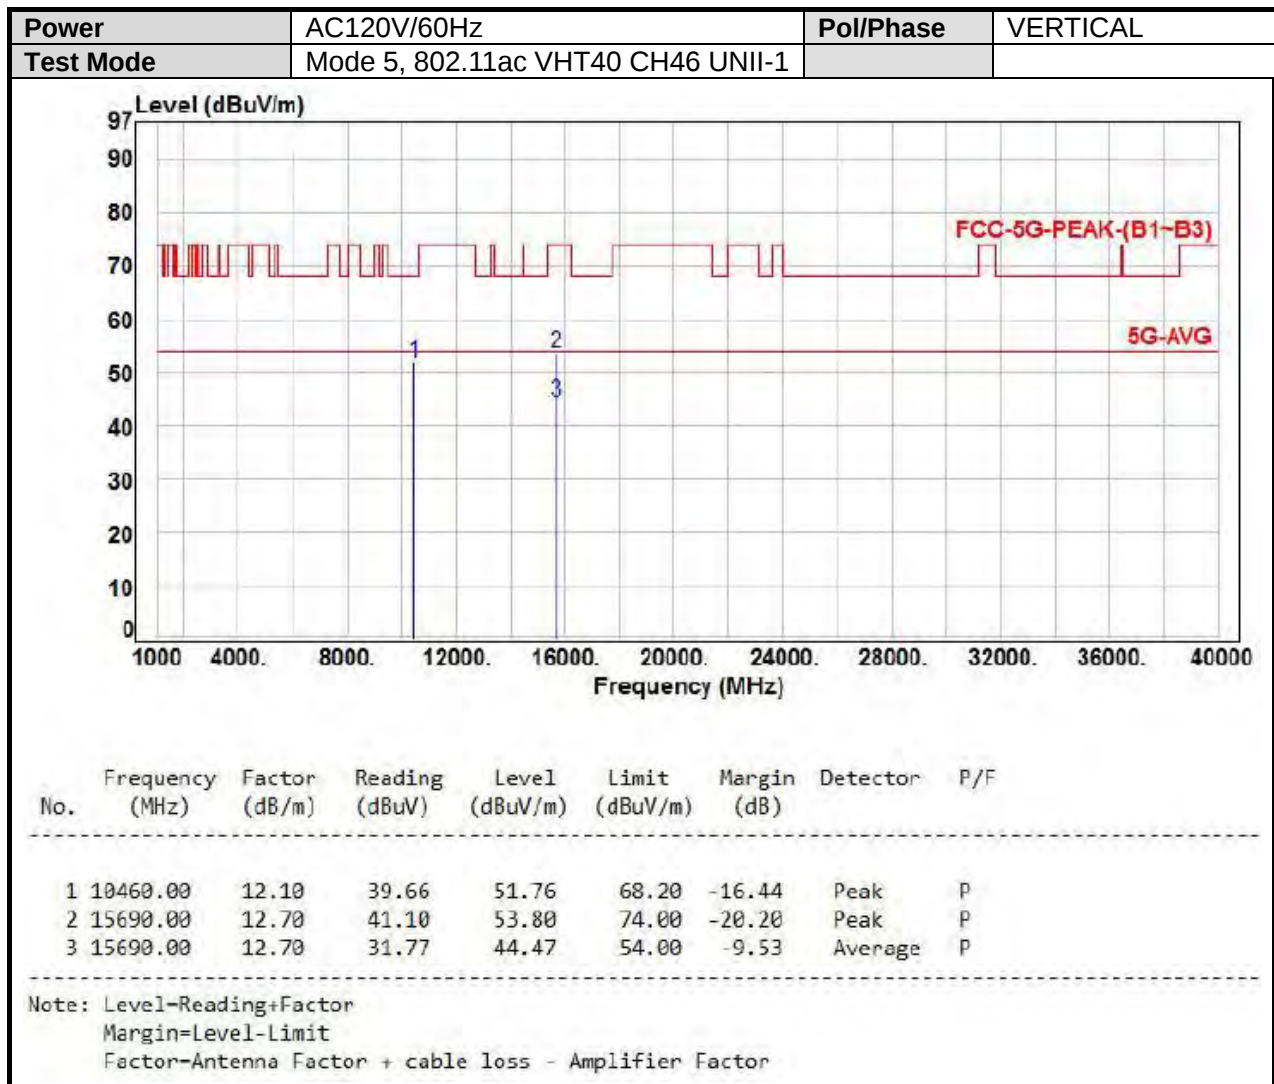


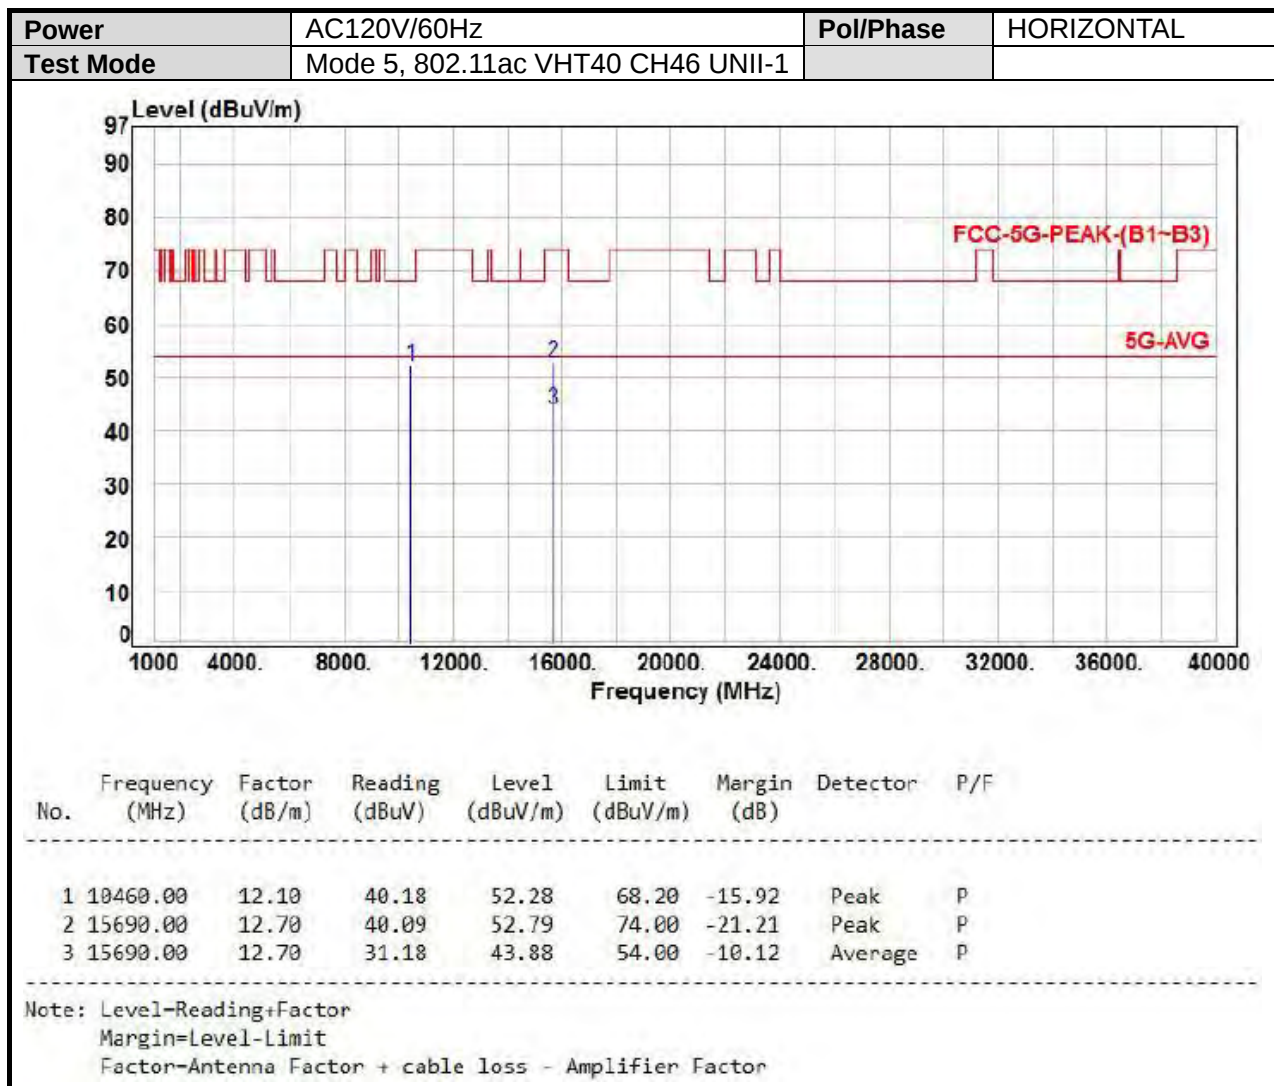


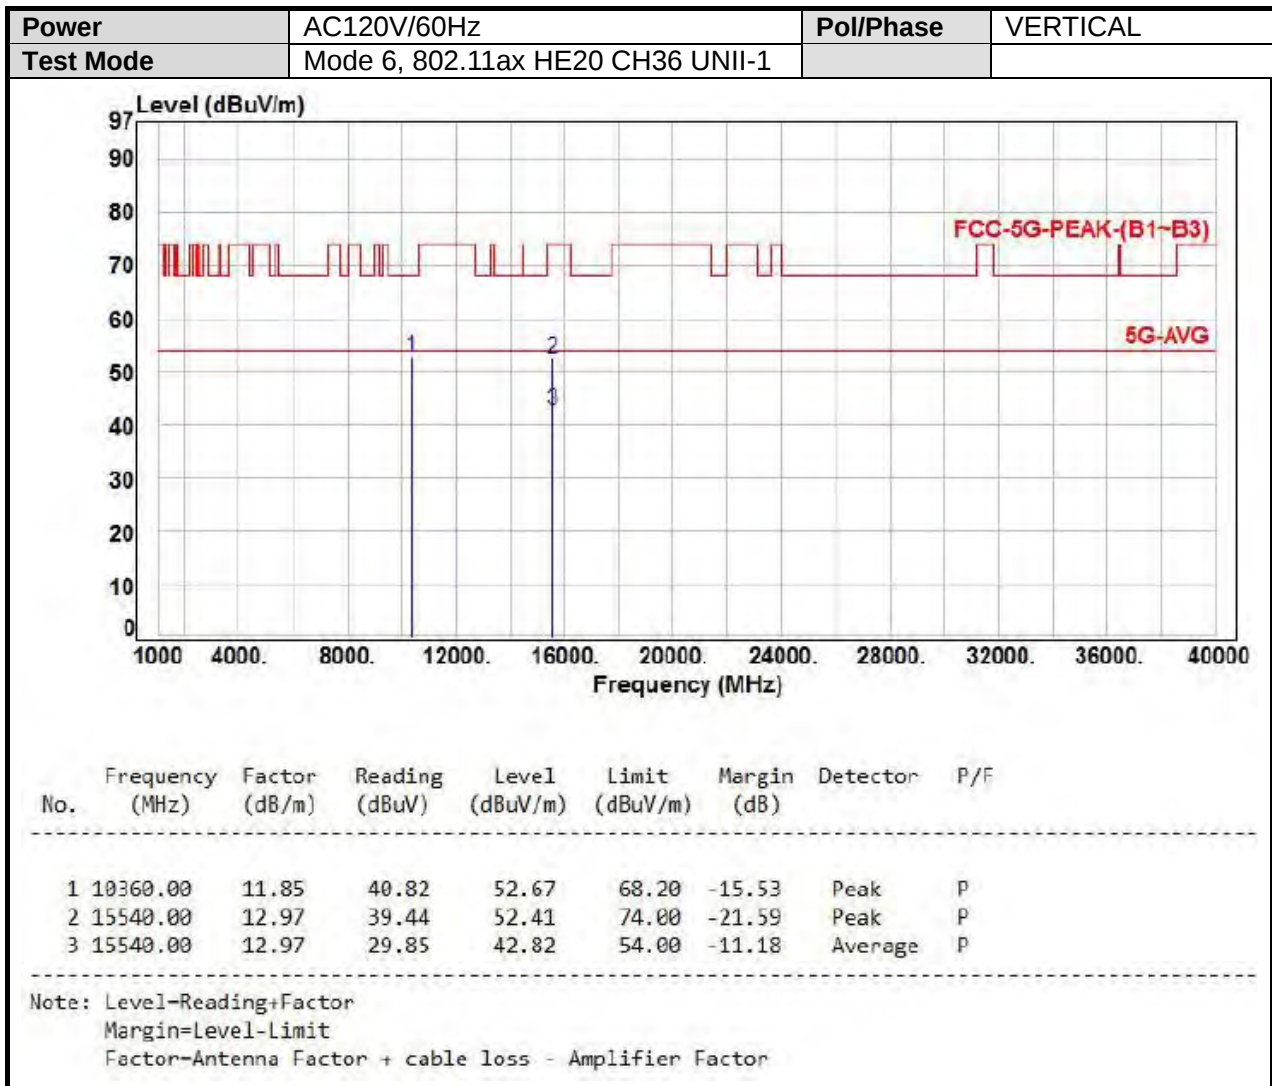


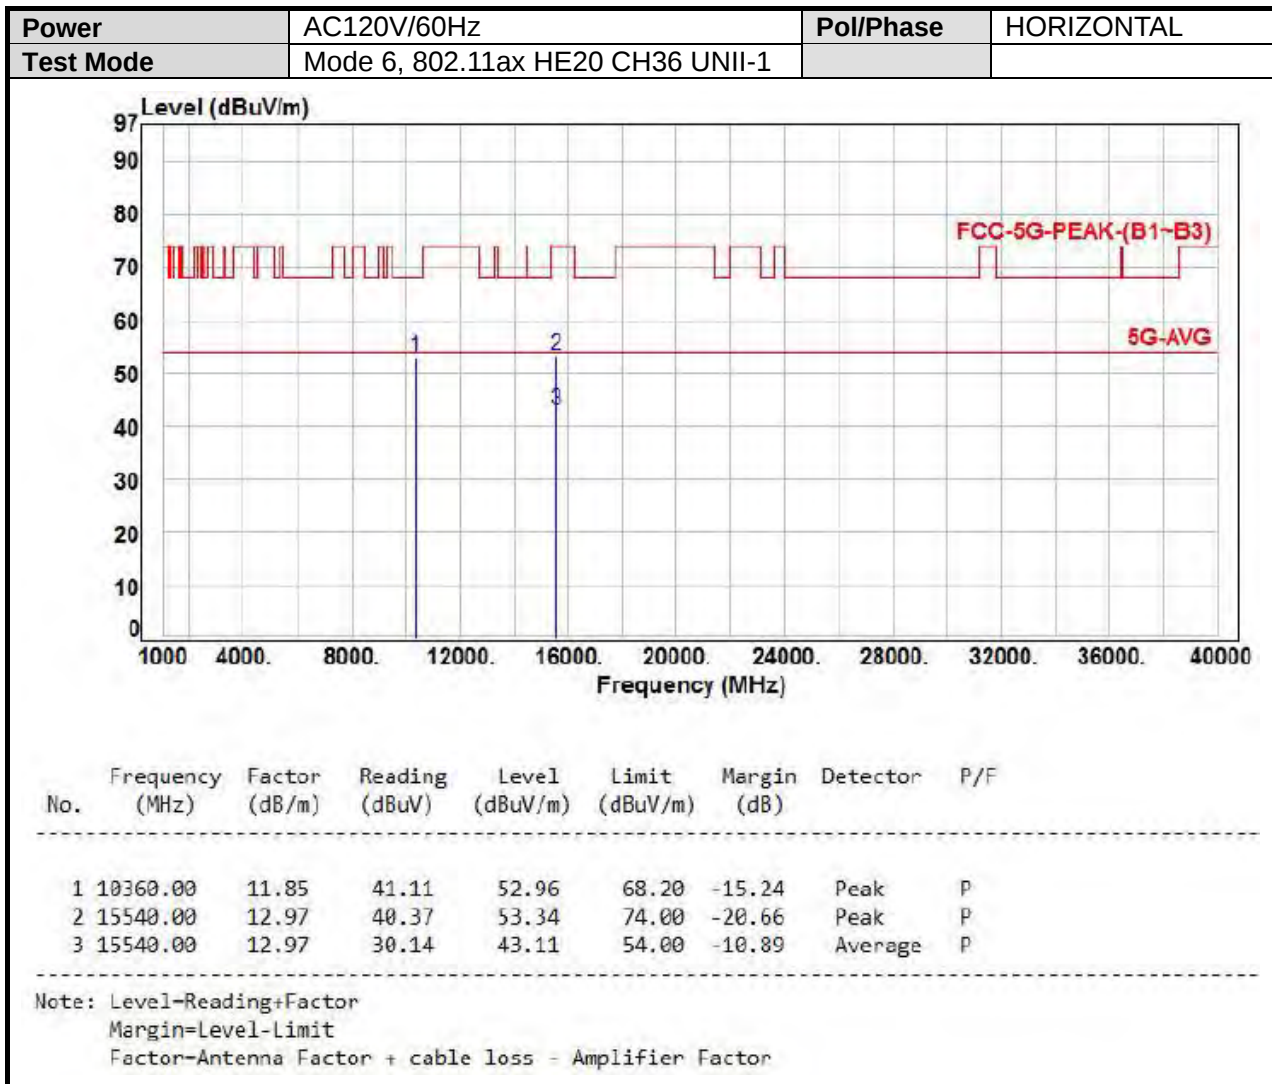


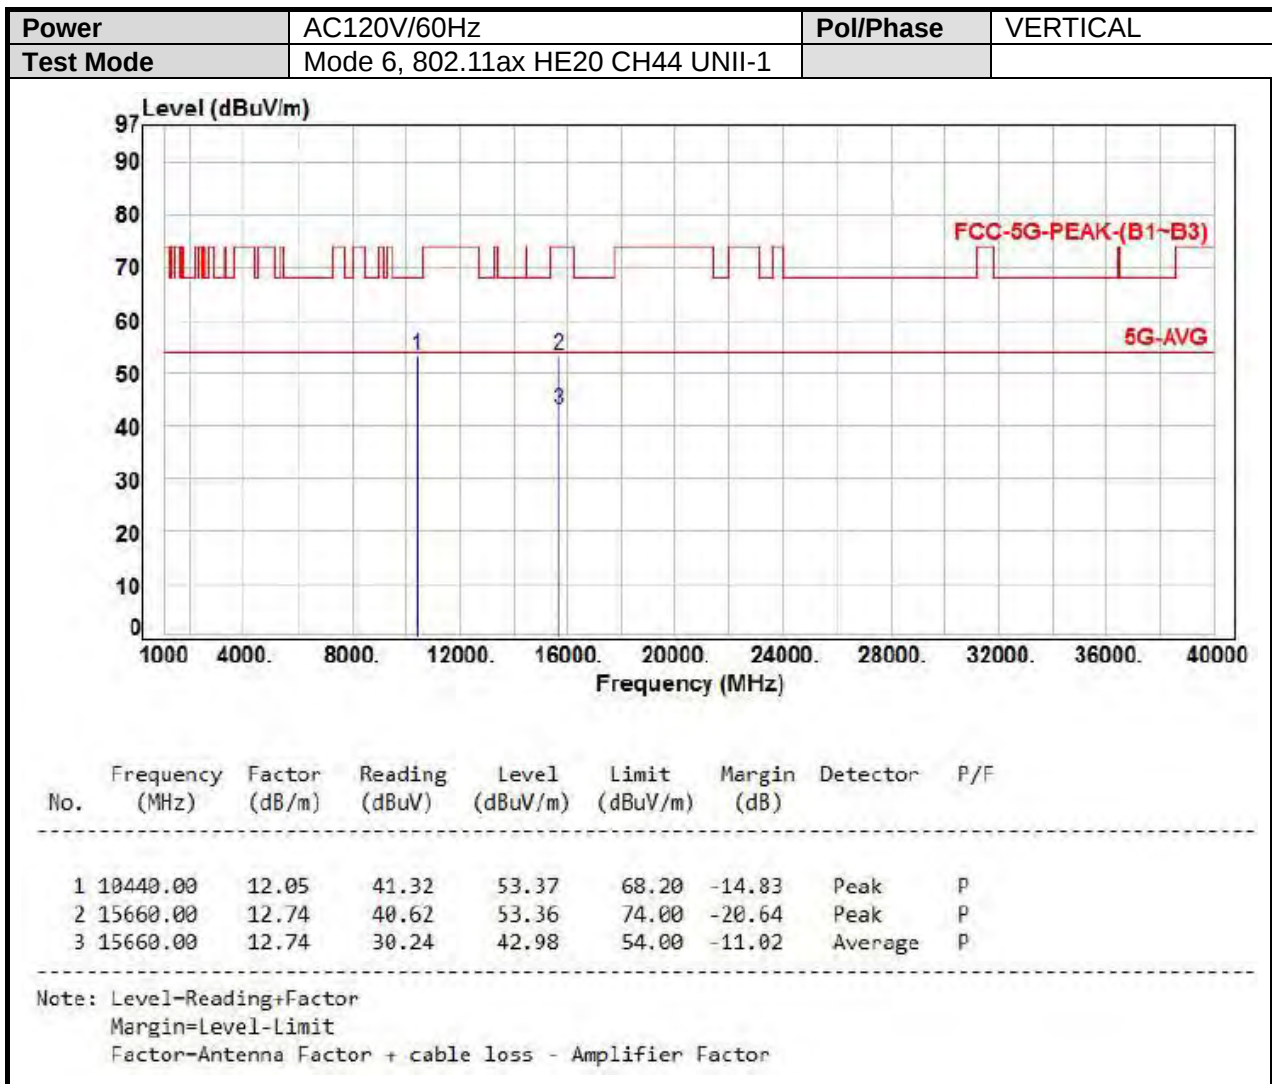


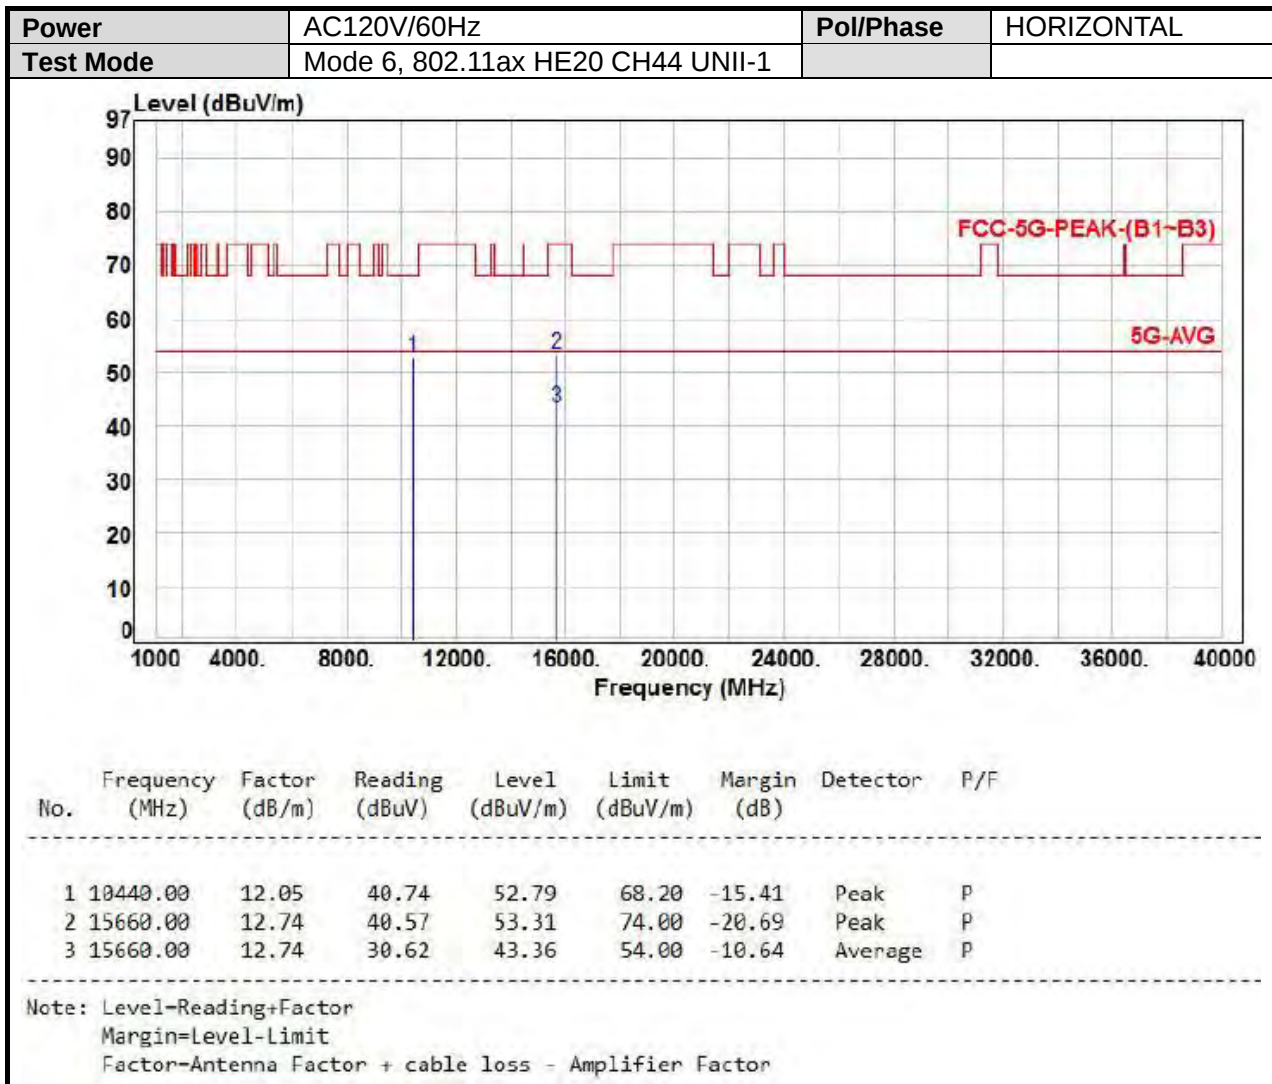


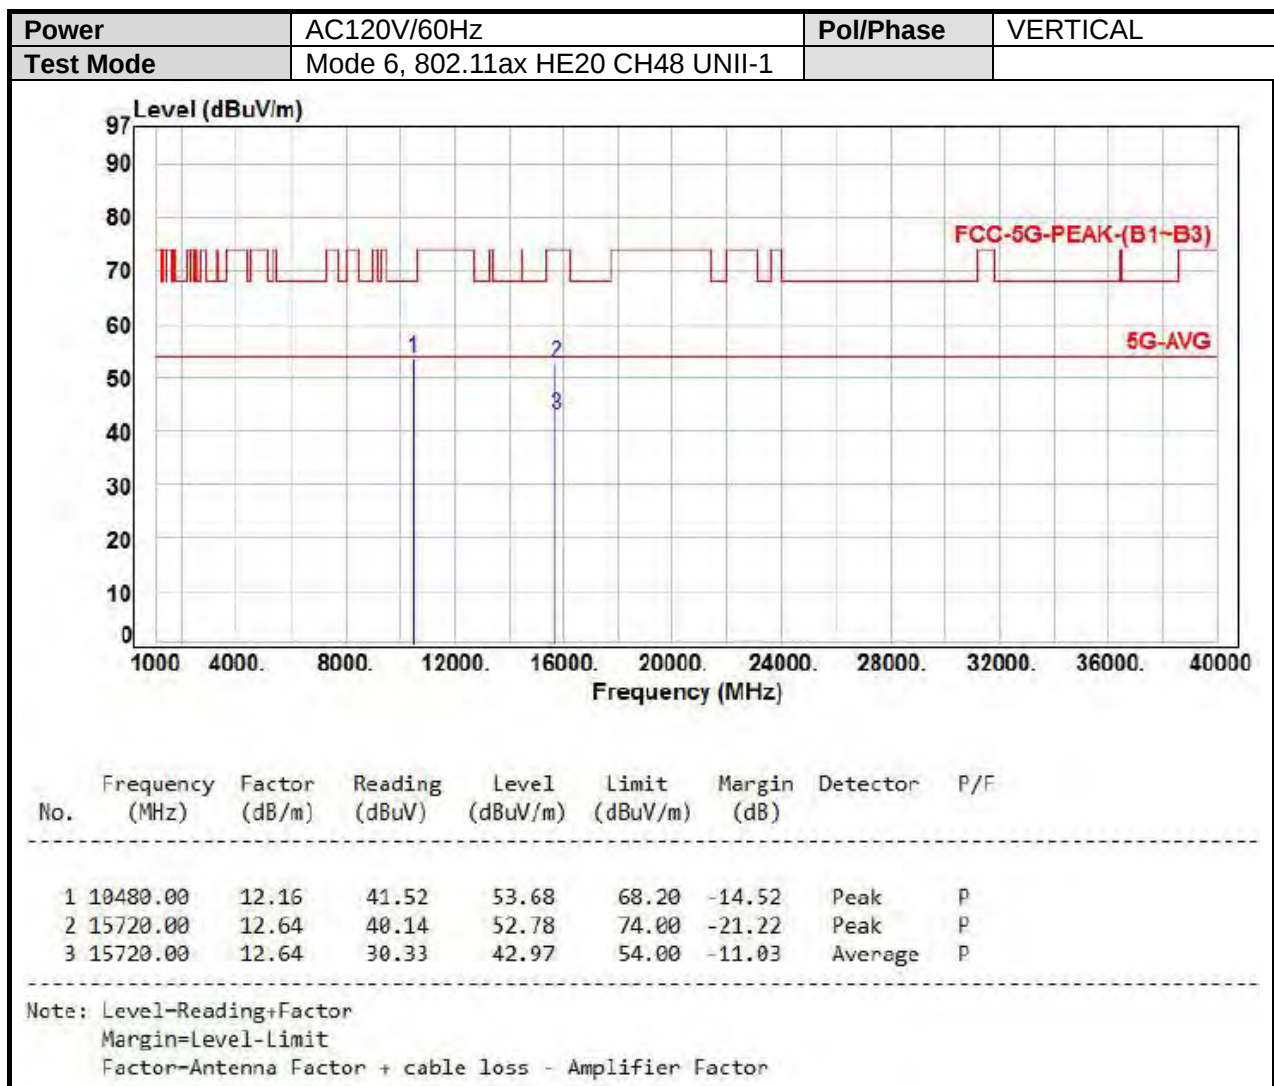


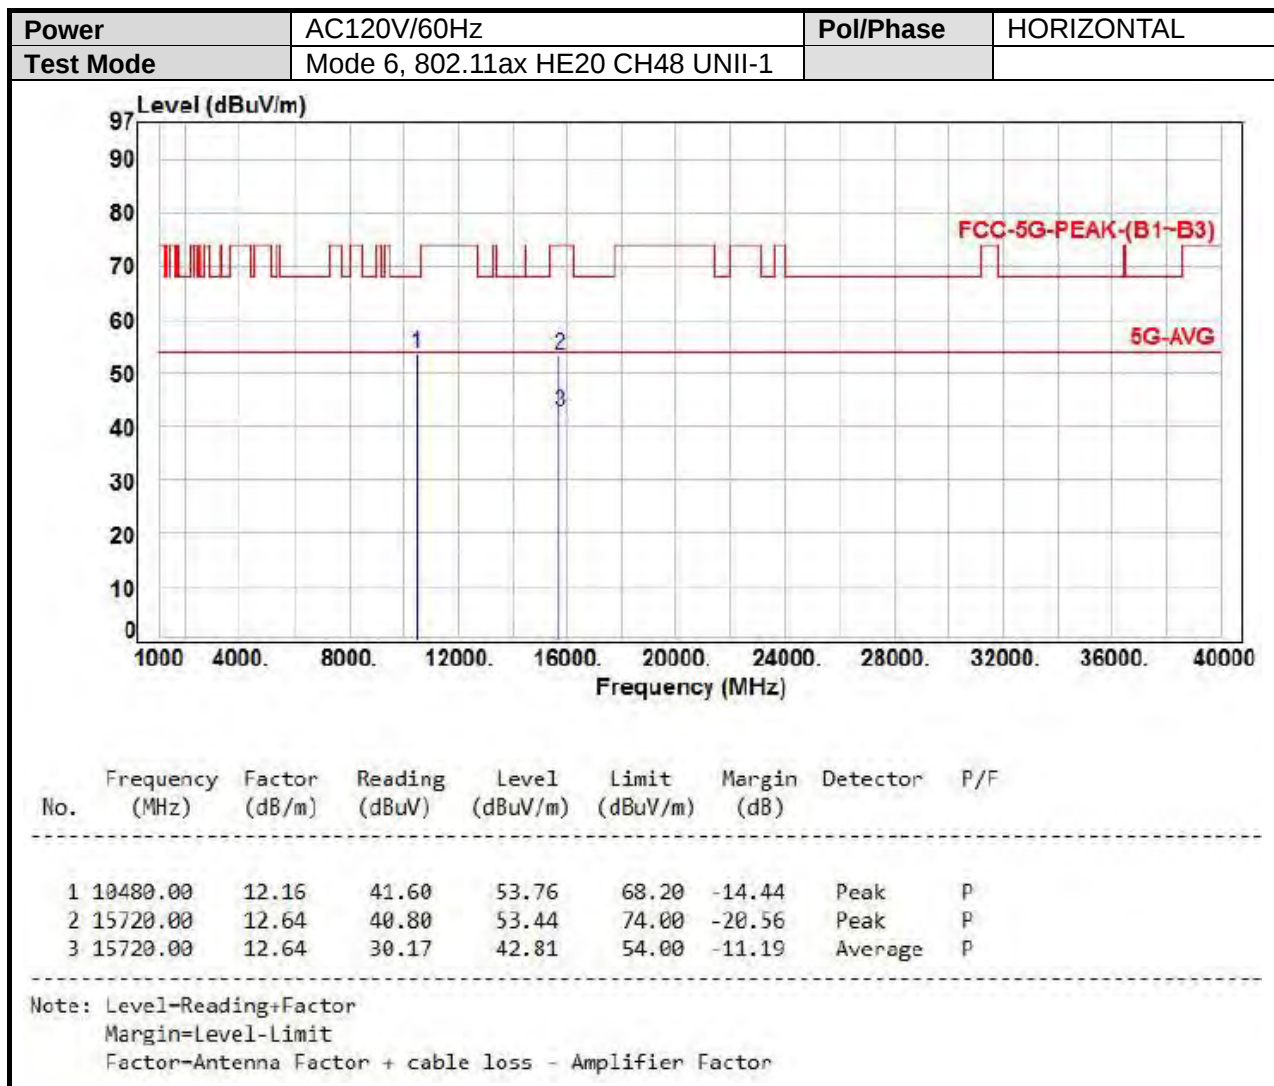

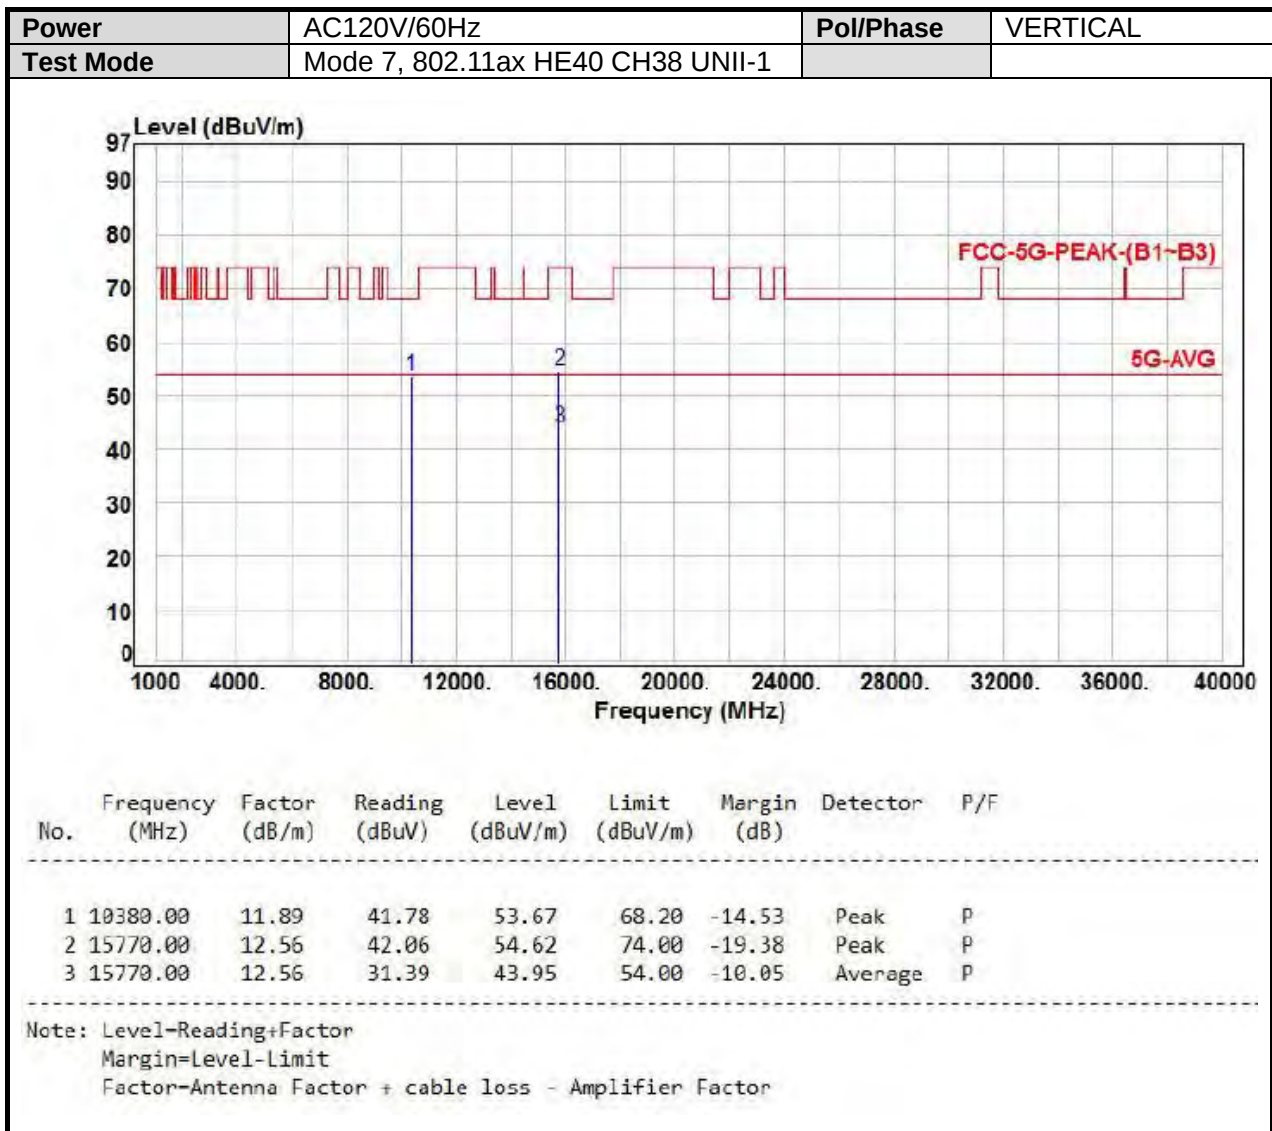

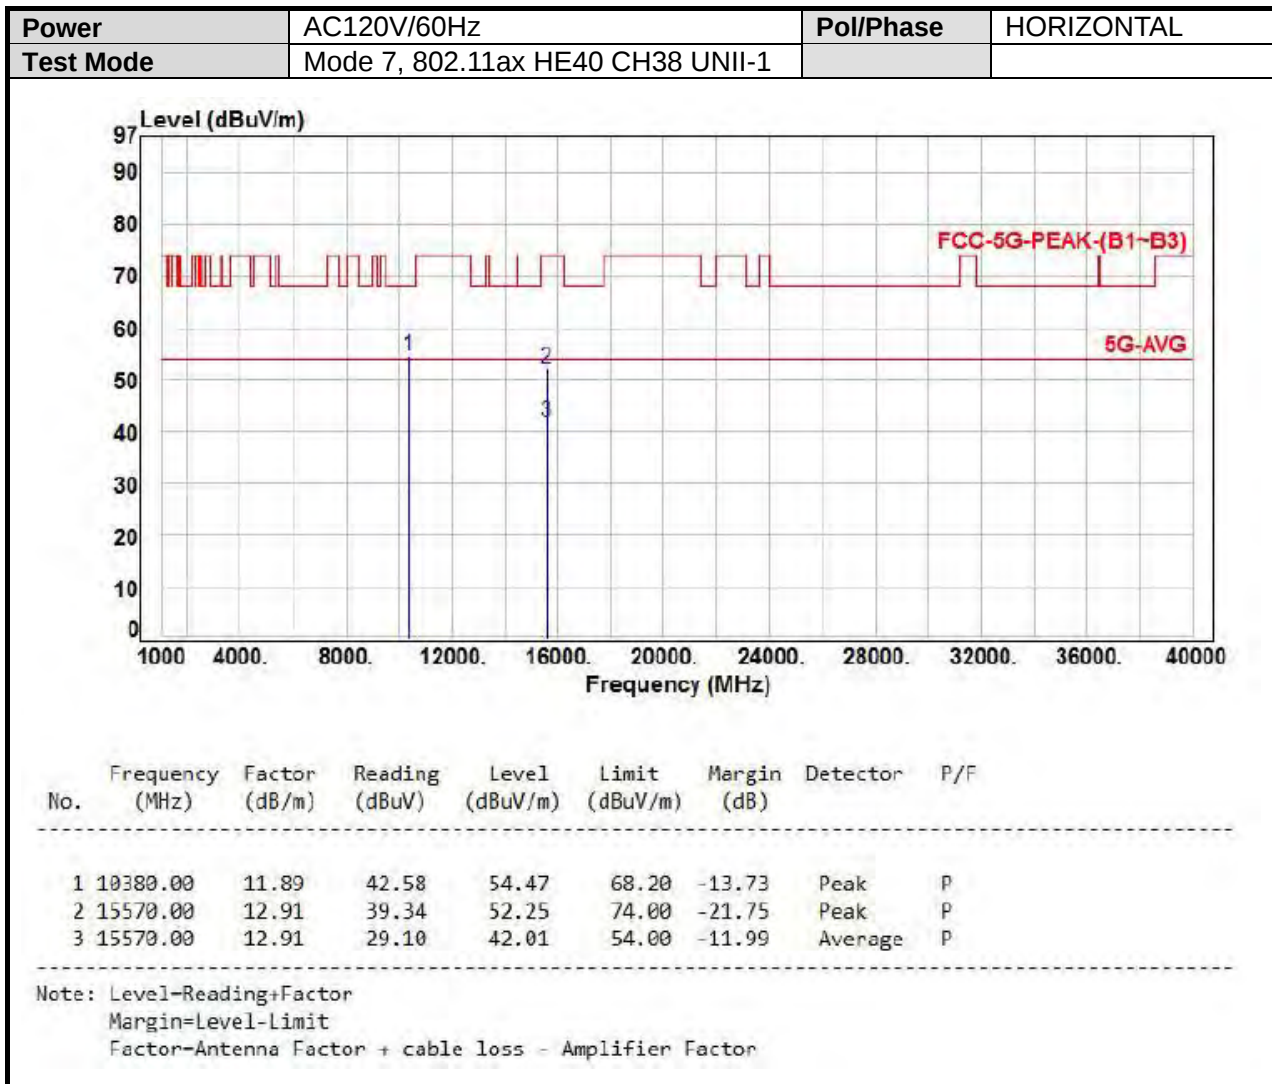


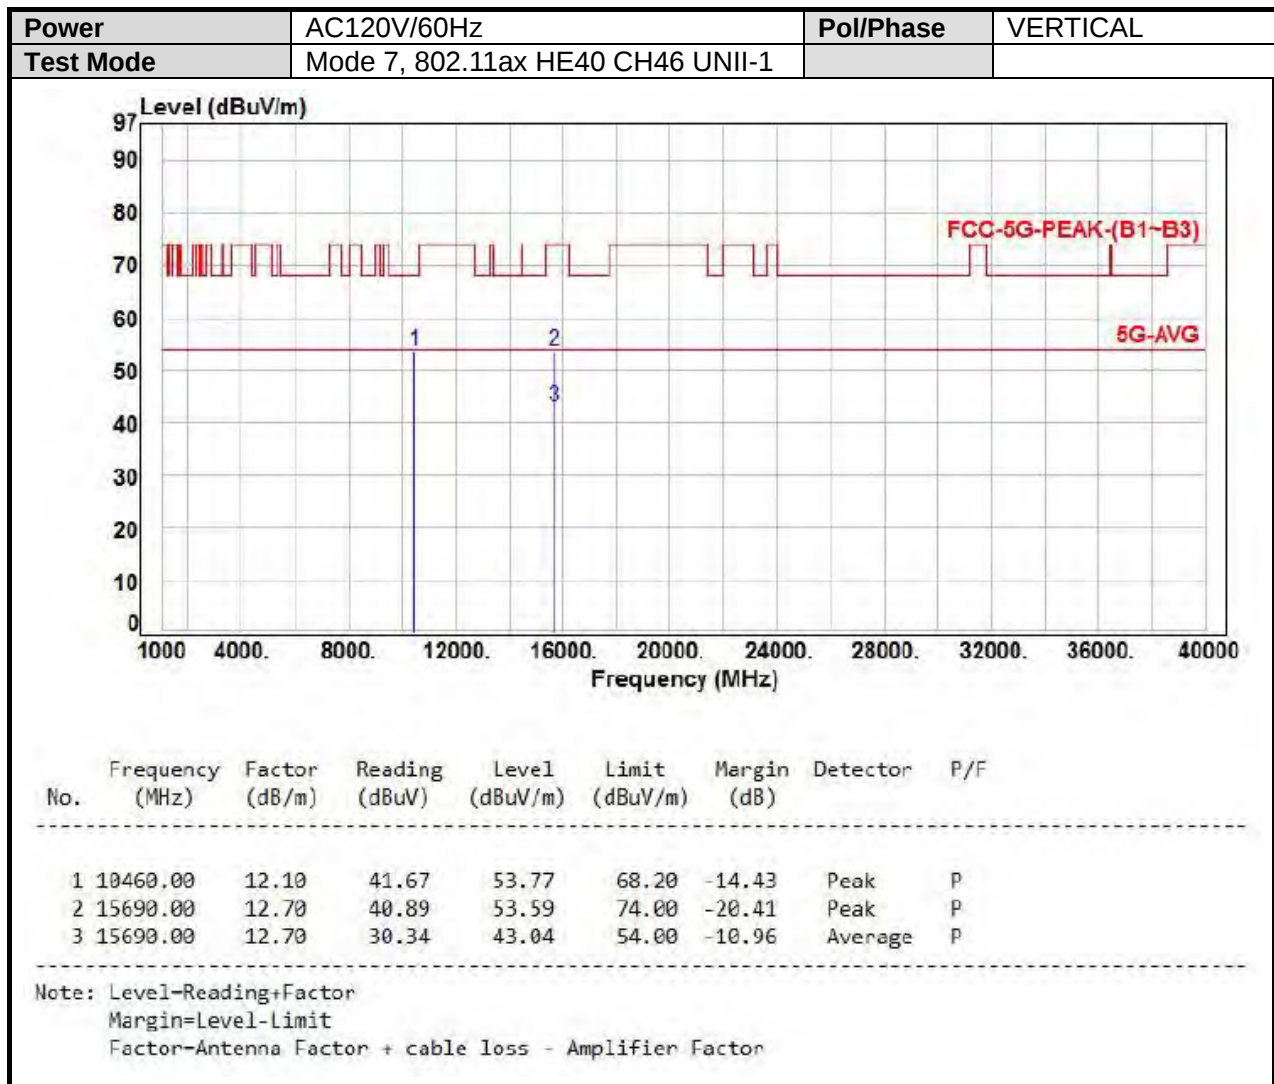


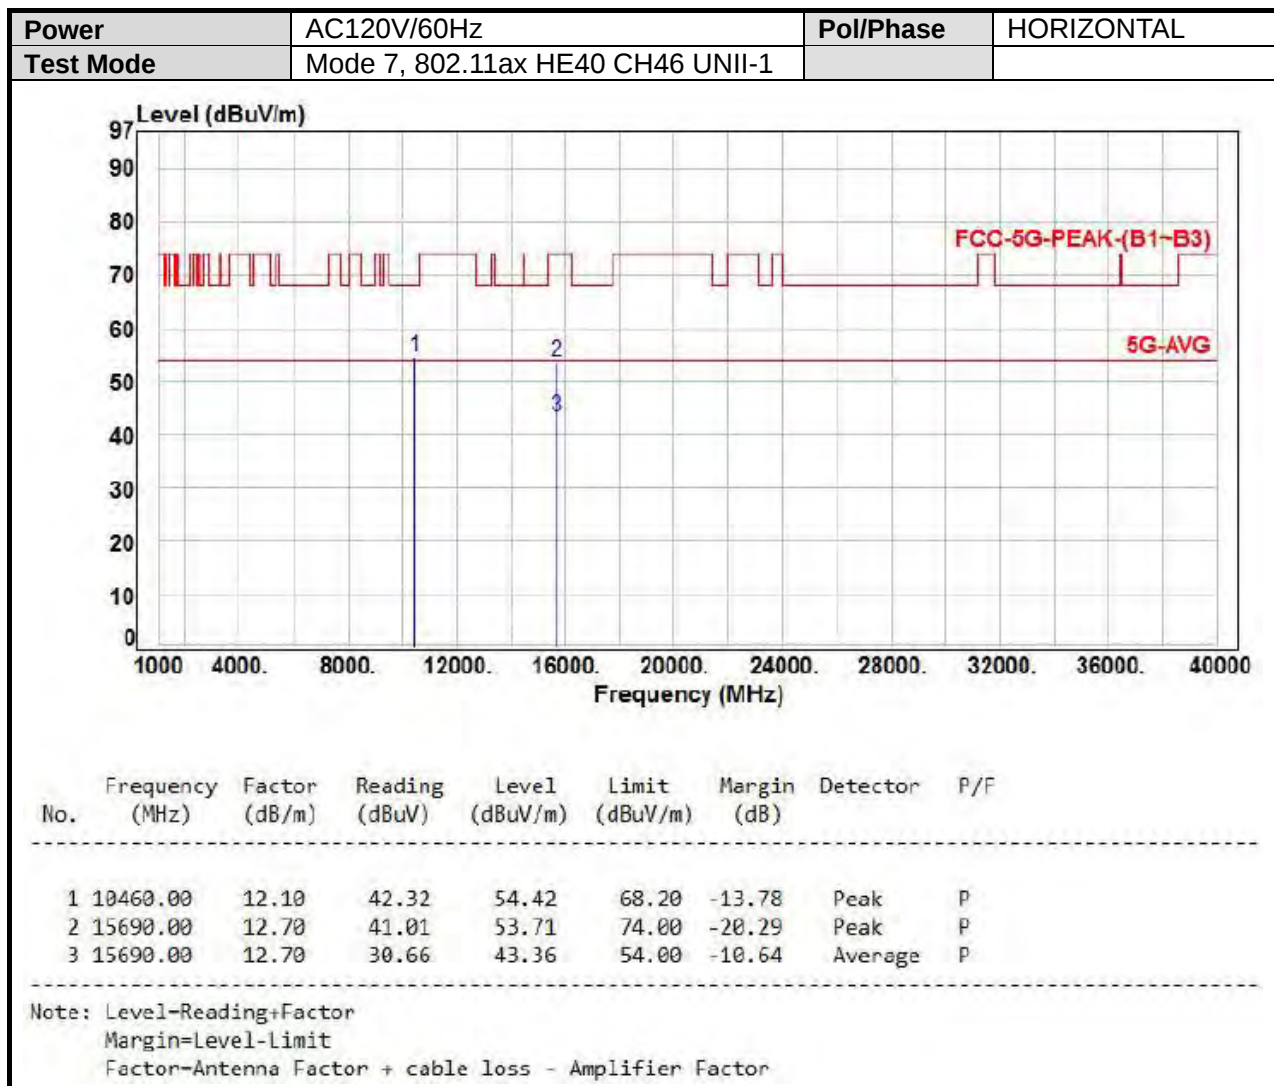






UNII-2A

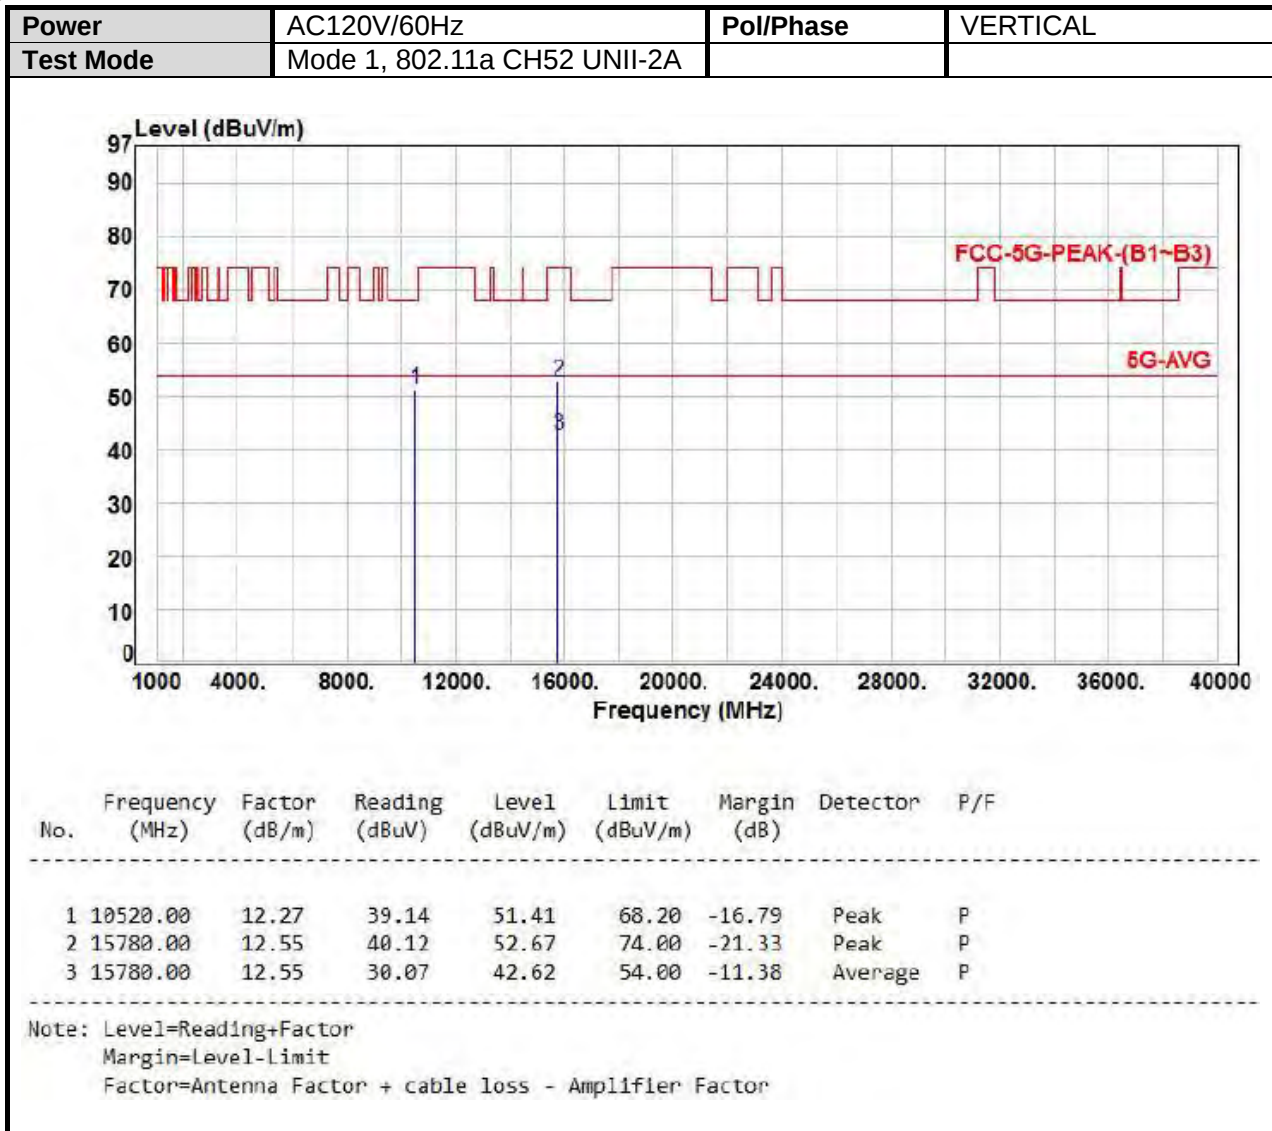


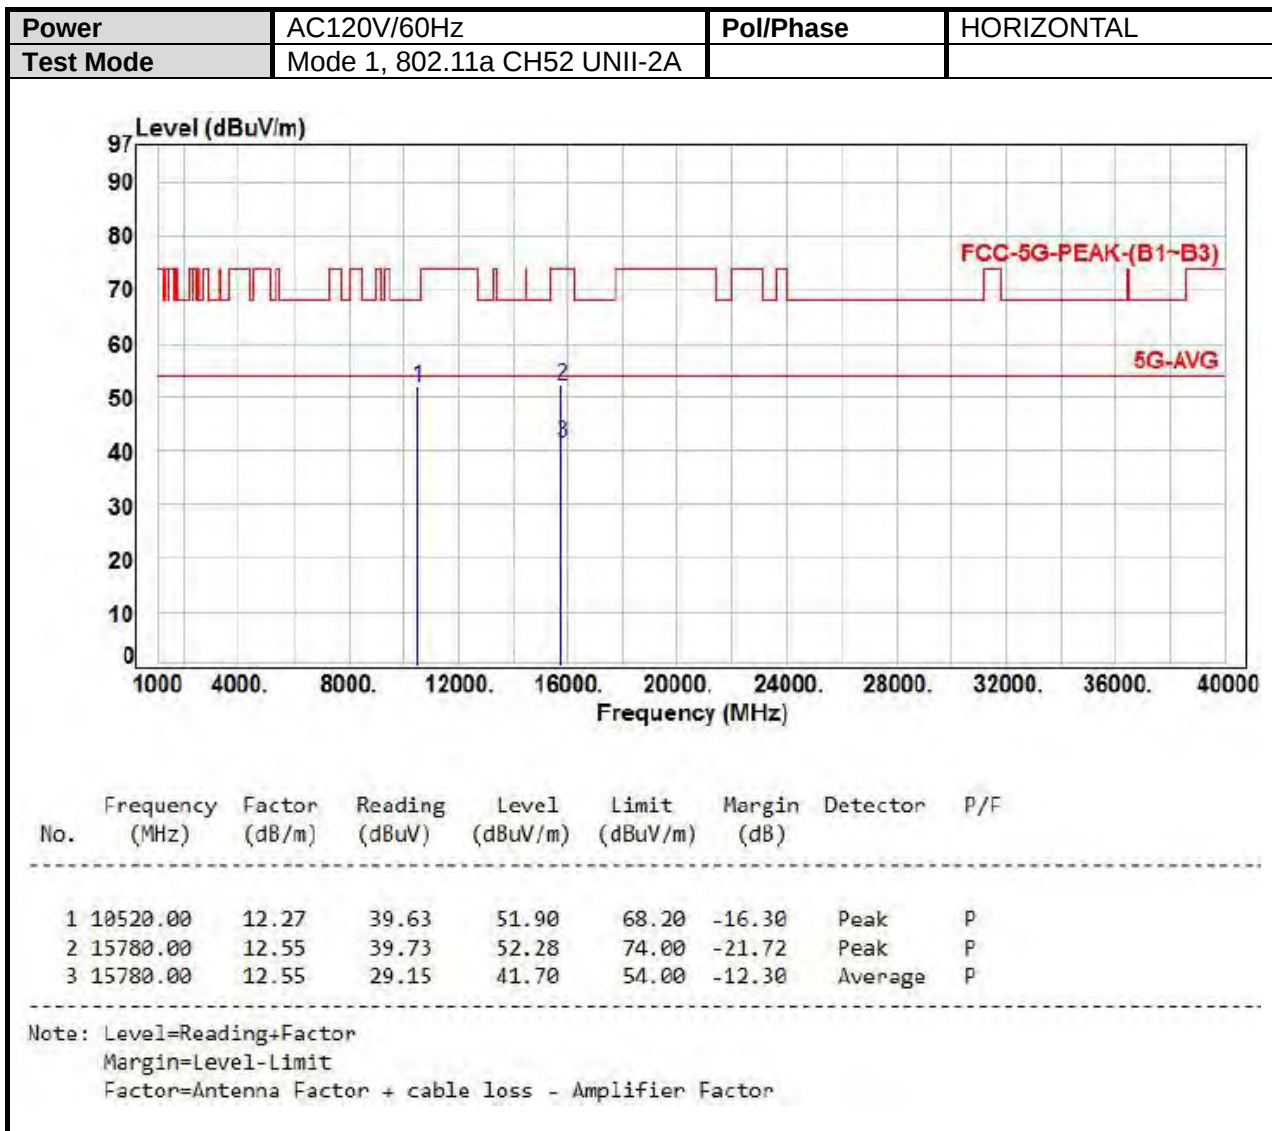


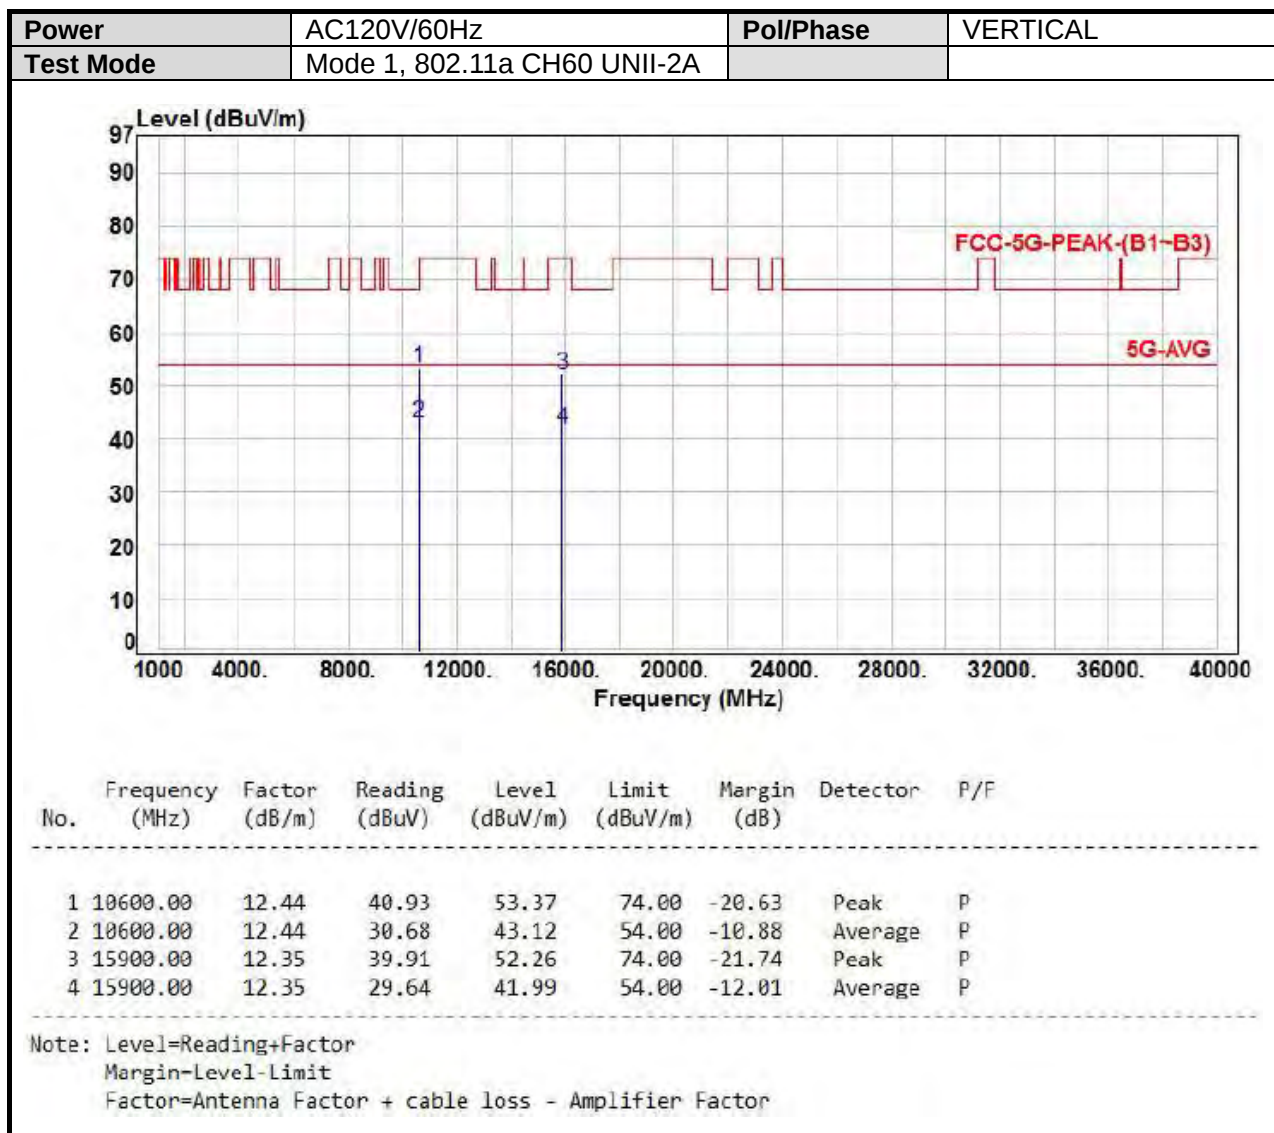


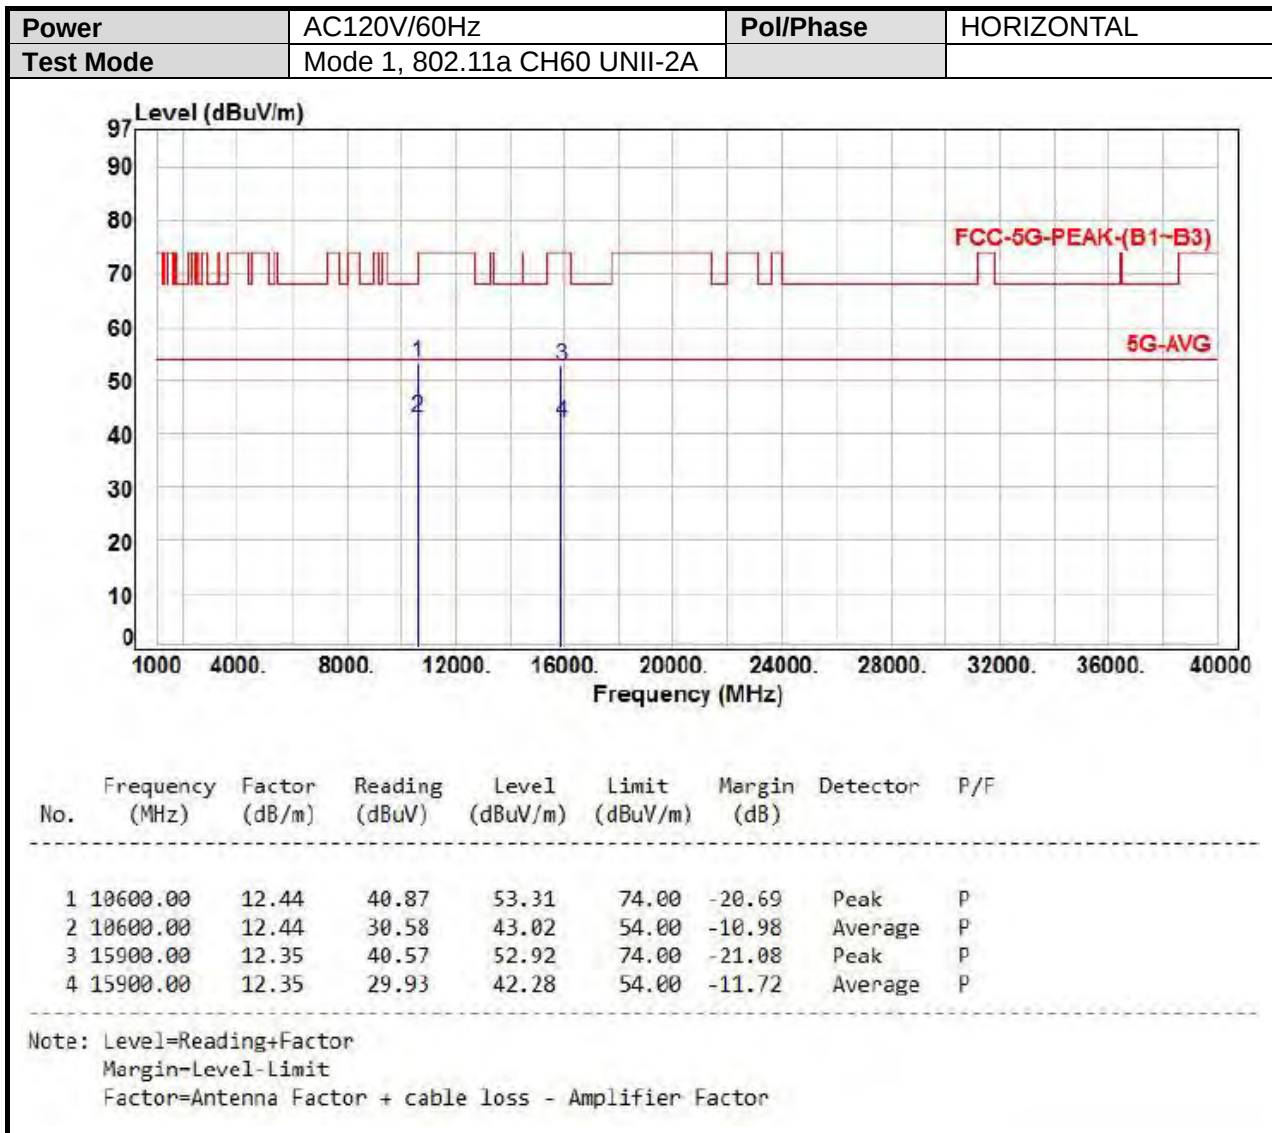


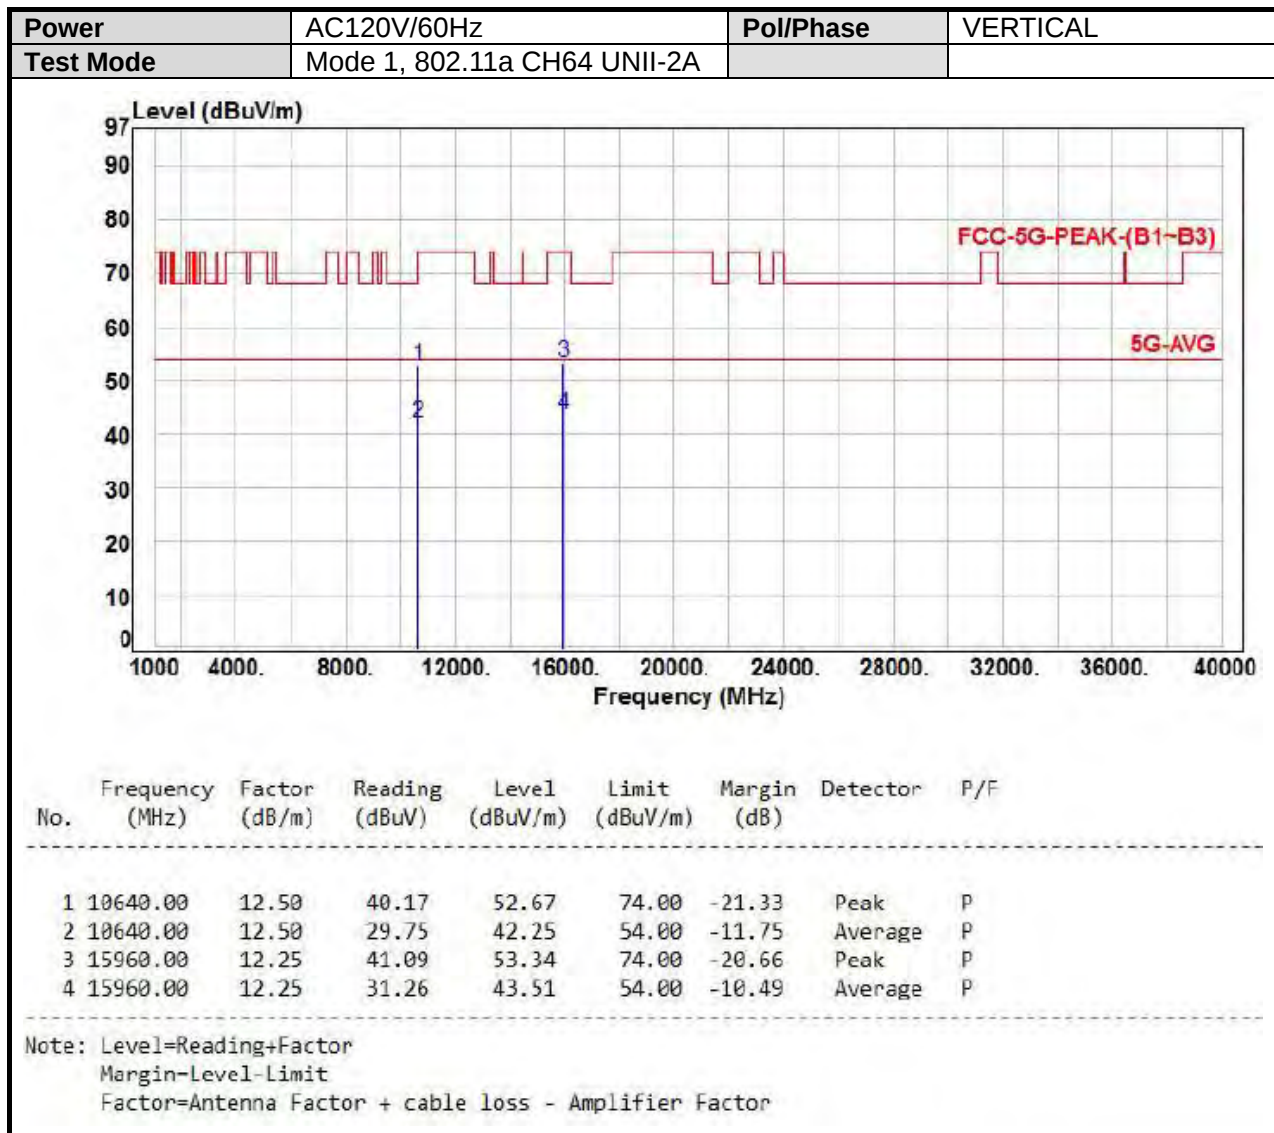


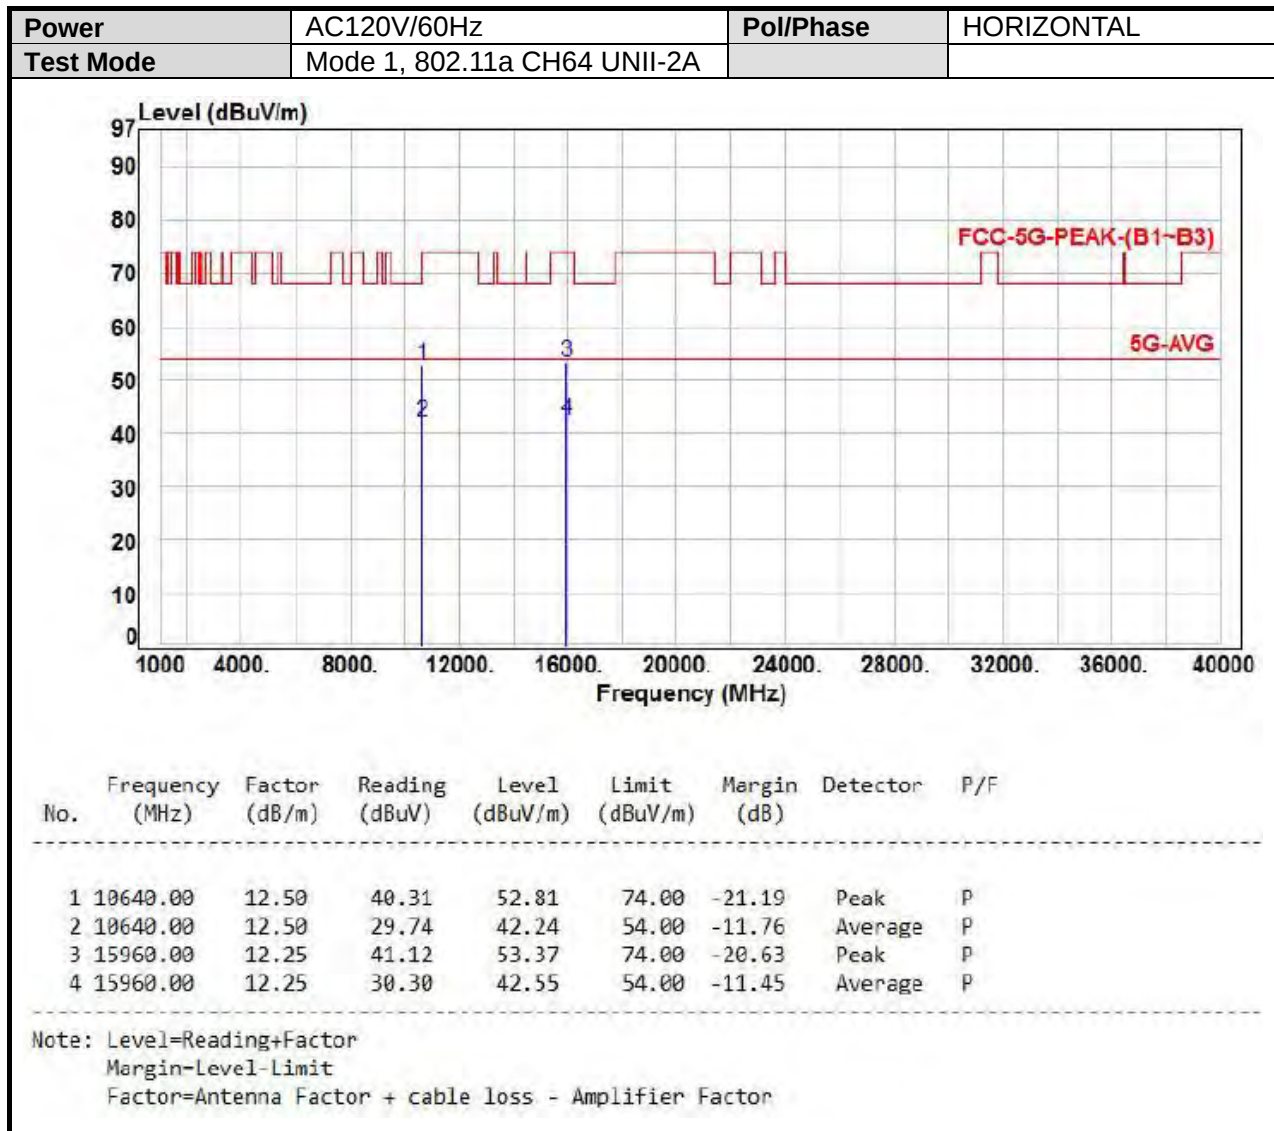


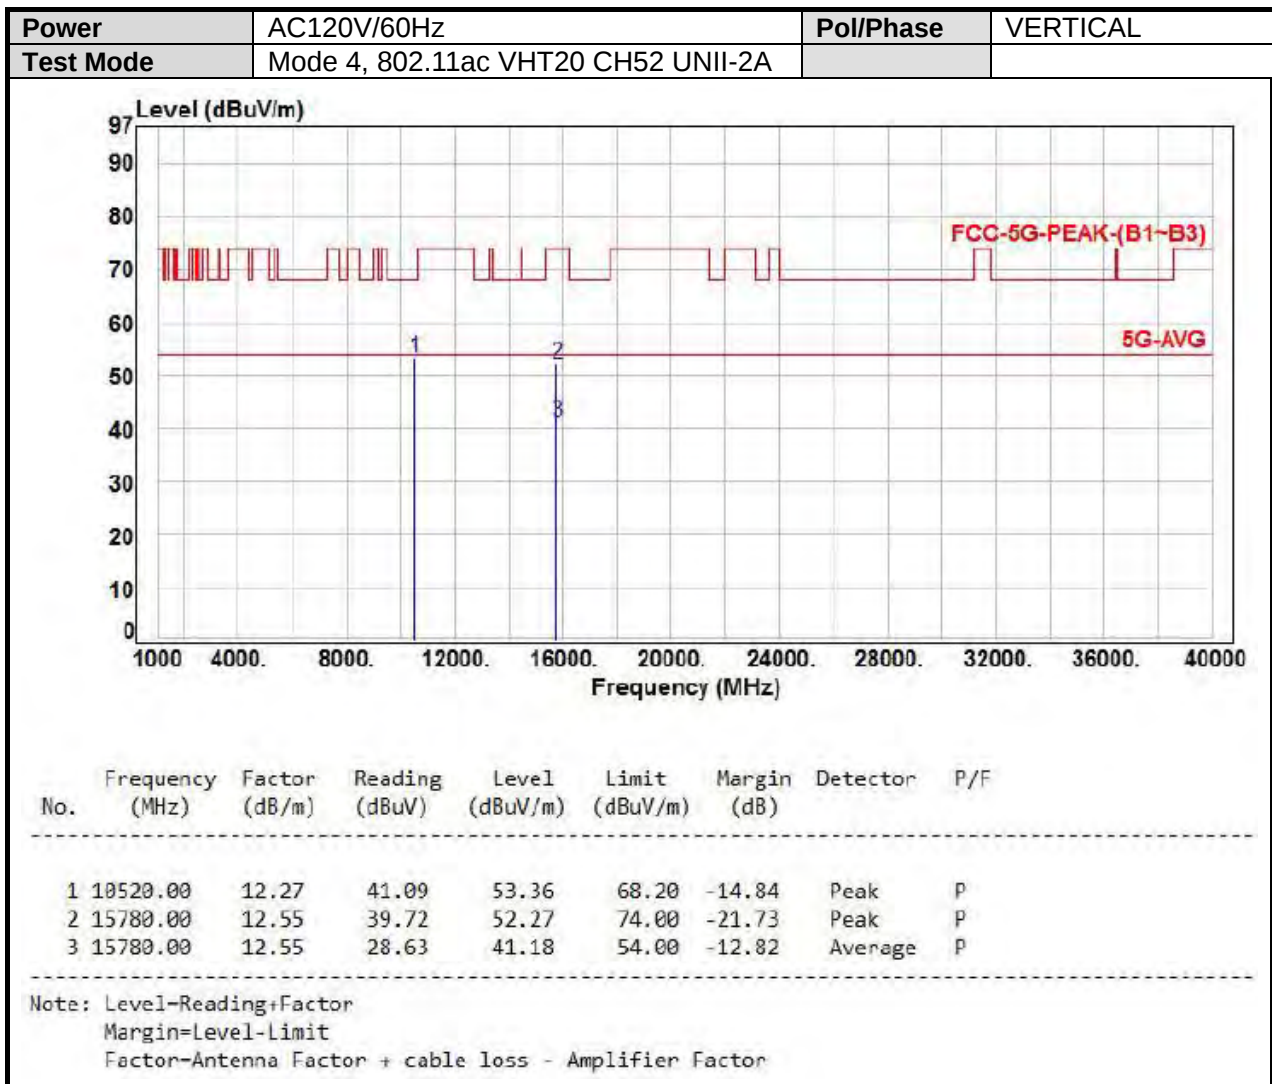


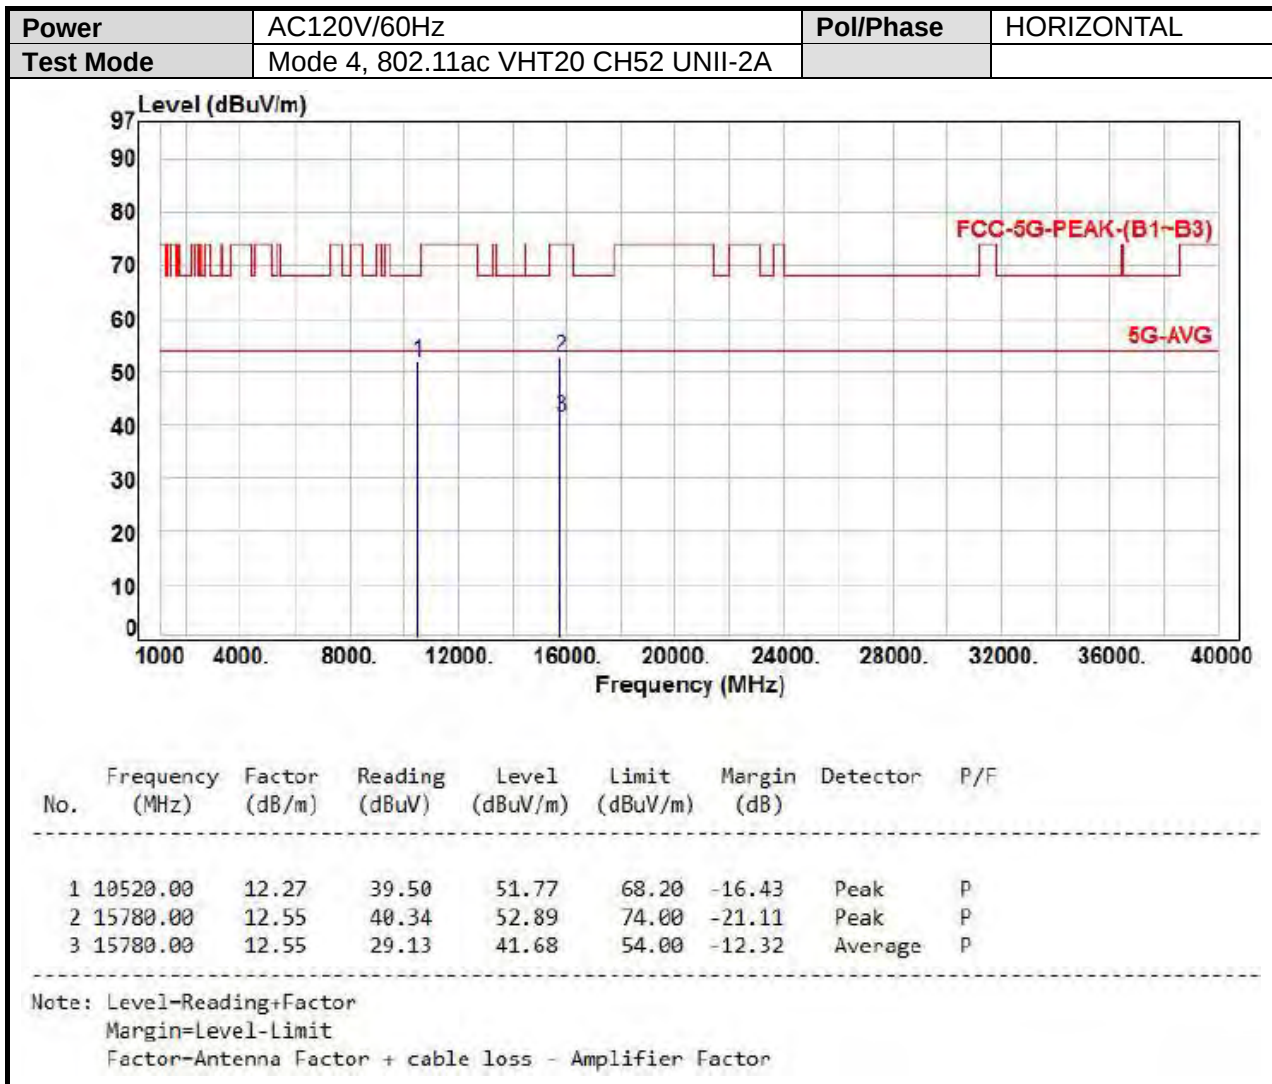


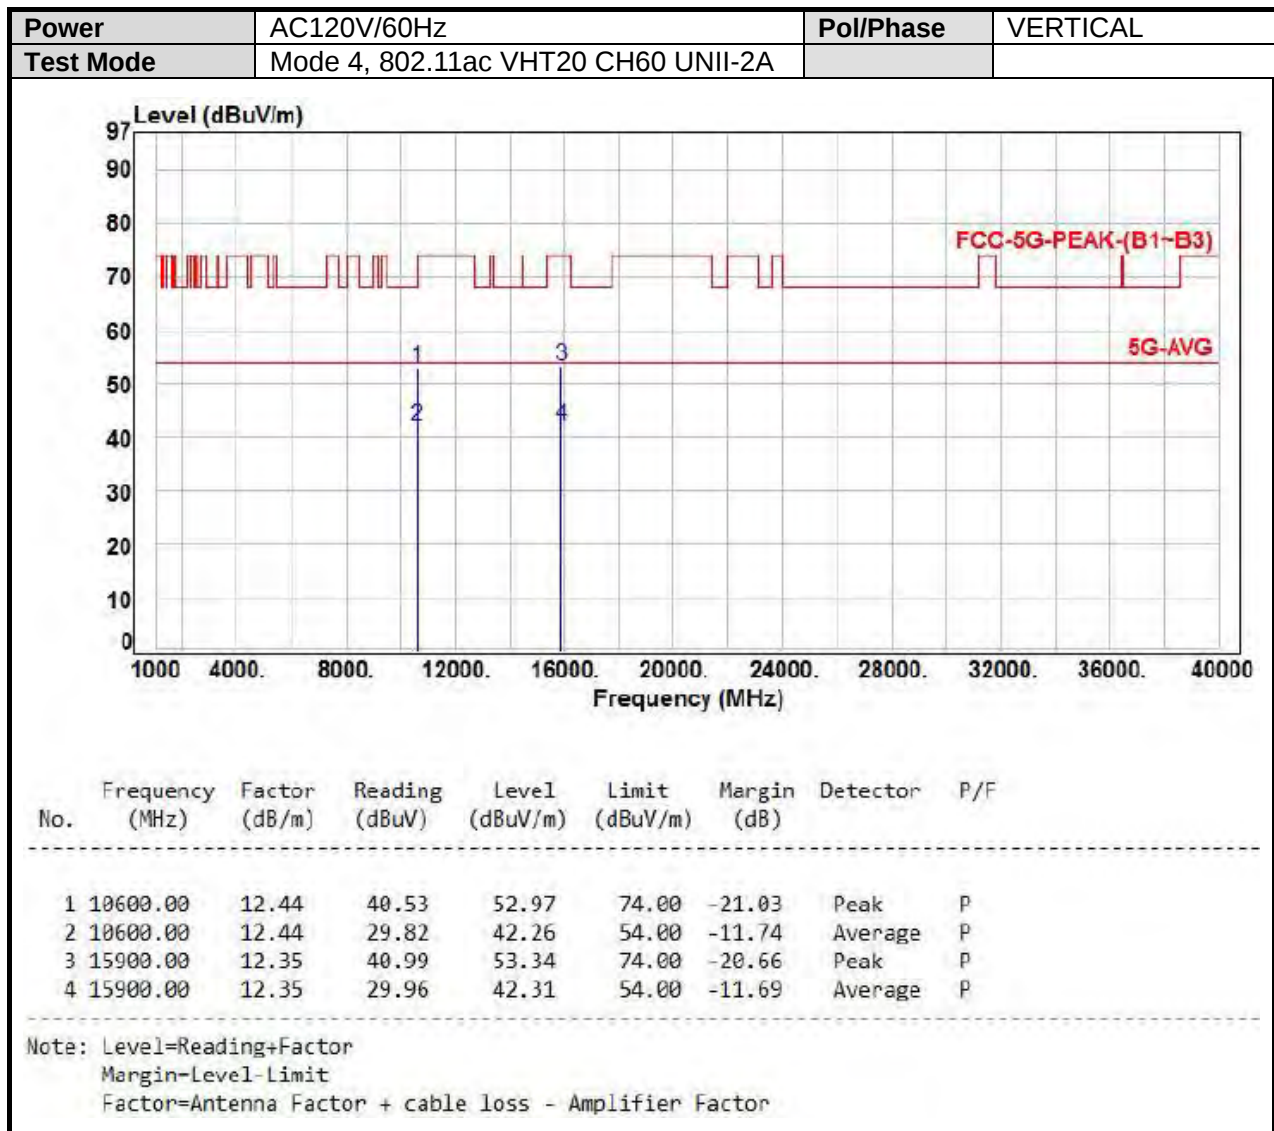


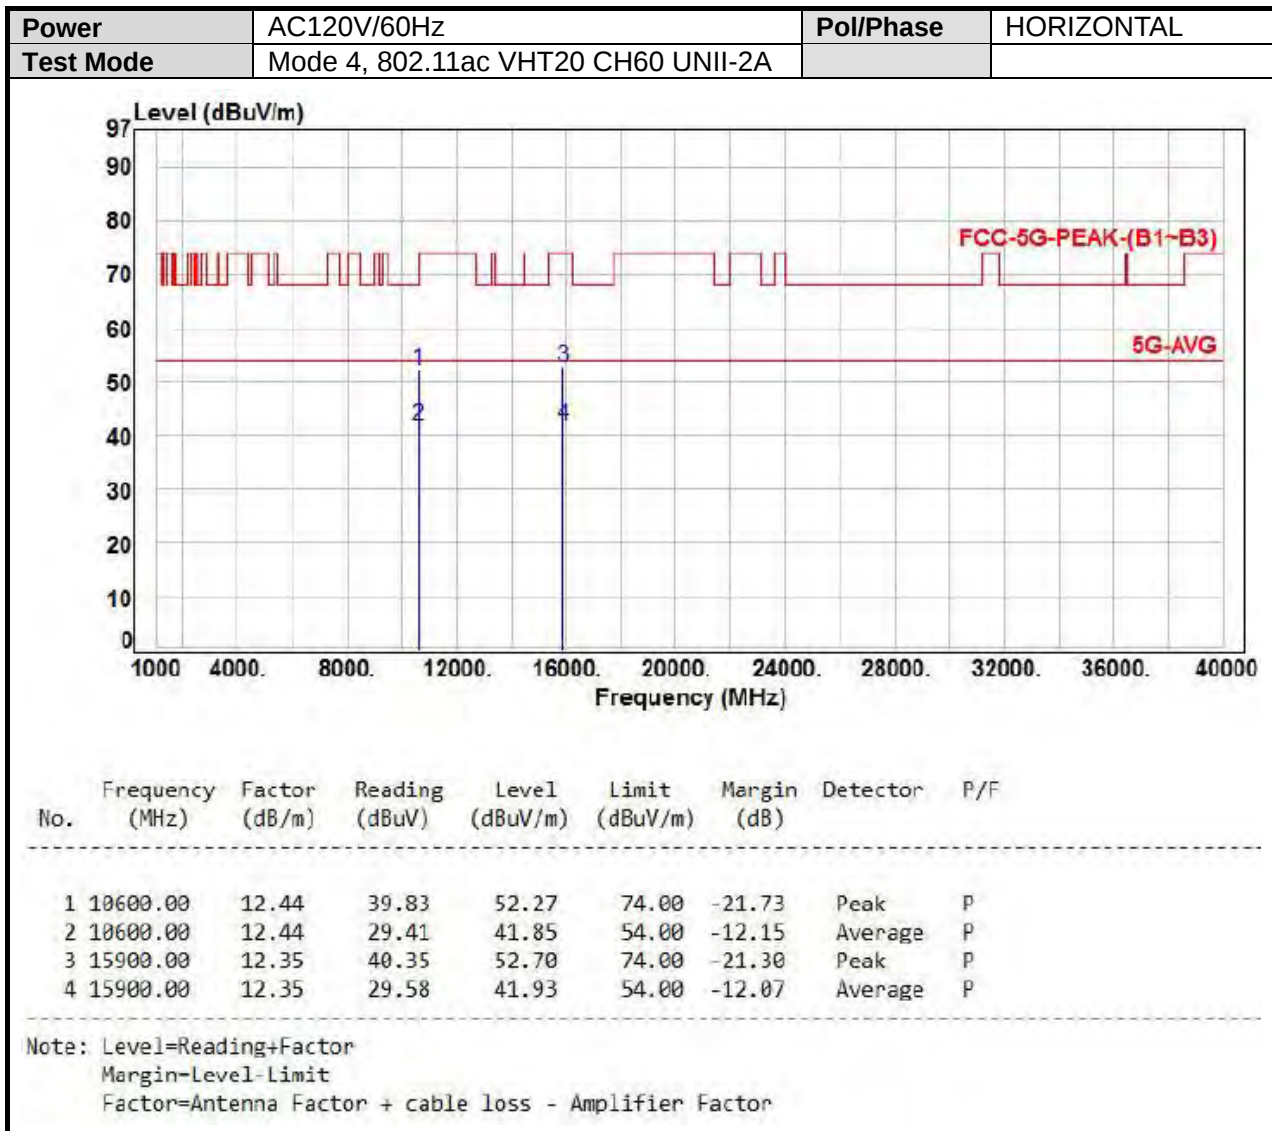


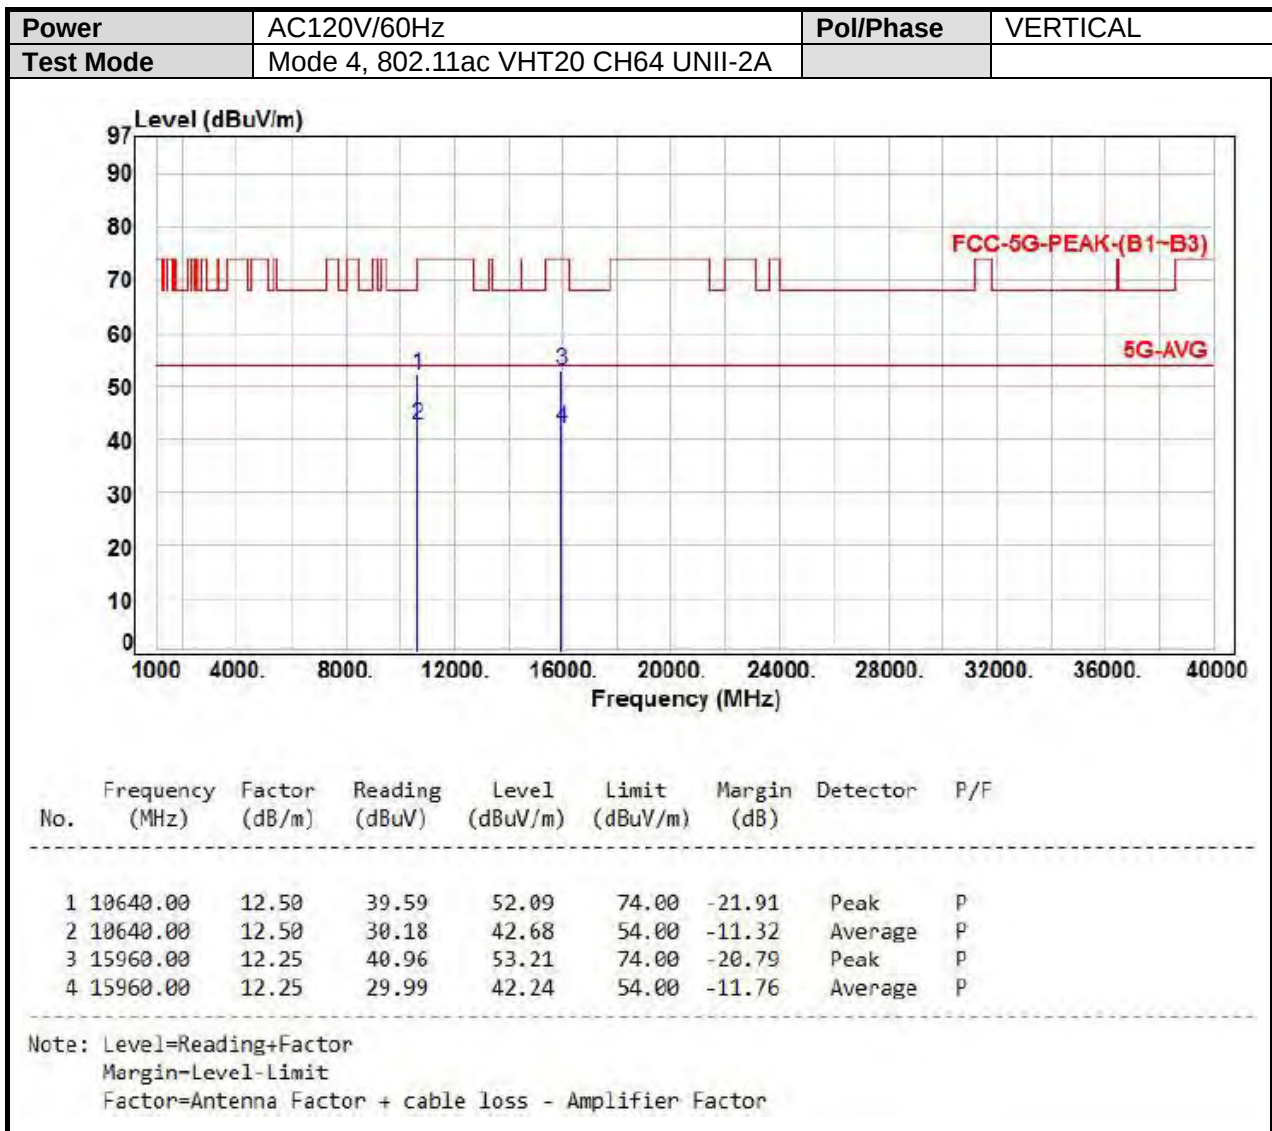


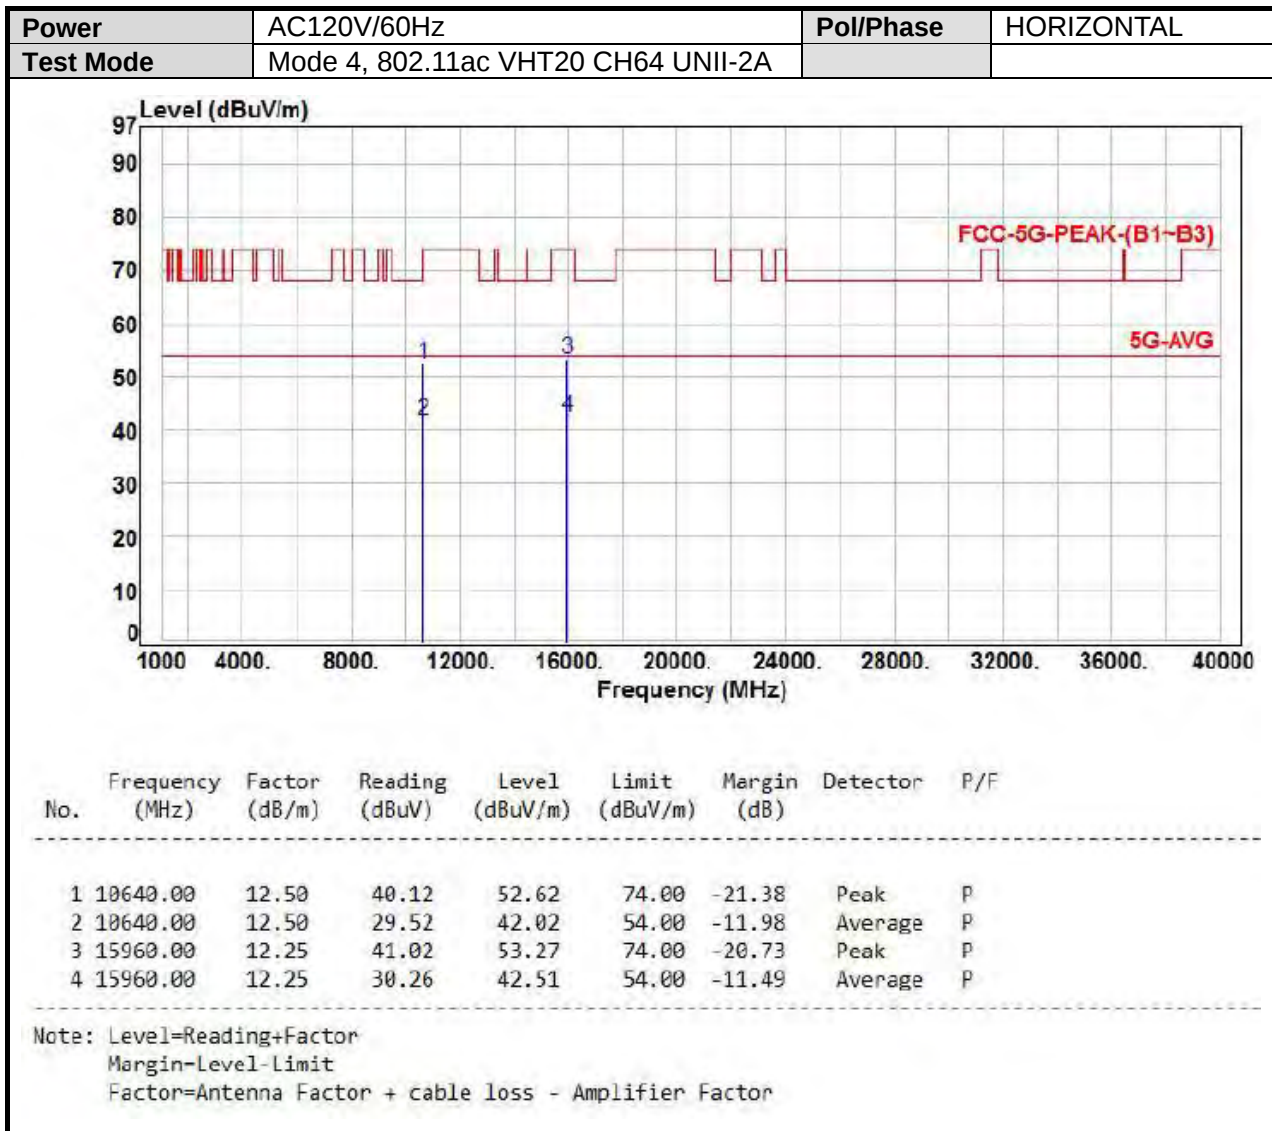


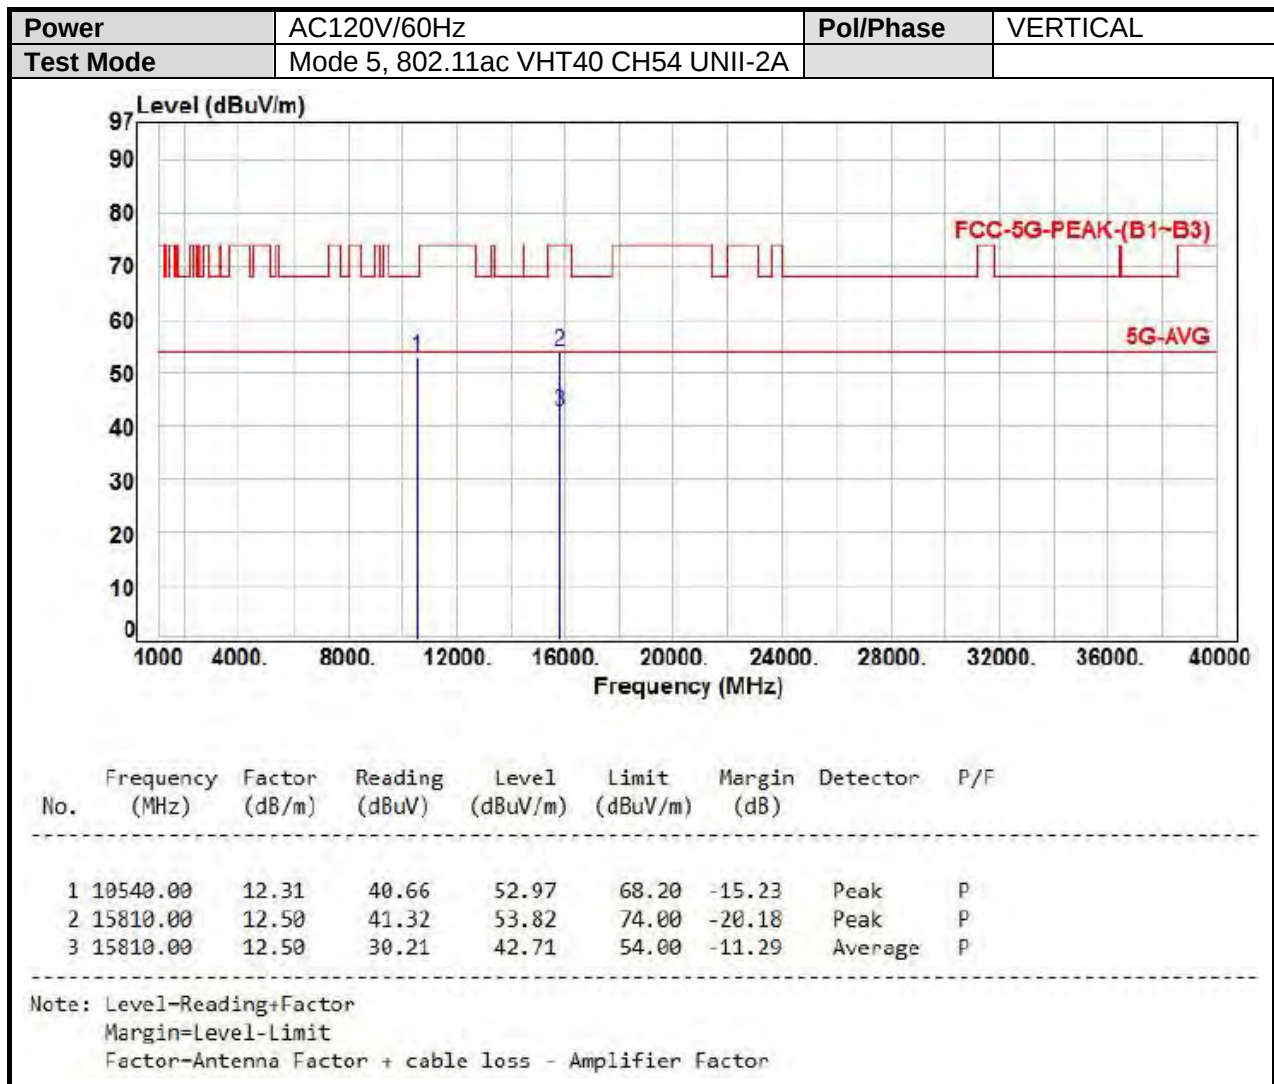


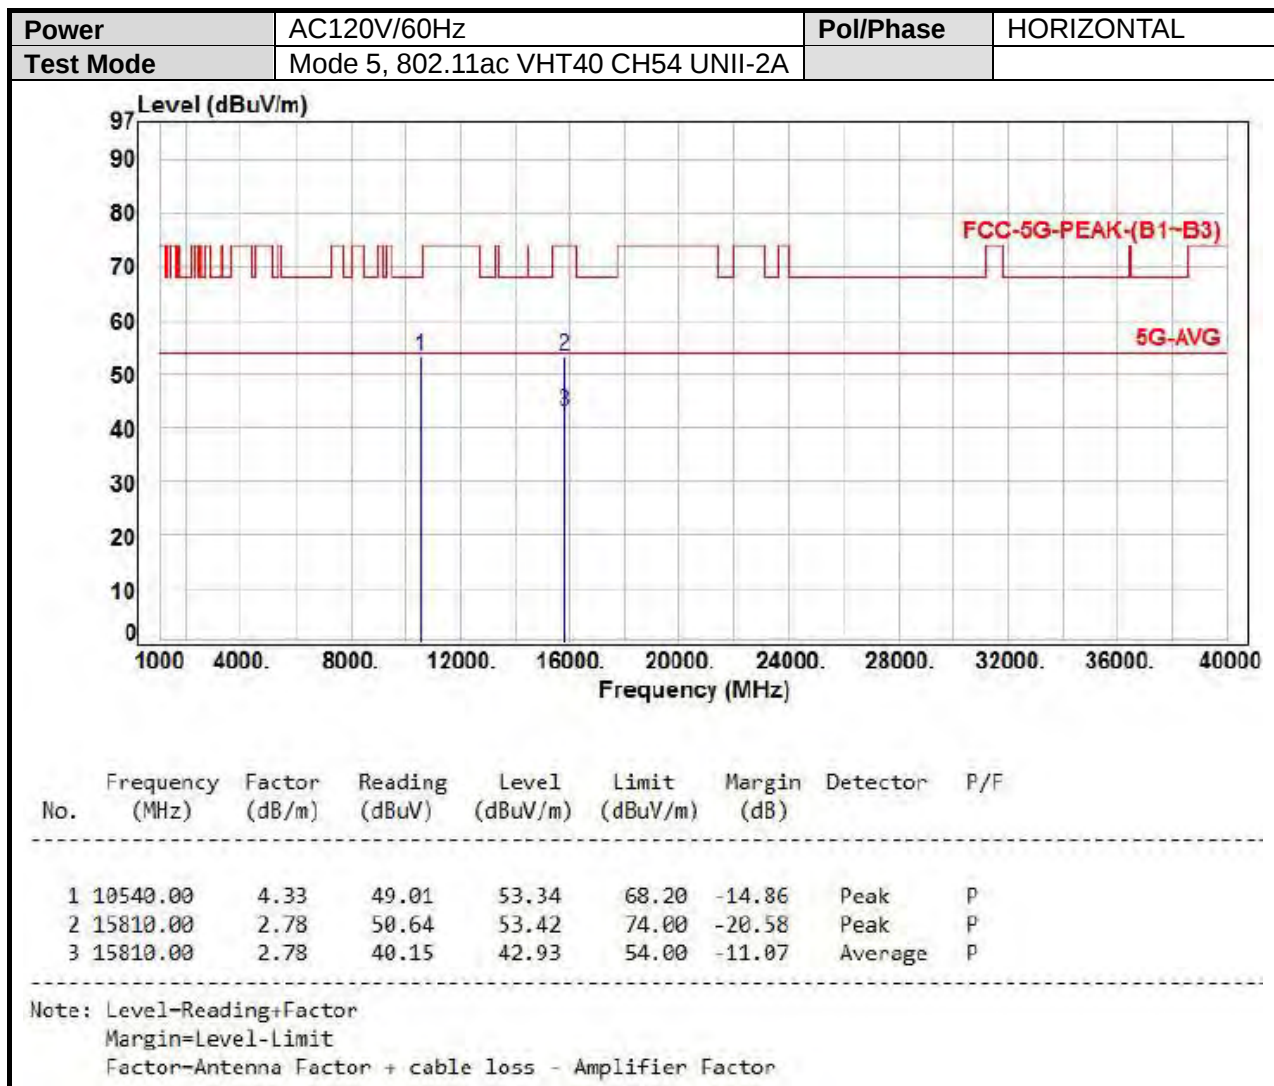


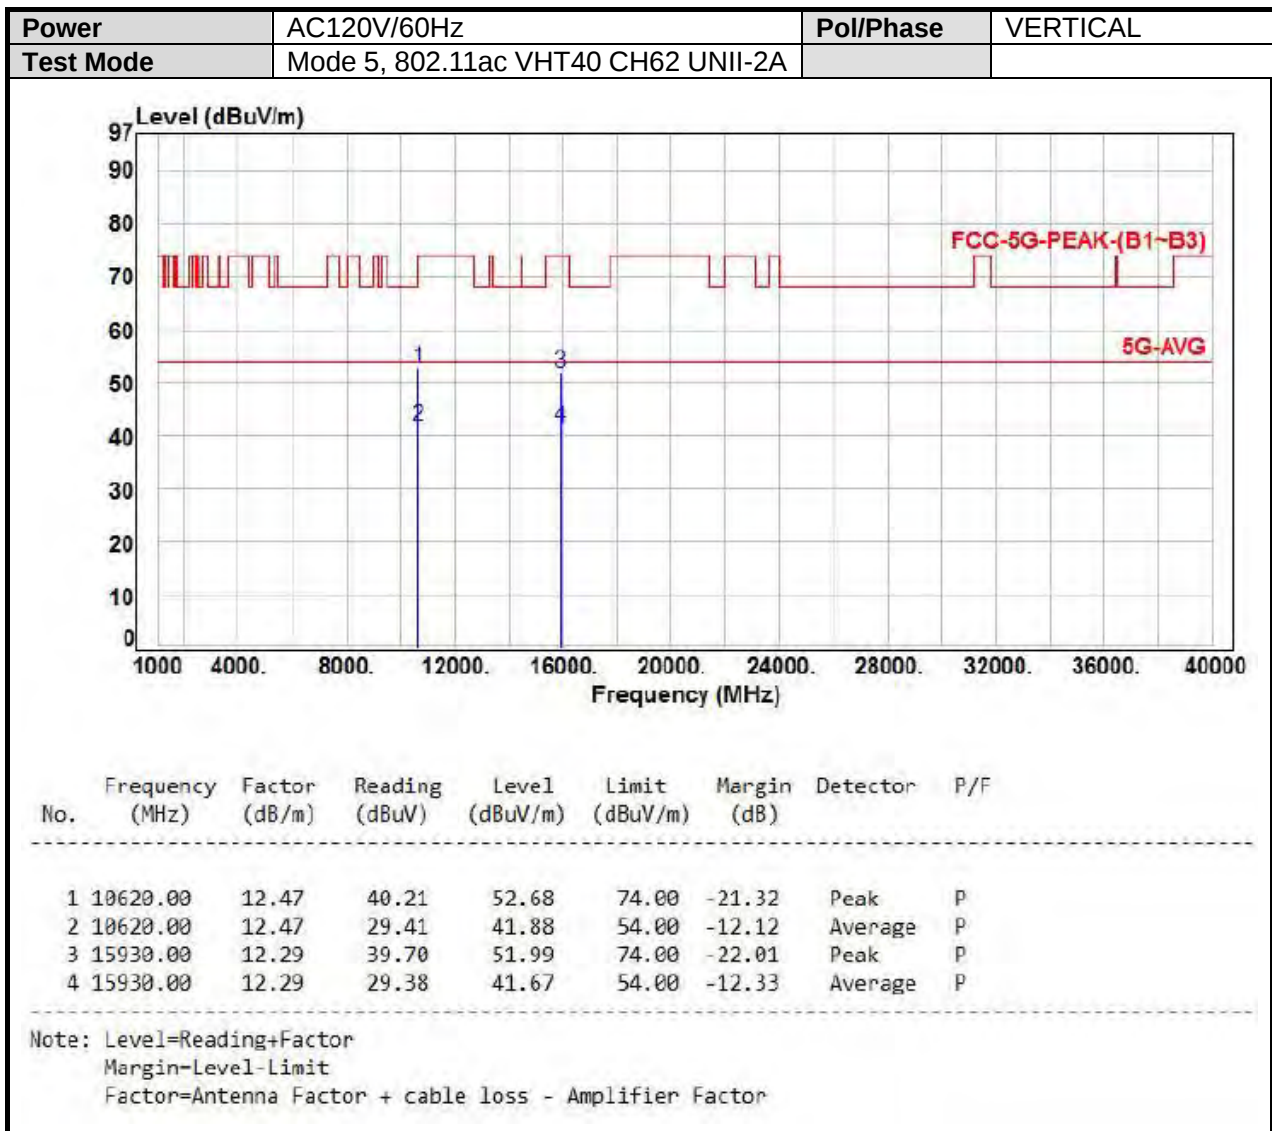


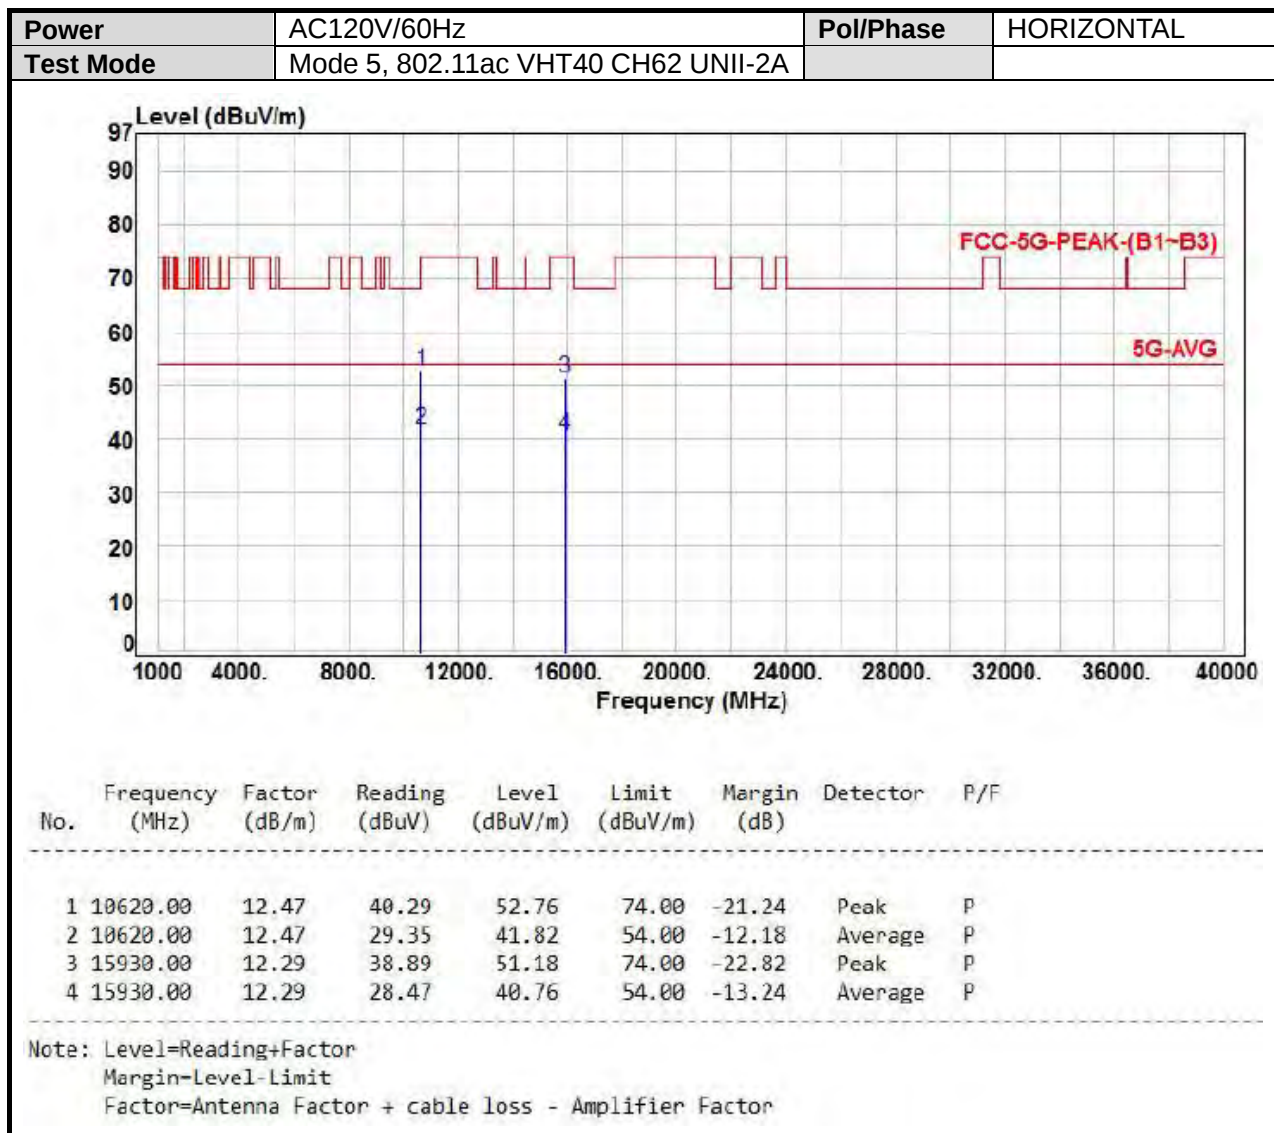


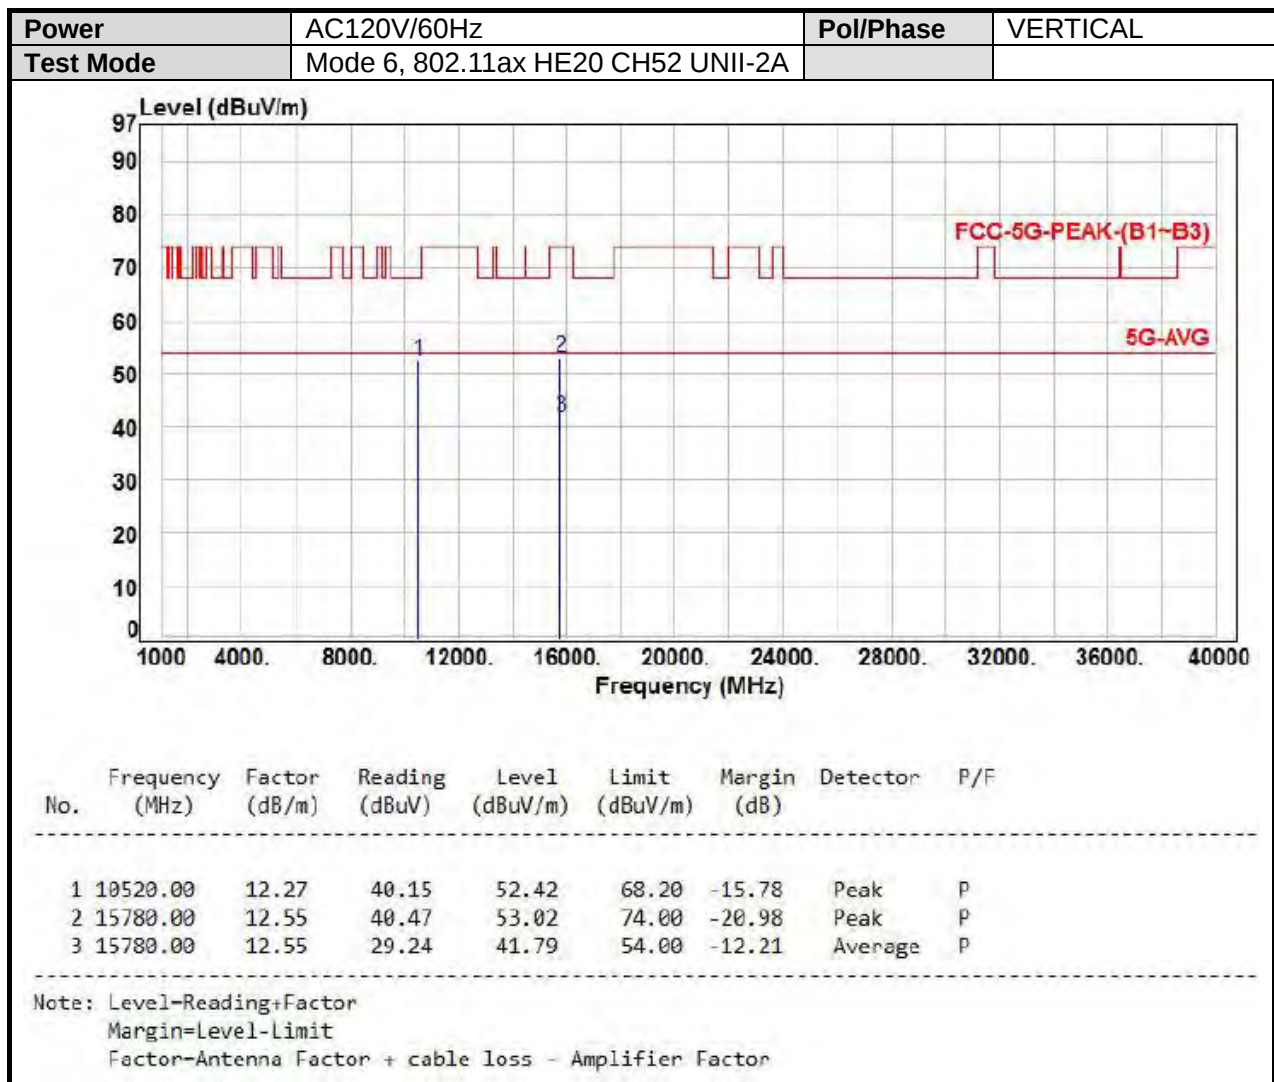


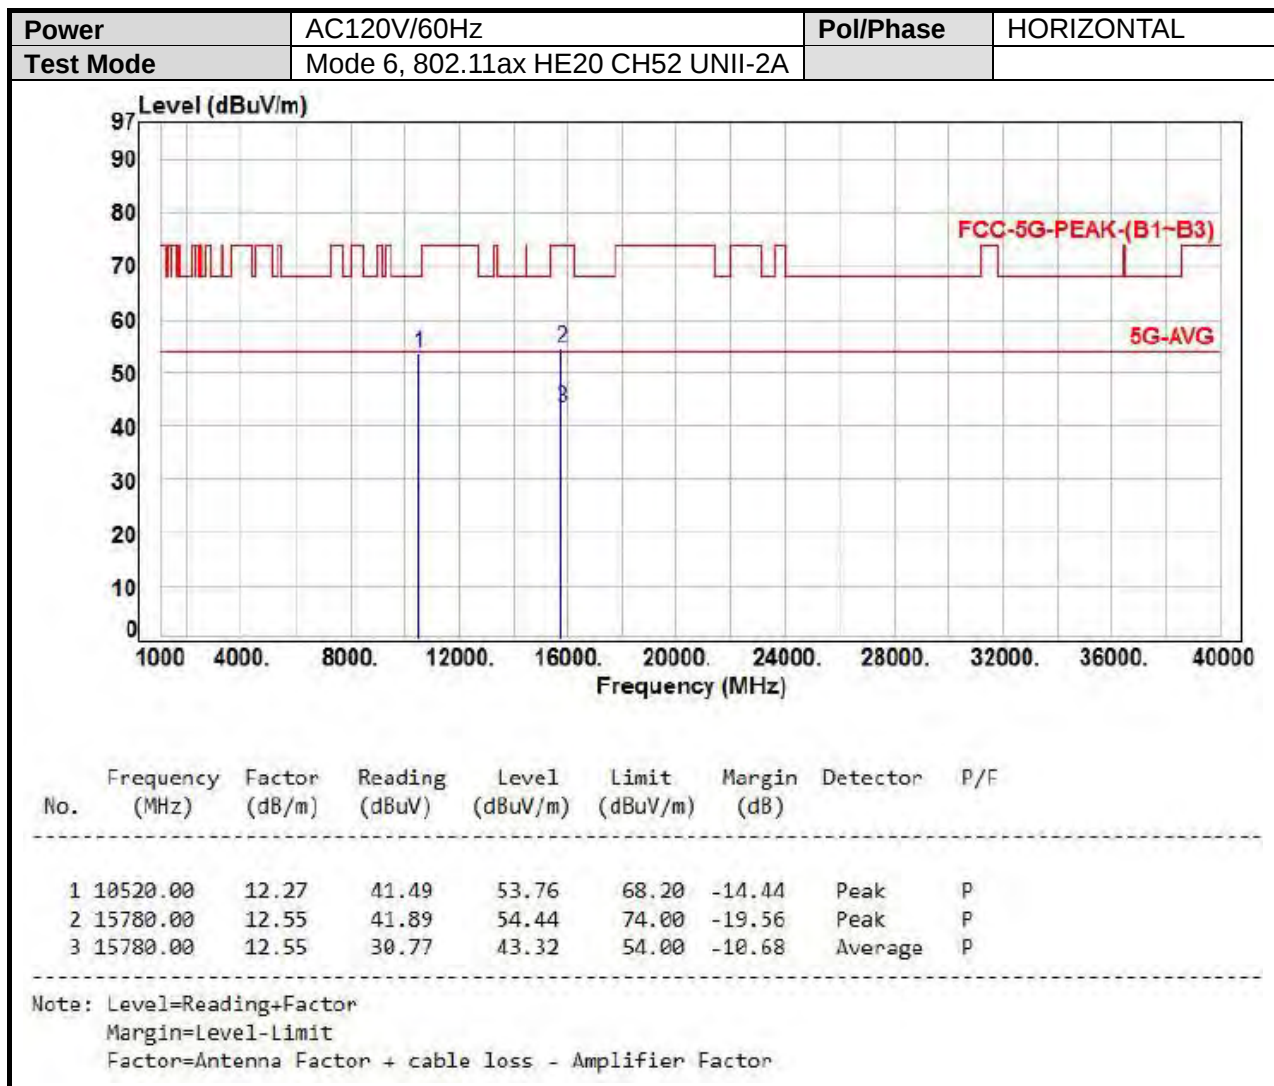


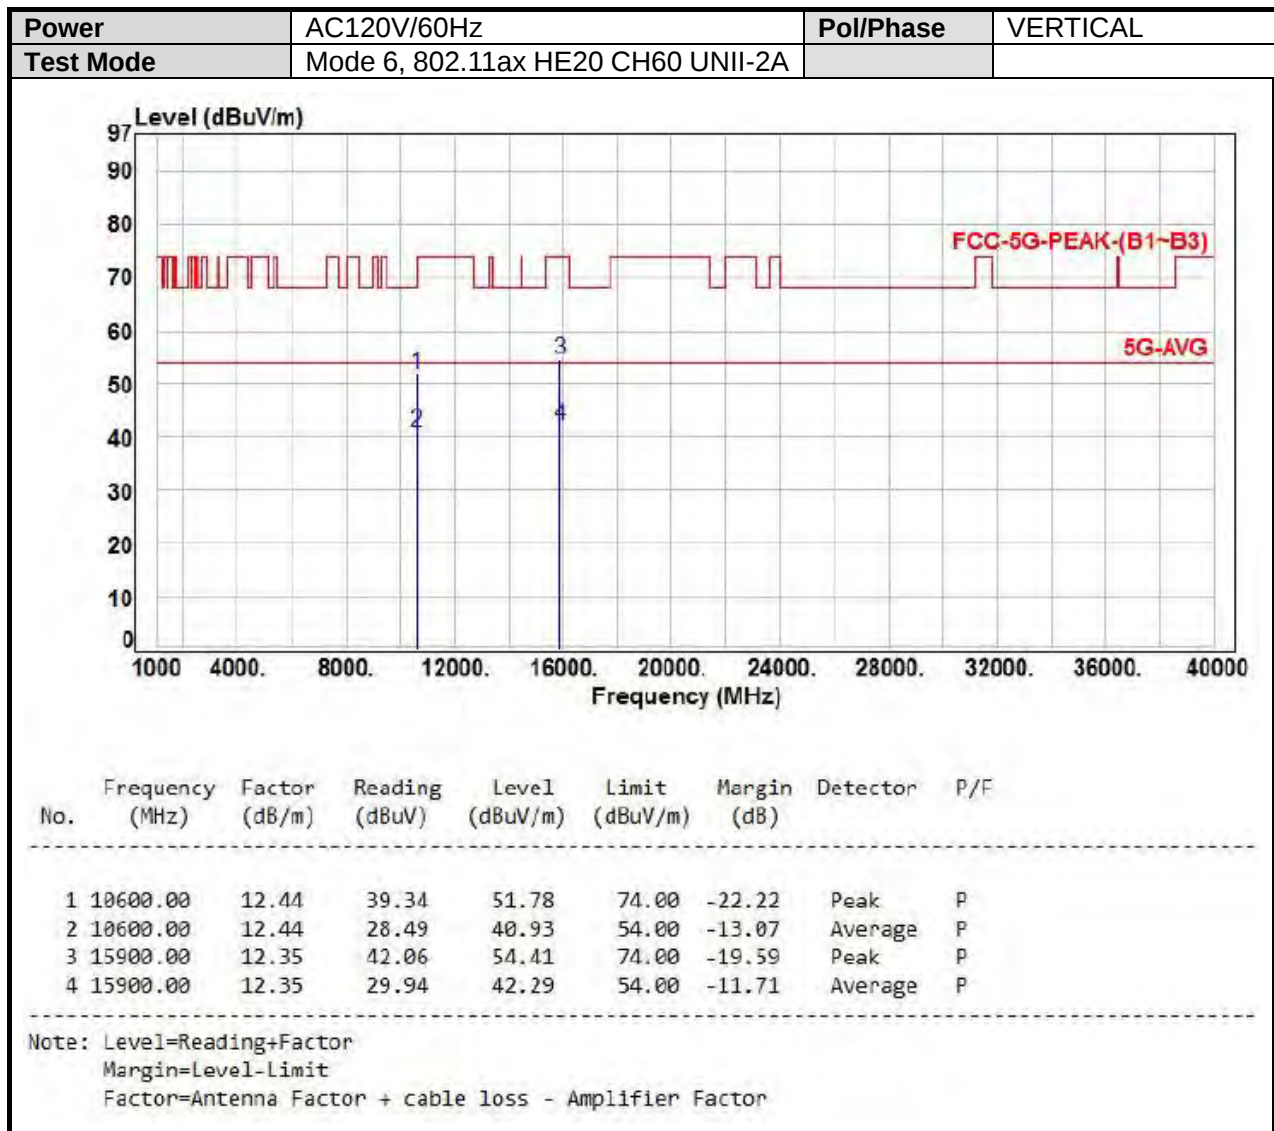


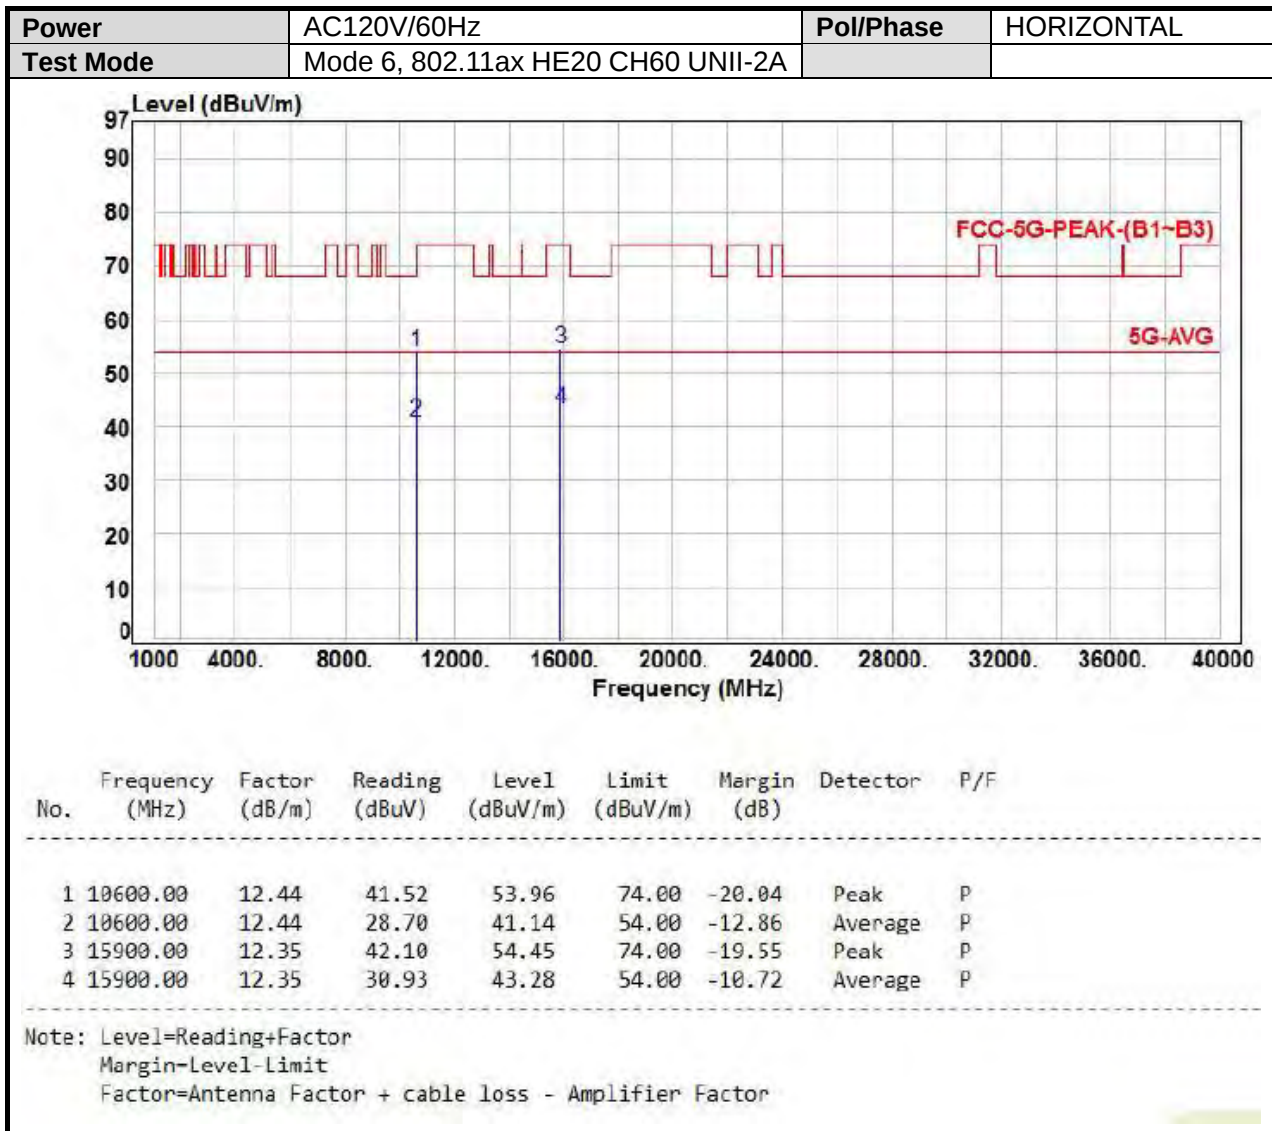


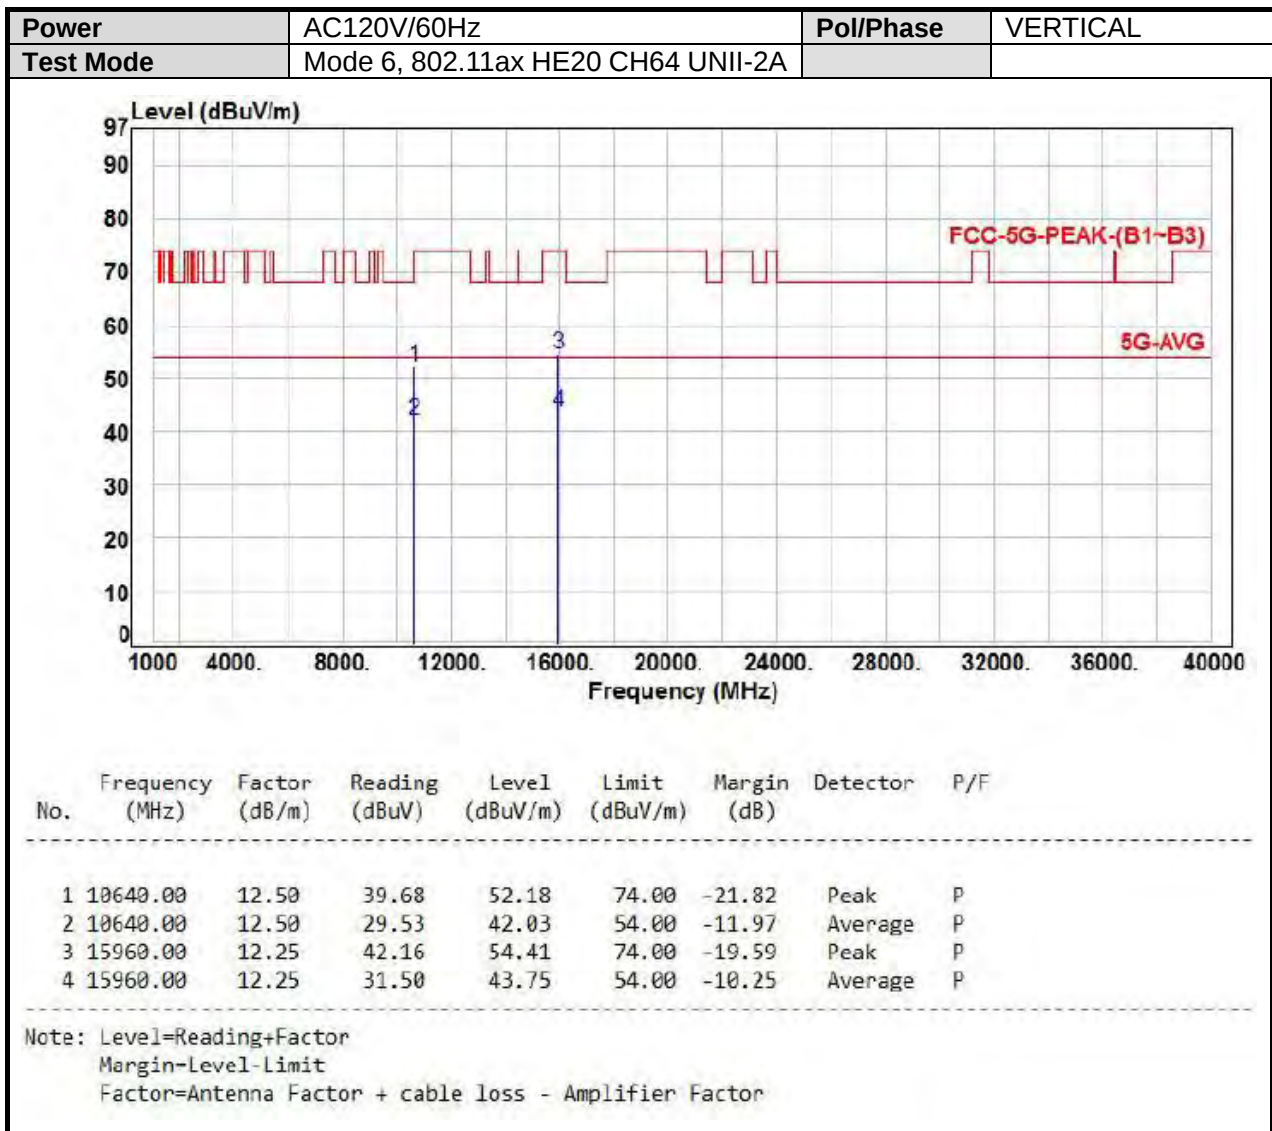


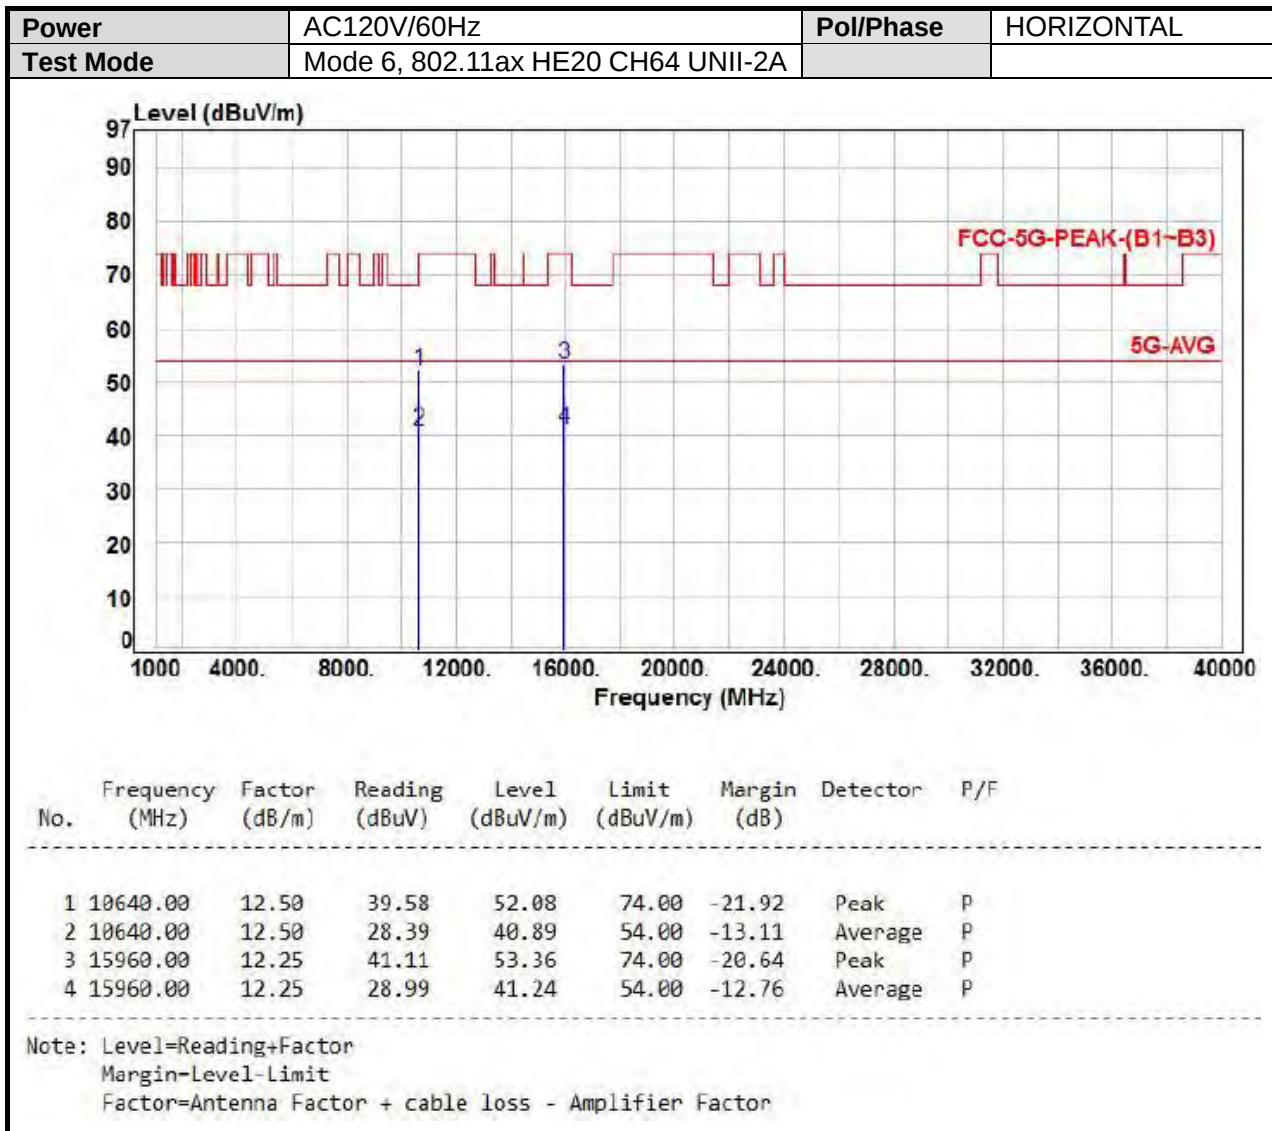

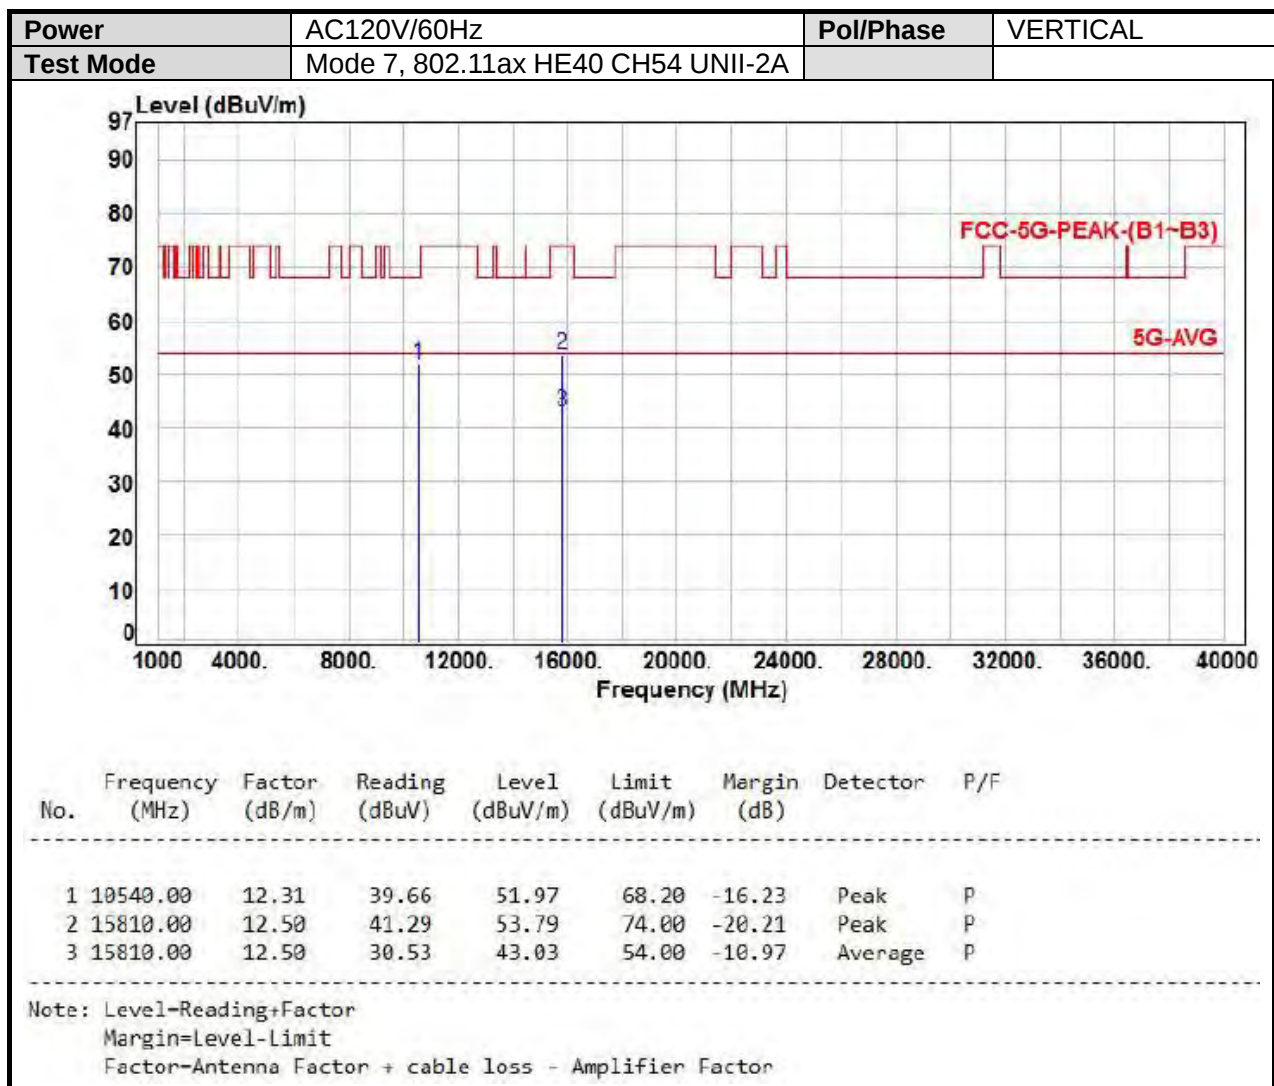

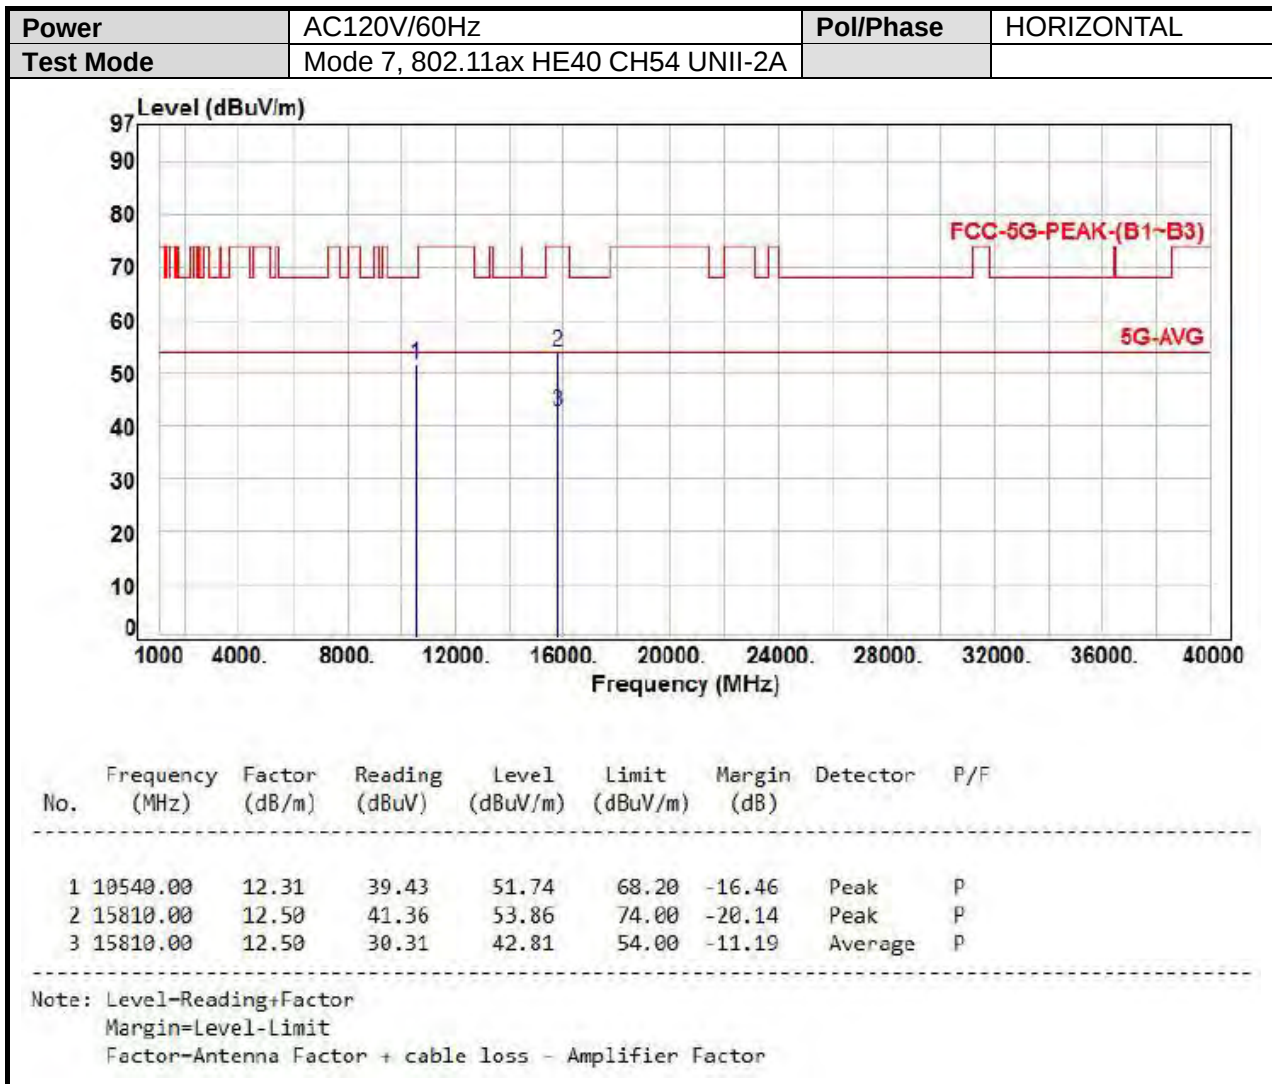


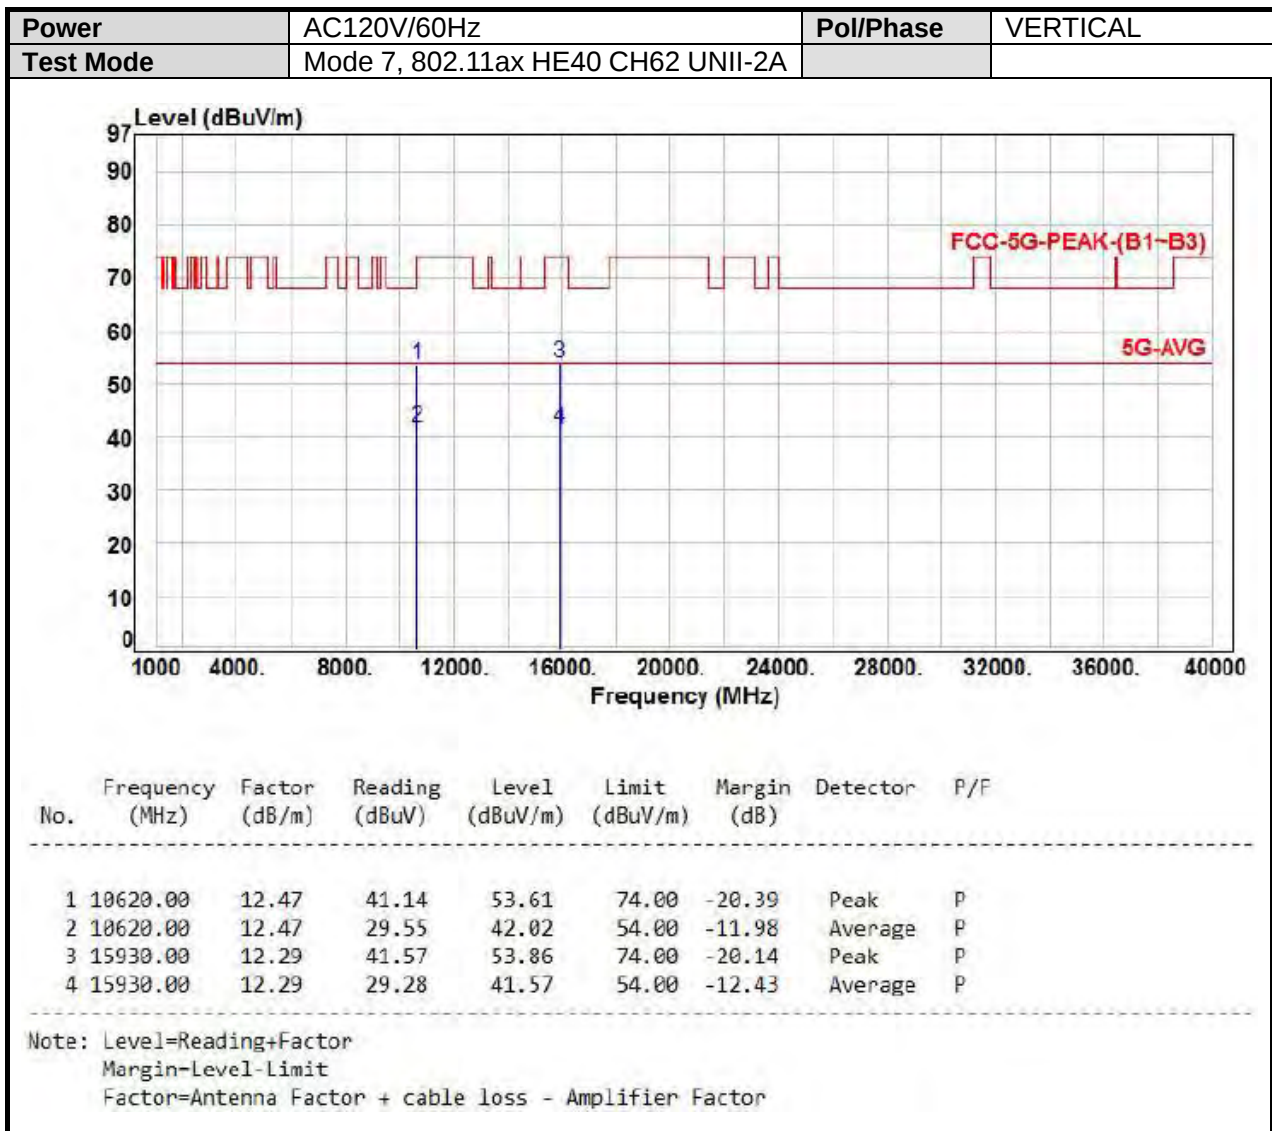


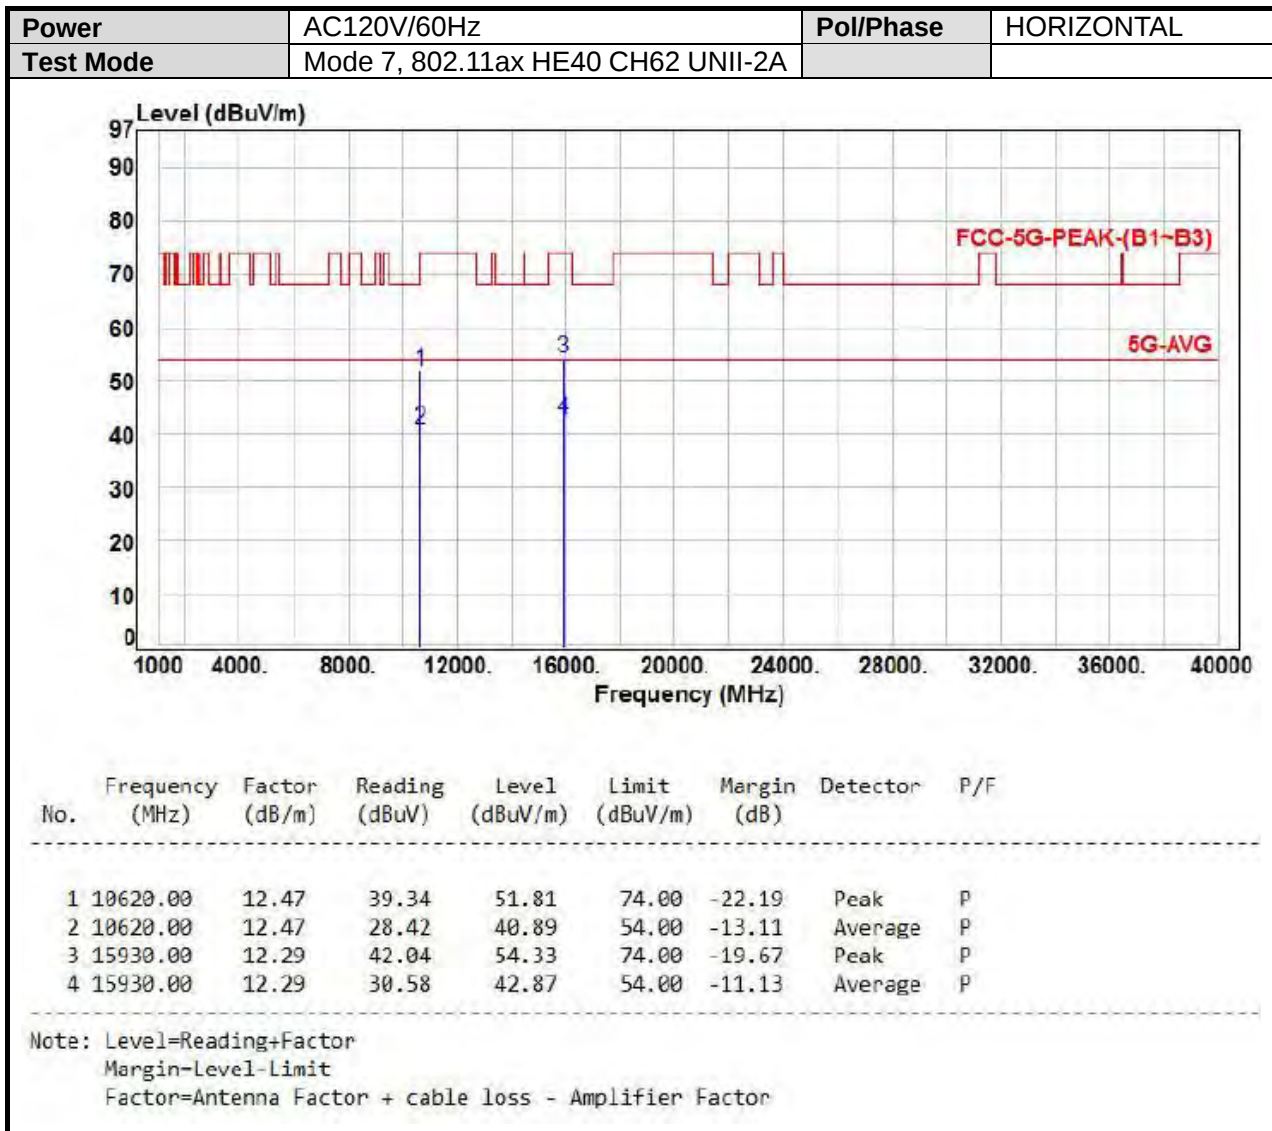






UNII-2C

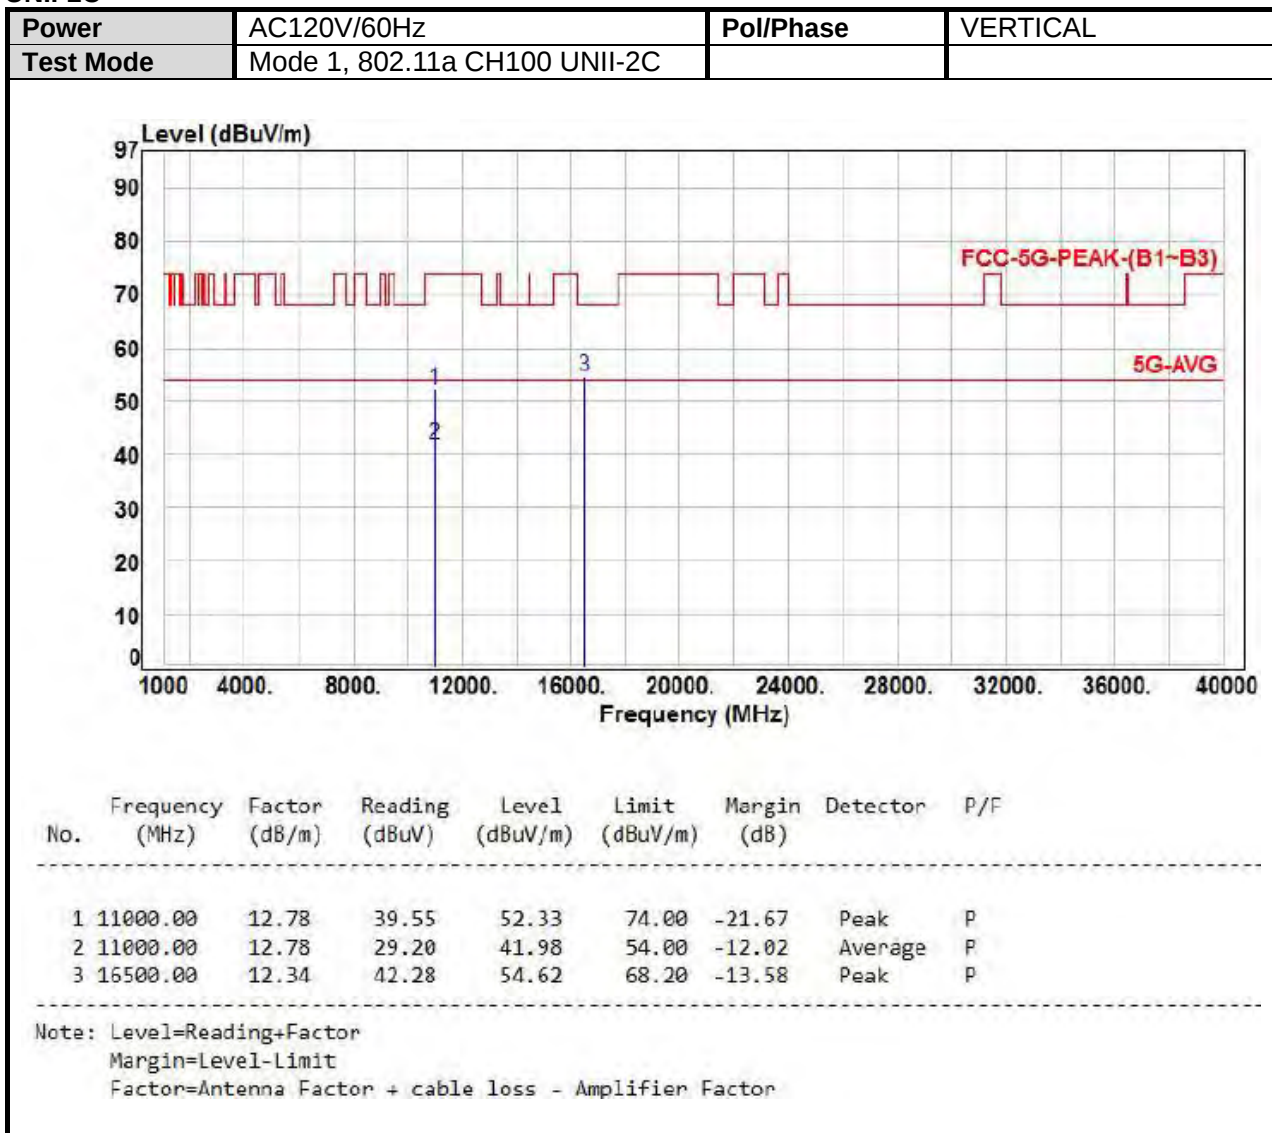


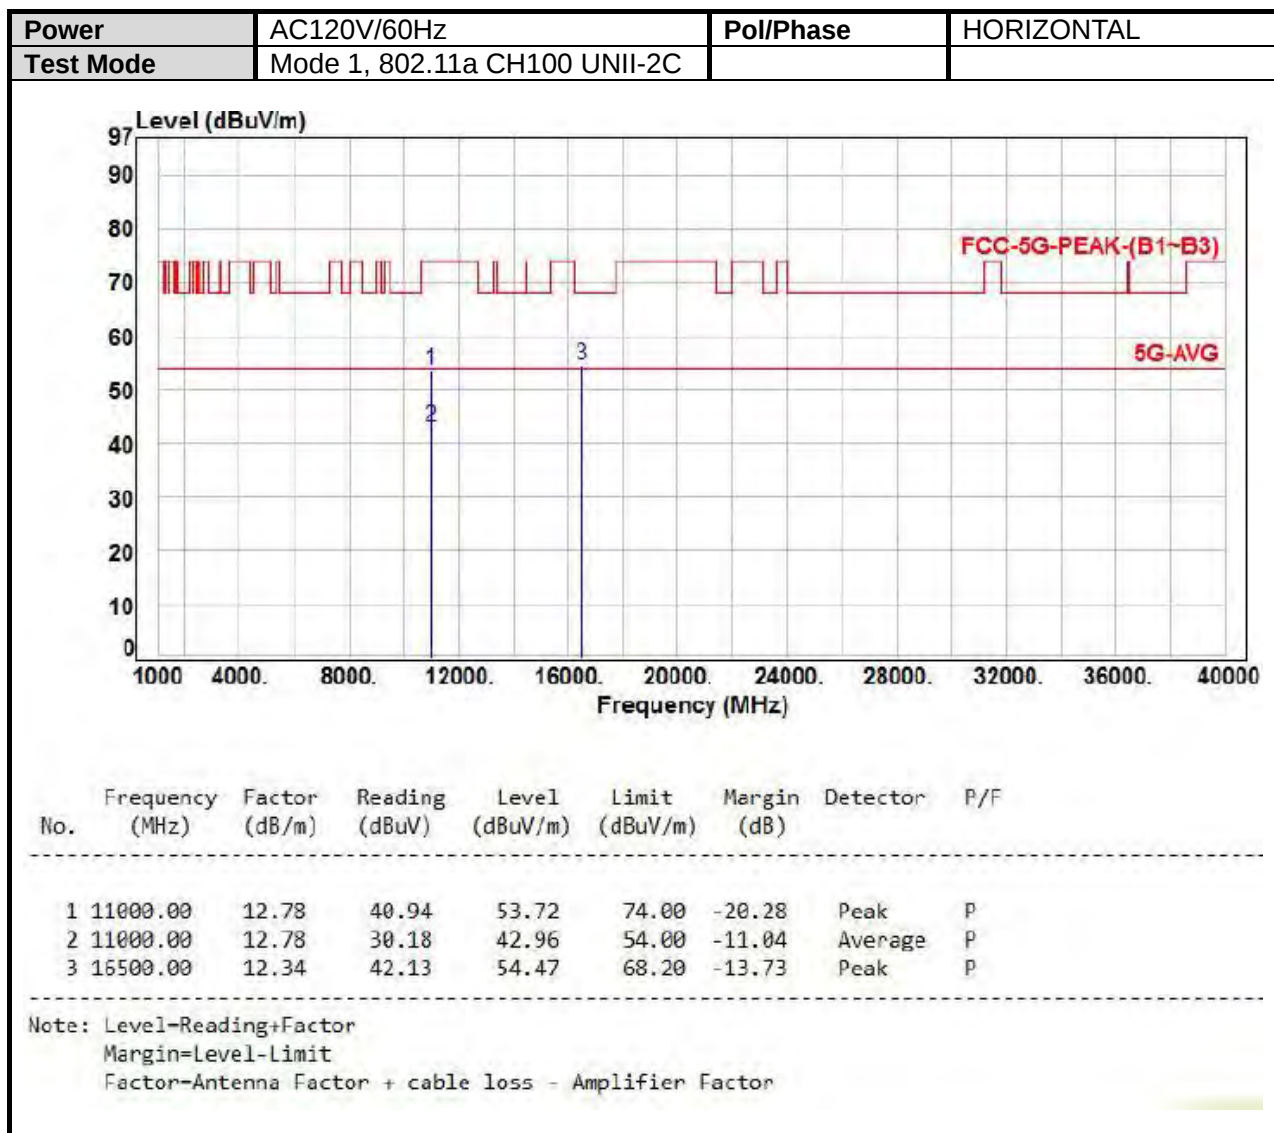


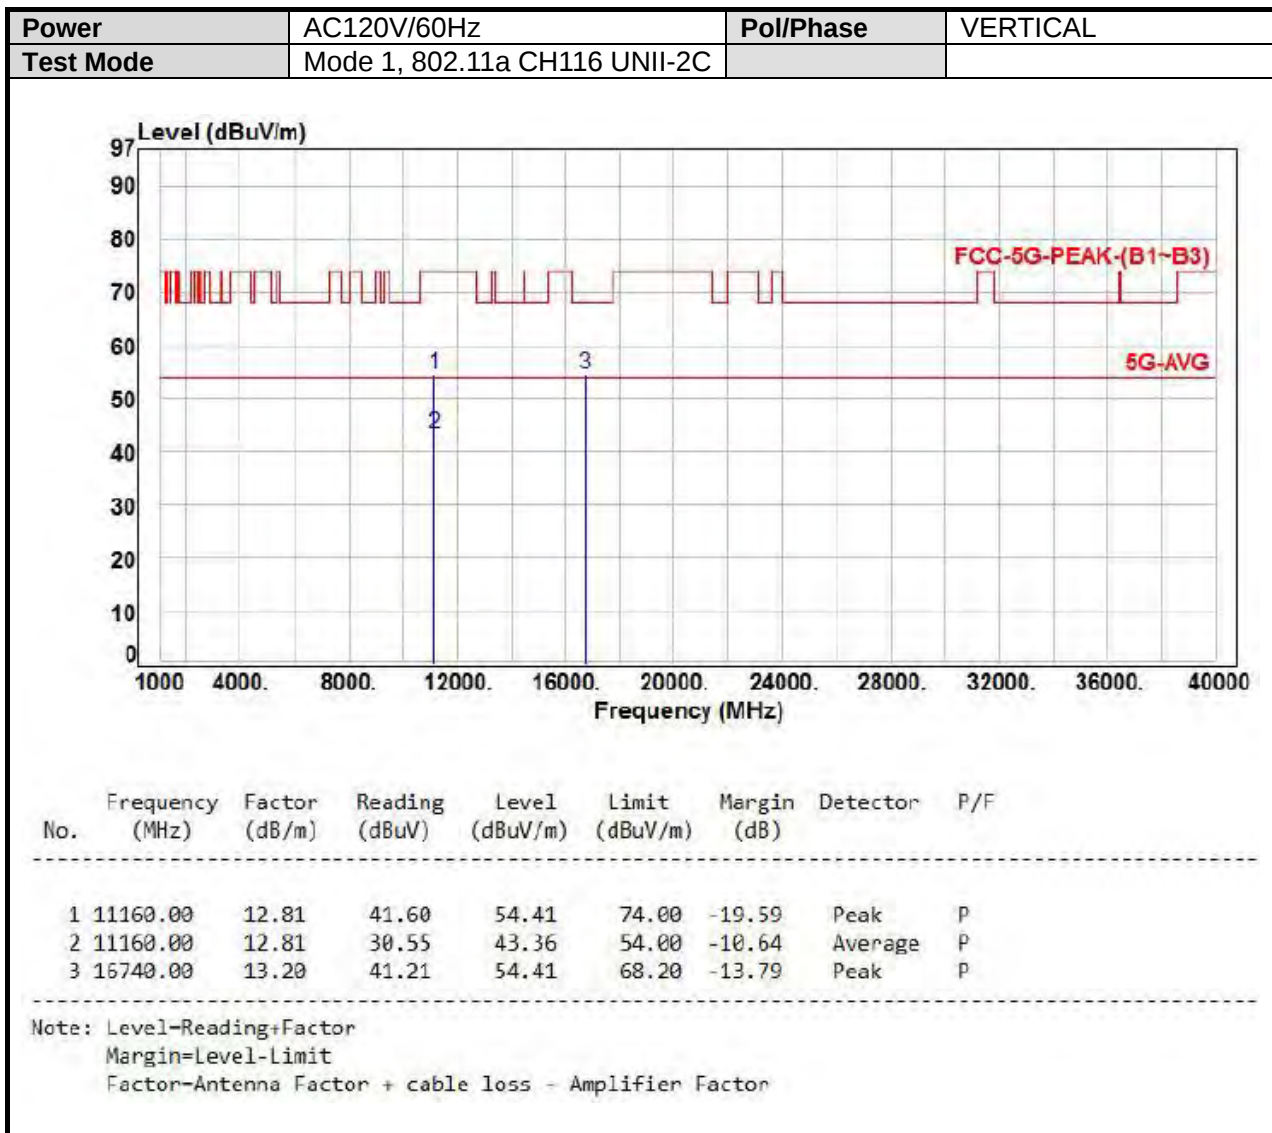


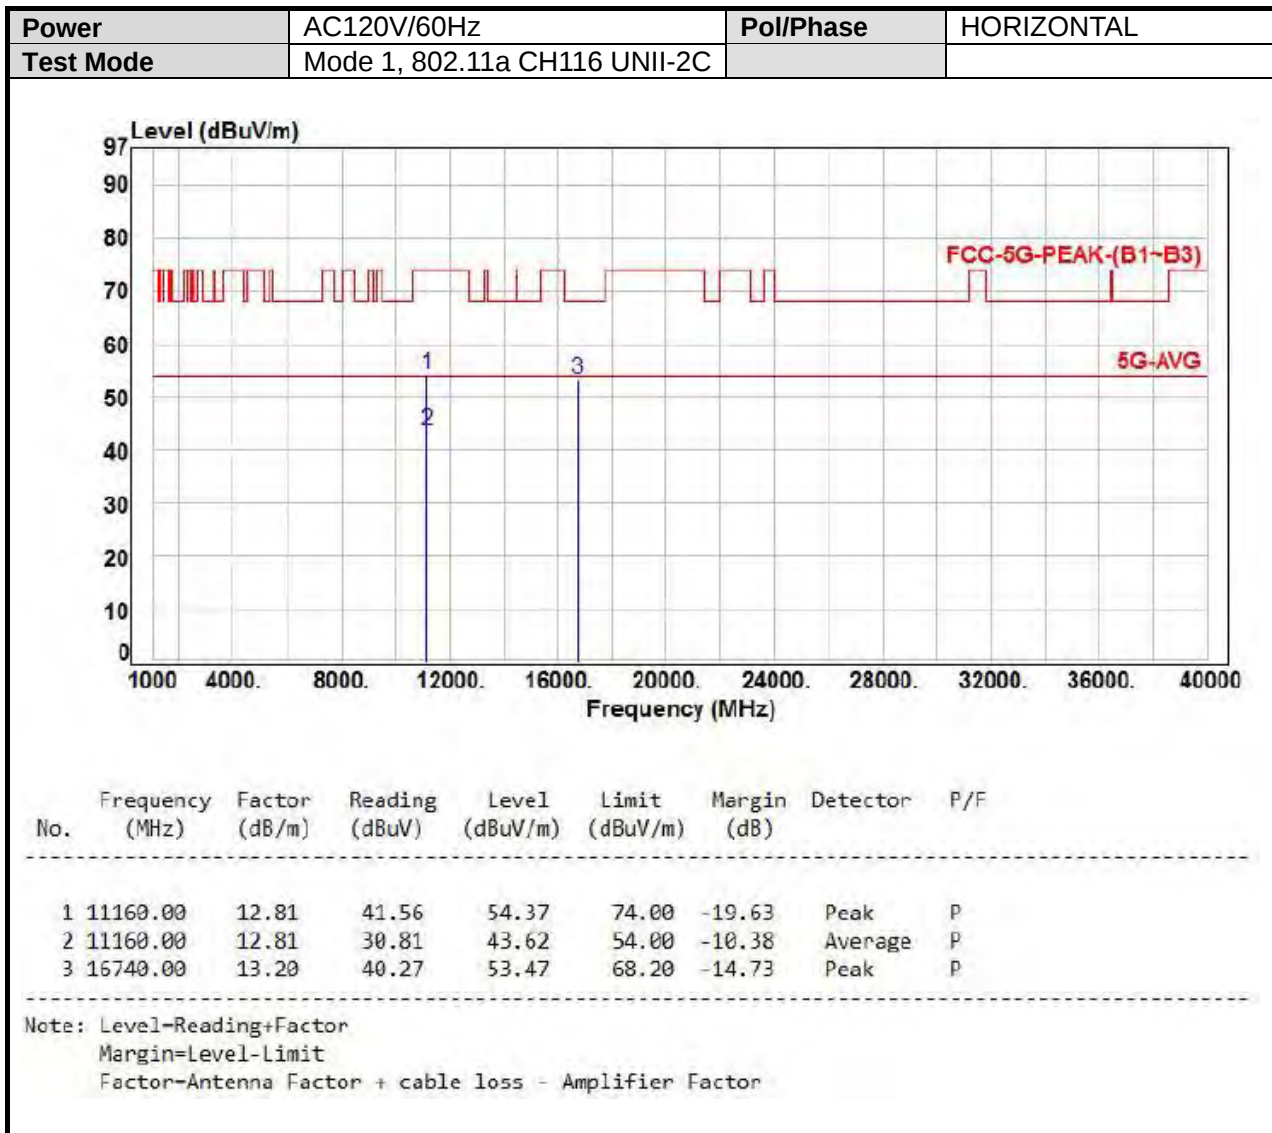


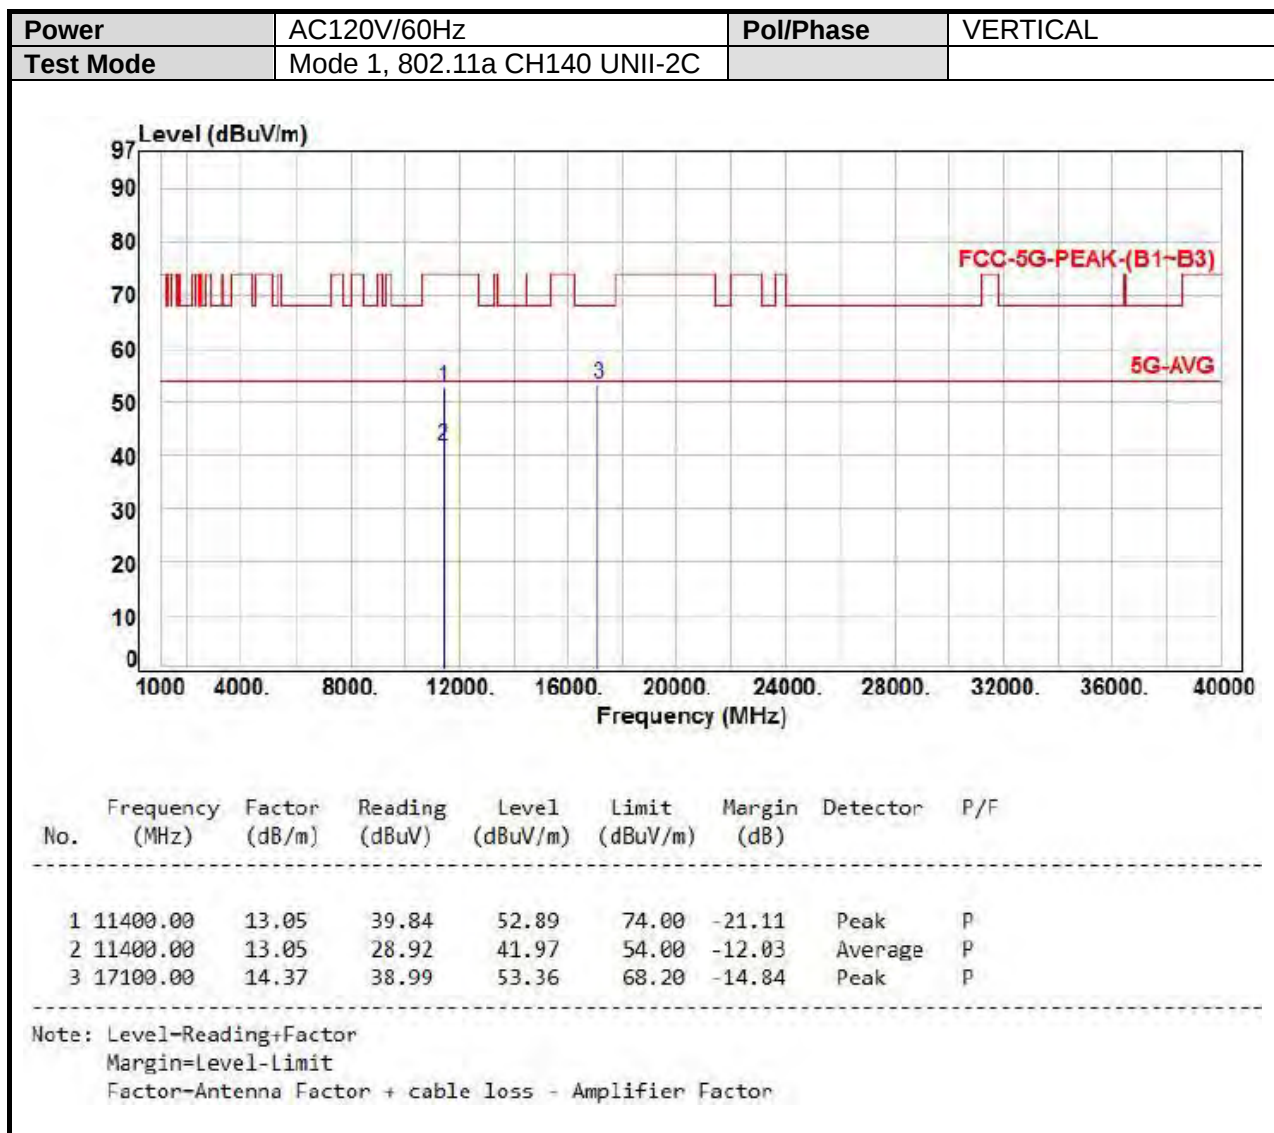


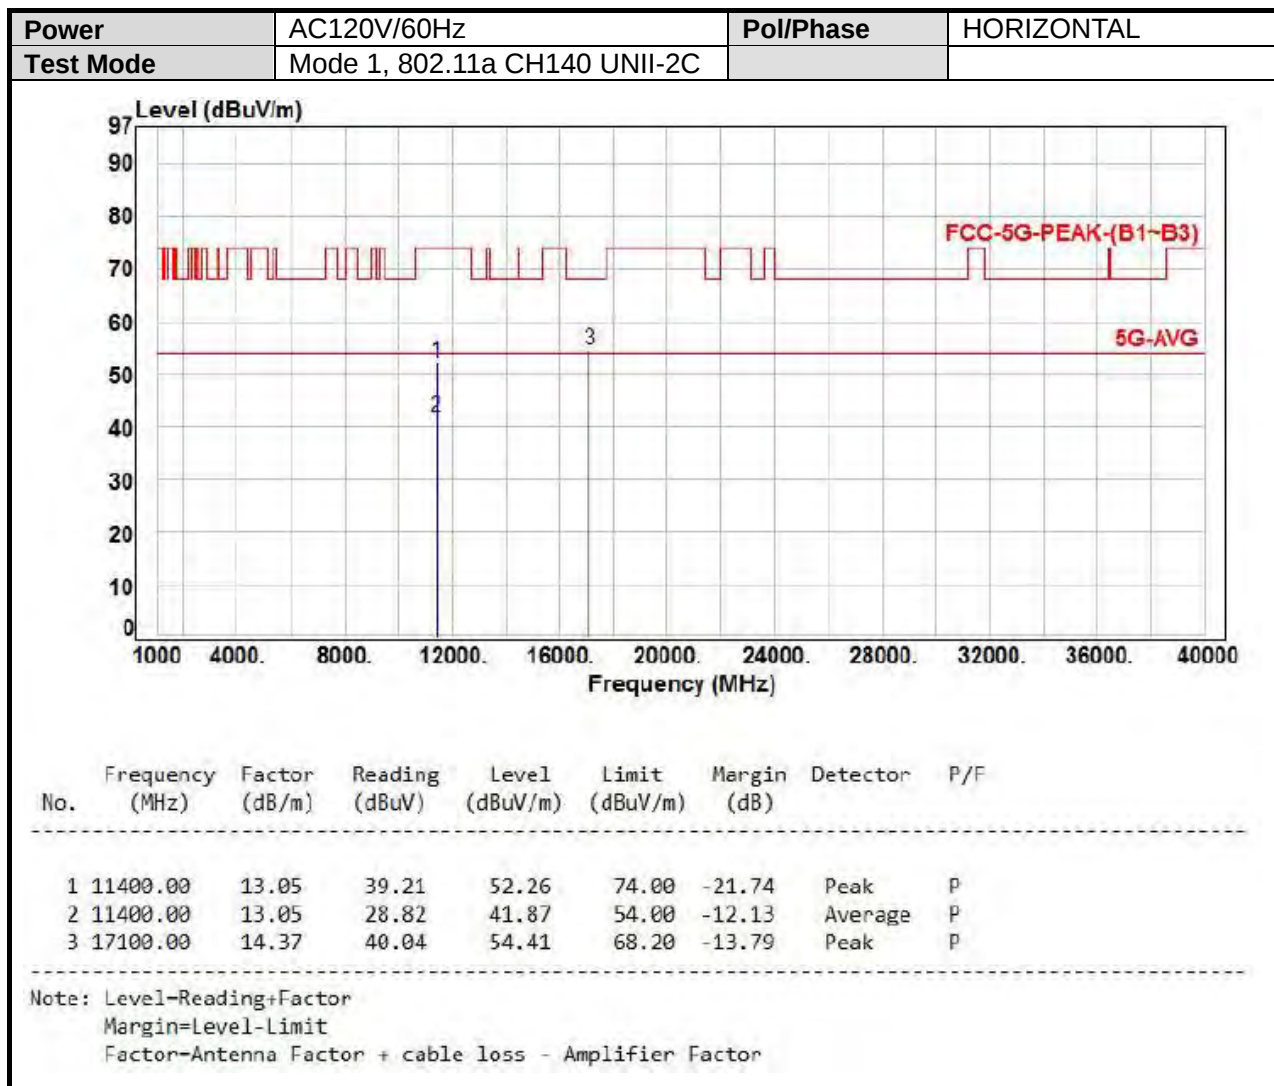


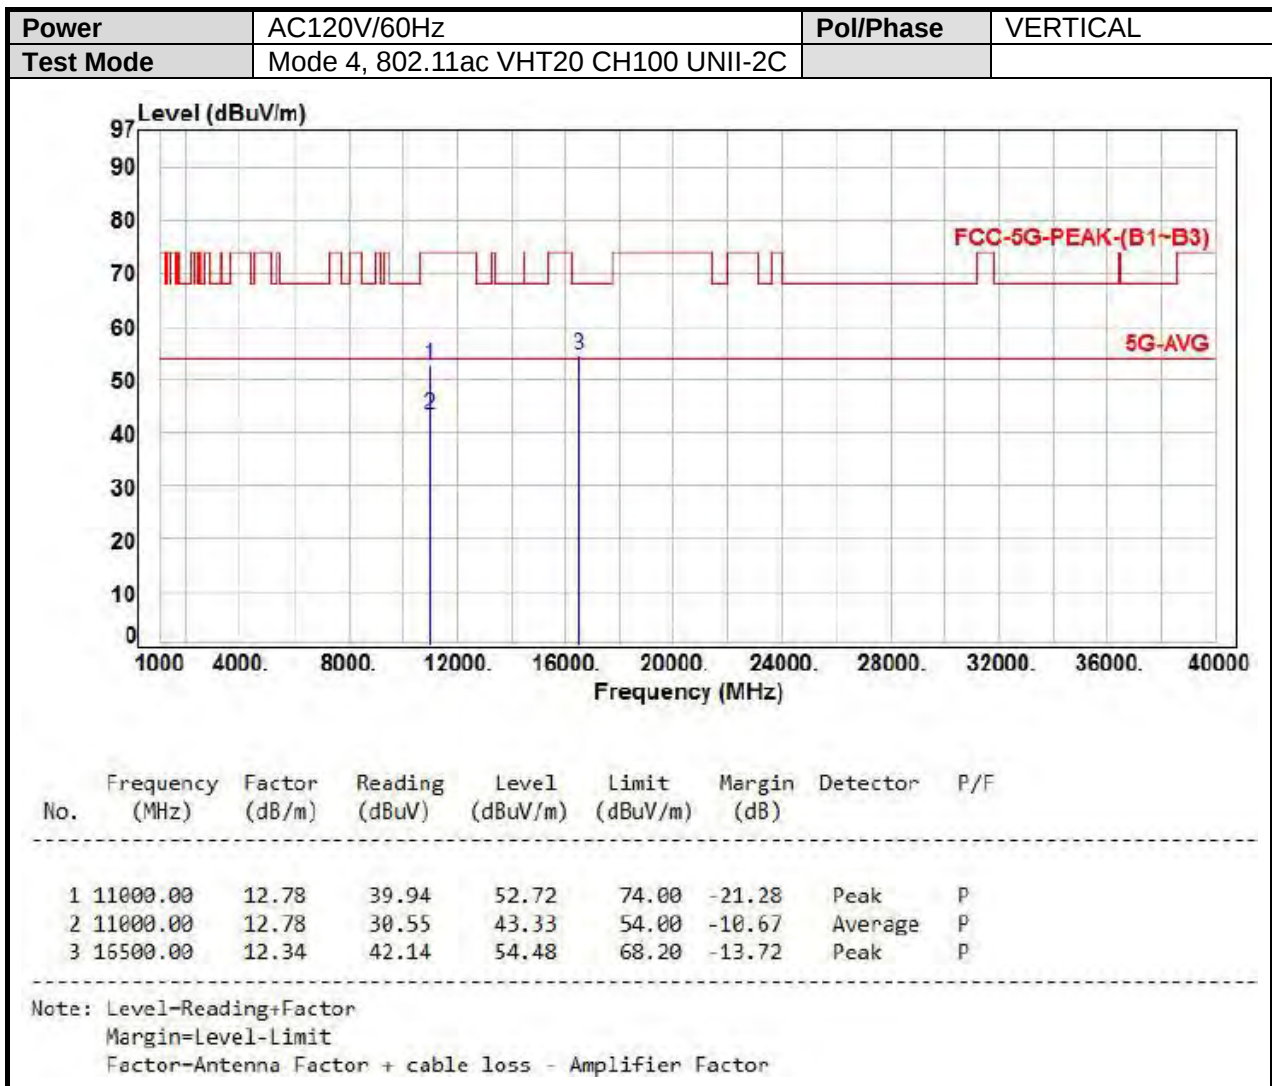


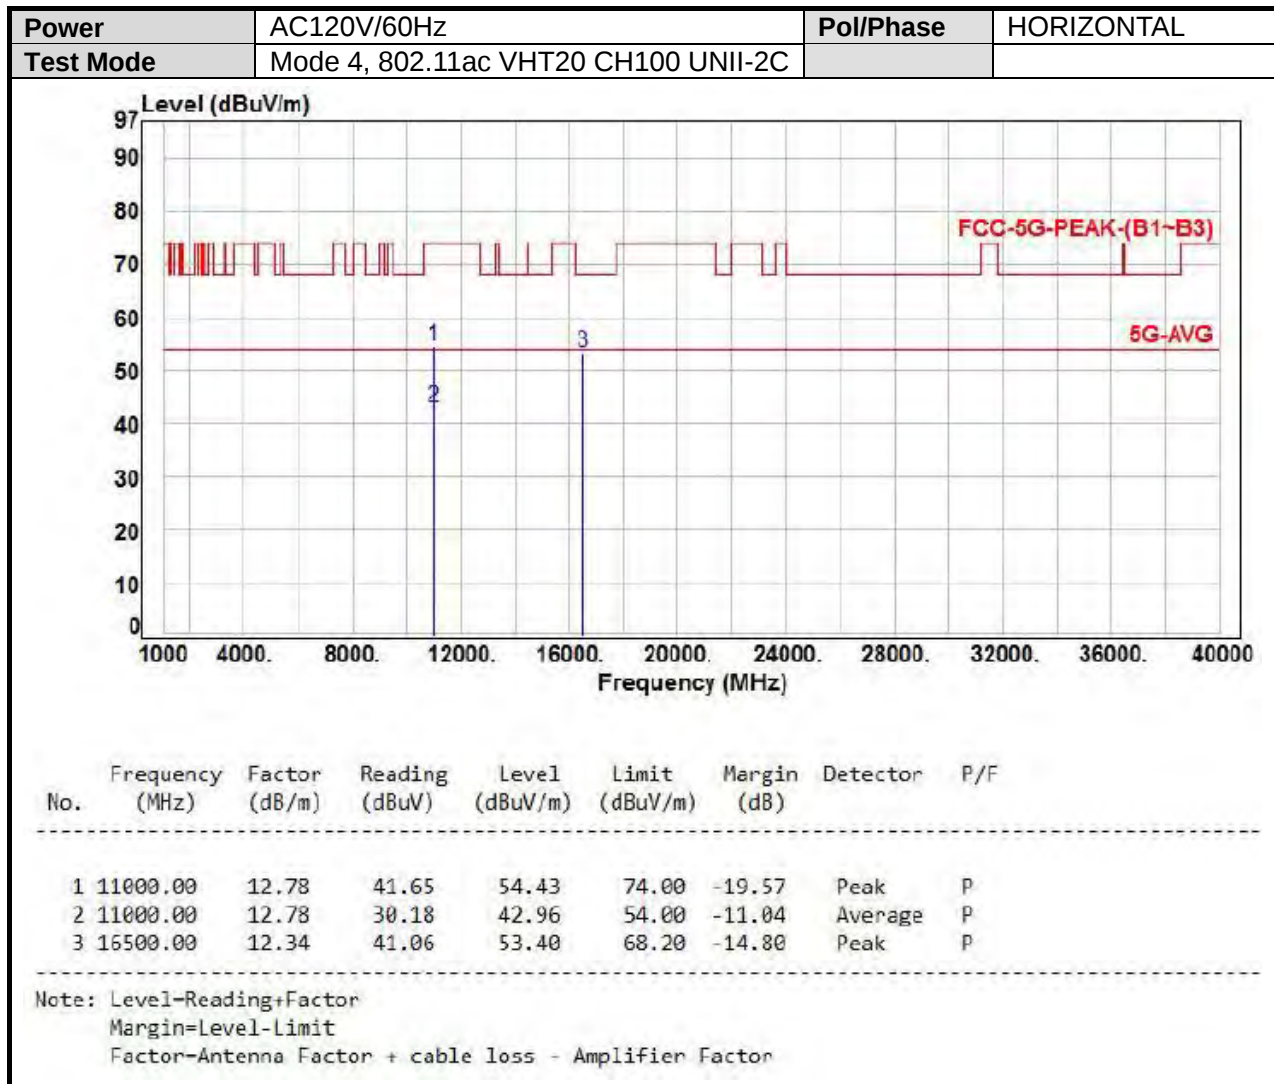


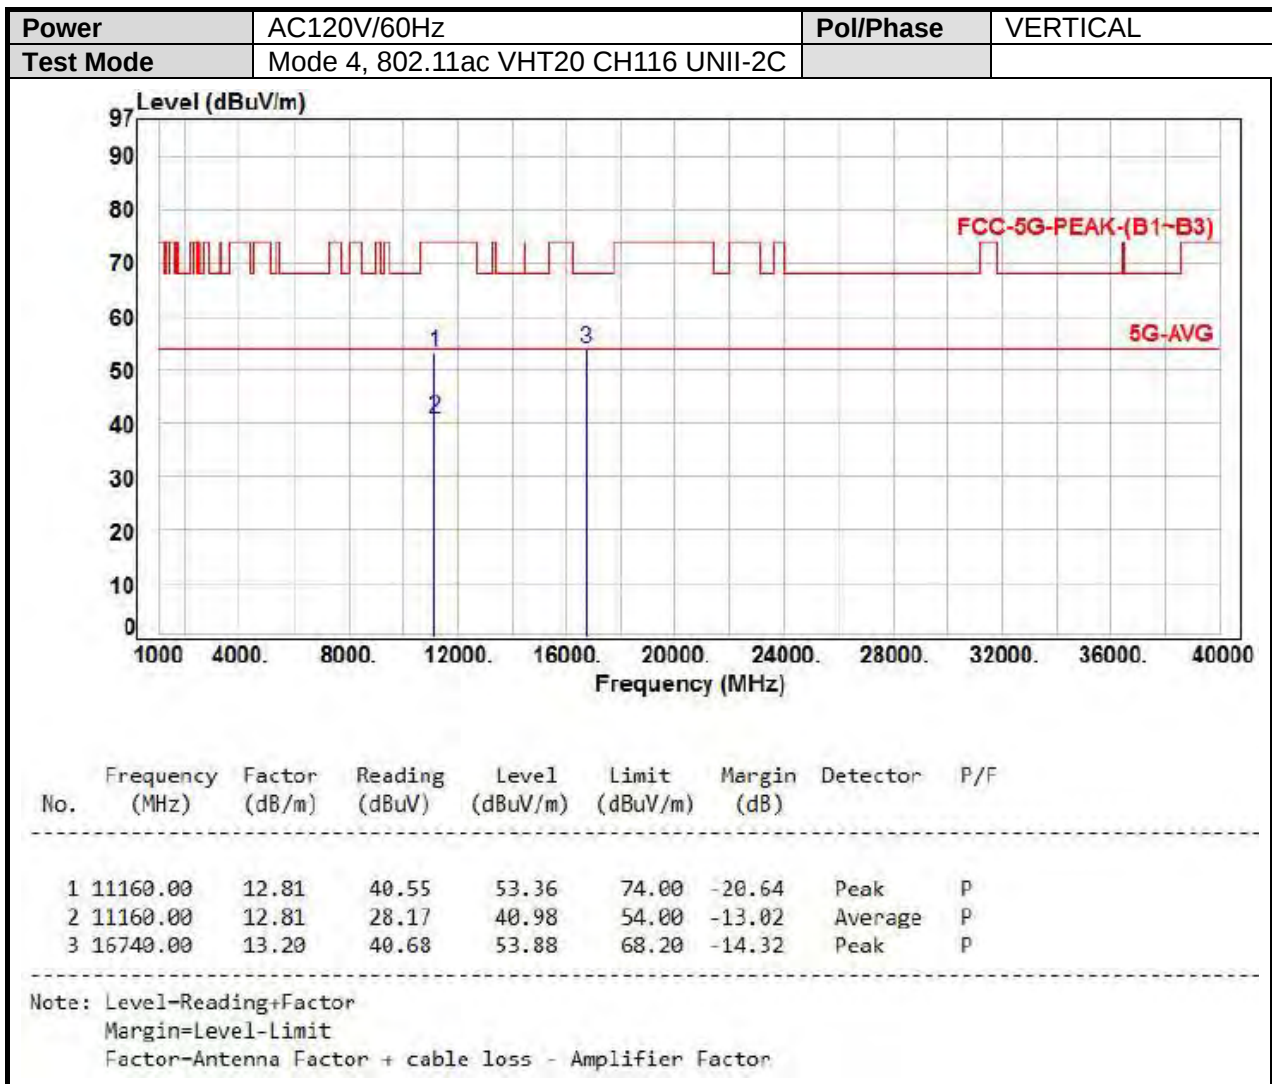

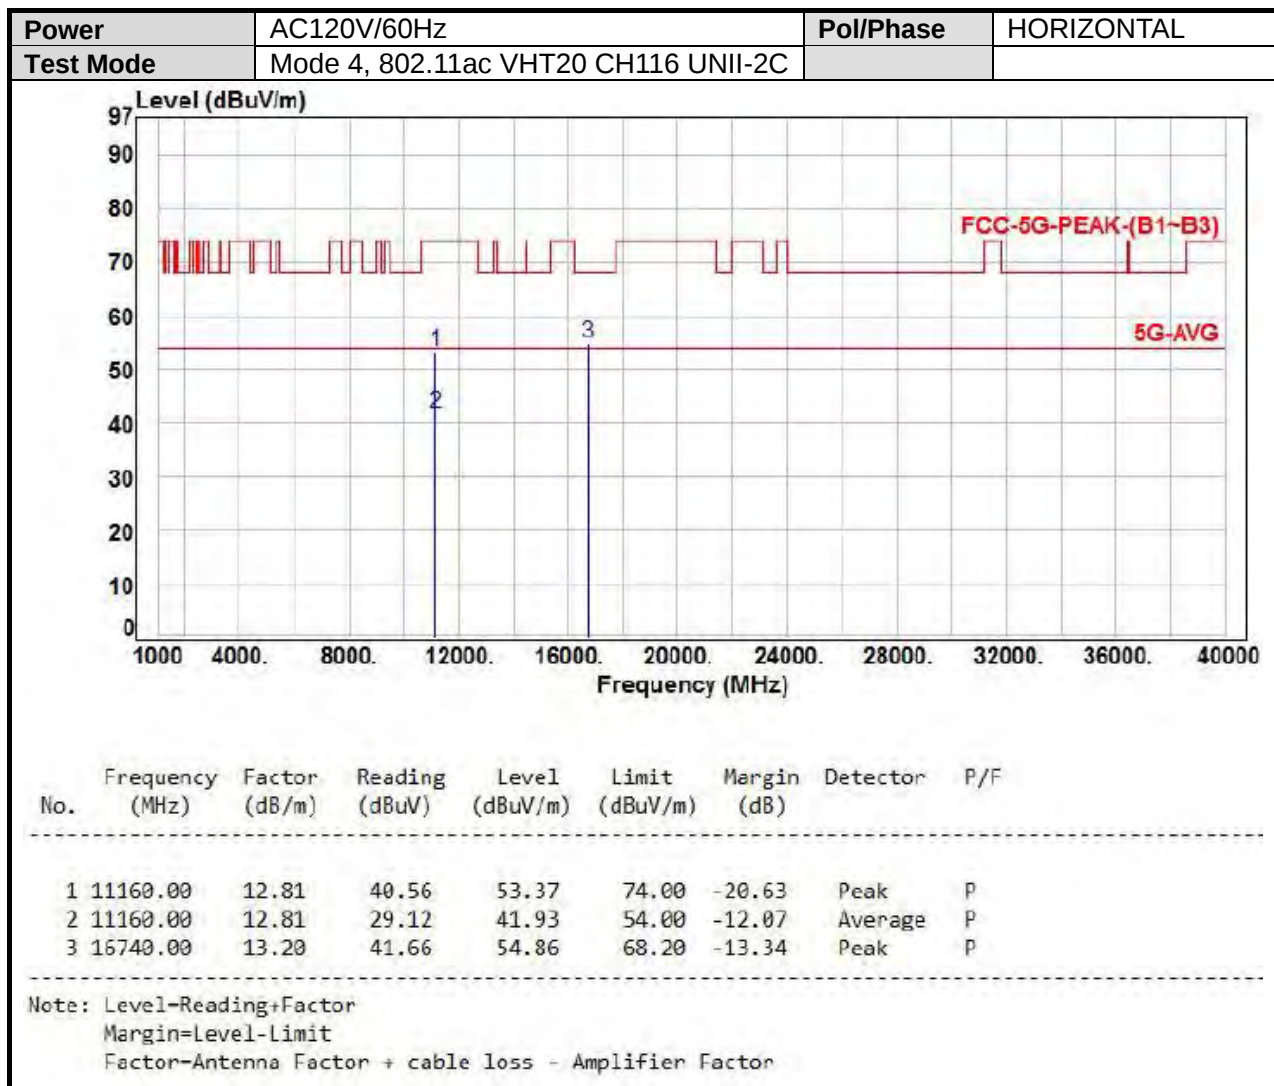


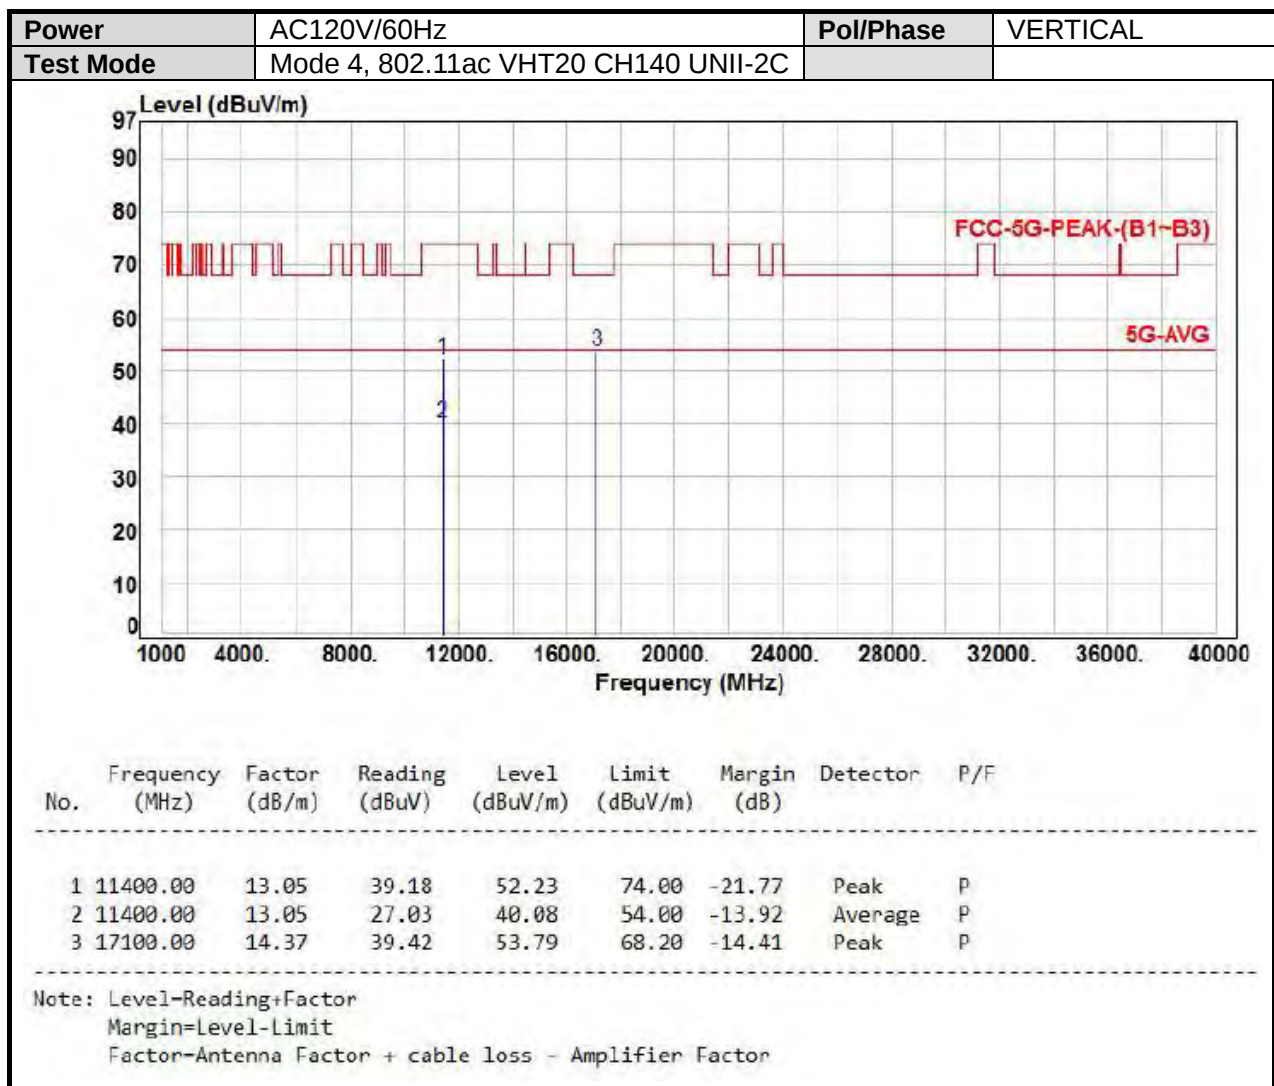


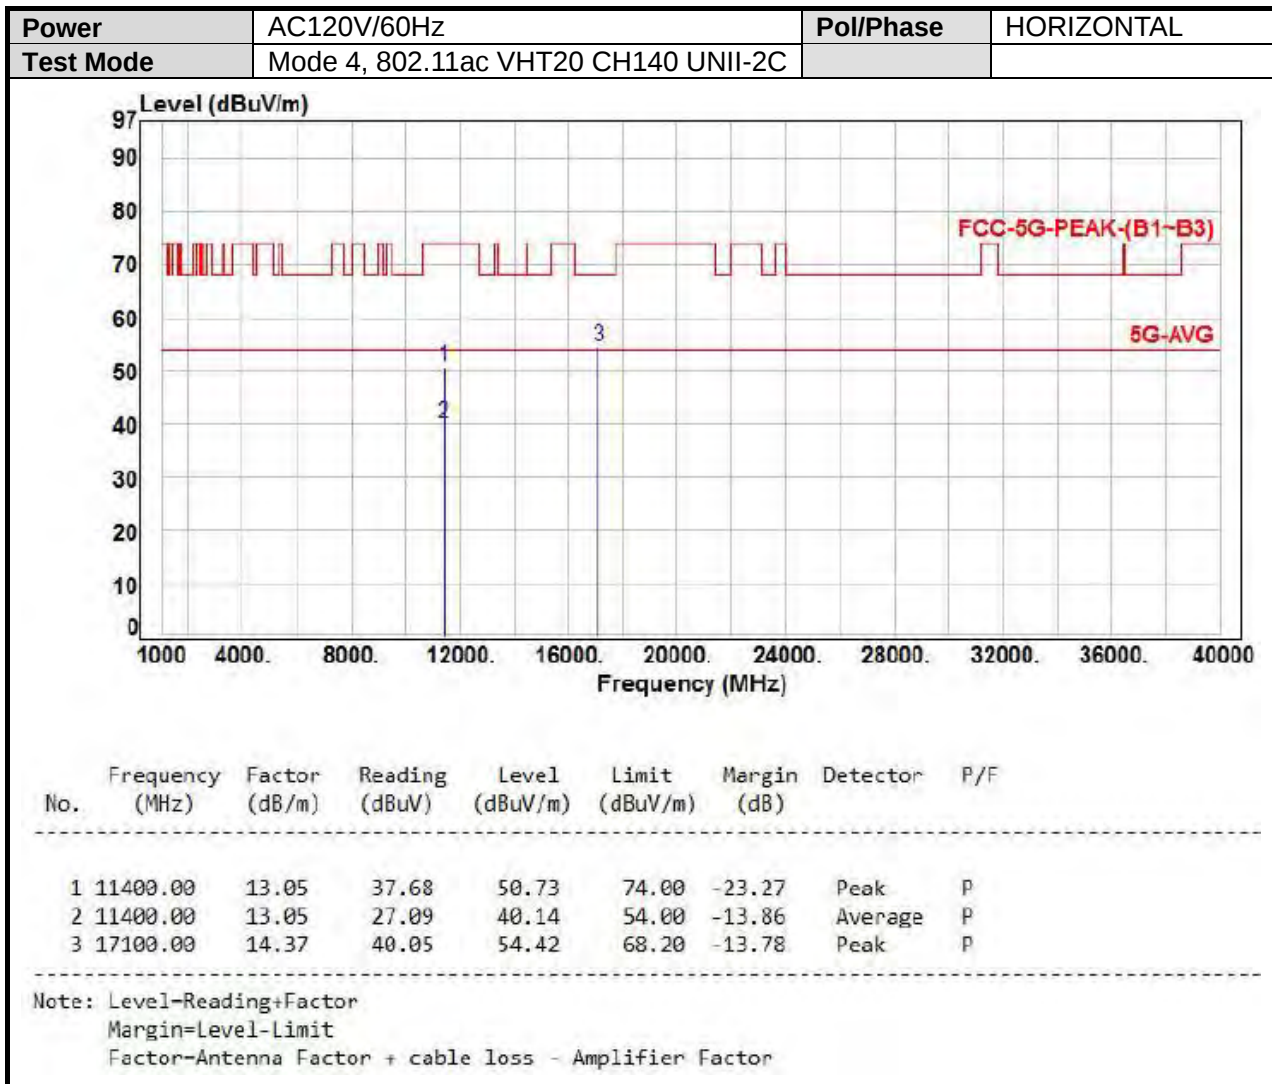


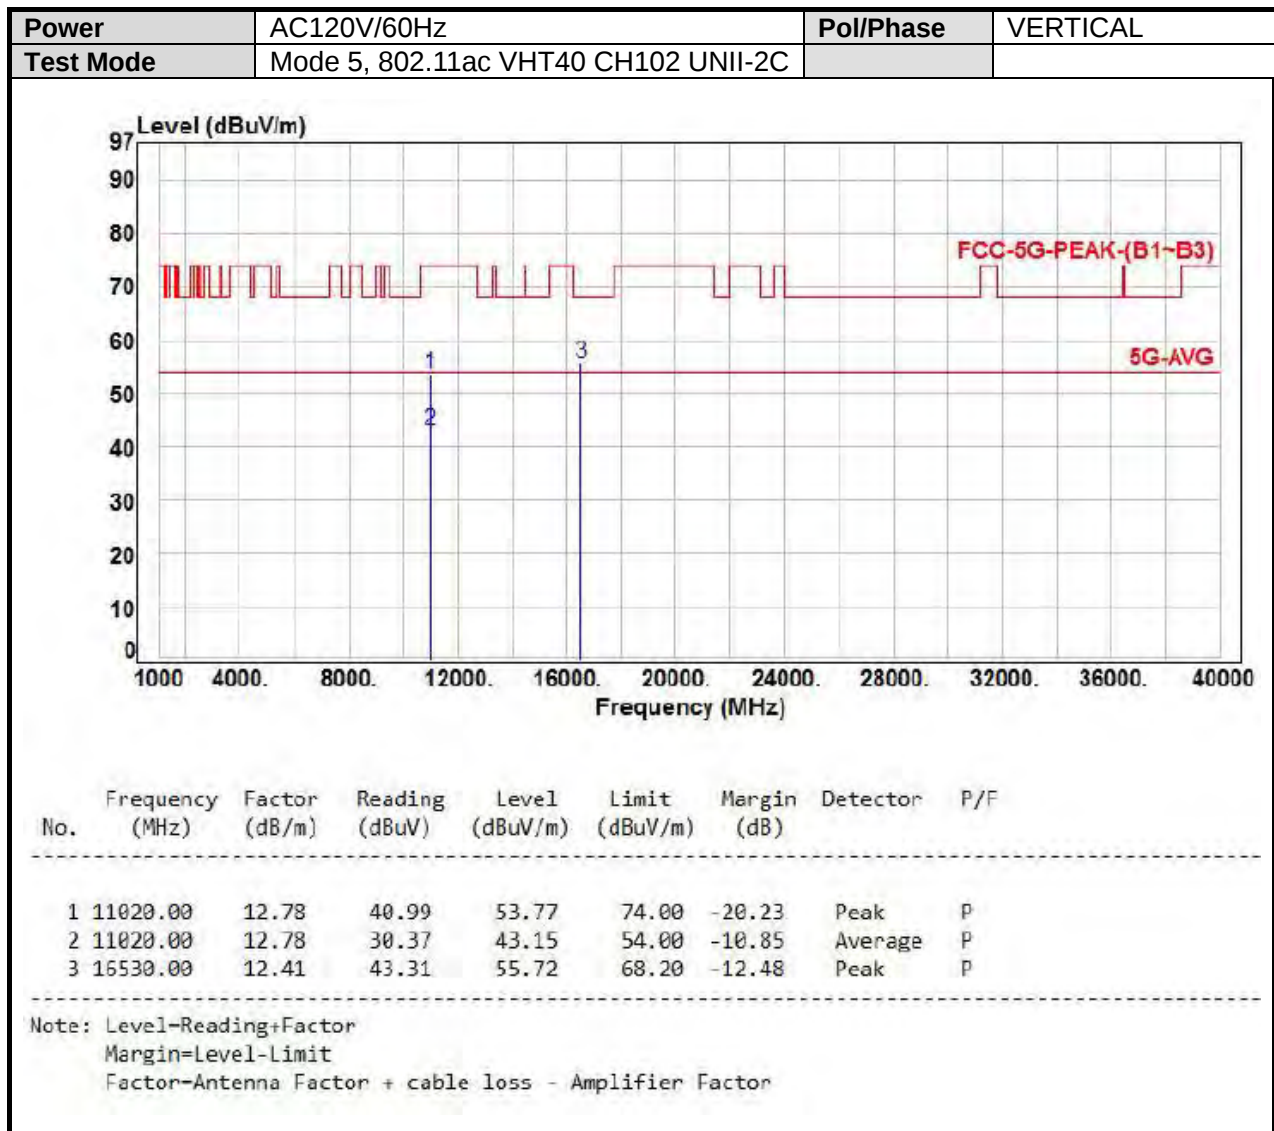





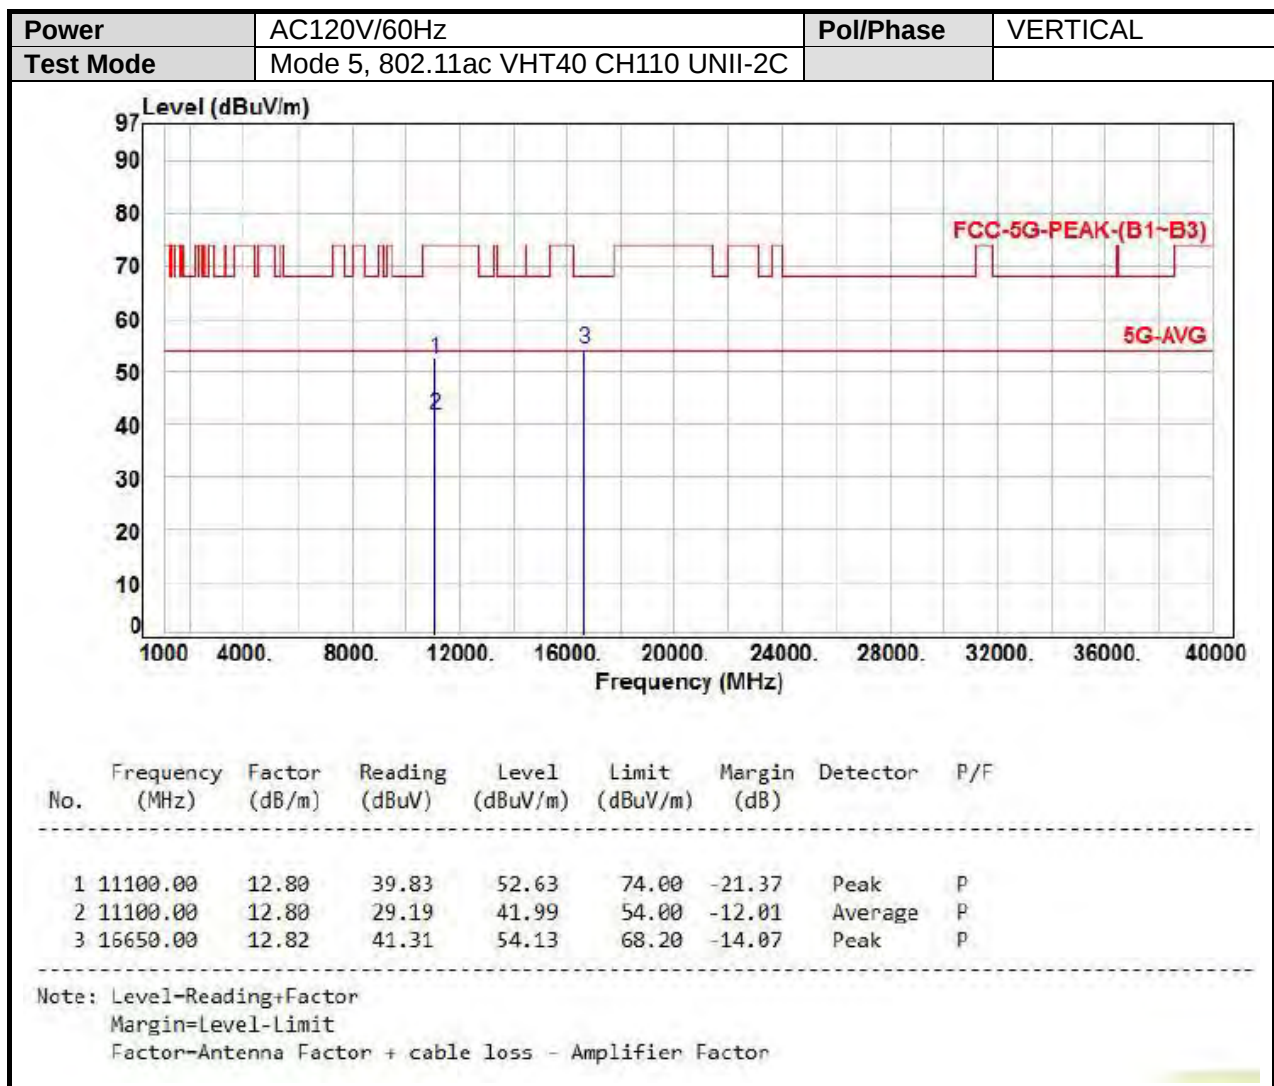


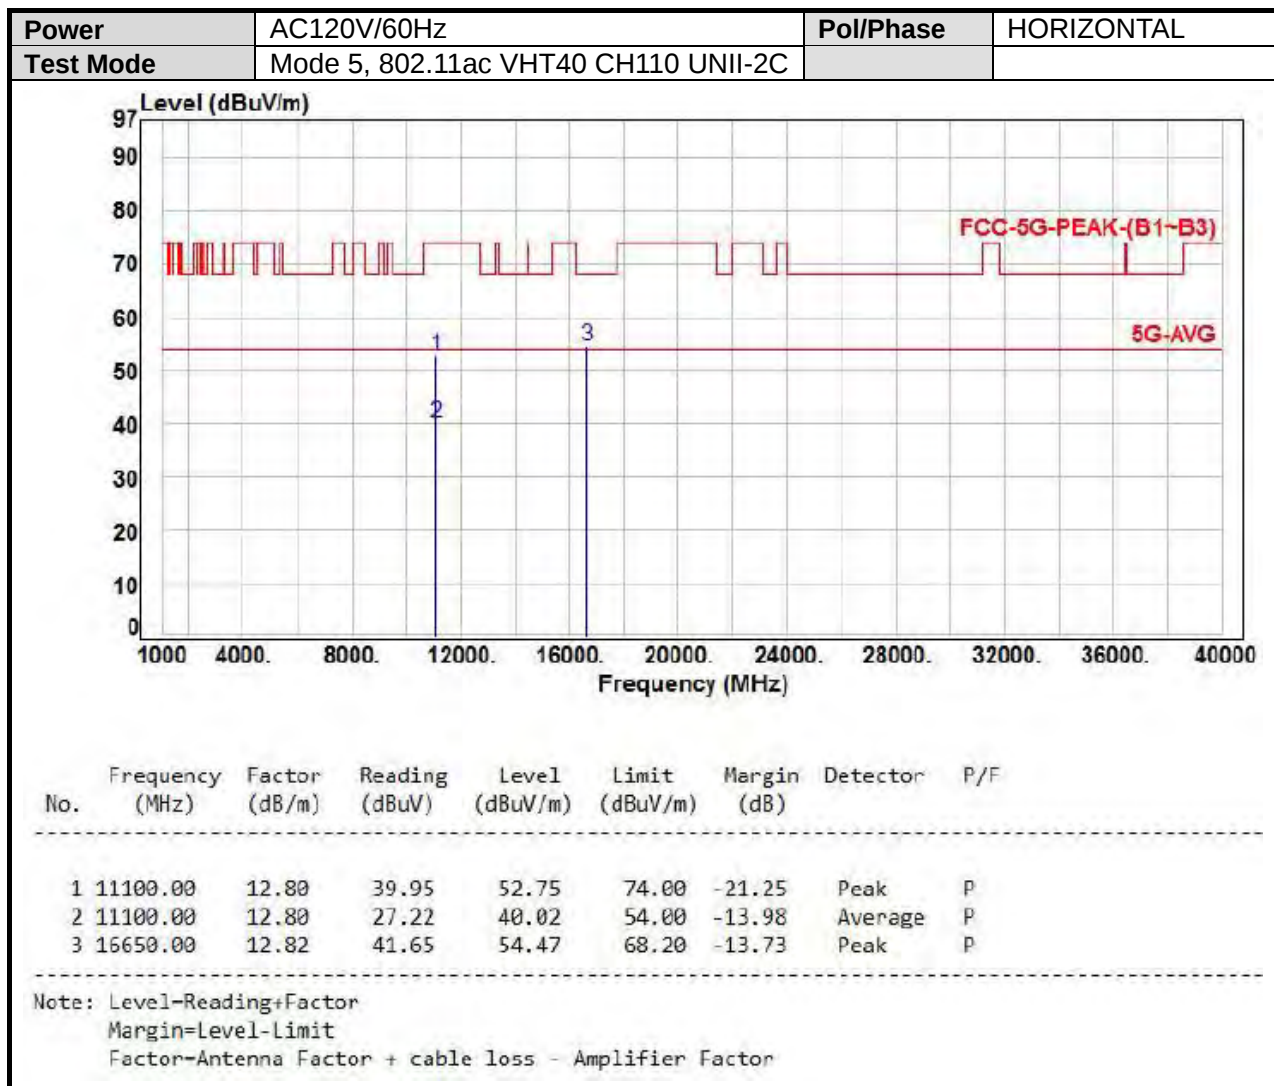


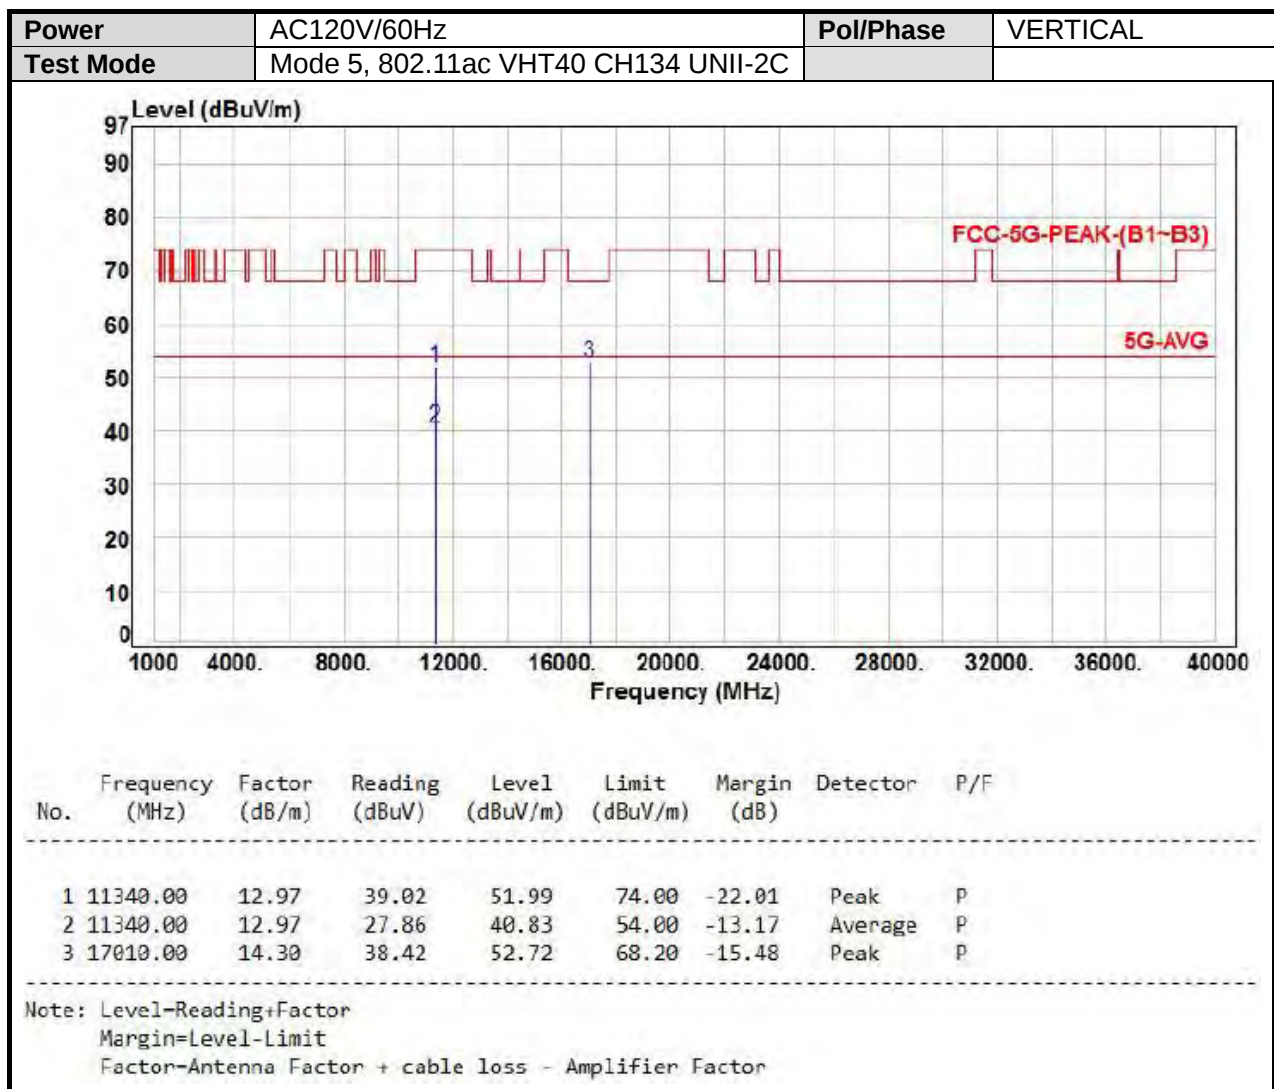


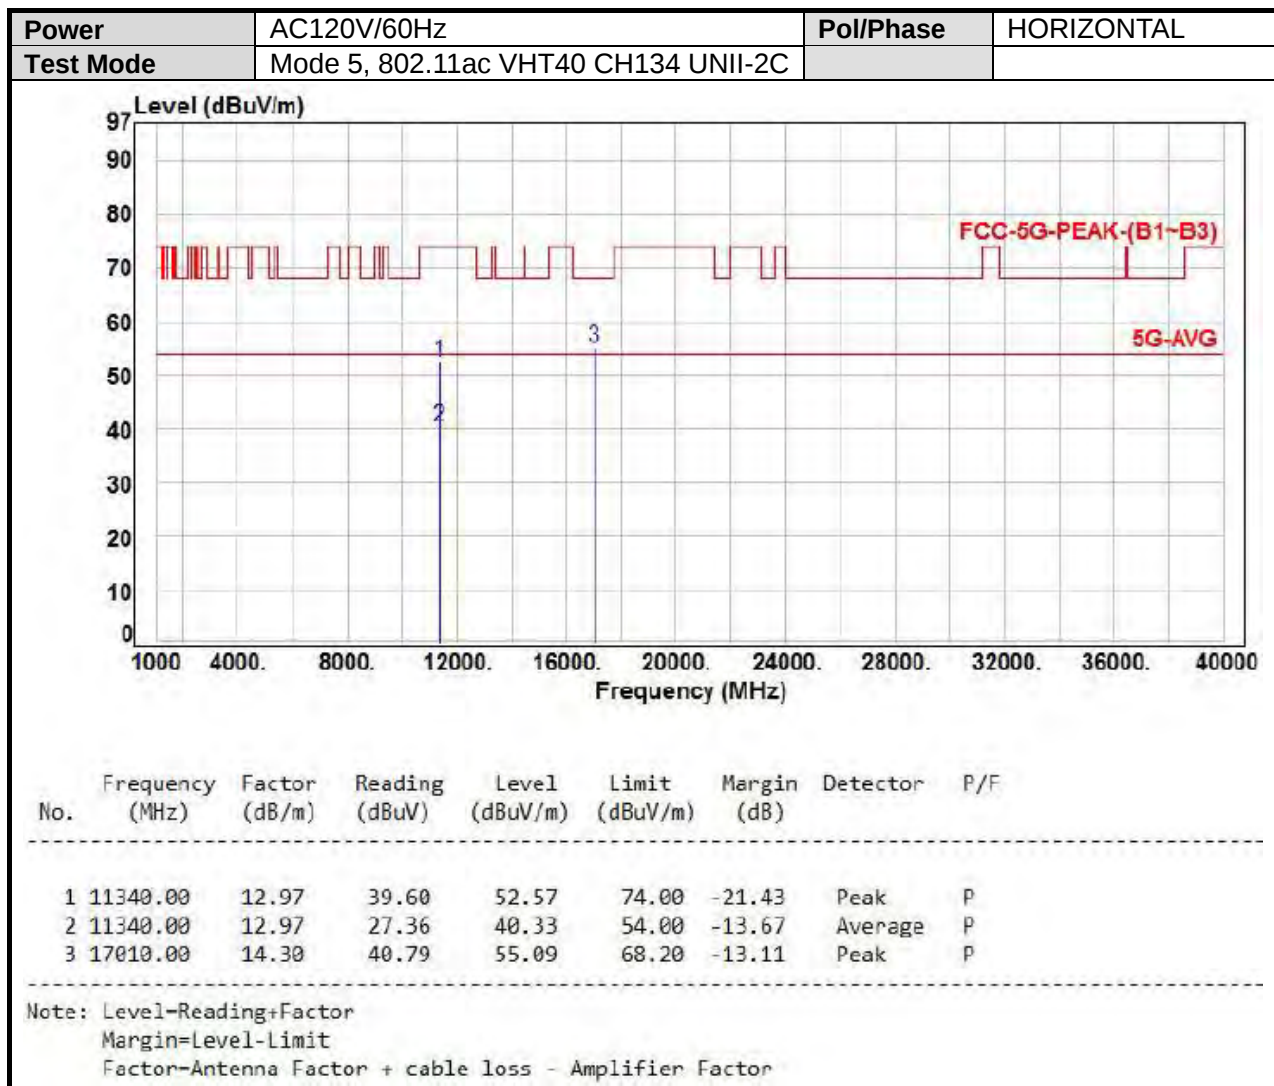


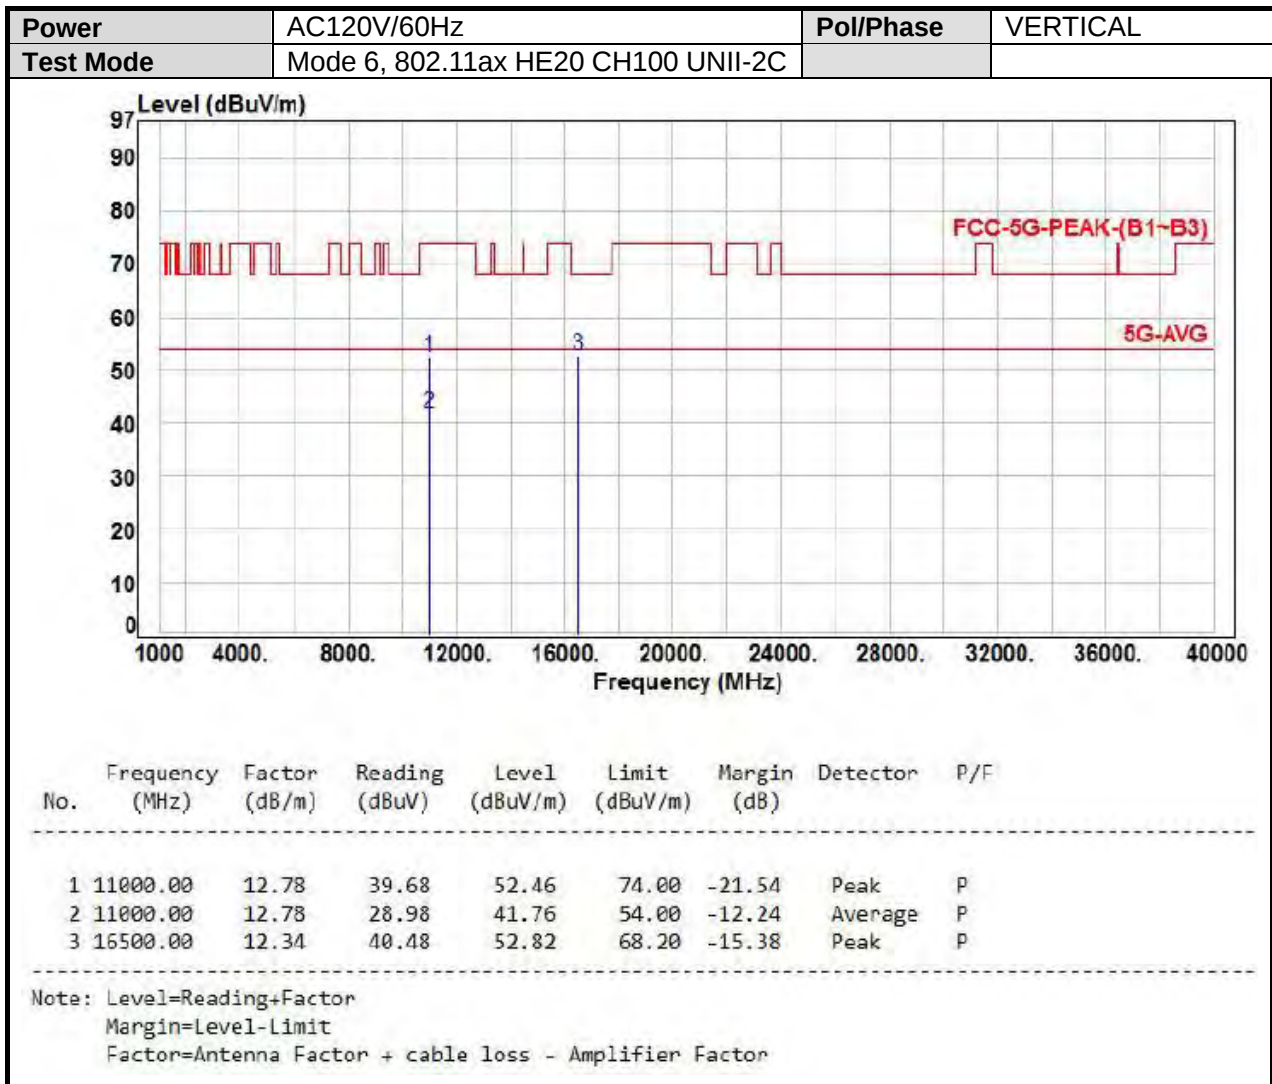


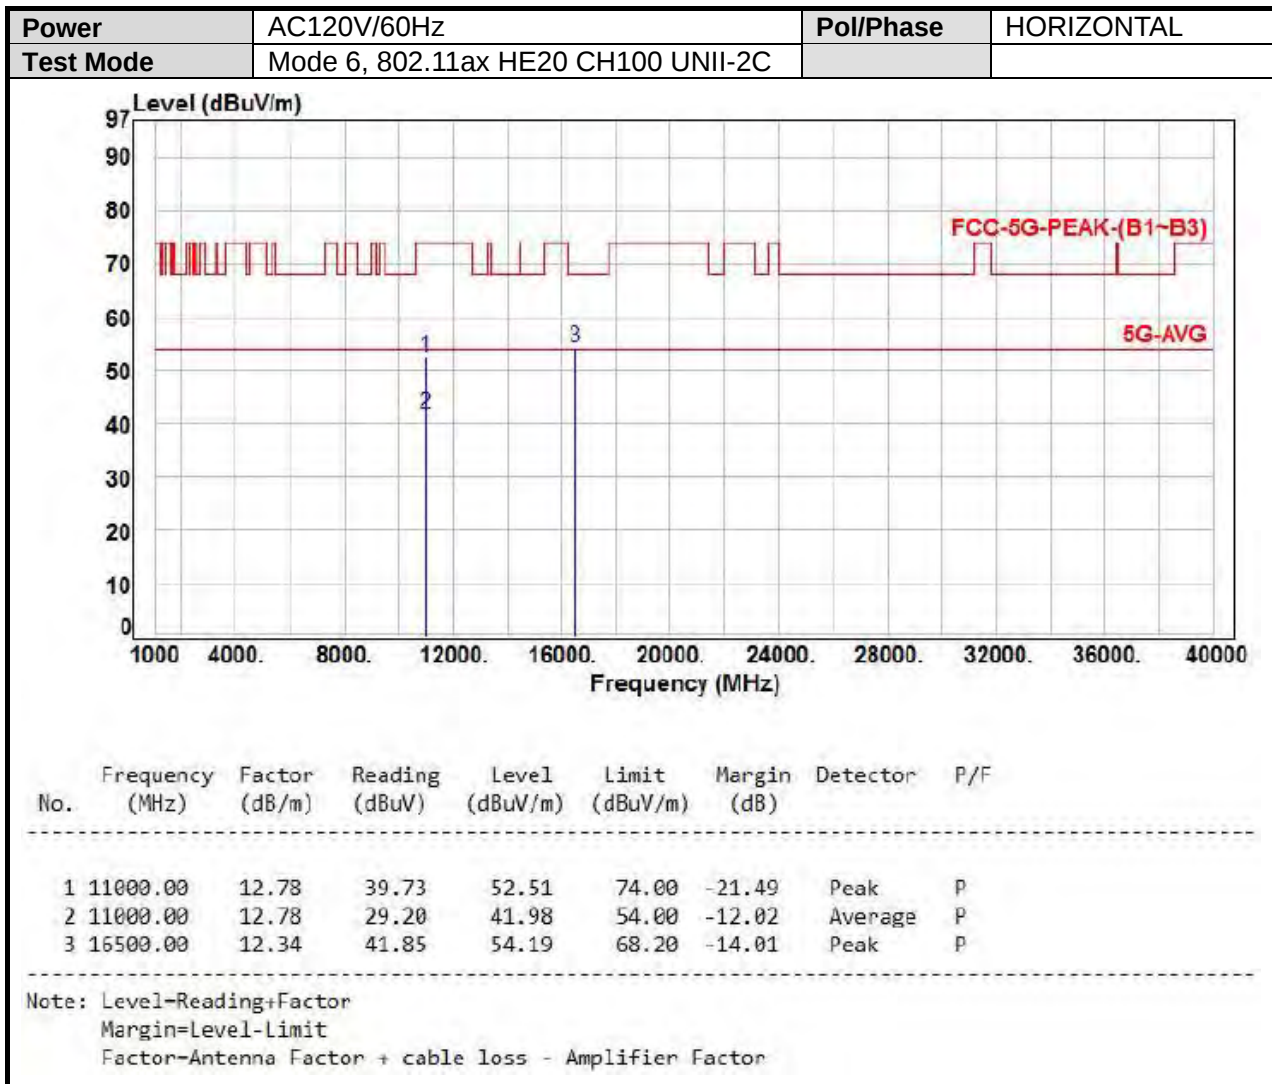


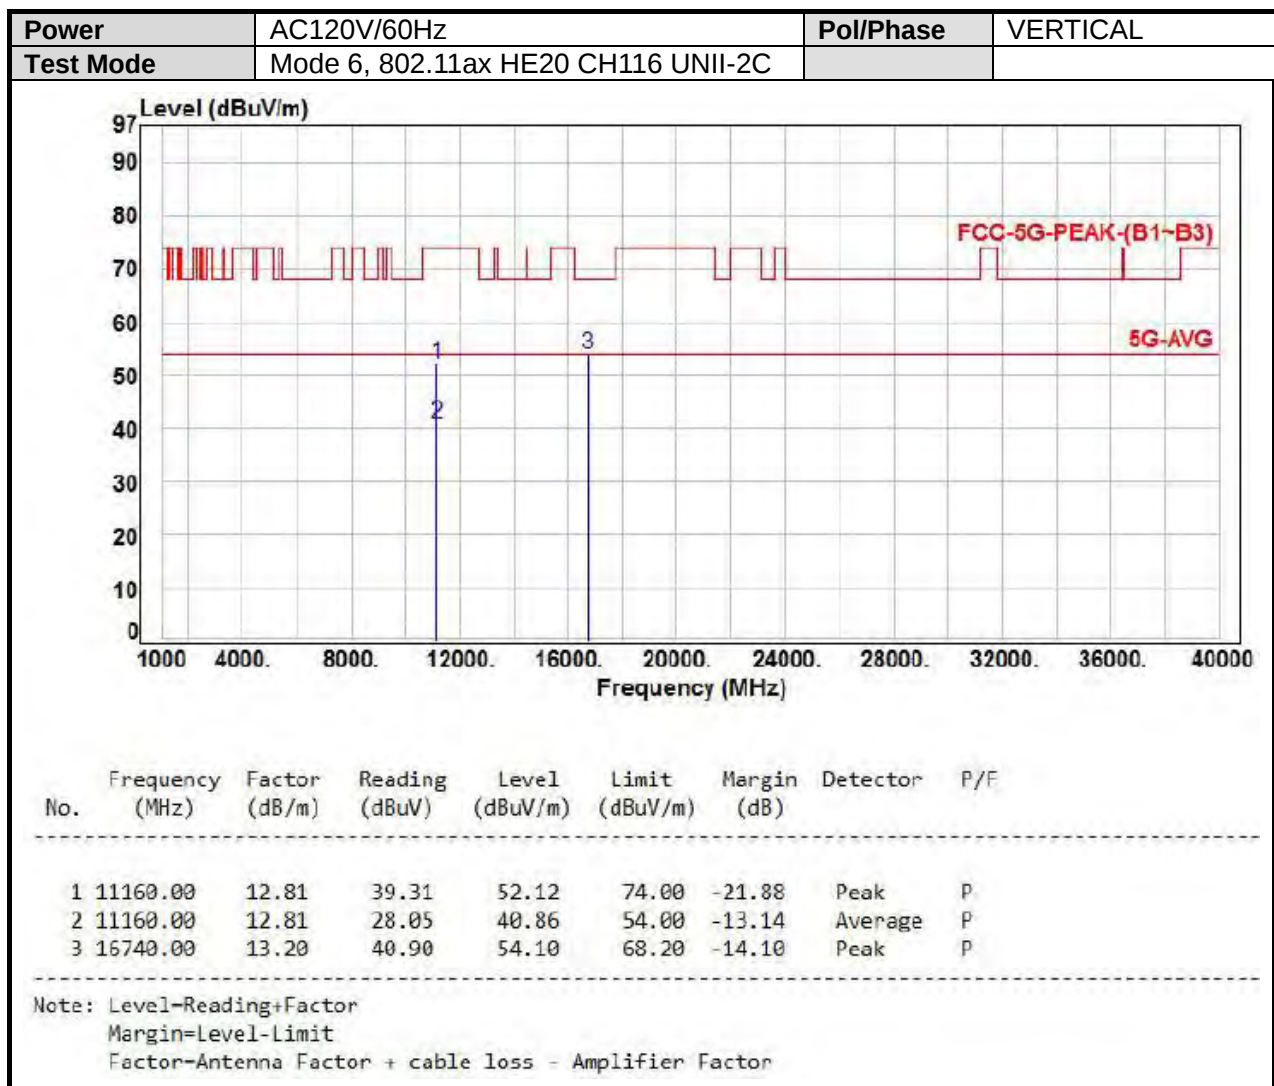


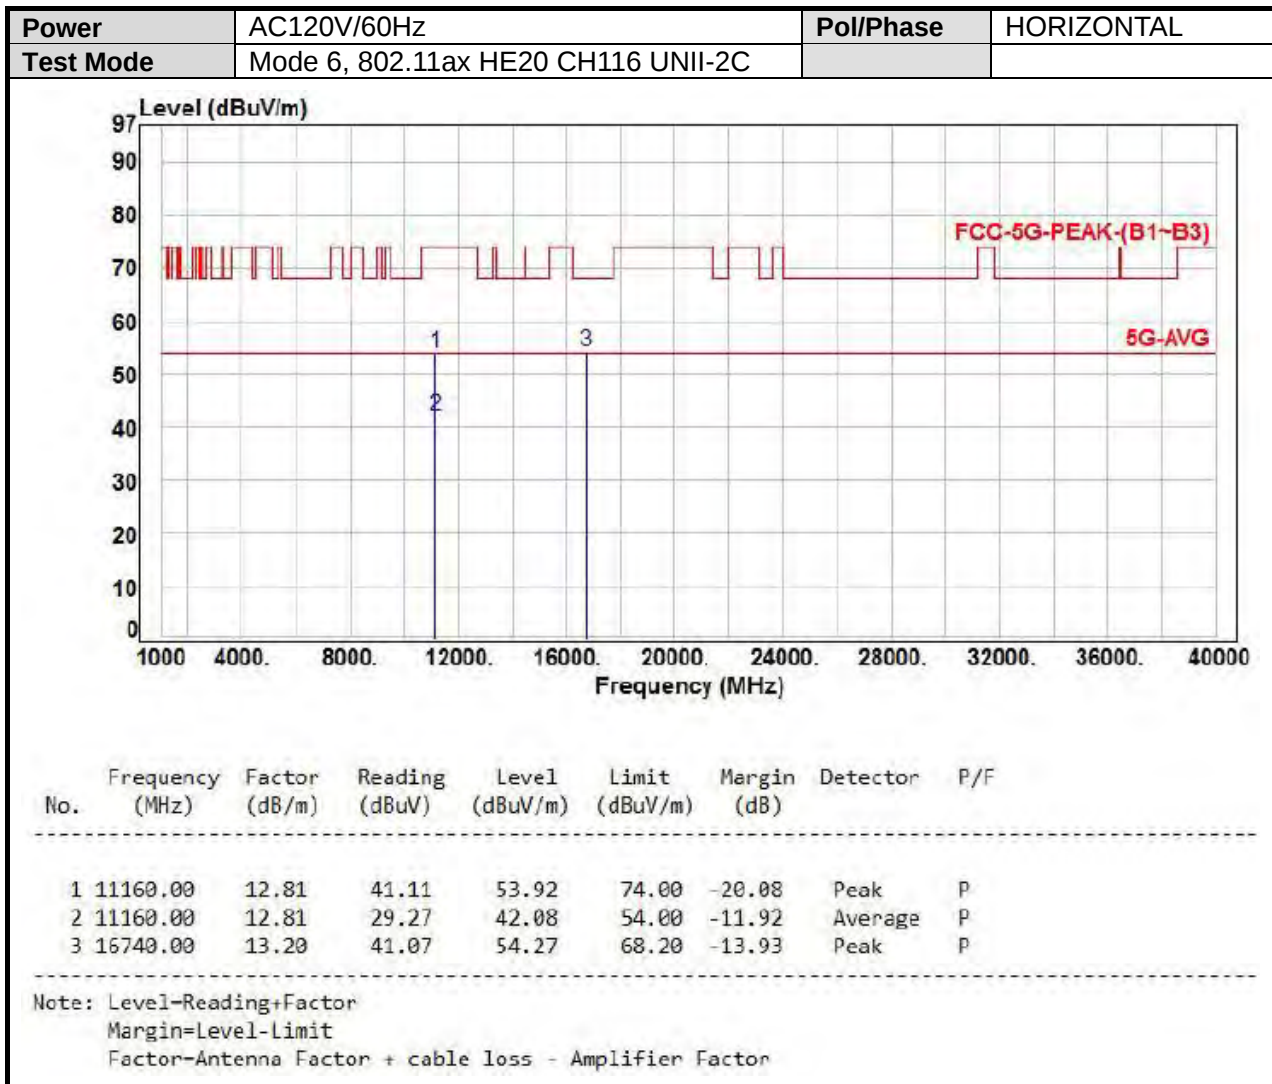


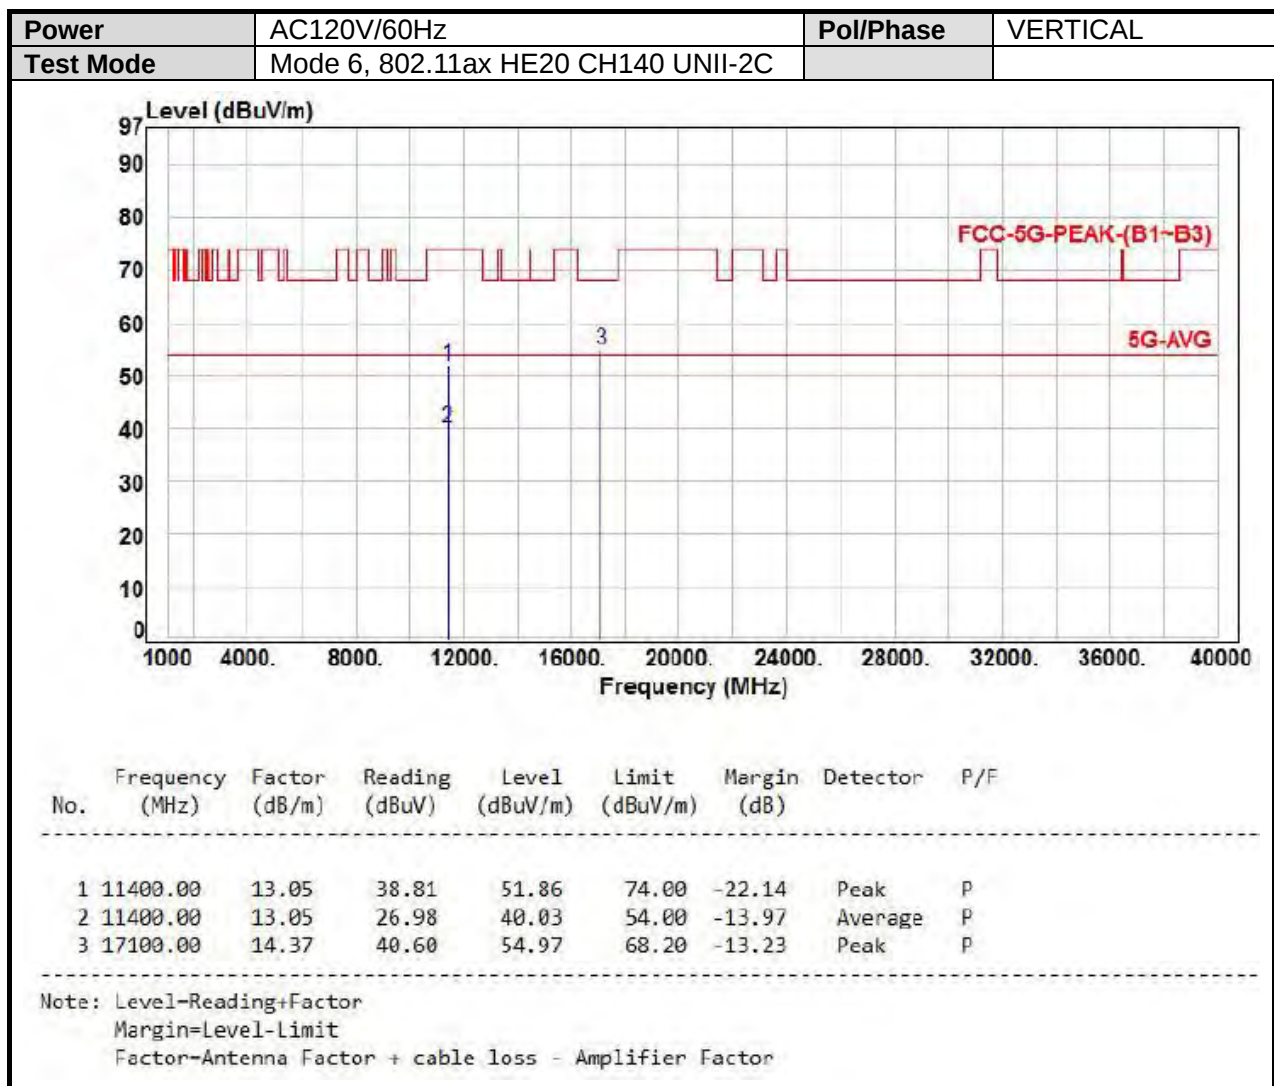


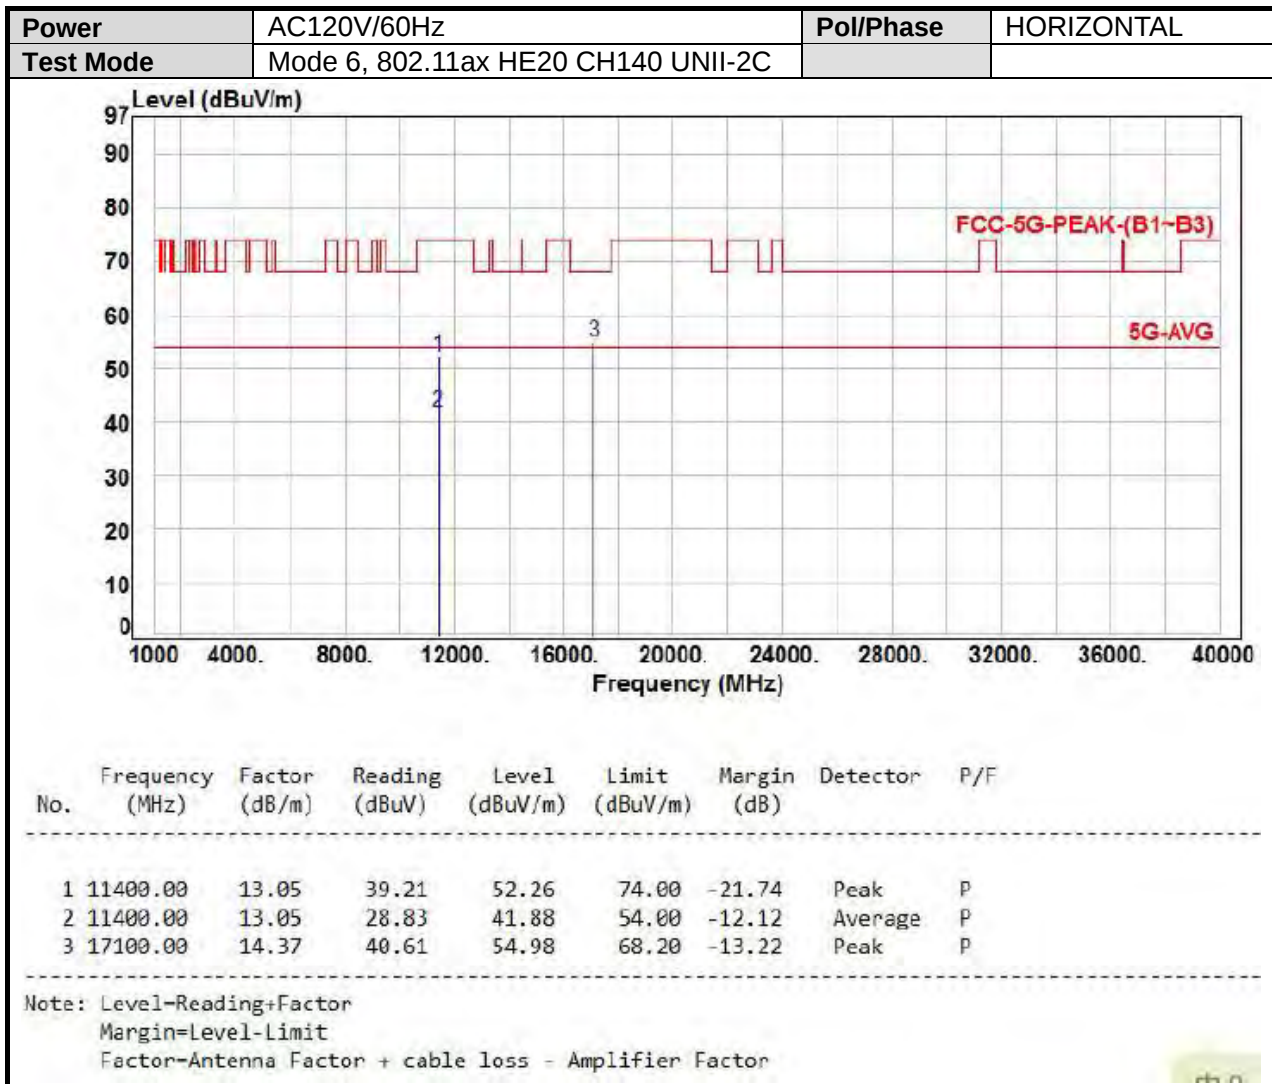


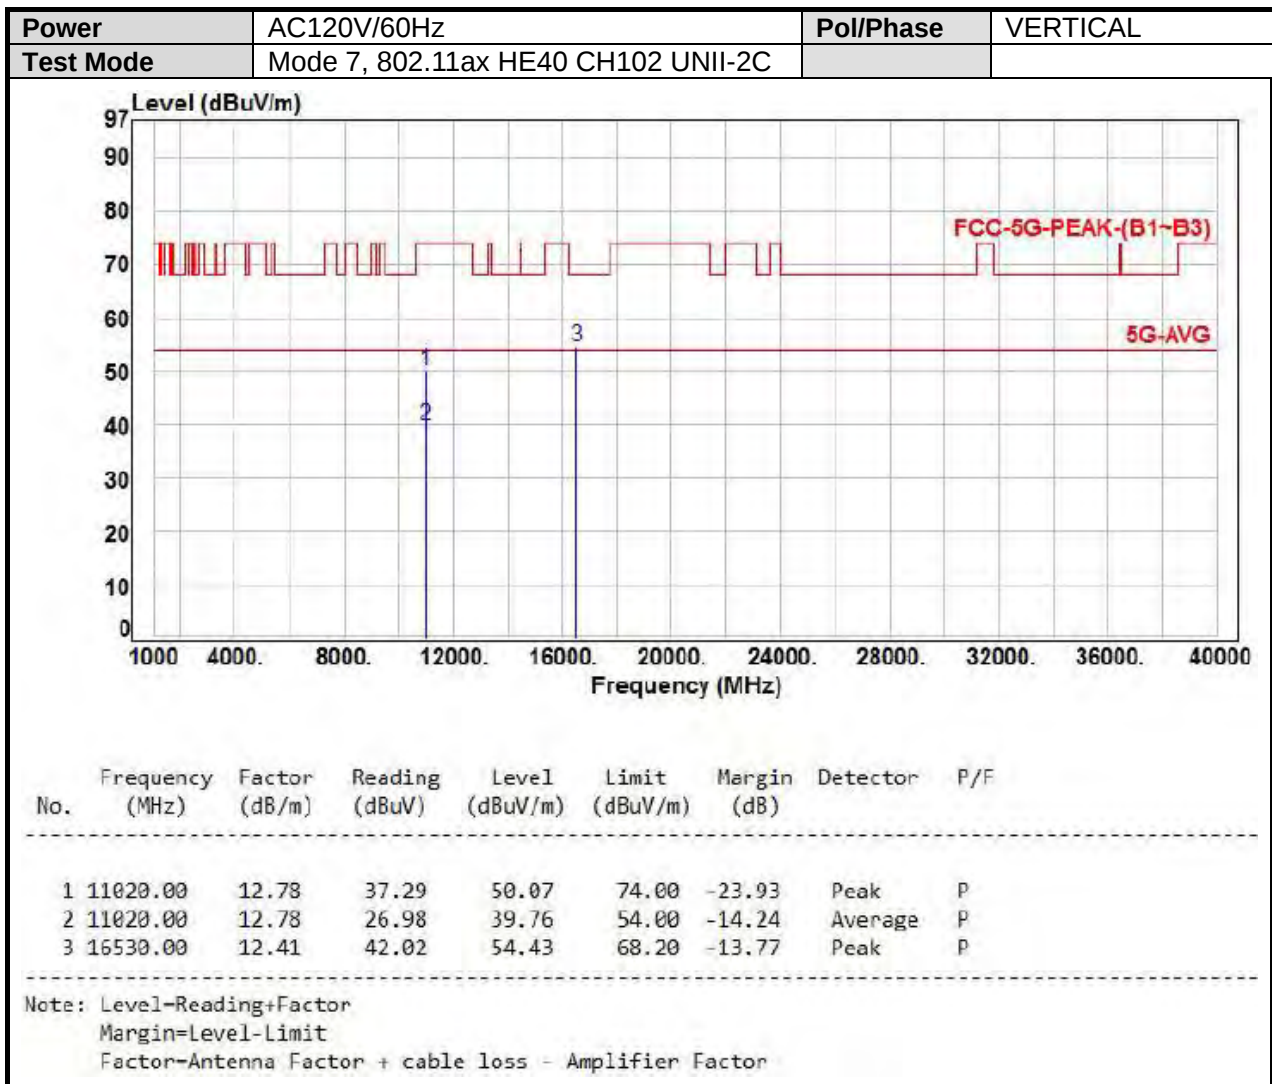


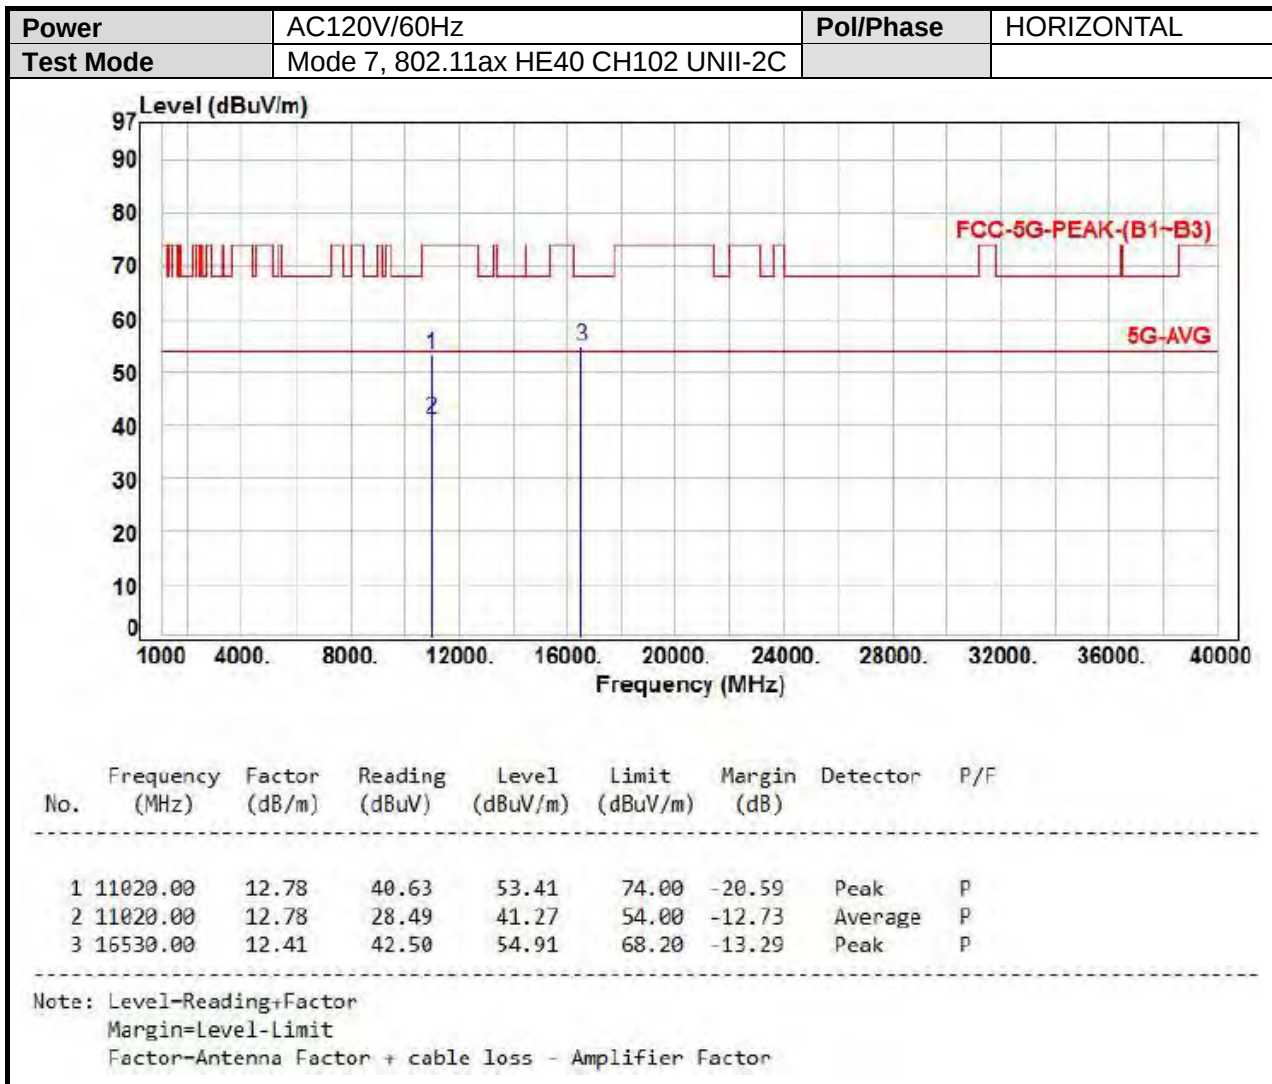

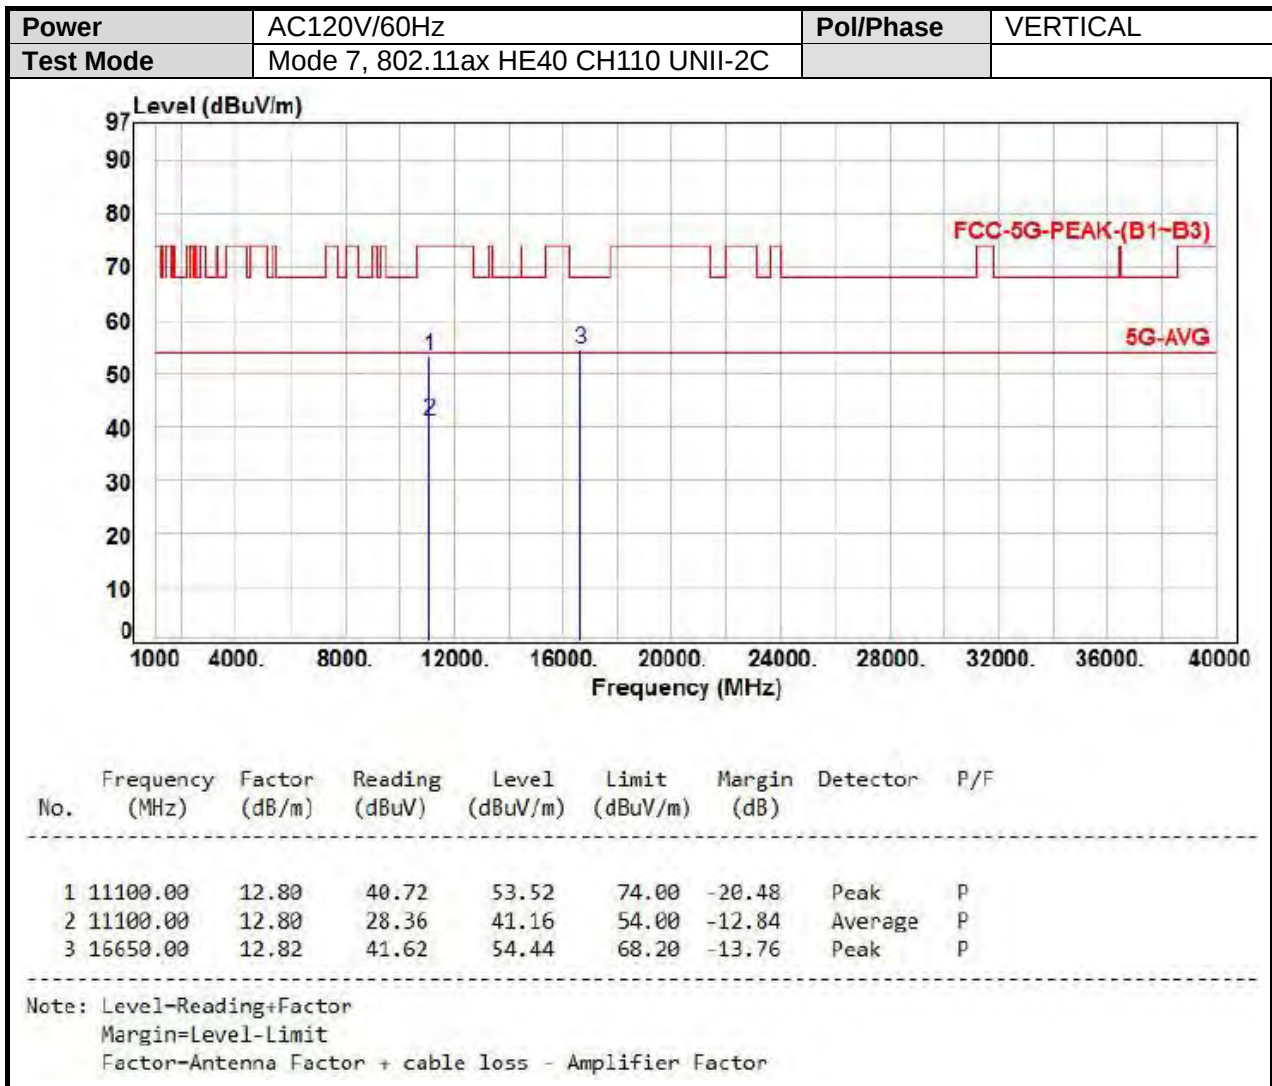

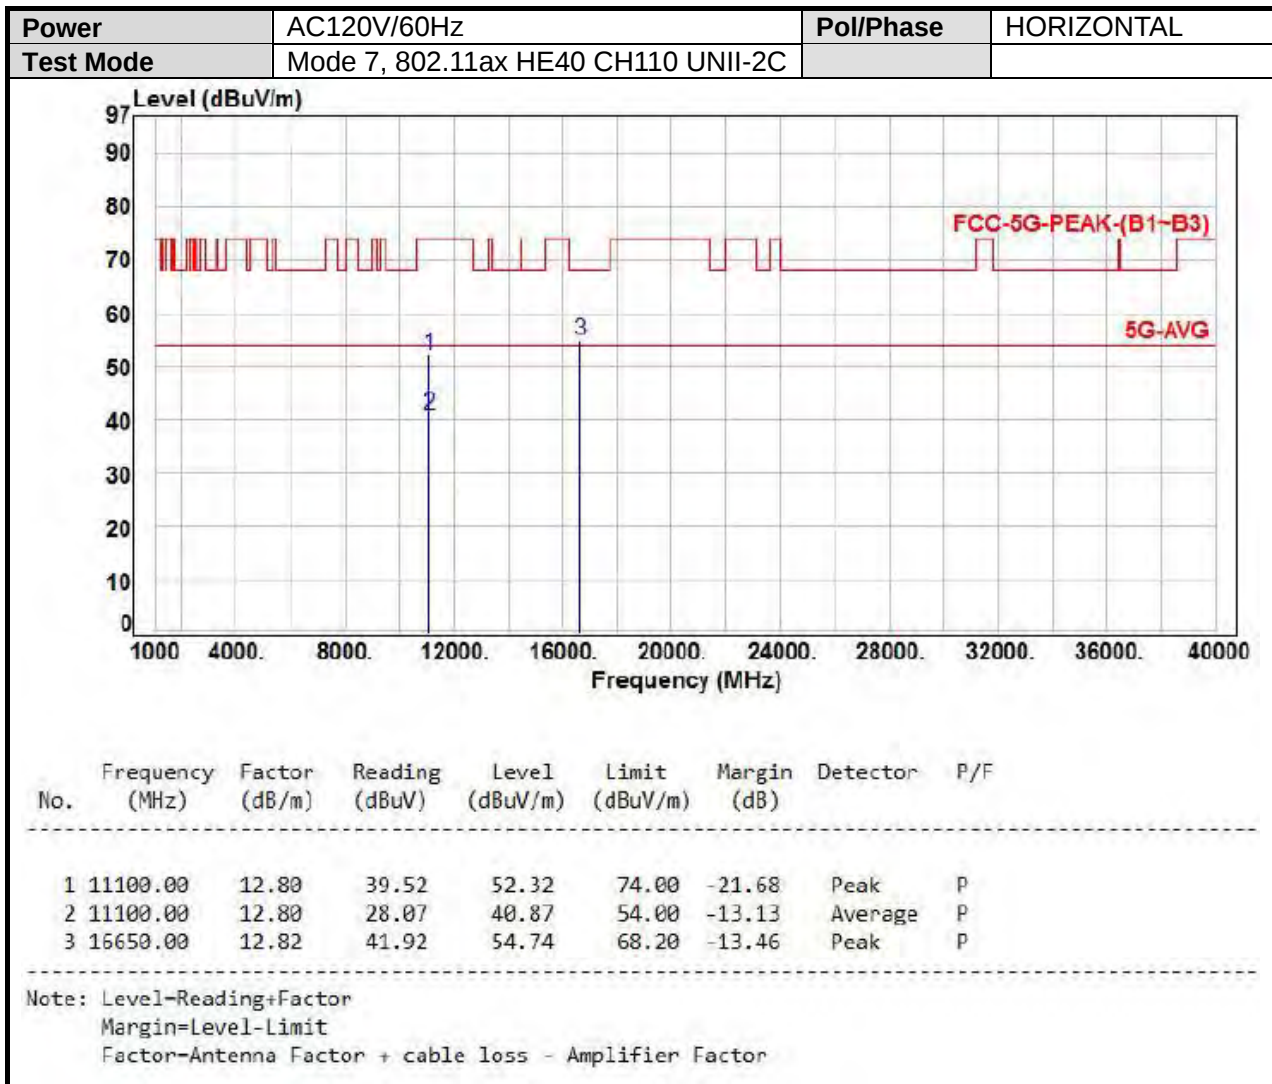

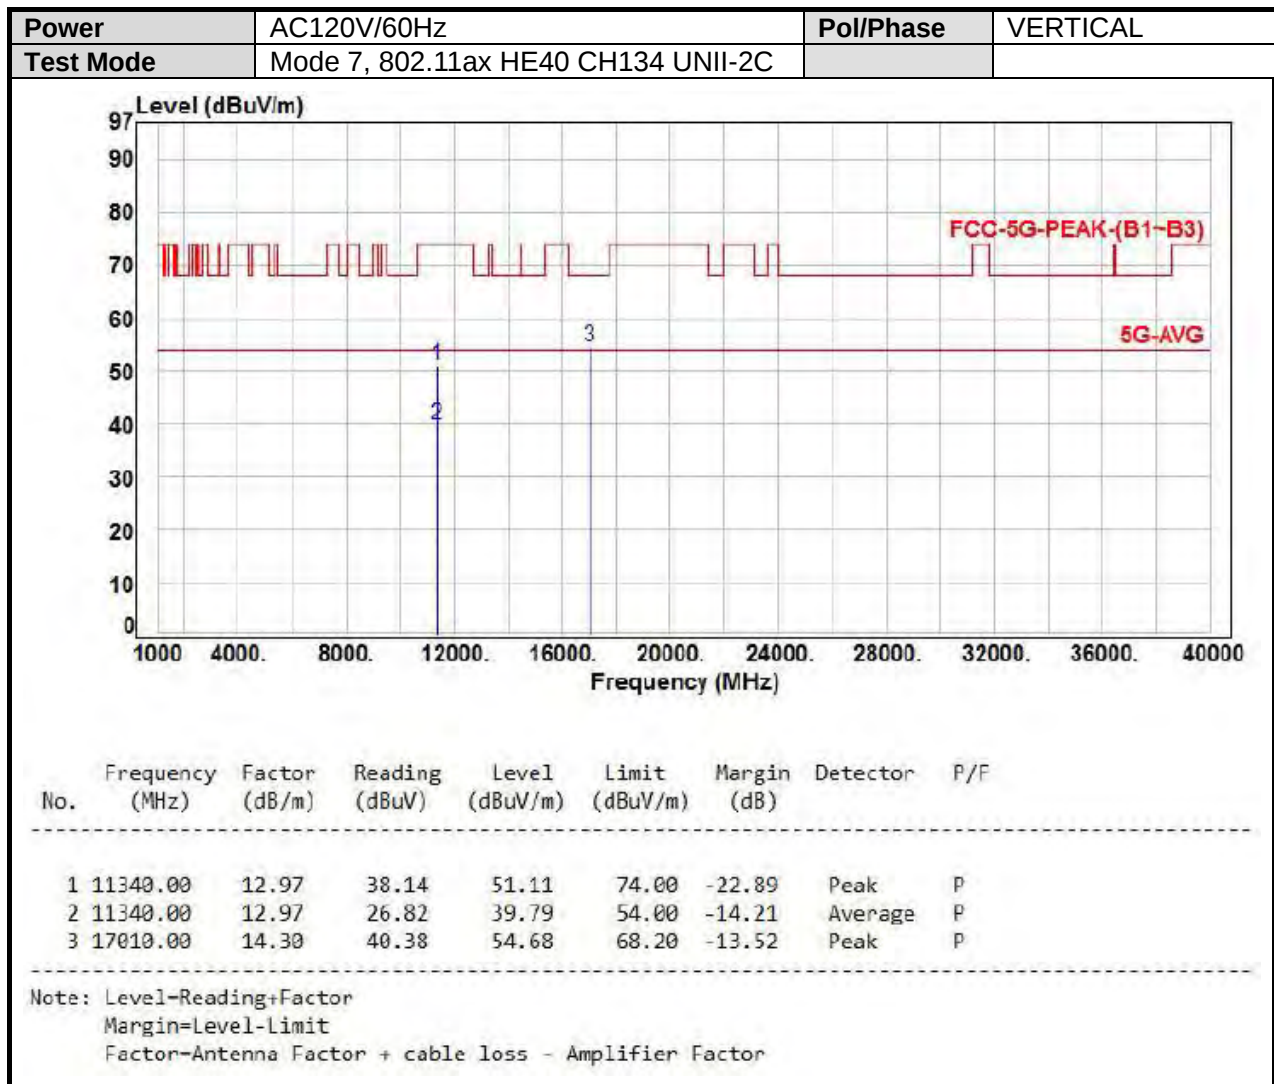

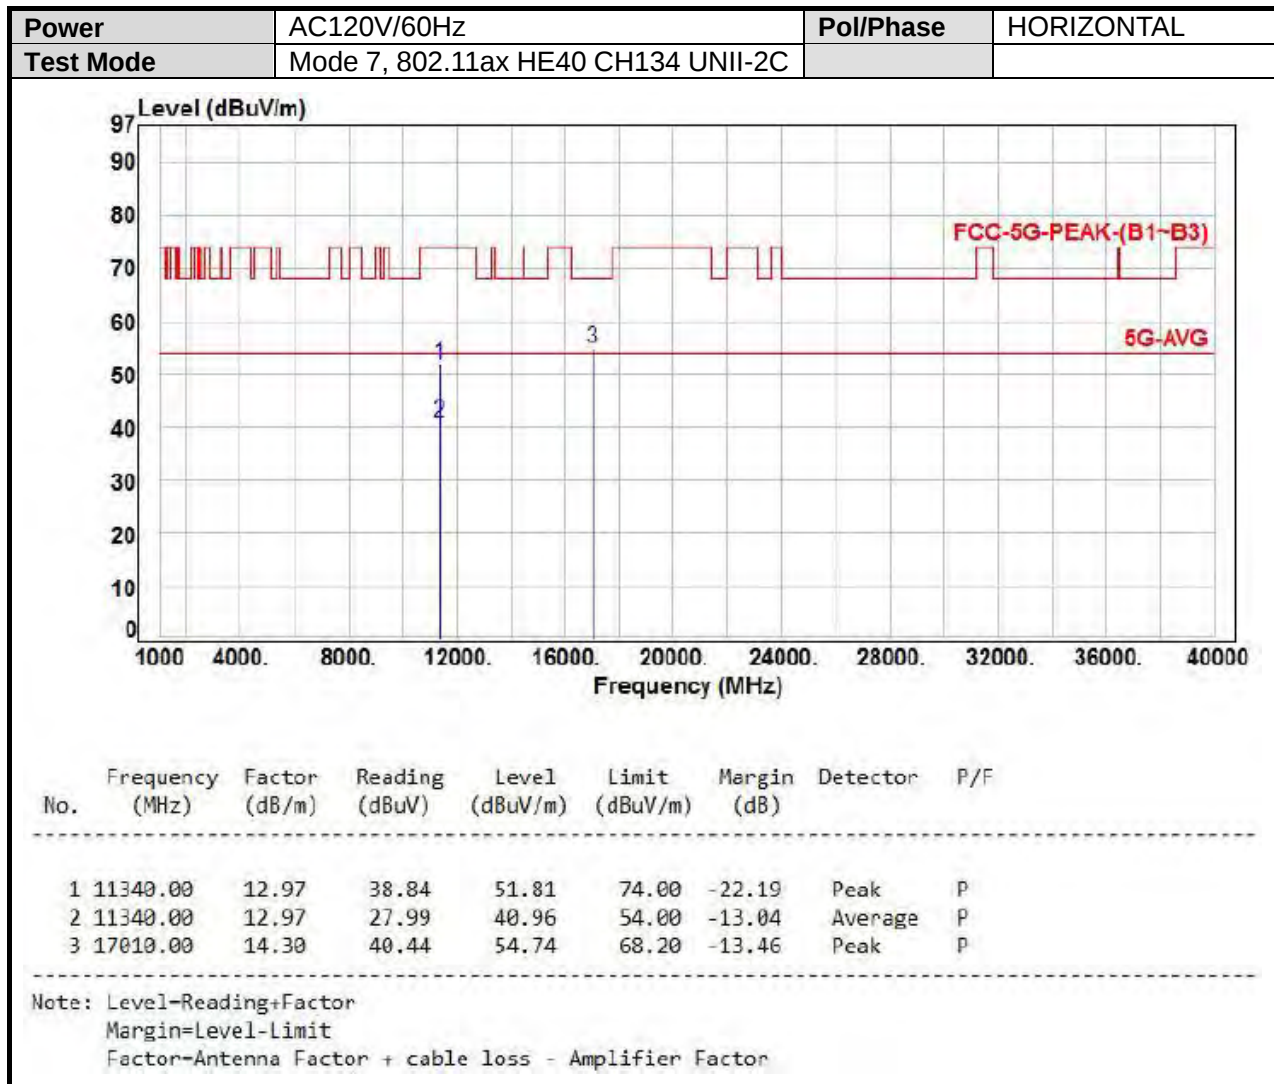



UNII-3

