

FCC TEST REPORT**FCC 47 CFR Part 15D****Unlicensed Personal Communication Service Devices****Industry Canada RSS-213****2GHz License-exempt Personal Communications Service Devices (LE-PCS)****Report Reference No.**: G0M-1405-3835-TFC15DFP-V01**Testing Laboratory**: Eurofins Product Service GmbHAddress: Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation:

A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A**Applicant's name**: Quail Digital UKAddress: 92 Lots Road
SW10 0QD London
UNITED KINGDOM**Test specification:**Standard: 47 CFR Part 15D
47 CFR Part 15C
47 CFR Part 15B
RSS-213, Issue 2, 2005-12
RSS-Gen, Issue 3, 2010-12
ANSI C63.17:2006
ANSI C63.4:2003**Equipment under test (EUT):**

Product description DECT Base Station for Intercommunication use

Model No. Q-P7BS

Additional Model(s) None

Brand Name(s) Quail

Hardware version revB

Firmware / Software version 1.2.0

FCC-ID: UDDQP7BS IC: 6402A-QP7BS

Test result **Passed**

Possible test case verdicts:

- neither assessed nor tested: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Test Lab Temperature: 22 – 25 °C

Test Lab Humidity: 32 – 38 %

Date of receipt of test item: 2014-04-01

Date (s) of performance of tests: 2014-06-24 – 2014-07-01

Compiled by: Wilfried Treffke

Tested by (+ signature): Wilfried Treffke
(Responsible for Test)



Approved by (+ signature): Christian Weber



Date of issue: 2014-07-09

Total number of pages: 114

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Additional comments:

Conducted tests were performed with sample with serial Number: 045430003 and radiated tests were performed with sample with serial number 045430001.

Version History

Version	Issue Date	Remarks	Revised by
01	2014-07-09	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1 Photos - Equipment external	8
1.2 Photos - Equipment internal	10
1.3 Photos – Test setup	12
1.4 Supporting Equipment Used During Testing	13
1.5 Test Modes:	14
1.6 Test Equipment Used During Testing	15
1.7 Sample emission level calculation	16
2 RESULT SUMMARY	17
3 TEST CONDITIONS AND RESULTS	19
3.1 Test Conditions and Results – Coordination with fixed microwave service	19
3.2 Test Conditions and Results – Cross reference to subpart B	20
3.3 Test Conditions and Results – AC power line conducted emissions	21
3.4 Test Conditions and Results – Antenna requirement	24
3.5 Test Conditions and Results – Digital modulation	25
3.6 Test Conditions and Results – Occupied Bandwidth	26
3.7 Test Conditions and Results – Emission Bandwidth	30
3.8 Test Conditions and Results – Peak transmit power	33
3.9 Test Conditions and Results – Power spectral density	37
3.10 Test Conditions and Results – Frequency stability	40
3.11 Test Conditions and Results – Transmitter in-band unwanted emissions	46
3.12 Test Conditions and Results – Transmitter out-of-band emissions	50
3.13 Test Conditions and Results – Receiver spurious emissions	79
3.14 Test Conditions and Results – Automatic discontinuation of Transmission	89
3.15 Test Conditions and Results – Radiofrequency radiation exposure	90
3.16 Test Conditions and Results – Monitoring threshold	91
3.17 Test Conditions and Results – LIC confirmation	93
3.18 Test Conditions and Results – LIC selection	94
3.19 Test Conditions and Results – Monitoring antenna	95
3.20 Test Conditions and Results – Monitoring time	97
3.21 Test Conditions and Results – Monitoring bandwidth	98
3.22 Test Conditions and Results – Monitoring reaction time	99
3.23 Test Conditions and Results – System acknowledgement	101
3.24 Test Conditions and Results – Random waiting	104


3.25 Test Conditions and Results – Maximum transmit period	108
3.26 Test Conditions and Results – Maximum spectral occupancy	109
3.27 Test Conditions and Results – Fair access	110
3.28 Test Conditions and Results – Frame period and Jitter	111
3.29 Test Conditions and Results – Frame and TDMA repetition stability	113

1 Equipment (Test item) Description


Description	DECT Base Station for Intercommunication use	
Model	Q-P7BS	
Additional Model(s)	None	
Brand Name(s)	Quail	
Serial number	N/A	
Hardware version	revB	
Software / Firmware version	1.2.0	
FCC-ID	UDDQP7BS	
IC	6402A-QP7BS	
Equipment type	Radio Module	
Radio type	DECT Fixed Part	
Number of Radios	2 identical transceivers is built into the device	
Radio technology	DECT 6.0	
Operating frequency range	1921.536 - 1928.448MHz	
Assigned frequency band	1920 - 1930MHz	
Number of RF channels	5	
Supported slots	even only	
Number of time slots	12 x Tx + 12 x RX = 24	
Channels	F_0	Ch:0 / 1928.448 MHz
	F_1	Ch:1 / 1926.720 MHz
	F_2	Ch:2 / 1924.992 MHz
	F_3	Ch:3 / 1923.264 MHz
	F_4	Ch:4 / 1921.536 MHz
Main test frequencies	F_{LOW}	Ch:4 / 1921.536 MHz
	F_{MID}	Ch:2 / 1924.992 MHz
	F_{HIGH}	Ch:0 / 1928.448 MHz
Modulations	GFSK	
Emission designator	F7D	
Channel spacing	1728 kHz	
Spectrum access	Listen before transmit	
Nominal lower threshold	N/A	
Nominal upper threshold	-63 dBm	
Number of antennas	2 per transceiver	

Antenna 1	Type	integrated
	Model	wire antenna
	Manufacturer	see Manufacturer
	Gain	2 dBi
Antenna 2	Type	integrated
	Model	wire antenna
	Manufacturer	see Manufacturer
	Gain	2 dBi
Manufacturer	Quail Digital UK 92 Lots Road SW10 0QD London UNITED KINGDOM	
Power supply	V_{NOM}	48 VDC
	V_{MIN}	45 VDC
	V_{MAX}	49 VDC
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A
Temperature	T_{NOM}	25°C
	T_{MIN}	0°C
	T_{MAX}	40°C


1.1 Photos - Equipment external

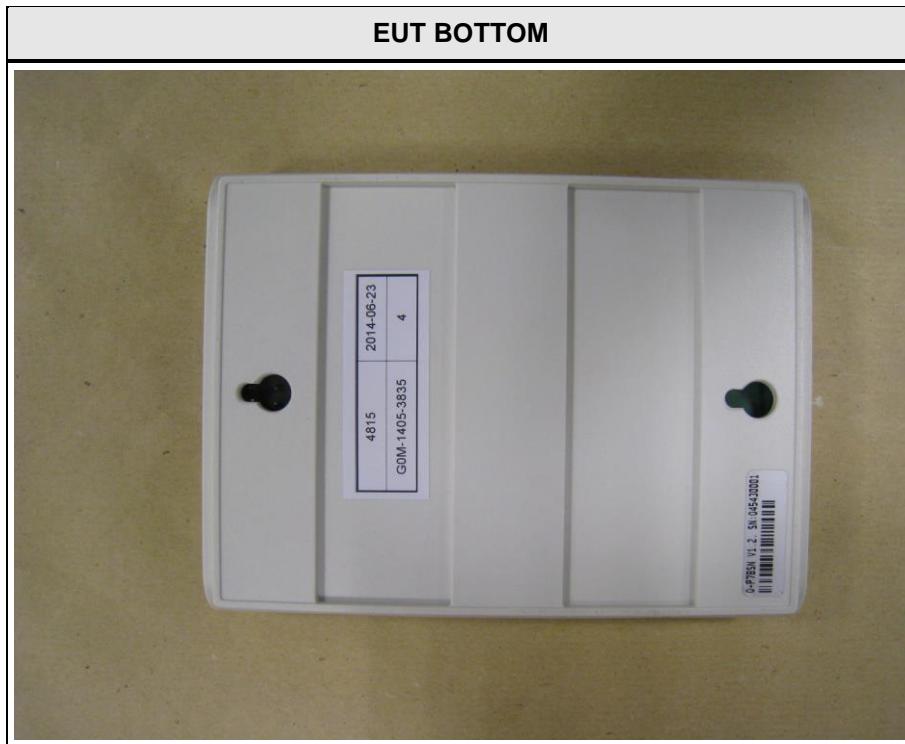



EUT FRONT

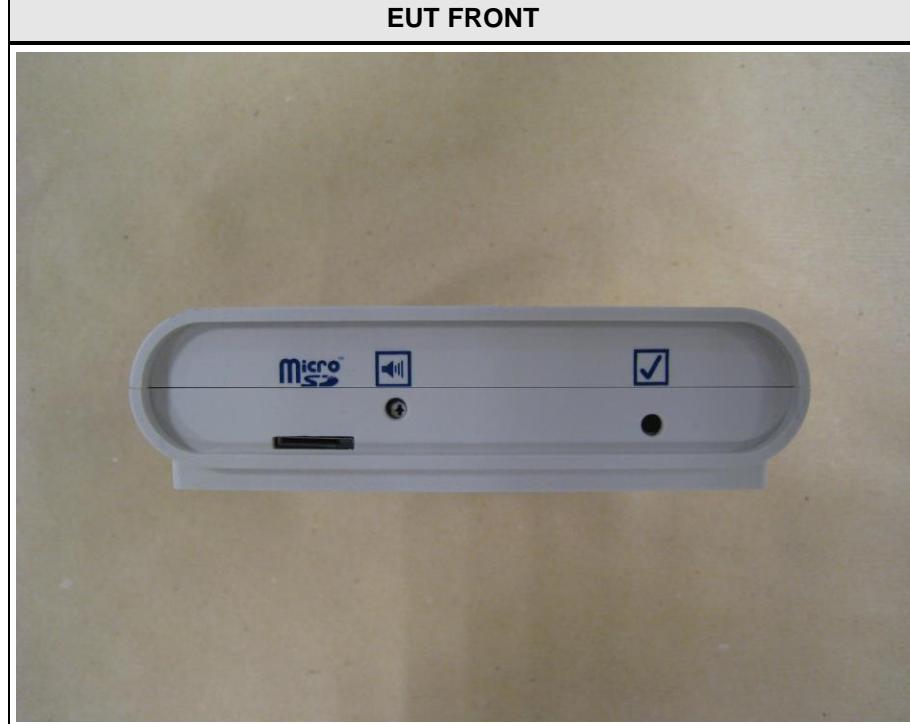


EUT REAR

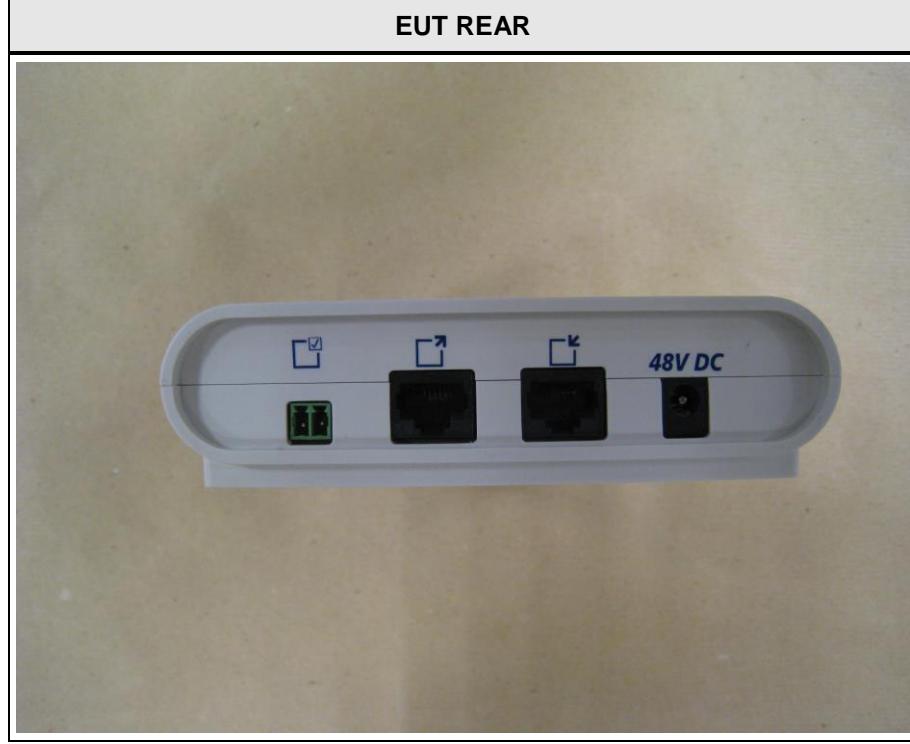



1.2 Photos - Equipment internal

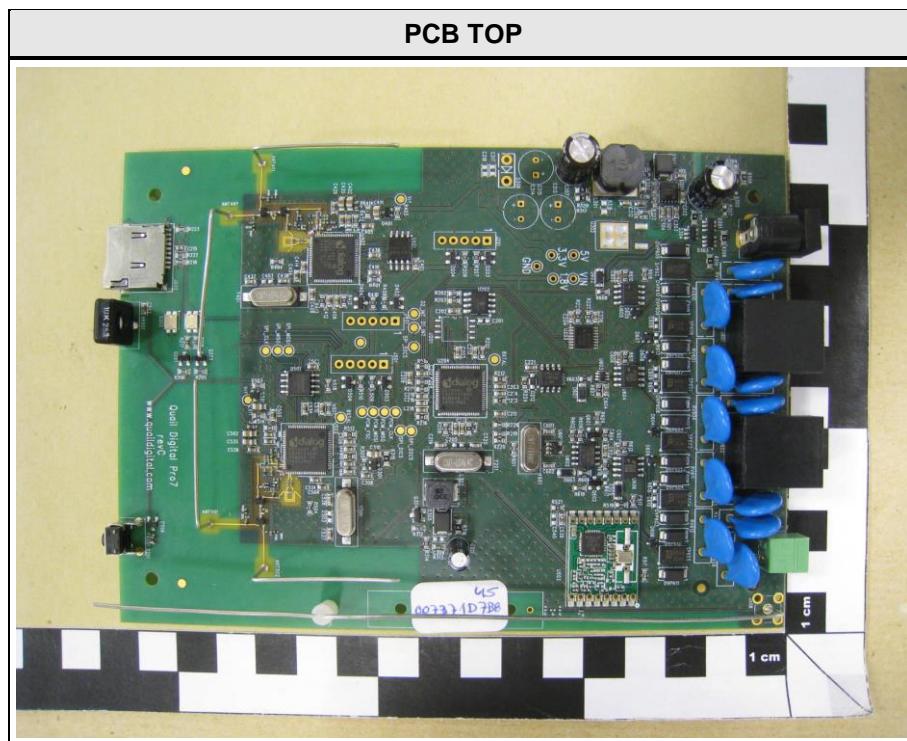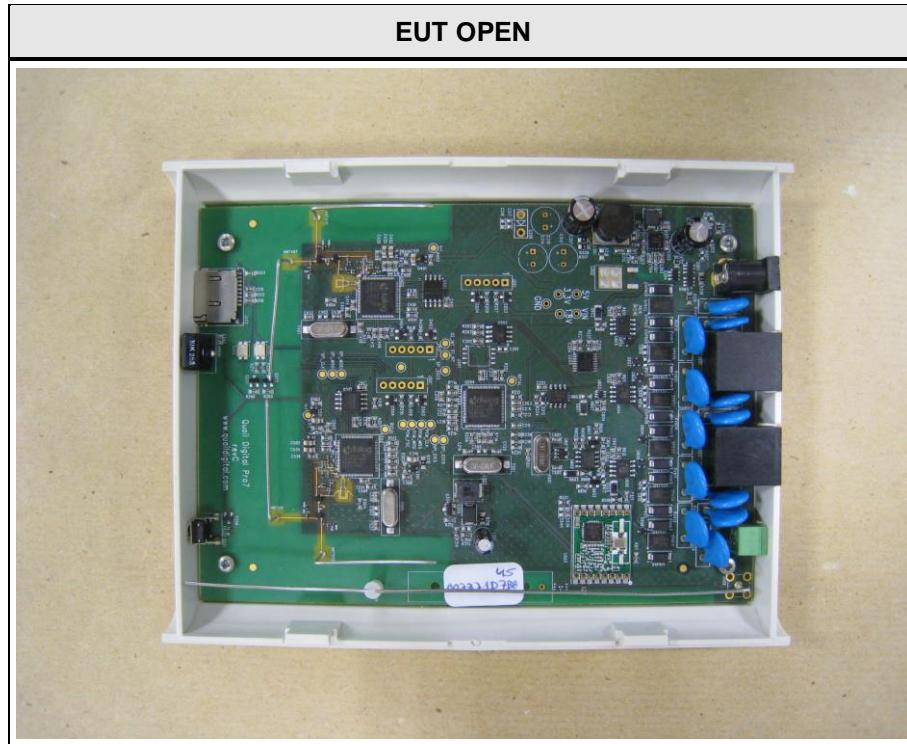

PCB BOTTOM

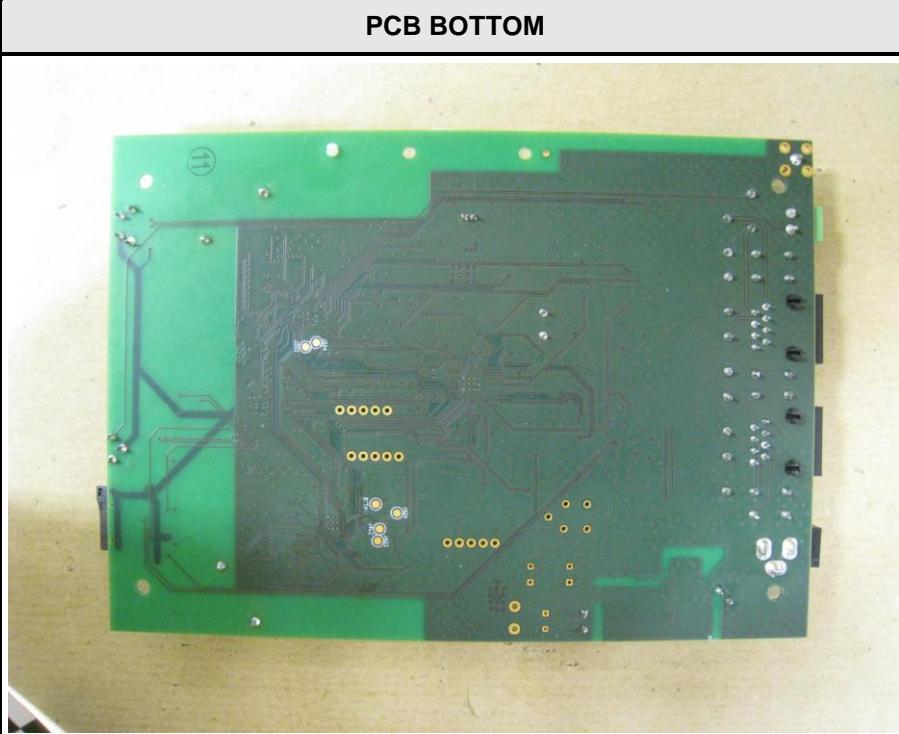

1.3 Photos – Test setup

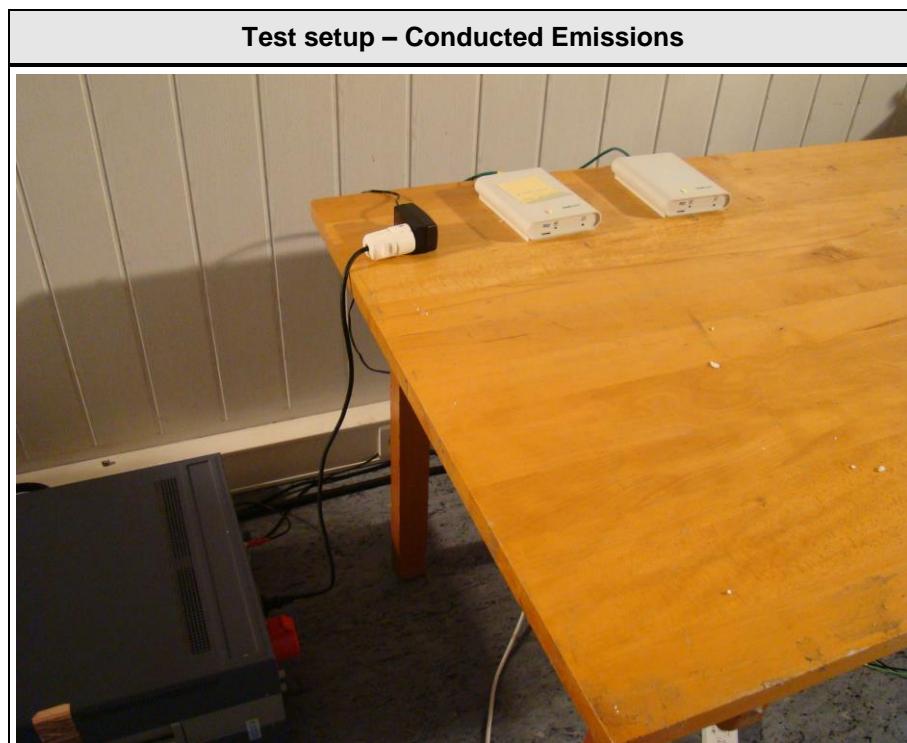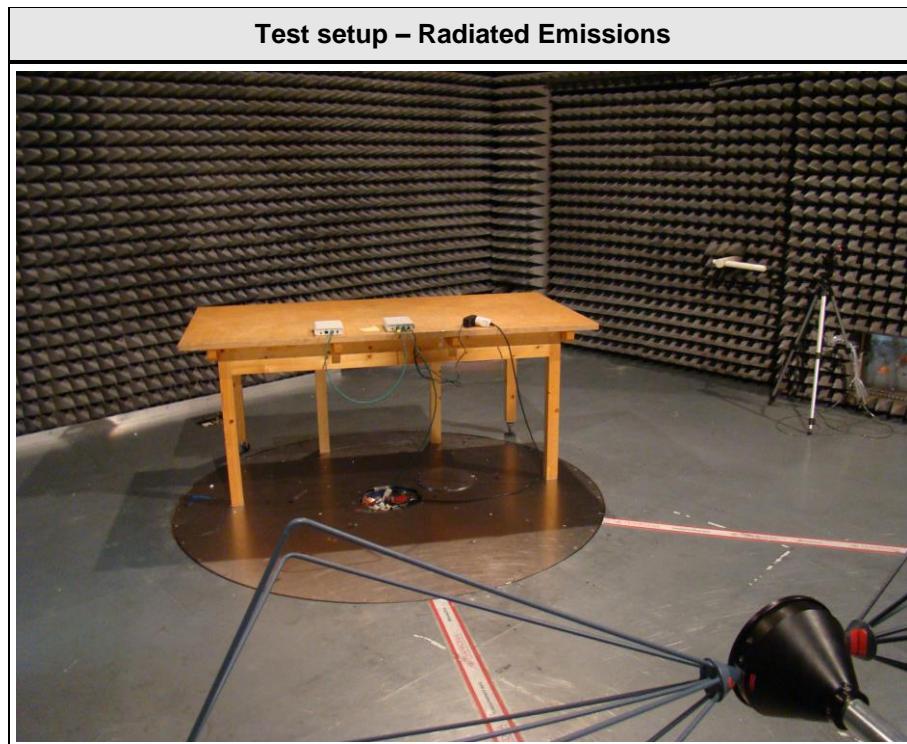

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
		None		

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Test Modes:

Mode #	Description	
TDMA	General conditions:	EUT powered by laboratory power supply. Active connection to companion device.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum
Receive	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone receive Modulation = GFSK
AC-Powerline	General conditions:	EUT connected to and powered via evaluation board. Active data connection between EUT and companion device. AC connection via evaluation board.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum

1.6 Test Equipment Used During Testing

Measurement Software					
Description	Manufacturer	Name		Version	
EMC Test Software	Dare Instruments	Radimation		2014.1.15	

Conducted					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02
Signal Generator	R&S	SMP 02	EF00165	2013-05	2015-05
Signal Generator	R&S	SMIQ 03B	EF00153	2012-09	2014-09
Signal generator	R&S	SMIQ 03B	EF00152	2012-08	2014-08
Signal Generator	R&S	SMIQ 03	EF00316	2013-06	2015-06
Signal Generator	R&S	SMT 03	EF00164	2013-04	2015-04
Step Attenuator	R&S	RSP	EF00129	calibration	calibration
Frequency Standard	EFRATOM Elektronik GmbH	MFS	EF00308	2013-05	2018-05
Power meter	R&S	NRVD	EF00176	2013-09	2015-09
Diode Power Sensor	R&S	NRV-Z1	EF00314	2013-06	2015-06

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Fully-anechoic chamber	Frankonia	AC 2	EF00199	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2013-10	2014-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{llll} \text{Reading} & + & \text{AF} & = \quad \text{Net Reading} \quad : \quad \text{Net reading - FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = \quad 47.5 \text{ dB}\mu\text{V/m} \quad : \quad 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15D, 15C, IC RSS-213, IC RSS-Gen				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
FCC 15.307	Coordination with fixed microwave service	declaration	N/A	
FCC 15.309(b)	Cross reference to subpart B	declaration	N/A	
FCC 15.315 FCC 15.207 IC RSS-213 6.3 IC RSS-213 4.2 IC RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	
FCC 15.317 FCC 15.203 IC RSS-213 4.1(e)	Antenna requirements	visual inspection	PASS	
FCC 15.319(b) IC RSS-213 6.1	Digital modulation	ANSI C63.17 6.1.4	PASS	
IC RSS-213 6.4 RSS-Gen 4.6.1	Occupied bandwidth	RSS-Gen 4.6.1	PASS	
FCC 15.323(a)	Emission Bandwidth	ANSI C63.17 6.1.3	PASS	
FCC 15.319(c) FCC 15.319(e) IC RSS-213 6.5 IC RSS-213 4.3.1	Peak transmit power	ANSI C63.17 6.1.2	PASS	
FCC 15.319(d) IC RSS-213 6.6 IC RSS-213 4.3.2	Power spectral density	ANSI C63.17 6.1.5	PASS	
FCC 15.323(f) IC RSS-213 6.2	Frequency stability	ANSI C63.17 6.2	PASS	
FCC 15.323(d) IC RSS-213 6.7.2	Transmitter in-band unwanted emissions	ANSI C63.17 6.1.6	PASS	
FCC 15.323(d) IC RSS-213 6.7.1	Transmitter out-of-band emissions	ANSI C63.17 6.1.6 ANSI C63.4	PASS	
IC RSS-213 6.8 IC RSS-Gen 4.10, 6	Receiver spurious emissions	ANSI C63.4	PASS	
FCC 15.319(f) IC RSS-213 4.3.4(a)	Automatic discontinuation of transmission	functional test	PASS	
FCC 15.319(i) RSS-102	Radiofrequency radiation exposure	dedicated report	PASS	
FCC 15.323(c)(2),(5),(9) IC RSS-213 4.3.4(b)(2),(5),(9)	Monitoring threshold + Monitoring threshold relaxation	ANSI C63.17 7.3.1	PASS	
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	LIC confirmation	ANSI C63.17 7.3.4 / 7.3.4	PASS	
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	LIC selection	ANSI C63.17 7.3.2 / 7.3.3	PASS	
FCC 15.323(c)(8) IC RSS-213 4.3.4(b)(8)	Monitoring antenna	ANSI C63.17 4	PASS	
FCC 15.323(c)(1) IC RSS-213 4.3.4(b)(1)	Monitoring time	ANSI C63.17 7.3.4	PASS	

Test Report No.: G0M-1405-3835-TFC15DFP-V01

FCC 15.323(c)(7) IC RSS-213 4.3.4(b)(7)	Monitoring bandwidth	ANSI C63.17 7.4	PASS	
FCC 15.323(c)(7) IC RSS-213 4.3.4(b)(7)	Monitoring reaction time	ANSI C63.17 7.5	PASS	
FCC 15.323(c)(4) IC RSS-213 4.3.4(b)(4)	System Acknowledgement	ANSI C63.17 8.1 / 8.2	PASS	
FCC 15.323(c)(6) IC RSS-213 4.3.4(b)(6)	Random waiting	ANSI C63.17 8.1.3	PASS	
FCC 15.323(c)(3) IC RSS-213 4.3.4(b)(3)	Maximum transmit period	ANSI C63.17 8.2.2	N/A	
FCC 15.323(c)(5) IC RSS-213 4.3.4(b)(5)	Maximum spectrum occupancy	declaration	PASS	
FCC 15.323(c)(10) IC RSS-213 4.3.4(b)(10)	Duplex system LBT	ANSI C63.17 8.3	N/A	Portable part only
FCC 15.323(c)(11) IC RSS-213 4.3.4(b)(11)	Co-located device LBT	ANSI C63.17 8.4	N/A	Portable part only
FCC 15.323(c)(12) IC RSS-213 4.3.4(b)(12)	Fair access	declaration	PASS	
FCC 15.323(e)(1),(4),(5) IC RSS-213 4.3.4(c)(1),(4),(5)	Frame period and Jitter	ANSI C63.17 6.2.3	PASS	
FCC 15.323(e)(2),(3) IC RSS-213 4.3.4(c)(2),(3)	Frame and TDMA repetition stability	ANSI C63.17 6.2.2	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Coordination with fixed microwave service

Coordination with fixed microwave service acc. to FCC 47 CFR 15D	
EUT requirement rule parts and clause	Reference
	FCC 15.307
Test according to measurement reference	Reference Method
	Customer declaration
Requirements	
<p>UTAM, Inc. is designated to coordinate and manage the transition of the 1910–1930 MHz band from the Private Operational-Fixed Microwave Service (OFS) operating under part 101 of this chapter to unlicensed PCS operations.</p> <p>Each application for certification of equipment operating under the provisions of this subpart must be accompanied by an affidavit from UTAM, Inc. certifying that the applicant is a participating member of UTAM, Inc. In the event a grantee fails to fulfill the obligations attendant to participation in UTAM, Inc., the Commission may invoke administrative sanctions as necessary to preclude continued marketing and installation of devices covered by the grant of certification, including but not limited to revoking certification.</p>	
Result	
The applicant will provide the affidavit from UTAM Inc. later in the course of certification by TCB or FCB.	

3.2 Test Conditions and Results – Cross reference to subpart B

Cross reference to subpart B acc. to FCC 47 CFR 15D		Verdict: N/A
EUT requirement rule parts and clause	Reference	
	FCC 15.309(b)	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
The requirements of subpart D apply only to the radio transmitter contained in the PCS device. Other aspects of the operation of a PCS device may be subject to requirements contained elsewhere in this chapter. In particular, a PCS device that includes digital circuitry not directly associated with the radio transmitter also is subject to the requirements for unintentional radiators in subpart B.		
Result		
The test results related to subpart B are given in a dedicated test report		

3.3 Test Conditions and Results – AC power line conducted emissions


Conducted emissions acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause		Reference		
FCC 15.315 / FCC 15.207 / IC RSS-213 6.3, 4.2				
Test according referenced standards		Reference Method		
ANSI C63.4				
Fully configured sample scanned over the following frequency range		Frequency range		
0.15 MHz to 30 MHz				
Points of Application		Application Interface		
AC Mains		LISN		
EUT test mode		AC-Powerline		
Limits and results				
Frequency [MHz]	Quasi-Peak [dB μ V]	Result	Average [dB μ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

Conducted Emissions
EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1405-3835

Manufacturer: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 24°C, Unom: 120 V AC (AC/DC adaptor)
 LISN: ESH2-Z5 N
 Mode: active DECT link
 Test Date: 2014-07-02
 Note:

Index 31

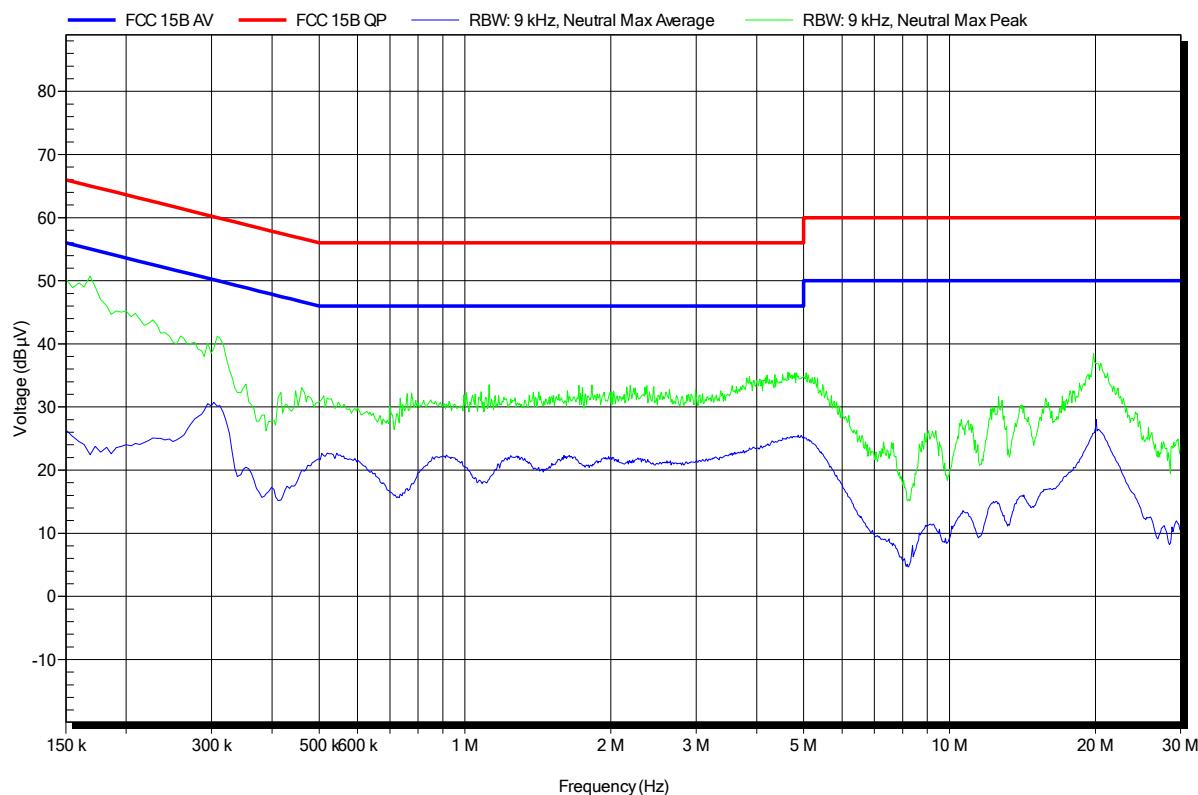


Conducted Emissions
EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1405-3835

Manufacturer: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 24°C, Unom: 120 V AC (AC/DC adaptor)
 LISN: ESH2-Z5 L
 Mode: active DECT link
 Test Date: 2014-07-02
 Note:

Index 32

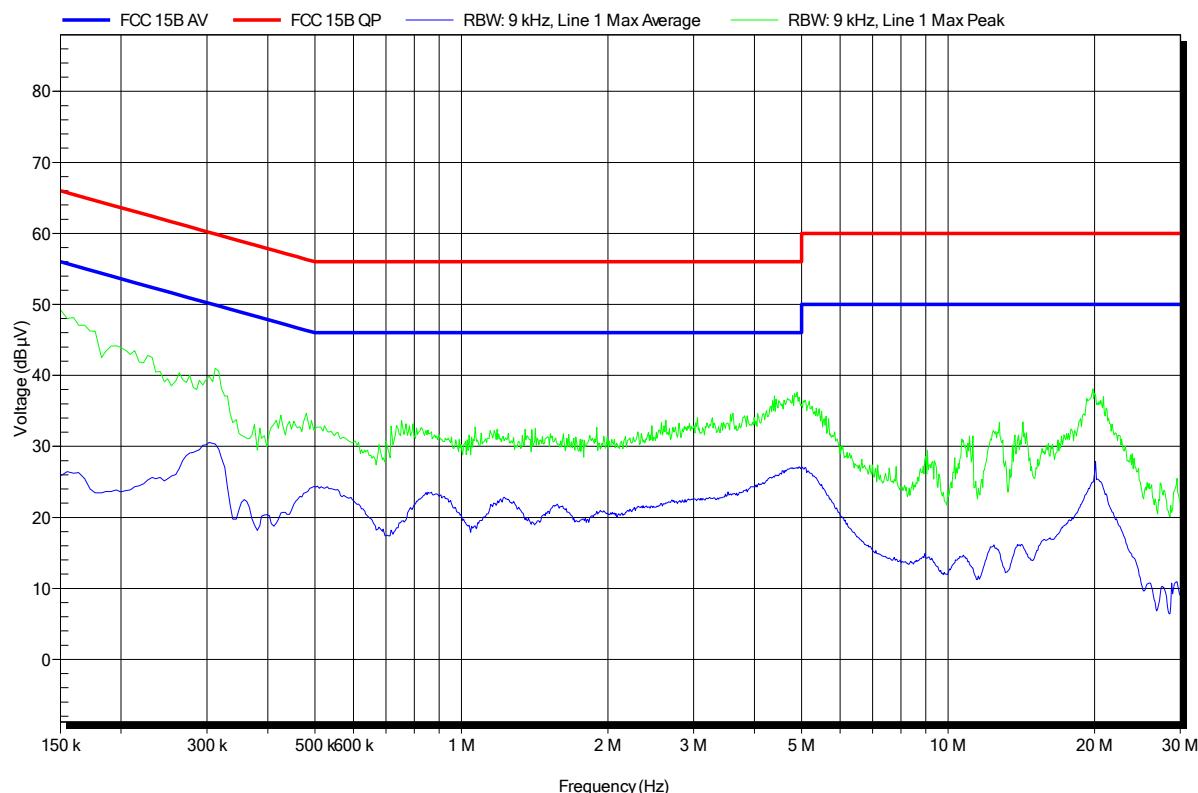


3.4 Test Conditions and Results – Antenna requirement

Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
FCC 15.317 / FCC 15.203 / IC RSS-213 4.1(e)			
Test according to measurement reference		Reference Method	
visual inspection & declaration			
Requirements			
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>When an antenna conducted measurement is used to determine the RF output power of the device, the effective gain of the antenna intended for the device must be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 3 dBi (3 dB above isotropic gain) shall be added to the measured RF output power before using the power limits</p>			
Results			
Antenna No.	Type	Antenna gain [dBi]	Antenna gain in excess of 3dBi
1	internal	2	0
2	internal	2	0

3.5 Test Conditions and Results – Digital modulation

Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(b) / IC RSS-213 6.1	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
All transmissions must use only digital modulation techniques.		
Results		
The test sample is an isochronous digital modulated device that operates in 1920-1930 MHz band. This device bases on DECT technology described in European Standards EN 300 175-2 and EN 300 175-3, now operating in frequency channels mentioned above.		
The operating modes are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation.		
For further details see operational description provided by manufacturer.		


3.6 Test Conditions and Results – Occupied Bandwidth

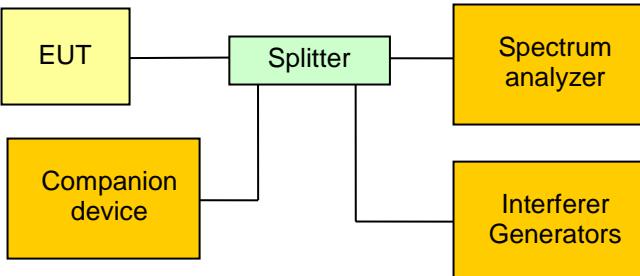Occupied Bandwidth acc. to IC RSS-213		Verdict: PASS		
Test according to measurement reference	Reference Method			
	IC RSS-213 4.3.2, 6.4 / IC RSS-Gen 4.6.1			
Tested frequencies	$F_{\text{LOW}} / F_{\text{MID}} / F_{\text{HIGH}}$			
EUT test mode	TDMA			
Limits				
0.05MHz \leq Occupied Bandwidth $<$ 2.5MHz				
Test setup				
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] </pre>				
Test procedure				
<ol style="list-style-type: none"> 1. EUT is restricted to test channel with the interferers 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of span 4. Occupied Bandwidth (99%) measurement with spectrum analyzer built in measurement function 				
Test results				
Channel	Center frequency [MHz]	Lower edge [MHz]	Upper edge [MHz]	Occupied Bandwidth [MHz]
F_{LOW}	1921.536	1920.9137	1922.1621	1.2484
F_{MID}	1924.992	1924.3734	1925.6106	1.2372
F_{HIGH}	1928.448	1927.8219	1929.0703	1.2484
Comments:				

Occupied Bandwidth - F_{LOW}
Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1405-3835


Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication use
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, UPCS, 1921.536 MHz, modulated
 Test Date: 2014-07-02
 Verdict: NONE (INFORMATION ONLY)
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
 Note 2: conducted measurement

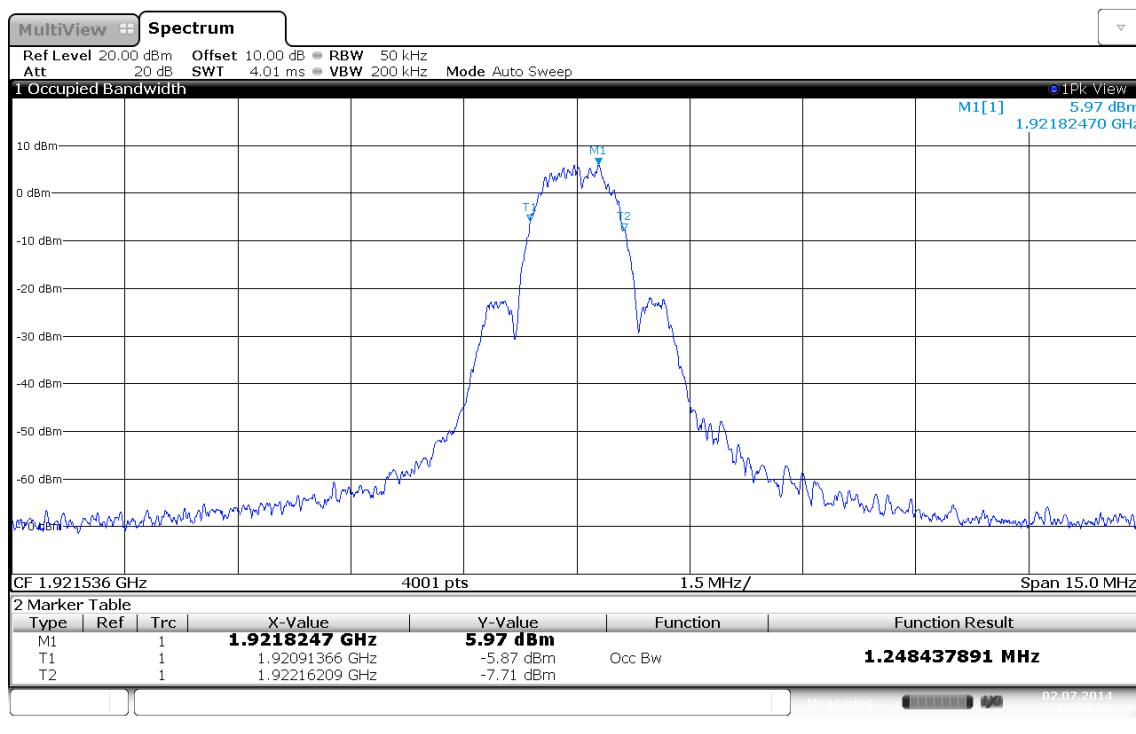

Occupied Bandwidth – F_{MID}
Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication use
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, UPCS, 1924.992 MHz, modulated
 Test Date: 2014-07-02
 Verdict: NONE (INFORMATION ONLY)
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
 Note 2: conducted measurement

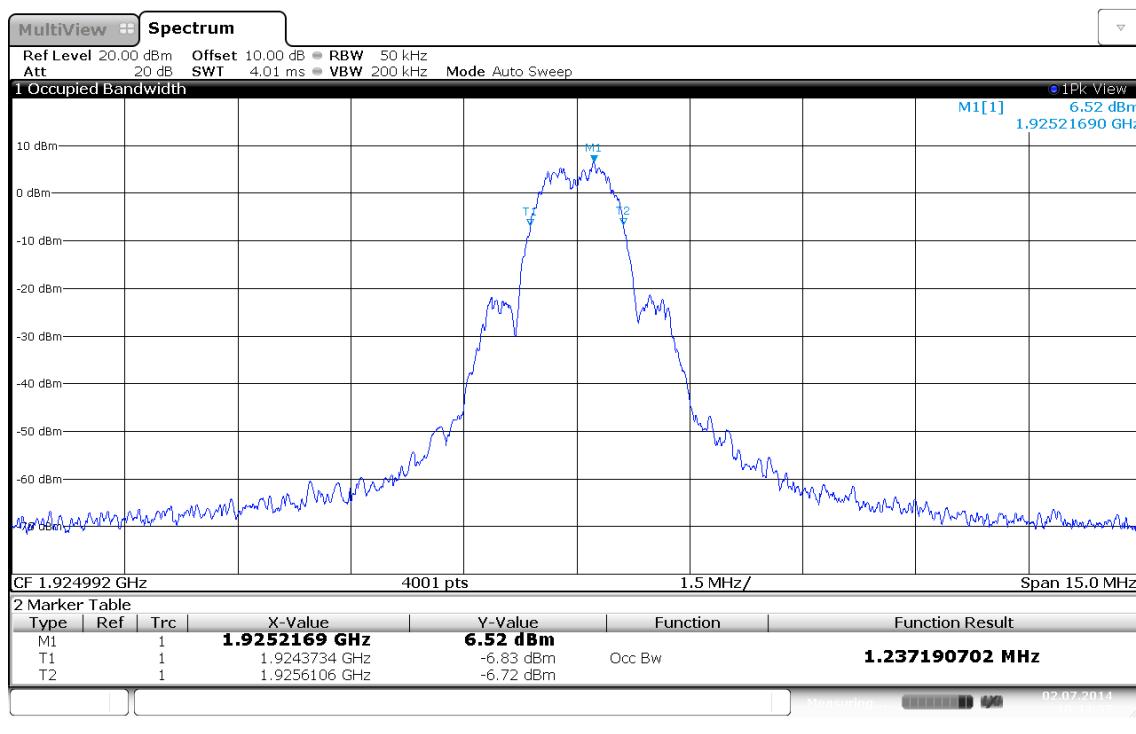


Test Report No.: G0M-1405-3835-TFC15DFP-V01

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – F_{HIGH}
Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1405-3835


Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication use
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom / Vnom
 Mode: Tx, UPCS, 1928.448 MHz, modulated
 Test Date: 2014-07-02
 Verdict: NONE (INFORMATION ONLY)
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used
 Note 2: conducted measurement

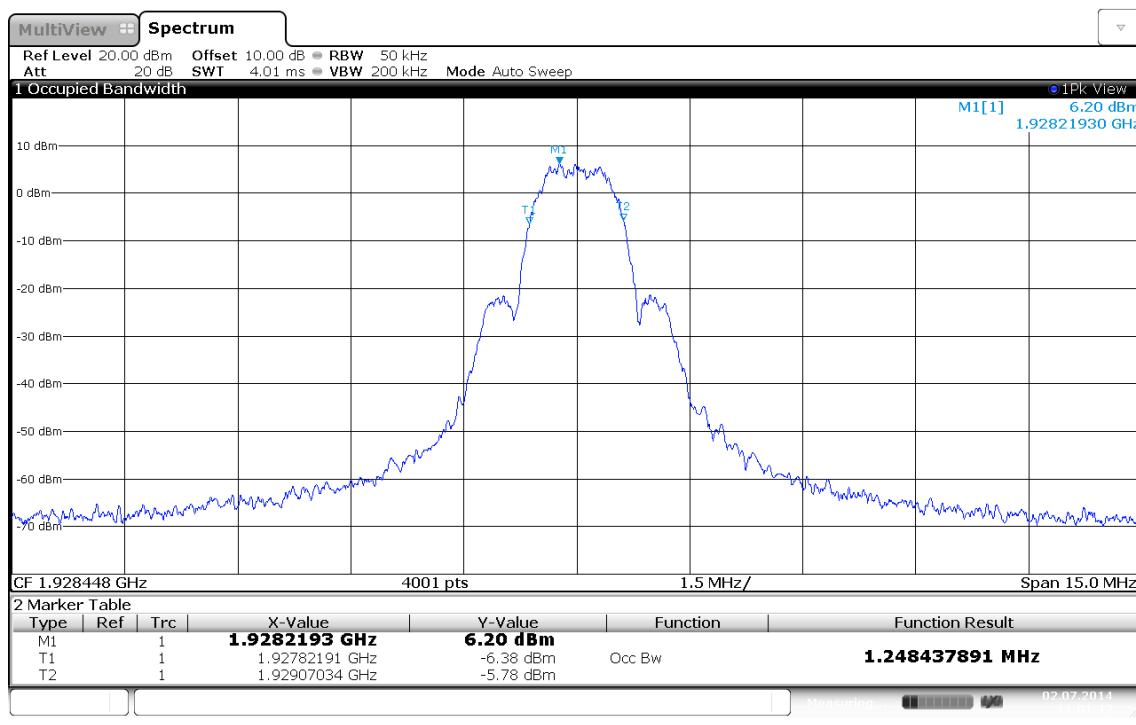

Test Report No.: G0M-1405-3835-TFC15DFP-V01

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.7 Test Conditions and Results – Emission Bandwidth

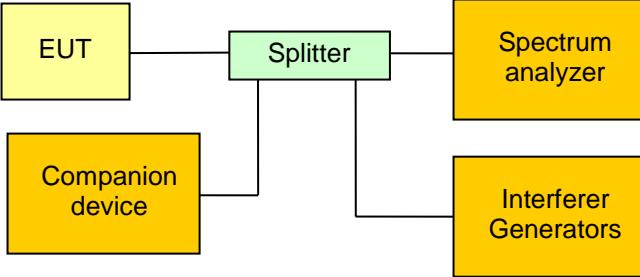
Emission Bandwidth acc. to FCC 47 CFR 15D		Verdict: PASS			
EUT requirement rule parts and clause		Reference			
		FCC 15.323(a)			
Test according to measurement reference		Reference Method			
		ANSI C63.17 6.1.3			
Tested frequencies		$F_{\text{LOW}} / F_{\text{HIGH}}$			
EUT test mode		TDMA			
Limits					
0.05MHz ≤ Emission Bandwidth < 2.5MHz					
Test setup					
					
Test procedure					
<ol style="list-style-type: none"> 1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of emission bandwidth and detector is set to peak with max hold 4. The emission bandwidth is determined by the two -26dB points left and right of the maximum emission level 5. (The emission bandwidth is determined by the two -12dB points left and right of the maximum emission level) 6. (The emission bandwidth is determined by the two -6dB points left and right of the maximum emission level) 					
Test result					
Channel	Center frequency [MHz]	Mode	Lower edge [MHz]	Upper edge [MHz]	Bandwidth [MHz]
F_{LOW}	1921.536	-26 dB	1920.826	1922.252	1.426
F_{HIGH}	1928.448	-26 dB	1927.740	1929.154	1.414
F_{LOW}	1921.536	-12 dB	1920.938	1922.108	1.170
F_{HIGH}	1928.448	-12 dB	1927.854	1929.022	1.168
F_{LOW}	1921.536	-6 dB	1921.166	1921.874	0.708
F_{HIGH}	1928.448	-6 dB	1928.082	1928.780	0.698
Comments:					

Emission Bandwidth – F_{LOW}
FCC Part 15.303 Emission bandwidth
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.43MHz
 Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

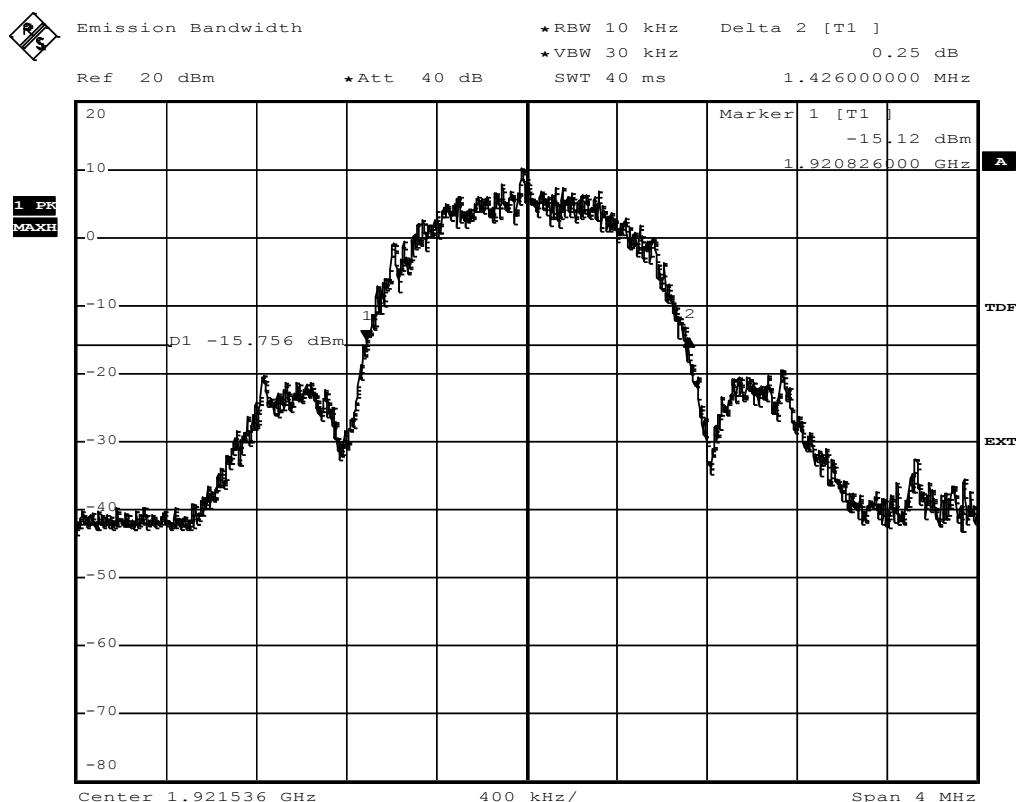


Comment: Ansi C63.17-2006 6.1.3
 Date: 25.JUN.2014 15:21:32

Emission Bandwidth – F_{HIGH}
FCC Part 15.303 Emission bandwidth
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.41MHz
 Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

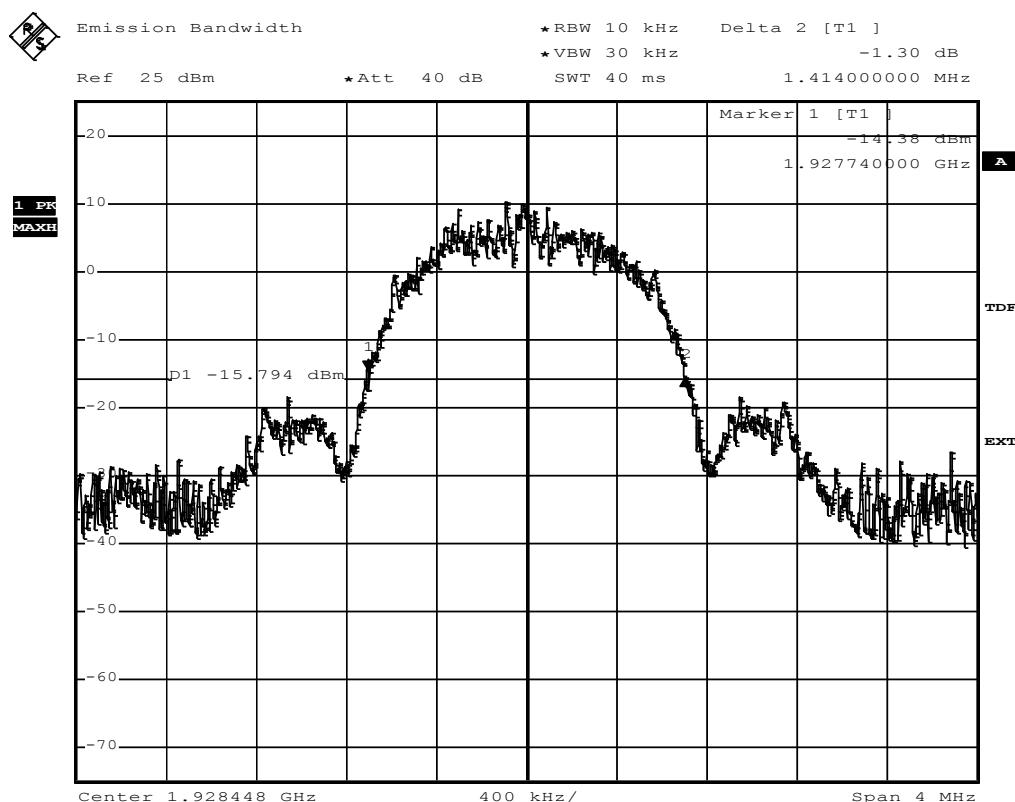


Comment: Ansi C63.17-2006 6.1.3
 Date: 25.JUN.2014 15:30:03

Test Report No.: G0M-1405-3835-TFC15DFP-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.8 Test Conditions and Results – Peak transmit power

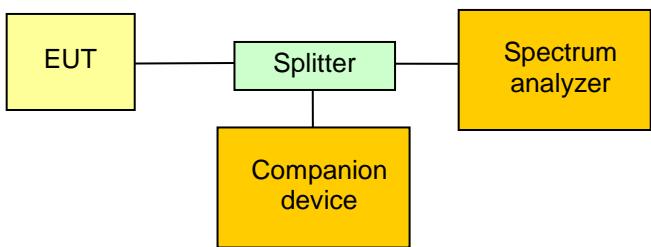
Peak transmit power acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(c),(e) / IC RSS-213 4.3.1, 6.5	
Test according to measurement reference	Reference Method	
	ANSI C63.17 6.1.2	
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$	
EUT test mode	TDMA	
Antenna excess gain	0 dB	
Limits		
Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.		
$P_{EUT}[\text{dBm}] \leq P_{\text{limit}} \text{ where } P_{\text{limit}} = \begin{cases} P_{\text{max}} - (G_A - g), & \text{when } G_A > 3 \text{ dBi} \\ P_{\text{max}}, & G_A \leq 3 \text{ dBi} \end{cases}$ $P_{\text{max}}[\text{dBm}] = 5 \log(\text{Emission}/\text{Occupied Bandwidth [Hz]}) - 10 \text{ dBm}$		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- Companion[Companion device] Splitter --- Spectrum[Spectrum analyzer] </pre>		
Test procedure		
<ol style="list-style-type: none"> 1. EUT set to test mode 2. The RBW is set to be larger than the emission bandwidth and $\text{VBW} \geq \text{RBW}$ 3. Transmission burst is measured in zero span and peak detector 4. The maximum level in the burst is recorded as peak transmit power 		

Test results - FCC						
Channel	Frequency [MHz]	Peak Power [dbm]	Emission Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F _{LOW}	1921.536	18.00	1426000	0	20.77	-2.77
F _{HIGH}	1928.448	18.16	1414000	0	20.75	-2.59
Test results - IC						
Channel	Frequency [MHz]	Peak Power [dBm]	Occupied Bandwidth [Hz]	Excess gain [dB]	Limit [dBm]	Margin [dB]
F _{LOW}	1921.536	18.00	1248400	0	20.48	-2.48
F _{HIGH}	1928.448	18.16	1248400	0	20.48	-2.32

Comments:

Peak Power – F_{LOW}
FCC Part 15.319 Peak Transmit Power limit
Testprocedure ANSI 63.17
UPCS


EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Peak transmit power
 Supply Vnom
 Measured Bandwidth 1.426MHz
 Max. Permitted Power 20,77 dBm
 Measured Power 18 dBm
 Test result Verdict = PASS

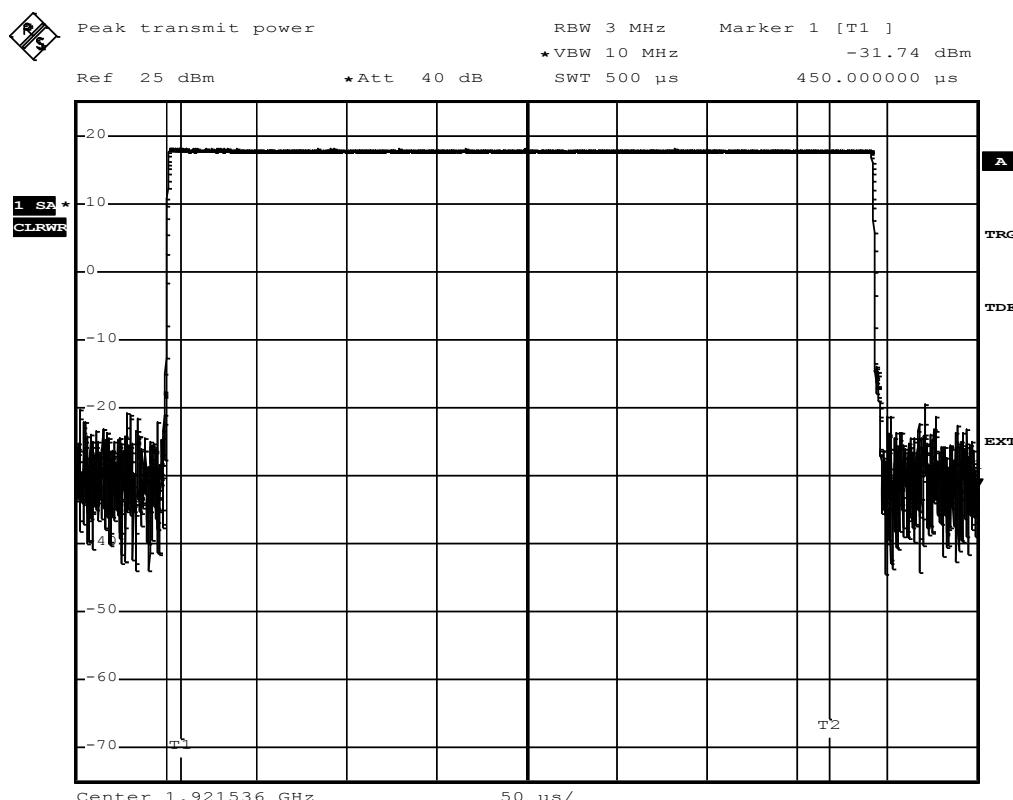

Comment: Ansi C63.17-2006 6.1.2
 Date: 25.JUN.2014 15:26:30


Peak Power – F_{HIGH}
FCC Part 15.319 Peak Transmit Power limit
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Peak transmit power
 Supply Vnom
 Measured Bandwidth 1.428MHz
 Max. Permitted Power 20,77 dBm
 Measured Power 18,16 dBm
 Test result Verdict = PASS

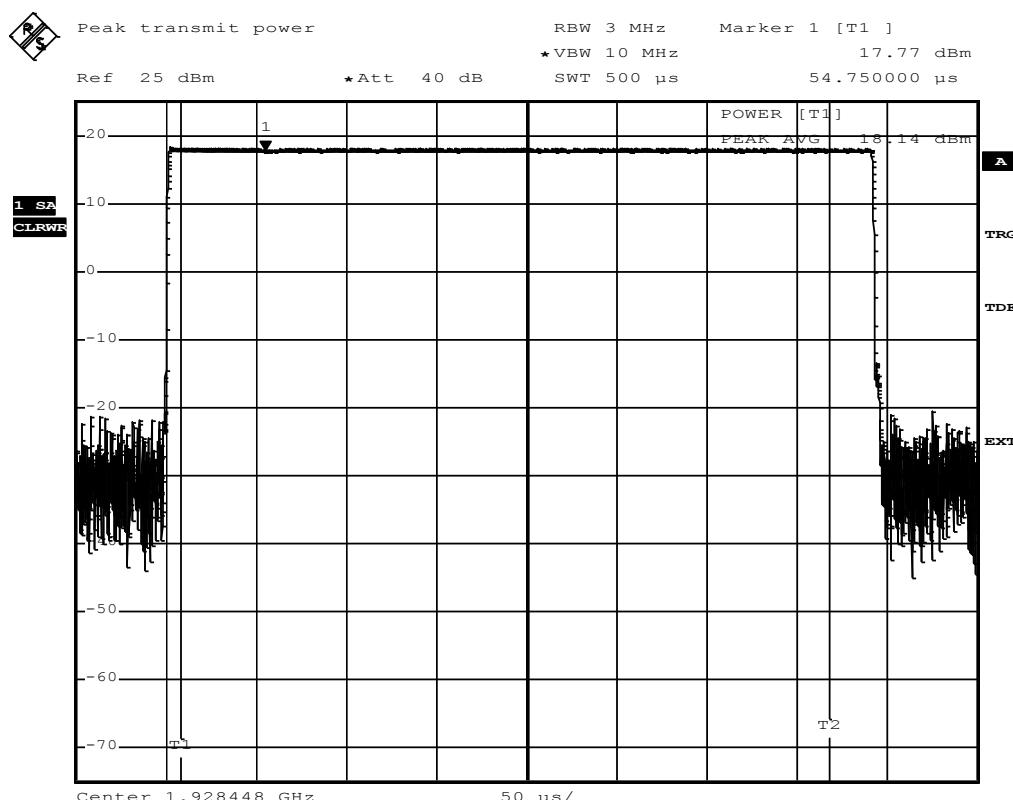

Comment: Ansi C63.17-2006 6.1.2
 Date: 25.JUN.2014 15:45:08

3.9 Test Conditions and Results – Power spectral density

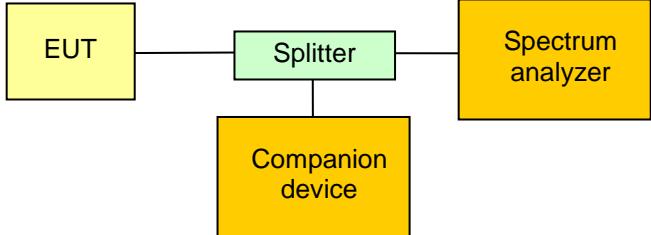
Power spectral density acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause		Reference		
		FCC 15.319(d) / IC RSS-213 4.3.2, 6.5		
Test according to measurement reference		Reference Method		
		ANSI C63.17 6.1.2		
Tested frequencies		$F_{\text{LOW}} / F_{\text{HIGH}}$		
EUT test mode		TDMA		
Limits				
$\leq 3 \text{ mW (4.77 dBm) / 3 kHz}$				
Test setup				
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- Companion[Companion device] Splitter --- Spectrum[Spectrum analyzer] </pre>				
Test procedure				
<ol style="list-style-type: none"> 1. EUT set to test mode 2. The RBW is set to 3 kHz and VBW $\geq 3 \times$ RBW 3. The center frequency is set to the maximum of the emission envelope and the span is set to zero 4. With sample detector and a minimum of 100 sweeps the -20 dB points below the first peak are determined and the data points between the two -20 dB points are summed and normalized to get the average pulse power in a 3 kHz bandwidth 				
Test results				
Channel	Frequency [MHz]	Peak Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
F_{LOW}	1921.536	-3.27	4.77	-8.04
F_{HIGH}	1928.448	-1.32	4.77	-6.09
Comments:				

Power Spectral Density – F_{LOW}
FCC Part 15.319 Power spectral density
Testprocedure ANSI 63.17
UPCS

EUT	DECT Base Station for Intercommunication use
Model	Q-P7BS
Applicant	Quail Digital, Ltd
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1921,514000 MHz
Total pulse energy in mW	0,000185 mW
Wideband pulse duration in ms	0,392425 ms
PSD in mW	0,4710 mW
PSD in dBm	-3,2695 dBm

Pass criteria: PSD is less than 3mW

Verdict = PASS

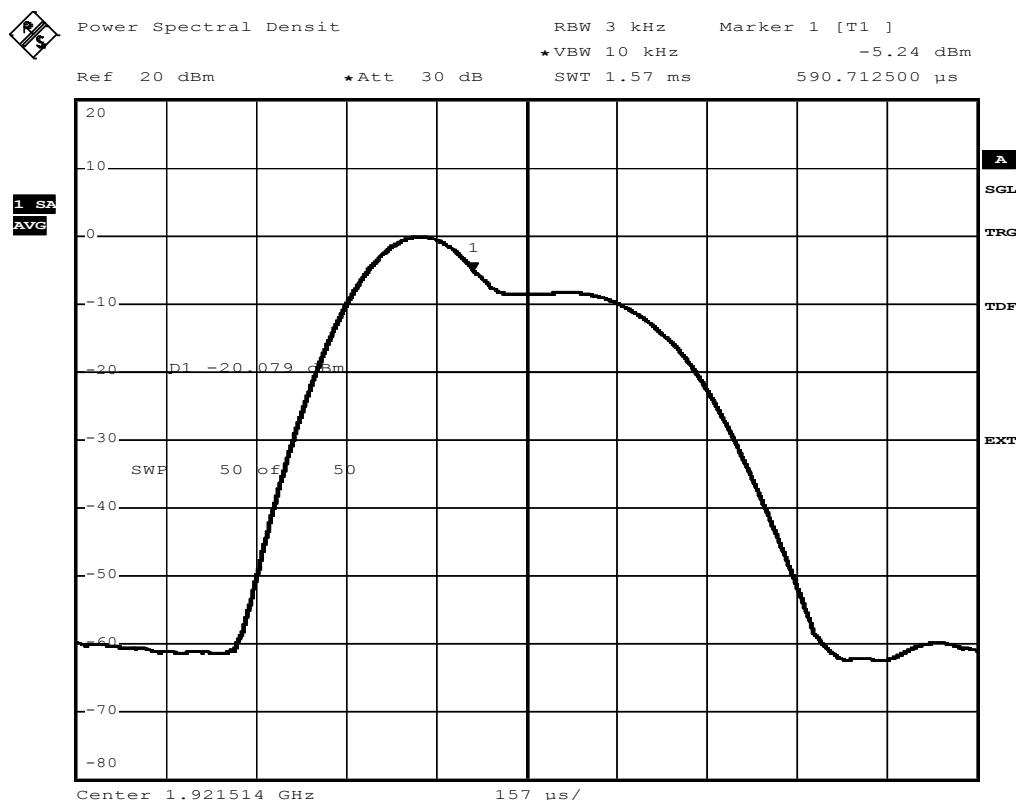


Comment: Ansi C63.17-2006 6.1.5
 Date: 25.JUN.2014 15:23:54

Power Spectral Density – F_{HIGH}
FCC Part 15.319 Power spectral density
Testprocedure ANSI 63.17
UPCS

EUT	DECT Base Station for Intercommunication use
Model	Q-P7BS
Applicant	Quail Digital, Ltd
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1928,430000 MHz
Total pulse energy in mW	0,000289 mW
Wideband pulse duration in ms	0,391875 ms
PSD in mW	0,7380 mW
PSD in dBm	-1,3193 dBm

Pass criteria: PSD is less than 3mW

Verdict = PASS

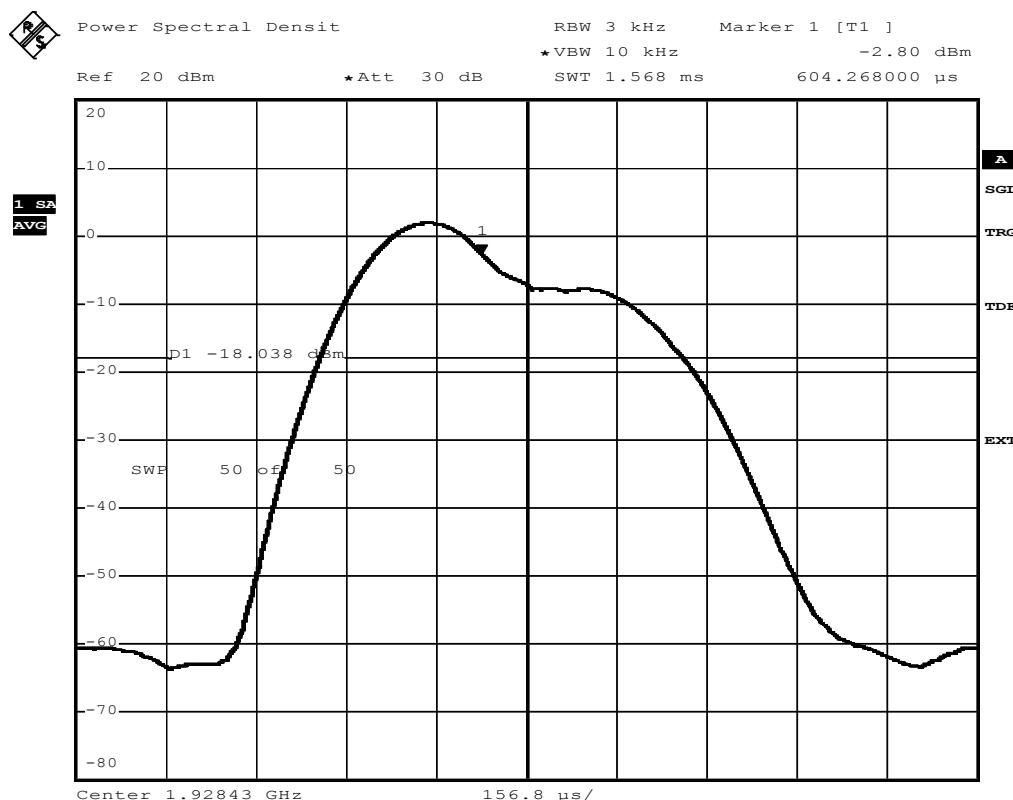


Comment: Ansi C63.17-2006 6.1.5
 Date: 25.JUN.2014 15:37:46

Test Report No.: G0M-1405-3835-TFC15DFP-V01


 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.10 Test Conditions and Results – Frequency stability

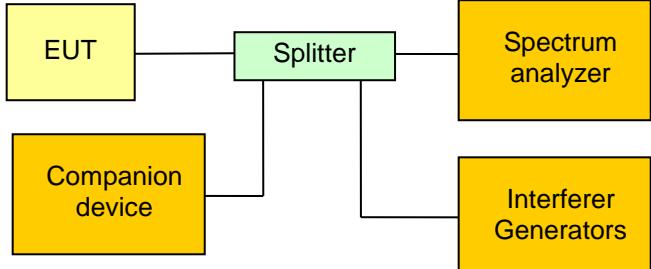Frequency stability acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause		Reference		
		FCC 15.323(f) / IC RSS-213 6.2		
Test according to measurement reference		Reference Method		
		ANSI C63.17 6.2		
Tested frequencies		F_{MID}		
EUT test mode		TDMA		
Limits				
± 10 ppm / hour				
Test setup				
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- IG[Interferer Generators] Splitter --- Companion[Companion device] Companion --- IG </pre>				
Test procedure				
<ol style="list-style-type: none"> 1. With interferer signals the EUT is forced to center channel and communication to companion device is established. 2. The demodulated carrier EUT signal is captured over time 3. The mean frequency is determined under all supply voltage and temperature conditions 				
Test results				
Voltage	Temperature	Maximum Frequency deviation [ppm]	Limit [ppm]	Margin [ppm]
48 VDC	25°C	0	N/A	N/A
45 VDC	25°C	0.85	± 10.0	-9.15
49 VDC	25°C	0.47	± 10.0	-9.53
48 VDC	0°C	-3.99	± 10.0	-6.01
48 VDC	40°C	1.46	± 10.0	-8.54
Comments:				


Carrier stability – Frequency stability – $T_{NOM} V_{NOM}$
FCC Part 15.323 Frequency Stability
Testprocedure ANSI 63.17

EUT	DECT Base Station for Intercommunication use
Model	Q-P7BS
Applicant	Quail Digital, Ltd
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	V_{nom}
Frequency of carrier	1924,987557 MHz
Measured mean	1924,987557 MHz
Stability (supply temp)	0,0 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,45 ppm fmin : 2,97 ppm
Result	Verdict = PASS

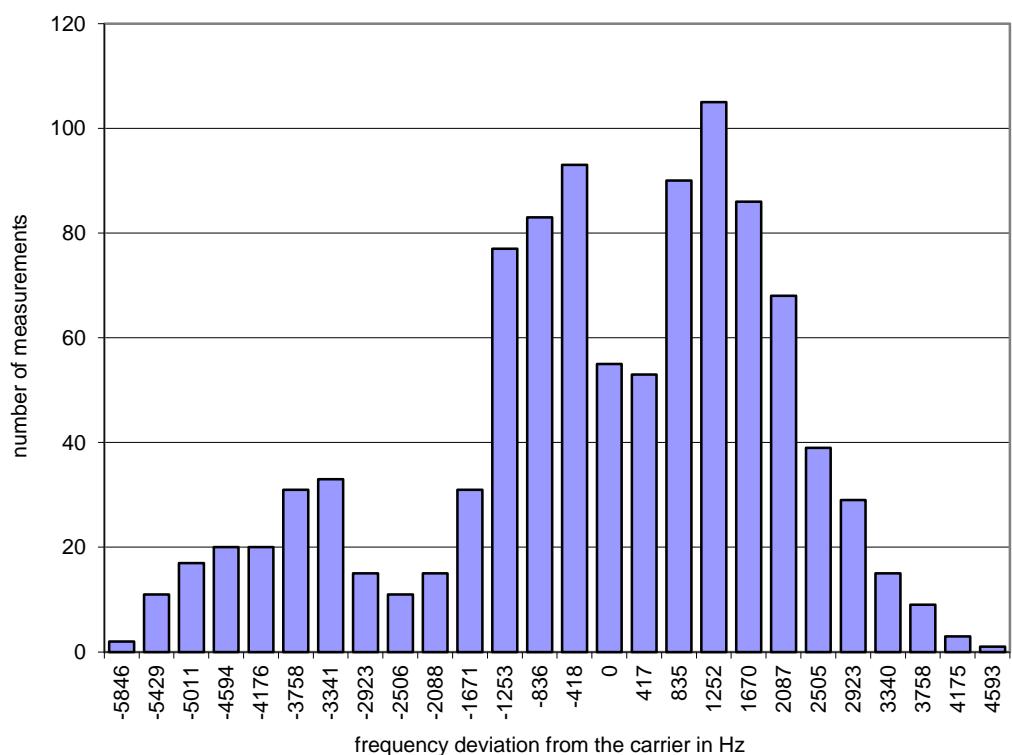Histogram


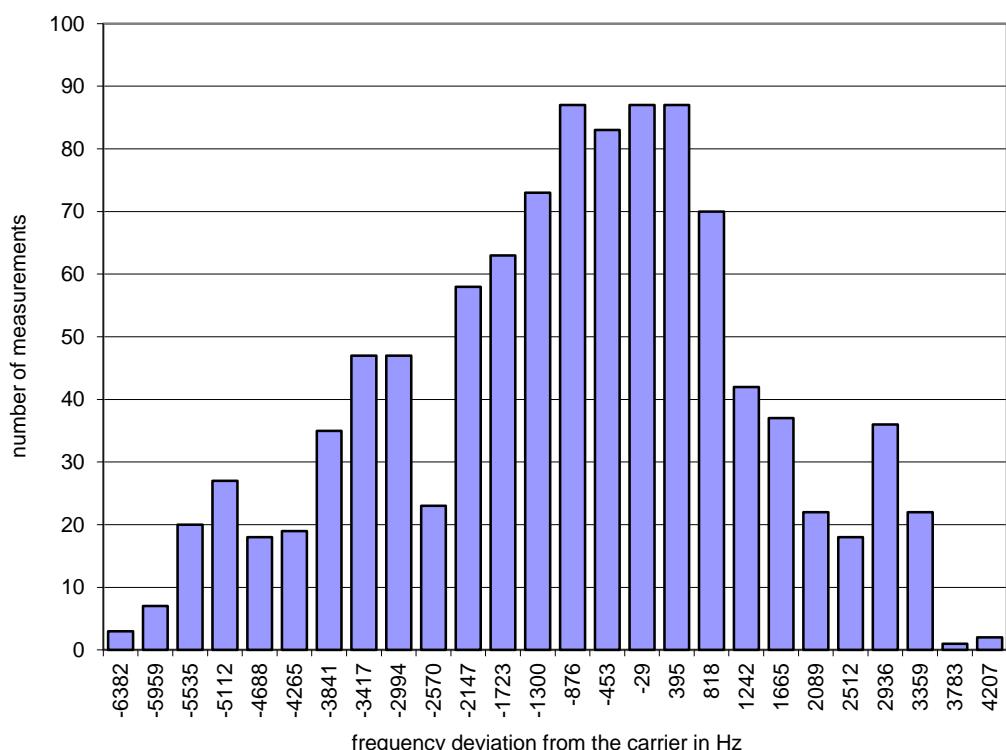
Carrier stability – Frequency stability – T_{NOM} V_{MIN}
FCC Part 15.323 Frequency Stability
Testprocedure ANSI 63.17

EUT	DECT Base Station for Intercommunication use
Model	Q-P7BS
Applicant	Quail Digital, Ltd
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	Vmin
Frequency of carrier	1924,987557 MHz
Measured mean	1924,985926 MHz
Stability (supply temp)	0,85 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,64 ppm fmin : 4,75 ppm
Result	Verdict = PASS

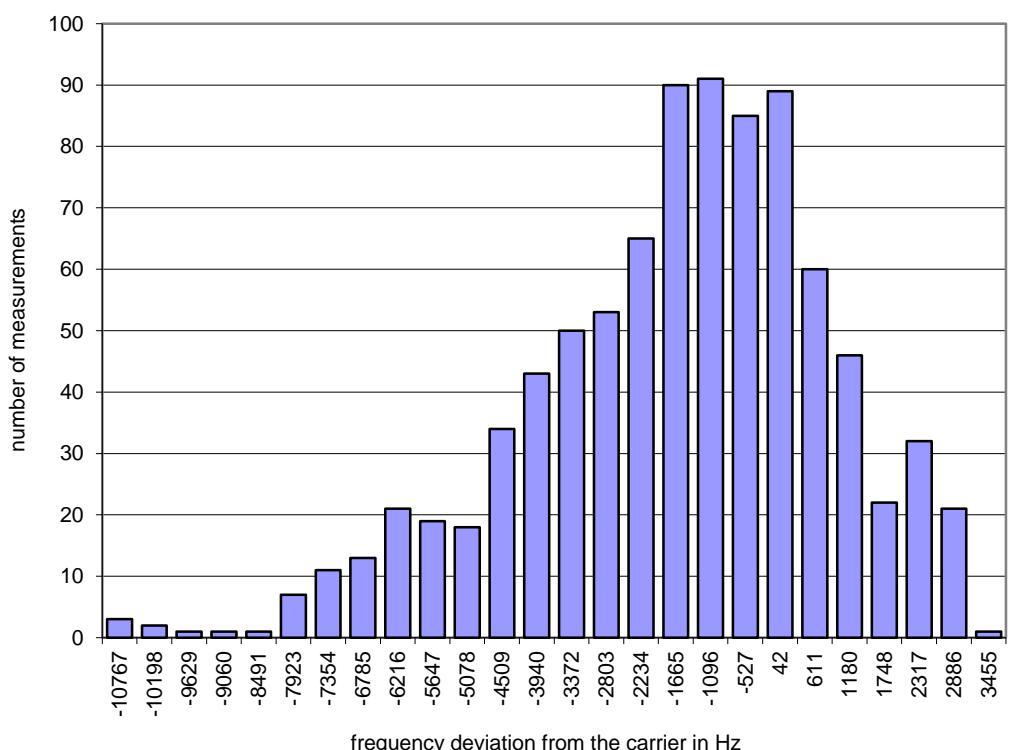Histogram


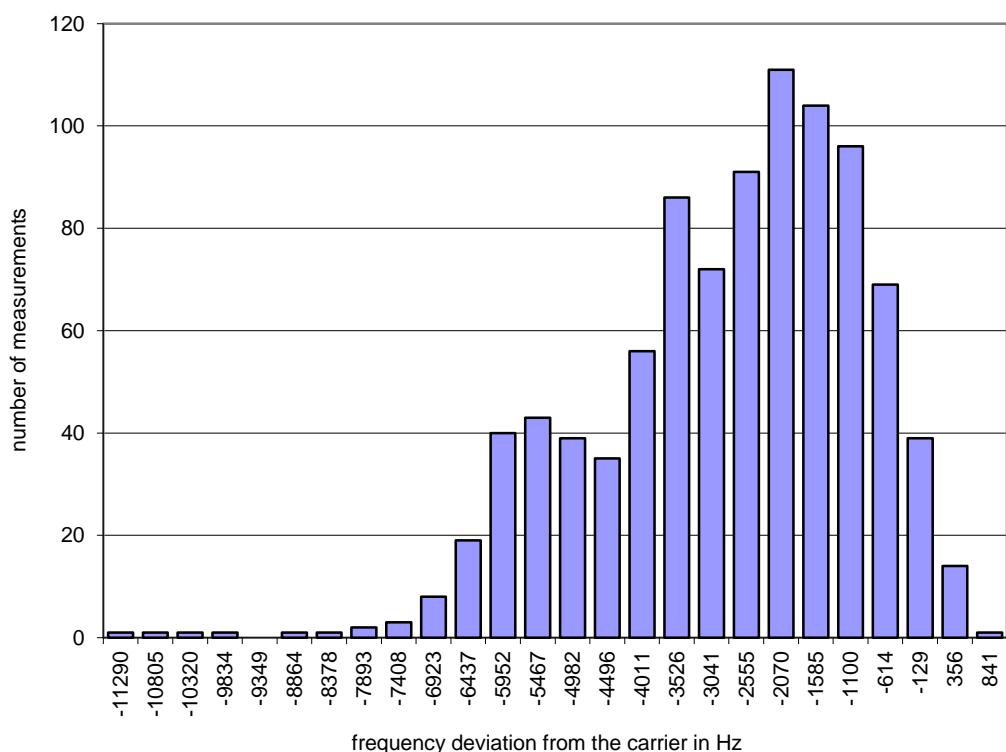
Carrier stability – Frequency stability – T_{NOM} V_{MAX}
FCC Part 15.323 Frequency Stability
Testprocedure ANSI 63.17

EUT	DECT Base Station for Intercommunication use
Model	Q-P7BS
Applicant	Quail Digital, Ltd
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	Vmax
Frequency of carrier	1924,987557 MHz
Measured mean	1924,986658 MHz
Stability (supply temp)	0,47 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,65 ppm fmin : 2,85 ppm
Result	Verdict = PASS

Histogram


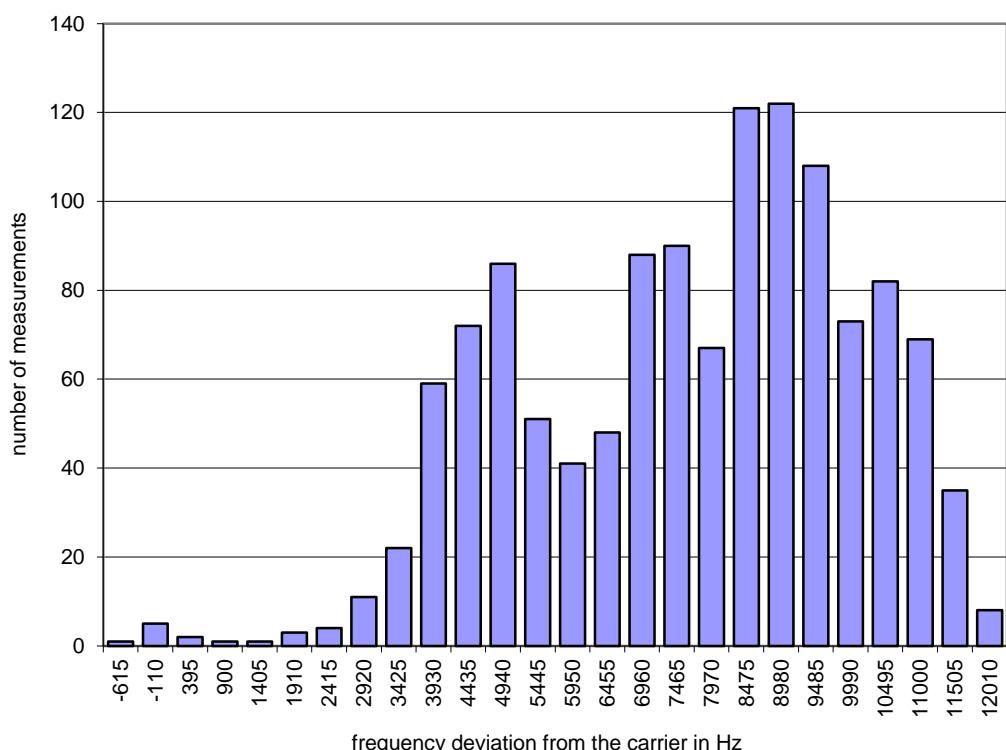
Carrier stability – Frequency stability – $T_{MAX} V_{NOM}$
FCC Part 15.323 Frequency Stability
Testprocedure ANSI 63.17

EUT	DECT Base Station for Intercommunication use
Model	Q-P7BS
Applicant	Quail Digital, Ltd
Temperature	40 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	V _{nom}
Frequency of carrier	1924,987557 MHz
Measured mean	1924,984750 MHz
Stability (supply temp)	1,46 ppm
Result	Verdict = PASS
Stability over time	f _{max} : 1,90 ppm f _{min} : 4,41 ppm
Result	Verdict = PASS


Histogram


Carrier stability – Frequency stability – T_{MIN} V_{NOM}
FCC Part 15.323 Frequency Stability
Testprocedure ANSI 63.17

EUT	DECT Base Station for Intercommunication use
Model	Q-P7BS
Applicant	Quail Digital, Ltd
Temperature	0 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	V_{NOM}
Frequency of carrier	1924,987557 MHz
Measured mean	1924,995232 MHz
Stability (supply temp)	-3,99 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,25 ppm fmin : 4,31 ppm
Result	Verdict = PASS

Histogram


3.11 Test Conditions and Results – Transmitter in-band unwanted emissions

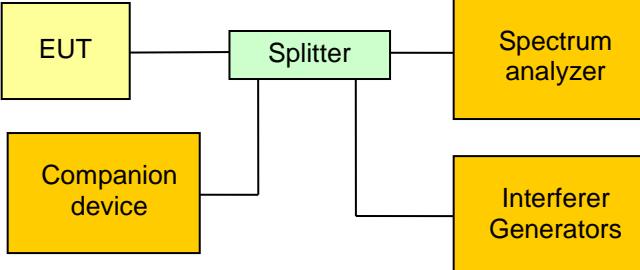
Transmitter in-band unwanted emissions acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
Test according referenced standards	Reference Method	
		FCC 15.323(d) / IC RSS-213 6.7.2
Test according to measurement reference	Reference Method	
		ANSI C63.17 6.1.6
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$	
Tested frequency range	1920 – 1930 MHz	
Limits		
Frequency range [MHz]	Detector	Limit [dBc]
1920 MHz to $(F_c - 3B)$	Peak	-60
$(F_c - 3B)$ to $(F_c - 2B)$	Peak	-50
$(F_c - 2B)$ to $(F_c - 1B)$	Peak	-30
$(F_c + 1B)$ to $(F_c + 2B)$	Peak	-30
$(F_c + 2B)$ to $(F_c + 3B)$	Peak	-50
$(F_c + 3B)$ to 1930 MHz	Peak	-60
B = emission / occupied bandwidth of selected channel F_c = Center frequency of selected channel		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Splitter Splitter --- Interferers[Interferer Generators] Interferers --- SA </pre>		
Test procedure		
<ol style="list-style-type: none"> With interferer signal the EUT is forced to the test channel and a communication session is established between the EUT and the companion device The RBW of the spectrum analyzer is set to 1% of the emission bandwidth and the VBW is set to 3 times the RBW With peak detector and max hold the emission spectrum is recorded over the corresponding frequency range 		

Test results		
Channel	Frequency [MHz]	Verdict
F_{LOW}	1921.536	PASS
F_{HIGH}	1928.448	PASS
Comments:		

Transmitter in-band unwanted emissions – F_{LOW}
FCC Part 15.323 In-band unwanted emission
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification In-band unwanted emission

1.428MHz

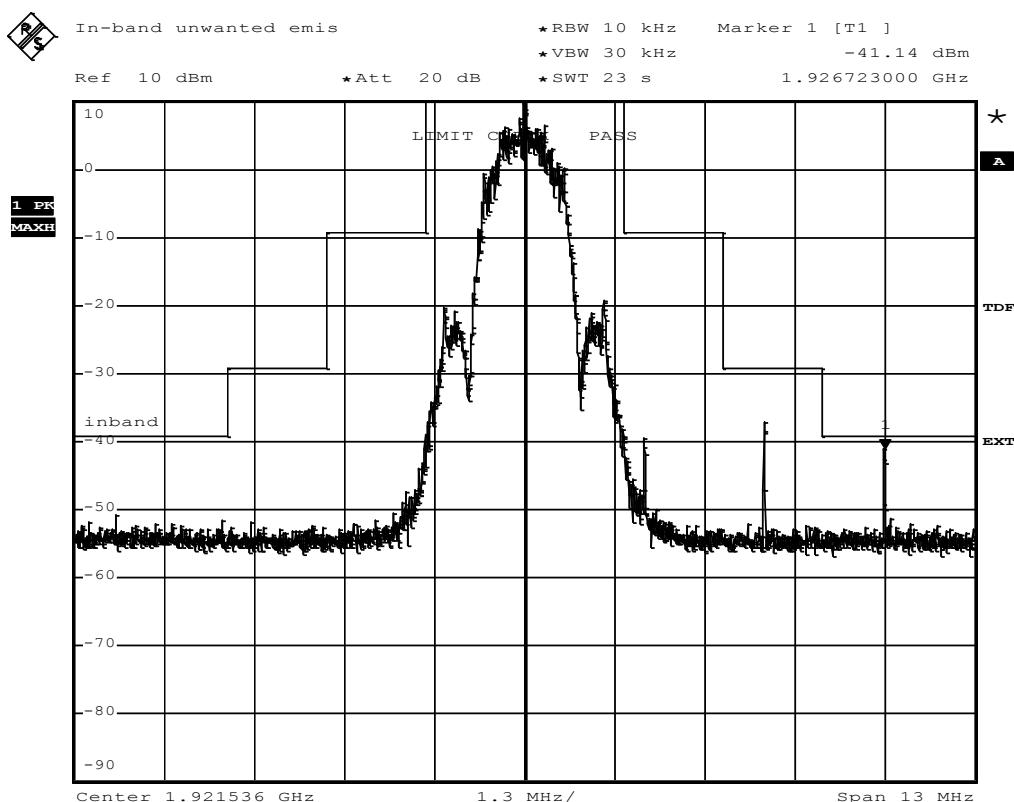

Comment: Ansi C63.17-2006 6.1.6.1
 Date: 25.JUN.2014 16:16:51


Test Report No.: G0M-1405-3835-TFC15DFP-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Transmitter in-band unwanted emissions – F_{HIGH}
FCC Part 15.323 In-band unwanted emission
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification In-band unwanted emission

1.428MHz

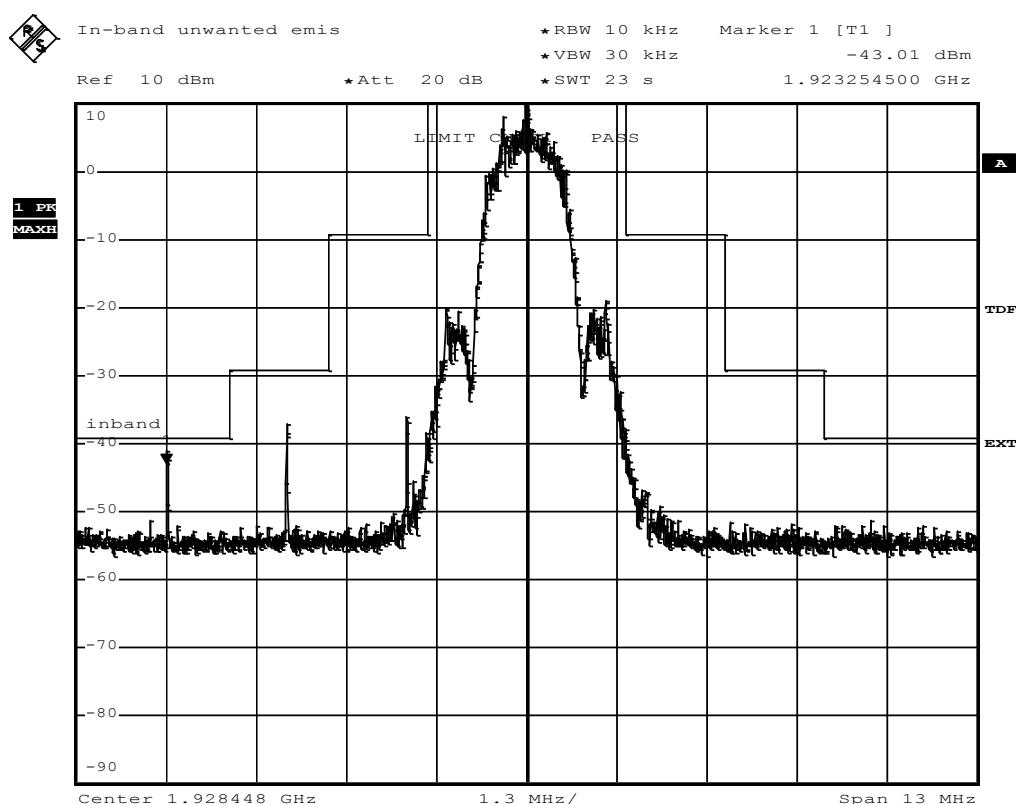


Comment: Ansi C63.17-2006 6.1.6.1
 Date: 25.JUN.2014 16:07:55

Test Report No.: G0M-1405-3835-TFC15DFP-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.12 Test Conditions and Results – Transmitter out-of-band emissions

Transmitter out-of-band emissions acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
Test according referenced standards	Reference Method	FCC 15.323(d) / IC RSS-213 6.7.1		
Test according to measurement reference	Reference Method	ANSI C63.17 6.1.6		
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$			
Tested frequency range	30 MHz – 10 th Harmonic			
Test option	Tested according to option a), b) and d) in C63.17 6.1.6.2			
Limits				
Frequency range [MHz]	Detector	Limit	Limit Distance [m]	
30 – 88	Quasi-Peak	100 $\mu\text{V}/\text{m}$ (40 dB $\mu\text{V}/\text{m}$)	3	
88 – 216	Quasi-Peak	150 $\mu\text{V}/\text{m}$ (43.5 dB $\mu\text{V}/\text{m}$)	3	
216 – 960	Quasi-Peak	200 $\mu\text{V}/\text{m}$ (46 dB $\mu\text{V}/\text{m}$)	3	
960 – 1000	Quasi-Peak	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$)	3	
1000 – 1917.5	Average	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$)	3	
1917.5 – 1918.75	Peak	-39.5 dBm *	N/A	
1918.75 – 1920	Peak	-29.5 dBm *	N/A	
1930 – 1931.25	Peak	-29.5 dBm *	N/A	
1931.25 – 1932.5	Peak	-39.5 dBm *	N/A	
1932.5 - 20000	Average	500 $\mu\text{V}/\text{m}$ (54 dB $\mu\text{V}/\text{m}$)	3	
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).				
When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.				
* Measurement is performed with conducted measurement setup				

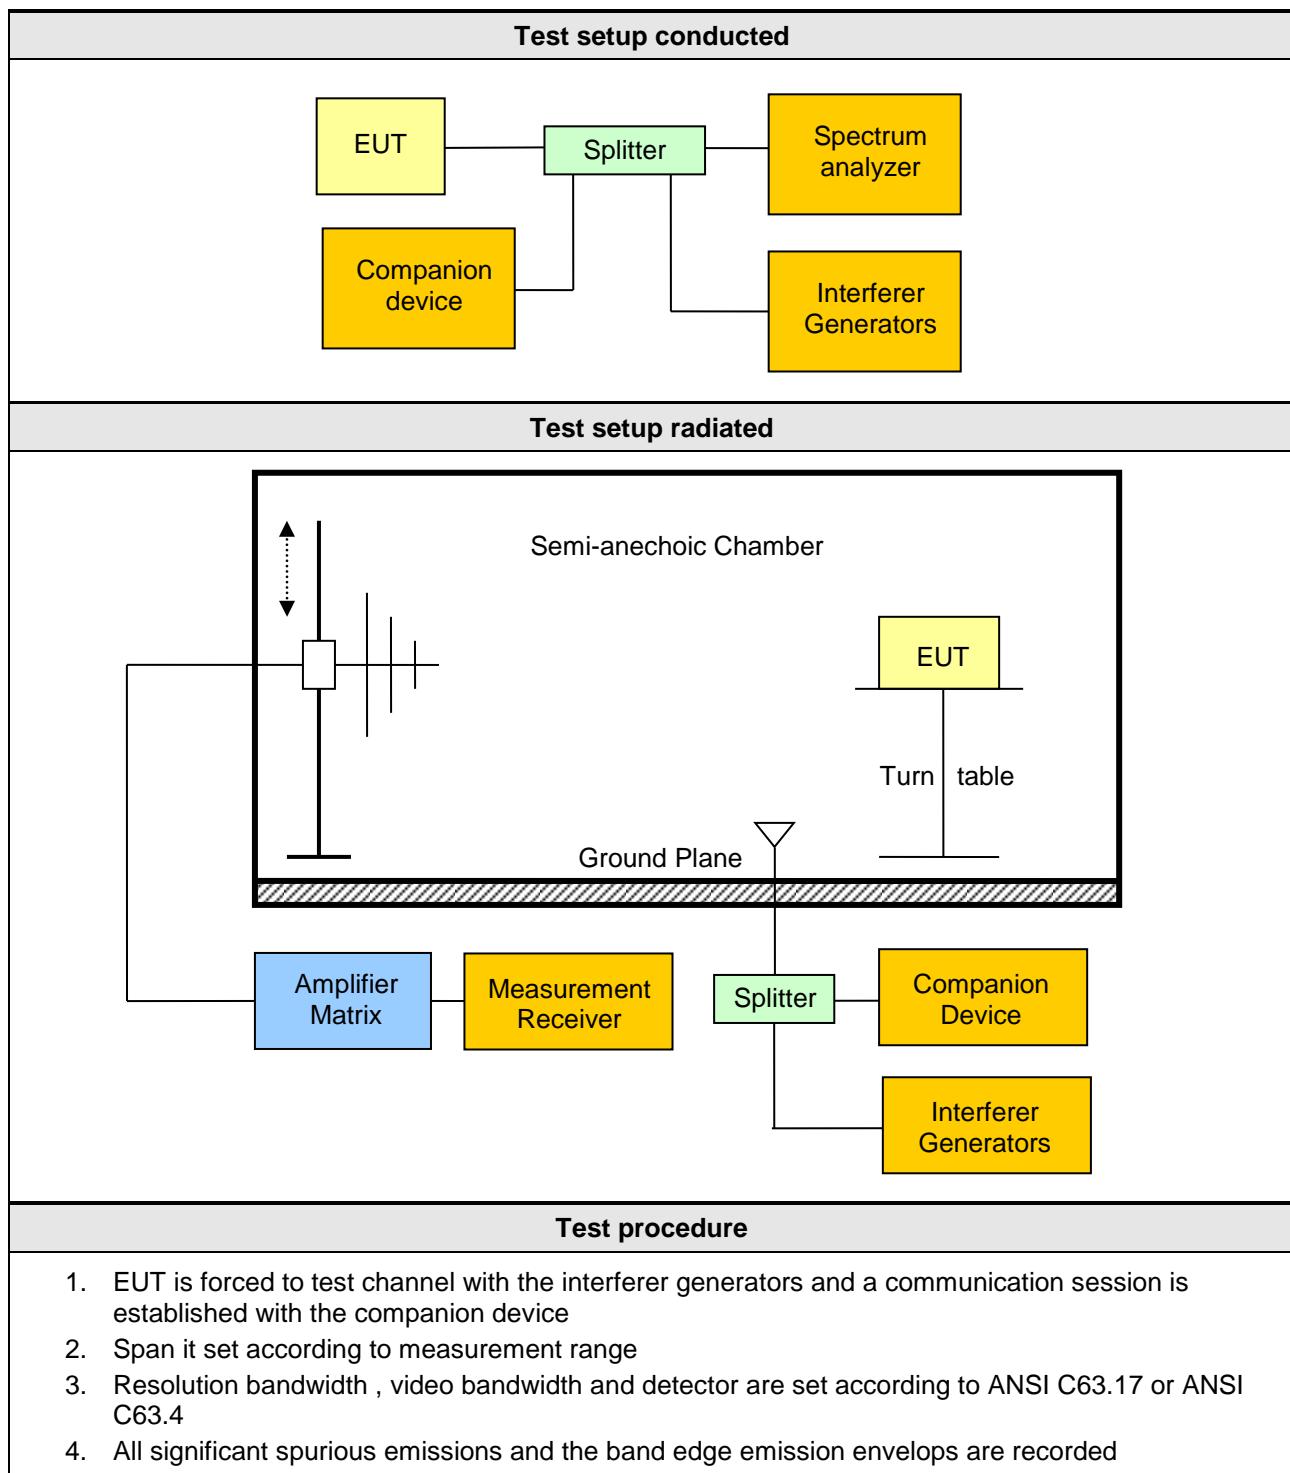


Test results									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [db μ V/m]	Det.	Pol.	Limit [db μ V/m]	Limit dist. [m]*	Margin [dB]
0	1928.448	Module1+2	152.4	38.62	pk	hor	43.5	3	-04.88
0	1928.448	Module1+2	235.2	42.22	pk	hor	46	3	-03.78
0	1928.448	Module1+2	235.2	43.06	pk	ver	46	3	-02.94
0	1928.448	Module1+2	280	42.55	pk	hor	46	3	-03.45
0	1928.448	Module1+2	1932.5	52.11	pk	hor	73.9	3	-21.79
0	1928.448	Module1+2	1932.5	56.98	pk	ver	73.9	3	-16.92
0	1928.448	Module1+2	1932.5	36.02	avg	ver	53.9	3	-17.88
0	1928.448	Module1+2	3856.3	70.85	pk	hor	73.9	3	-03.05
0	1928.448	Module1+2	3856.3	47.51	avg	hor	53.9	3	-06.39
0	1928.448	Module1+2	3856.8	66.27	pk	ver	73.9	3	-07.63
0	1928.448	Module1+2	3856.8	46.20	avg	ver	53.9	3	-07.78
0	1928.448	Module1+2	5785	57.31	pk	ver	73.9	3	-16.59
0	1928.448	Module1+2	5785	37.93	avg	ver	53.9	3	-15.97
0	1928.448	Module1+2	5786	57.67	pk	hor	73.9	3	-16.23
0	1928.448	Module1+2	5786	45.18	avg	hor	53.9	3	-08.72
0	1928.448	Module1+2	7715	51.17	pk	ver	73.9	3	-22.73
0	1928.448	Module1+2	7715	34.30	avg	ver	53.9	3	-19.60
0	1928.448	Module1+2	9641	55.89	pk	ver	73.9	1	-18.01
0	1928.448	Module1+2	9641	51.44	avg	ver	53.9	1	-02.46
0	1928.448	Module1+2	9644	59.60	pk	hor	73.9	1	-14.30
0	1928.448	Module1+2	9644	41.88	avg	hor	53.9	1	-12.02
0	1928.448	Module1+2	1914.2	62.72	pk	ver	73.9	3	-11.18
0	1928.448	Module1+2	1914.2	45.75	avg	ver	53.9	3	-08.15
0	1928.448	Module1+2	1917.4	52.51	pk	hor	73.9	3	-21.39
0	1928.448	Module1+2	3842.7	66.05	pk	ver	53.9	3	-07.85
0	1928.448	Module1+2	3842.7	44.66	avg	ver	53.9	3	-09.32
4	1921.536	Module1+2	3842.8	67.93	pk	hor	73.9	3	-05.97
4	1921.536	Module1+2	3842.8	45.89	avg	hor	53.9	3	-08.01
4	1921.536	Module1+2	5760	50.97	pk	hor	73.9	3	-22.93
4	1921.536	Module1+2	5766	50.61	pk	ver	73.9	3	-23.29
4	1921.536	Module1+2	7685	51.85	pk	ver	73.9	3	-22.05
4	1921.536	Module1+2	9606	56.36	pk	hor	73.9	1	-17.54
4	1921.536	Module1+2	9606	68.51	pk	ver	73.9	1	-05.39
4	1921.536	Module1+2	9606	44.41	avg	ver	53.9	1	-09.49

Comments: * Physical distance between EUT and measurement antenna.

Transmitter out-of-band emissions – Band edge F_{LOW}
FCC Part 15.323 Out-of-band emission
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Out-of-band emission

measurement on the lowest carrier
 Carrier=1921.536MHz

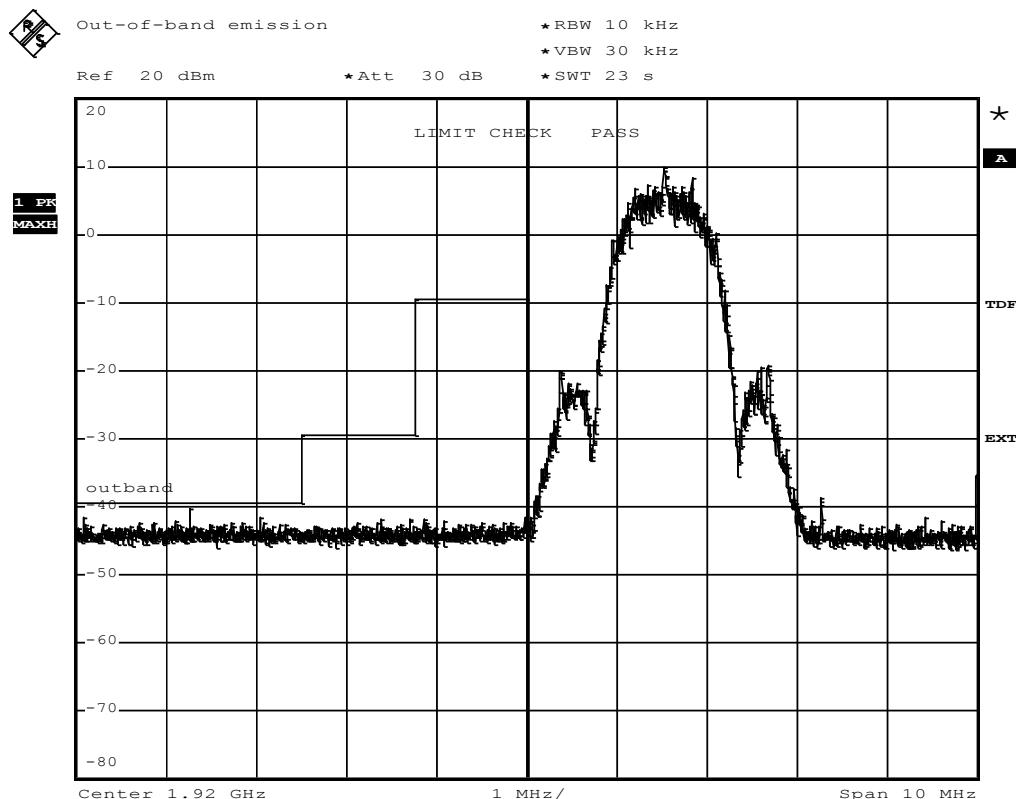


Comment: Ansi C63.17-2006 6.1.6.2
 Date: 25.JUN.2014 16:19:06

Transmitter out-of-band emissions – Band edge F_{HIGH}
FCC Part 15.323 Out-of-band emission
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Out-of-band emission

measurement on the highest carrier
 Carrier=1928.448MHz

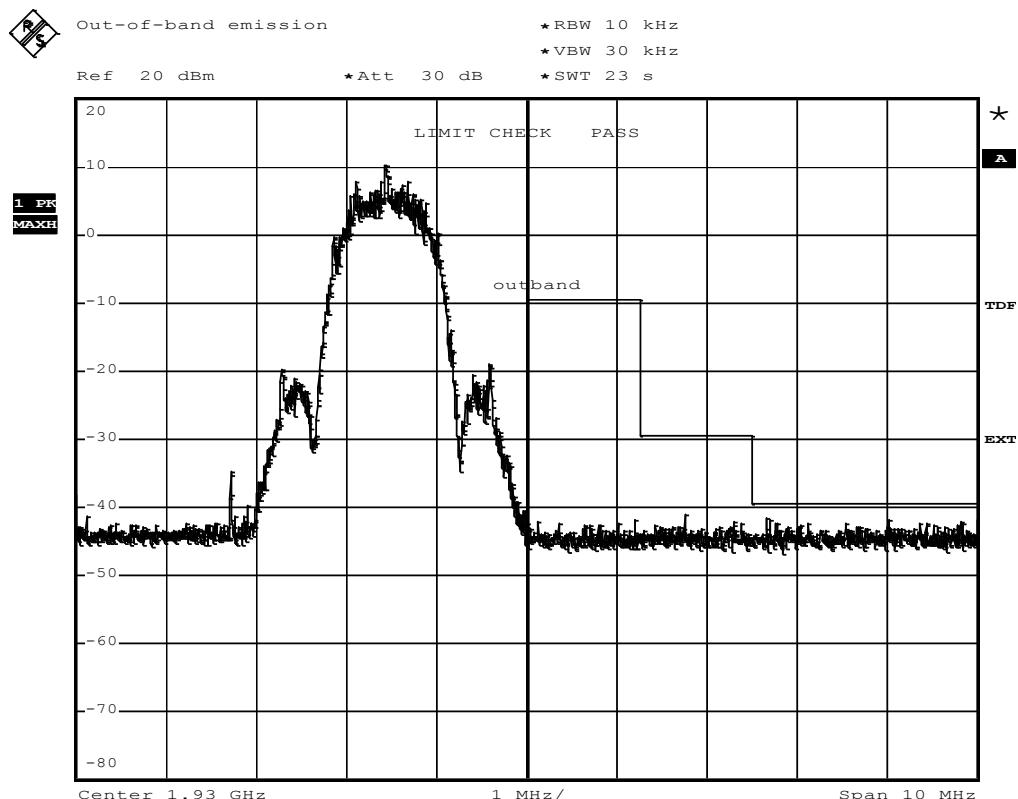


Comment: Ansi C63.17-2006 6.1.6.2
 Date: 25.JUN.2014 16:13:28

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-07-01
 Note: worst case

Index 29

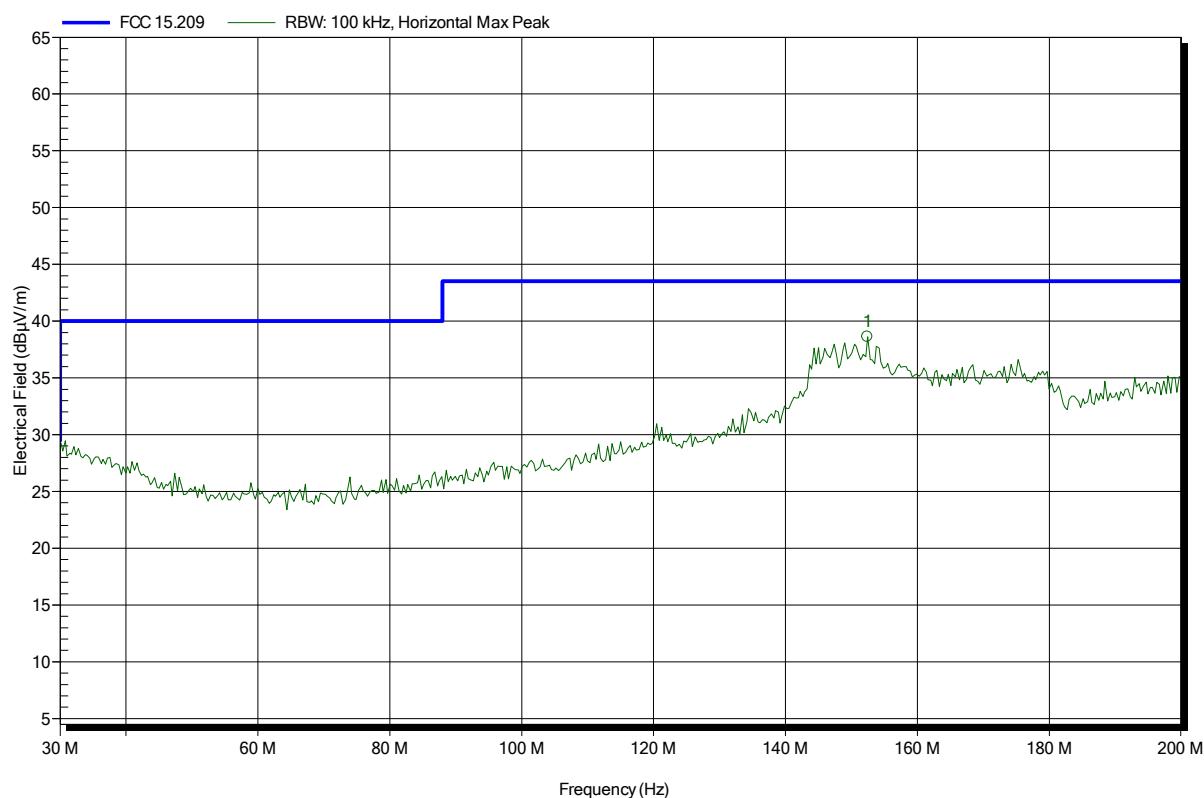

Test Report No.: G0M-1405-3835-TFC15DFP-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; ch. 0; Module1 and 2 active
Test Date: 2014-07-01
Note: worst case

Index 30

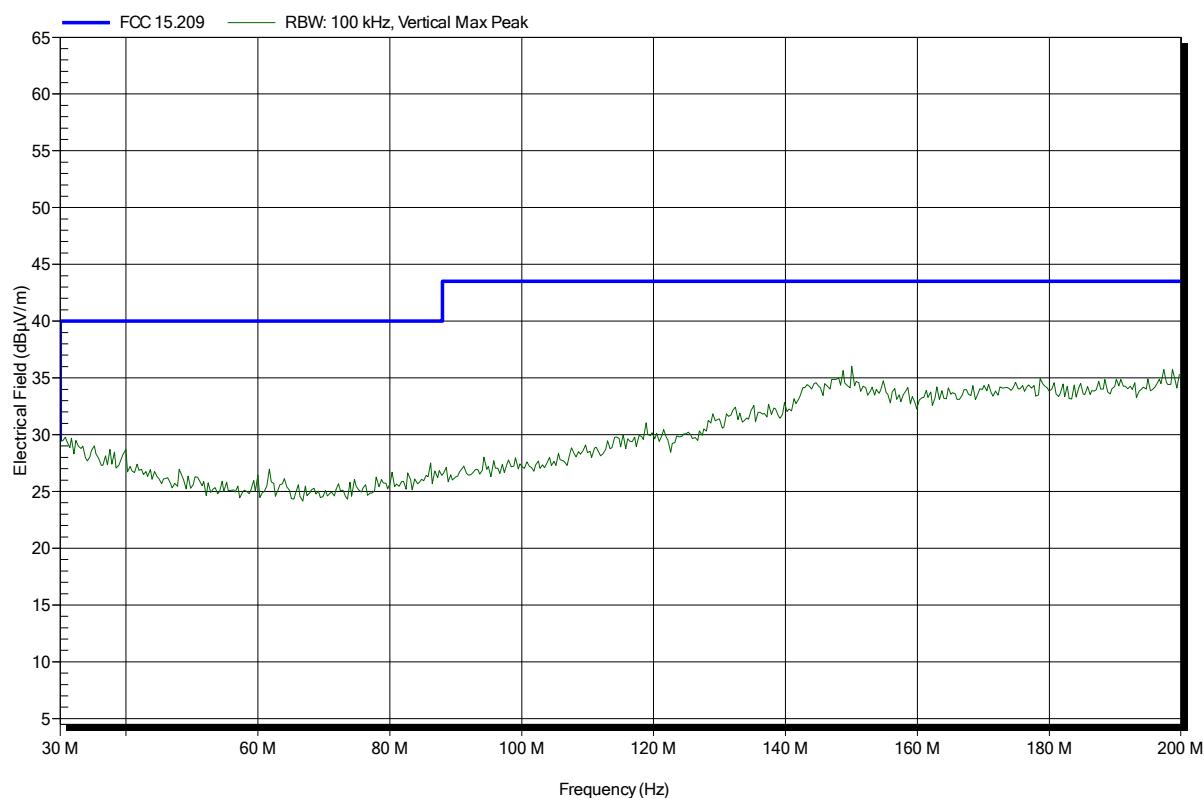


Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom} = 25^\circ\text{C}$, $V_{nom} = 120\text{V AC}$ (48V DC adaptor)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-07-01
 Note: worst case

Index 27

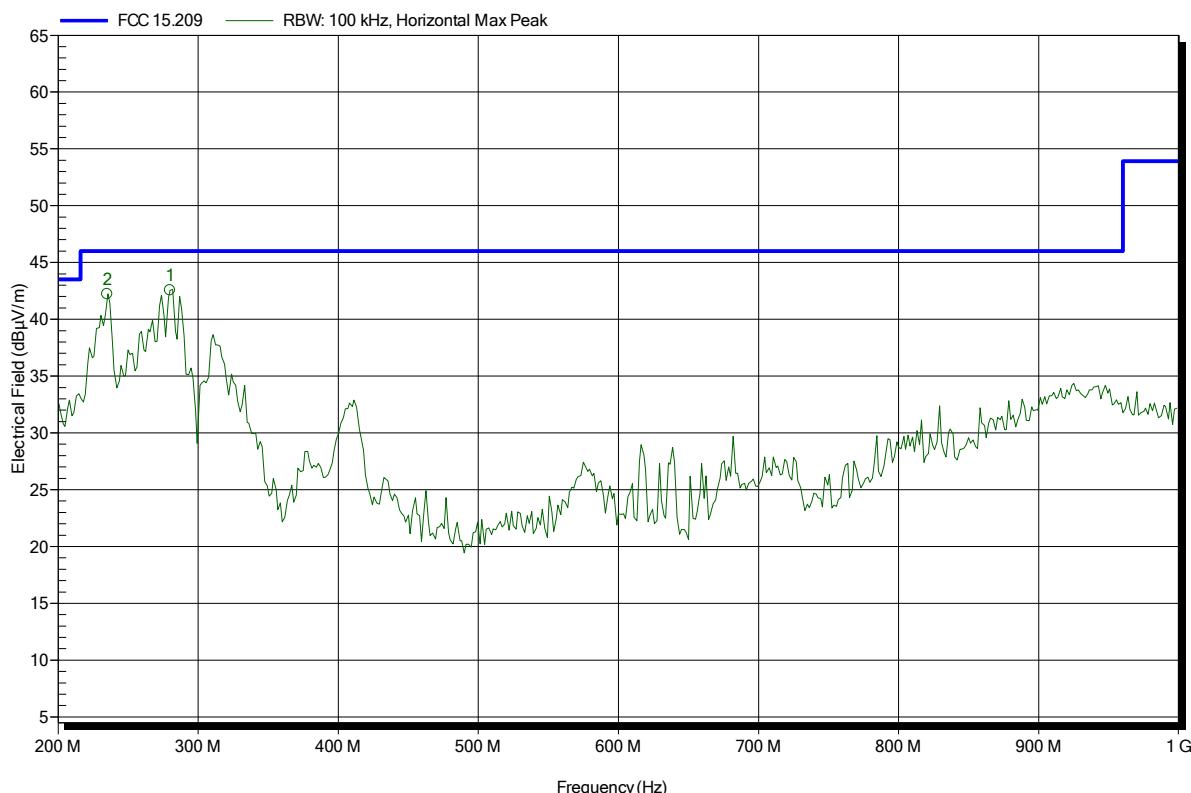


Frequency	Peak	Peak Limit	Peak Difference	Status
235.2 MHz	42.22 dB μ V/m	46 dB μ V/m	-3.78 dB	Pass
280 MHz	42.55 dB μ V/m	46 dB μ V/m	-3.45 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-07-01
 Note: worst case

Index 28

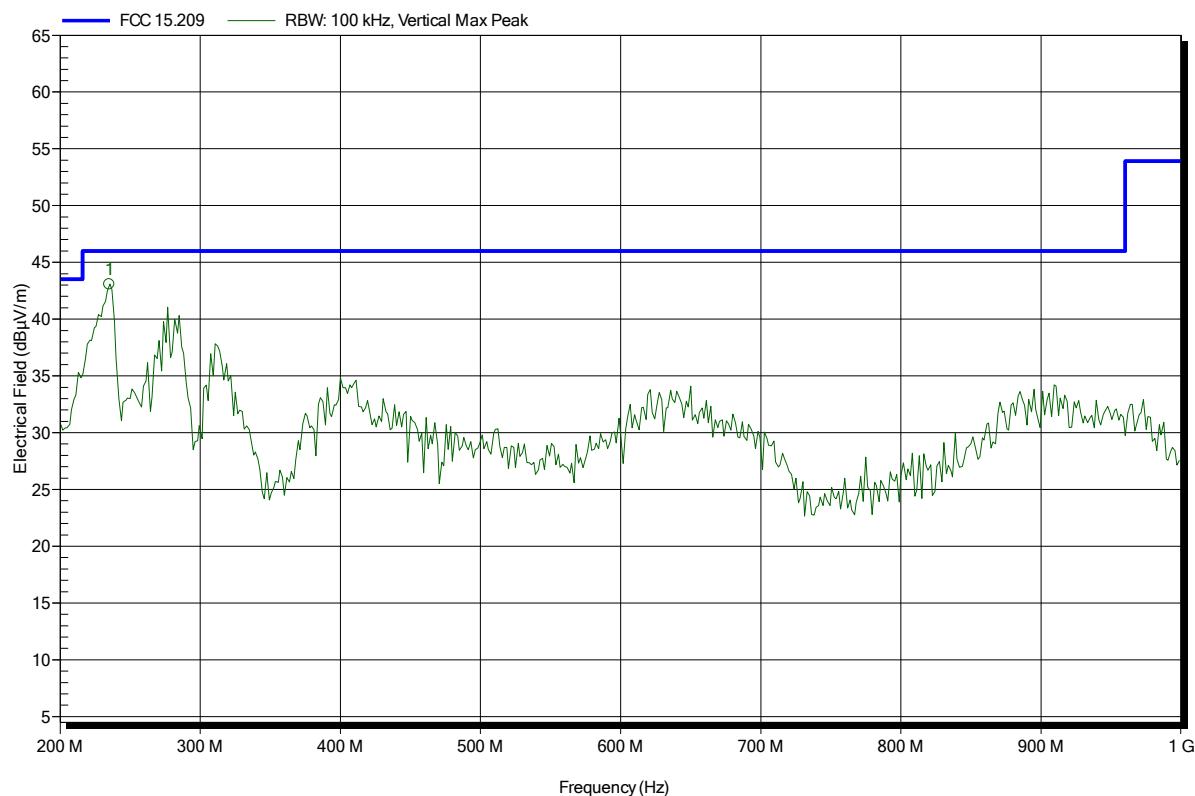


Frequency	Peak	Peak Limit	Peak Difference	Status
235.2 MHz	43.06 dB μ V/m	46 dB μ V/m	-2.94 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-06-30
 Note: with notch-filter

Index 8

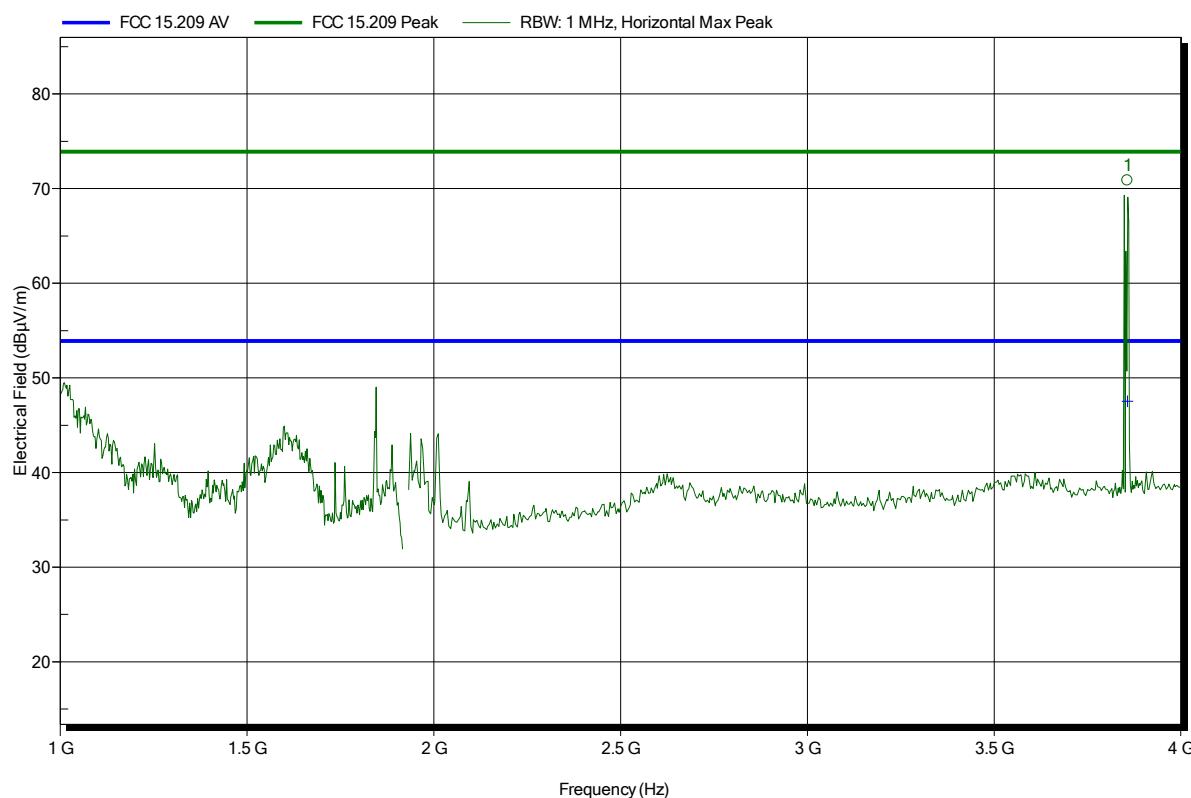


Frequency	Peak	Peak Limit	Peak Difference	Status
3.8563 GHz	70.85 dB μ V/m	73.9 dB μ V/m	-3.05 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
3.8563 GHz	47.51 dB μ V/m	53.9 dB μ V/m	-6.39 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-06-30
 Note: with notch-filter

Index 7

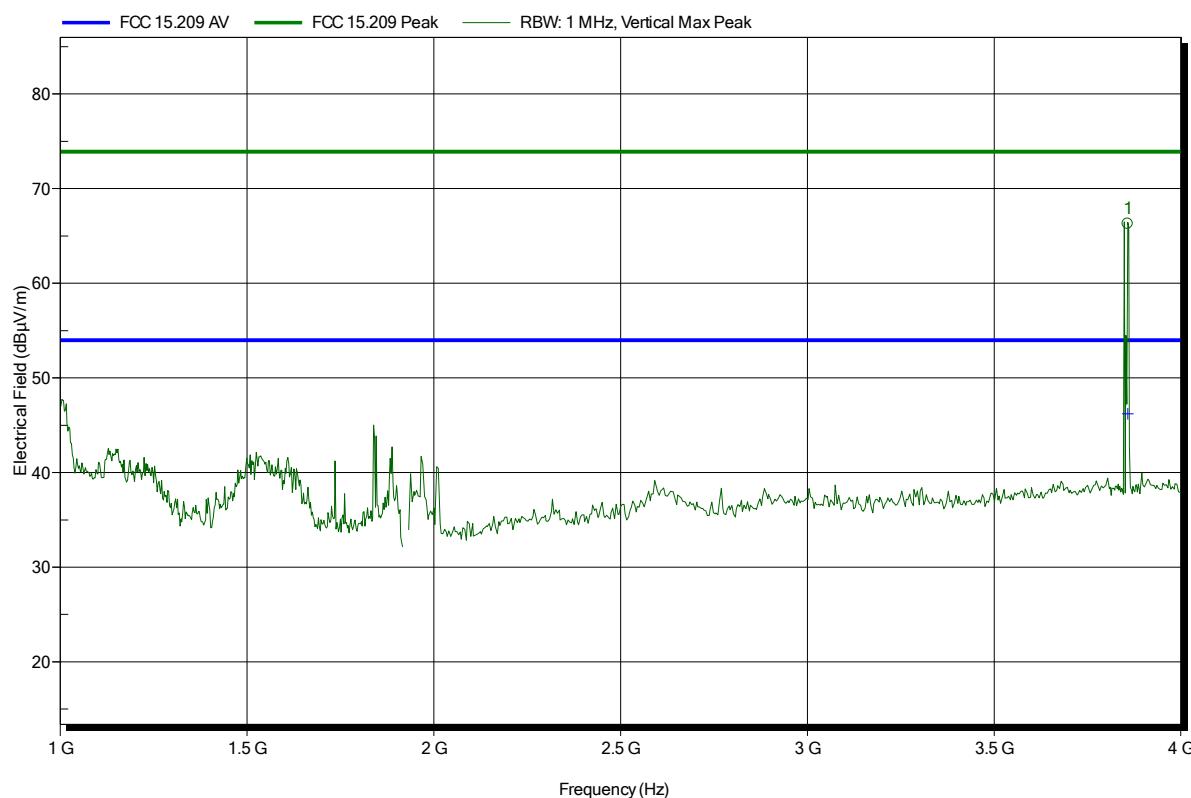


Frequency	Peak	Peak Limit	Peak Difference	Status
3.8568 GHz	66.27 dB μ V/m	73.9 dB μ V/m	-7.63 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
3.8568 GHz	46.2 dB μ V/m	53.98 dB μ V/m	-7.78 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 13

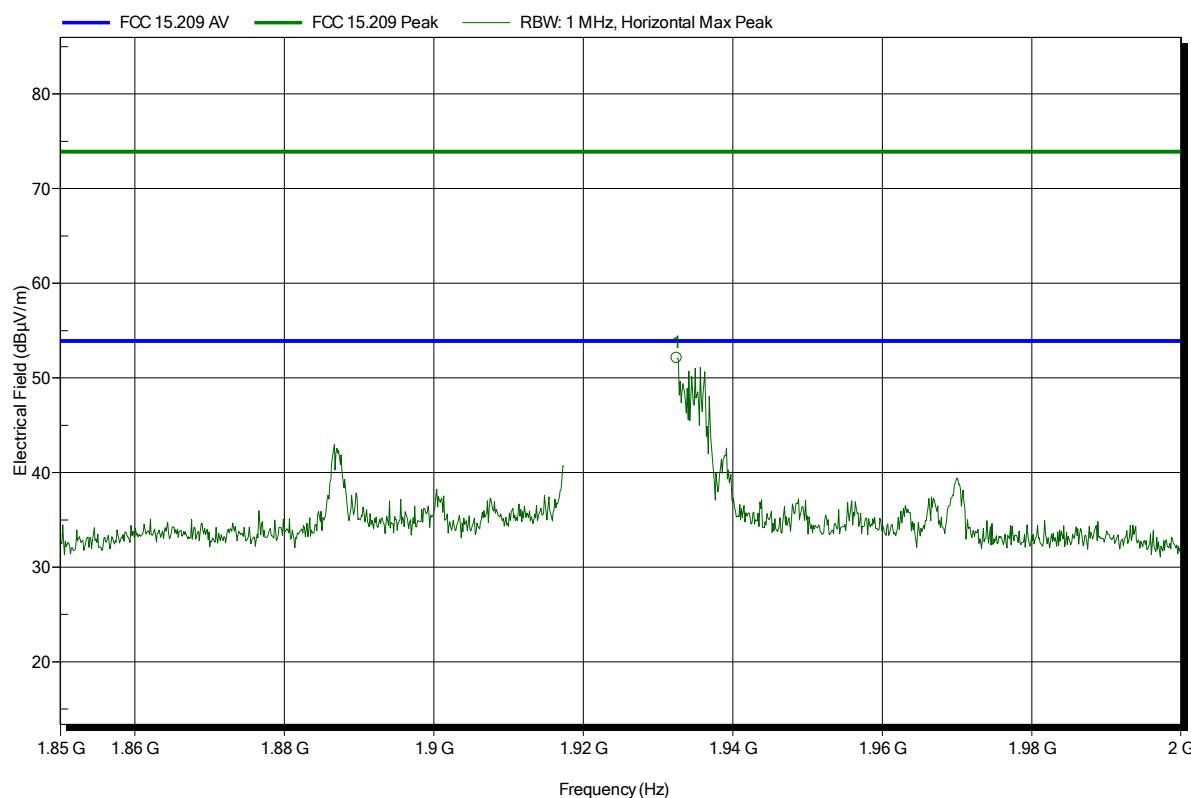


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9325 GHz	52.11 dB μ V/m	73.9 dB μ V/m	-21.79 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom} = 25^\circ\text{C}$, $V_{nom} = 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 12

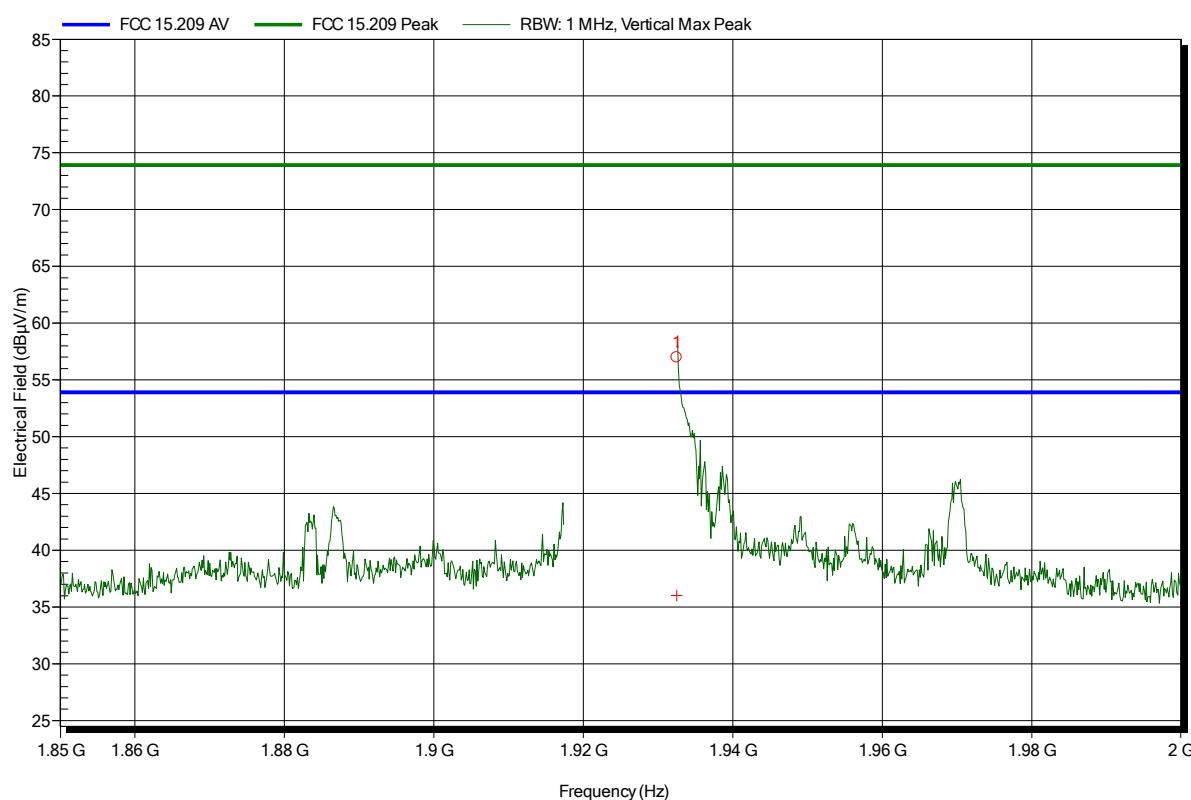


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9325 GHz	56.98 dB μ V/m	73.9 dB μ V/m	-16.92 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	36.02 dB μ V/m	53.9 dB μ V/m	-17.88 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom} = 25^\circ\text{C}$, $V_{nom} = 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-07-01
 Note:

Index 21

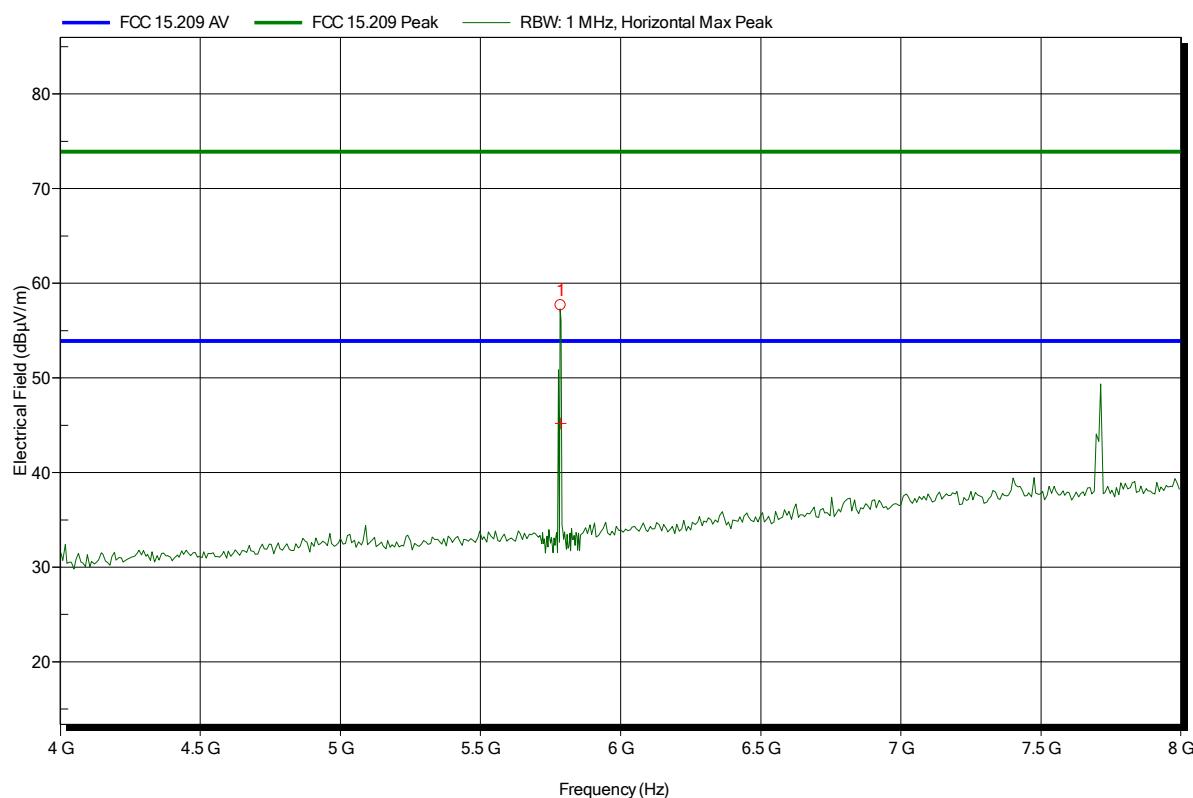

Test Report No.: G0M-1405-3835-TFC15DFP-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom} = 25^\circ\text{C}$, $V_{nom} = 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-07-01
 Note:

Index 24

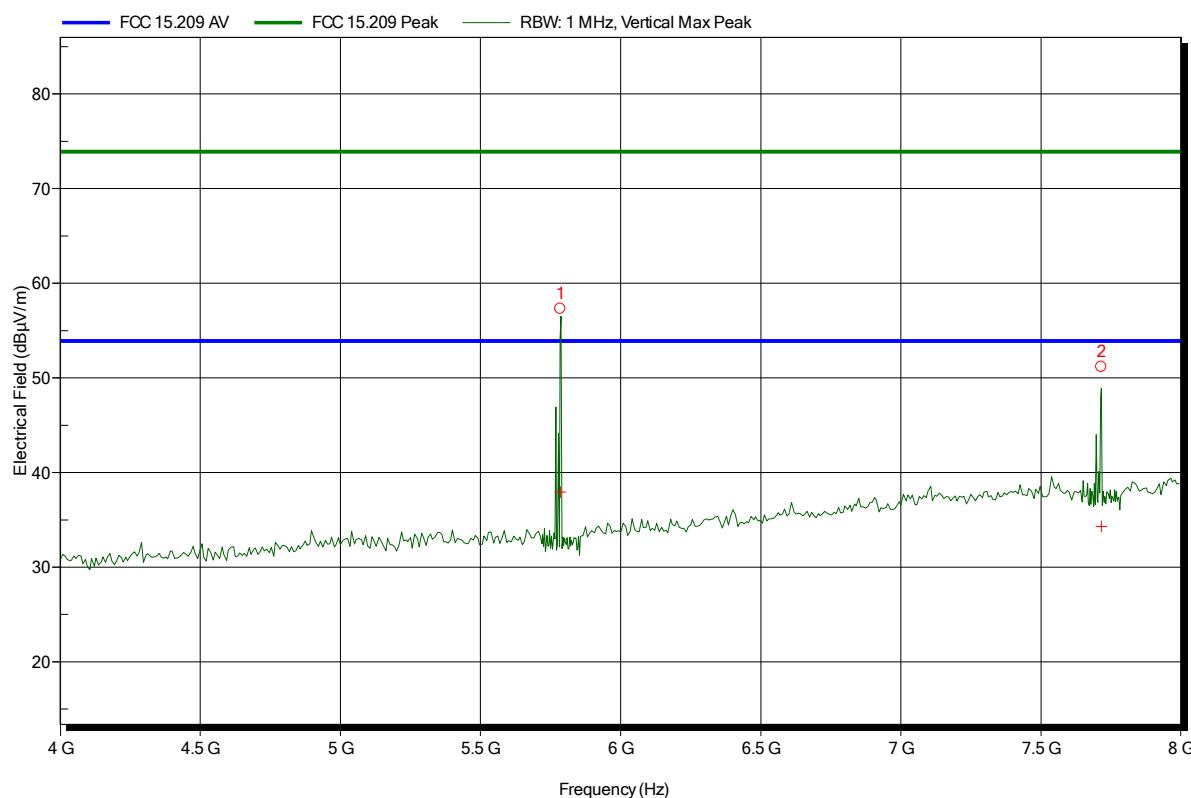

Frequency	Peak	Peak Limit	Peak Difference	Status
5.785 GHz	57.31 dB μ V/m	73.9 dB μ V/m	-16.59 dB	Pass
7.715 GHz	51.17 dB μ V/m	73.9 dB μ V/m	-22.73 dB	Pass


Frequency	Average	Average Limit	Average Difference	Average Status
5.785 GHz	37.93 dB μ V/m	53.9 dB μ V/m	-15.97 dB	Pass
7.715 GHz	34.3 dB μ V/m	53.9 dB μ V/m	-19.6 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-07-01
 Note:

Index 22

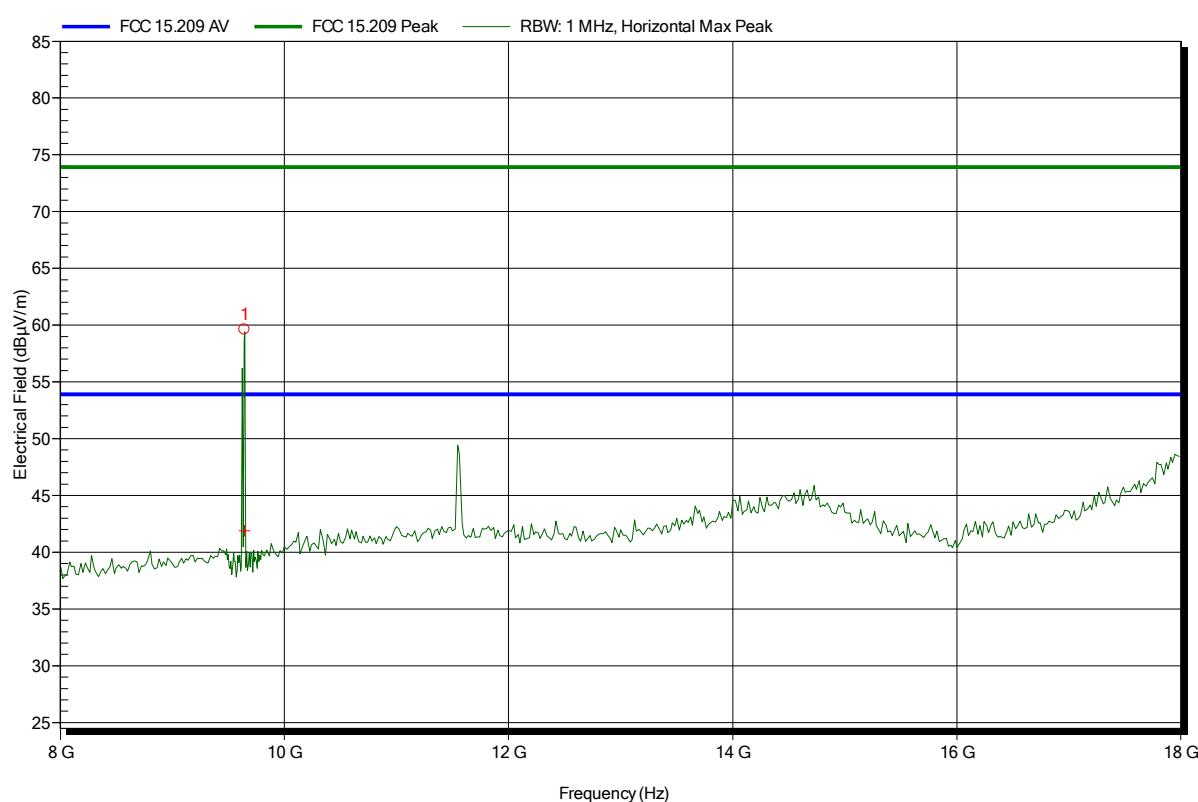


Frequency	Peak	Peak Limit	Peak Difference	Status
9.644 GHz	59.6 dB μ V/m	73.9 dB μ V/m	-14.3 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
9.644 GHz	41.88 dB μ V/m	53.9 dB μ V/m	-12.02 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: TX; ch. 0; Module1 and 2 active
 Test Date: 2014-07-01
 Note:

Index 25

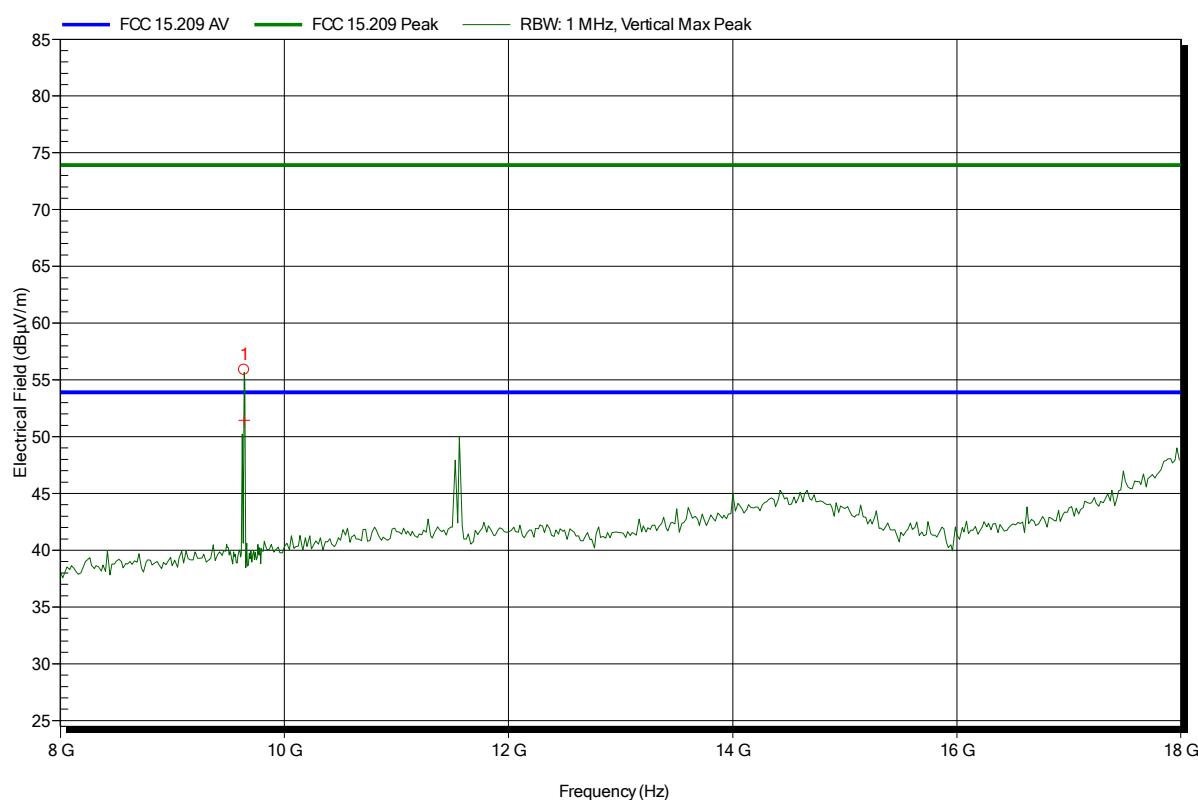


Frequency	Peak	Peak Limit	Peak Difference	Status
9.641 GHz	55.89 dB μ V/m	73.9 dB μ V/m	-18.01 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
9.641 GHz	51.44 dB μ V/m	53.9 dB μ V/m	-2.46 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Rohde & Schwarz HL 025, Horizontal
Measurement distance: 1 m
Mode: TX; ch. 0; Module1 and 2 active
Test Date: 2014-07-01
Note:

Index 23

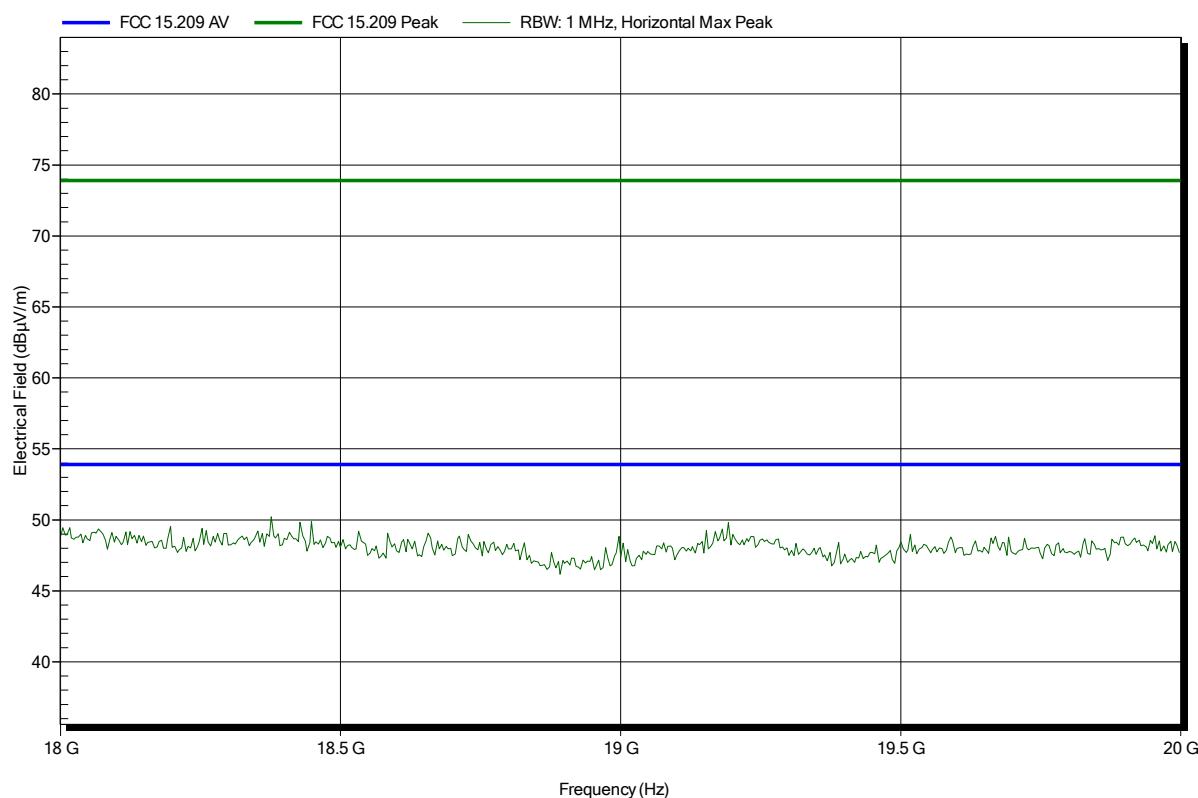


Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Rohde & Schwarz HL 025, Vertical
Measurement distance: 1 m
Mode: TX; ch. 0; Module1 and 2 active
Test Date: 2014-07-01
Note:

Index 26

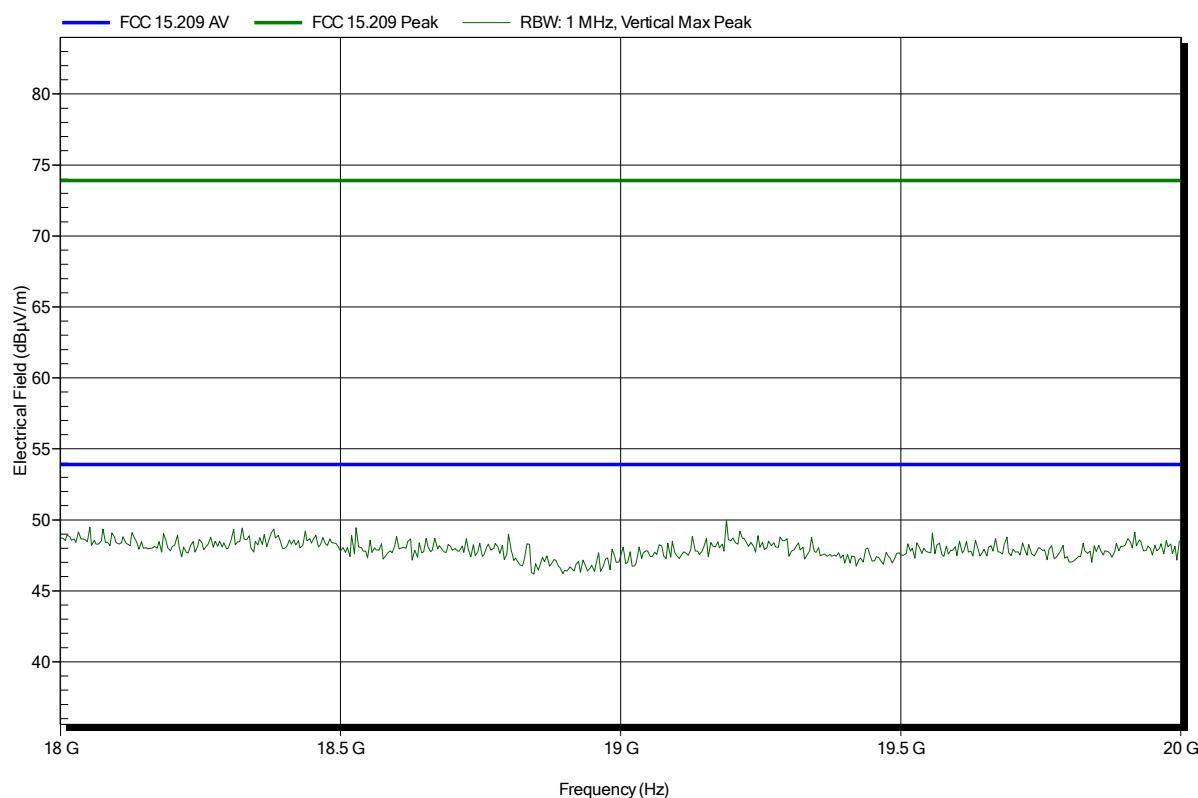

Test Report No.: G0M-1405-3835-TFC15DFP-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 68 of 114

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note: with notch-filter

Index 5

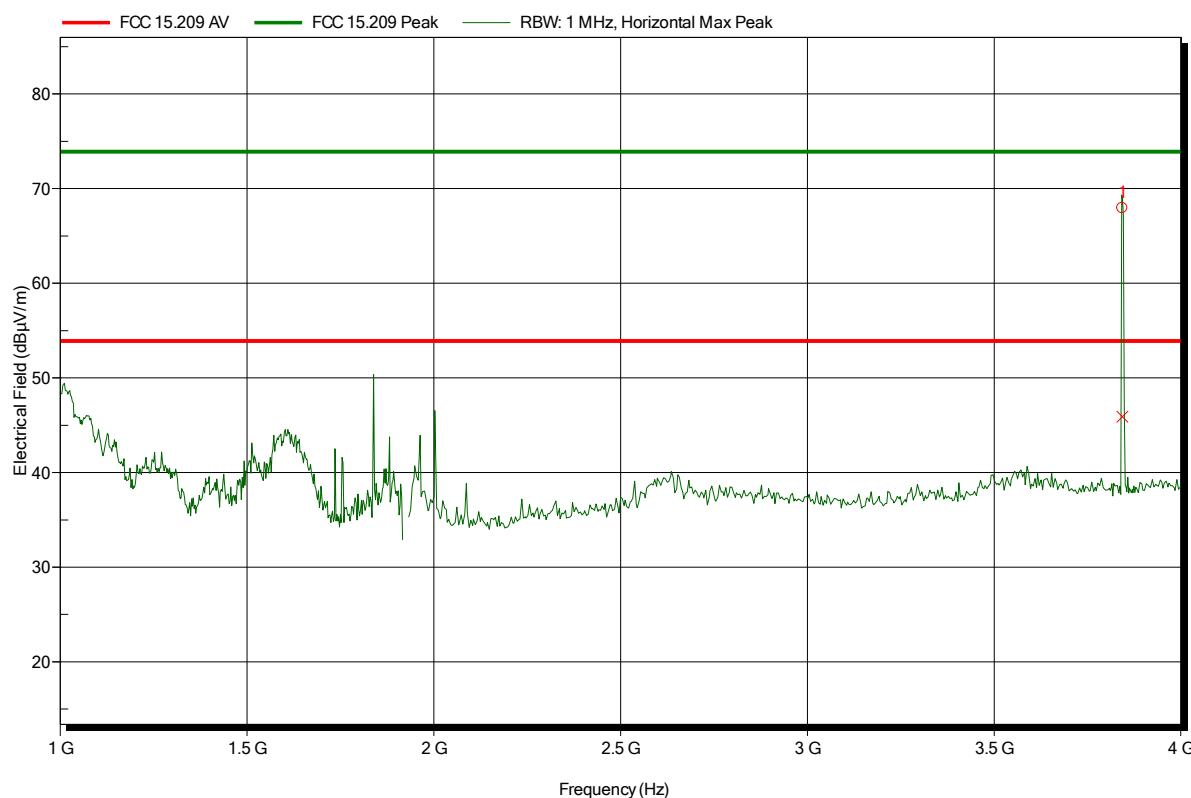


Frequency	Peak	Peak Limit	Peak Difference	Status
3.8428 GHz	67.93 dB μ V/m	73.9 dB μ V/m	-5.97 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
3.8428 GHz	45.89 dB μ V/m	53.9 dB μ V/m	-8.01 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note: with notch-filter

Index 6

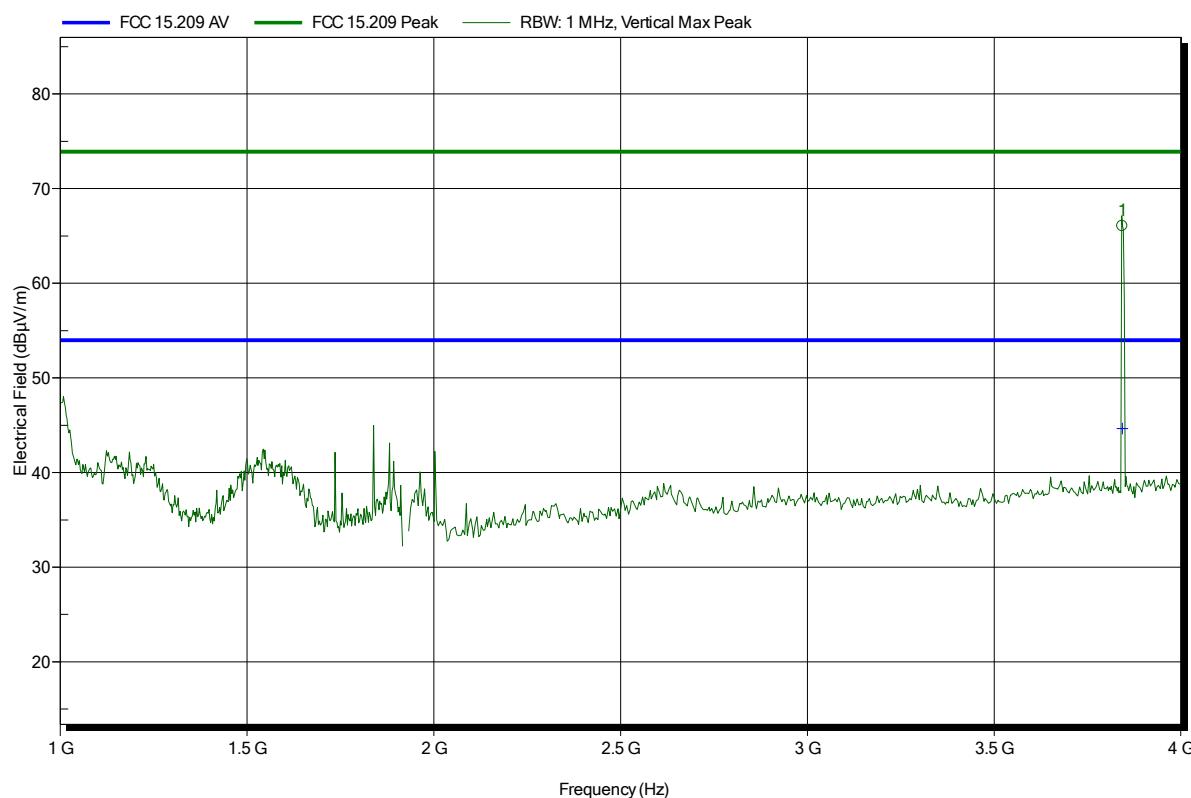


Frequency	Peak	Peak Limit	Peak Difference	Status
3.8427 GHz	66.05 dB μ V/m	73.9 dB μ V/m	-7.85 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
3.8427 GHz	44.66 dB μ V/m	53.98 dB μ V/m	-9.32 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom} = 25^{\circ}\text{C}$, $V_{nom} = 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 9

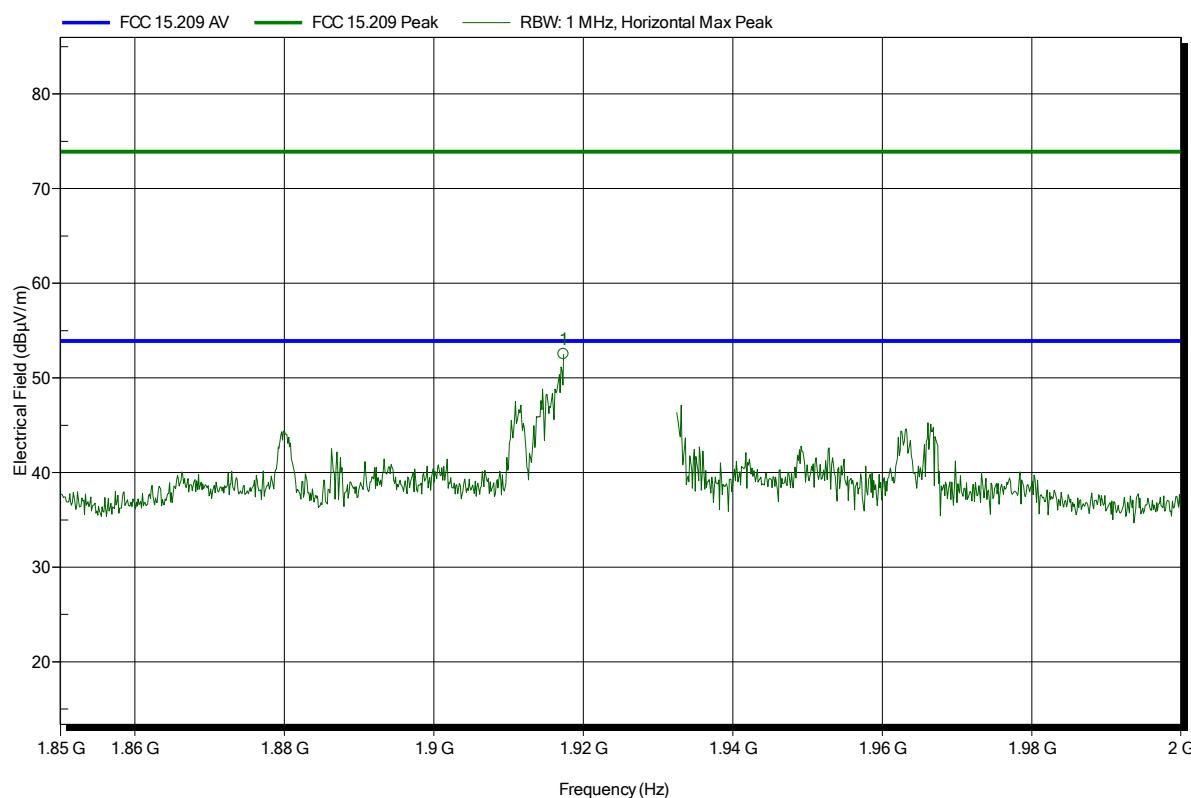


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9174 GHz	52.51 dB μ V/m	73.9 dB μ V/m	-21.39 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom} = 25^\circ\text{C}$, $V_{nom} = 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 11

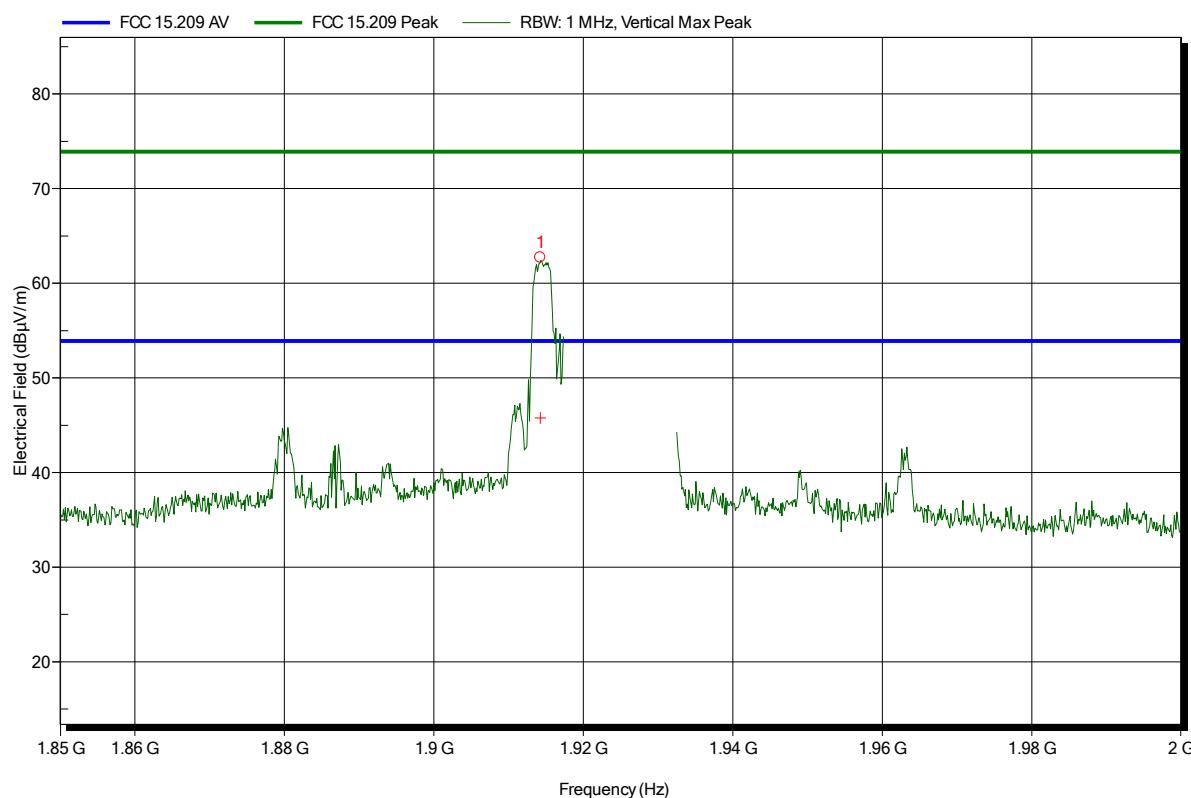


Frequency	Peak	Peak Limit	Peak Difference	Status
1.9142 GHz	62.72 dB μ V/m	73.9 dB μ V/m	-11.18 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9142 GHz	45.75 dB μ V/m	53.9 dB μ V/m	-8.15 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 14

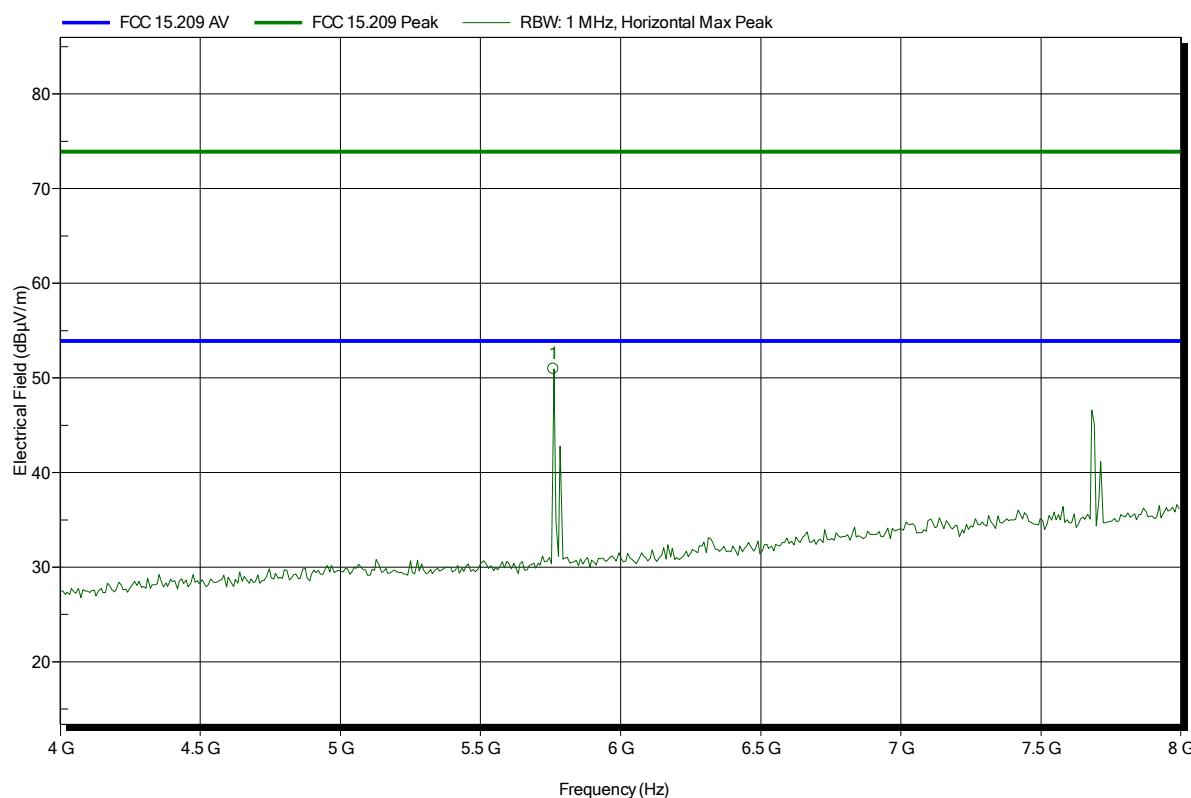

Test Report No.: G0M-1405-3835-TFC15DFP-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 17

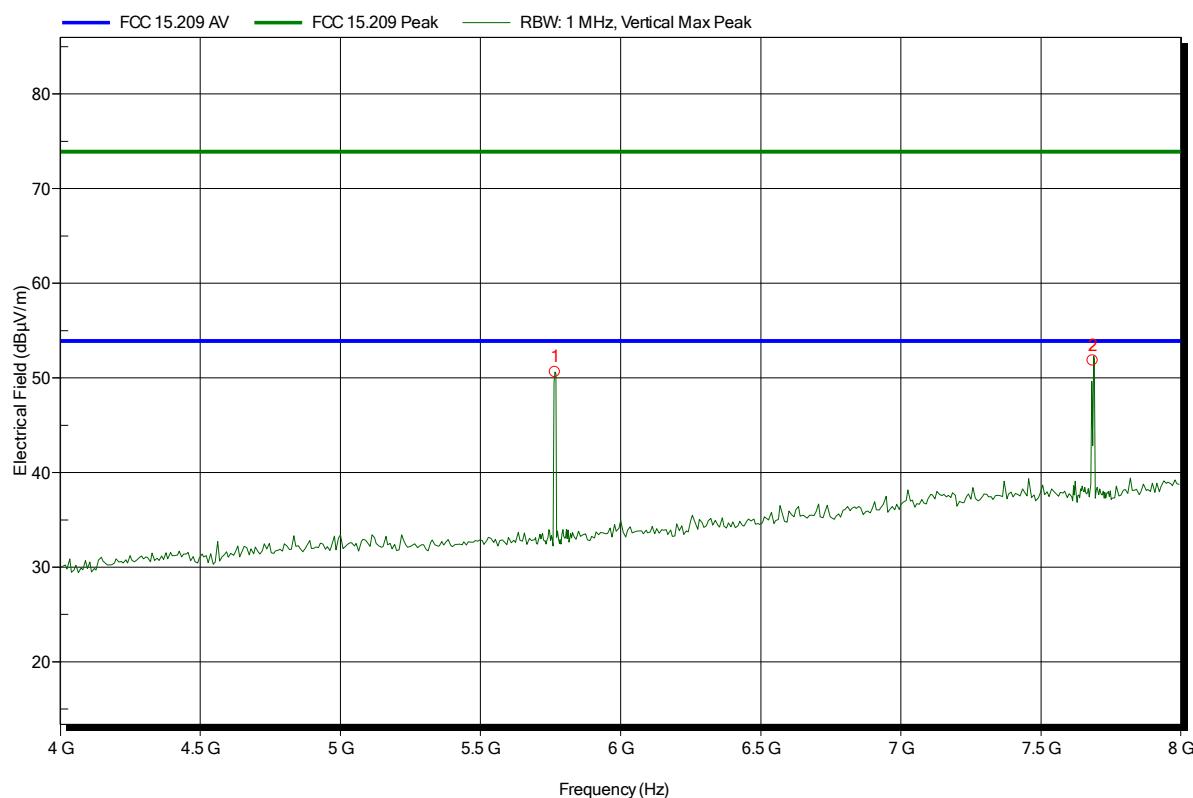


Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 15

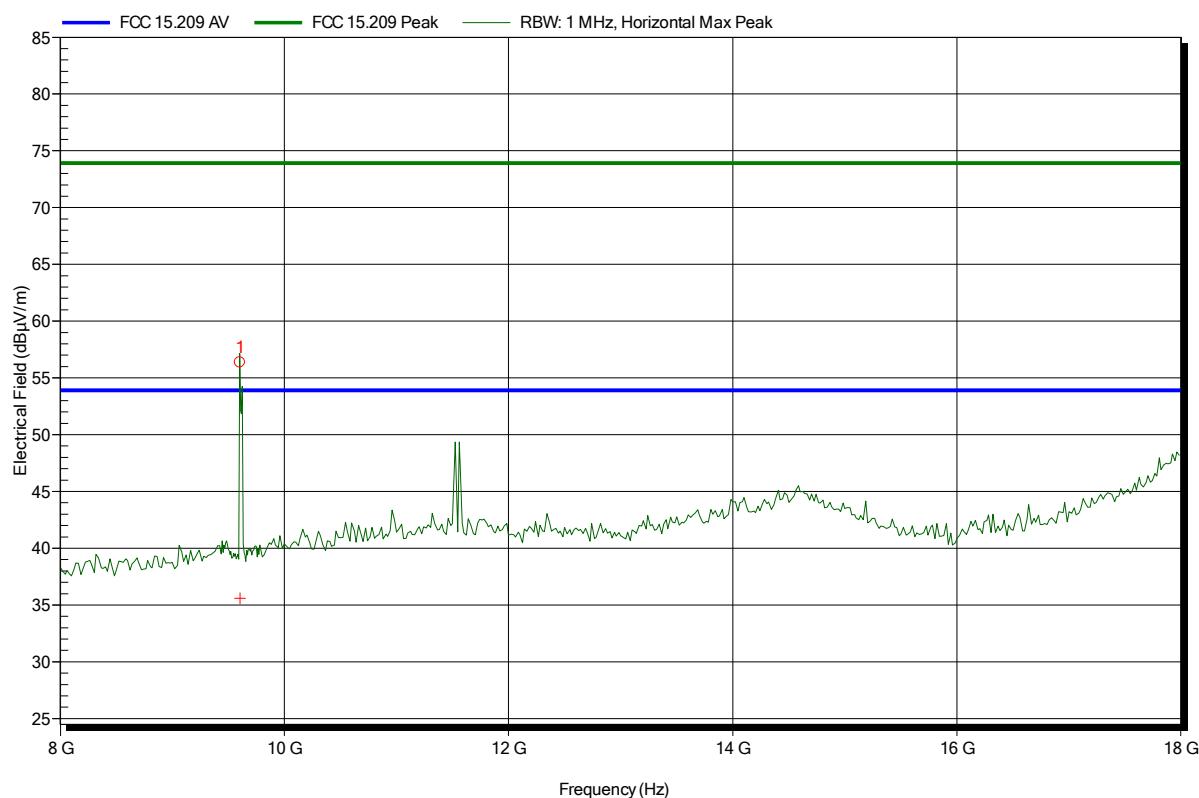


Frequency	Peak	Peak Limit	Peak Difference	Status
9.606 GHz	56.36 dB μ V/m	73.9 dB μ V/m	-17.54 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: TX; ch. 4; Module1 and 2 active
 Test Date: 2014-06-30
 Note:

Index 18

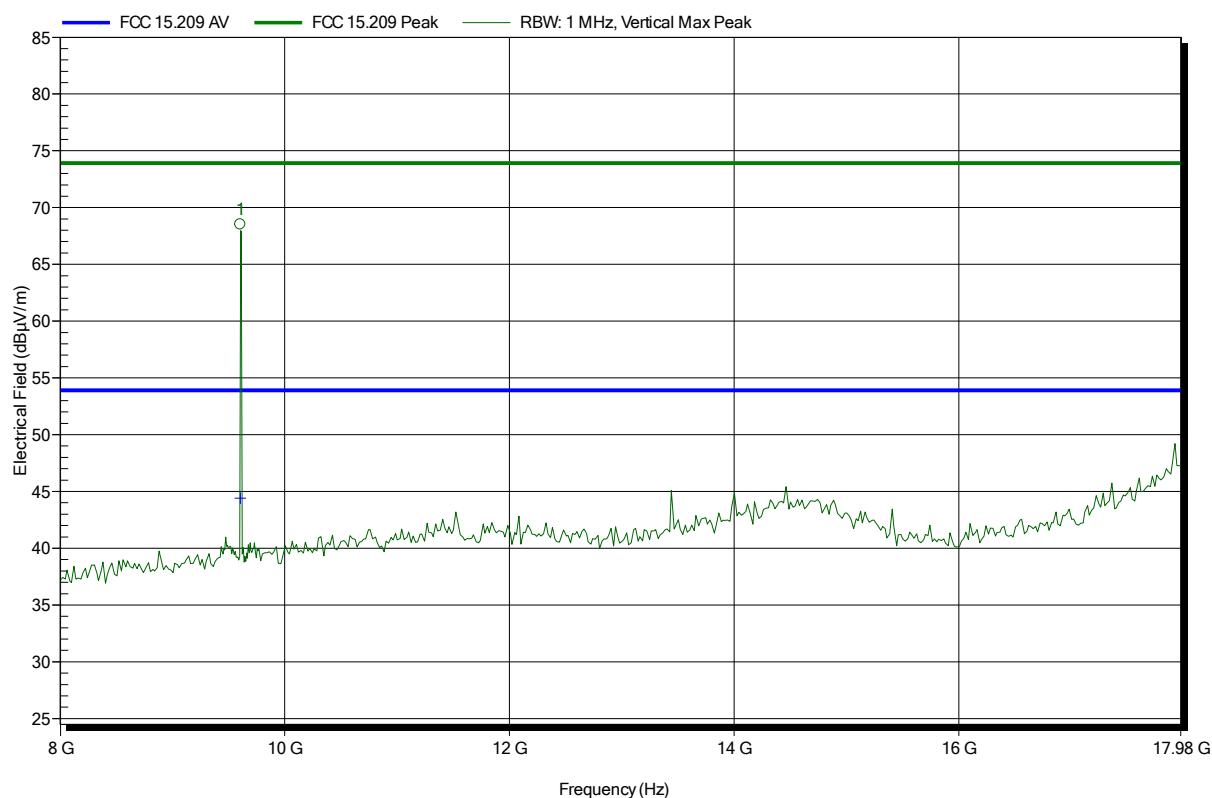


Frequency	Peak	Peak Limit	Peak Difference	Status
9.606 GHz	68.51 dB μ V/m	73.9 dB μ V/m	-5.39 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
9.606 GHz	44.41 dB μ V/m	53.9 dB μ V/m	-9.49 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Rohde & Schwarz HL 025, Horizontal
Measurement distance: 1 m
Mode: TX; ch. 4; Module1 and 2 active
Test Date: 2014-06-30
Note:

Index 16

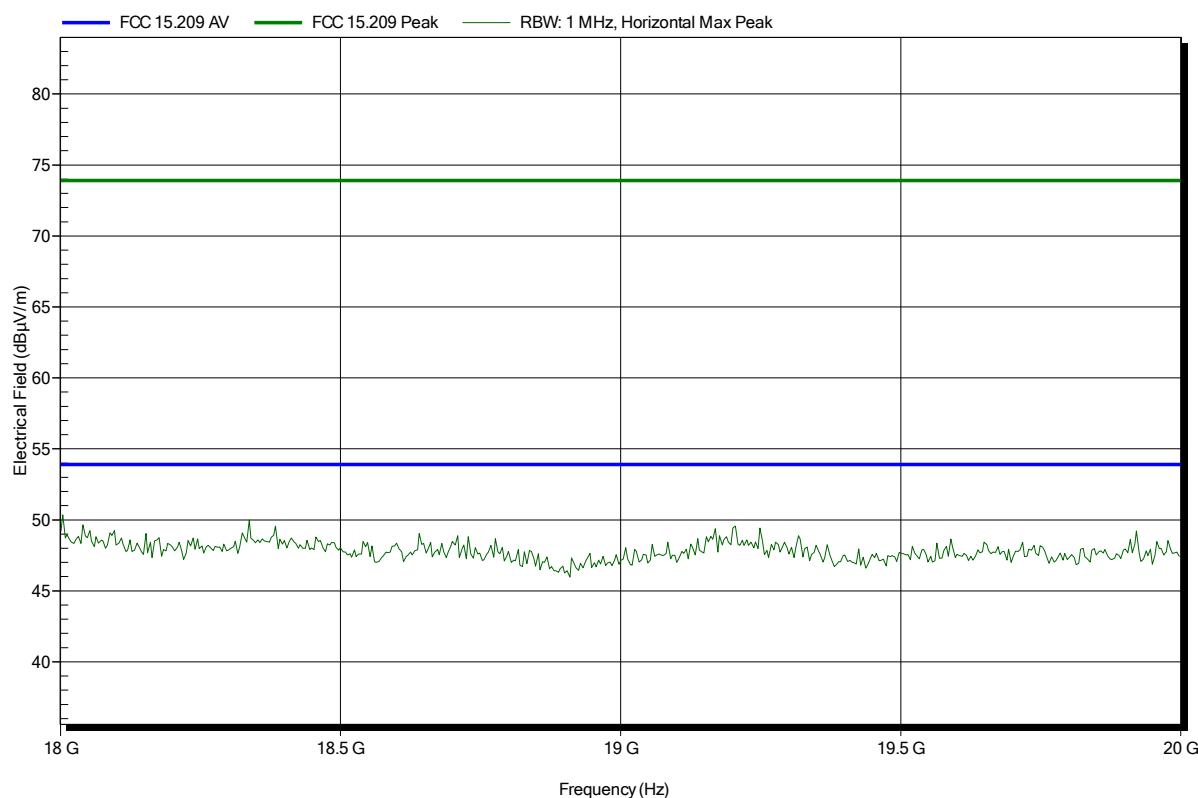


Spurious emissions according to FCC 15.209


Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: T_{nom} : 25°C, V_{nom} : 120V AC (48V DC adaptor)
Antenna: Rohde & Schwarz HL 025, Vertical
Measurement distance: 1 m
Mode: TX; ch. 4; Module1 and 2 active
Test Date: 2014-06-30
Note:

Index 19

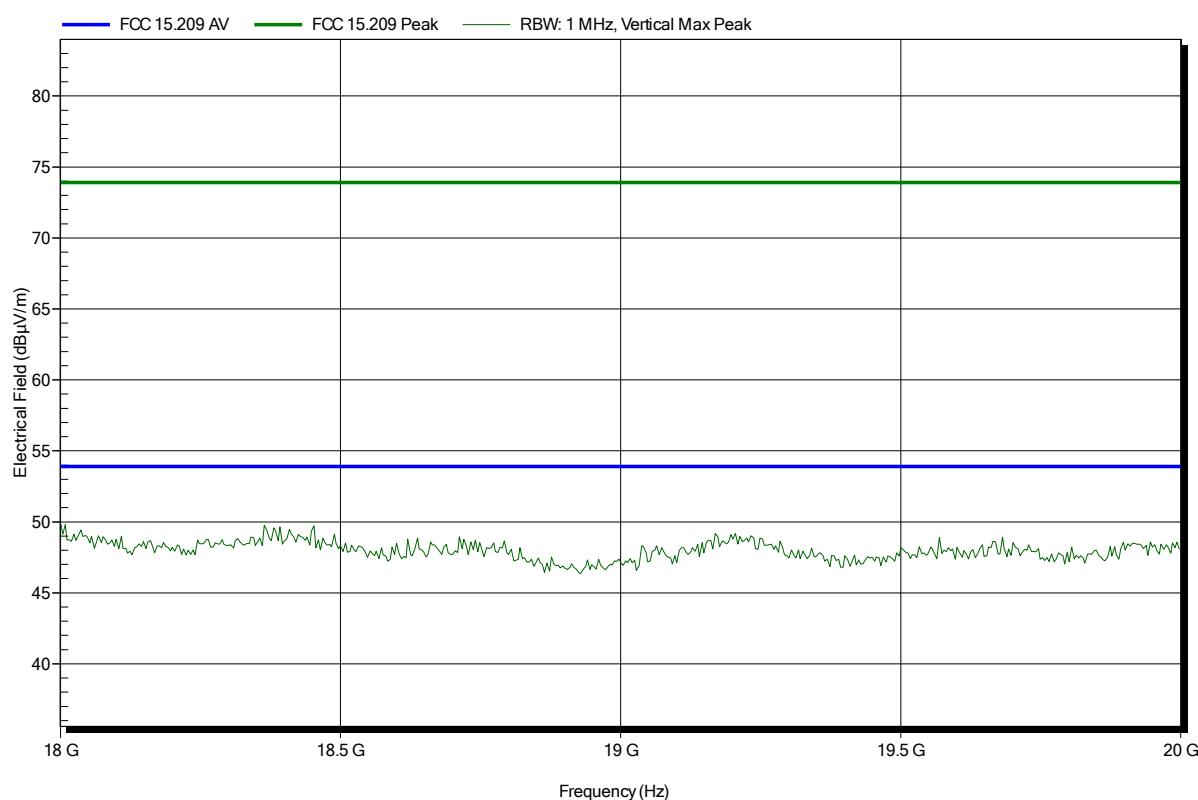

3.13 Test Conditions and Results – Receiver spurious emissions

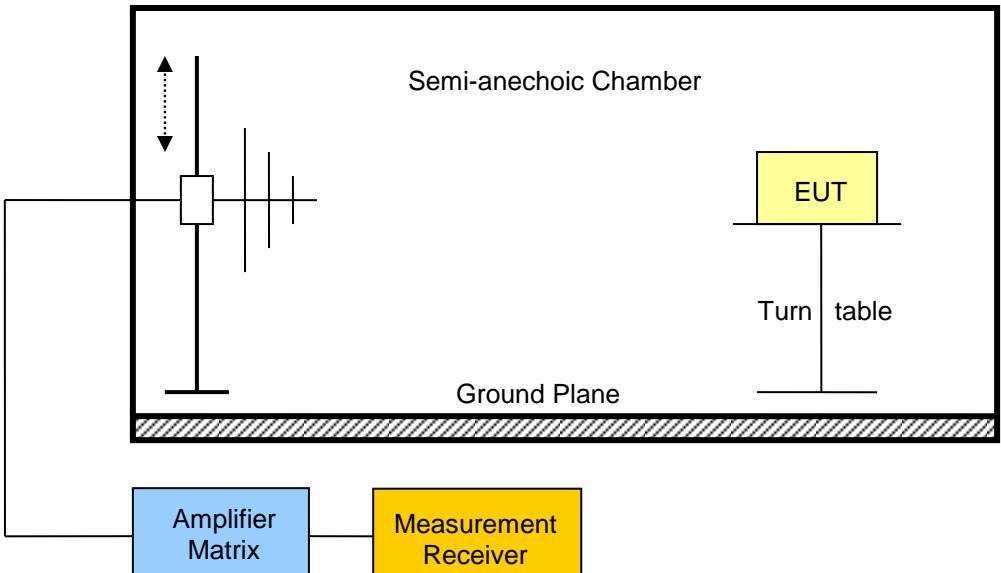Receiver spurious emissions acc. to IC RSS-213		Verdict: PASS		
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Tested frequencies	Scan (All)			
Tested frequency range	30 MHz – 3 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [μ V/m]	Limit [dB μ V/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure								
Test results								
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dB μ V/m]	Emission Level [μ V/m]	Pol.	Det.	Limit [μ V/m]	Margin [μ V/m]
2	1924.992	284.8	42.09	127.20	hor	pk	200.00	-72.80
2	1924.992	285.05	44.16	161.44	ver	pk	200.00	-38.56
2	1924.992	285.05	41.61	120.36	ver	qpk	200.00	-79.64
2	1924.992	3838	49.12	285.76	ver	pk	500.00	-214.24
2	1924.992	3843	51.59	379.75	hor	avg	500.00	-120.25

Comments:

* Physical distance between EUT and measurement antenna.


** Emission level corresponds to ambient noise floor

Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: RX; active
Test Date: 2014-07-01
Note:

Index 31

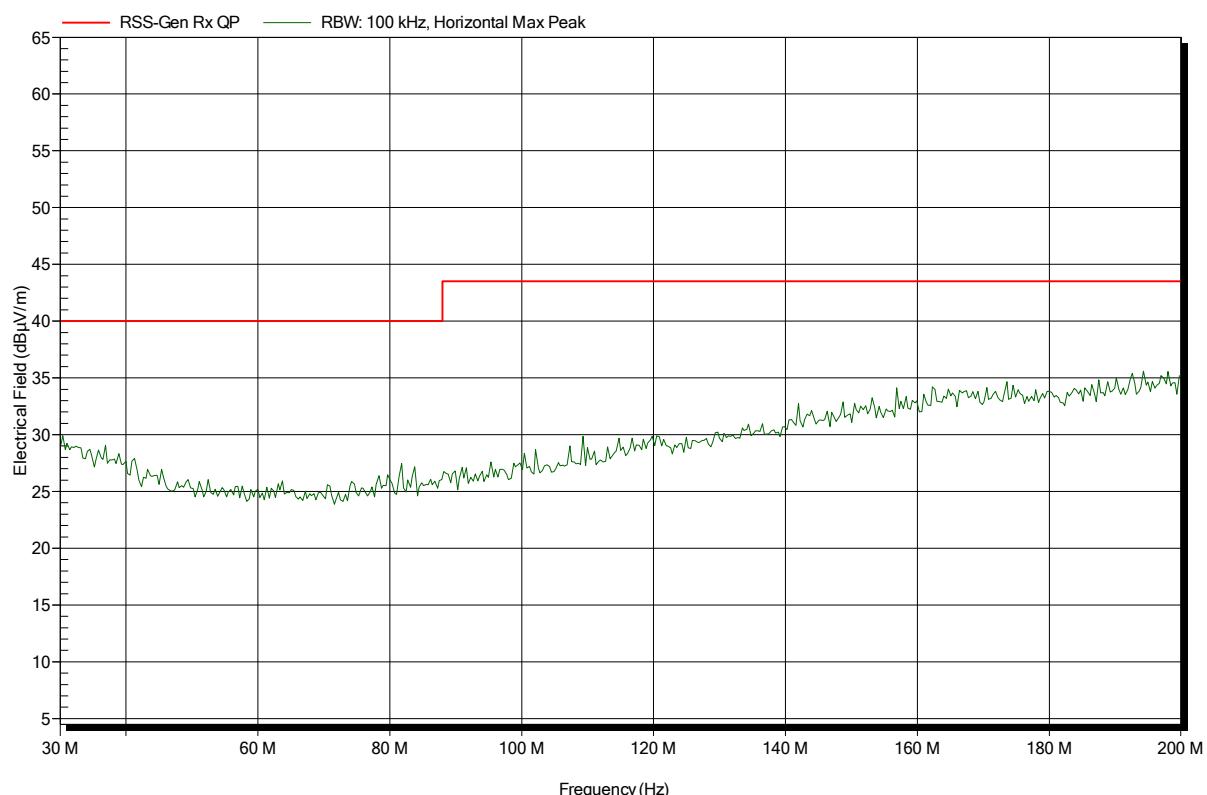


Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: RX; active
Test Date: 2014-07-01
Note:

Index 32

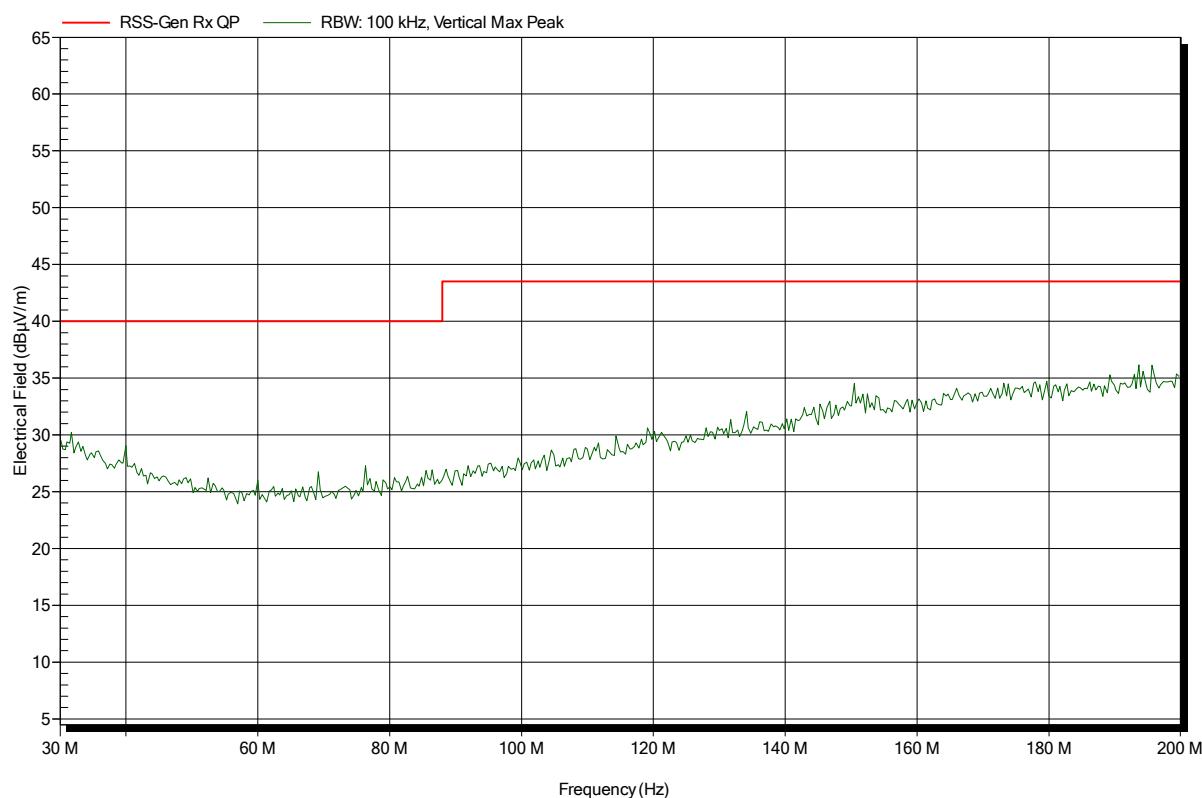


Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; active
 Test Date: 2014-07-01
 Note:

Index 33

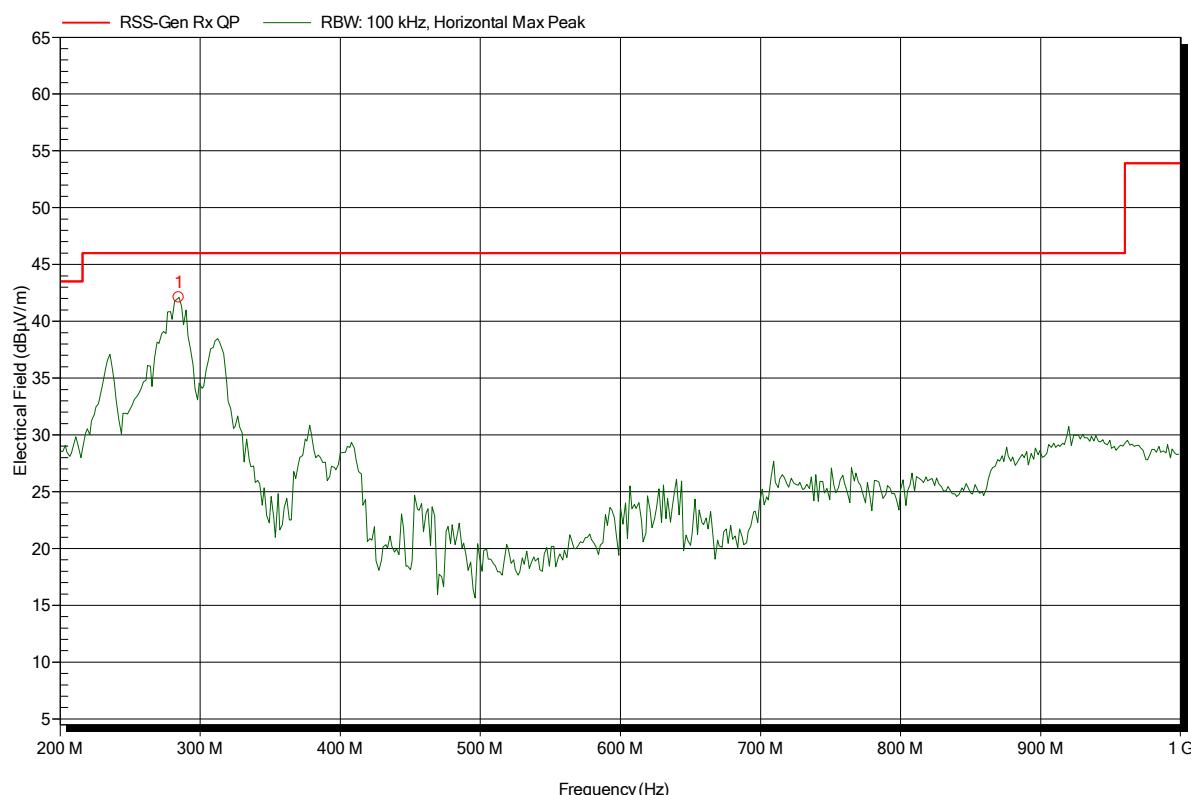


Frequency	Peak	Peak Limit	Peak Difference	Status
284.8 MHz	42.09 dB μ V/m	46 dB μ V/m	-3.91 dB	Pass

Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; active
 Test Date: 2014-07-01
 Note:

Index 34

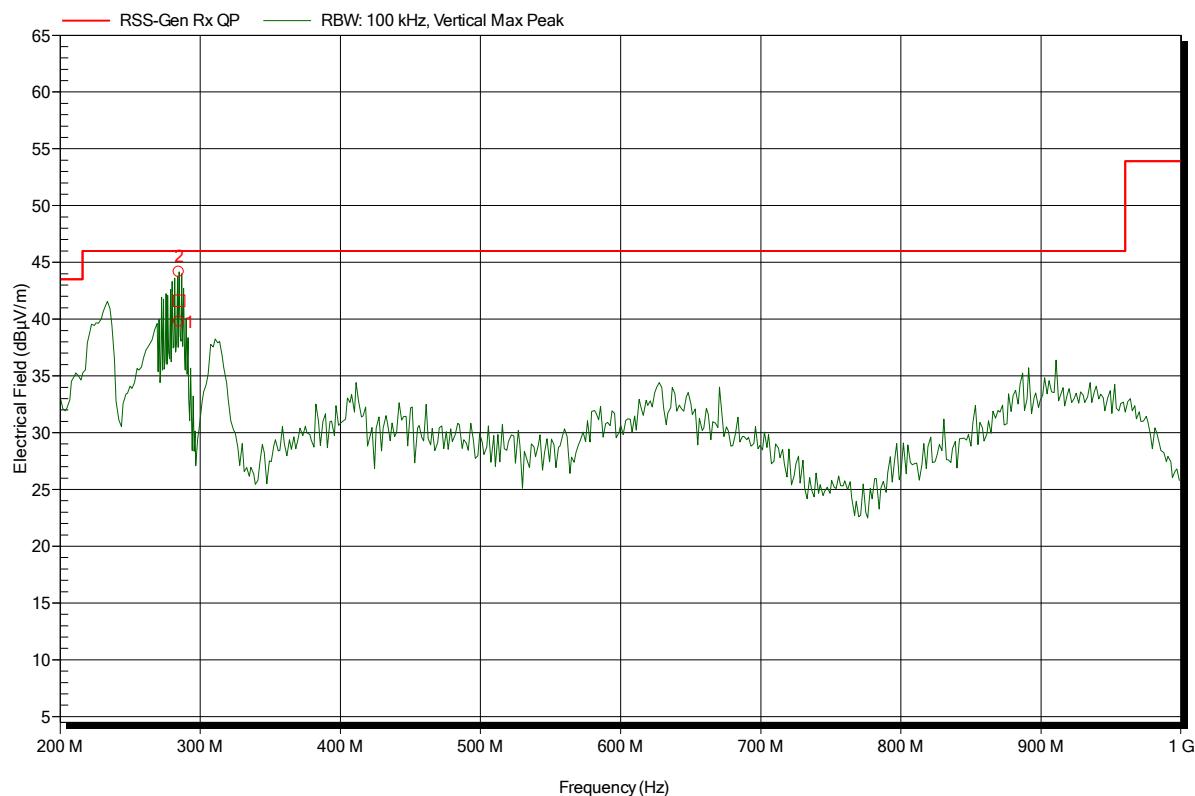


Frequency	Peak	Peak Limit	Peak Difference	Status
285.05 MHz	44.16 dB μ V/m	46 dB μ V/m	-1.84 dB	Pass
Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
285.05 MHz	41.61 dB μ V/m	46 dB μ V/m	-4.39 dB	Pass

Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom} = 25^\circ\text{C}$, $V_{nom} = 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: RX; active
 Test Date: 2014-07-01
 Note:

Index 35

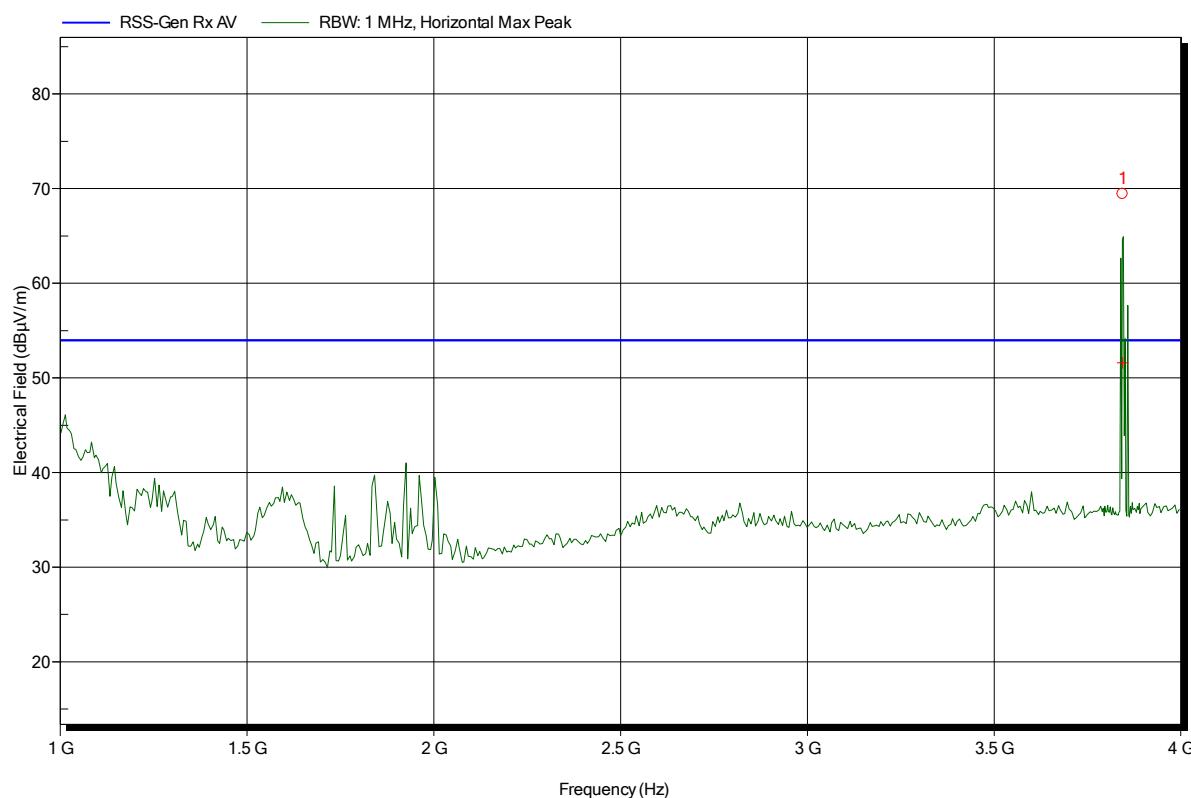


Frequency	Peak	Peak Limit	Peak Difference	Status
3.843 GHz	69.43 dB μ V/m	---	---	---
Frequency	Average	Average Limit	Average Difference	Average Status
3.843 GHz	51.59 dB μ V/m	53.98 dB μ V/m	-2.39 dB	Pass

Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
 EUT Name: DECT Base Station for Intercommunication
 Model: Q-P7BS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Treffke
 Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; active
 Test Date: 2014-07-01
 Note:

Index 37

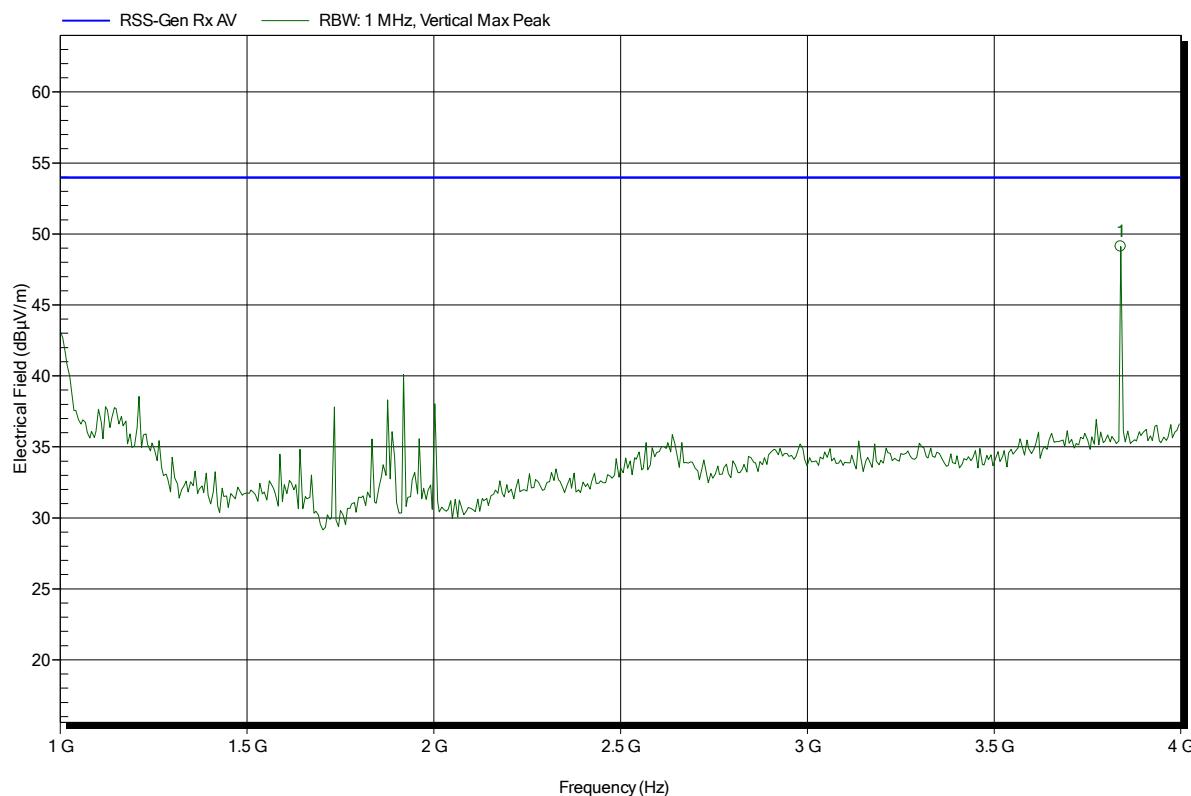

Test Report No.: G0M-1405-3835-TFC15DFP-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 86 of 114

Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3 m
Mode: RX; active
Test Date: 2014-07-01
Note:

Index 36

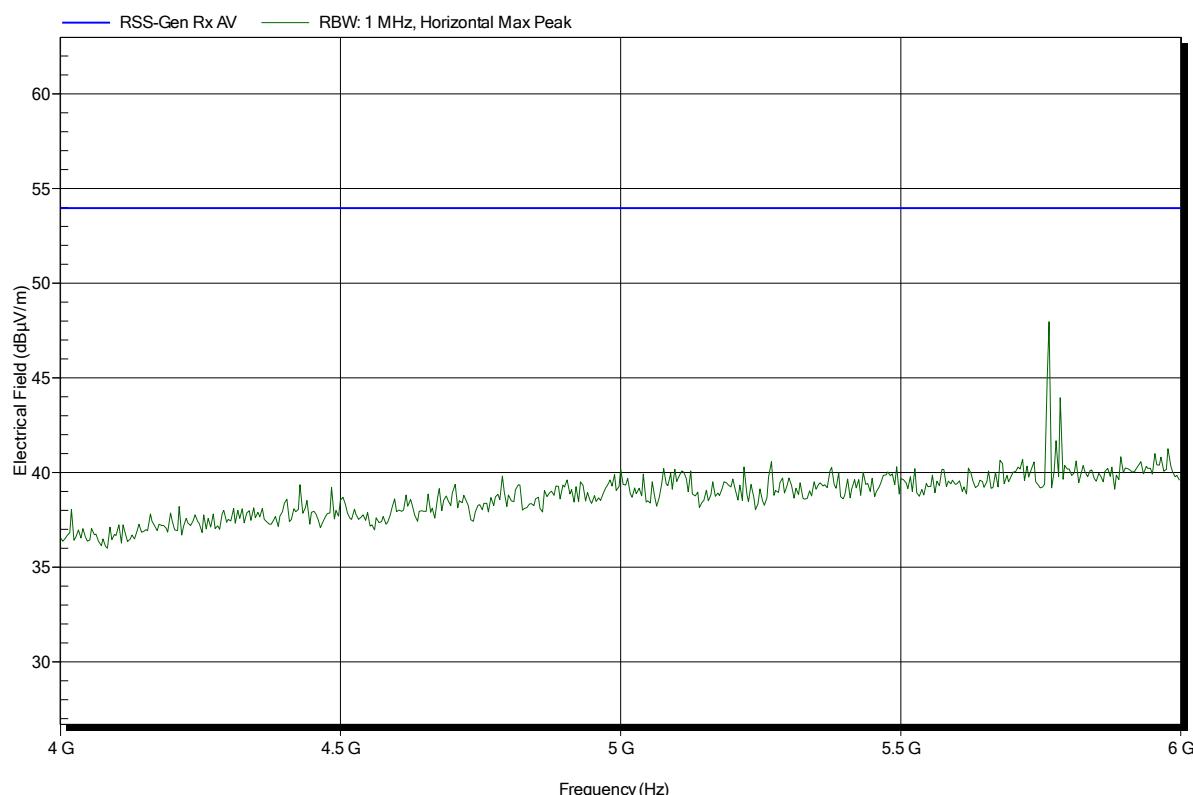

Test Report No.: G0M-1405-3835-TFC15DFP-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 87 of 114

Spurious emissions according to RSS-GEN

Project number: G0M-1405-3835

Applicant: Quail Digital, Ltd.
EUT Name: DECT Base Station for Intercommunication
Model: Q-P7BS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Treffke
Test Conditions: $T_{nom}: 25^{\circ}\text{C}$, $V_{nom}: 120\text{V AC}$ (48V DC adaptor)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 3 m
Mode: RX; active
Test Date: 2014-07-01
Note:

Index 38

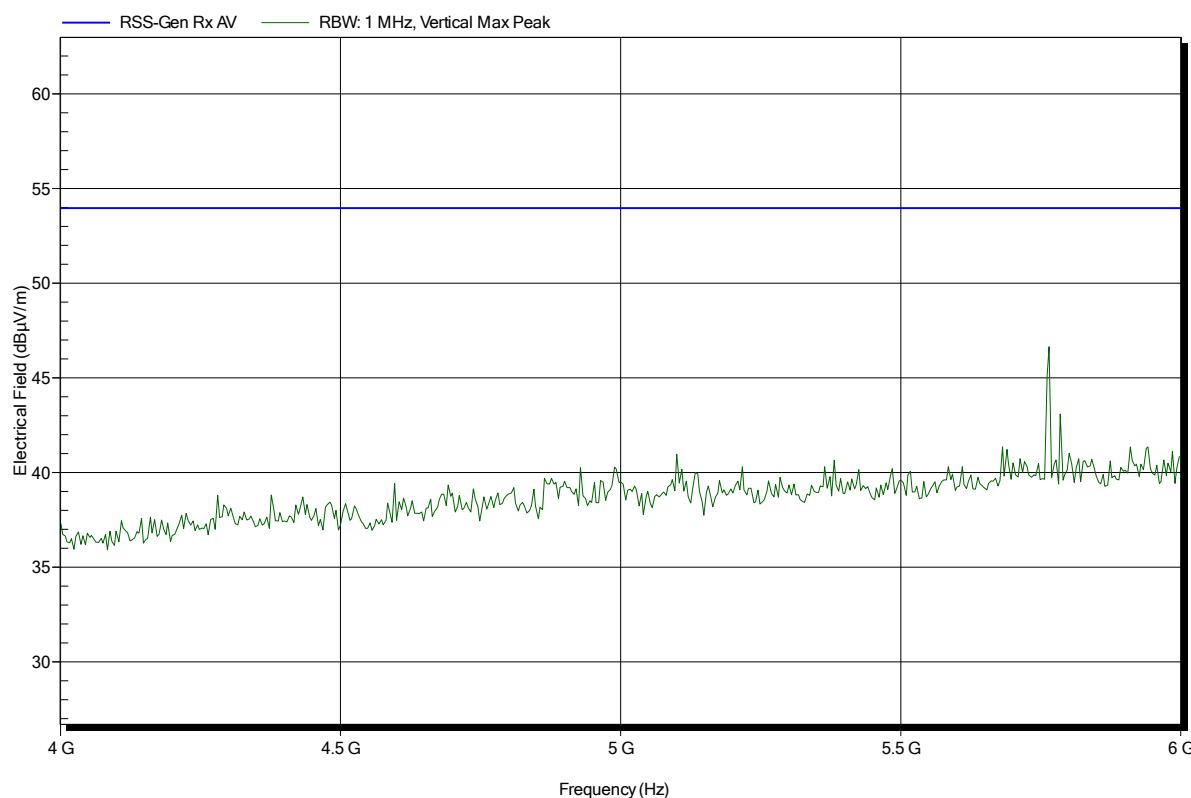


Test Report No.: G0M-1405-3835-TFC15DFP-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 88 of 114


3.14 Test Conditions and Results – Automatic discontinuation of Transmission

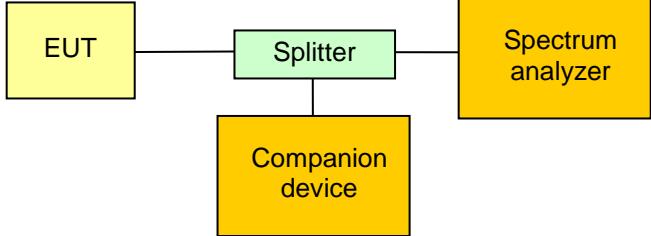Automatic discontinuation of transmission acc. to FCC 15D / RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(f) / IC RSS-213 4.3.4(a)	
Test according to measurement reference	Reference Method	
	Manual evaluation	
EUT equipment type	Fixed part	
Requirements		
The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. This is not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] </pre>		
Test procedure		
The following situations were simulated to test the reaction of the EUT:		
<ul style="list-style-type: none"> • EUT power removed • EUT switched –off • Companion device switched off • Hook-on by companion device • Hook-on by EUT • Power removed from companion device 		
The reaction of the EUT is recorded by the following results:		
A – Connection breakdown, cease of all transmissions B – Connection breakdown, EUT transmits control and signalling information C – Connection breakdown, Companion device transmits control and signalling information N/A – Not applicable (the EUT or companion device does not have an on/off switch or cannot perform hook on)		
Result		
Test	Reaction	Verdict
Power removed : EUT	A	PASS
Power removed : Companion device	C	PASS
Switch –off : EUT	N/A	PASS
Switch –off : Companion device	C	PASS
Hook-on : EUT	C	PASS
Hook-on : Companion device	C	PASS

3.15 Test Conditions and Results – Radiofrequency radiation exposure

Radiofrequency radiation exposre acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
FCC 15.319(c)(i) / IC RSS-Gen 5.6		
Requirements		
FCC : Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.		
IC : Category I and Category II equipment shall comply with the applicable requirements of RSS-102.		
Result		
Reference	Verdict	
see dedicated report : G0M-3835-TFC091ME-V01 issued by Eurofins Product Service GmbH	PASS	

3.16 Test Conditions and Results – Monitoring threshold

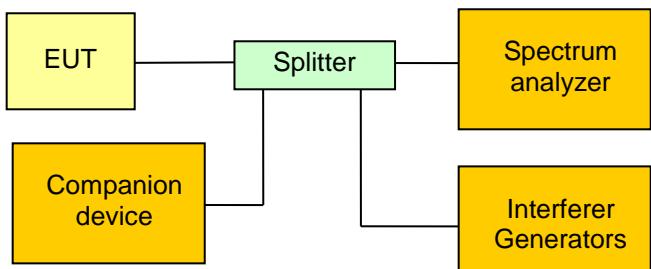
Monitoring threshold acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(2),(5),(9) / IC RSS-213 4.3.4(b)(2),(5),(9)	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.3.4	
Number of duplex channels used	5 carrier with 12 duplex timeslots = 60 duplex channels	
Requirements		
The monitoring threshold must not be more than 30 dB above the thermal noise power (KTB) of a bandwidth equivalent to the emission/occupied bandwidth of the device.		
Devices that have a power output lower than the maximum permitted under this standard may increase their detection threshold by 1 dB for each 1 dB that the transmitter power is below the maximum permitted.		
IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.		
$T_U[dBm] = -174 + 10 \cdot \log_{10}(\text{Bandwidth [Hz]}) + M_U + P_{max}[dBm] + P_{EUT}[dBm]$ $T_L[dBm] = -174 + 10 \cdot \log_{10}(\text{Bandwidth [Hz]}) + M_L + P_{max}[dBm] + P_{EUT}[dBm]$		
With $M_U = 50$ dB and $M_L = 30$ dB, P_{max} as given under "Peak transmit power" and bandwidth as emission or occupied bandwidth.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Splitter --- Interferers[Interferer Generators] </pre>		
Test procedure – Lower threshold for EUTs that do not implement LIC procedure		
<ol style="list-style-type: none"> 1. An interferer level of $T_L + U_M + 10$ dB is applied to all carrier frequencies 2. It is verified that the EUT does not transmit on any carrier frequency 3. The interferer level is decreased in 1 dB steps until the EUT starts to transmit on a channel 		
Test procedure – Upper threshold for EUTs that implement LIC procedure		
<ol style="list-style-type: none"> 1. An interferer level of $T_U + U_M + 10$ dB is applied to all carrier frequencies 2. It is verified that the EUT does not transmit on any carrier frequency 3. The interferer level is decreased in 1 dB steps until the EUT starts to transmit on a channel 		

Test results - FCC						
Threshold	Emission Bandwidth [Hz]	Noise Excess Level [dB]	Output power [dBm]	Power Limit [dBm]	Power Threshold Limit [dBm]	Threshold Level [dBm]
Upper	1426000	50	18.16	20.77	-59.8	-63
Lower	N/A	N/A	N/A	N/A	N/A	N/A
Test results - IC						
Threshold	Occupied Bandwidth [Hz]	Noise Excess Level [dB]	Output power [dBm]	Power Limit [dBm]	Power Threshold Limit [dBm]	Threshold Level [dBm]
Upper	1928448	50	18.16	20.48	-58.8	-63
Lower	N/A	N/A	N/A	N/A	N/A	N/A
Comments:						


3.17 Test Conditions and Results – LIC confirmation

LIC confirmation acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.3.4	
Requirements		
A device utilizing the provisions of FCC 47 CFR 15.323(c)(5) / IC RSS-213(b)(5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.		
Test result		
Evaluation	Verdict	
The requirement is verified using the “Monitoring time” and “LIC Selection” test.	PASS	
Comments:		

3.18 Test Conditions and Results – LIC selection

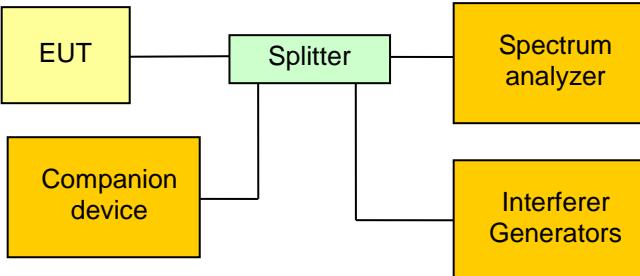LIC selection acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
		FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)	
Test according referenced standards		Reference Method	
		ANSI C63.17 7.3.3	
Requirements			
FCC: If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.			
IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.			
Test setup			
			
Test procedure			
<ol style="list-style-type: none"> 1. The EUT is forced to two carrier frequencies f_1 and f_2 only by the use of interferer generators with power levels higher than the upper threshold T_U plus the measurement uncertainty U_M of 6 dB 2. Additional interferer signals are applied to the channels f_1 and f_2 according to the result table below 3. A communication session with the companion device is initiated 4. Transmission on the least interfered channel is verified 5. The communication session is terminated 6. The communications session is established another 4 times 			
Test results			
Interferer Level f_1	Interferer Level f_2	Communication channel	Verdict
$T_L + U_M + 7$ dB	$T_L + U_M$	f_2	PASS
$T_L + U_M$	$T_L + U_M + 7$ dB	f_1	PASS
$T_L + U_M + 1$ dB	$T_L + U_M - 6$ dB	f_2	PASS
$T_L + U_M - 6$ dB	$T_L + U_M + 1$ dB	f_1	PASS
Comments: T_L corresponds to the lower threshold power value			

3.19 Test Conditions and Results – Monitoring antenna

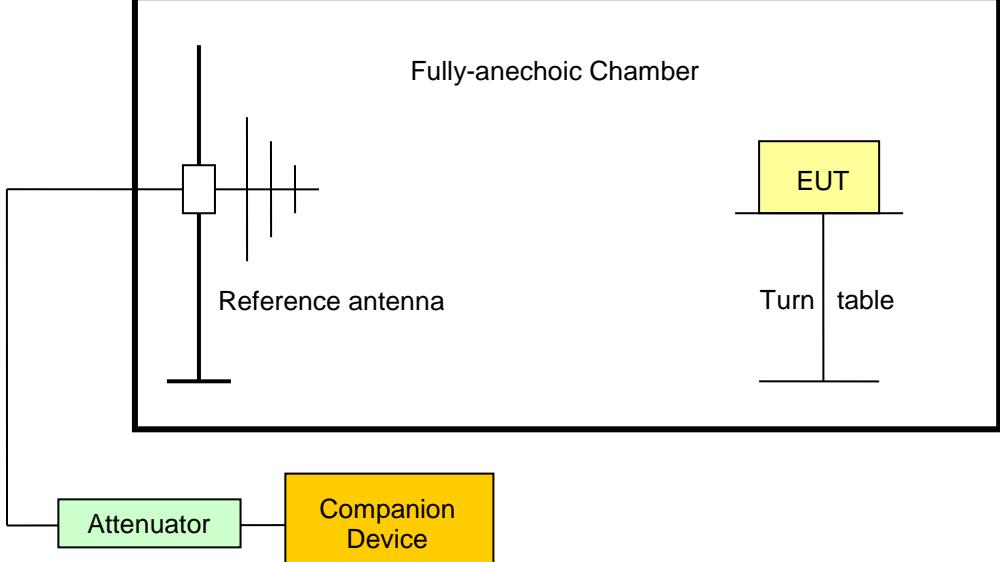Monitoring antenna acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause		Reference
		FCC 15.319(c)(8) / IC RSS-213 (b)(8)
Test according to measurement reference		Reference Method
		ANSI C63.17 4.6
Monitoring antenna		The same as transmitting antenna
Requirements		
The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.		
Test setup radiated (monitoring and transmit antenna are not the same)		
		
Test procedure (collocated monitoring antenna of different type)		
<ol style="list-style-type: none"> 1. The reference antenna is orientated for horizontal polarization 2. The EUT is placed so that the direction of maximum radiation of the transmitting antenna is facing the direction of the main lobe of the reference antenna 3. A signal with threshold power level is applied to the reference antenna 4. It is observed whether or not an connection can be established 5. The polarization of the reference antenna is changed to vertical polarization 6. It is observed whether or not an connection can be established 		


Test procedure (arbitrarily placed monitoring antenna)

1. The reference antenna is orientated for horizontal polarization
2. The EUT is placed so that the direction of maximum radiation of the transmitting antenna is facing the direction of the main lobe of the reference antenna
3. The distance between the reference antenna and the EUT is increased by the maximum distance between the monitoring and transmitting antenna
4. The EUT is aligned in such a way that the direction of minimum sensitivity faces the reference antenna
5. A signal with threshold power level is applied to the reference antenna and the EUT is illuminated
6. It is observed whether the EUT can connect to the companion device or not
7. The polarization of the reference antenna is changed to vertical polarization
8. It is observed whether or not an connection can be established


Results

Connection status	Verdict
N/A (monitoring antenna identical to transmitting antenna)	PASS


3.20 Test Conditions and Results – Monitoring time

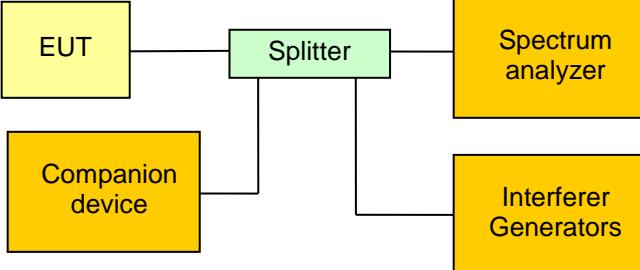Monitoring time acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
		FCC 15.323(c)(1) / IC RSS-213 4.3.4(b)(1)	
Test according referenced standards		Reference Method	
		ANSI C63.17 7.3.4	
Requirements			
Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.			
Test setup			
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Splitter --- Interferers[Interferer Generators] Companion --- Interferers </pre>			
Test procedure			
<ol style="list-style-type: none"> 1. The EUT is forced to two carrier frequencies f_1 and f_2 only by the use of interferer generators with power levels higher than the upper threshold T_U plus the measurement uncertainty U_M of 6 dB 2. The interferer level on channel frequency f_1 is also set to $T_U + U_M$ and channel f_2 has no interferer 3. A communication session is initiated on f_2 and transmission on f_2 is verified 4. An interferer level of $T_U + U_M$ is applied to f_2 and the interferer on channel f_1 is removed 20ms after the interferer on f_2 is applied 5. Transmission on f_1 and f_2 is monitored with the spectrum analyzer and it is verified that the EUT does not transmit on f_2. 			
Test results			
Initial transmit channel	Interferer level	Final transmit channel	Verdict
f_2	0	f_2	PASS
f_2	$T_U + U_M$	f_1	PASS
Comments:			

3.21 Test Conditions and Results – Monitoring bandwidth

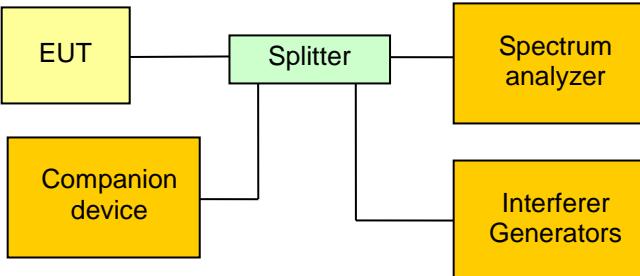Monitoring bandwidth acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
FCC 15.323(c)(7) / IC RSS-213 4.3.4(b)(7)			
Test according referenced standards		Reference Method	
ANSI C63.17 7.4			
Requirements			
The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.			
Test setup			
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- IG[Interferer Generators] Splitter --- Companion[Companion device] Companion --- IG </pre>			
Test procedure			
<ol style="list-style-type: none"> 1. Using interferer signals, operation is restricted to channels f_1 2. A communication session is established without interference on f_1 3. An interference signal is set to $f_1 + 30\%$ of the emission/occupied bandwidth with a level of $10 \text{ dB} + U_M$ above T_U or T_L as appropriate. The bandwidth of the interferer is set to be greater than 0.05 MHz. 4. It is verified that the EUT does not transmit 5. The interferer is set to $f_1 - 30\%$ of the emission/occupied bandwidth 6. It is verified that the EUT does not transmit 			
Test results			
Interferer Frequency	Interferer Level	Transmission status	Verdict
$F_{\text{LOW}} + 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{\text{LOW}} - 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{\text{HIGH}} + 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
$F_{\text{HIGH}} - 30\% \cdot \text{BW}$	$T_U + U_M + 10 \text{ dB}$	None	PASS
Comments:			


3.22 Test Conditions and Results – Monitoring reaction time

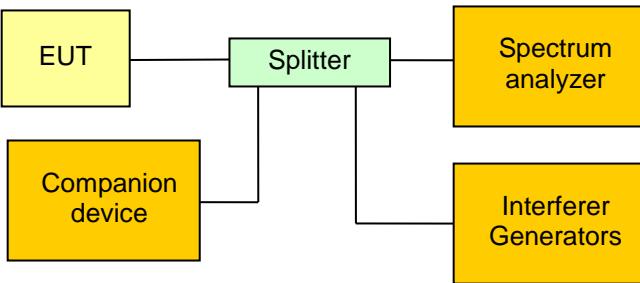
Monitoring reaction time acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(7) / IC RSS-213 4.3.4(b)(7)	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.5	
Requirements		
<p>The monitor shall have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission(occupied) bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission (occupied) bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.</p>		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Splitter Splitter --- Interferers[Interferer Generators] Interferers --- SA </pre>		
Test procedure		
<ol style="list-style-type: none"> 1. Using interferer signals operation is restricted to channel f_1 2. A time-synchronized, pulsed interference is applied to f_1 with a power level of $T_U + U_M$ or $T_L + U_M$ as appropriate 3. For systems with a 10 ms frame time and N timeslots per frame, a channel interferer with N pulses in a 10 ms repetition period is applied 4. The level of the interferer pulses is also set to $T_U + U_M$ or $T_L + U_M$ as appropriate 5. The pulse width is set to the largest of 50 μs and $50 \cdot \sqrt{1.25/\text{Bandwidth[MHz]}} \mu\text{s}$ 6. It is observed whether or not a connection can be established to the companion device 7. The level of the interferer pulses is set to 6 dB above $T_U + U_M$ or $T_L + U_M$ as appropriate 8. The pulse width is set to the largest of 35 μs and $35 \cdot \sqrt{1.25/\text{Bandwidth[MHz]}} \mu\text{s}$ 9. It is observed whether or not a connection can be established to the companion device 		

Test results - FCC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μs]	Pulse width for test [μs]	Connection possible	Verdict
F_{LOW}	1.426	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 46.8$	50.0	No	PASS
F_{LOW}	1.426	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 32.8$	35.0	No	PASS
F_{HIGH}	1.414	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 47.0$	50.0	No	PASS
F_{HIGH}	1.414	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 32.9$	35.0	No	PASS
Test results - IC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μs]	Pulse width for test [μs]	Connection possible	Verdict
F_{LOW}	1.248	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 50.0$	50.0	No	PASS
F_{LOW}	1.248	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 35.0$	35.0	No	PASS
F_{HIGH}	1.248	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 50.0$	50.0	No	PASS
F_{HIGH}	1.248	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 35.0$	35.0	No	PASS

Comments:


3.23 Test Conditions and Results – System acknowledgement

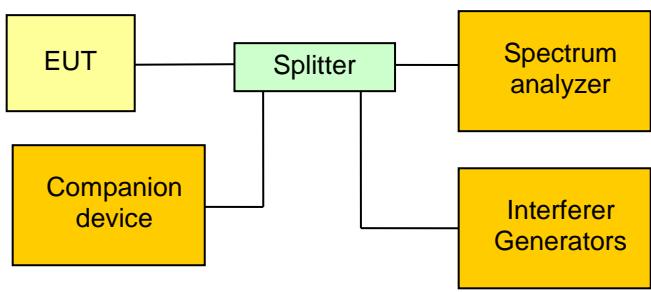System acknowledgement acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(4) / IC RSS-213 4.3.4(b)(4)	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.1.1 (Part B) / 8.2.1 (Part A)	
EUT can initiate a communication session	No	
Requirements		
Part A: Once access to specific combined time and spectrum windows is obtained, an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Part B: Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.		
Test setup – System acknowledgement (Part A)		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Interferers[Interferer Generators] Companion[Companion device] --- Splitter </pre>		
Test procedure - System acknowledgement (Part A)		
<ol style="list-style-type: none"> 1. (Applies to EUTs that can initiate a communication session (e.g. portable parts)) The acknowledgement timeslots are blocked by interferer signals 2. An attempt to establish communication session is started from the EUT 3. The emissions from the EUT are monitored to verify that the EUT does not transmit for more than 1s 4. Next the acknowledgements are unblocked and another communication session is established between the EUT and the companion device 5. It is verified that the communication session is successful 6. (Applies to all EUTs) With all acknowledges unblocked, an communication session is initiated between the EUT and the companion device 7. The acknowledgements were blocked and the time the EUT continues to transmit is recorded 		

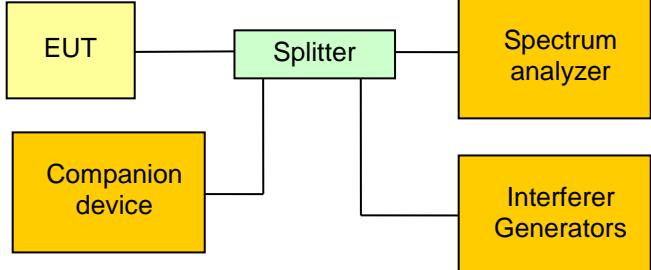Test setup – Access criteria test interval (Part B)		
		
Test procedure - Access criteria test interval (Part B)		
1. Using interferer signals operation is restricted to one channel f_1 and timeslot		
2. The EUT is active and transmission on channel/timeslot is verified		
3. The transmissions on the channel/timeslot are recorded to get the total transmission time on the channel and timeslot until the transmission stops and the access criteria procedure begins		
4. The transmission time measurement is repeated five times		
5. It is verified that each transmission does not last longer than 30 s		
Test results – System acknowledgement (Part A)		
Maximum initial transmission [s]	Transmission time limit [s]	Verdict
N/A	1	N/A
Maximum transmission time [s]	Transmission time limit [s]	Verdict
6.2	30	PASS
Test results – Access criteria test interval (Part B)		
Maximum transmission time [s]	Transmission time limit [s]	Verdict
24.99	30	PASS
Comments:		


System acknowledgments – Access criteria test interval (Part B)
ANSI C63.17 - Access criteria test interval
UPCS1900

EUT DECT Base Station for Intercommunication
Model Q-P7BS
Approval Holder Quail Digital, Ltd.
Temperature / Voltage 24°C / Vnom
Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke
Test Specification ANSI C63.17 - Access criteria test interval
Comment 1 The interval between access criteria tests
Comment 2 Measurement result: 24.99 s
Comment 3 Verdict: PASS

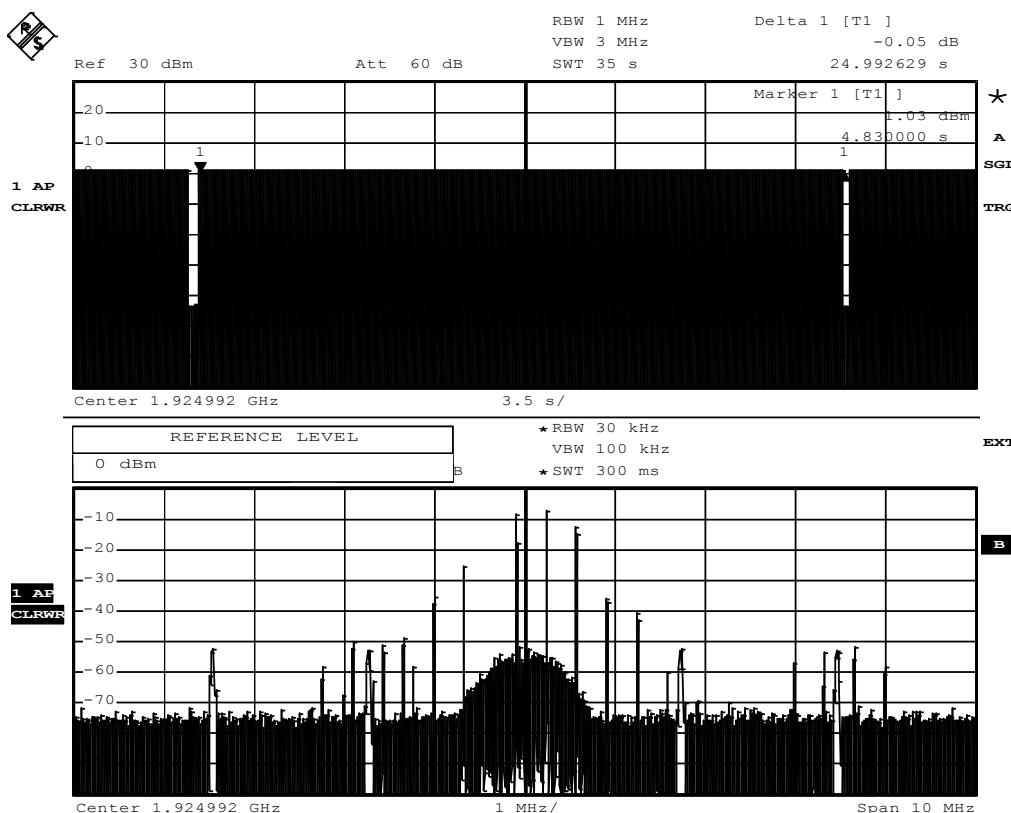

Comment: Ansi C63.17-1998 6.1.6.2
Date: 26.JUN.2014 11:40:35

3.24 Test Conditions and Results – Random waiting

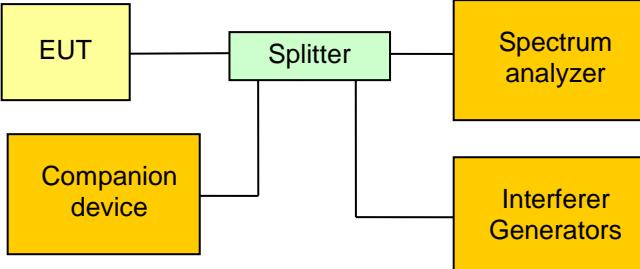
Random waiting acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(6) / IC RSS-213 4.3.4(b)(6)	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.1.2 / 8.1.3	
Random waiting option implemented	No	
Requirements		
If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing from the time when the channel becomes available.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] Interferers --- Splitter </pre>		
Test procedure – Random waiting option not implemented		
<ol style="list-style-type: none"> 1. Using interferer signals operation is restricted to channels f_1 and f_2 in a single timeslot only 2. The EUT is active and transmission on one of the two channels and timeslots is verified 3. An interferer is introduced on the channel and timeslot used by the EUT with a level of $T_U + U_M$ or $T_L + U_M$ as appropriate. 4. It is verified that the EUT next transmits on the other open channel/timeslot. 		
Test procedure – Random waiting option implemented		
<ol style="list-style-type: none"> 1. Using interferer signals operation is restricted to one channel f_1 and timeslot 2. The EUT is active and transmission on channel/timeslot is verified 3. An interferer with level $T_U + U_M$ or $T_L + U_M$ as appropriate is applied to channel f_1 4. It is verified that the EUT stops transmitting within the next 30s 5. The interferer is switched off and the time between the end of the interference and the beginning of the next transmission is measured 6. The procedure is repeated 100 times 7. For each of the time intervals it is verified that it is greater than 10ms and lower than 150ms 		

Test results – Random waiting option not implemented				
Initial channel / timeslot	Interferer Level	Final channel / timeslot	Verdict	
f_1 / Slot 2	0	f_1 / Slot 2	PASS	
f_1 / Slot 2	$T_U + U_M$	f_2 / Slot 4	PASS	
Test results – Random waiting option implemented				
Minimum waiting time [ms]	Lower limit [ms]	Maximum waiting time [ms]	Upper limit [ms]	Verdict
N/A	10	N/A	150	PASS

Comments: $f1$ =channel 2, $f2$ =channel 4


Random waiting - Random waiting option not implemented – Initial condition
ANSI C63.17 - Access criteria functional test
UPCS1900

EUT DECT Base Station for Intercommunication
 Model Q-P7BS
 Approval Holder Quail Digital, Ltd.
 Temperature / Voltage 24°C / Vnom
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke
 Test Specification ANSI C63.17 - Access criteria functional test
 Comment 1 initial condition
 Comment 2 Channl 2 time slot 2 is free
 Comment 3 Connection at channel 2 (1924,992 MHz), in time slot 2 (840 µs)

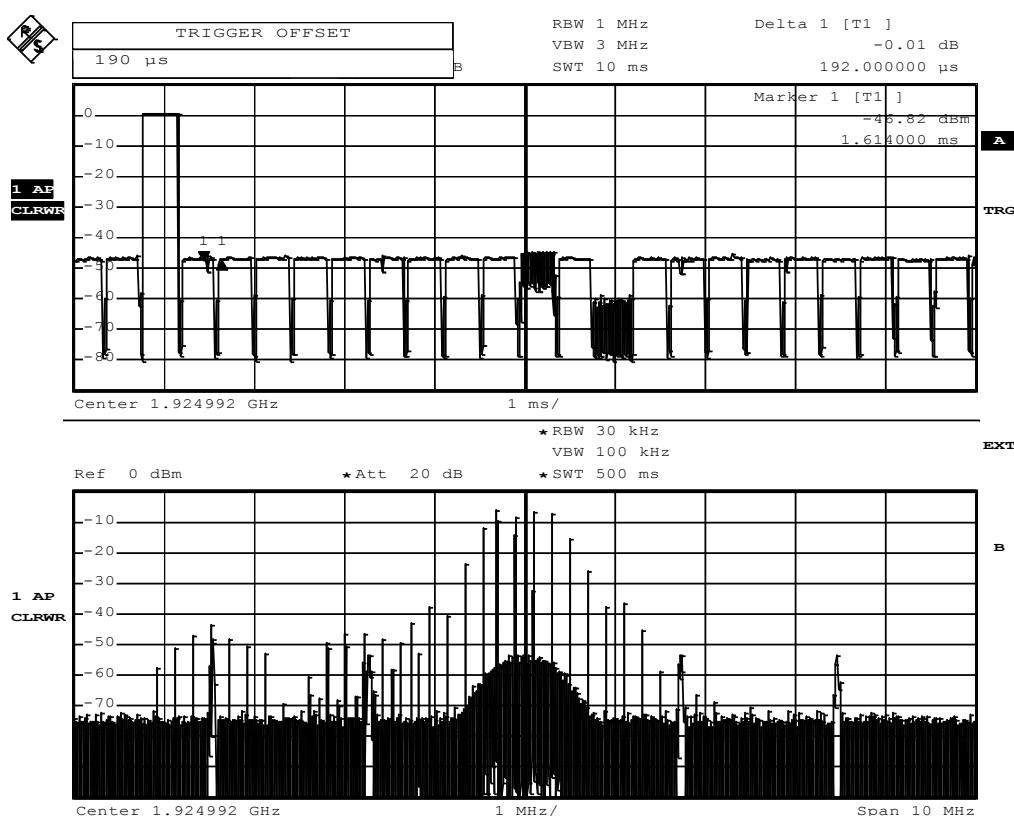


Random waiting - Random waiting option not implemented – Final condition
ANSI C63.17 - Access criteria functional test
UPCS1900

EUT DECT Base Station for Intercommunication
 Model Q-P7BS
 Approval Holder Quail Digital, Ltd.
 Temperature / Voltage 24°C / Vnom
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke
 Test Specification ANSI C63.17 - Access criteria functional test
 Comment 1 CW interference on ch. 2 (initial traffic channel)
 Comment 2 after the next pause
 Comment 3 New connection at channel 4 (1921,536 MHz), in time slot 2 (820 µs)

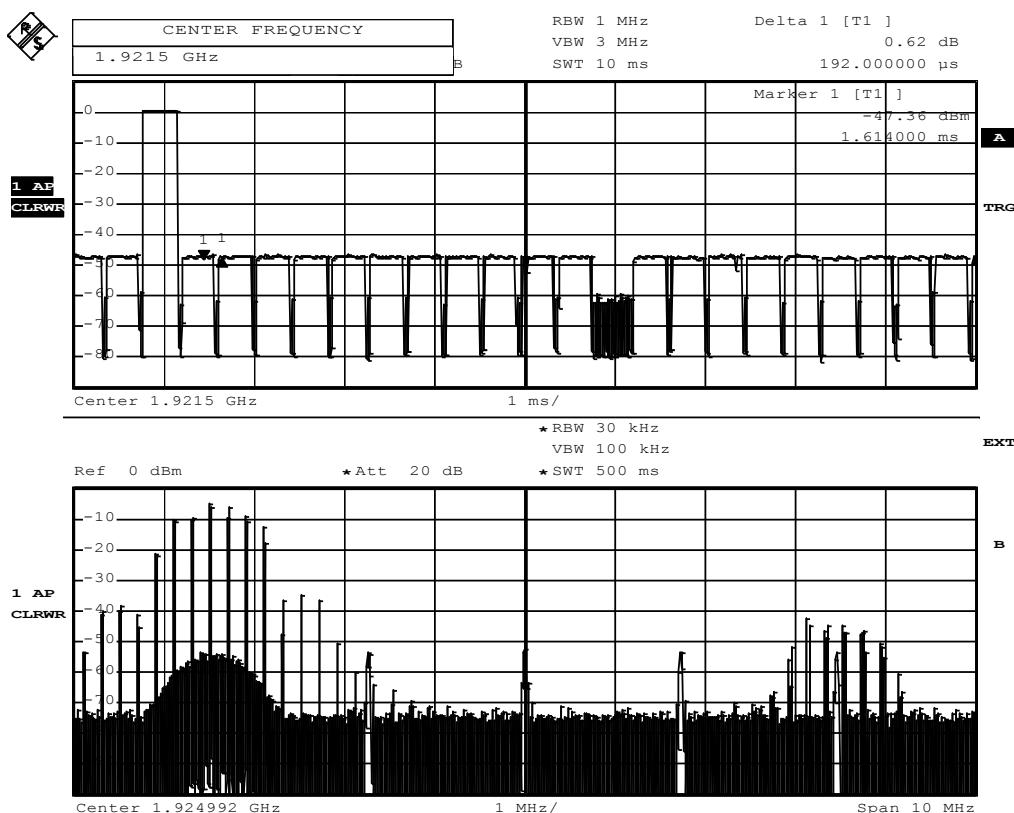

Comment: Ansi C63.17-1998 6.1.6.2
 Date: 26.JUN.2014 13:38:12

3.25 Test Conditions and Results – Maximum transmit period

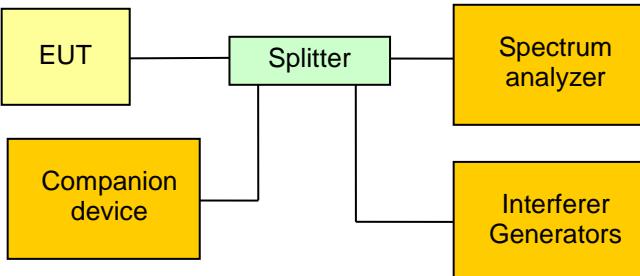Maximum transmit period acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: N/A
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(3) / IC RSS-213 4.3.4(b)(3)	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.2.2	
Requirements		
<p>If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring.</p> <p>However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.</p>		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Splitter Splitter --- Interferers[Interferer Generators] SA --- EUT </pre>		
Test procedure		
<ol style="list-style-type: none"> 1. A communication session is established between the EUT and the companion device. 2. With the beginning of the communication session a counter is started 3. An interferer is introduced on the communication channel to force the EUT to select a different communication channel if the communications has to be reestablished 4. As soon as the communication session switches to a different channel the time measurement is stopped 		
Test results		
Total transmission time [s]	Transmission time limit	Verdict
N/A	8 hours	N/A
Comments:		
<p>For the DECT system the communication session is established by the portable part and the fixed part simply follows the portable part. Hence it's the responsibility of the portable part to control the maximum transmit period.</p>		


3.26 Test Conditions and Results – Maximum spectral occupancy

Maximum spectral occupancy acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 4.3.4(b)(5)	
Test according referenced standards	Reference Method	
	Customer declaration	
Requirements		
No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.		
Test result		
Evaluation		Verdict
According to the technical documentation the total number of time and spectrum windows is: $5 \times 12 = 60$		
According to customer declaration the total number of concurrent time and spectrum windows is: 12		PASS
The number of concurrent allocated time and spectrum windows is less than one third of the total time and spectrum windows of the EUT		
Comments:		

3.27 Test Conditions and Results – Fair access

Fair access acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause		Reference
		FCC 15.323(c)(11) / IC RSS-213 4.3.4(b)(11)
Test according to measurement reference		Reference Method
		Customer declaration
Requirements		
The provisions of FCC 47 CRF 15.323(c)(10), IC RSS-213(b)(10) or FCC 47 CRF 15.323(c)(11), IC RSS-213(b)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.		
Declaration		
The manufacturer declares that this device does not work in a mode which denies fair access to spectrum for other participants		


3.28 Test Conditions and Results – Frame period and Jitter

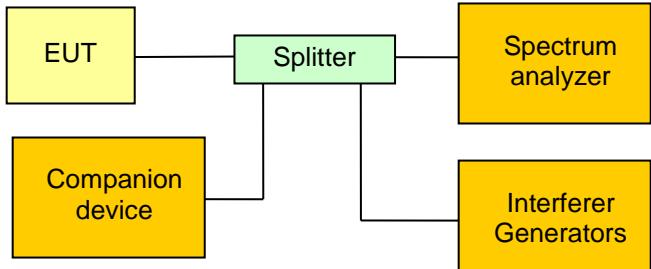Frame period and Jitter acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(e)(1),(4) / IC RSS-213 4.3.4(c)(1),(4)	
Test according referenced standards	Reference Method	
	ANSI C63.17 6.2.3	
Requirements		
<p>The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this sub-band shall be 20 milliseconds/X where X is a positive whole number.</p> <p>The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions.</p>		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] </pre>		
Test procedure		
<ol style="list-style-type: none"> 1. With a spectrum analyzer the frame periods are measured over time 2. 100 000 frames are measured 3. The the peak-to-peak, mean and standard deviation values are computed 		
Test results – Frame period		
Mean value [ms]	Divider X (10ms/X)	Verdict
9.999882 = 10.00 – 0.000118	1	PASS
Test results – Jitter		
Maximum difference between frames [μs]	Limit [μs]	Verdict
0.069	25 – 0.000118 = 24.999882	PASS
Comments:		


Frame period and Jitter
FCC Part 15.323 Frame Period and jitter
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Frame Period and jitter

Width of the 0,002757 µs
 time class
 Mean 9,999882 ms
 Deviation 0,000011
 Max-Min 0,068918 µs
 Test result Verdict = PASS

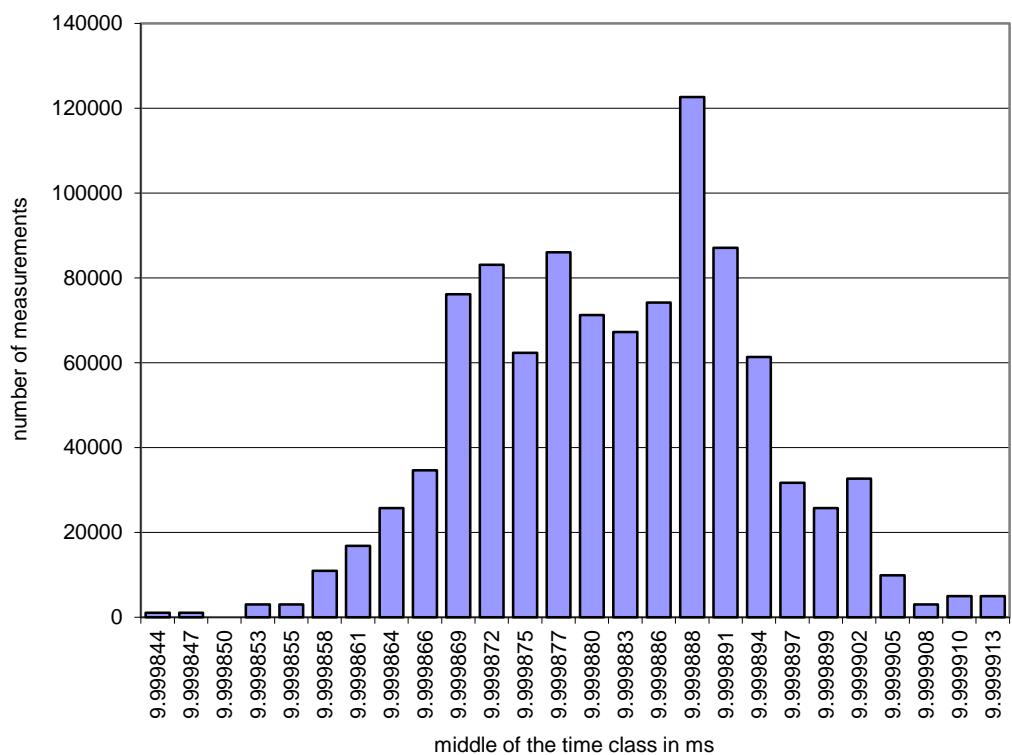Histogram


3.29 Test Conditions and Results – Frame and TDMA repetition stability

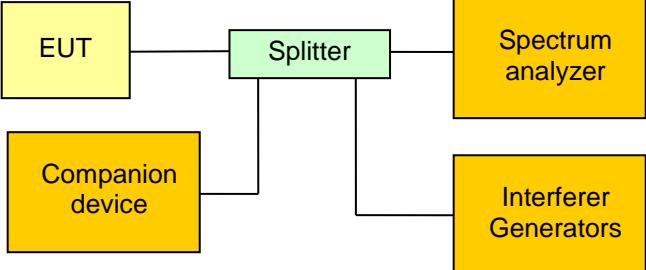Frame repetition stability acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause	Reference			
	FCC 15.323(e)(2),(3) / IC RSS-213 4.3.4(c)(2),(3)			
Test according referenced standards	Reference Method			
	ANSI C63.17 6.2.2			
Access scheme used	Time Division Multiple Access			
Requirements				
<p>Each device that implements time division for the purpose of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm).</p> <p>Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.</p>				
Test setup				
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] Interferers --- Splitter </pre>				
Test procedure				
<ol style="list-style-type: none"> 1. With a spectrum analyzer the frame repetition periods are measured over time 2. 1 000 frame repetitions are measured 3. The mean and standard deviation values are computed 				
Test results				
Access scheme	Error [ppm]	Limit [ppm]	Verdict	
Time Division Access	N/A	50	N/A	
Time Division Multiple Access	0.457791	10	PASS	
Comments:				

Frame and TDMA repetition stability
FCC Part 15.323 Frame repetition
Testprocedure ANSI 63.17
UPCS

EUT DECT Base Station for Intercommunication use
 Model Q-P7BS
 Applicant Quail Digital, Ltd
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Frame repetition

Width of the 0,000007 Hz
 frequency class
 Mean 99,999987 Hz
 Deviation 0,000015
 Stability in ppm 0,457791 ppm
 Test result Verdict = PASS

Histogram
