

FCC TEST REPORT**FCC 47 CFR Part 15D****Unlicensed Personal Communication Service Devices****Industry Canada RSS-213****2GHz License-exempt Personal Communications Service Devices (LE-PCS)****Report Reference No.** : G0M-1507-4913-TFC15DPP-V01**Testing Laboratory** : Eurofins Product Service GmbHAddress : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :

A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A**Applicant's name** : Quail Digital UKAddress : 92 Lots Road
SW10 0QD London
UNITED KINGDOM**Test specification:**Standard : 47 CFR Part 15D
47 CFR Part 15C
47 CFR Part 15B
RSS-213, Issue 3, 2015-03
RSS-Gen, Issue 4, 2014-11
ANSI C63.17:2013
ANSI C63.4:2014**Equipment under test (EUT):**

Product description DECT Wireless headset for intercommunication use

Model No. Q-P7HS

Additional Model(s) None

Brand Name(s) Quail

Hardware version Rev B

Firmware / Software version Version 1.0.0

FCC-ID: UDDQP7HS IC: 6402A-QP7HS

Test result **Passed**

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Test Lab Temperature : 20 – 23 °C
Test Lab Humidity : 32 – 38 %
Date of receipt of test item : 2015-08-07
Date (s) of performance of tests : 2015-08-07 – 2015-09-02

Compiled by : Wilfried Treffke

Tested by (+ signature) : Burkhard Pudell
(Responsible for Test)



Approved by (+ signature) : Christian Weber
(Head of Lab)



Date of issue : 2016-09-07

Total number of pages : 101

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
01	2016-09-07	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1 Photos - Equipment external	8
1.2 Photos - Equipment internal	10
1.3 Photos – Test setup	12
1.4 Supporting Equipment Used During Testing	13
1.5 Test Modes	14
1.6 Test Equipment Used During Testing	15
1.7 Sample emission level calculation	16
2 RESULT SUMMARY	17
3 TEST CONDITIONS AND RESULTS	19
3.1 Test Conditions and Results – Cross reference to subpart B	19
3.3 Test Conditions and Results – Antenna requirement	20
3.4 Test Conditions and Results – Digital modulation	21
3.5 Test Conditions and Results – Occupied Bandwidth	22
3.6 Test Conditions and Results – Emission Bandwidth	26
3.7 Test Conditions and Results – Peak transmit power	31
3.8 Test Conditions and Results – Power spectral density	35
3.9 Test Conditions and Results – Carrier frequency stability	38
3.10 Test Conditions and Results – Transmitter in-band unwanted emissions	42
3.11 Test Conditions and Results – Transmitter out-of-band emissions	46
3.12 Test Conditions and Results – Automatic discontinuation of Transmission	82
3.13 Test Conditions and Results – Radiofrequency radiation exposure	83
3.14 Test Conditions and Results – LIC Confirmation	84
3.15 Test Conditions and Results – LIC Procedure Test	85
3.16 Test Conditions and Results – LIC Selected Channel Confirmation	86
3.17 Test Conditions and Results – Monitoring antenna	87
3.18 Test Conditions and Results – Monitoring Bandwidth	88
3.19 Test Conditions and Results – Monitoring reaction time and monitoring interval	89
3.20 Test Conditions and Results – Acknowledgements	91
3.21 Test Conditions and Results – Transmission duration	93
3.22 Test Conditions and Results – Duplex connections	94
3.23 Test Conditions and Results – Fair access	96
3.24 Test Conditions and Results – Frame period and Jitter	97

3.25 Test Conditions and Results – Frame repetition stability	99
3.26 Test Conditions and Results – Maximum spectral occupancy	101

1 Equipment (Test item) Description

Description	DECT Wireless headset for intercommunication use	
Model	Q-P7HS	
Additional Model(s)	None	
Brand Name(s)	Quail	
Serial number	None	
Hardware version	Rev B	
Software / Firmware version	Version 1.0.0	
FCC-ID	UDDQP7HS	
IC	6402A-QP7HS	
Equipment type	End Product	
Radio type	DECT Portable Part	
Number of Radios	1 transceivers is built into the device	
Radio technology	DECT 6.0	
Operating frequency range	1921.536 - 1928.448MHz	
Assigned frequency band	1920 - 1930MHz	
Number of RF channels	5	
Supported slots	even only	
Number of time slots	12 x TX + 12 x RX = 24	
Channels	F_{LOW}	1928.448MHz
	F_{MID}	1924.992MHz
	F_{HIGH}	1921.536MHz
Main test frequencies	F_{LOW}	1921.536MHz
	F_{MID}	1924.992MHz
	F_{HIGH}	1928.448MHz
Modulations	GFSK	
Emission designator	F7D	
Nominal emission bandwidth	1.45 MHz	
Channel spacing	3556 kHz	
Spectrum access	Listen before transmit	
Nominal lower threshold	N/A	
Nominal upper threshold	-63 dBm	
Number of antennas	1	

Antenna 1	Type	Integrated
	Model	Not specified
	Manufacturer	Not specified
	Gain	2 dBi
Manufacturer	Quail Digital UK 92 Lots Road SW10 0QD London UNITED KINGDOM	
Power supply	V_{NOM}	3.7 VDC (lithium battery)
	V_{MIN}	N/R
	V_{MAX}	N/R
AC/DC-Adaptor	Model	6 Port Headset Charger Q-RCH
	Vendor	Quail Digital
	Input	110 - 240 VAC 50/60 Hz
	Output	5.0 VDC Used for charging the 3.7V cell
Temperature	T_{NOM}	25°C
	T_{MIN}	10°C
	T_{MAX}	40°C

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	Communication Tester	R&S	CMD 60	DECT Signaling

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Test Modes

Mode #	Description	
TDMA	General conditions:	EUT powered by laboratory power supply. Active connection to companion device.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum
Receive	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone receive Modulation = GFSK

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.2.4

Conducted					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2015-02	2016-02
Signal Generator	R&S	SMP 02	EF00165	2015-05	2017-05
Signal Generator	R&S	SMIQ 03B	EF00153	2014-09	2016-09
Signal Generator	R&S	SMIQ 03B	EF00316	2015-06	2017-06
Signal Generator	R&S	SMIQ 03	EF00316	2015-06	2017-06
Signal Generator	R&S	SMT 03	EF00164	2015-04	2017-04
Step Attenuator	R&S	RSP	EF00155	2013-11	2015-11
Frequency Standard	EFRATOM Elektronik GmbH	MFS	EF00308	2013-05	2018-05
Power Meter	R&S	NRVD	EF00139	2015-07	2016-07
Diode Power Sensor	R&S	NRV-Z1	EF00314	2015-06	2017-06

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2015-04	2016-04
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading} - \text{FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15D, 15C, IC RSS-213, IC RSS-Gen				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
FCC 15.309(b)	Cross reference to subpart B	declaration	N/A	
FCC 15.315 FCC 15.207 IC RSS-213 5.4 IC RSS-213 3.1 IC RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	N/A	EUT exclusively battery powered
FCC 15.317 FCC 15.203 IC RSS-213 4.1(e)	Antenna requirements	visual inspection	PASS	
FCC 15.319(b) IC RSS-213 5.1	Digital modulation	ANSI C63.17 6.1.4	PASS	
IC RSS-213 5.5 RSS-Gen 3.1	Occupied bandwidth	RSS-Gen 6.6	PASS	
FCC 15.323(a)	Emission Bandwidth	ANSI C63.17 6.1.3	PASS	
FCC 15.319(c) FCC 15.319(e) IC RSS-213 5.6	Peak transmit power	ANSI C63.17 6.1.2	PASS	
FCC 15.319(d) IC RSS-213 5.7	Power spectral density	ANSI C63.17 6.1.5	PASS	
FCC 15.323(f) IC RSS-213 5.3	Carrier frequency stability	ANSI C63.17 6.2.1	PASS	
FCC 15.323(d) IC RSS-213 5.8.2	Transmitter in-band unwanted emissions	ANSI C63.17 6.1.6.1	PASS	
FCC 15.323(d) IC RSS-213 5.8.1	Transmitter out-of-band emissions	ANSI C63.17 6.1.6.2 ANSI C63.4	PASS	
IC RSS-213 3.1 IC RSS-Gen 7.1	Receiver spurious emissions	ANSI C63.4	PASS	
FCC 15.319(f) IC RSS-213 5.2	Automatic discontinuation of transmission	functional test	PASS	
FCC 15.319(i) RSS-102	Radiofrequency radiation exposure	dedicated report	PASS	
FCC 15.323(c)(5) IC RSS-213 5.2	LIC Confirmation	ANSI C63.17 7.3.2 / 7.3.3	PASS	Reference to "LIC procedure test" and "LIC Selected Channel Confirmation" only
FCC 15.323(c)(5) IC RSS-213 5.2	LIC Procedure Test	ANSI C63.17 7.3.2	PASS	
FCC 15.323(c)(1) IC RSS-213 5.2	LIC Selected Channel Confirmation	ANSI C63.17 7.3.3	PASS	
FCC 15.323(c)(8) IC RSS-213 5.2	Monitoring antenna	ANSI C63.17 4	PASS	
FCC 15.323(c)(7) IC RSS-213 5.2	Monitoring bandwidth	ANSI C63.17 7.4	PASS	

FCC 15.323(c)(7) IC RSS-213 5.2	Monitoring reaction time and monitoring interval	ANSI C63.17 7.5	PASS	
FCC 15.323(c)(6) IC RSS-213 5.2	Access criteria test interval	ANSI C63.17 8.1.1	N/A	Only FP
FCC 15.323(c)(6) IC RSS-213 5.2	Access criteria functional test	ANSI C63.17 8.1.2 / 8.1.3	N/A	Only FP
FCC 15.323(c)(4) IC RSS-213 5.2	Acknowledgements	ANSI C63.17 8.2.1	PASS	
FCC 15.323(c)(3) IC RSS-213 5.2	Transmission duration	ANSI C63.17 8.2.2	PASS	
FCC 15.323(c)(10) IC RSS-213 5.2	Duplex connections	ANSI C63.17 8.3	PASS	Only PP
FCC 15.323(c)(11) IC RSS-213 5.2	Alternative monitoring interval	ANSI C63.17 8.4	N/A	
FCC 15.323(c)(12) IC RSS-213 5.2	Fair access	declaration	PASS	
FCC 15.323(e) IC RSS-213 5.2	Frame period and Jitter	ANSI C63.17 6.2.3	PASS	
FCC 15.323(e) IC RSS-213 5.2	Frame repetition stability	ANSI C63.17 6.2.2	PASS	
FCC 15.323(c)(5) IC RSS-213 5.2	Maximum spectrum occupancy	declaration	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Cross reference to subpart B

Cross reference to subpart B acc. to FCC 47 CFR 15D		Verdict: N/A
EUT requirement rule parts and clause	Reference	
	FCC 15.309(b)	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
The requirements of subpart D apply only to the radio transmitter contained in the PCS device. Other aspects of the operation of a PCS device may be subject to requirements contained elsewhere in this chapter. In particular, a PCS device that includes digital circuitry not directly associated with the radio transmitter also is subject to the requirements for unintentional radiators in subpart B.		
Result		
The test results related to subpart B are given in a dedicated test report		

3.2


3.3 Test Conditions and Results – Antenna requirement

Antenna requirement acc. to FCC 47 CFR 15D		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
		FCC 15.317 / FCC 15.203	
Test according to measurement reference		Reference Method	
		visual inspection & declaration	
Requirements			
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.			
When an antenna conducted measurement is used to determine the RF output power of the device, the effective gain of the antenna intended for the device must be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 3 dBi (3 dB above isotropic gain) shall be added to the measured RF output power before using the power limits			
Results			
Antenna No.	Type	Antenna gain [dBi]	Antenna gain in excess of 3dBi
1	internal	2.0	0

3.4 Test Conditions and Results – Digital modulation


Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(b) / IC RSS-213 5.1	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
All transmissions must use only digital modulation techniques.		
Results		
<p>The test sample is an isochronous digital modulated device that operates in 1920-1930 MHz band. This device bases on DECT technology described in European Standards EN 300 175-2 and EN 300 175-3, now operating in frequency channels mentioned above.</p> <p>The operating modes are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation.</p> <p>For further details see operational description provided by manufacturer.</p>		

3.5 Test Conditions and Results – Occupied Bandwidth

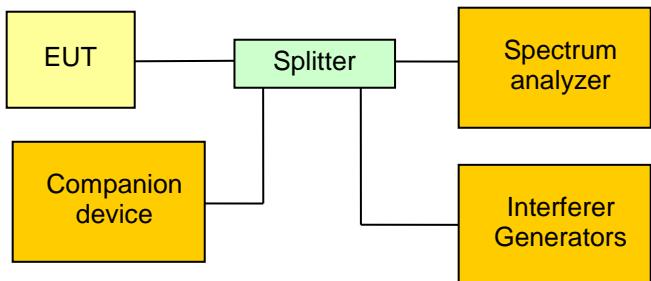Occupied Bandwidth acc. to IC RSS-213		Verdict: PASS
Test according to measurement reference		Reference Method IC RSS-213 5.5 / IC RSS-Gen 6.6
Tested frequencies		F_{LOW} / F_{MID} / F_{HIGH}
EUT test mode		TDMA
Limits		
0.05 MHz \leq Occupied Bandwidth $<$ 2.5 MHz		
Test setup		
		
Test procedure		
<ol style="list-style-type: none"> 1. EUT is restricted to test channel with the interferes 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of span 4. Occupied Bandwidth (99%) measurement with spectrum analyzer built in measurement function 		
Test results		
Channel	Center frequency [MHz]	Occupied Bandwidth [MHz]
F_{LOW}	1921.536	1.200
F_{MID}	1924.992	1.208
F_{HIGH}	1928.448	1.216
Comments:		

Occupied Bandwidth - F_{LOW}
**RSS Gen
Occupied Bandwidth**


EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Approval Holder Quail Digital UK
 Temperature / Voltage 25°C / Vnom
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke
 Test Specification Occupied Bandwidth
 Comment 1 Channel.: 4
 Comment 2 A spectrum analyzer with an integrated 99% power BW function is used
 Comment 3 OBW: 1.20 MHz

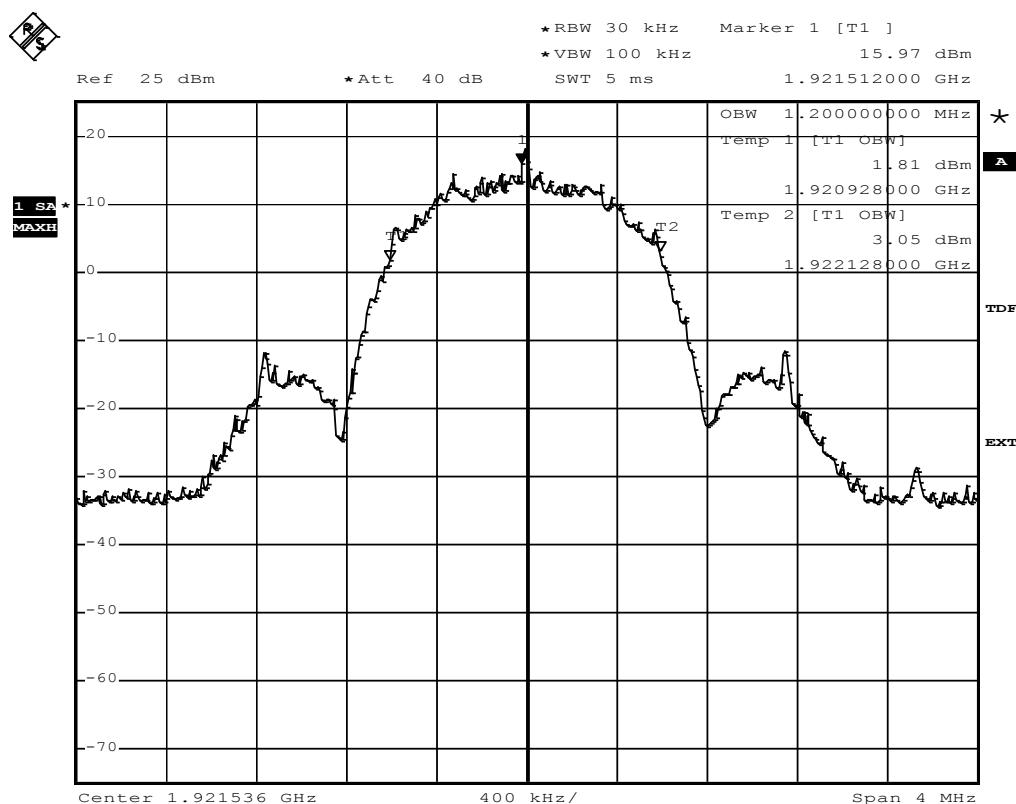

Comment: -
 Date: 3.AUG.2015 14:45:17

Occupied Bandwidth – F_{MID}
**RSS Gen
Occupied Bandwidth**


EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Approval Holder Quail Digital UK
 Temperature / Voltage 25°C / Vnom
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke
 Test Specification Occupied Bandwidth
 Comment 1 Channel.: 2
 Comment 2 A spectrum analyzer with an integrated 99% power BW function is used
 Comment 3 OBW: 1.208 MHz

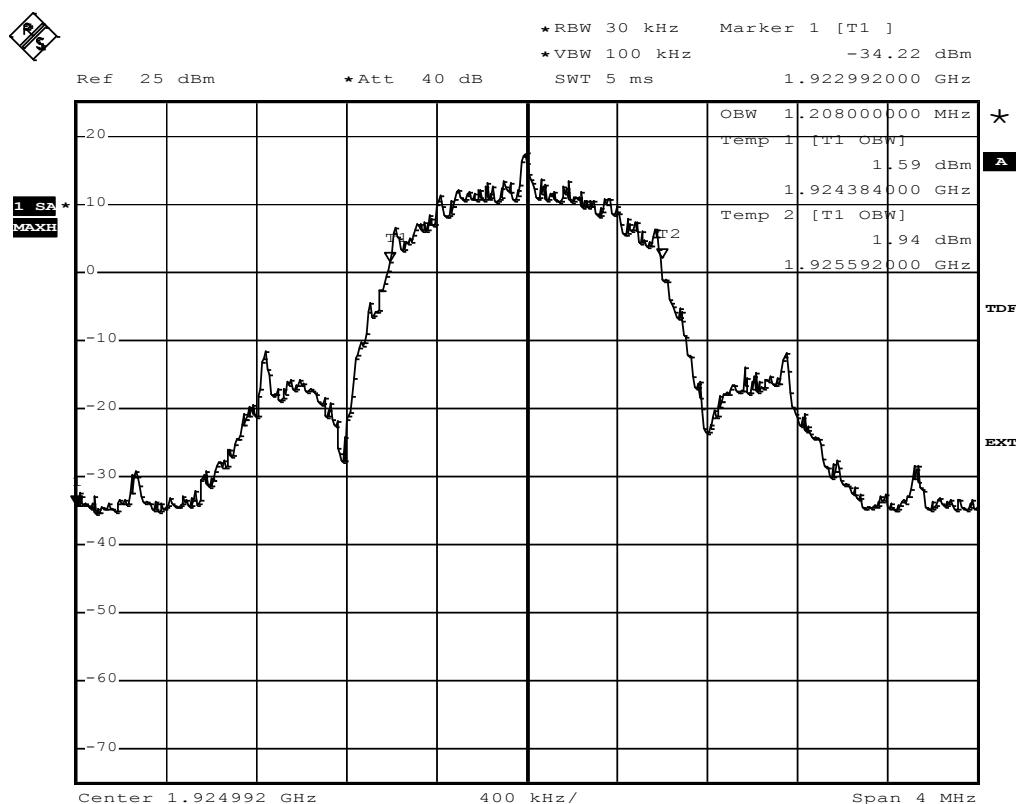

Comment: -
 Date: 3.AUG.2015 14:50:57


Occupied Bandwidth – F_{HIGH}
**RSS Gen
Occupied Bandwidth**

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Approval Holder Quail Digital UK
 Temperature / Voltage 25°C / Vnom
 Test Site / Operator Eurofins Product Service GmbH / Mr. W. Treffke
 Test Specification Occupied Bandwidth
 Comment 1 Channel.: 0
 Comment 2 A spectrum analyzer with an integrated 99% power BW function is used
 Comment 3 OBW: 1.216 MHz

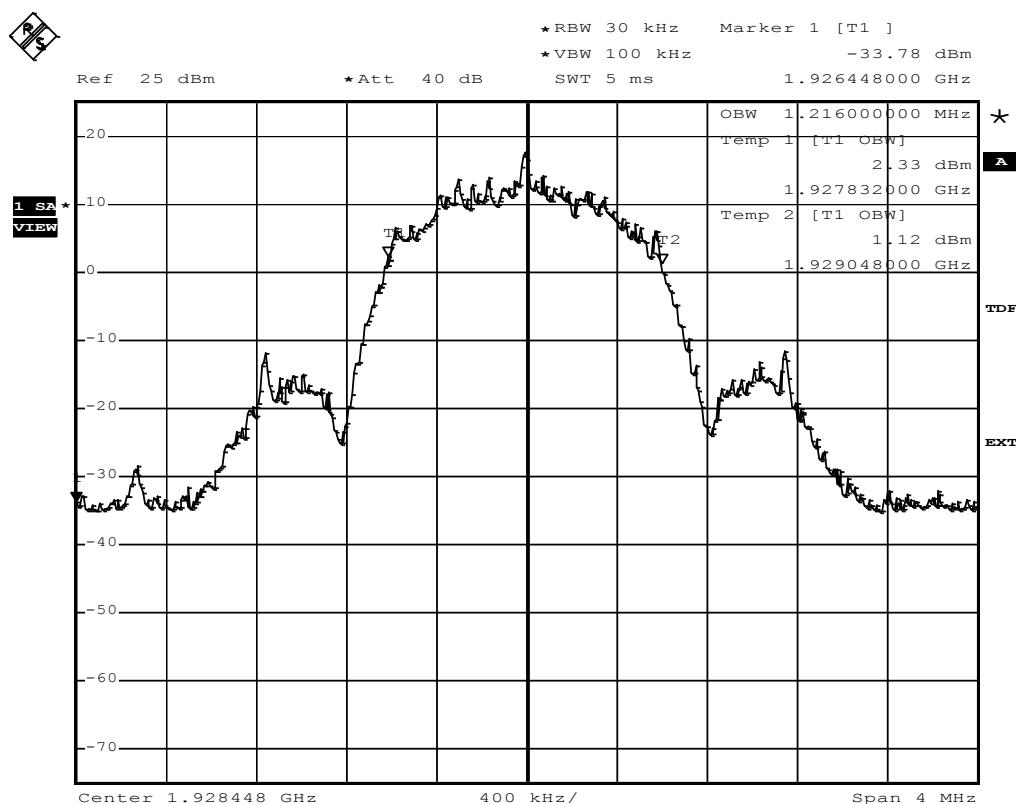

Comment: -
 Date: 3.AUG.2015 14:56:06

3.6 Test Conditions and Results – Emission Bandwidth

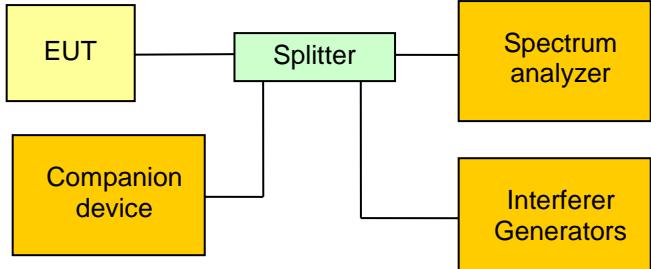Emission Bandwidth acc. to FCC 47 CFR 15D		Verdict: PASS	
EUT requirement rule parts and clause	Reference		
	FCC 15.323(a)		
Test according to measurement reference	Reference Method		
	ANSI C63.17 6.1.3		
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$		
EUT test mode	TDMA		
Limits			
0.05 MHz ≤ Emission Bandwidth < 2.5 MHz			
Test setup			
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] </pre>			
Test procedure			
<ol style="list-style-type: none"> 1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of emission bandwidth and detector is set to peak with max hold 4. The emission bandwidth is determined by the two -26dB points left and right of the maximum emission level 5. (The emission bandwidth is determined by the two -12dB points left and right of the maximum emission level) 6. (The emission bandwidth is determined by the two -6dB points left and right of the maximum emission level) 			
Test result			
Channel	Center frequency [MHz]	Mode	Bandwidth [MHz]
F_{LOW}	1921.536	-26 dB	1.452
F_{HIGH}	1928.448	-26 dB	1.456
F_{LOW}	1921.536	-12 dB	1.170
F_{HIGH}	1928.448	-12 dB	1.170
F_{LOW}	1921.536	-6 dB	0.850
F_{HIGH}	1928.448	-6 dB	0.876
Comments:			

Test Report No.: G0M-1507-4913-TFC15DPP-V01


 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Emission Bandwidth – F_{LOW}
FCC Part 15.303 Emission bandwidth
**Test procedure ANSI 63.17
UPCS**

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.45MHz
 Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

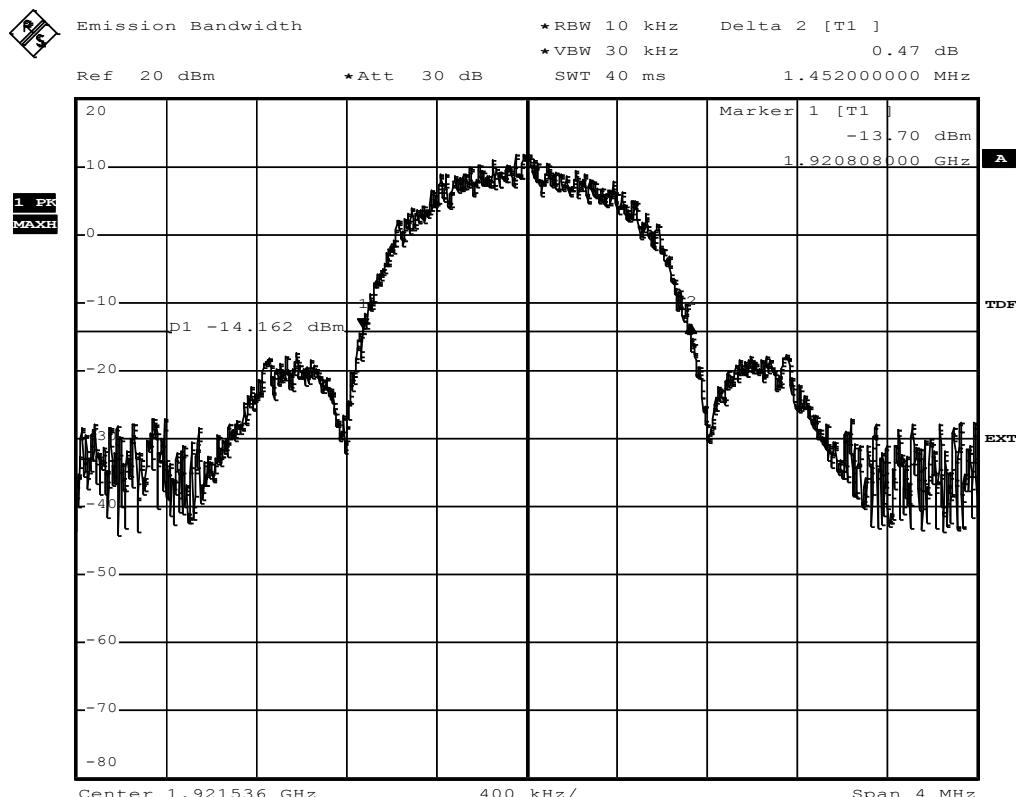

Comment: Ansi C63.17-2006 6.1.3
 Date: 1.JAN.2000 02:11:32

**Additional values as required for the detailed threshold monitoring bandwidth test
ANSI C63.17-1988 7.4.2**

-6 dB points

Lower frequency	: 1921.11MHz
Higher frequency	: 1921.96MHz

-12 dB points


Lower frequency	: 1920.954MHz
Higher frequency	: 1922.124MHz

Emission Bandwidth – F_{HIGH}
FCC Part 15.303 Emission bandwidth
Test procedure ANSI 63.17
UPCS

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.46MHz
 Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

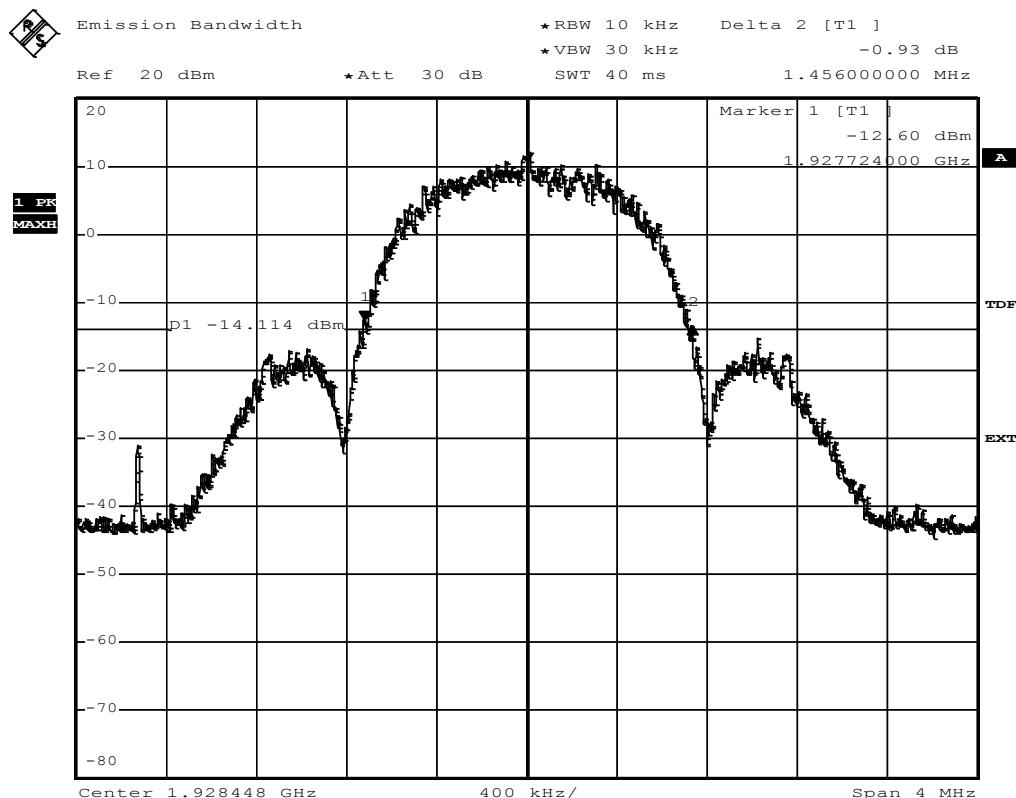

Comment: Ansi C63.17-2006 6.1.3
 Date: 1.JAN.2000 01:45:26

 Test Report No.: G0M-1507-4913-TFC15DPP-V01

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Additional values as required for the detailed threshold monitoring bandwidth test
ANSI C63.17-1988 7.4.2**


-6 dB points

Lower frequency	: 1927.986MHz
Higher frequency	: 1928.862MHz

-12 dB points

Lower frequency	: 1927.866MHz
Higher frequency	: 1929.036MHz


3.7 Test Conditions and Results – Peak transmit power

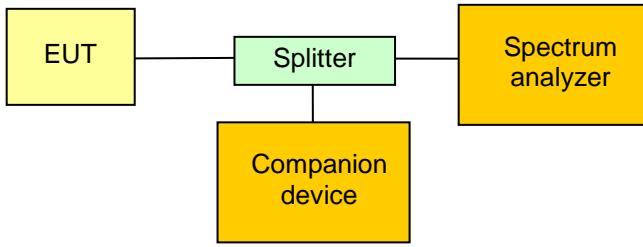Peak transmit power acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS				
EUT requirement rule parts and clause		Reference				
FCC 15.319(c),(e) / IC RSS-213 5.6						
Test according to measurement reference		Reference Method				
ANSI C63.17 6.1.2						
Tested frequencies		$F_{\text{LOW}} / F_{\text{HIGH}}$				
EUT test mode		TDMA				
Antenna excess gain		0 dB				
Limits						
Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.						
$P_{\text{EUT}}[\text{dBm}] \leq P_{\text{limit}} \text{ where } P_{\text{limit}} = \begin{cases} P_{\text{max}} - (G_A - g), & \text{when } G_A > 3 \text{ dBi} \\ P_{\text{max}}, & G_A < 3 \text{ dBi} \end{cases}$ $P_{\text{max}}[\text{dBm}] = 5 \log(\text{Emission}/\text{Occupied Bandwidth} [\text{Hz}]) - 10 \text{ dBm}$						
Test setup						
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] </pre>						
Test procedure						
<ol style="list-style-type: none"> 1. EUT set to test mode 2. The RBW is set to be larger than the emission bandwidth and $\text{VBW} \geq \text{RBW}$ 3. Transmission burst is measured in zero span and peak detector 4. The maximum level in the burst is recorded as peak transmit power 						
Test results - FCC						
Channel	Frequency [MHz]	Peak Power [dbm]	Emission Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F_{LOW}	1921.536	19.89	1452000	0	20.81	-00.92
F_{HIGH}	1928.448	19.82	1456000	0	20.82	-01.00

Test results - IC						
Channel	Frequency [MHz]	Peak Power [dbm]	Occupied Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F _{LOW}	1921.536	19.89	1200000	0	20.40	-00.51
F _{HIGH}	1928.448	19.82	1216000	0	20.42	-00.60
Comments:						

Peak Power – F_{LOW}
FCC Part 15.319 Peak Transmit Power limit
**Test procedure ANSI 63.17
UPCS**


EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Peak transmit power
 Supply
 Measured Bandwidth 1.452MHz
 Max. Permitted Power 20,8 dBm
 Measured Power 19.89 dBm
 Test result Verdict = PASS

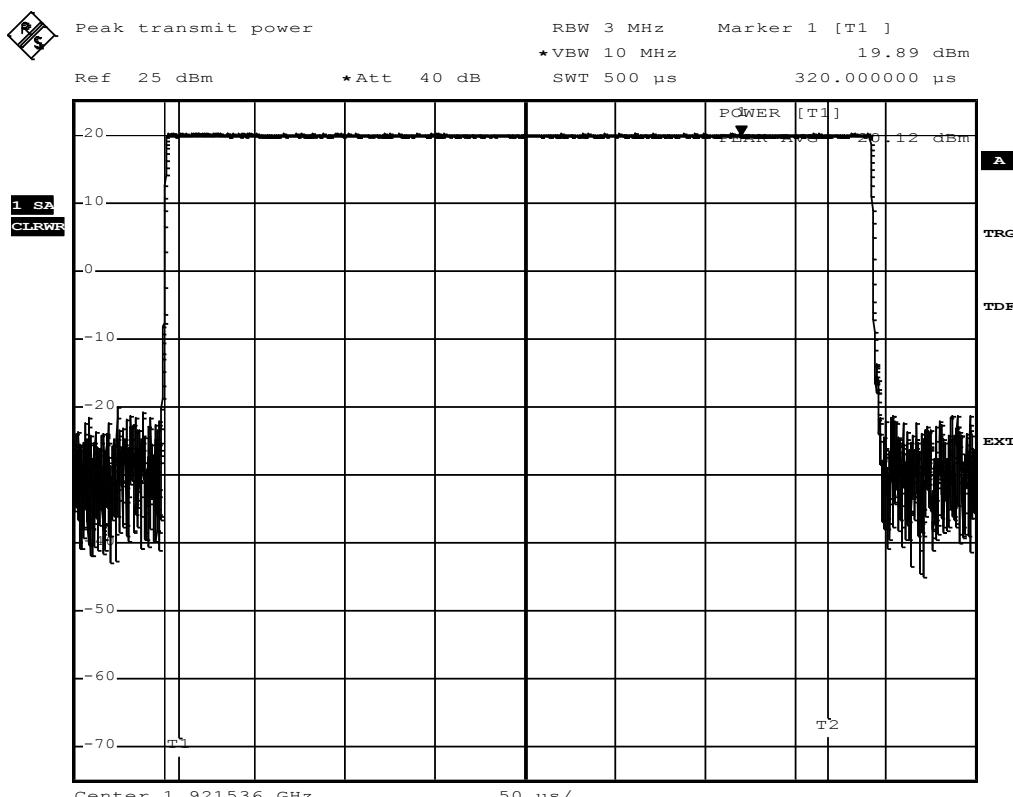

Comment: Ansi C63.17-2006 6.1.2
 Date: 1.JAN.2000 02:21:01


Peak Power – F_{HIGH}
FCC Part 15.319 Peak Transmit Power limit
**Test procedure ANSI 63.17
UPCS**

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Peak transmit power
 Supply
 Measured Bandwidth 1.456MHz
 Max. Permitted Power 20,82 dBm
 Measured Power 20,06 dBm
 Test result Verdict = PASS

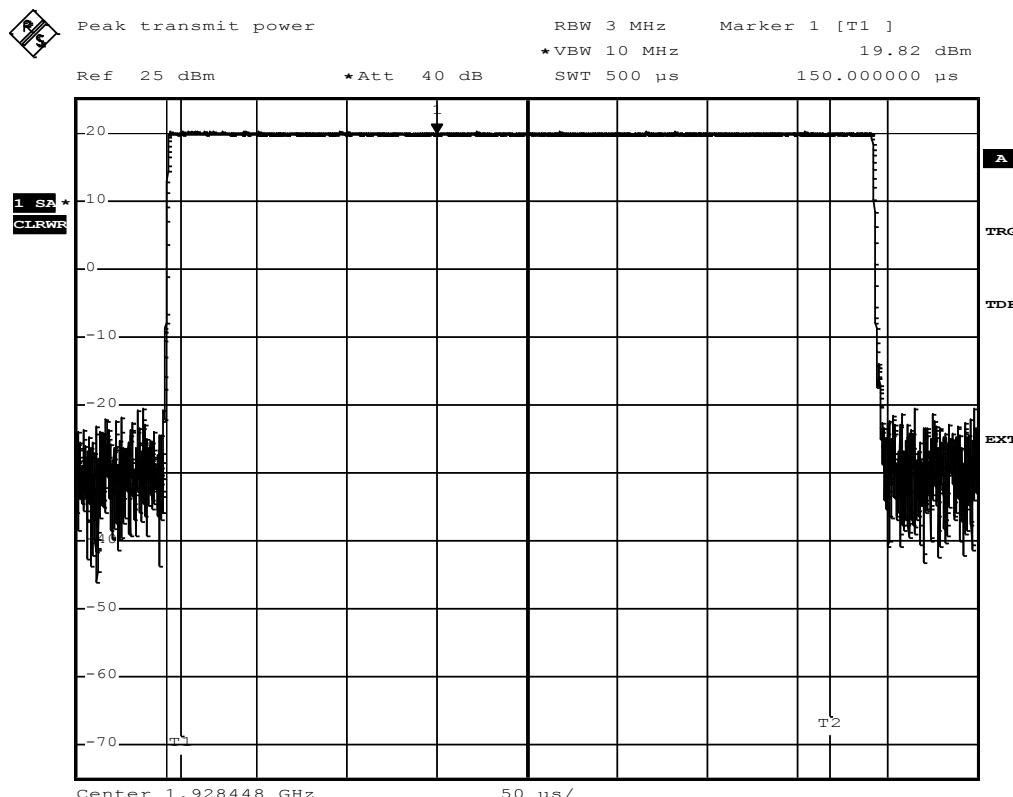

Comment: Ansi C63.17-2006 6.1.2
 Date: 1.JAN.2000 01:54:24

3.8 Test Conditions and Results – Power spectral density

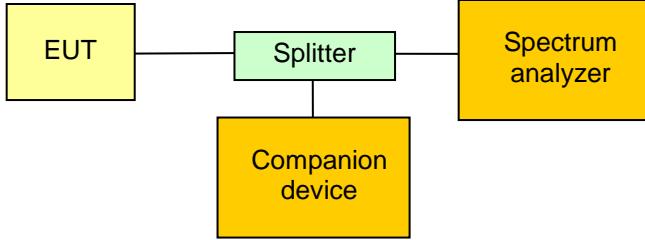
Power spectral density acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause	Reference			
	FCC 15.319(d) / IC RSS-213 5.7			
Test according to measurement reference	Reference Method			
	ANSI C63.17 6.1.5			
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$			
EUT test mode	TDMA			
Limits				
$\leq 3 \text{ mW (4.77 dBm) / 3 kHz}$				
Test setup				
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- Companion[Companion device] Splitter --- SA[Spectrum analyzer] </pre>				
Test procedure				
<ol style="list-style-type: none"> 1. EUT set to test mode 2. The RBW is set to 3 kHz and VBW $\geq 3 \times$ RBW 3. The center frequency is set to the maximum of the emission envelope and the span is set to zero 4. With sample detector and a minimum of 100 sweeps the -20 dB points below the first peak are determined and the data points between the two -20 dB points are summed and normalized to get the average pulse power in a 3 kHz bandwidth 				
Test results				
Channel	Frequency [MHz]	Peak Density [dbm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
F_{LOW}	1921.532	-1.71	4.77	-06.48
F_{HIGH}	1928.444	-0.40	4.77	-05.17
Comments:				

Power Spectral Density – F_{LOW}
FCC Part 15.319 Power spectral density
**Test procedure ANSI 63.17
UPCS**

EUT	DECT Wireless headset for intercommunication use
Model	Q-P7HS
Applicant	Quail Digital UK
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1921,544000 MHz
Total pulse energy in mW	0,000264 mW
Wideband pulse duration in ms	0,392288 ms
PSD in mW	0,6742 mW
PSD in dBm	-1,7124 dBm

Pass criteria: PSD is less than 3mW

Verdict = PASS

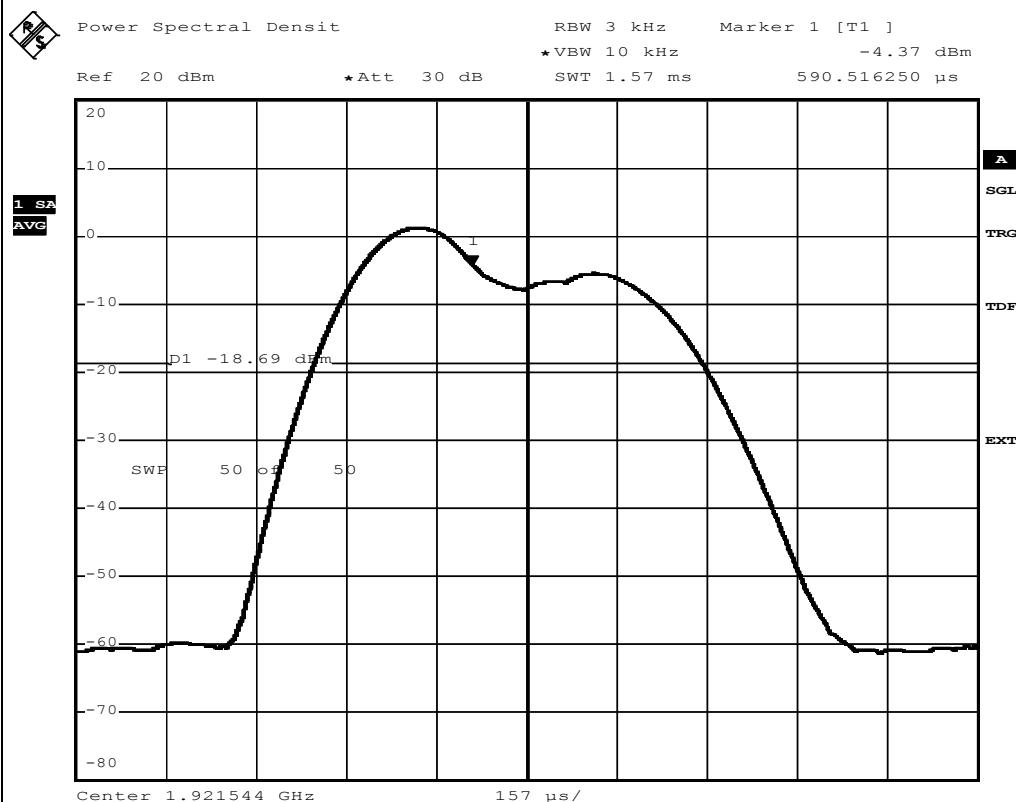


Comment: Ansi C63.17-2006 6.1.5
 Date: 1.JAN.2000 02:15:46

Power Spectral Density – F_{HIGH}
FCC Part 15.319 Power spectral density
**Test procedure ANSI 63.17
UPCS**


EUT	DECT Wireless headset for intercommunication use
Model	Q-P7HS
Applicant	Quail Digital UK
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1928,462000 MHz
Total pulse energy in mW	0,000358 mW
Wideband pulse duration in ms	0,392425 ms
PSD in mW	0,9119 mW
PSD in dBm	-0,4004 dBm

Pass criteria: PSD is less than 3mW

Verdict = PASS

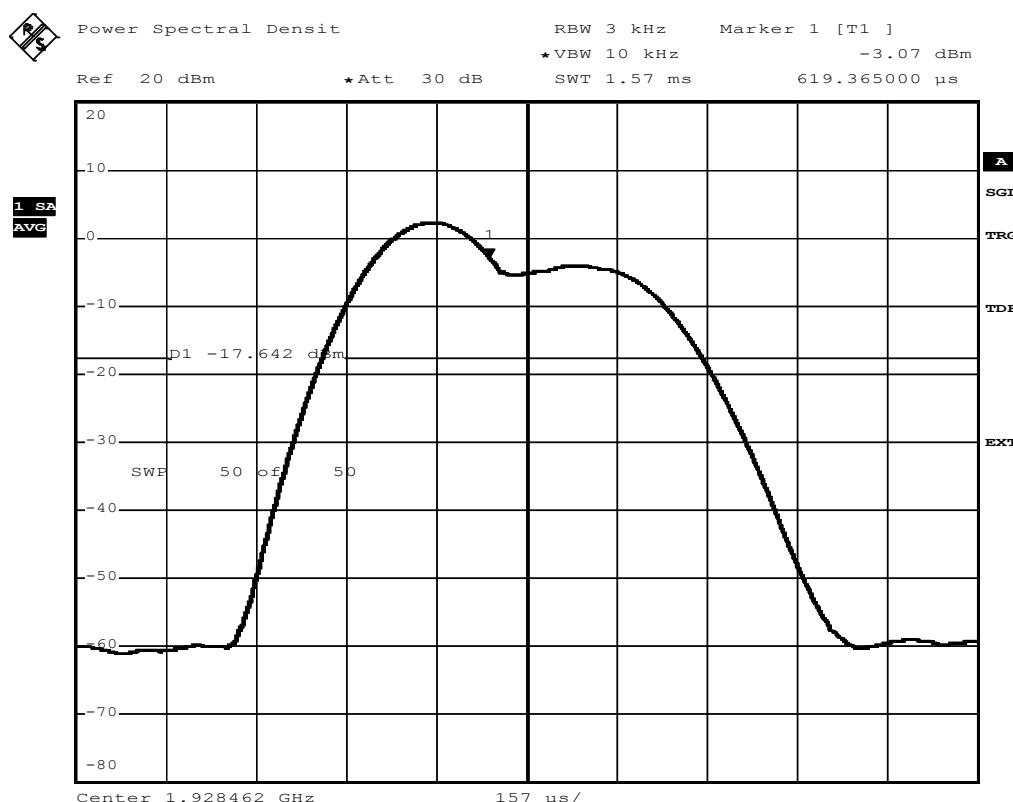

 Comment: Ansi C63.17-2006 6.1.5
 Date: 1.JAN.2000 01:51:19

3.9 Test Conditions and Results – Carrier frequency stability

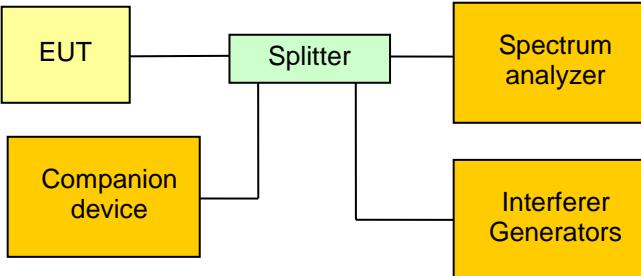Carrier frequency stability acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause	Reference			
	FCC 15.323(f) / IC RSS-213 5.3			
Test according to measurement reference	Reference Method			
	ANSI C63.17 6.2.1			
Tested frequencies	F_{MID}			
EUT test mode	TDMA			
Limits				
± 10 ppm / hour				
Test setup				
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- IG[Interferer Generators] Splitter --- Companion[Companion device] Companion --- IG </pre>				
Test procedure				
<ol style="list-style-type: none"> With interferer signals the EUT is forced to center channel and communication to companion device is established. The demodulated carrier EUT signal is captured over time The mean frequency is determined under all supply voltage and temperature conditions 				
Test results				
Voltage	Temperature	Maximum Frequency deviation [ppm]	Limit [ppm]	Margin [ppm]
3.7 VDC	25°C	0.00 (reference)	± 10.0	N/A
3.7 VDC	10°C	-0.34	± 10.0	-09.66
3.7 VDC	40°C	-0.05	± 10.0	-09.95
Comments:				


Carrier stability – Frequency stability – T_{NOM} V_{NOM}
FCC Part 15.323 Frequency Stability
Test procedure ANSI 63.17

EUT	DECT Wireless headset for intercommunication use
Model	Q-P7HS
Applicant	Quail Digital UK
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	V_{nom}
Frequency of carrier	1924,993877 MHz
Measured mean	1924,993877 MHz
Stability (supply temp)	-0,00 ppm
Result	Verdict = PASS
Stability over time	fmax : 1,29 ppm fmin : 0,98 ppm
Result	Verdict = PASS

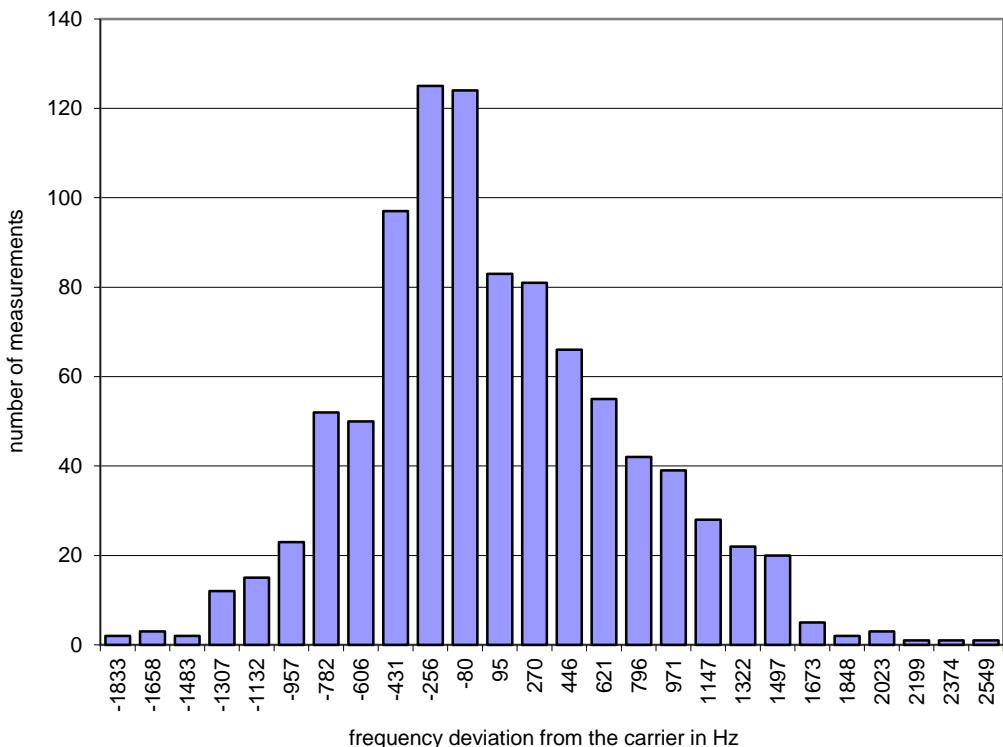Histogram


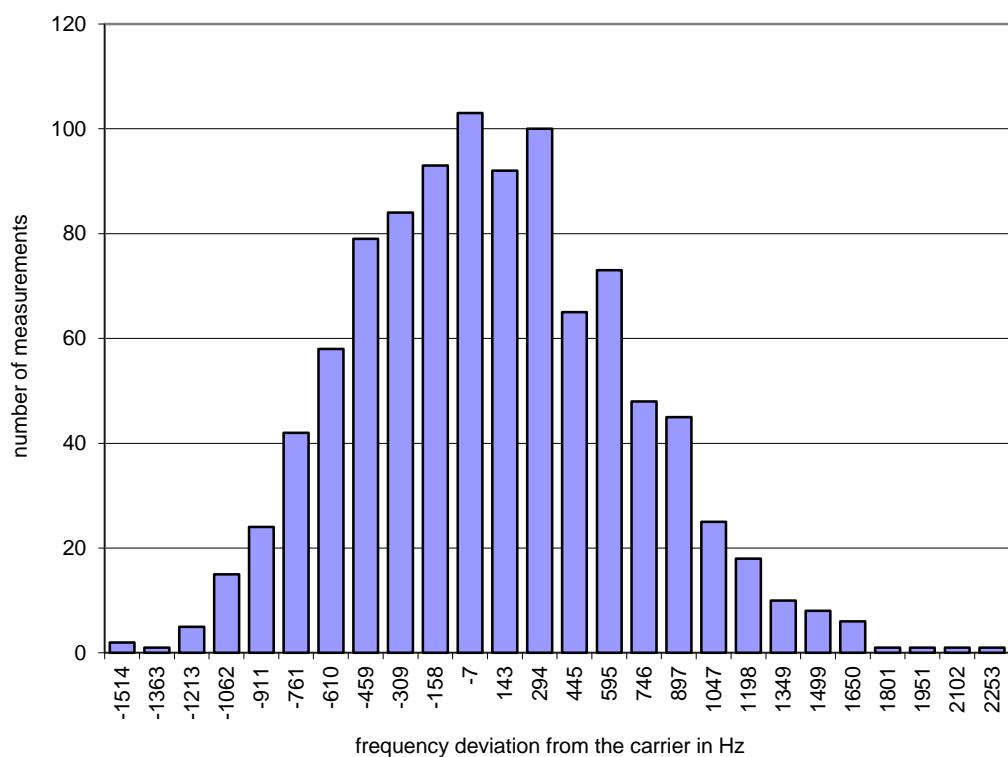
Carrier stability – Frequency stability – T_{MIN} V_{NOM}
FCC Part 15.323 Frequency Stability
Test procedure ANSI 63.17

EUT	DECT Wireless headset for intercommunication use
Model	Q-P7HS
Applicant	Quail Digital UK
Temperature	10 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	V_{NOM}
Frequency of carrier	1924,993877MHz
Measured mean	1924,994472 MHz
Stability (supply temp)	-0,34 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,08 ppm fmin : 1,39 ppm
Result	Verdict = PASS

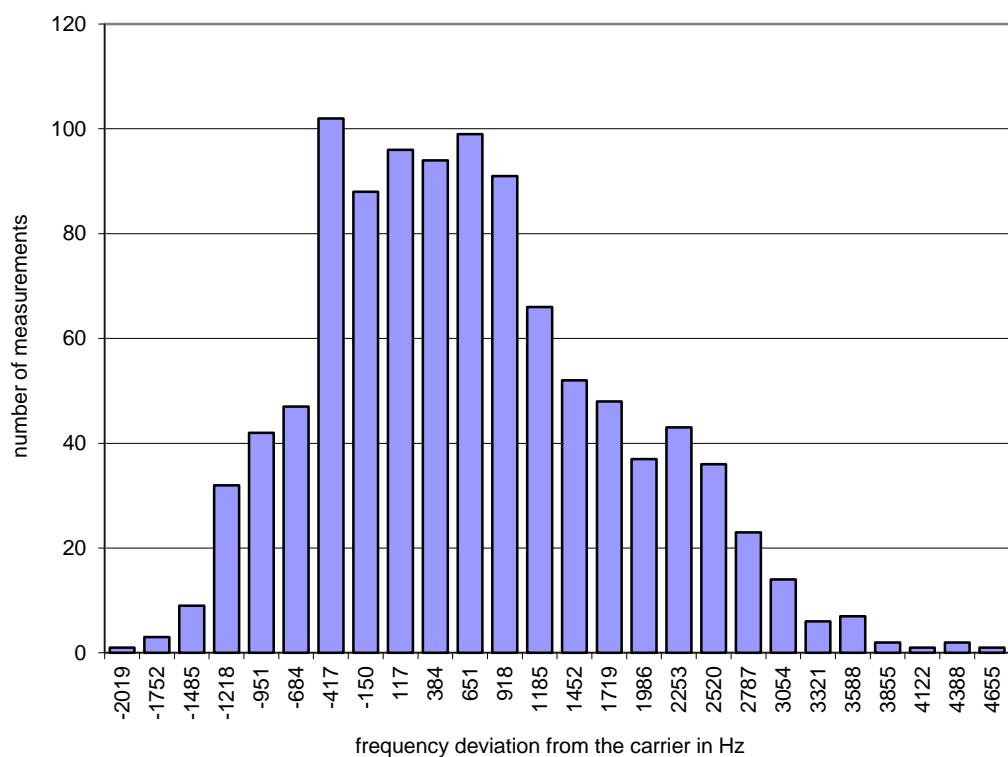
Histogram


Carrier stability – Frequency stability – T_{MAX} V_{NOM}
FCC Part 15.323 Frequency Stability
Test procedure ANSI 63.17

EUT	DECT Wireless headset for intercommunication use
Model	Q-P7HS
Applicant	Quail Digital UK
Temperature	70 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	V_{NOM}
Frequency of carrier	1924,993877 MHz
Measured mean	1924,993967 MHz
Stability (supply temp)	-0,05 ppm
Result	Verdict = PASS
Stability over time	fmax : 1,12 ppm fmin : 0,83 ppm
Result	Verdict = PASS

Histogram


3.10 Test Conditions and Results – Transmitter in-band unwanted emissions

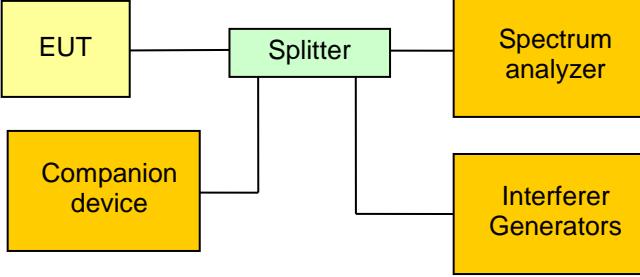
Transmitter in-band unwanted emissions acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
Test according referenced standards	Reference Method	
	FCC 15.323(d) / IC RSS-213 5.8.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17 6.1.6	
Tested frequencies	$F_{\text{LOW}} / F_{\text{HIGH}}$	
Tested frequency range	1920 – 1930 MHz	
Limits		
Frequency range [MHz]	Detector	Limit [dBc]
1920 MHz to ($F_c - 3B$)	Peak	-60
($F_c - 3B$) to ($F_c - 2B$)	Peak	-50
($F_c - 2B$) to ($F_c - 1B$)	Peak	-30
($F_c + 1B$) to ($F_c + 2B$)	Peak	-30
($F_c + 2B$) to ($F_c + 3B$)	Peak	-50
($F_c + 3B$) to 1930 MHz	Peak	-60
B = emission / occupied bandwidth of selected channel F_c = Center frequency of selected channel		
Test setup		
		
Test procedure		
<ol style="list-style-type: none"> With interferer signal the EUT is forced to the test channel and a communication session is established between the EUT and the companion device The RBW of the spectrum analyzer is set to 1% of the emission bandwidth and the VBW is set to 3 times the RBW With peak detector and max hold the emission spectrum is recorded over the corresponding frequency range 		

Test results		
Channel	Frequency [MHz]	Verdict
F_{LOW}	1921.536	PASS
F_{HIGH}	1928.448	PASS
Comments:		

Transmitter in-band unwanted emissions – F_{LOW}
FCC Part 15.323 In-band unwanted emission
Test procedure ANSI 63.17
UPCS

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification In-band unwanted emission

1.452MHz

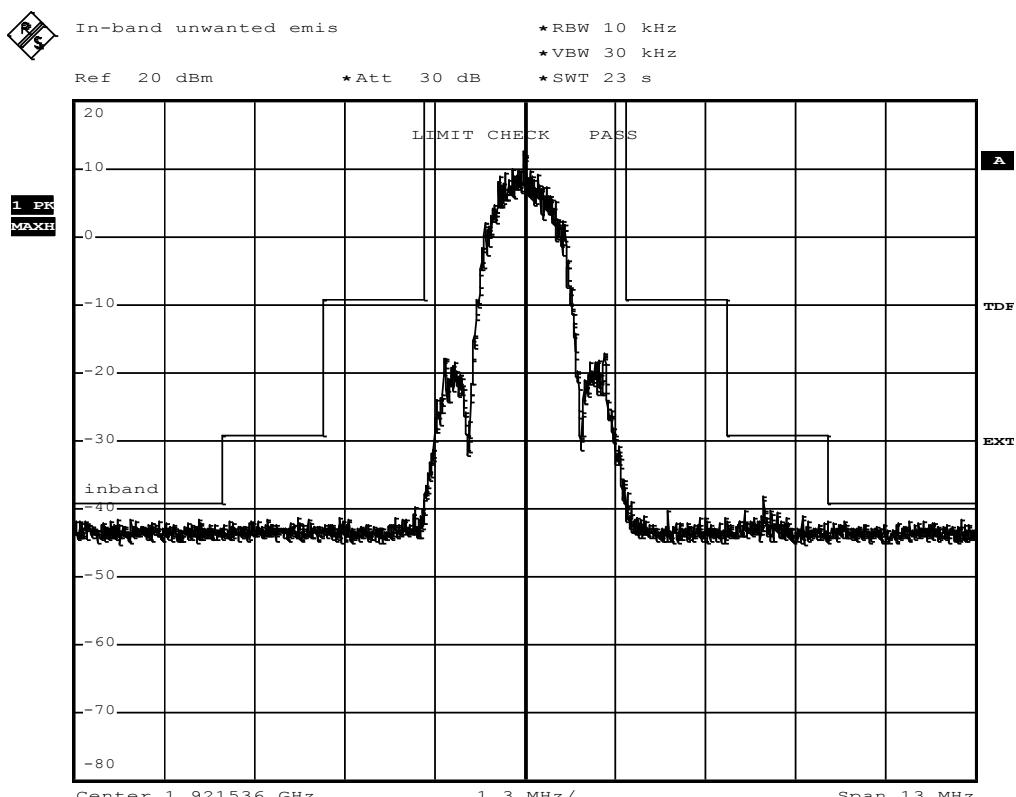

Comment: Ansi C63.17-2006 6.1.6.1
 Date: 1.JAN.2000 02:27:34

 Test Report No.: G0M-1507-4913-TFC15DPP-V01


 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 44 of 101

Transmitter in-band unwanted emissions – F_{HIGH}
FCC Part 15.323 In-band unwanted emission
Test procedure ANSI 63.17
UPCS

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification In-band unwanted emission

1.456MHz

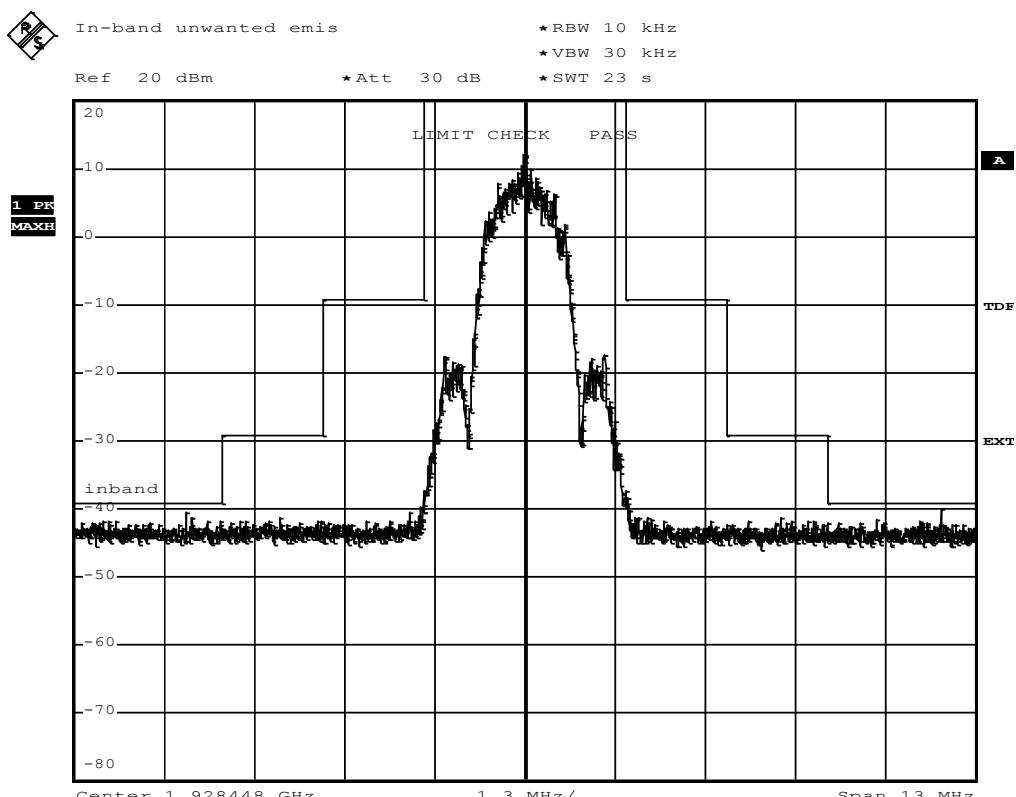


Comment: Ansi C63.17-2006 6.1.6.1
 Date: 1.JAN.2000 02:05:19

 Test Report No.: G0M-1507-4913-TFC15DPP-V01

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.11 Test Conditions and Results – Transmitter out-of-band emissions

Transmitter out-of-band emissions acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
Test according referenced standards	Reference Method		
	FCC 15.323(d) / IC RSS-213 5.8.1		
Test according to measurement reference	Reference Method		
	ANSI C63.17 6.1.6		
Tested frequencies	F_{LOW} / F_{HIGH}		
Tested frequency range	30 MHz – 10 th Harmonic		
Test option	Tested according to option a), b) and d) in C63.17 6.1.6.2		
Limits			
Frequency range [MHz]	Detector	Limit	Limit Distance [m]
30 – 88	Quasi-Peak	100 μ V/m (40 dB μ V/m)	3
88 – 216	Quasi-Peak	150 μ V/m (43.5 dB μ V/m)	3
216 – 960	Quasi-Peak	200 μ V/m (46 dB μ V/m)	3
960 – 1000	Quasi-Peak	500 μ V/m (54 dB μ V/m)	3
1000 – 1917.5	Average	500 μ V/m (54 dB μ V/m)	3
1917.5 – 1918.75	Peak	-39.5 dBm *	N/A
1918.75 – 1920	Peak	-29.5 dBm *	N/A
1930 – 1931.25	Peak	-29.5 dBm *	N/A
1931.25 – 1932.5	Peak	-39.5 dBm *	N/A
1932.5 - 20000	Average	500 μ V/m (54 dB μ V/m)	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.			
* Measurement is performed with conducted measurement setup			

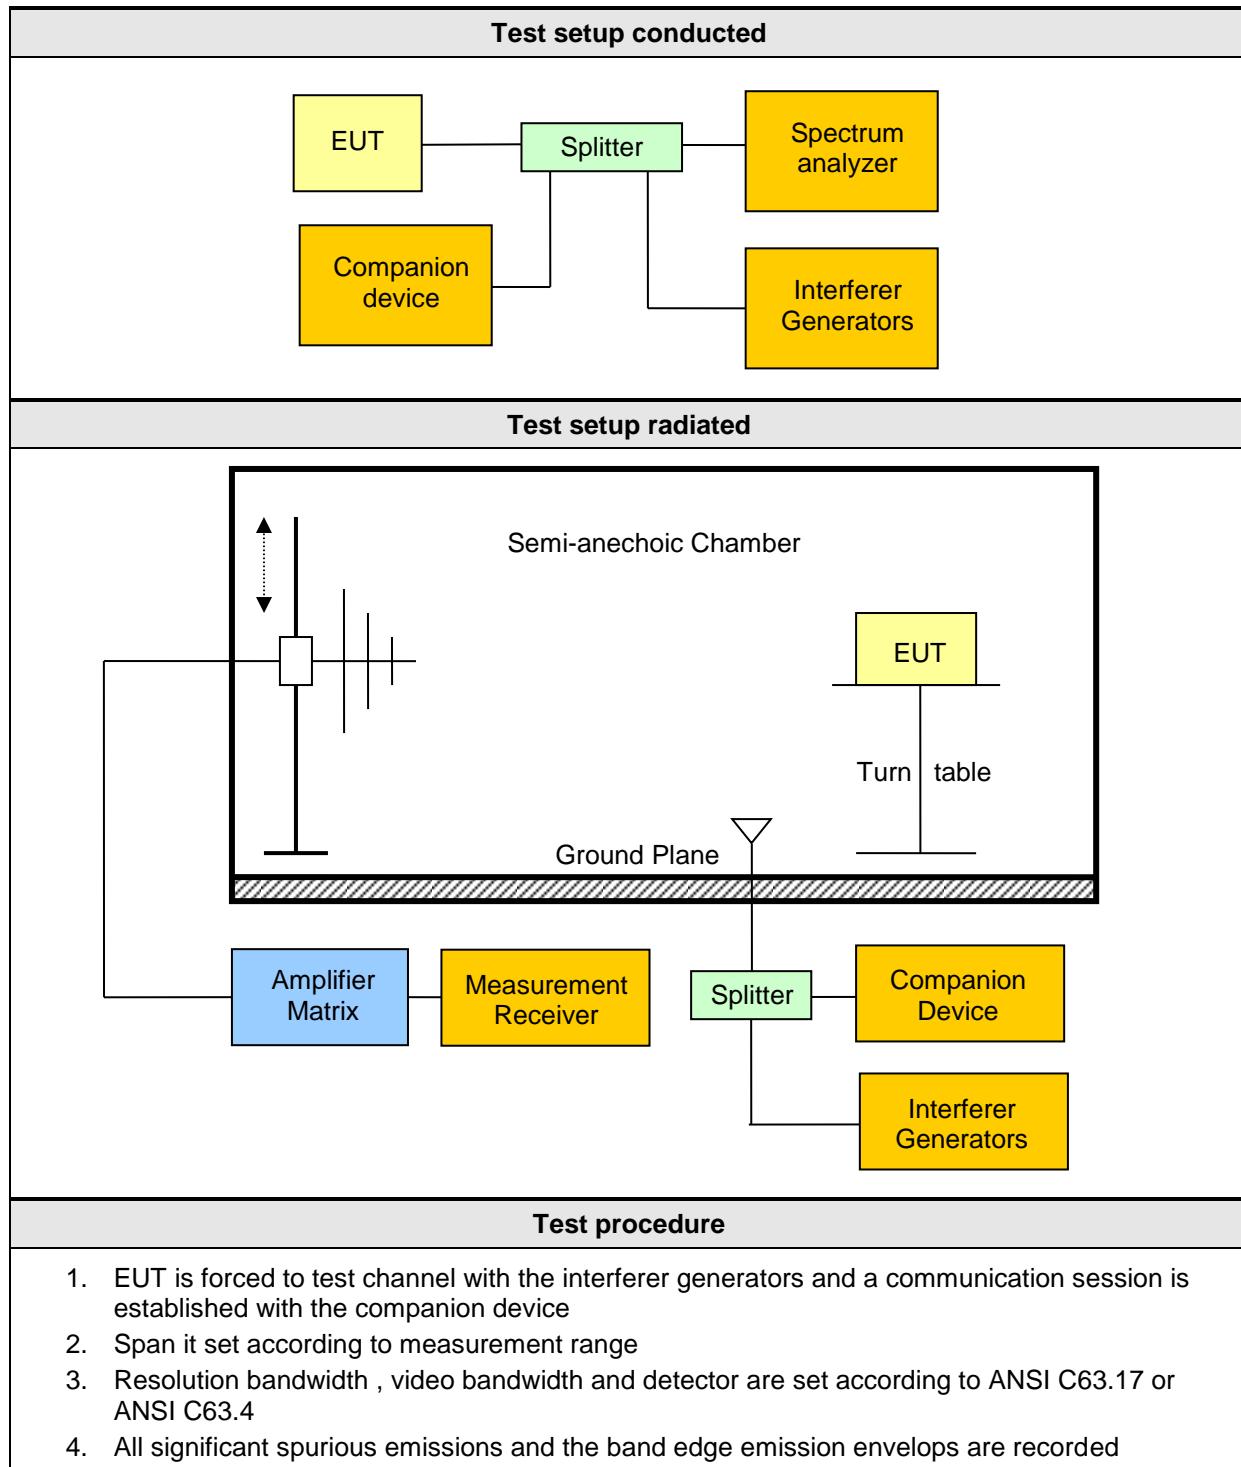


Test results								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [db μ V/m]	Det.	Pol.	Limit [db μ V/m]	Margin [dB]
Ch.: 4	1921.536	TDMA	662.4	34.04	pk	hor	46.00	-11.96
Ch.: 4	1921.536	TDMA	1917.4	58.42	pk	ver	73.90	-15.48
Ch.: 4	1921.536	TDMA	1917.4	27.35	avg	ver	53.90	-26.55
Ch.: 4	1921.536	TDMA	1917.4	59.32	pk	hor	73.90	-14.58
Ch.: 4	1921.536	TDMA	1917.4	27.92	avg	hor	53.90	-25.98
Ch.: 4	1921.536	TDMA	3842.4	66.23	pk	hor	73.90	-07.67
Ch.: 4	1921.536	TDMA	3842.4	46.23	avg	hor	53.90	-07.67
Ch.: 4	1921.536	TDMA	3843.2	61.93	pk	ver	73.90	-11.97
Ch.: 4	1921.536	TDMA	3843.2	41.93	avg	ver	53.90	-11.97
Ch.: 4	1921.536	TDMA	5766	55.90	pk	hor	73.90	-18.00
Ch.: 4	1921.536	TDMA	5766	35.90	avg	hor	43.90	-18.00
Ch.: 4	1921.536	TDMA	5766	55.55	pk	ver	73.90	-18.35
Ch.: 4	1921.536	TDMA	5766	35.55	avg	ver	53.90	-18.35
Ch.: 4	1921.536	TDMA	9600	56.78	pk	ver	73.90	-17.12
Ch.: 4	1921.536	TDMA	9600	36.78	avg	ver	53.90	-17.12
Ch.: 4	1921.536	TDMA	9600	55.67	pk	hor	73.90	-18.23
Ch.: 4	1921.536	TDMA	9600	35.67	avg	hor	53.90	-18.23
Ch.: 0	1928.448	TDMA	662.4	34.80	pk	hor	46.00	-11.20
Ch.: 0	1928.448	TDMA	1932.5	62.15	pk	ver	73.90	-11.75
Ch.: 0	1928.448	TDMA	1932.5	30.12	avg	ver	53.90	-23.78
Ch.: 0	1928.448	TDMA	1932.5	66.36	pk	hor	73.90	-07.54
Ch.: 0	1928.448	TDMA	1932.5	32.24	avg	hor	53.90	-21.66
Ch.: 0	1928.448	TDMA	3856.2	65.89	pk	hor	73.90	-08.01
Ch.: 0	1928.448	TDMA	3856.2	45.89	avg	hor	53.90	-08.01
Ch.: 0	1928.448	TDMA	3857	62.07	pk	ver	73.90	-11.83
Ch.: 0	1928.448	TDMA	3857	42.07	pk	ver	53.90	-11.83
Ch.: 0	1928.448	TDMA	5785	56.51	pk	ver	73.90	-17.39
Ch.: 0	1928.448	TDMA	5785	36.51	pk	ver	53.90	-17.39
Ch.: 0	1928.448	TDMA	5785	55.00	pk	ver	73.90	-18.90
Ch.: 0	1928.448	TDMA	7708	50.21	pk	ver	73.90	-23.69
Ch.: 0	1928.448	TDMA	7712	48.89	pk	ver	73.90	-25.01
Ch.: 0	1928.448	TDMA	9640	57.00	pk	ver	73.90	-16.90

Comments: Peak measurement with duty cycle correction for average values. Duty cycle correction= -20dB

Transmitter duty cycle correction
Duty cycle

Project Number: G0M-1507-4913


Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Handrik
 Test Conditions: Tnom / Vnom
 Mode: Tx, UPCS Ch.: 2
 Test Date: 2015-08-27
 Verdict: NONE (INFORMATION ONLY)
 Note 1: Duty cycle = 0.031 (30.1dB)
 Note 2: duty cycle correction for radiated spurious emissions: 20dB

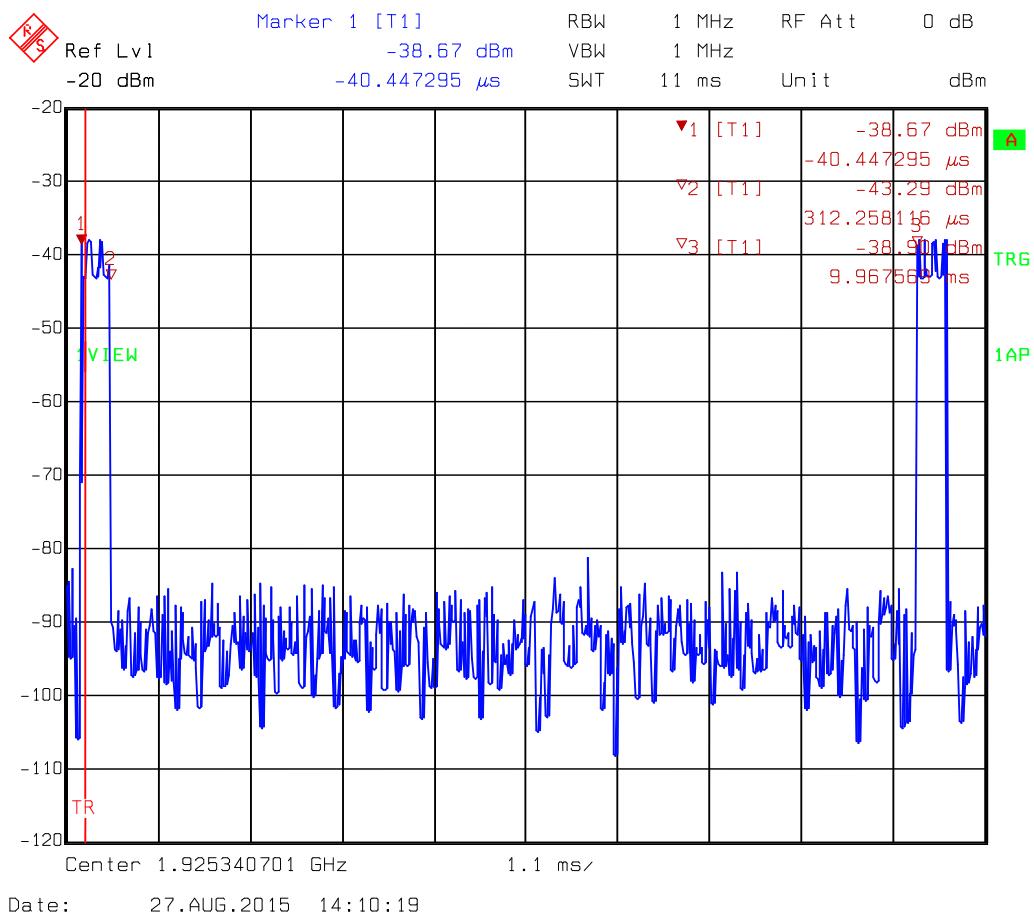

Transmitter out-of-band emissions – Band edge F_{LOW}
FCC Part 15.323 Out-of-band emission
Test procedure ANSI 63.17
UPCS

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Out-of-band emission

measurement on the lowest carrier
 Carrier=1921.536MHz

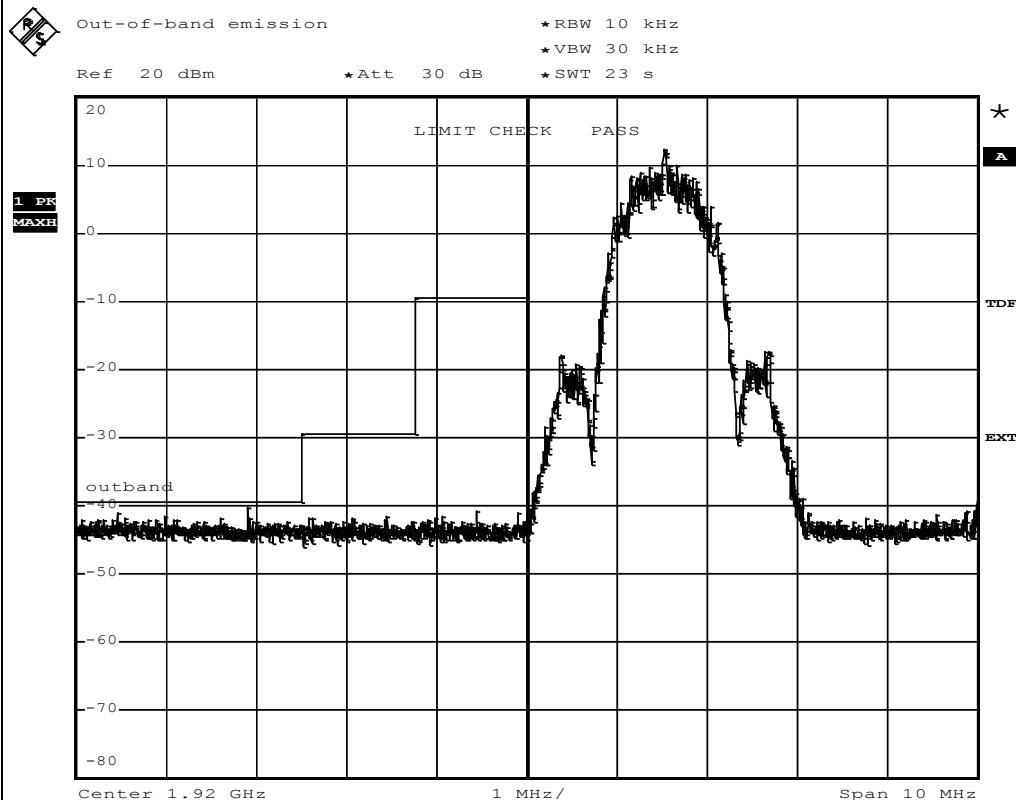

Comment: Ansi C63.17-2006 6.1.6.2
 Date: 1.JAN.2000 02:30:11


 Test Report No.: G0M-1507-4913-TFC15DPP-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Transmitter out-of-band emissions – Band edge F_{HIGH}
FCC Part 15.323 Out-of-band emission
Test procedure ANSI 63.17
UPCS

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 23°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Out-of-band emission

measurement on the highest carrier
 Carrier=1928.448MHz

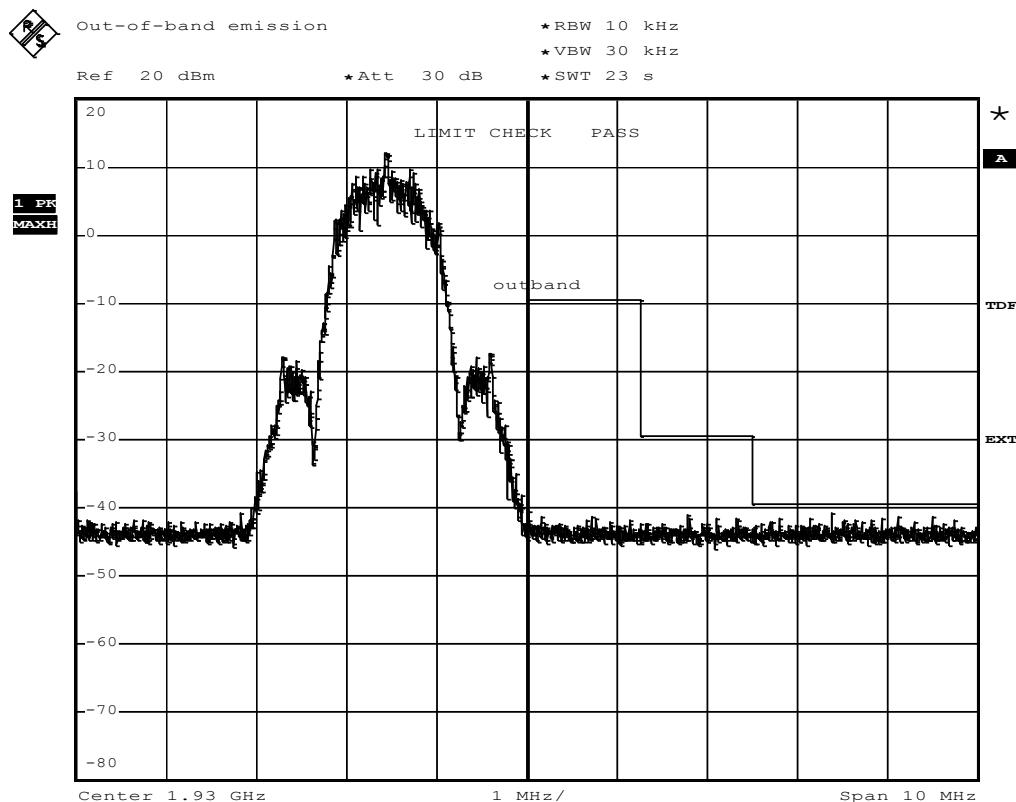

Comment: Ansi C63.17-2006 6.1.6.2
 Date: 1.JAN.2000 02:07:56

 Test Report No.: G0M-1507-4913-TFC15DPP-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; UPCS: Ch.: 4
Test Date: 2015-08-27
Note: EUT horizontal

Index 32

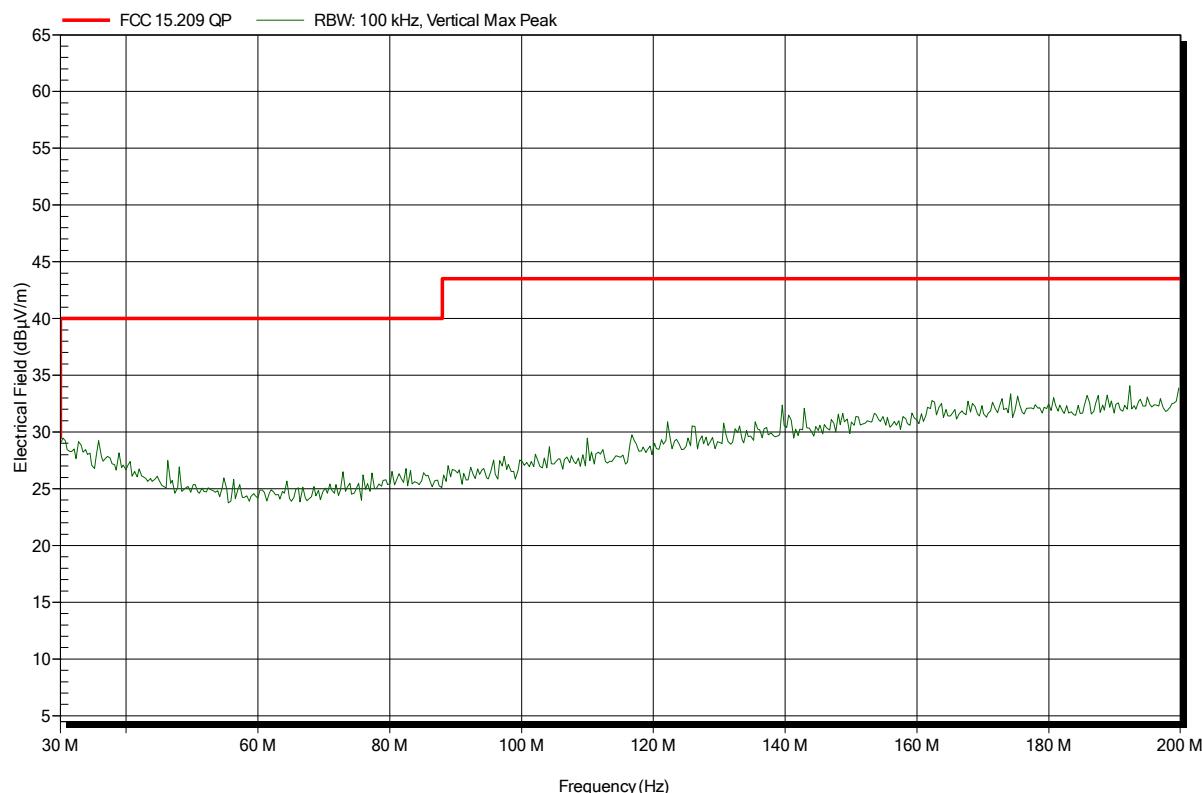


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; UPCS: Ch.: 4
Test Date: 2015-08-27
Note: EUT horizontal

Index 33

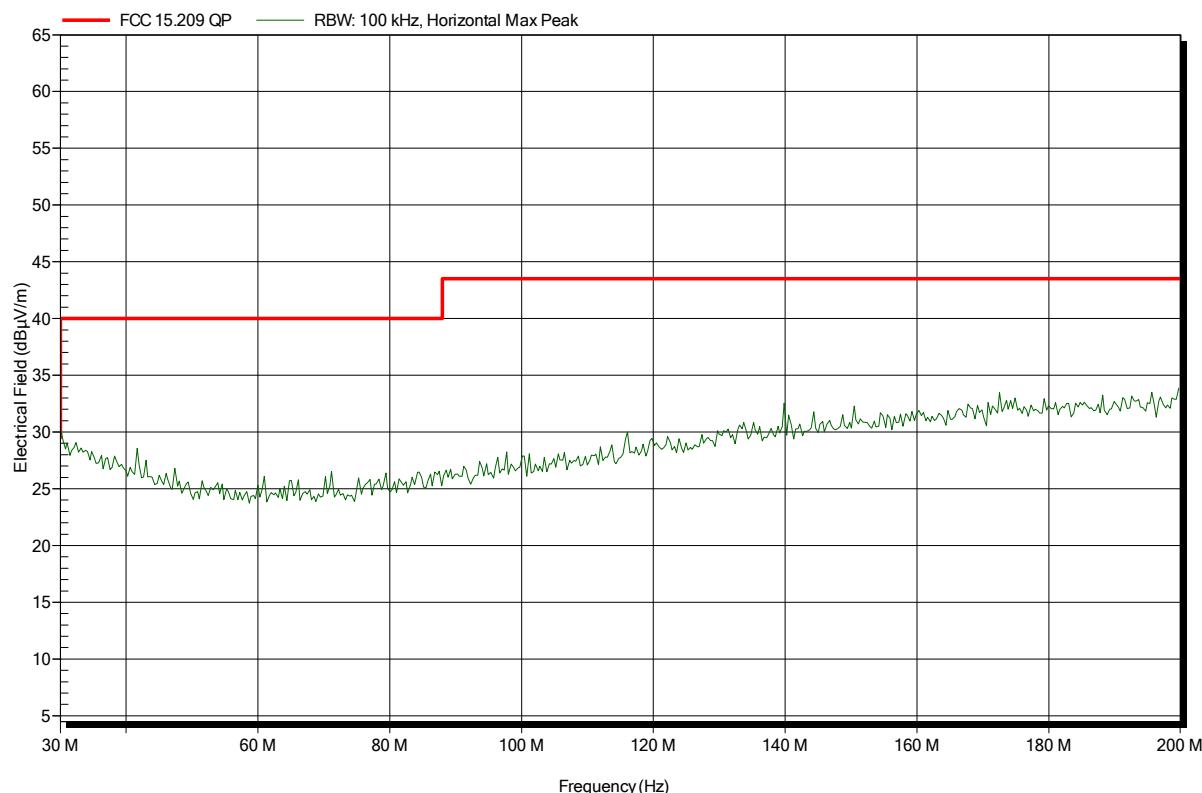


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; UPCS: Ch.: 0
Test Date: 2015-08-27
Note: EUT horizontal

Index 31

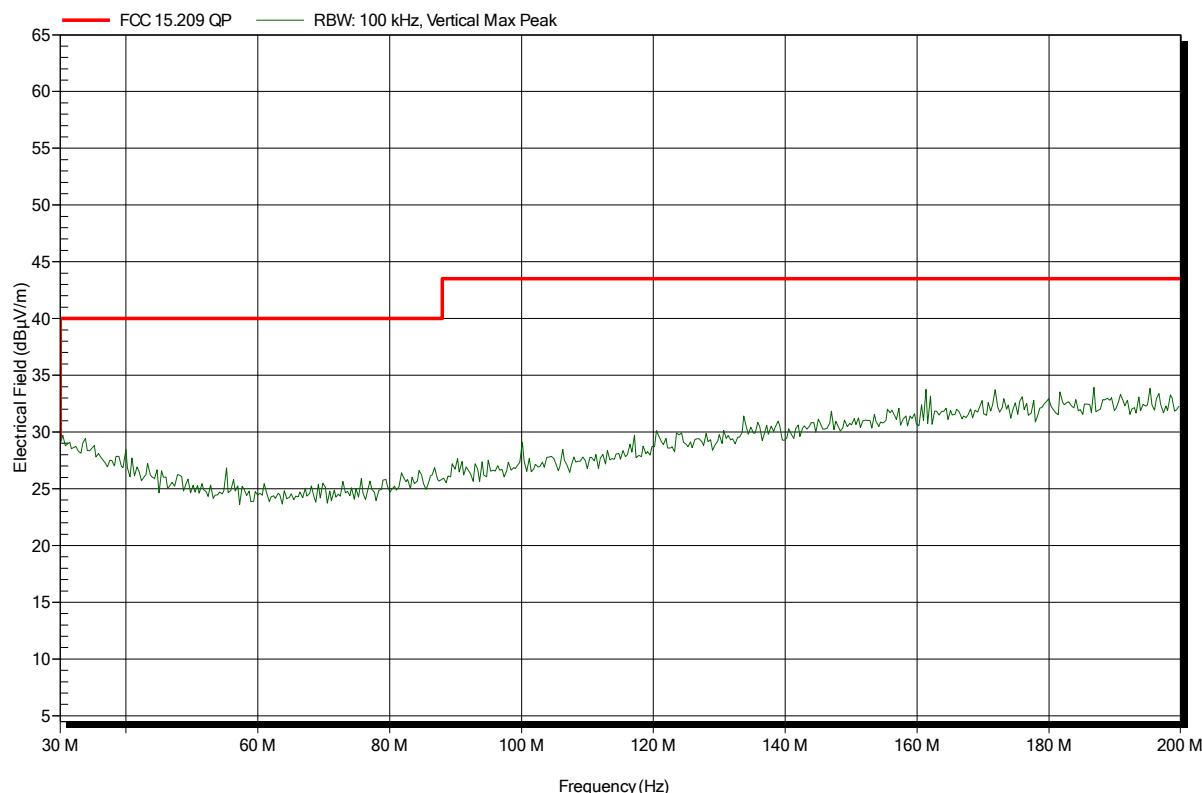


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; UPCS: Ch.: 0
Test Date: 2015-08-27
Note: EUT horizontal

Index 34

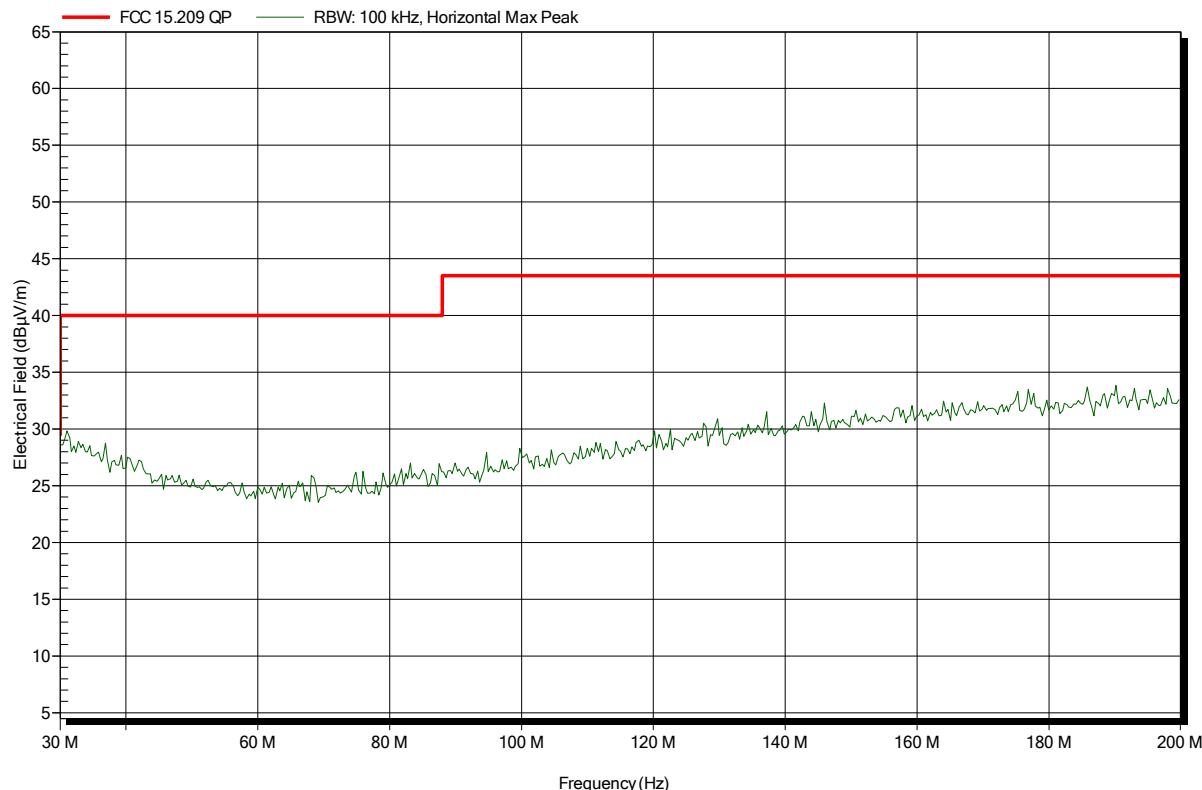


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; UPCS: Ch.: 4
Test Date: 2015-08-27
Note: EUT horizontal

Index 27

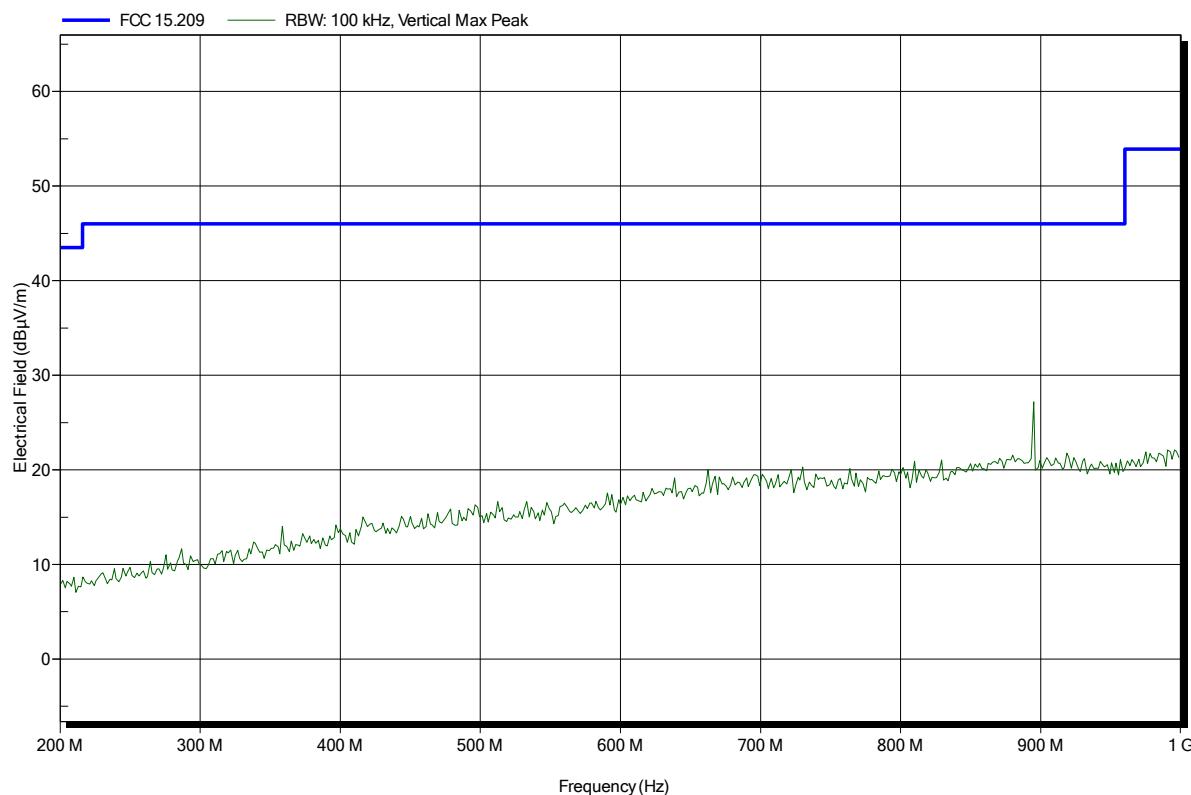


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 28

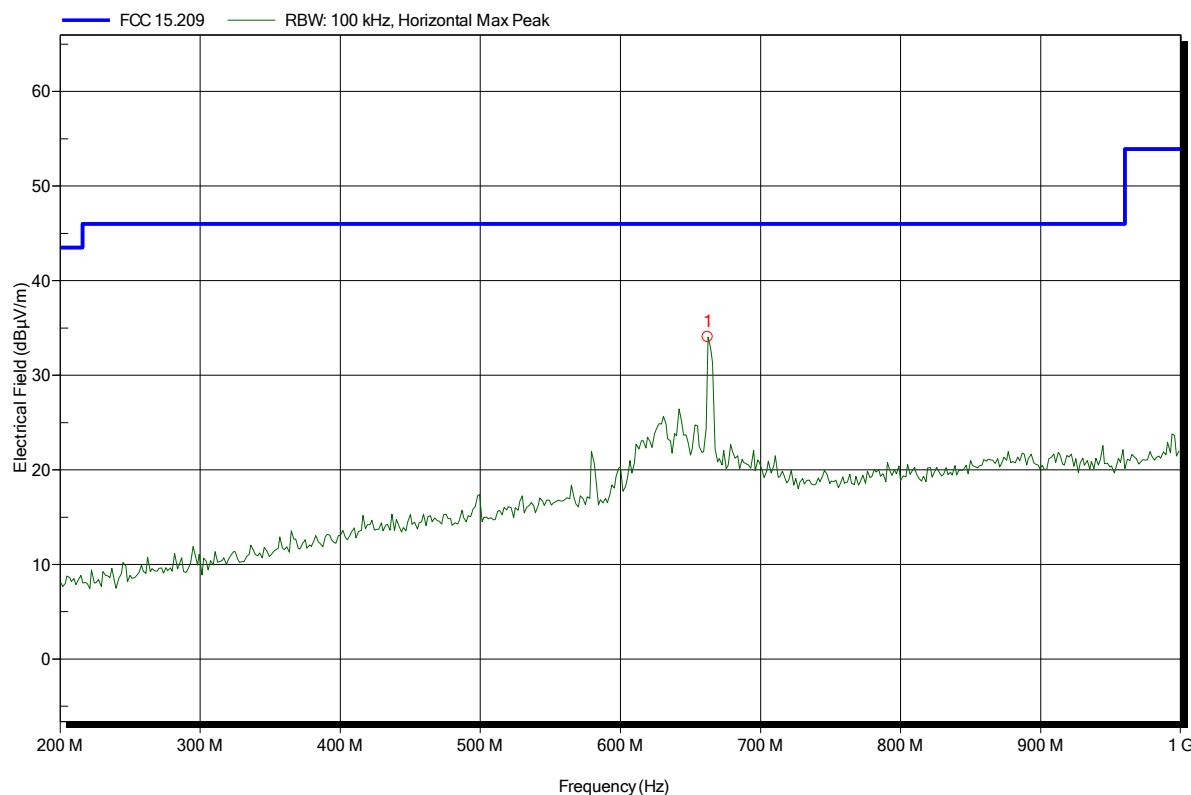


Frequency	Peak	Peak Limit	Peak Difference	Status
662.4 MHz	34.04 dB μ V/m	46 dB μ V/m	-11.96 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom} = 22^\circ\text{C}$, $V_{nom} = 3.7 \text{ VDC}$ (battery)
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; UPCS: Ch.: 0
Test Date: 2015-08-27
Note: EUT horizontal

Index 30

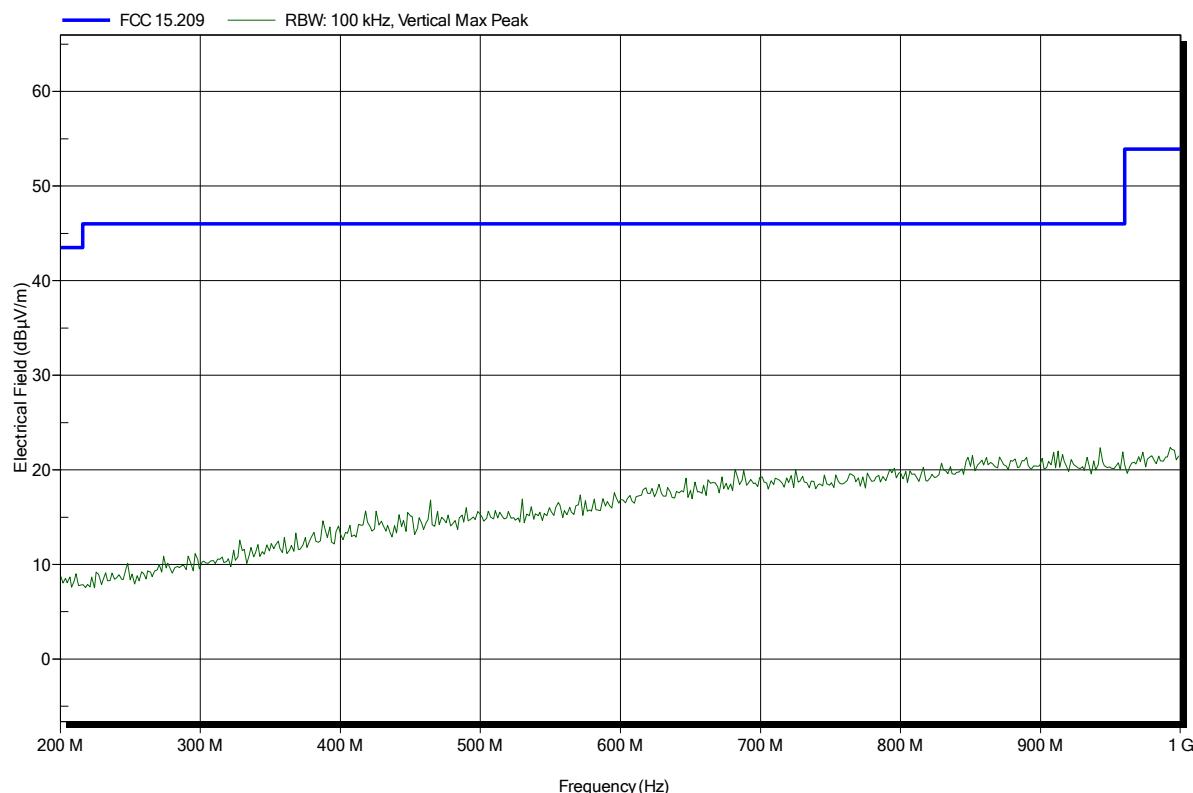


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 29

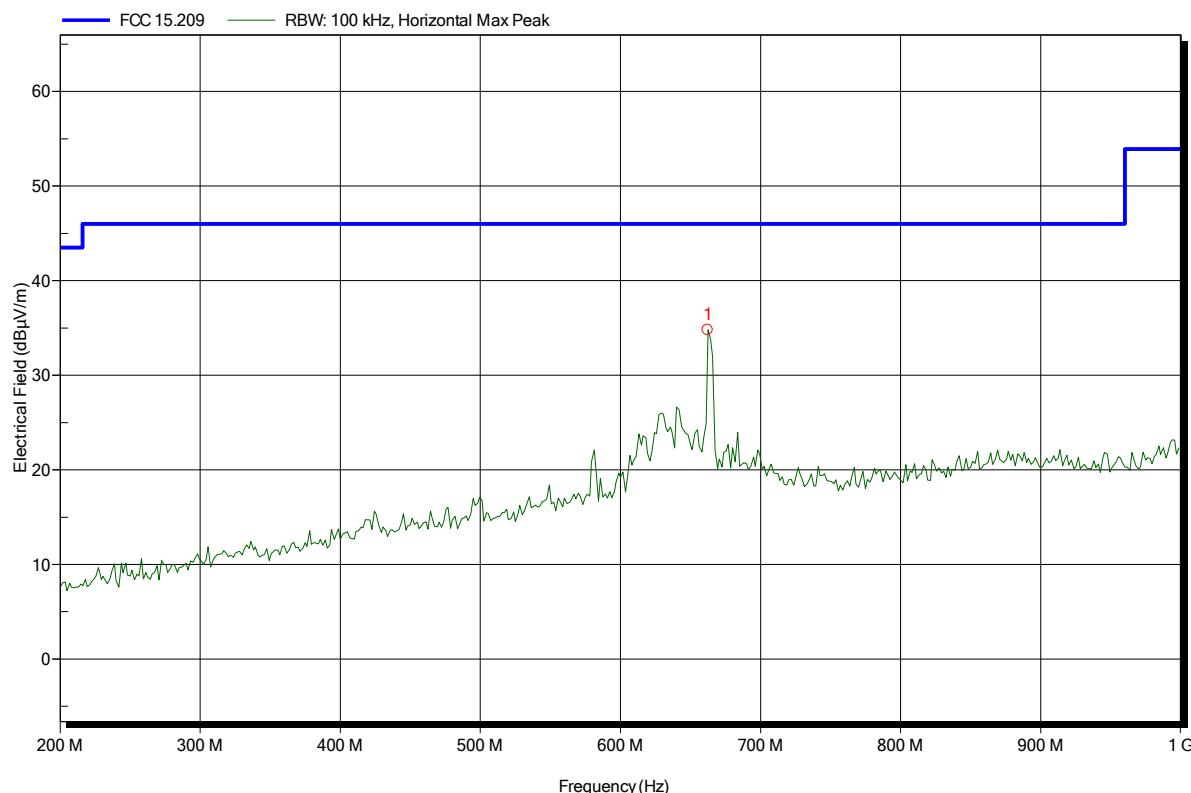


Frequency	Peak	Peak Limit	Peak Difference	Status
662.4 MHz	34.8 dB μ V/m	46 dB μ V/m	-11.2 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: with notch-filter, EUT horizontal

Index 17

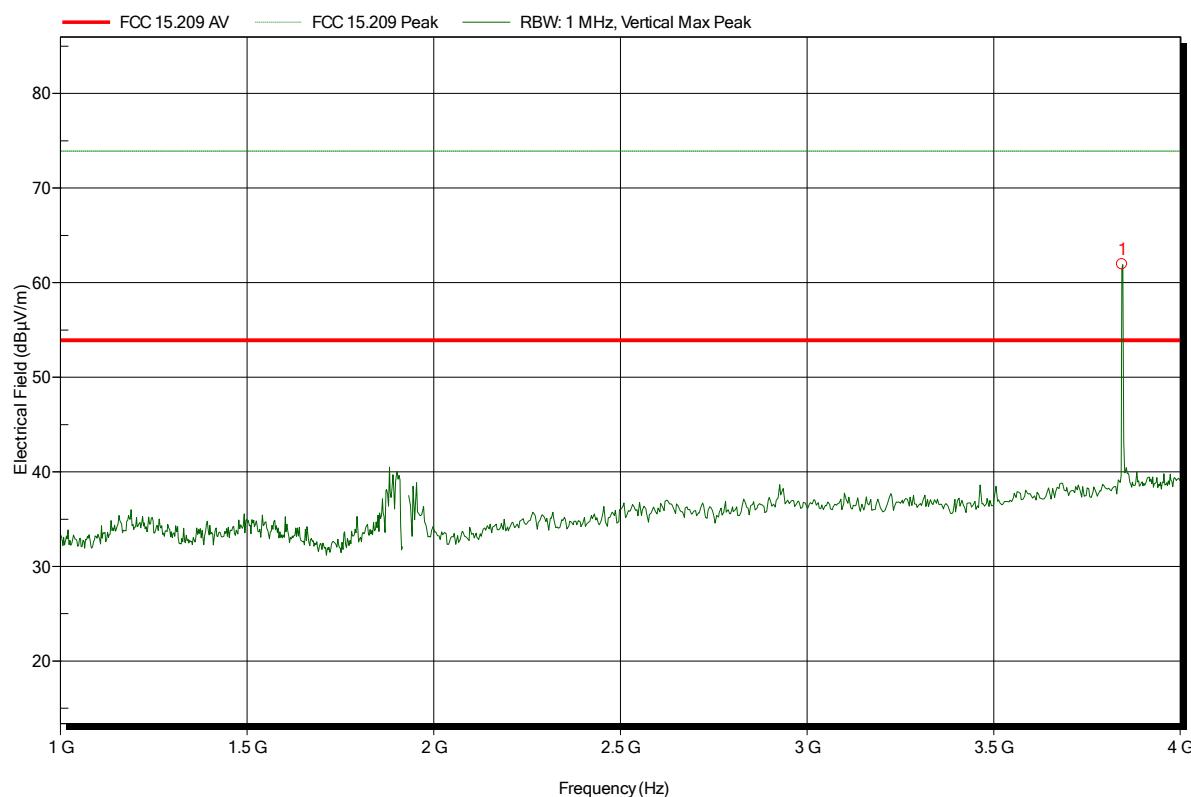

Test Report No.: G0M-1507-4913-TFC15DPP-V01

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 60 of 101

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: with notch-filter, EUT horizontal (3dB)

Index 21

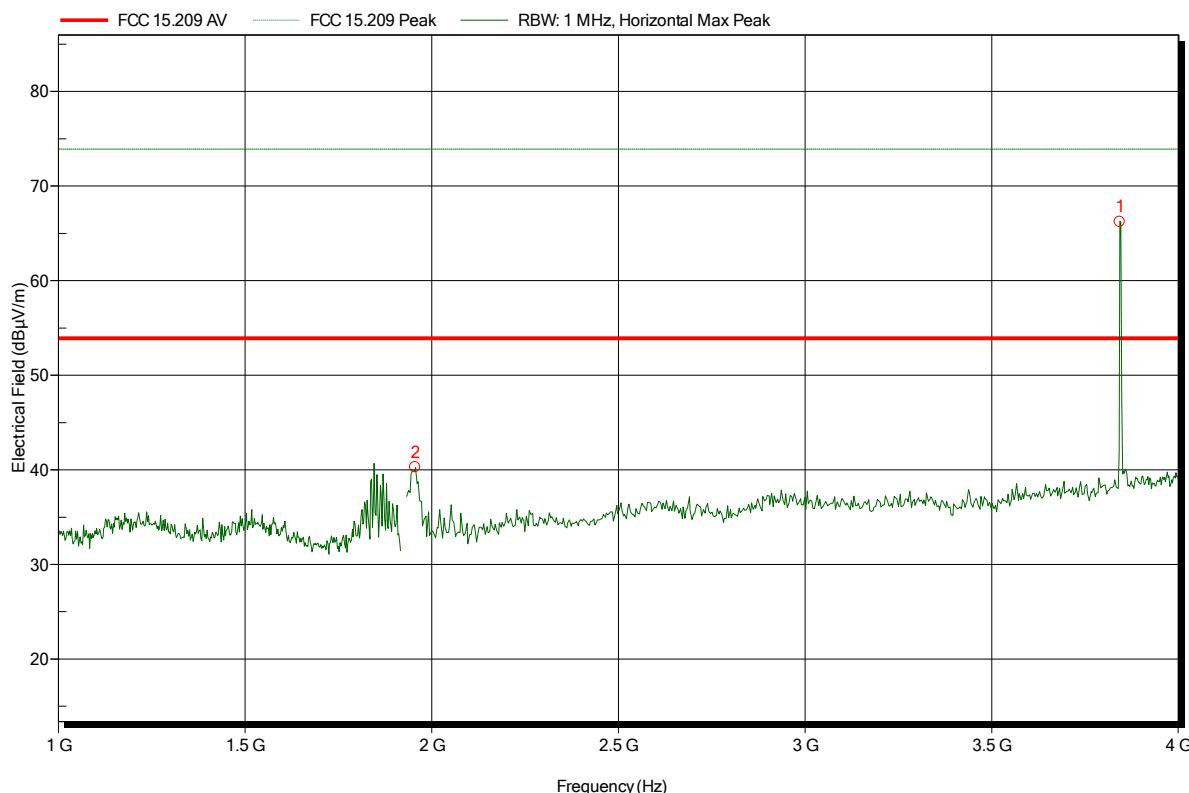


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.9554 GHz	40.26 dB μ V/m	73.9 dB μ V/m	-33.64 dB	Pass
3.8424 GHz	66.23 dB μ V/m	73.9 dB μ V/m	-7.67 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 25

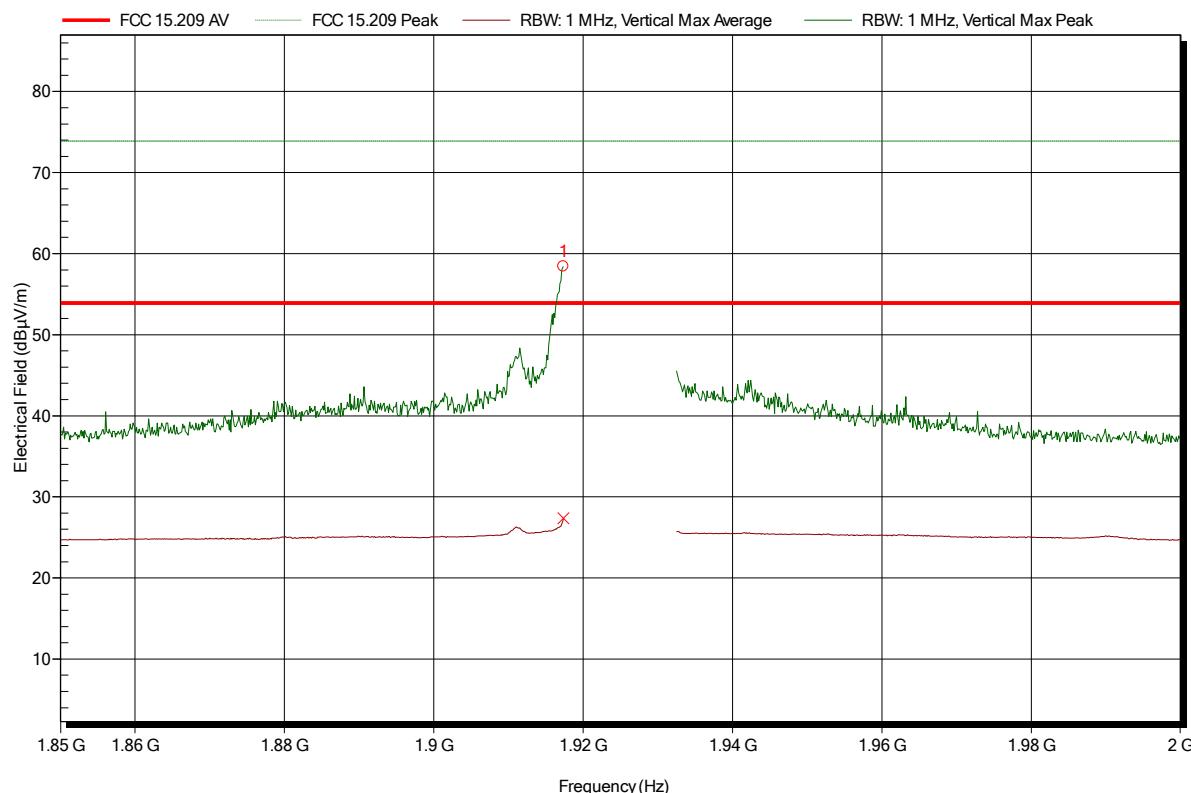


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.9174 GHz	58.42 dB μ V/m	73.9 dB μ V/m	-15.48 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9174 GHz	27.35 dB μ V/m	53.9 dB μ V/m	-26.55 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 26

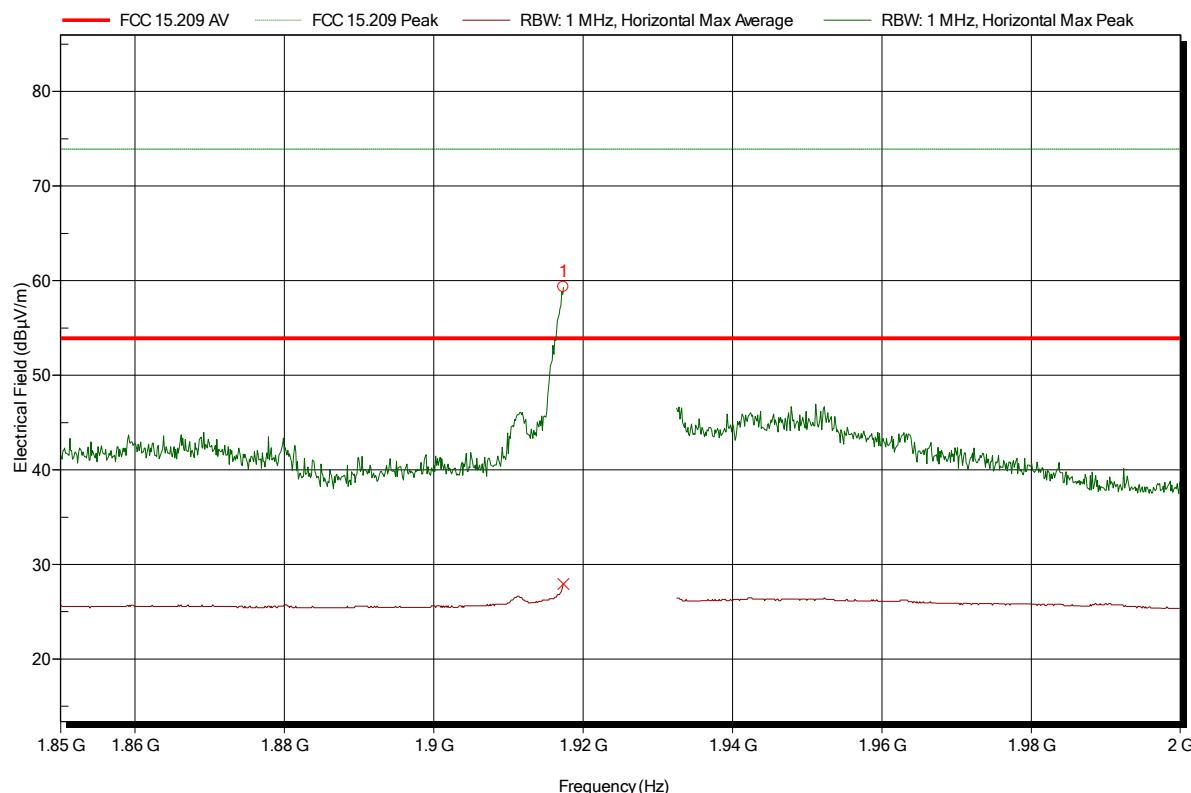


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.9174 GHz	59.32 dB μ V/m	73.9 dB μ V/m	-14.58 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9174 GHz	27.92 dB μ V/m	53.9 dB μ V/m	-25.98 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: with notch-filter, EUT horizontal

Index 18

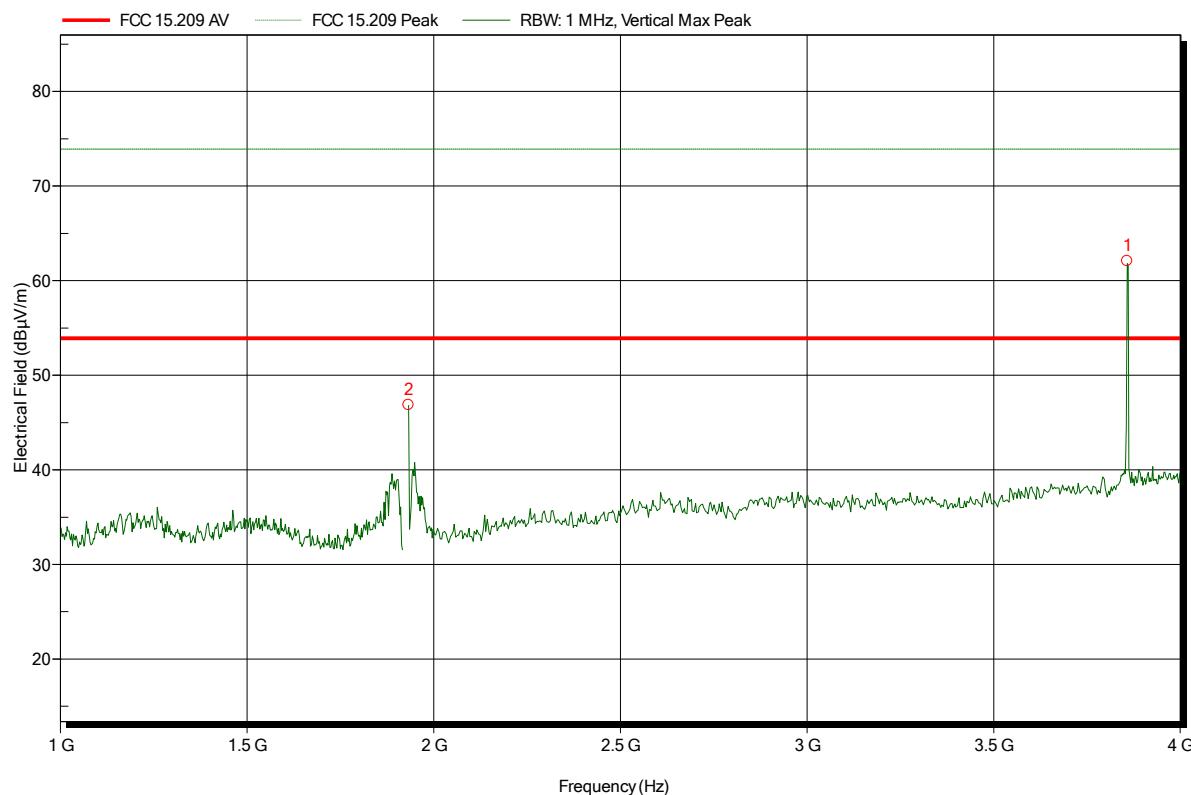


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.9325 GHz	46.85 dB μ V/m	73.9 dB μ V/m	-27.05 dB	Pass
3.857 GHz	62.07 dB μ V/m	73.9 dB μ V/m	-11.83 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: with notch-filter, EUT horizontal (3dB)

Index 22

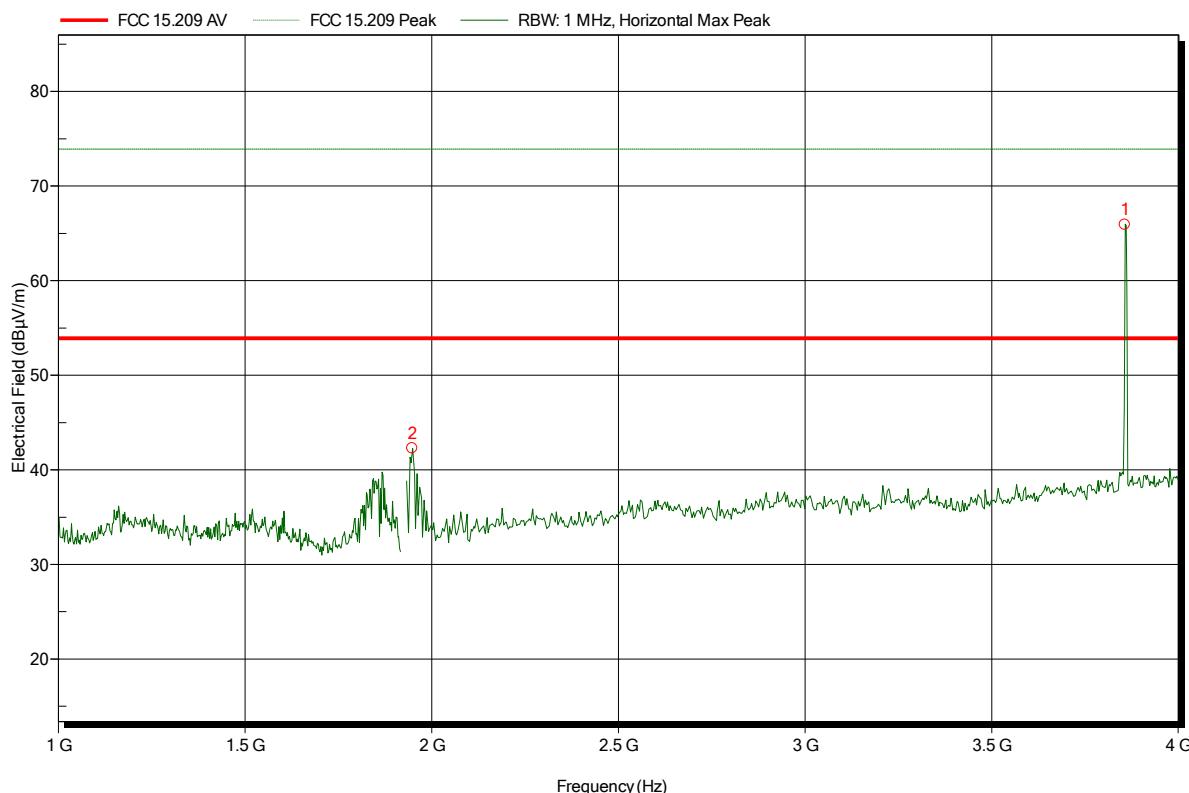


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.9478 GHz	42.27 dBμV/m	73.9 dBμV/m	-31.63 dB	Pass
3.8562 GHz	65.89 dBμV/m	73.9 dBμV/m	-8.01 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 24

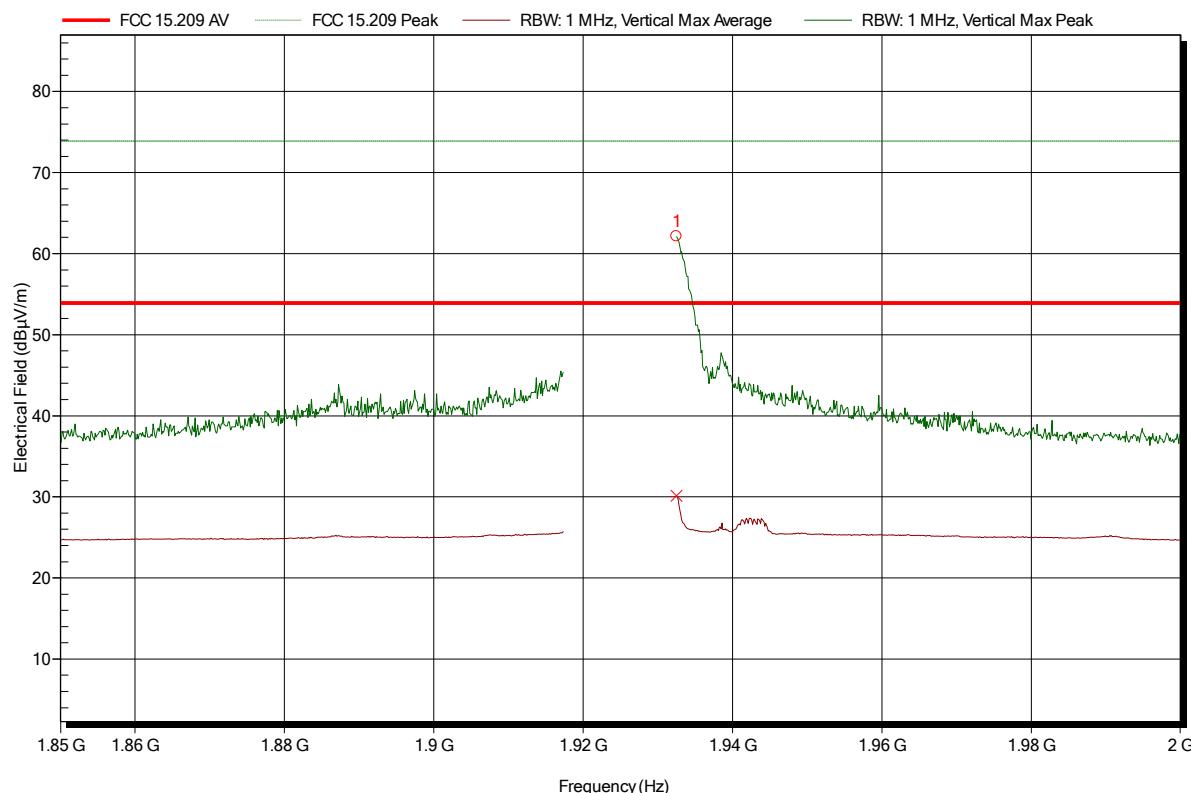

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.9325 GHz	62.15 dB μ V/m	73.9 dB μ V/m	-11.75 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	30.12 dB μ V/m	53.9 dB μ V/m	-23.78 dB	Pass

Test Report No.: G0M-1507-4913-TFC15DPP-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 23

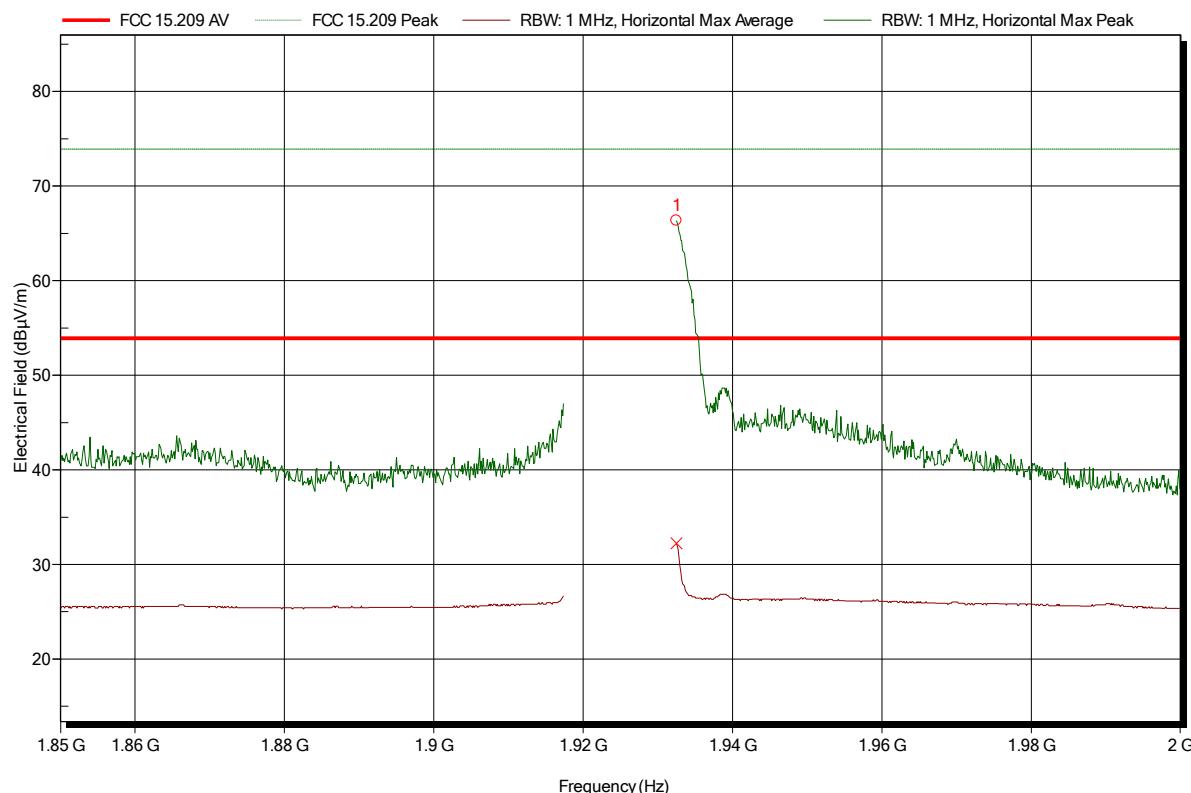


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.9325 GHz	66.36 dB μ V/m	73.9 dB μ V/m	-7.54 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.9325 GHz	32.24 dB μ V/m	53.9 dB μ V/m	-21.66 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 5

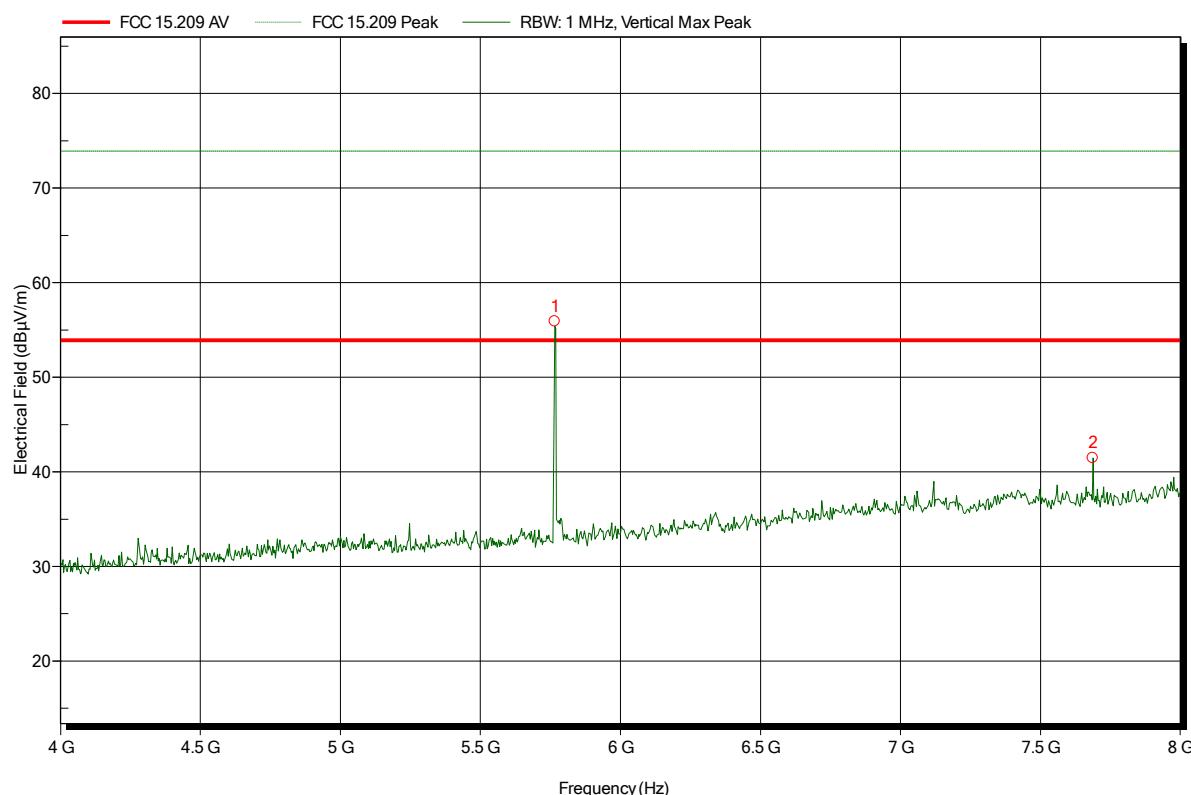


Frequency	Peak	Peak Limit	Peak Difference	Status
5.766 GHz	55.9 dB μ V/m	73.9 dB μ V/m	-18 dB	Pass
7.686 GHz	41.47 dB μ V/m	73.9 dB μ V/m	-32.43 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 16

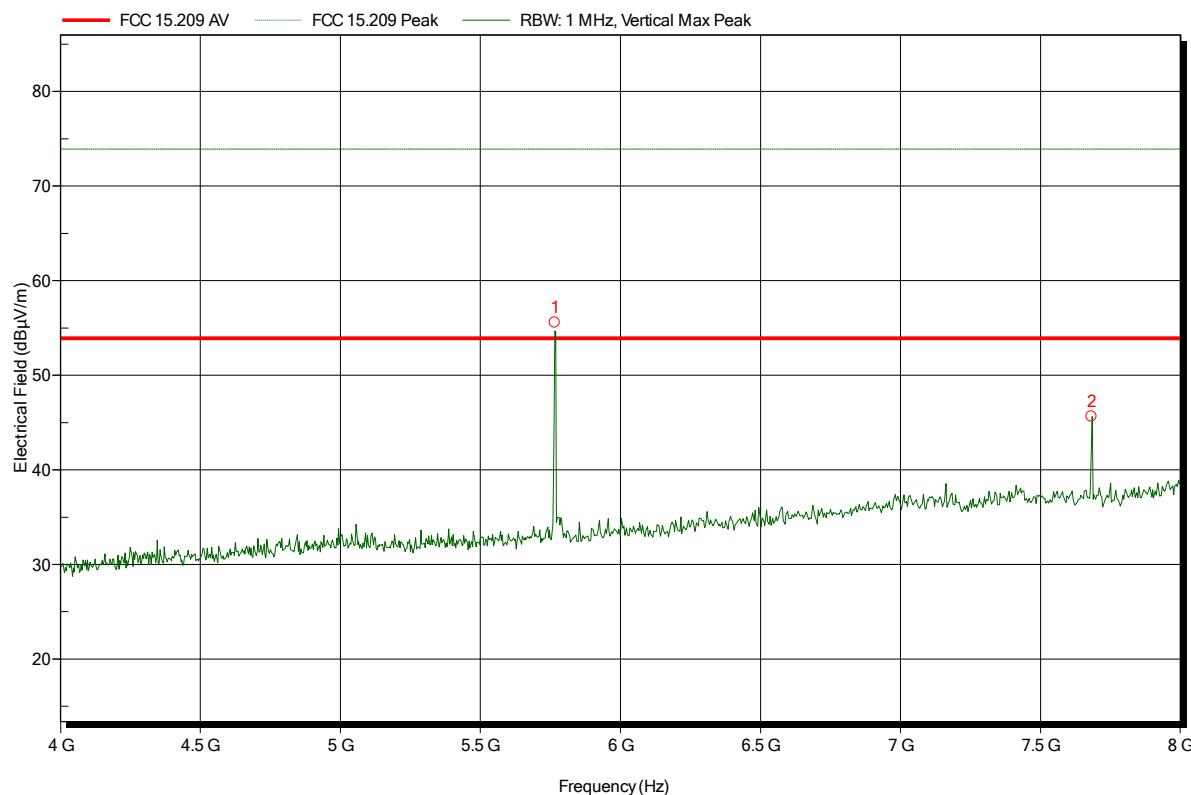

Test Report No.: G0M-1507-4913-TFC15DPP-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 10

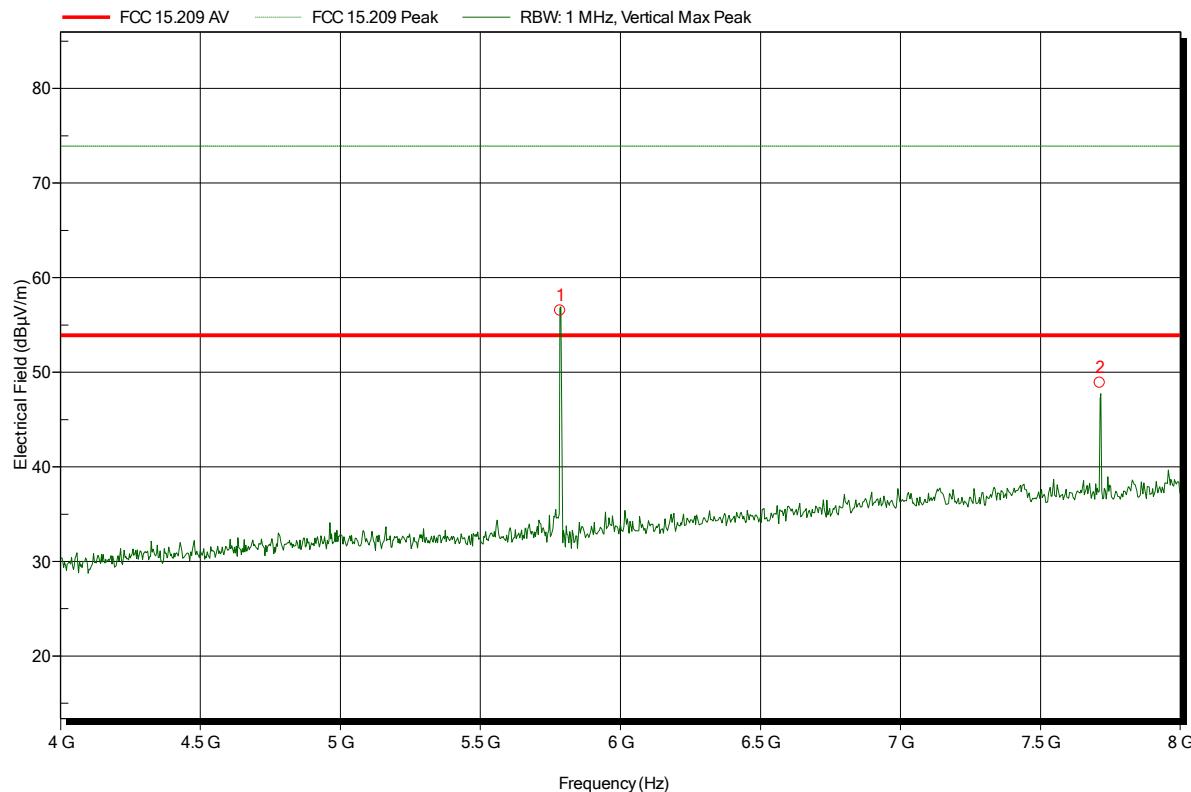


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 11

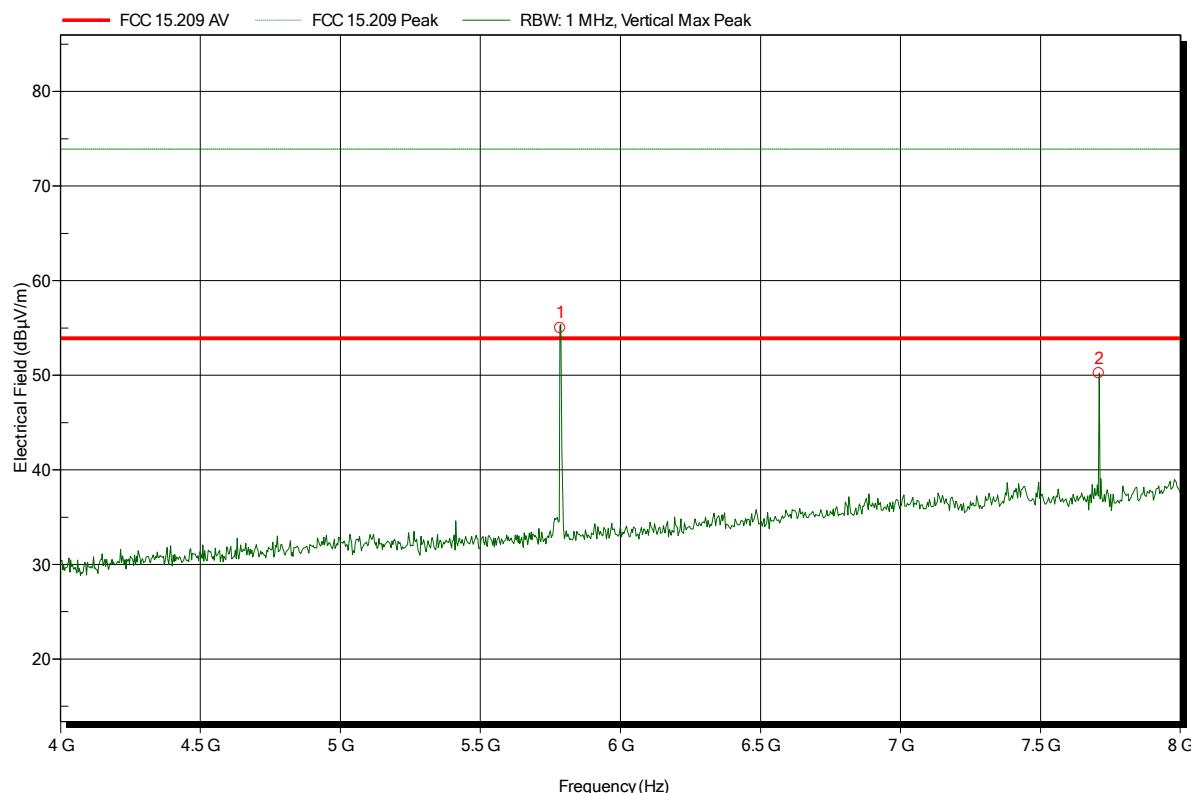

Test Report No.: G0M-1507-4913-TFC15DPP-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 6

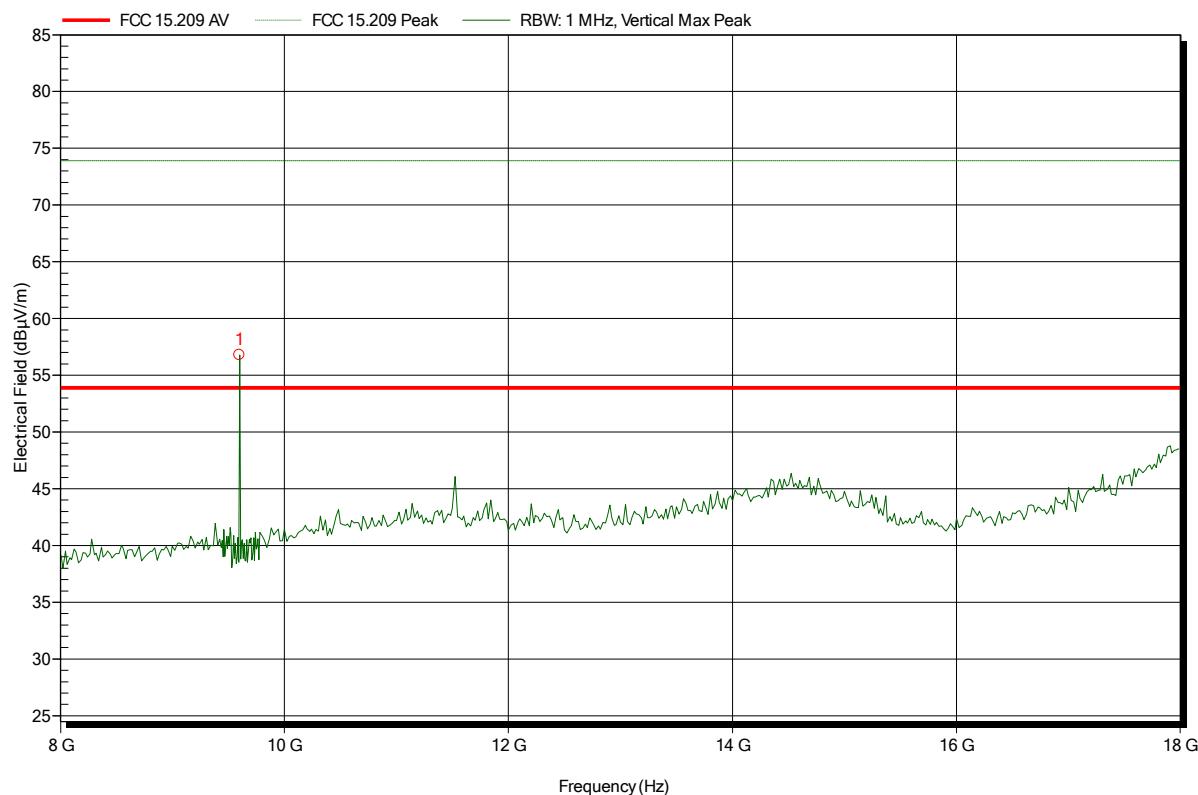


Frequency	Peak	Peak Limit	Peak Difference	Status
9.6 GHz	56.78 dB μ V/m	73.9 dB μ V/m	-17.12 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; UPCS: Ch.: 4
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 15

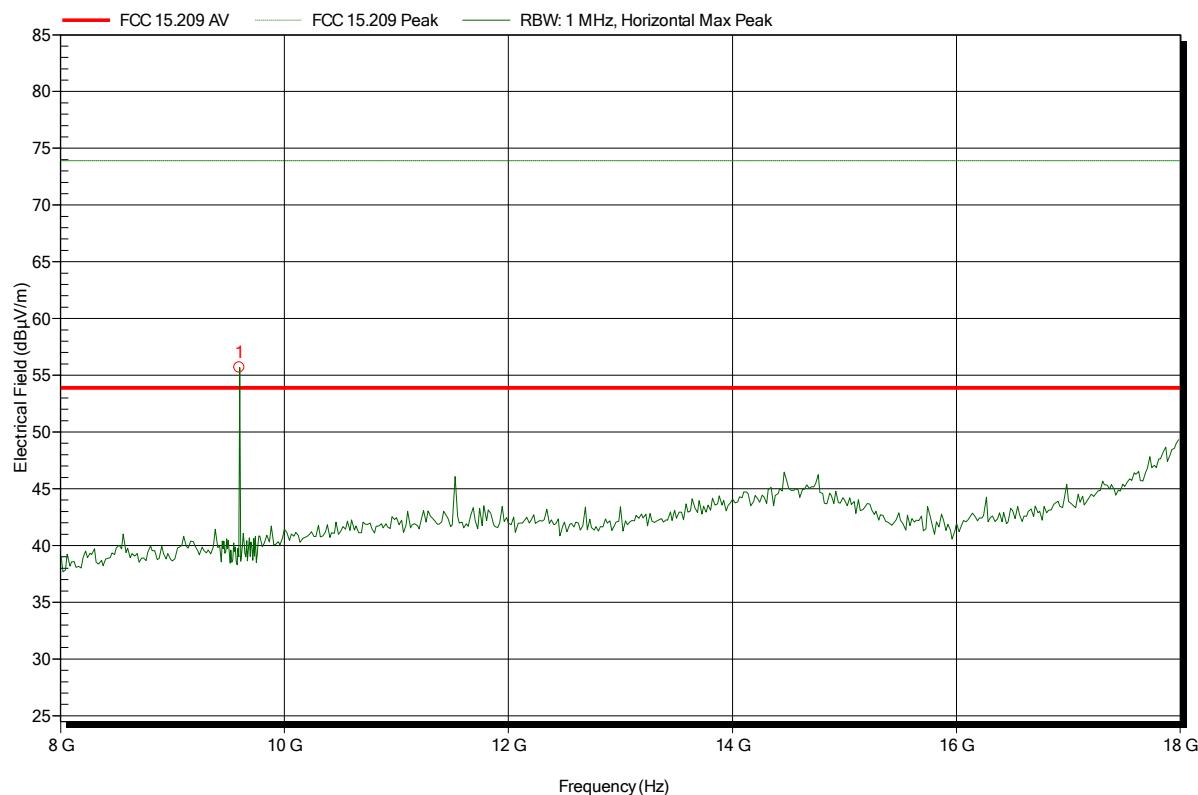


Frequency	Peak	Peak Limit	Peak Difference	Status
9.6 GHz	55.67 dB μ V/m	73.9 dB μ V/m	-18.23 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
 EUT Name: Dect wireless headset for intercommunication use
 Model: Q-P7HS
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; UPCS: Ch.: 0
 Test Date: 2015-08-27
 Note: EUT horizontal

Index 9

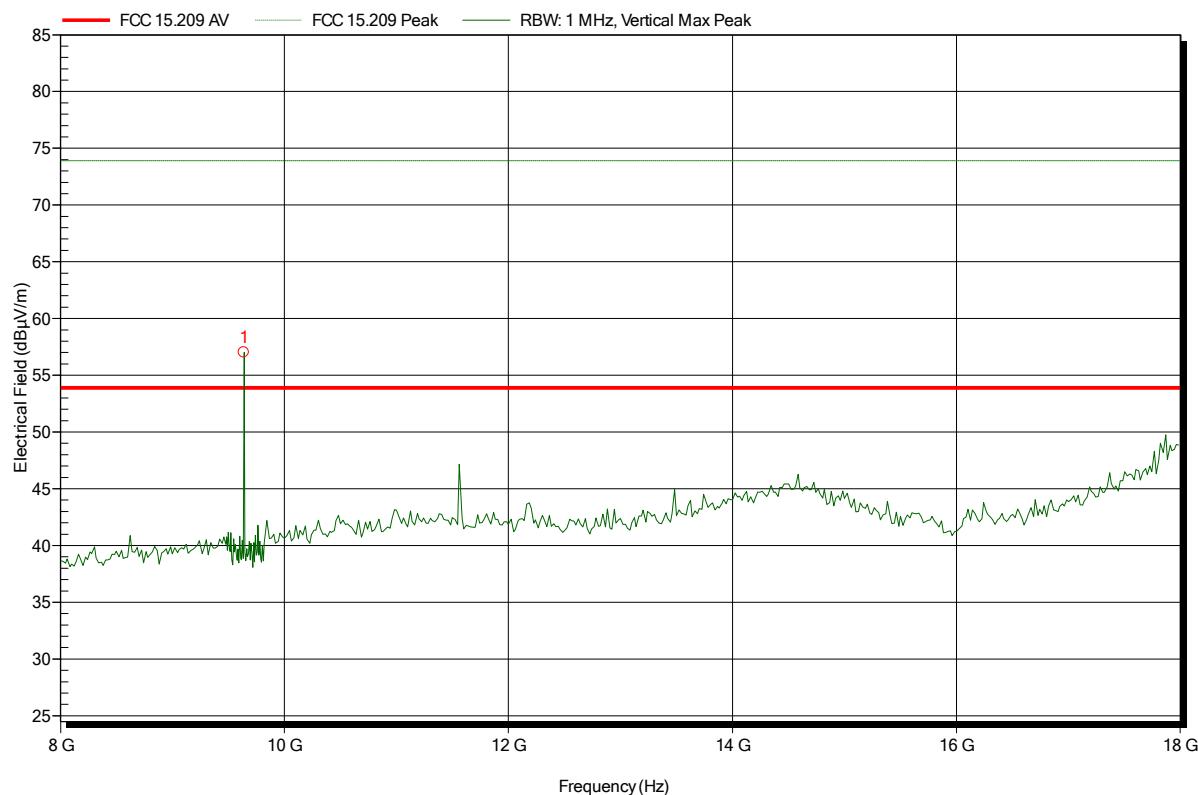


Frequency	Peak	Peak Limit	Peak Difference	Status
9.64 GHz	57 dB μ V/m	73.9 dB μ V/m	-16.9 dB	Pass

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; UPCS: Ch.: 0
Test Date: 2015-08-27
Note: EUT horizontal

Index 12

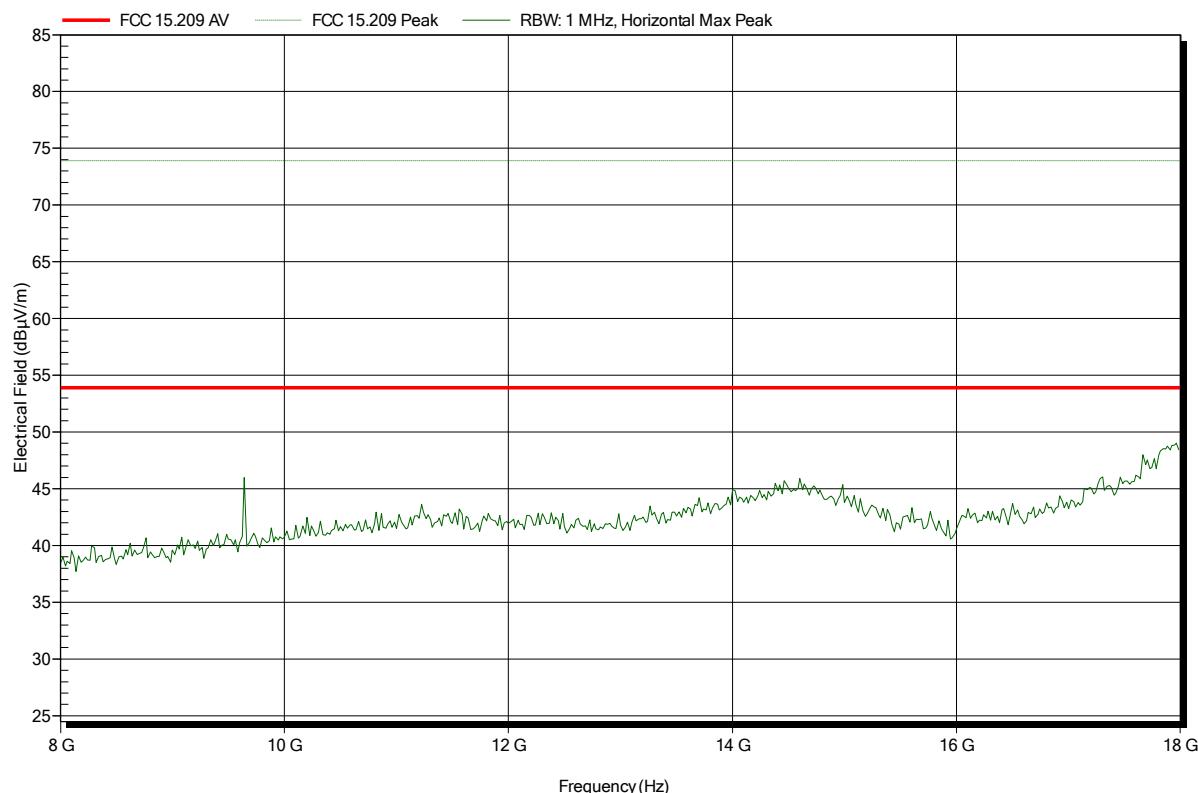


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 22^{\circ}\text{C}$, $V_{nom}: 3.7 \text{ VDC}$ (battery)
Antenna: Rohde & Schwarz HL 025, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; UPCS: Ch.: 4
Test Date: 2015-08-27
Note: EUT horizontal

Index 7

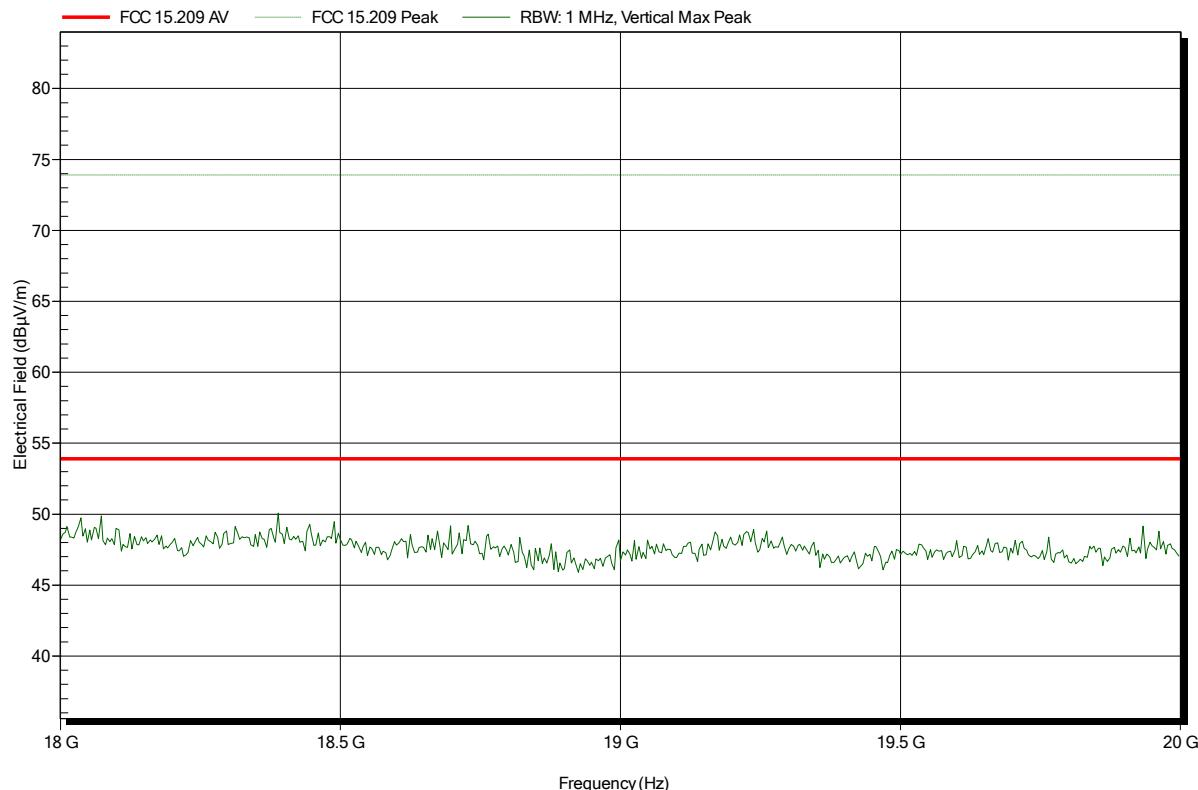


Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: T_{nom}: 22°C, V_{nom}: 3.7 VDC (battery)
Antenna: Rohde & Schwarz HL 025, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; UPCS: Ch.: 4
Test Date: 2015-08-27
Note: EUT horizontal

Index 14

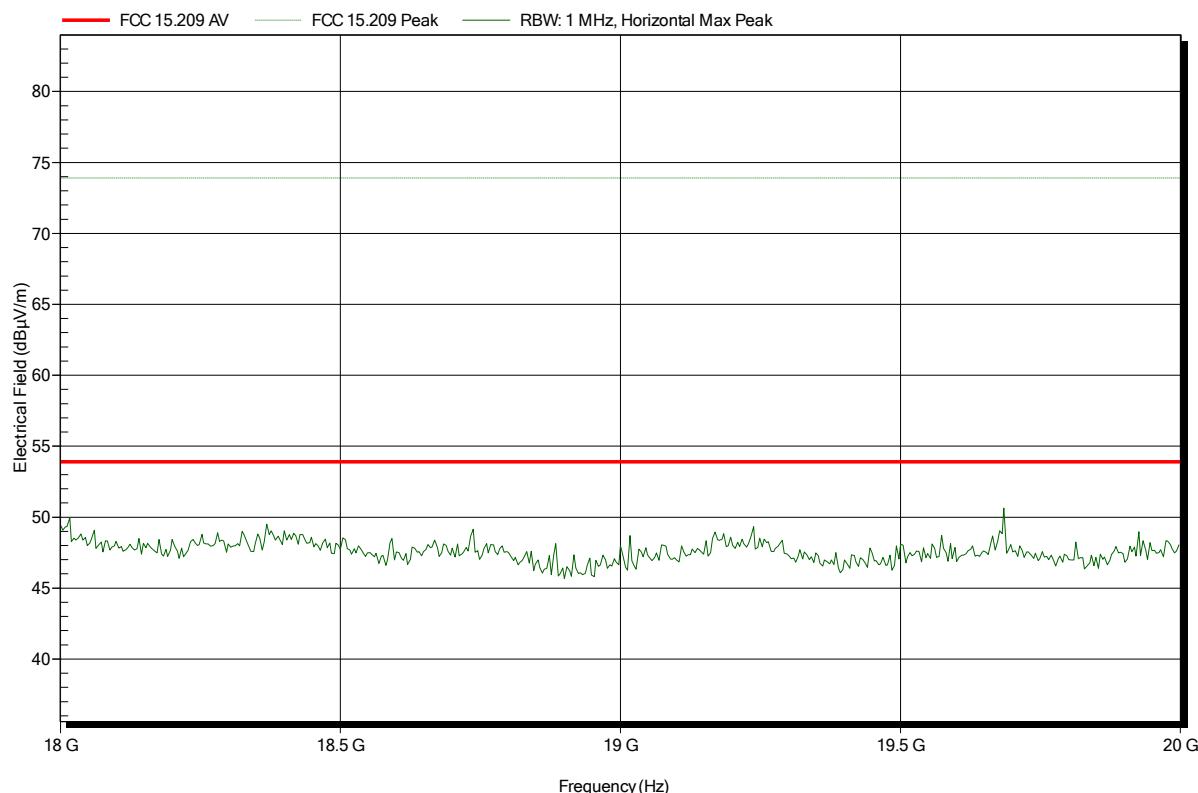

Test Report No.: G0M-1507-4913-TFC15DPP-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 77 of 101

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: T_{nom}: 22°C, V_{nom}: 3.7 VDC (battery)
Antenna: Rohde & Schwarz HL 025, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; UPCS: Ch.: 0
Test Date: 2015-08-27
Note: EUT horizontal

Index 8

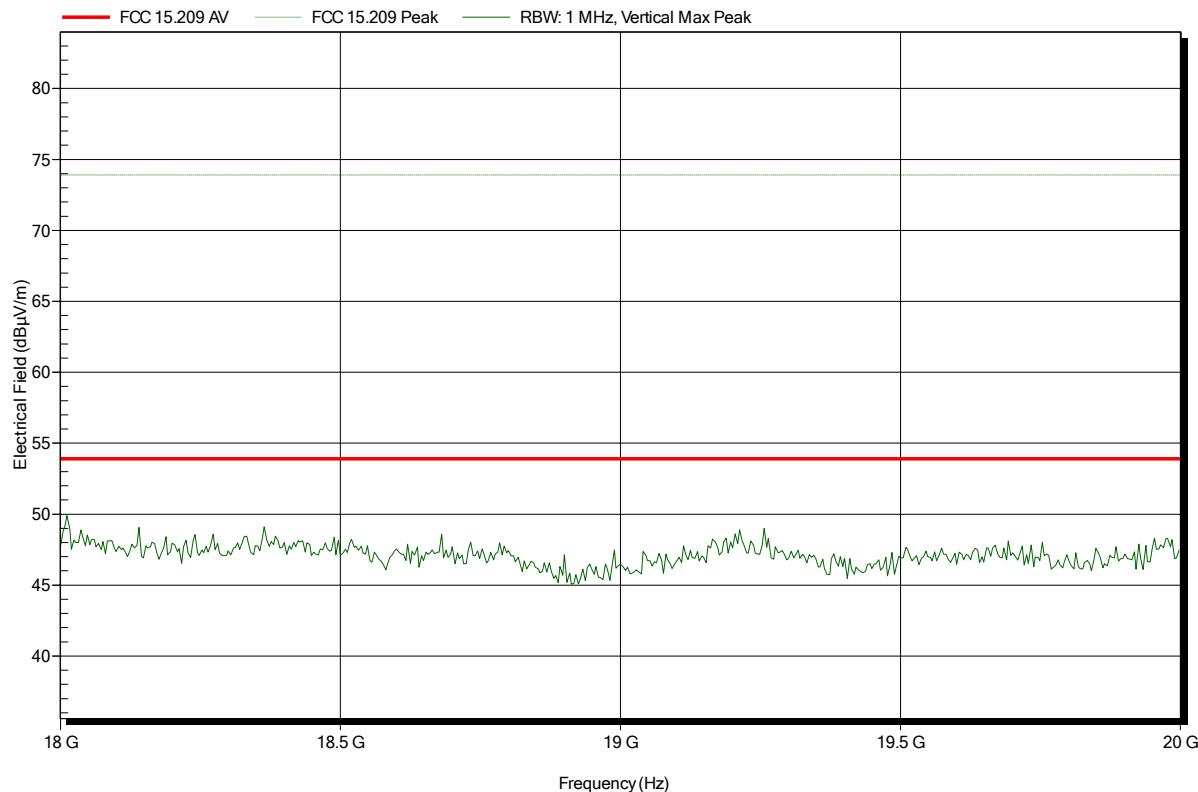

Test Report No.: G0M-1507-4913-TFC15DPP-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 78 of 101

Spurious emissions according to FCC 15.209

Project number: G0M-1507-4913

Applicant: Quail Digital Ltd
EUT Name: Dect wireless headset for intercommunication use
Model: Q-P7HS
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 22°C, Vnom: 3.7 VDC (battery)
Antenna: Rohde & Schwarz HL 025, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; UPCS: Ch.: 0
Test Date: 2015-08-27
Note: EUT horizontal


Index 13

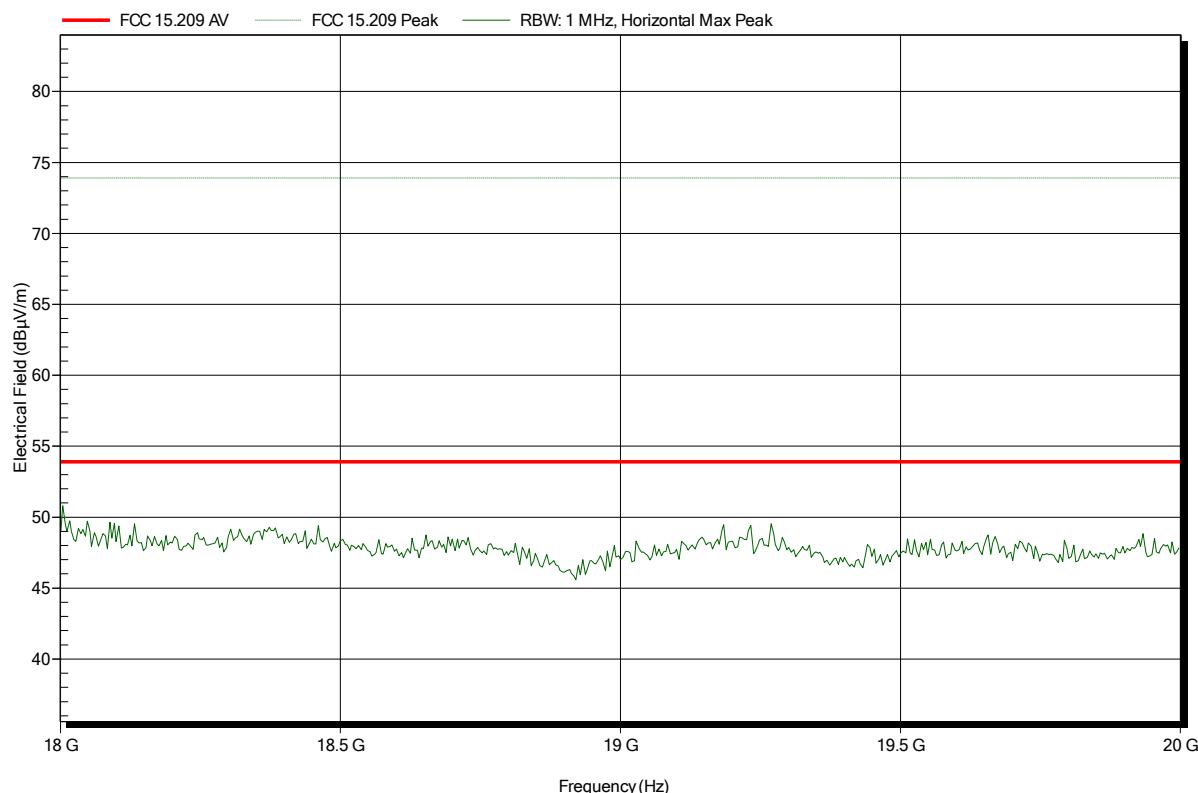

Test Report No.: G0M-1507-4913-TFC15DPP-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 79 of 101

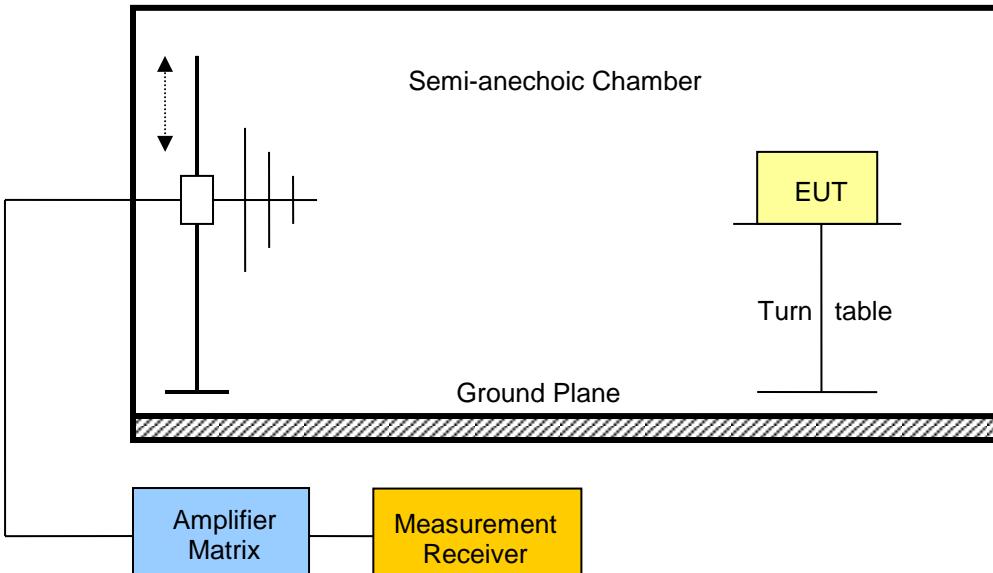Receiver spurious emissions acc. to IC RSS-213		Verdict: PASS		
Test according referenced standards		Reference Method		
		IC RSS-213 3.1		
Test according to measurement reference		Reference Method		
		ANSI C63.4		
Tested frequencies		Scan (All)		
Tested frequency range		30 MHz – 5 th Harmonic		
EUT test mode		Receive		
Limits				
Frequency range [MHz]	Detector	Limit [μ V/m]	Limit [dB μ V/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure							
<ol style="list-style-type: none"> 1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels 							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dB μ V/m]	Pol.	Det.	Limit [dB μ V/m]	Margin [dB]
F _{MID}	1924.992	188.44	33.53	hor	pk	43.50	-09.97
F _{MID}	1924.992	662.4	19.83	ver	pk	46.00	-26.17
F _{MID}	1924.992	662.4	34.45	hor	pk	46.00	-11.55
F _{MID}	1924.992	3826	39.84	hor	pk	53.98	-14.14
F _{MID}	1924.992	3946	38.97	ver	pk	53.98	-15.01
F _{MID}	1924.992	7912	49.33	hor	pk	53.98	-04.65
F _{MID}	1924.992	7952	49.28	ver	pk	53.98	-04.70
F _{MID}	1924.992	11544	43.16	ver	pk	53.98	-10.82
F _{MID}	1924.992	11564	43.46	hor	pk	53.98	-10.52
Comments:							

3.12 Test Conditions and Results – Automatic discontinuation of Transmission

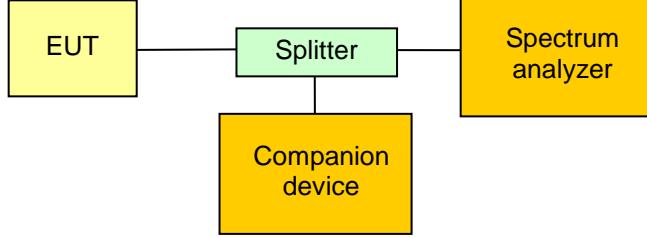Automatic discontinuation of transmission acc. to FCC 15D / RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(f) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	Manual evaluation	
EUT equipment type	Portable part	
Requirements		
The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. This is not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] </pre>		
Test procedure		
The following situations were simulated to test the reaction of the EUT:		
<ul style="list-style-type: none"> • EUT power removed • EUT switched –off • Companion device switched off • Hook-on by companion device • Hook-on by EUT • Power removed from companion device 		
The reaction of the EUT is recorded by the following results:		
A – Connection breakdown, cease of all transmissions B – Connection breakdown, EUT transmits control and signalling information C – Connection breakdown, Companion device transmits control and signalling information N/A – Not applicable (the EUT or companion device does not have an on/off switch or cannot perform hook on)		
Result		
Test	Reaction	Verdict
Power removed : EUT	A	PASS
Power removed : Companion device	A	PASS
Switch –off : EUT	A	PASS
Switch –off : Companion device	A	PASS
Hook-on : EUT	A	PASS
Hook-on : Companion device	A	PASS


3.13 Test Conditions and Results – Radiofrequency radiation exposure

Radiofrequency radiation exposure acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(i) / IC RSS-102	
Requirements		
FCC : Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.		
IC : Category I and Category II equipment shall comply with the applicable requirements of RSS-102.		
Result		
Reference	Verdict	
see dedicated report : G0M-1507-4913-TFC093SR-V01 issued by Eurofins Product Service GmbH	PASS	


3.14 Test Conditions and Results – LIC Confirmation

LIC Confirmation acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.3.2 / 7.3.3	
Requirements		
A device utilizing the provisions of FCC 47 CFR 15.323(c)(5) / IC RSS-213(b)(5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.		
Test result		
Evaluation	Verdict	
The requirement is verified using the “LIC Selected Channel Confirmation” and “LIC Procedure Test” test.	PASS	
Comments:		

3.15 Test Conditions and Results – LIC Procedure Test

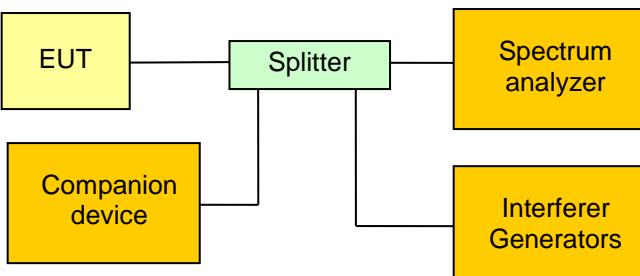LIC Procedure Test acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause	Reference		
	FCC 15.323(c)(5) / IC RSS-213 5.2		
Test according referenced standards	Reference Method		
	ANSI C63.17 7.3.2		
Requirements			
FCC: If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.			
IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.			
Test setup			
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Splitter Splitter --- Interferers[Interferer Generators] </pre>			
Test procedure			
<ol style="list-style-type: none"> 1. The EUT is forced to two carrier frequencies f_1 and f_2 only by the use of interferer generators with power levels higher than the threshold T_L plus the measurement uncertainty U_M of 6 dB 2. Additional interferer signals are applied to the channels f_1 and f_2 according to the result table below 3. A communication session with the companion device is initiated 4. Transmission on the least interfered channel is verified 5. The communication session is terminated 6. The communications session is established another 4 times 			
Test results			
Interferer Level f_1	Interferer Level f_2	Communication channel	Verdict
$T_L + U_M + 7$ dB	$T_L + U_M$	f_2	PASS
$T_L + U_M$	$T_L + U_M + 7$ dB	f_1	PASS
$T_L + U_M + 1$ dB	$T_L + U_M - 6$ dB	f_2	PASS
$T_L + U_M - 6$ dB	$T_L + U_M + 1$ dB	f_1	PASS
Comments:			

3.16 Test Conditions and Results – LIC Selected Channel Confirmation

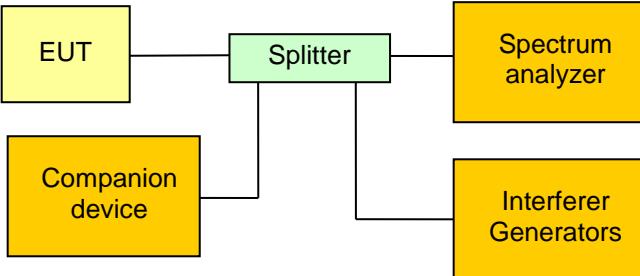LIC Selected Channel Confirmation acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause	Reference		
	FCC 15.323(c)(1) / IC RSS-213 5.2		
Test according referenced standards	Reference Method		
	ANSI C63.17 7.3.3		
Requirements			
Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.			
Test setup			
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferer[Interferer Generators] Interferer --- Splitter </pre>			
Test procedure			
<ol style="list-style-type: none"> 1. The EUT is forced to two carrier frequencies f_1 and f_2 only by the use of interferer generators with power levels 20 dB higher than the threshold T_L plus the measurement uncertainty U_M of 6 dB 2. The interferer level on channel frequency f_1 is also set to $T_L + U_M + 20$ dB and channel f_2 has no interferer 3. A communication session is initiated on f_2 and transmission on f_1 is verified 4. An interferer level of $T_L + U_M + 20$ dB is applied to f_2 and the interferer on channel f_1 is removed 20ms after the interferer on f_2 is applied 5. Transmission on f_1 and f_2 is monitored with the spectrum analyzer and it is verified that the EUT does not transmit on f_2. 			
Test results			
Initial transmit channel	Interferer level	Final transmit channel	Verdict
f_2	0	f_2	PASS
f_2	$T_L + U_M + 20$ dB	f_1	PASS
Comments:			


3.17 Test Conditions and Results – Monitoring antenna

Monitoring antenna acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(8) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17.4	
Monitoring antenna	The same as transmitting antenna	
Requirements		
The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.		
Results		
Connection status		Verdict
N/A (monitoring antenna identical to transmitting antenna)		PASS

3.18 Test Conditions and Results – Monitoring Bandwidth

Monitoring Bandwidth acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(7) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17 7.4	
Requirements		
The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission		
Results		
Monitoring receiver	Verdict	
The same as used for communication	PASS	


3.19 Test Conditions and Results – Monitoring reaction time and monitoring interval

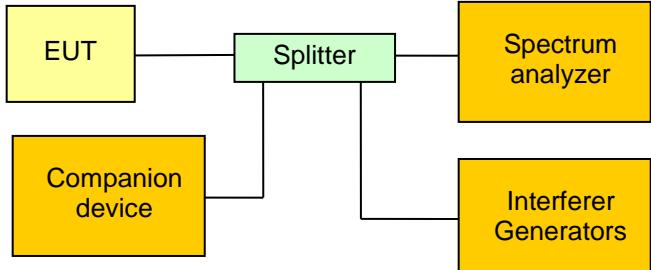Monitoring reaction time and monitoring interval acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause		Reference FCC 15.323(c)(7) / IC RSS-213 5.2
Test according referenced standards		Reference Method ANSI C63.17 7.5
Requirements		
The monitor shall have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission(occupied)} \text{ bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission (occupied)} \text{ bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Interferer[Interferer Generators] Companion[Companion device] --- Splitter </pre>		
Test procedure		
<ol style="list-style-type: none"> 1. Using interferer signals operation is restricted to channel f_1 2. A time-synchronized, pulsed interference is applied to f_1 with a power level of $T_L + U_M$ 3. For systems with a 10 ms frame time and N timeslots per frame, a channel interferer with N pulses in a 10 ms repetition period is applied 4. On f_2 a CW interferer with level equal to T_L is activated 5. The pulse width of the interferer pulses on f_1 is set to the largest of 50 μs and $50 \cdot \sqrt{1.25/\text{Bandwidth[MHz]}} \mu\text{s}$ 6. It is verified that the connection to the companion device is established on f_2 only 7. The level of the interferer pulses on f_1 is set to 6 dB above $T_L + U_M$ 8. The pulse width on f_1 is set to the largest of 35 μs and $35 \cdot \sqrt{1.25/\text{Bandwidth[MHz]}} \mu\text{s}$ 9. It is verified that the connection to the companion device is established on f_2 only 		

Test results - FCC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μs]	Pulse width for test [μs]	Connection on channel f_2	Verdict
F_{LOW}	1.452	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 46.4$	50	Yes	PASS
F_{LOW}	1.452	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 32.5$	35	Yes	PASS
F_{HIGH}	1.456	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 42.9$	50	Yes	PASS
F_{HIGH}	1.456	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 30.0$	35	Yes	PASS
Test results - IC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μs]	Pulse width for test [μs]	Connection possible	Verdict
F_{LOW}	1.200	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 51.0$	51.0	Yes	PASS
F_{LOW}	1.200	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 35.7$	35.7	Yes	PASS
F_{HIGH}	1.216	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 50.7$	50.7	Yes	PASS
F_{HIGH}	1.216	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 35.5$	35.5	Yes	PASS


Comments:

3.20 Test Conditions and Results – Acknowledgements

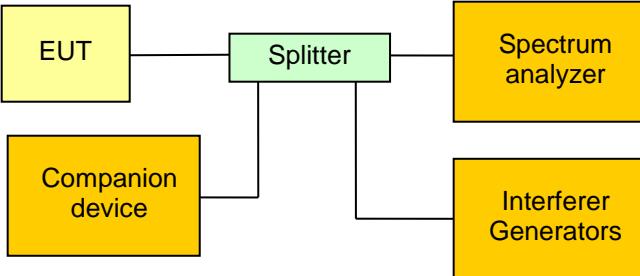
Acknowledgements acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(4) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.2.1	
EUT can initiate a communication session	Yes	
Requirements		
Once access to specific combined time and spectrum windows is obtained, an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease.		
Periodic acknowledgements must be received at least every 30 seconds or transmission must cease.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] </pre>		
Test procedure		
<ol style="list-style-type: none"> (Applies to EUTs that can initiate a communication session (e.g. portable parts)) The acknowledgement timeslots are blocked by interferer signals An attempt to establish communication session is started from the EUT The emissions from the EUT are monitored to verify that the EUT does not transmit for more than 1s Next the acknowledgements are unblocked and another communication session is established between the EUT and the companion device It is verified that the communication session is successful (Applies to all EUTs) With all acknowledges unblocked, an communication session is initiated between the EUT and the companion device The acknowledgements were blocked and the time the EUT continues to transmit is recorded 		

Test results		
Maximum initial transmission [s]	Transmission time limit [s]	Verdict
0.600	1	PASS
Maximum transmission time [s]	Transmission time limit [s]	Verdict
7	30	PASS
Comments:		

3.21 Test Conditions and Results – Transmission duration

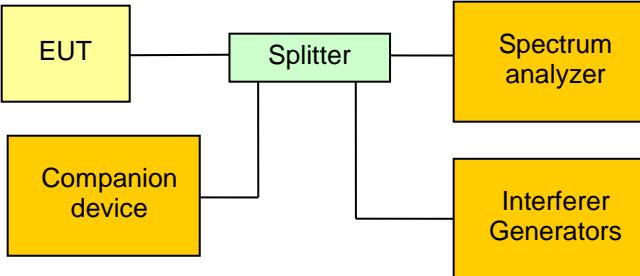Transmission duration acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: N/A
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(3) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.2.2	
Requirements		
<p>If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring.</p> <p>However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.</p>		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Interferer[Interferer Generators] Companion[Companion device] --- Splitter SA --- Interferer </pre>		
Test procedure		
<ol style="list-style-type: none"> 1. A communication session is established between the EUT and the companion device. 2. With the beginning of the communication session a counter is started 3. An interferer is introduced on the communication channel to force the EUT to select a different communication channel if the communications has to be reestablished 4. As soon as the communication session switches to a different channel the time measurement is stopped 		
Test results		
Total transmission time [h]	Transmission time limit	Verdict
0.5 hours	8 hours	PASS
Comments:		
For the DECT system the communication session is established by the portable part and the fixed part simply follows the portable part. Hence it's the responsibility of the portable part to control the maximum transmit period.		

3.22 Test Conditions and Results – Duplex connections

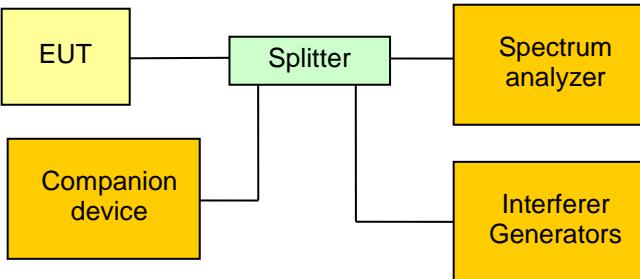Duplex connections acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS		
EUT requirement rule parts and clause	Reference			
	FCC 15.323(c)(10) / IC RSS-213 5.2			
Test according referenced standards	Reference Method			
	ANSI C63.17 8.3			
EUT implements LIC algorithm	Yes			
Number of duplex channels	> 20			
Requirements				
<p>An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows.</p> <p>If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window.</p> <p>If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.</p>				
Test setup				
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Interferer[Interferer Generators] Companion[Companion device] --- Splitter </pre>				

Test procedure (EUT implements LIC algorithm and offer at least 20 duplex channels)

1. The path loss between the EUT and the companion device is adjusted such that the received signal to the EUT is at least 40 dB above $T_L + U_M$
2. By the use of interference signals the EUT is restricted to channel f_1
3. An interference of level $T_L + U_M$ is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below T_L
4. An interference of level $T_L + U_M + 7\text{dB}$ is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below T_L . The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
5. It is verified that the interference levels at the companion device are at least 10 dB below T_L for all time/spectrum windows
6. An attempt is made to establish a connection and it is verified that the connection is established on the interference-free receive time/spectrum window and its duplex mate
7. Next an interference of level $T_L + U_M + 7\text{dB}$ is applied per carrier on the enabled carriers on all its transmit time/spectrum windows except one, which has interference at least 10 dB below T_L
8. An interference of level $T_L + U_M$ is applied per carrier on the enabled carriers on all its receive time/spectrum windows except one, which has interference at least 10 dB below T_L . The interference free receive time/spectrum window must not be the duplex mate of the interference-free transmit time/spectrum window
9. It is verified that the interference levels at the companion device are at least 10 dB below T_L for all time/spectrum windows
10. An attempt is made to establish a connection and it is verified that the connection is established on the interference-free transmit time/spectrum window and its duplex mate


Test results

Transmit time/spectrum windows	Receive time/spectrum windows	Connection time/spectrum window	Verdict
$T_L + U_M$	$T_L + U_M + 7\text{dB}$	Receive	PASS
$T_L + U_M + 7\text{dB}$	$T_L + U_M$	Transmit	PASS
Comments:			

3.23 Test Conditions and Results – Fair access

Fair access acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(12) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	Customer declaration	
Requirements		
The provisions of FCC 47 CRF 15.323(c)(10), IC RSS-213(b)(10) or FCC 47 CRF 15.323(c)(11), IC RSS-213(b)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.		
Declaration		
The manufacturer declares that this device does not work in a mode which denies fair access to spectrum for other participants		


3.24 Test Conditions and Results – Frame period and Jitter

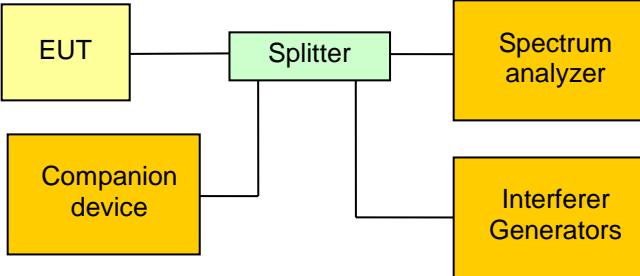Frame period and Jitter acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause		Reference
FCC 15.323(e) / IC RSS-213 5.2		
Test according referenced standards		Reference Method
		ANSI C63.17 6.2.3
Requirements		
<p>The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this sub-band shall be 20 milliseconds/X where X is a positive whole number.</p> <p>The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions.</p>		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] </pre>		
Test procedure		
<ol style="list-style-type: none"> 1. With a spectrum analyzer the frame periods are measured over time 2. 100 000 frames are measured 3. The peak-to-peak, mean and standard deviation values are computed 		
Test results – Frame period		
Mean value [ms]	Divider X (10ms/X)	Verdict
9,999898 = 10.00 – 0.000102	1	PASS
Test results – Jitter		
Maximum difference between frames [μs]	Limit [μs]	Verdict
0.071712	25 – 0.000102 = 24.999898	PASS
Comments:		


Frame period and Jitter
FCC Part 15.323 Frame Period and jitter
Test procedure ANSI 63.17
UPCS

EUT DECT Wireless headset for intercommunication use
 Model Q-P7HS
 Applicant Quail Digital UK
 Temperature 25°C
 Test Site / Operator Eurofins Product Service GmbH
 Test Specification Frame Period and jitter

Width of the 0,002868 µs
 time class 9,999898 ms
 Mean 0,000012
 Deviation 0,071712 µs
 Max-Min
 Test result Verdict = PASS

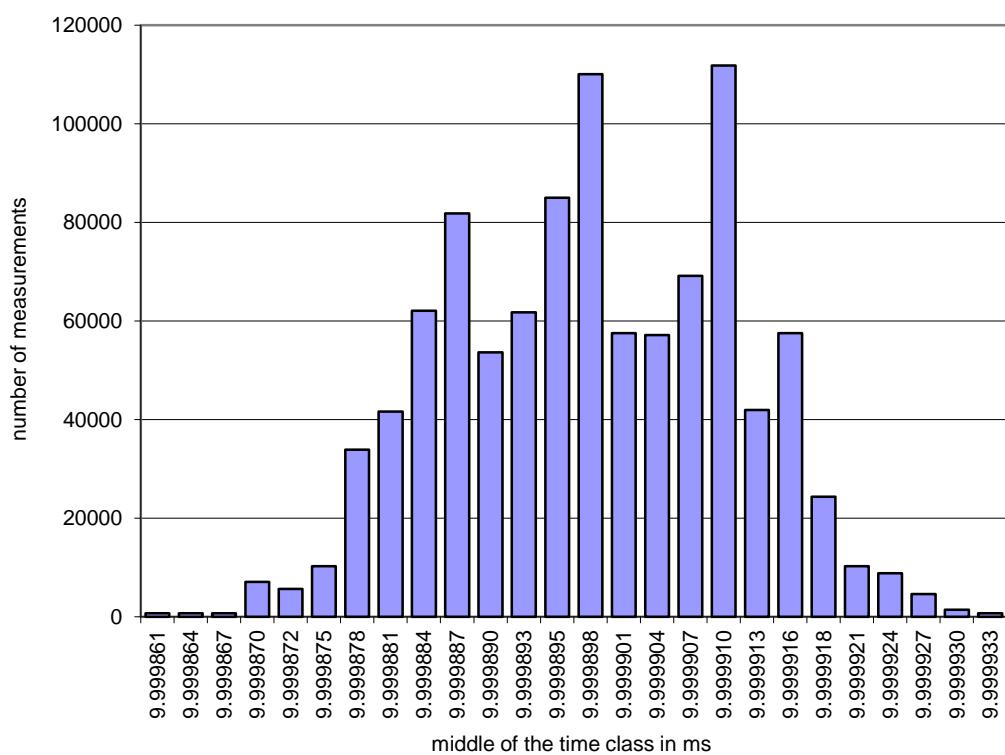Histogram


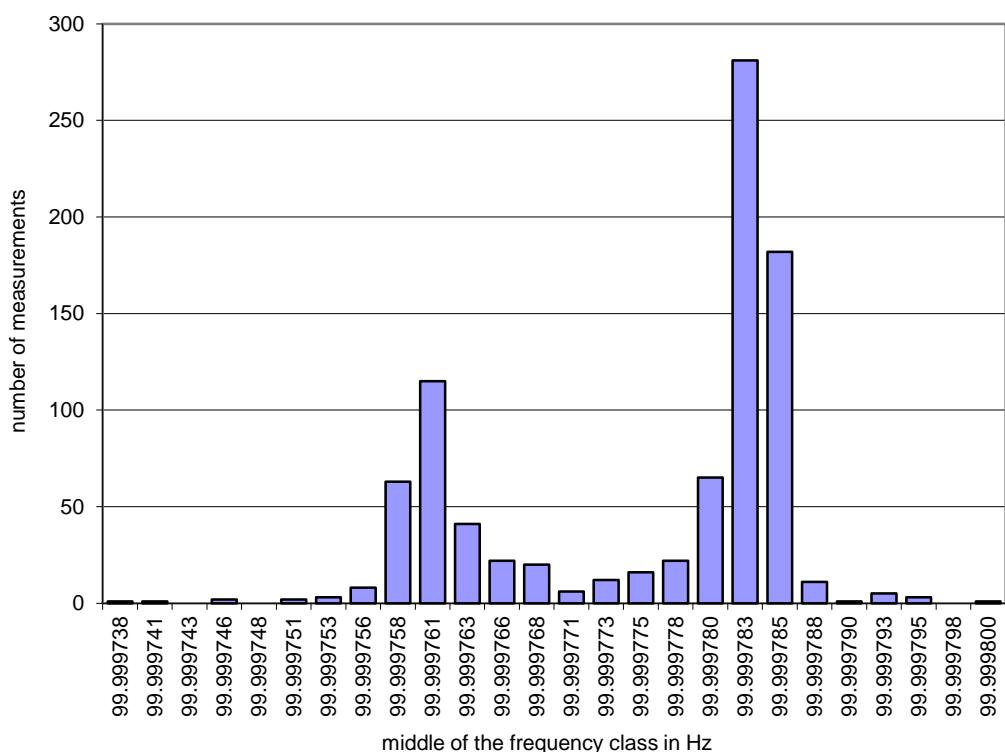
3.25 Test Conditions and Results – Frame repetition stability

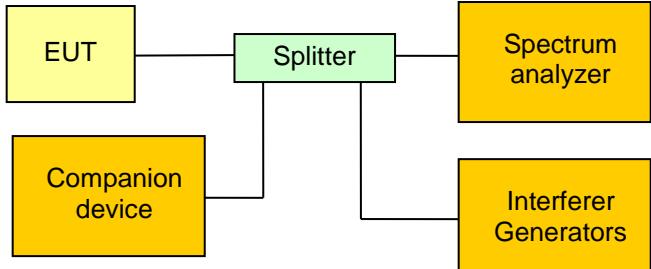Frame repetition stability acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS	
EUT requirement rule parts and clause		Reference	
FCC 15.323(e) / IC RSS-213 5.2			
Test according referenced standards		Reference Method	
ANSI C63.17 6.2.2			
Access scheme used		Time Division Multiple Access	
Requirements			
Each device that implements time division for the purpose of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.			
Test setup			
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- Companion[Companion device] Companion --- Interferers[Interferer Generators] Interferers --- Splitter </pre>			
Test procedure			
<ol style="list-style-type: none"> 1. With a spectrum analyzer the frame repetition periods are measured over time 2. 1 000 frame repetitions are measured 3. The mean and standard deviation values are computed 			
Test results			
Access scheme	Error [ppm]	Limit [ppm]	Verdict
Time Division Access	N/A	50	N/A
Time Division Multiple Access	0.323229	10	PASS
Comments:			

Frame repetition stability**FCC Part 15.323 Frame repetition****Test procedure ANSI 63.17****UPCS**

EUT DECT Wireless headset for intercommunication use
Model Q-P7HS
Applicant Quail Digital UK
Temperature 23°C
Test Site / Operator Eurofins Product Service GmbH
Test Specification Frame repetition

Width of the 0,000002 Hz
frequency class 99,999776 Hz
Mean 0,000011
Deviation 0,323229 ppm
Stability in ppm
Test result Verdict = PASS

Histogram

3.26 Test Conditions and Results – Maximum spectral occupancy

Maximum spectral occupancy acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	Customer declaration	
Requirements		
No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.		
Test result		
Evaluation	Verdict	
According to the technical documentation the total number of time and spectrum windows is: $5 \times 12 = 60$	PASS	
According to customer declaration the total number of concurrent time and spectrum windows is: 12		
The number of concurrent allocated time and spectrum windows is less than one third of the total time and spectrum windows of the EUT		
Comments:		