



SHENZHEN MOST ELECTRONICS CO., LTD.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

Test Report

Product Name: Notebook Cooler

FCC ID: UDHDYNAEON

Applicant:

DYNAEON INDUSTRIAL CO., LTD.
1ST FK 362 TABAB RD SGUBKUB TAIPEI TAIWAN

Date Received: 6/27/2006

Date Tested: 6/27/2006

APPLICANT: DYNAEON INDUSTRIAL CO., LTD.
FCC ID: UDHDYNAEON

Cover Sheet



SHENZHEN MOST ELECTRONICS CO., LTD.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TABLE OF CONTENTS

APPLICANT: DYNÄEON INDUSTRIAL CO., LTD.

FCC ID: UDHDYNÄEON

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE
PAGE 3-5.....POWER LINE CONDUCTED INTERFERENCE AND PLOTS
PAGE 6.....RADIATION INTERFERENCE TEST DATA

EXHIBIT INCLUDED:

PAGE 1.....BLOCK DIAGRAM
PAGE 2.....SCHEMATIC
PAGE 3.....USERS MANUAL
PAGE 4.....LABEL SAMPLE
PAGE 5.....LABEL LOCATION
PAGE 6.....EXTERNAL PHOTOGRAPHS
PAGE 7.....INTERNAL PHOTOGRAPHS
PAGE 8.....OPERATIONAL DESCRIPTION
PAGE 9.....TEST SET UP PHOTOGRAPHS

APPLICANT: DYNÄEON INDUSTRIAL CO., LTD.
FCC ID: UDHDYNÄEON

TABLE OF CONTENTS



SHENZHEN MOST ELECTRONICS CO., LTD.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

EMC Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ROHDE&SCHWARZ	ESCS30	100307	Mar 20,2006	1 Year
LISN	ROHDE&SCHWARZ	ESH3-Z5	100305	Mar 20,2006	1 Year
Pulse Limiter	ROHDE&SCHWARZ	ESH3-Z2	100305	Mar 20,2006	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 20,2006	1 Year
Spectrum Analyzer	ANRITSU	MS2651B	6200238856	Mar 20,2006	1 Year
Bilog Antenna	SCHWARZBECK	VULB 9163	9163-194	Mar 20,2006	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 20,2006	1 Year
Cable	Resenberger	N/A	NO.1	Mar 20,2006	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar 20,2006	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar 20,2006	1 Year
DC Power Filter	DuoJi	DL2×30B	N/A	N/A	N/A
Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	N/A	N/A
3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	N/A	N/A
AC Power Source	California Instruments	5001iX-400	55689	Mar 20,2006	1 Year
Test analyzer	California Instruments	PACS-1	72254	Mar 20,2006	1 Year
ESD Tester	HAEFELY	PESD 1610	H4001552	Mar 20,2006	1 Year
Signal Generator	IFR	2032	203002/100	Mar 20,2006	1 Year
Amplifier	A&R	150W1000	301584	NCR	NCR
Dual Directional Coupler	A&R	DC6080	301508	Mar 20,2006	1 Year
Power Head	A&R	PH2000	301193	Mar 20,2006	1 Year
Power Meter	A&R	PM2002	302799	Mar 20,2006	1 Year
Field Monitor	A&R	FM5004	300329	Mar 20,2006	1 Year
Field Probe	A&R	FP5000	300221	Mar 20,2006	1 Year
EMCPRO System	Thermo	RO-BASE	0403271	Mar 20,2006	1 Year
Capacitive Clamp	Thermo	PRO-CCL	0403272	Mar 20,2006	1 Year
EMCPRO System	Thermo	PRO-BASE	0403271	Mar 20,2006	1 Year
Coupler decoupler for telecom lines	Thermo	CM-TEL-CD	0403273	Mar 20,2006	1 Year
Signal Generator	IFR	2032	203002/100	Mar 20,2006	1 Year
Amplifier	A&R	150W1000	301584	NCR	NCR
EMCPRO System	Thermo	PRO-BASE	0403271	Mar 20,2006	1 Year



SHENZHEN MOST ELECTRONICS CO., LTD.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of SHENZHEN MOST ELECTRONICS CO., LTD. The EUT was transmitting a test signal during the testing.

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50UH LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25 with a humidity of 58%.

RADIATION INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The EUT was tested in 3 orthogonal planes. The ambient temperature of the EUT was 25 with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

$$\begin{array}{ll} \text{Freq (MHz) METER READING + ACF = FS} \\ 33 \quad 20 \text{ dBuV} + 10.36 \text{ dB} = 30.36 \text{ dBuV/m @ 3m} \end{array}$$

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

APPLICANT: DYNNEON INDUSTRIAL CO., LTD.
FCC ID: UDHDYNNEON



SHENZHEN MOST ELECTRONICS CO., LTD.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: DYNNEON INDUSTRIAL CO., LTD.

FCC ID: UDHDYNNEON

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NUMBER: 15.107

MINIMUM REQUIREMENTS:	FREQUENCY	LEVEL
	MHz	UV
	0.150-30	250

TEST PROCEDURE: ANSI STANDARD C63.4-2003

THE HIGHEST EMISSION READ FOR LINE 1 WAS 37.05dB_{UV} @ 910kHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 38.25dB_{UV} @ 910kHz.

THE PLOTS ON THE NEXT PAGE REPRESENT THE EMISSIONS READ FOR POWER LINE CONDUCTED FOR THIS DEVICE.

APPLICANT: DYNNEON INDUSTRIAL CO., LTD.
FCC ID: UDHDYNNEON




Compliance Laboratory

SHENZHEN MOST ELECTRONICS CO., LTD.

Tel: (86) 755-26825180 Fax: (86) 755-86170310

[Http:// www.szmost.com](http://www.szmost.com) Email: szmost@szmost.com

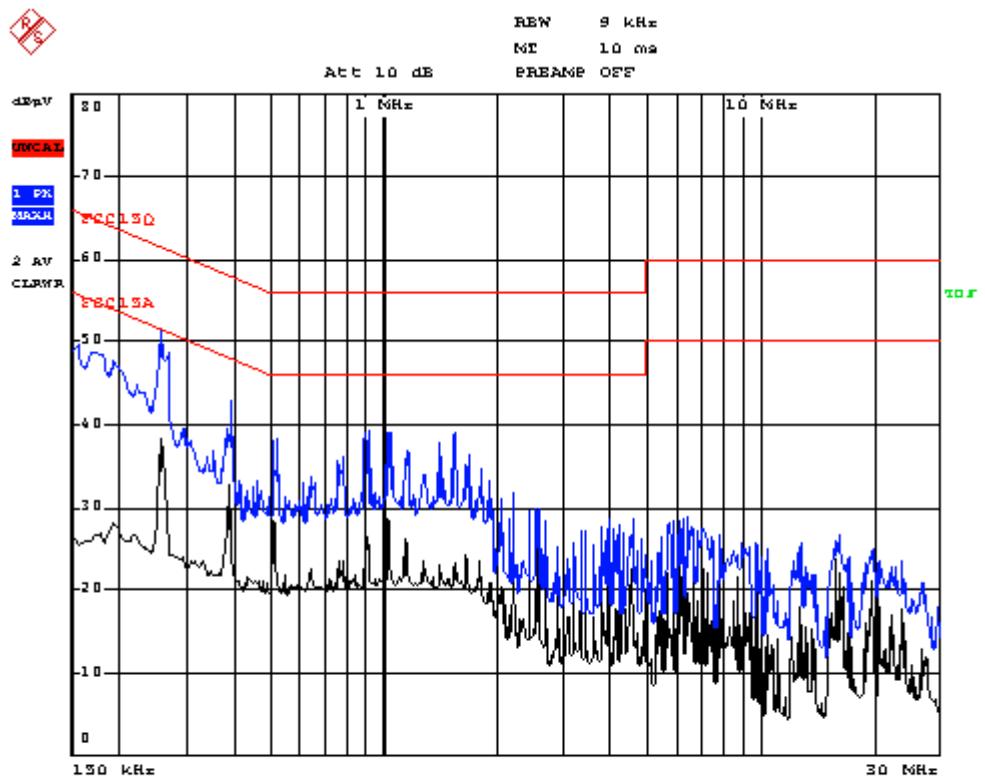


Date: 27.JUN.2006 13:33:24

LINE 1

APPLICANT: DYNNEON INDUSTRIAL CO., LTD.
FCC ID: UDHDYNNEON



SHENZHEN MOST ELECTRONICS CO., LTD.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

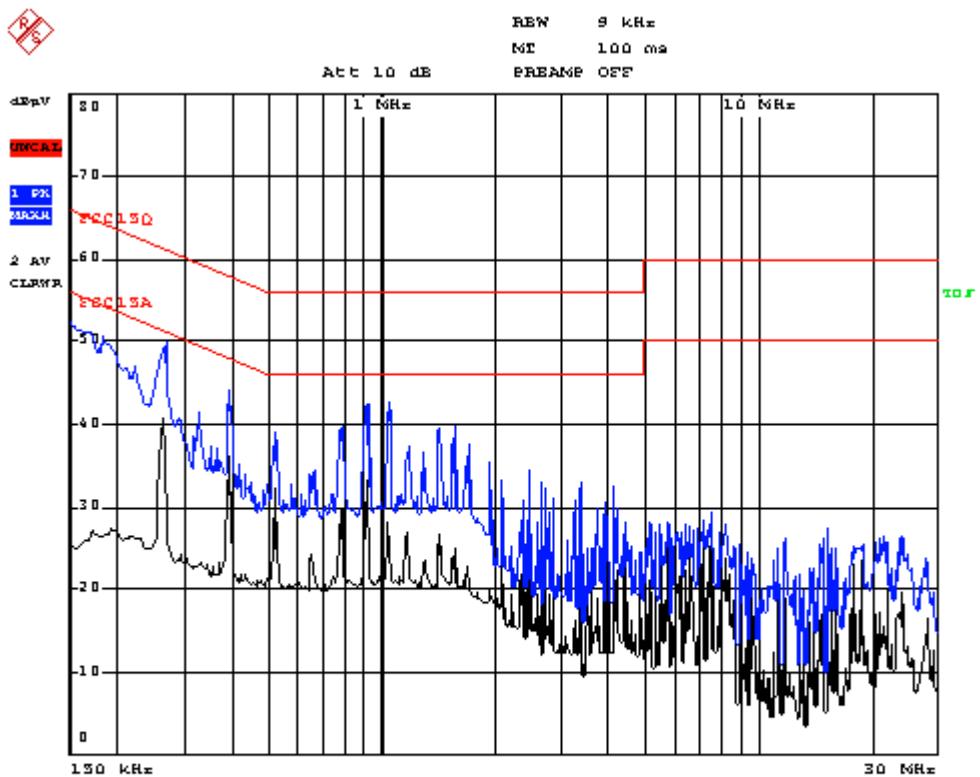

Date: 27.JUN.2006 13:36:06

LINE 2

APPLICANT: DYNAEON INDUSTRIAL CO., LTD.
FCC ID: UDHDYNAEON



SHENZHEN MOST ELECTRONICS CO., LTD.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: DYNÄEON INDUSTRIAL CO., LTD.

FCC ID: UDHDYNÄEON

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.109

REQUIREMENTS:

S15.109
30 - 88 MHz 40 dBuV/m @3M
88 - 216 MHz 43.5
216 - 960 MHz 46
ABOVE 960 MHz 54dBuV/m

Test Data:

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart B Limit (dBuV/m)
43.580	Horizontal	34.38	40.00
45.520	Vertical	33.13	40.00
478.140	Vertical	35.03	46.00
502.390	Horizontal	37.29	46.00
837.040	Vertical	36.63	46.00
838.010	Horizontal	38.69	46.00

Emissions attenuated more than 20 dB below the permissible value are not reported.

TEST PROCEDURE: The procedure used was ANSI STANDARD C63.4-2003. The spectrum was scanned from 30 MHz to 1000 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The EUT was tested in 3 orthogonal planes.

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

APPLICANT: DYNÄEON INDUSTRIAL CO., LTD.
FCC ID: UDHDYNÄEON