



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>G-STAR INDUSTRIAL CO., LTD.</b>
Applicant Address	7F-15, No.16, Lane 609, Sec.5, Chung Hsin Road, San Chung City, Taipei, Taiwan, R.O.C.
FCC ID	<b>UDQ-RF2400</b>
Manufacturer's company	<b>HE GUANG ELECTRONIC CO., LTD.</b>
Manufacturer Address	HenLi Town Shan Xia Industrial District, Dong guan City, Guang Dong Province, China.

Product Name	Wireless Headphone Specificatic
Model Name	RF-2400
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Receive Date	May. 3, 2006
Final Test Date	Aug. 30, 2006
Submission Type	Original Equipment



### Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

**NVLAP**<sup>®</sup>

Lab Code: 200079-0

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies .....	4
3.5. Table for Test Modes.....	4
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units .....	5
3.8. Table for Parameters of Test Software Setting .....	5
3.9. Test Configurations .....	6
<b>4. TEST RESULT .....</b>	<b>8</b>
4.1. AC Power Line Conducted Emissions Measurement.....	8
4.2. Maximum Peak Output Power Measurement .....	14
4.3. Power Spectral Density Measurement .....	16
4.4. 6dB Spectrum Bandwidth Measurement .....	20
4.5. Radiated Emissions Measurement .....	24
4.6. Band Edge Emissions Measurement .....	38
4.7. Antenna Requirements .....	42
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>43</b>
<b>6. SPORTON COMPANY PROFILE .....</b>	<b>45</b>
6.1. Test Location.....	45
<b>7. NVLAP CERTIFICATE OF ACCREDITATION .....</b>	<b>46</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A30</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B10</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~C3</b>




## History of This Test Report

Original Issue Date: Sep. 6, 2006

Report No.: FR650322

■ No additional attachment.

Additional attachment were issued as following record:



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Headphone Specificatio  
Model Name : RF-2400  
Applicant : G-STAR INDUSTRIAL CO., LTD.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on May. 3, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Mandy Liang 7.9.06

Prepared By:

Mandy Liang / Specialist

Steven Lu 7.9.06

Tested By:

Steven Lu / Engineer

Wayne Hsu 7.9.06

Reviewed By:

Wayne Hsu

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	38.12 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	20.78 dB
4.3	15.247(e)	Power Spectral Density	Complies	2.41 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.29 dB
4.6	15.247(d)	Band Edge Emissions	Complies	5.04 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.71dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±6.25×10-7	Confidence levels of 95%
Radiated Emissions/ Band Edge Emissions	±3.72dB	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	Power Adapter
Modulation	FSK
Frequency Range	2400 ~ 2483.5MHz
Channel Number	14
Channel Band Width (99%)	1.64 MHz
Conducted Output Power	9.22 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### 3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	HON-KWANG	D6500-02	Input: 120VAC, 60A Output: 5VDC, 450mA
Adapter 2	-	SY-0450	Input: 120VAC, 60Hz, 12W Output: 5.2VDC, 500mA
Product Name	Remark		
RF-2400 RX Module	-	RF-2400	-

#### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Advanced	AT9520- B2R4HAA	Chip Antenna	NA	3.00

### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Remark
2400~2483.5MHz	1	2467.0 MHz	
	2	2414.5 MHz	
	3	2441.1 MHz	
	4	2463.2MHz	
	5	2425.9 MHz	
	6	2455.6 MHz	
	7	2433.5 MHz	
	8	2459.4 MHz	
	9	2418.3 MHz	
	10	2448.0 MHz	
	11	2422.1 MHz	
	12	2451.8 MHz	
	13	2429.7 MHz	
	14	2463.2 MHz	Same as CH4
	15	2437.3 MHz	
	16	2455.6 MHz	Same as CH6

### 3.5. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	Charge Mode	3	1
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	CTX	1/2/3	NA
Radiated Emissions 9kHz~1GHz	CTX	3	1
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	1/2/3	1
Band Edge Emissions	CTX	1/2	1

Note: CTX=continuously transmitting.(iPod play MP3 music)

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
i-Pod	APPLE	A1112	DoC


### 3.8. Table for Parameters of Test Software Setting

N/A


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configurations: 9kHz ~ 1GHz

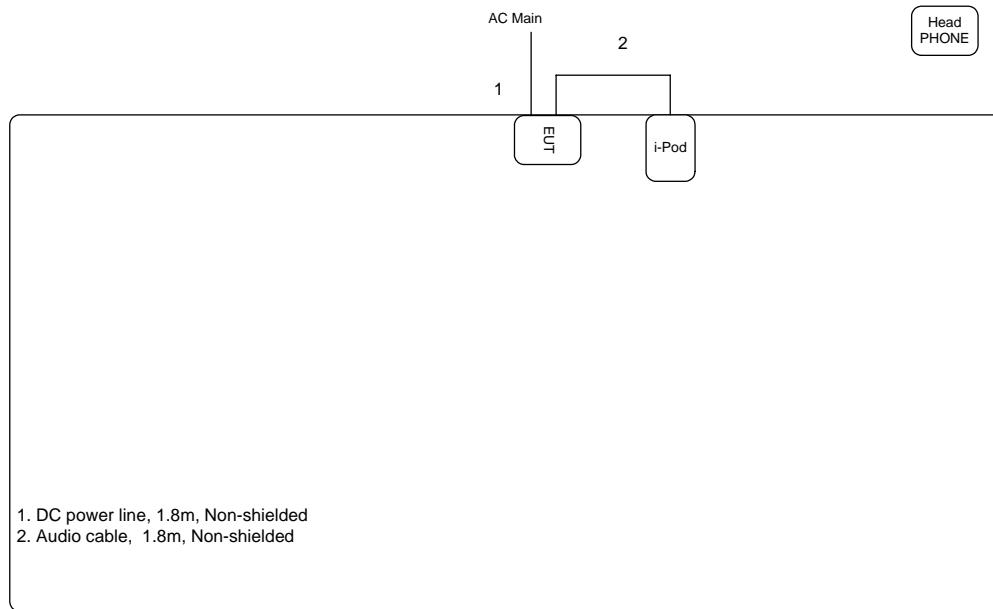

Test Configurations: Above 1GHz

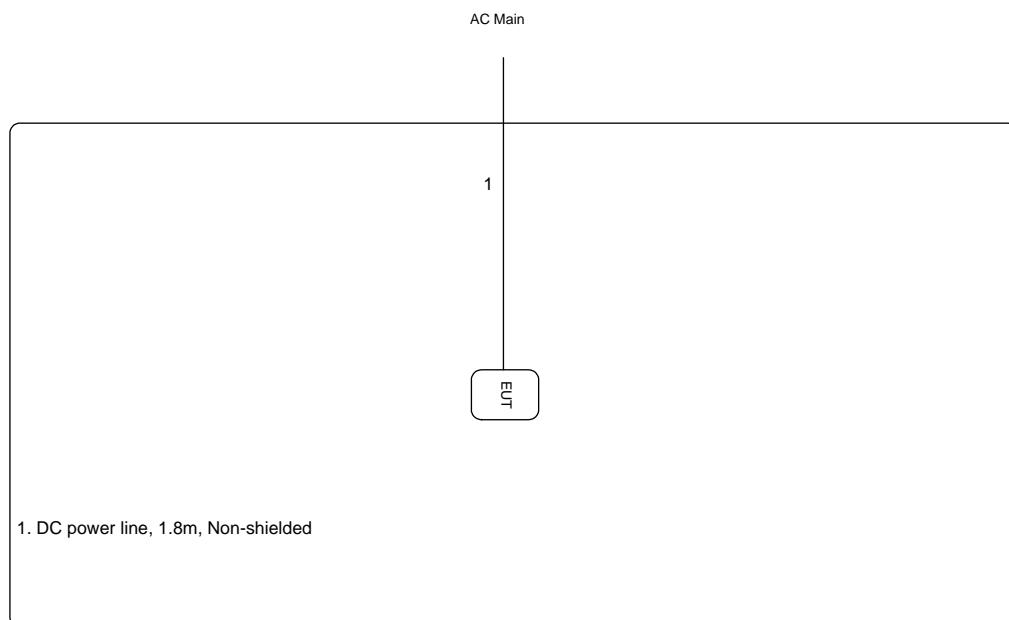

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

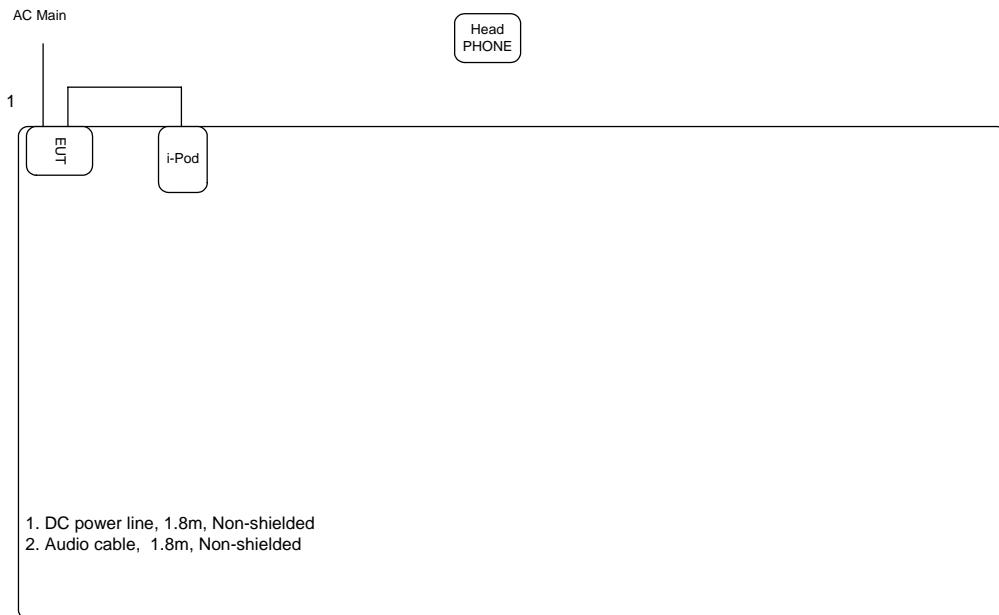

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

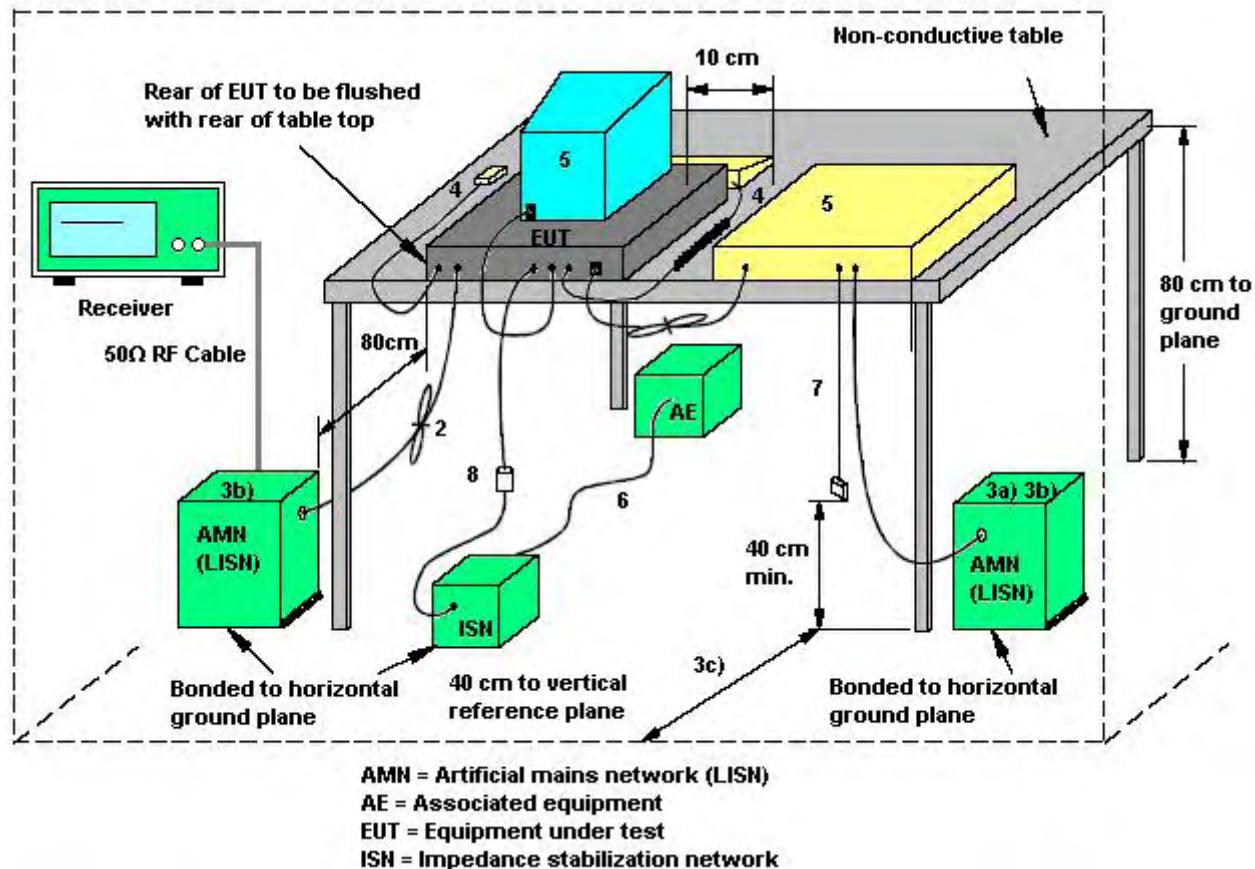

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mouses, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0,1 m from the ISN.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Phase	Line
Configuration	Charge Mode / Adapter 1		

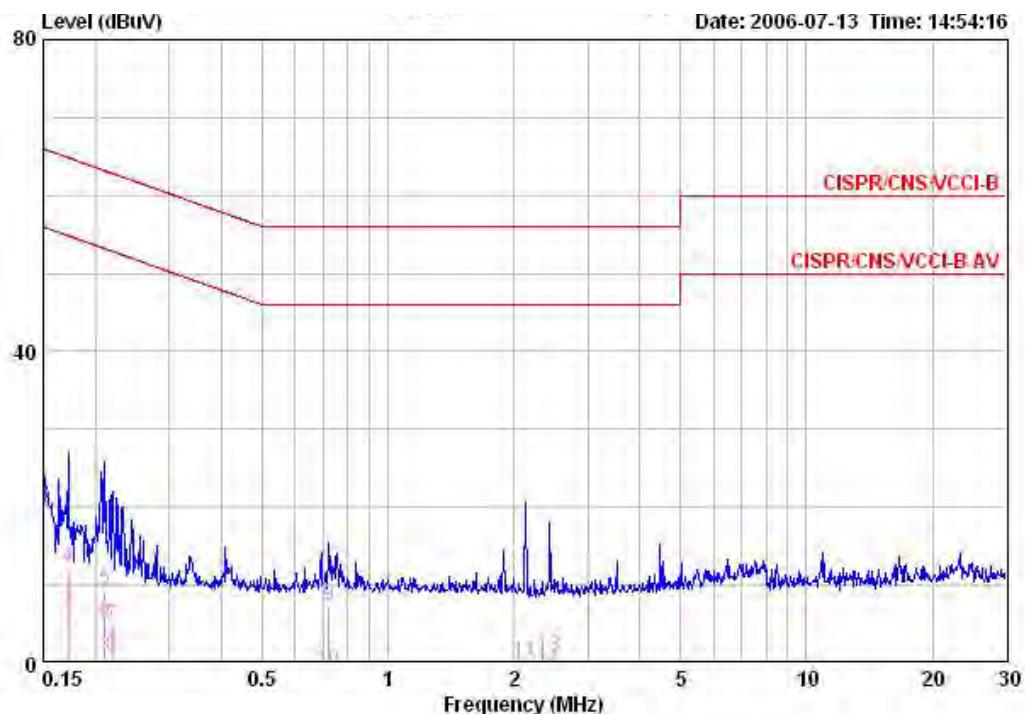

Freq	Level	Over	Limit	Read	LISN	Cable
		Limit	Line	Level	Factor	Loss Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB
0.15000	12.85	-43.15	56.00	10.65	2.00	0.20 AVERAGE
0.15000	19.89	-46.11	66.00	17.69	2.00	0.20 QP
0.17215	6.80	-48.06	54.86	4.74	1.86	0.20 AVERAGE
0.17215	12.16	-52.70	64.86	10.10	1.86	0.20 QP
0.21055	9.30	-53.88	63.18	7.90	1.20	0.20 QP
0.21055	5.45	-47.73	53.18	4.05	1.20	0.20 AVERAGE
0.21967	4.88	-57.95	62.83	3.58	1.10	0.20 QP
0.21967	0.84	-51.99	52.83	-0.46	1.10	0.20 AVERAGE
0.72360	7.38	-48.62	56.00	6.78	0.40	0.20 QP
0.72360	-0.96	-46.96	46.00	-1.56	0.40	0.20 AVERAGE
2.133	0.18	-55.82	56.00	-0.32	0.30	0.20 QP
2.133	-1.34	-47.34	46.00	-1.84	0.30	0.20 AVERAGE
2.435	0.97	-55.03	56.00	0.47	0.30	0.20 QP
2.435	-1.10	-47.10	46.00	-1.60	0.30	0.20 AVERAGE

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Phase	Neutral
Configuration	Charge Mode / Adapter 1		

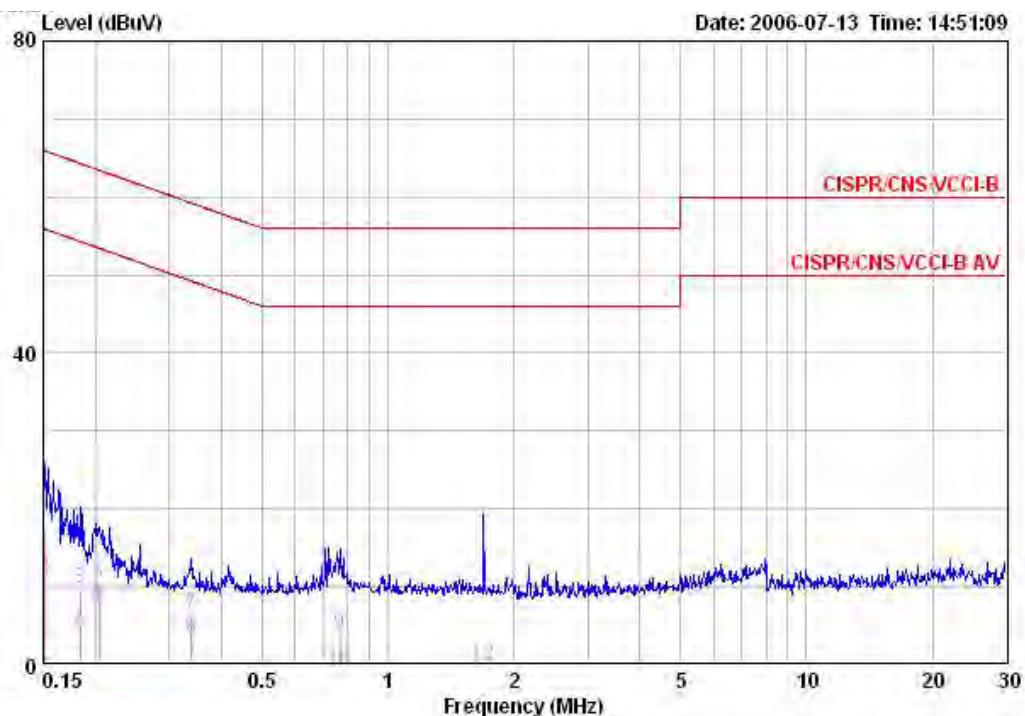


Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	Limit	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15080	17.46	-48.50	65.96	15.36	1.90	0.20 QP
2	0.15080	11.20	-44.76	55.96	9.10	1.90	0.20 AVERAGE
3	0.18346	9.83	-54.50	64.33	8.31	1.32	0.20 QP
4	0.18346	4.07	-50.26	54.33	2.55	1.32	0.20 AVERAGE
5	0.20396	10.48	-52.97	63.45	9.12	1.16	0.20 QP
6	0.20396	7.67	-45.78	53.45	6.31	1.16	0.20 AVERAGE
7	0.33920	6.62	-52.60	59.22	5.82	0.60	0.20 QP
8	0.33920	3.50	-45.72	49.22	2.70	0.60	0.20 AVERAGE
9	0.76702	4.25	-51.75	56.00	3.75	0.30	0.20 QP
10	0.76702	-0.89	-46.89	46.00	-1.39	0.30	0.20 AVERAGE
11	1.689	-1.62	-47.62	46.00	-2.02	0.26	0.14 AVERAGE
12	1.689	0.05	-55.95	56.00	-0.35	0.26	0.14 QP

Note:


Level = Read Level + LISN Factor + Cable Loss.

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Phase	Line
Configuration	Charge Mode / Adapter 2		

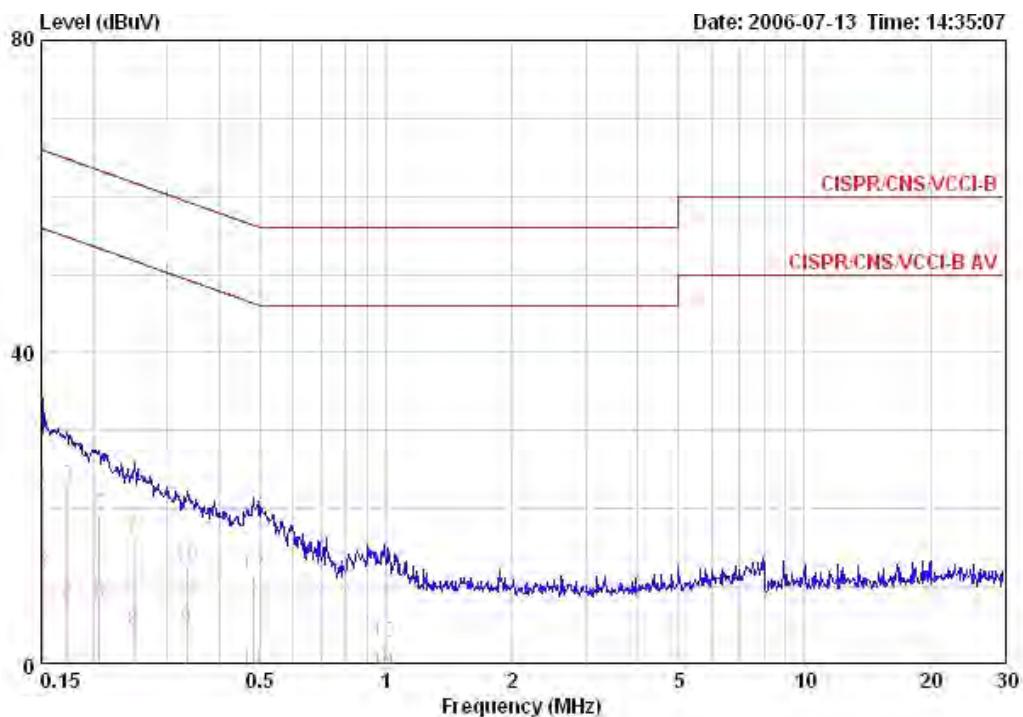

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dBuV	Level	Factor	dB	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15160	22.97	-42.95	65.91	20.75	2.02	0.20 QP
2	0.15160	11.83	-44.09	55.91	9.61	2.02	0.20 AVERAGE
3	0.17307	22.99	-41.82	64.81	20.95	1.84	0.20 QP
4	0.17307	7.68	-47.13	54.81	5.64	1.84	0.20 AVERAGE
5	0.20614	19.12	-44.24	63.36	17.68	1.24	0.20 QP
6	0.20614	8.01	-45.35	53.36	6.57	1.24	0.20 AVERAGE
7	0.25078	16.34	-45.39	61.73	15.24	0.90	0.20 QP
8	0.25078	4.31	-47.42	51.73	3.21	0.90	0.20 AVERAGE
9	0.33385	4.67	-44.68	49.35	3.77	0.70	0.20 AVERAGE
10	0.33385	12.74	-46.61	59.35	11.84	0.70	0.20 QP
11	0.48119	-0.69	-47.01	46.32	-1.29	0.50	0.10 AVERAGE
12	0.48119	11.62	-44.70	56.32	11.02	0.50	0.10 QP
13	0.98914	2.75	-53.25	56.00	2.25	0.30	0.20 QP
14	0.98914	-1.18	-47.18	46.00	-1.68	0.30	0.20 AVERAGE

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Phase	Neutral
Configuration	Charge Mode / Adapter 2		

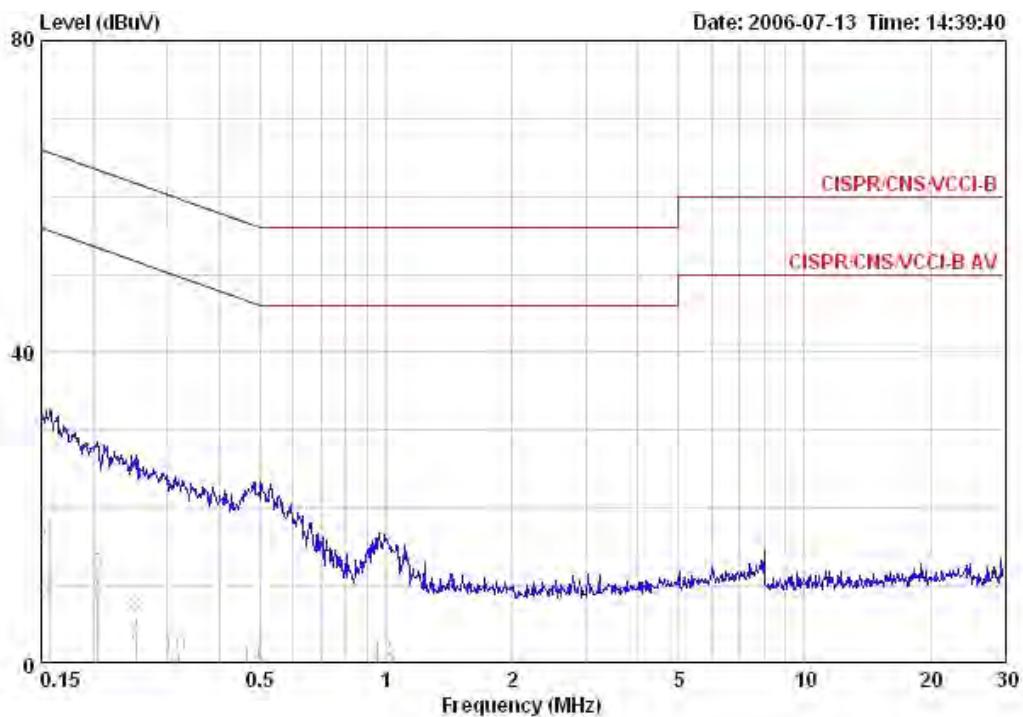

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dBuV	Level	Factor	dB	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1.0	0.15000	27.88	-38.12	66.00	25.78	1.90	0.20 QP
2	0.15000	14.90	-41.10	56.00	12.80	1.90	0.20 AVERAGE
3	0.15733	19.01	-46.59	65.60	16.91	1.90	0.20 QP
4	0.15733	8.37	-47.23	55.60	6.27	1.90	0.20 AVERAGE
5	0.20505	11.49	-51.91	63.40	10.14	1.15	0.20 QP
6	0.20505	7.99	-45.41	53.40	6.64	1.15	0.20 AVERAGE
7	0.25211	2.33	-49.36	51.69	1.33	0.80	0.20 AVERAGE
8	0.25211	6.04	-55.65	61.69	5.04	0.80	0.20 QP
9	0.31495	-1.12	-50.96	49.84	-1.97	0.65	0.20 AVERAGE
10	0.31495	0.77	-59.07	59.84	-0.08	0.65	0.20 QP
11	0.48375	-0.31	-56.58	56.27	-0.81	0.40	0.10 QP
12	0.48375	-1.52	-47.79	46.27	-2.02	0.40	0.10 AVERAGE
13	0.99440	-1.31	-47.31	46.00	-1.76	0.25	0.20 AVERAGE
14	0.99440	0.29	-55.71	56.00	-0.16	0.25	0.20 QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Peak Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

### 4.2.4. Test Setup Layout

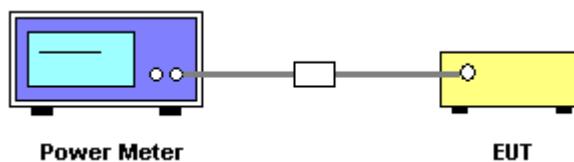

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Peak Output Power

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	CH1 / CH 2 / CH 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
2	2414.5 MHz	9.22	30.00	Complies
3	2441.1 MHz	9.11	30.00	Complies
1	2467.0 MHz	8.23	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

#### 4.3.4. Test Setup Layout

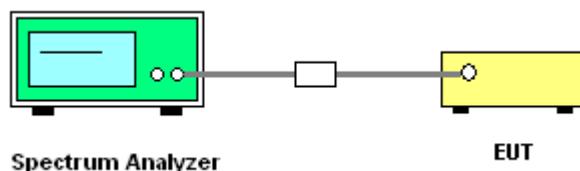

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

<b>Temperature</b>	25°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	CH1 / CH 2 / CH 3


<b>Channel</b>	<b>Frequency</b>	<b>Power Density (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
2	2414.5 MHz	5.59	8.00	Complies
3	2441.1 MHz	5.16	8.00	Complies
1	2467.0 MHz	4.07	8.00	Complies

**Power Density Plot on 2414.5 MHz**

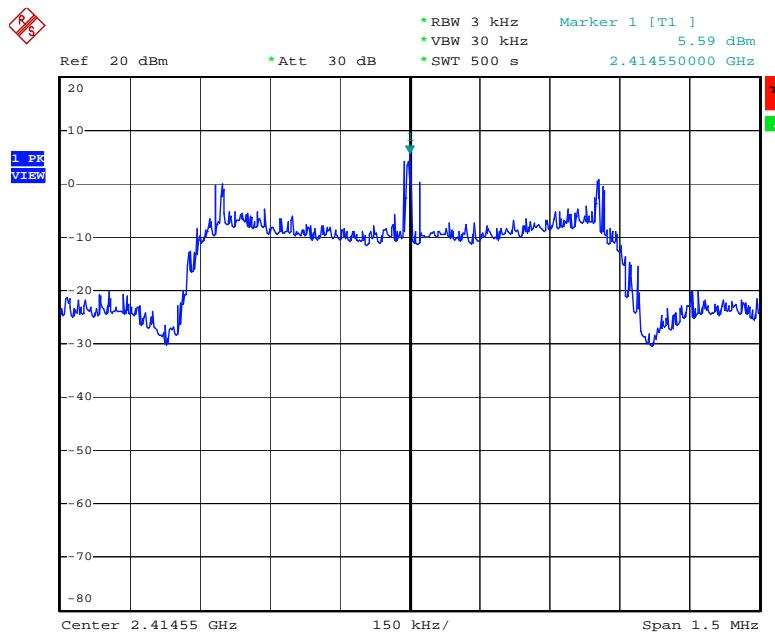


Date: 21.JUL.2006 10:46:58

**Power Density Plot on 2441.1 MHz**

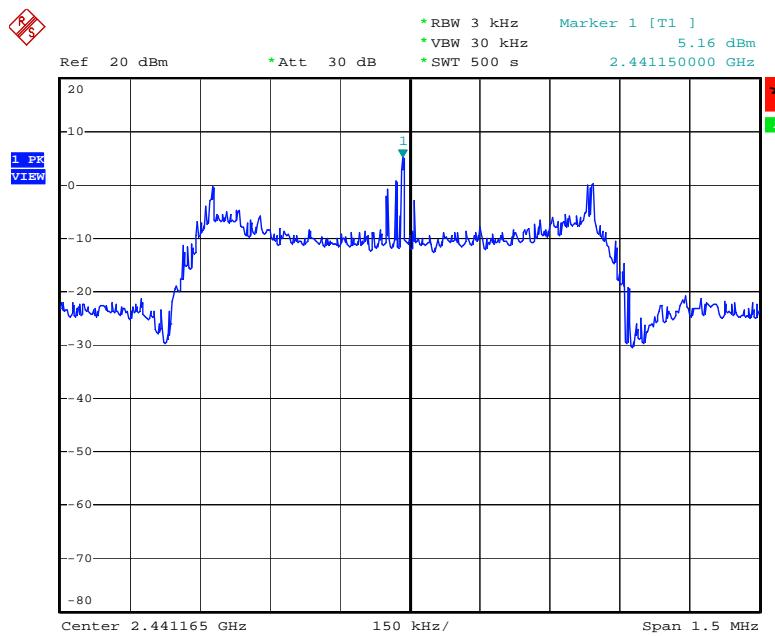

Date: 21.JUL.2006 10:48:02

### Power Density Plot on 2467.0 MHz

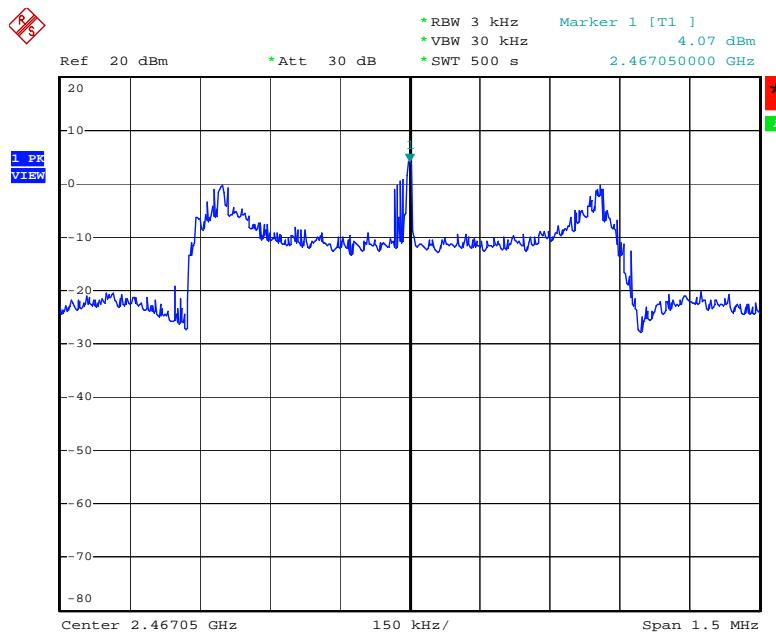

Date: 21.JUL.2006 11:18:35

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

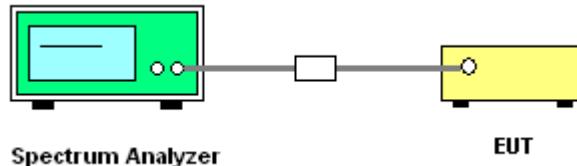

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	CH1 / CH 2 / CH 3


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
2	2414.5 MHz	0.87	1.56	500	Complies
3	2441.1 MHz	0.90	1.61	500	Complies
1	2467.0 MHz	0.94	1.64	500	Complies

### 6 dB Bandwidth Plot on 2414.5 MHz

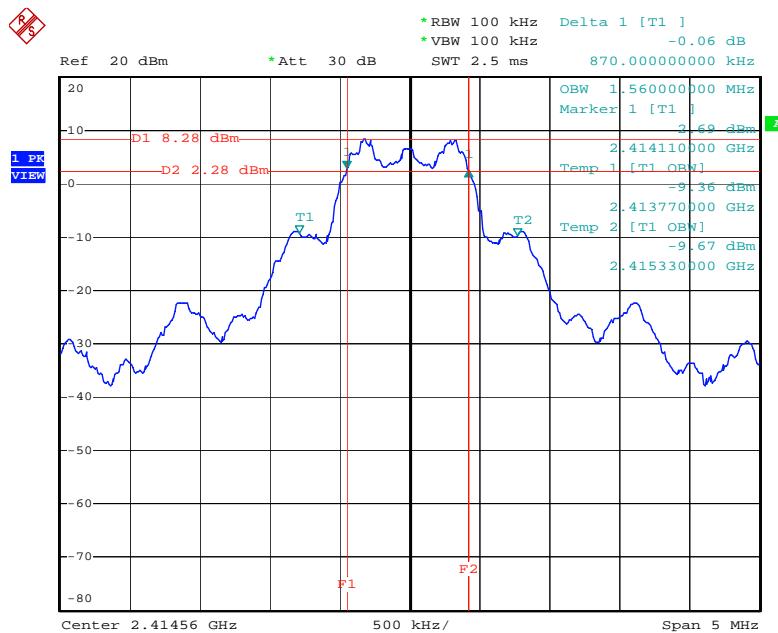


Date: 21.JUL.2006 10:45:12

### 6 dB Bandwidth Plot on 2441.1 MHz

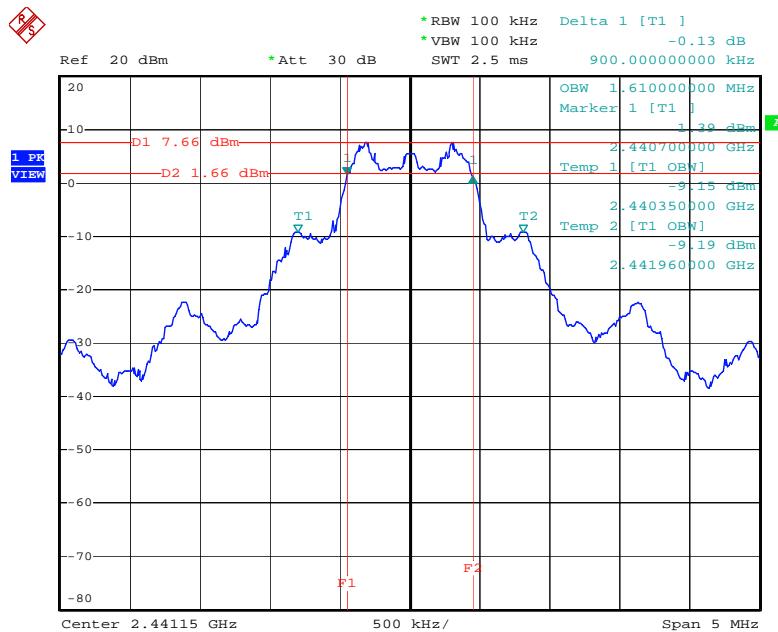

Date: 21.JUL.2006 10:49:06

**6 dB Bandwidth Plot on 2467.0 MHz**

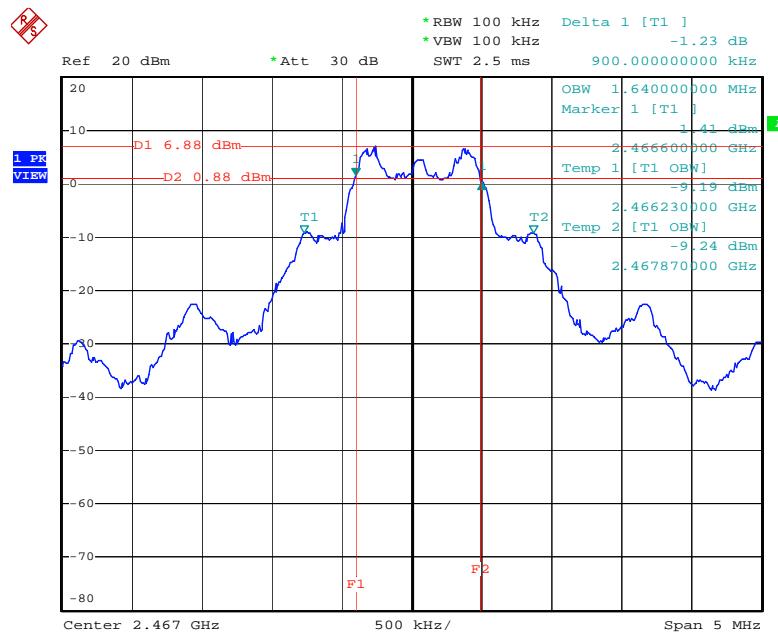

Date: 21.JUL.2006 11:16:06

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

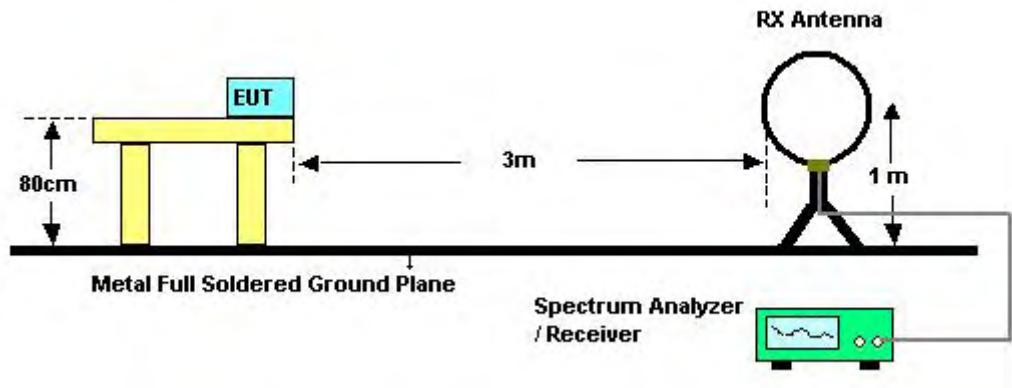

For radiated emissions above 30MHz

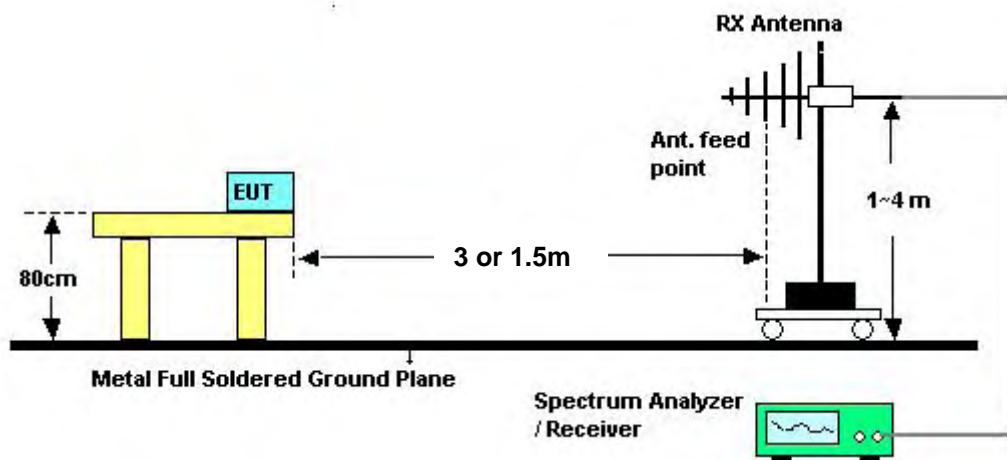

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	Channel 3

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	Channel 3 / Adapter 1

Vertical

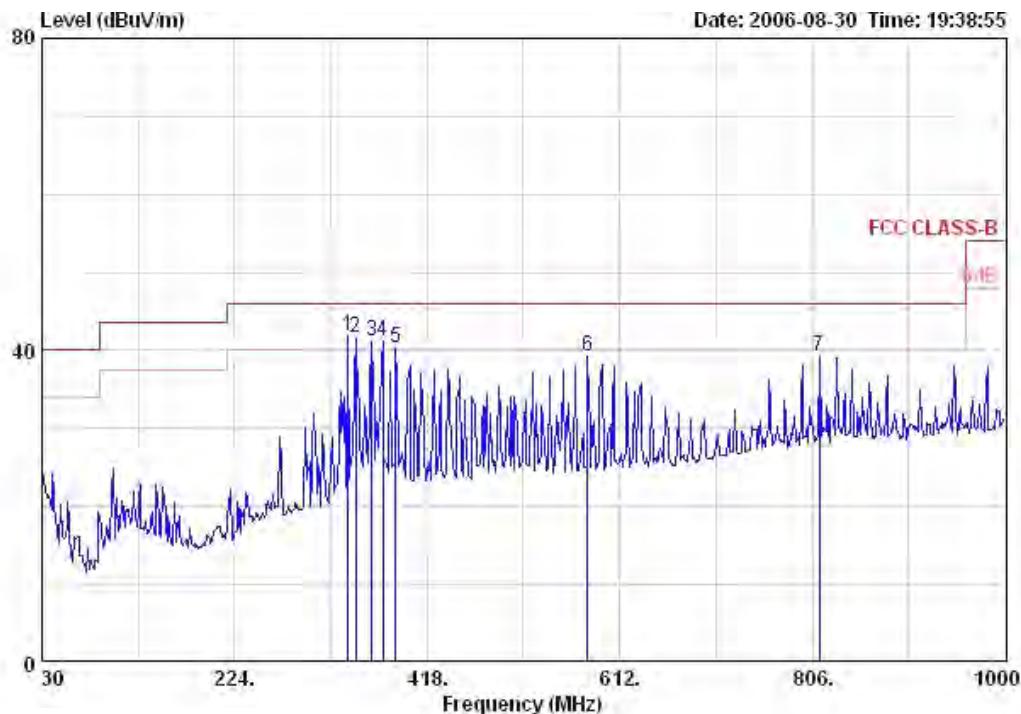

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	338.460	41.89	-4.11	46.00	50.74	14.98	1.16	24.98	Average
2 @	346.220	41.67	-4.33	46.00	50.31	15.19	1.16	24.99	Average
3 @	362.710	41.26	-4.74	46.00	49.51	15.61	1.27	25.13	Average
4 @	373.380	41.26	-4.74	46.00	49.28	15.86	1.37	25.25	Average
5 !	385.990	40.30	-5.70	46.00	48.03	16.17	1.49	25.39	Average
6	579.990	39.22	-6.78	46.00	44.74	18.84	1.89	26.25	Average
7	812.790	39.21	-6.79	46.00	40.92	20.88	2.51	25.09	Average

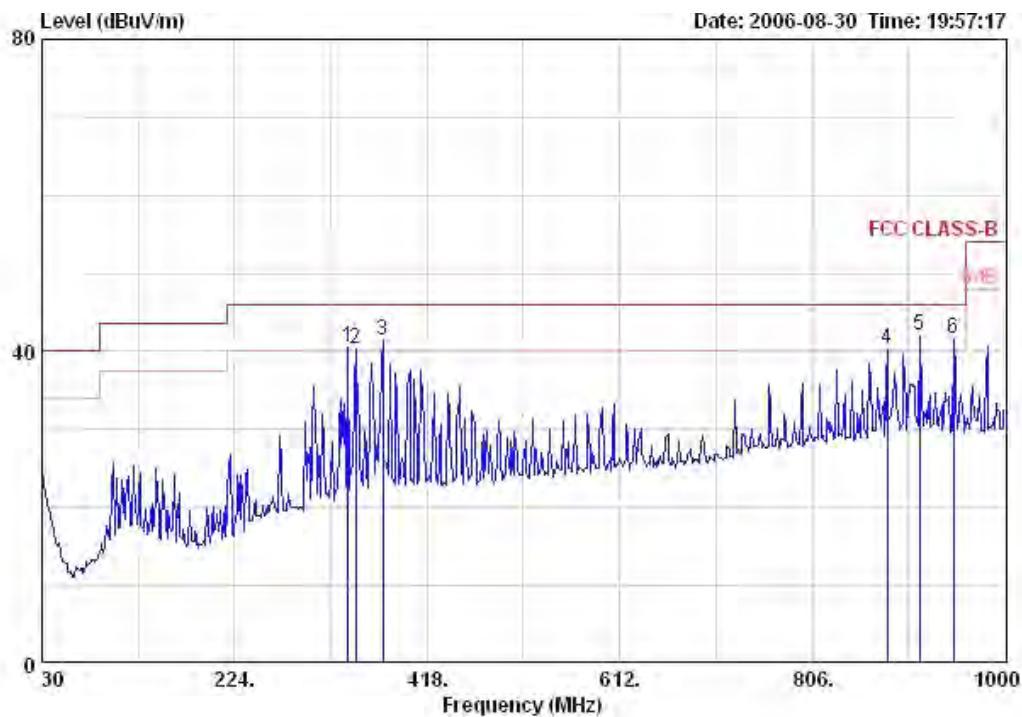**Horizontal**


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table		
		MHz	dBuV/m	dB	dBuV/m	Level	Factor			Pos	Pos
										cm	deg
1 !	338.460	40.60	-5.40	46.00	49.45	14.98	1.16	24.98	Average	121	90
2 !	346.220	40.30	-5.70	46.00	48.94	15.19	1.16	24.99	Average	121	90
3 @	373.380	41.42	-4.58	46.00	49.44	15.86	1.37	25.25	Average	121	90
4 !	881.660	40.29	-5.71	46.00	41.30	21.46	2.64	25.11	Average	121	90
5 @	913.670	42.12	-3.88	46.00	43.02	21.64	2.80	25.34	Average	121	90
6 @	948.590	41.58	-4.42	46.00	42.03	21.99	3.05	25.49	Average	121	90

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	Channel 3 / Adapter 2

Vertical

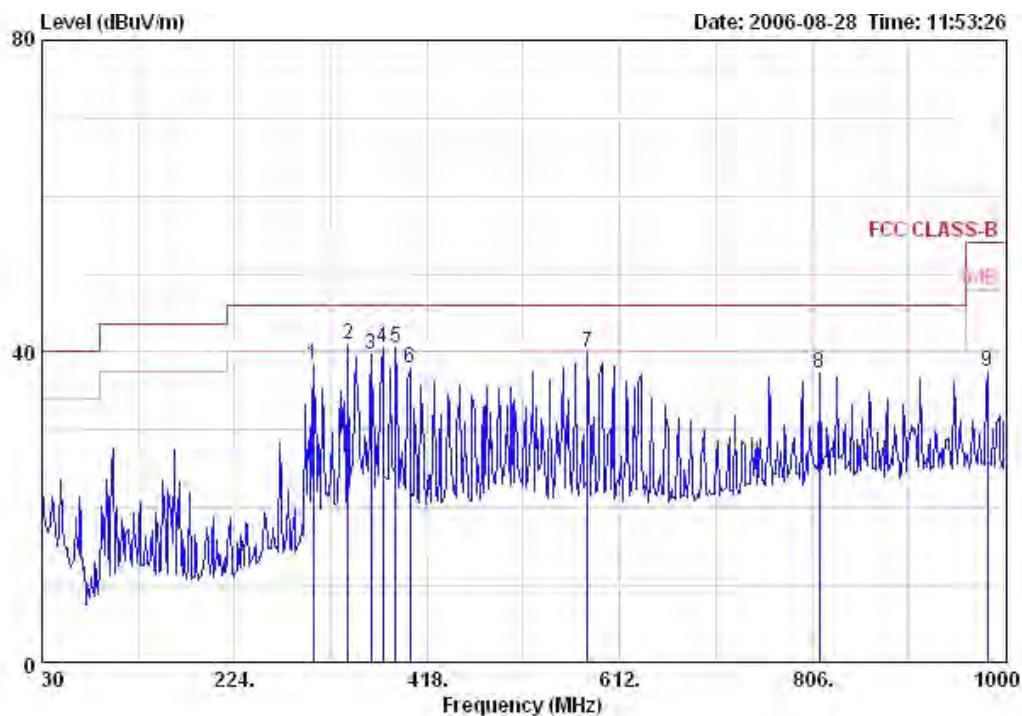

Freq	Level	Over Limit	Limit Line	Read Antenna		Cable Preamp		Ant Pos	Table Pos		
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	303.540	38.47	-7.53	46.00	48.26	14.01	1.14	24.94	Average	400	90
2 @	338.460	40.96	-5.04	46.00	49.80	14.98	1.16	24.98	Average	400	90
3	361.740	39.64	-6.36	46.00	47.91	15.58	1.27	25.12	Average	400	90
4 !	373.380	40.65	-5.35	46.00	48.66	15.86	1.37	25.25	Average	400	90
5 !	385.990	40.65	-5.35	46.00	48.39	16.17	1.49	25.39	Average	400	90
6	400.540	37.91	-8.09	46.00	45.34	16.51	1.61	25.55	Average	400	90
7	579.990	39.91	-6.09	46.00	45.43	18.84	1.89	26.25	Average	400	90
8	812.790	37.34	-8.66	46.00	39.05	20.88	2.51	25.09	Average	400	90
9	982.540	37.60	-16.40	54.00	37.62	22.20	3.09	25.31	Average	400	90

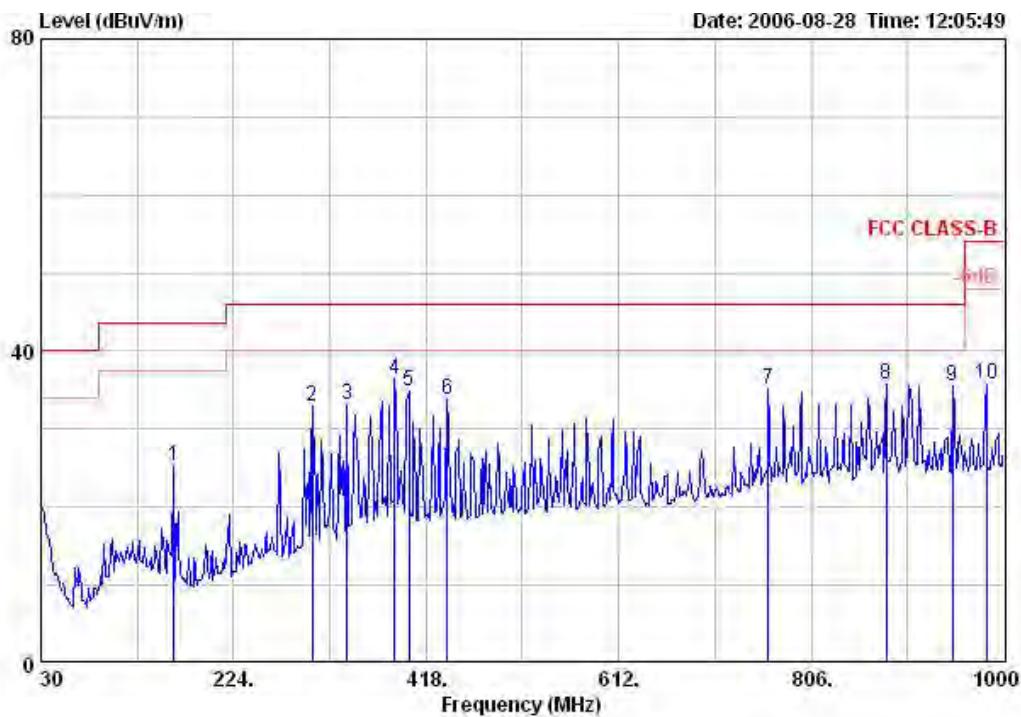**Horizontal**


Freq	Level	Over Limit	Limit Line	ReadAntenna		Cable Preamp		Ant Pos	Table Pos		
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	163.860	25.23	-18.27	43.50	39.80	10.38	0.72	25.68	Average	100	89
2	303.540	32.86	-13.14	46.00	42.66	14.01	1.14	24.94	Average	100	89
3	338.460	33.07	-12.93	46.00	41.92	14.98	1.16	24.98	Average	100	89
4	385.990	36.50	-9.50	46.00	44.24	16.17	1.49	25.39	Average	100	89
5	400.540	34.80	-11.20	46.00	42.23	16.51	1.61	25.55	Average	100	89
6	439.340	33.82	-12.18	46.00	41.17	17.05	1.46	25.86	Average	100	89
7	762.350	35.05	-10.95	46.00	37.40	20.25	2.49	25.09	Average	100	89
8	881.660	35.79	-10.21	46.00	36.80	21.46	2.64	25.11	Average	100	89
9	948.590	35.50	-10.50	46.00	35.95	21.99	3.05	25.49	Average	100	89
10	982.540	35.83	-18.17	54.00	35.85	22.20	3.09	25.31	Average	100	89

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	Channel 2

Vertical

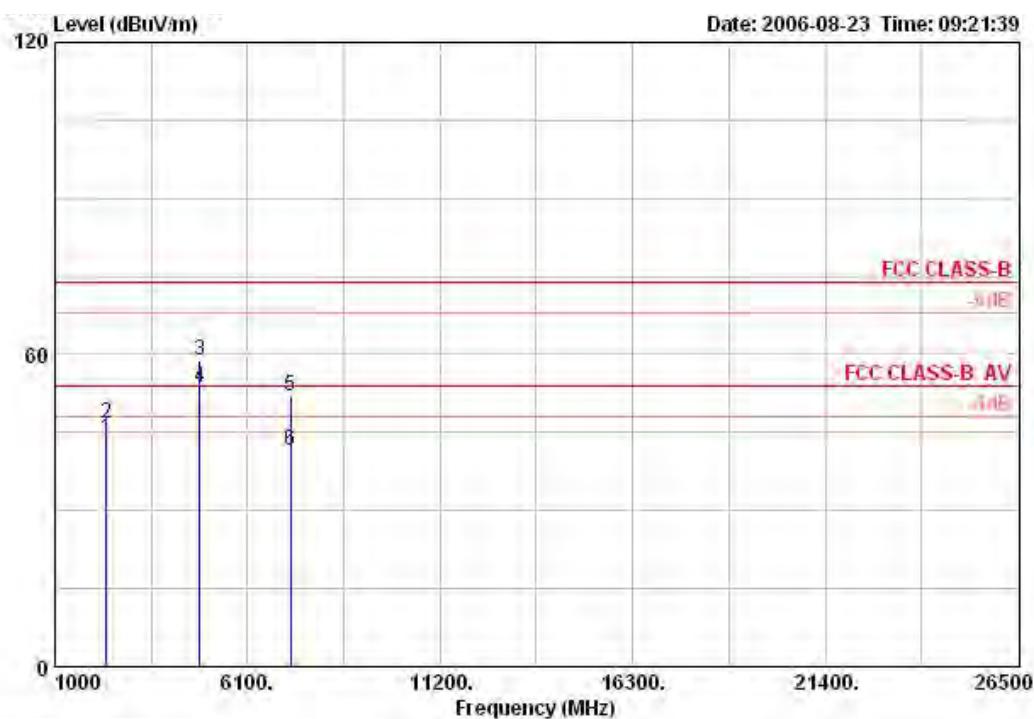

Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	
									Pos	Pos	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2364.568	43.71	-10.29	54.00	46.61	28.04	2.56	33.50	AVERAGE	100	8
2	2364.568	46.61	-27.39	74.00	49.52	28.04	2.56	33.50	PEAK	100	8
3	4828.270	58.73	-15.27	74.00	54.07	33.22	4.68	33.24	PEAK	100	254
4	4829.110	53.71	-0.29	54.00	49.05	33.22	4.68	33.24	AVERAGE	100	254
5	7244.500	52.13	-21.87	74.00	44.14	36.08	5.31	33.40	PEAK	100	107
6	7244.500	41.58	-12.42	54.00	33.59	36.08	5.31	33.40	AVERAGE	100	107


## Horizontal

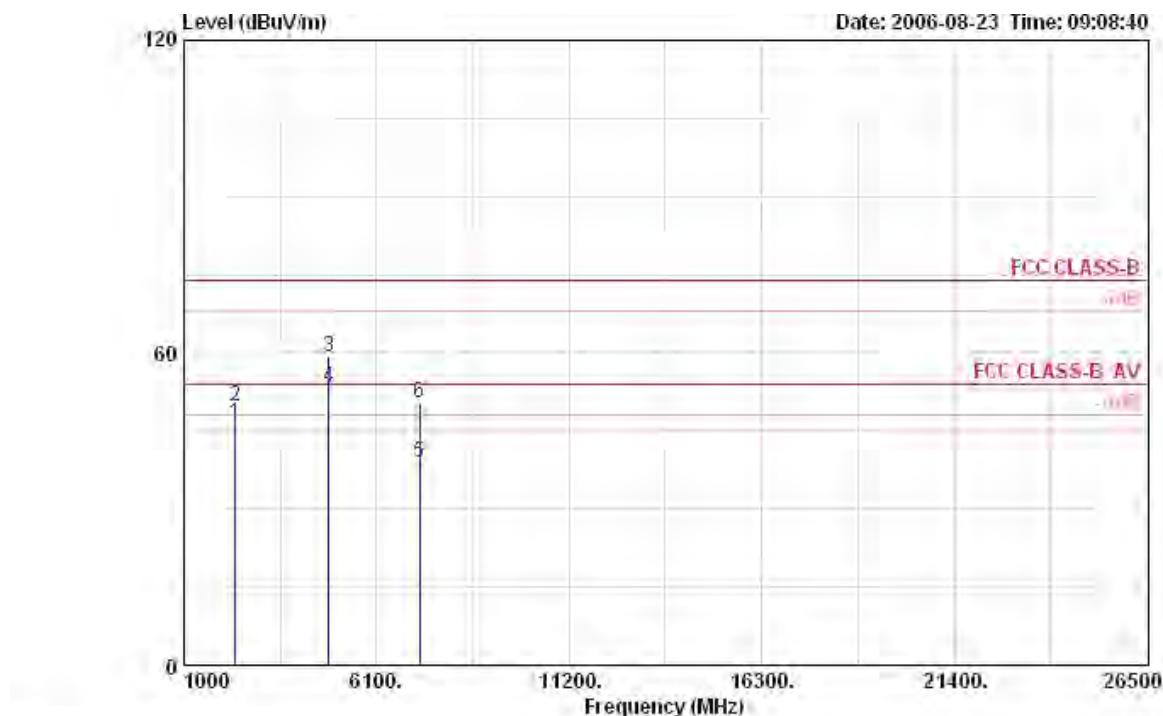

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	
		Limit	Line	Level	Factor	Loss	Factor		Pos	Pos	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2364.568	46.39	-7.61	54.00	49.29	28.04	2.56	33.50	AVERAGE	180	238
2	2364.568	49.67	-24.33	74.00	52.57	28.04	2.56	33.50	PEAK	180	238
3	4828.440	59.10	-14.90	74.00	54.44	33.22	4.68	33.24	PEAK	148	265
4	4829.060	53.19	-0.81	54.00	48.53	33.22	4.68	33.24	AVERAGE	148	265
5	7244.490	38.93	-15.07	54.00	30.94	36.08	5.31	33.40	AVERAGE	100	0
6	7244.490	50.43	-23.57	74.00	42.44	36.08	5.31	33.40	PEAK	100	0


Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	Channel 3

Vertical

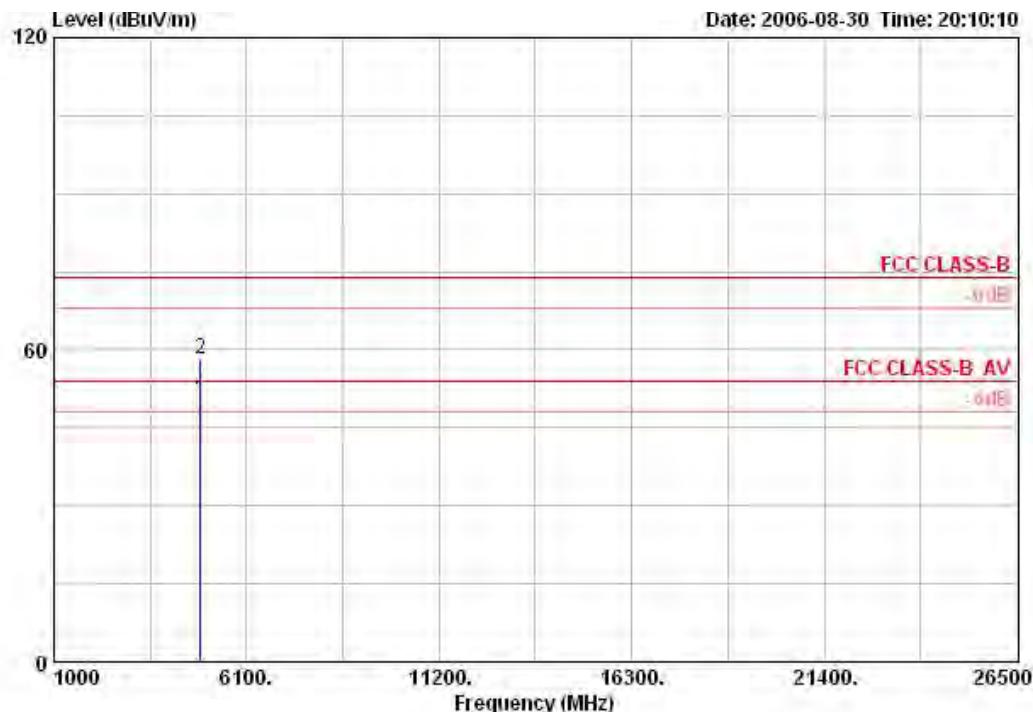

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1. @	4882.400	50.45	-3.55	54.00	45.63	33.33	4.71	33.23	Average
2	4882.900	58.08	-15.92	74.00	53.26	33.33	4.71	33.23	Peak


## Horizontal

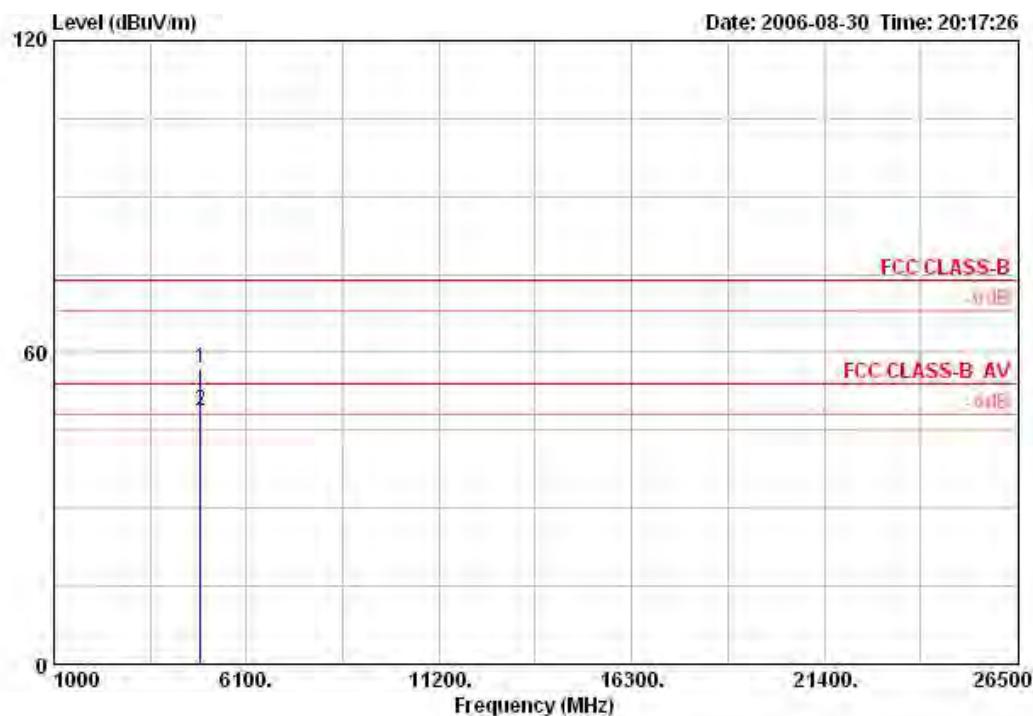

Freq	Level	Over Limit	Limit	Read		Ant	Table			
				Line	Antenna			Cable	Preamp	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4881.700	56.94	-17.06	74.00	52.12	33.33	4.71	33.23	PEAK	135
2	4882.280	48.78	-5.22	54.00	43.96	33.33	4.71	33.23	AVERAGE	135


Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	Channel 1

Vertical

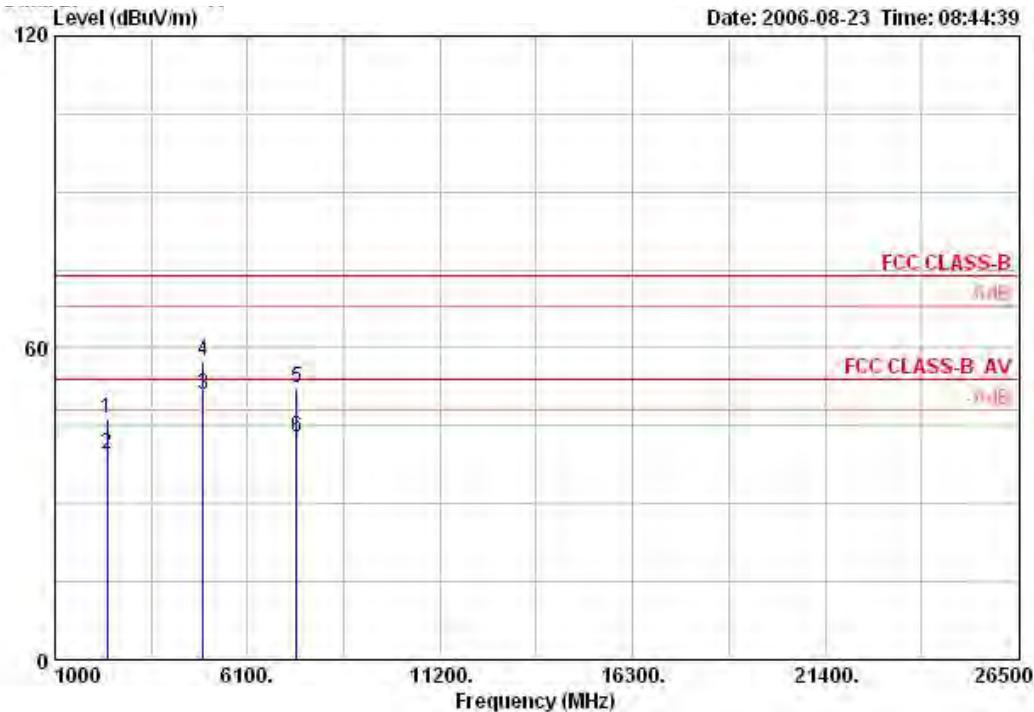

Freq	Level	Over Limit	Limit	Read		Ant	Table		
				Antenna	Line	Factor	Preamp	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2376.720	46.54	-27.46	74.00	49.40	28.09	2.56	33.50	PEAK
2	2377.200	39.40	-14.60	54.00	42.26	28.09	2.56	33.50	AVERAGE
3	4934.060	50.98	-3.02	54.00	46.02	33.45	4.73	33.22	AVERAGE
4	4934.680	57.45	-16.55	74.00	52.49	33.45	4.73	33.22	PEAK
5	7402.000	52.20	-21.80	74.00	43.69	36.49	5.48	33.46	PEAK
6	7402.140	42.88	-11.12	54.00	34.36	36.49	5.48	33.46	AVERAGE

## Horizontal

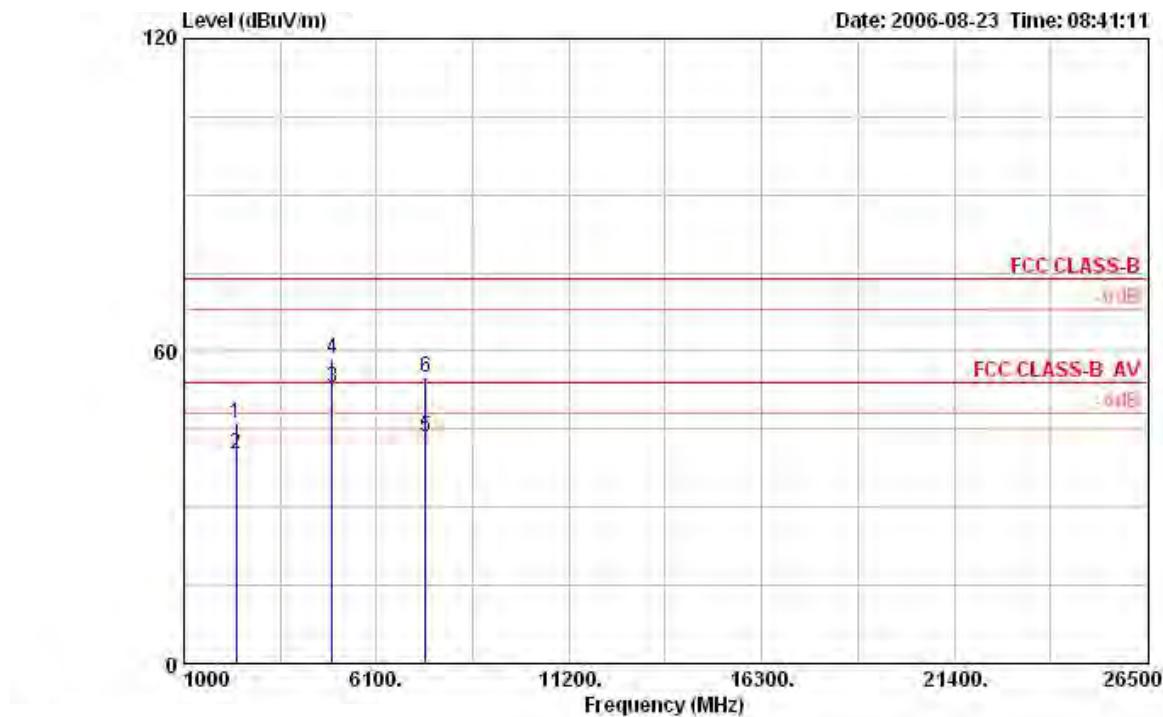

Freq	Level	Over Limit	Limit	Read		Ant	Table				
				Antenna Line	Factor			Cable Loss	Preamp Factor	Remark	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg
1	2376.360	46.23	-27.77	74.00	49.09	28.09	2.56	33.50	PEAK	154	241
2	2377.040	40.31	-13.69	54.00	43.17	28.09	2.56	33.50	AVERAGE	154	241
3	4934.060	52.98	-1.02	54.00	48.02	33.45	4.73	33.22	AVERAGE	136	265
4	4934.760	58.57	-15.43	74.00	53.62	33.45	4.73	33.22	PEAK	136	265
5	7400.000	43.34	-10.66	54.00	34.86	36.45	5.48	33.46	AVERAGE	136	301
6	7400.100	54.81	-19.19	74.00	46.34	36.45	5.48	33.46	PEAK	136	301

## Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.


### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions


Temperature	25°C	Humidity	65%
Test Engineer	Leo Hung	Configurations	Channel 1, Channel 2

##### Channel 2

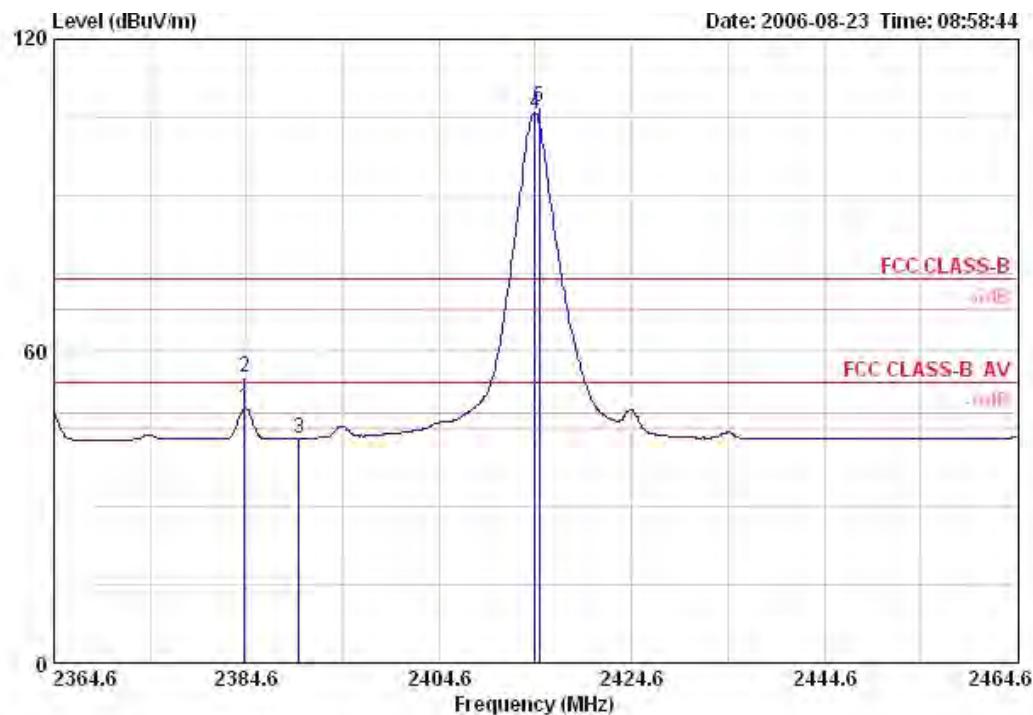

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table		
		Limit	Line	Level	Factor	Loss	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1 !	2384.400	48.96	-5.04	54.00	18.32	28.09	2.56	0.00	AVERAGE	150	244
2	2384.400	54.90	-19.10	74.00	24.26	28.09	2.56	0.00	PEAK	150	244
3	2390.000	43.21	-10.79	54.00	12.50	28.13	2.58	0.00	AVERAGE	150	244
4 @	2414.600	105.75			75.00	28.18	2.58	0.00	AVERAGE	150	244
5	2415.000	107.00			76.25	28.18	2.58	0.00	PEAK	150	244

Item 4, 5 are the fundamental frequency

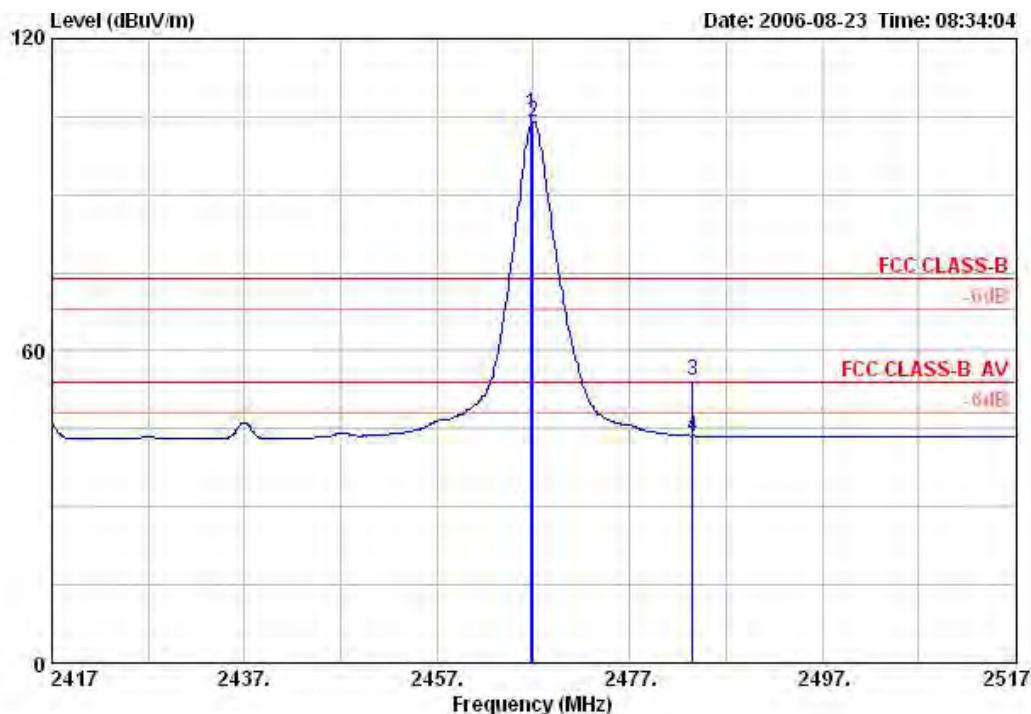**Channel 1**


Freq	Level	Over Limit	Limit	Read		Ant	Table		
				Antenna Line	Factor			Pos	Pos
MHz	dBuV/m			dBuV	dB/m	dB	dB	cm	deg
1	2466.800 105.46			74.53	28.31	2.62	0.00 PEAK	149	302
2	2467.000 104.03			73.10	28.31	2.62	0.00 AVERAGE	149	302
3	2483.500 54.42	-19.58	74.00	23.45	28.36	2.62	0.00 PEAK	149	302
4	2483.500 43.61	-10.39	54.00	12.64	28.36	2.62	0.00 AVERAGE	149	302

Item 1, 2 are the fundamental frequency


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


### For Emission not in Restricted Band

## Low Band Edge Plot on 2414.5 MHz

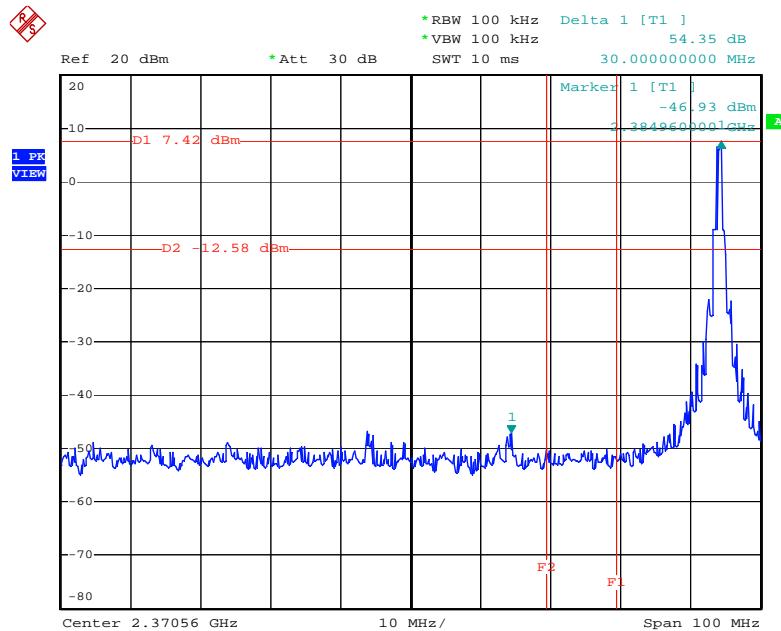

Date: 21.JUL.2006 10:45:57

## High Band Edge Plot on 2467.0 MHz

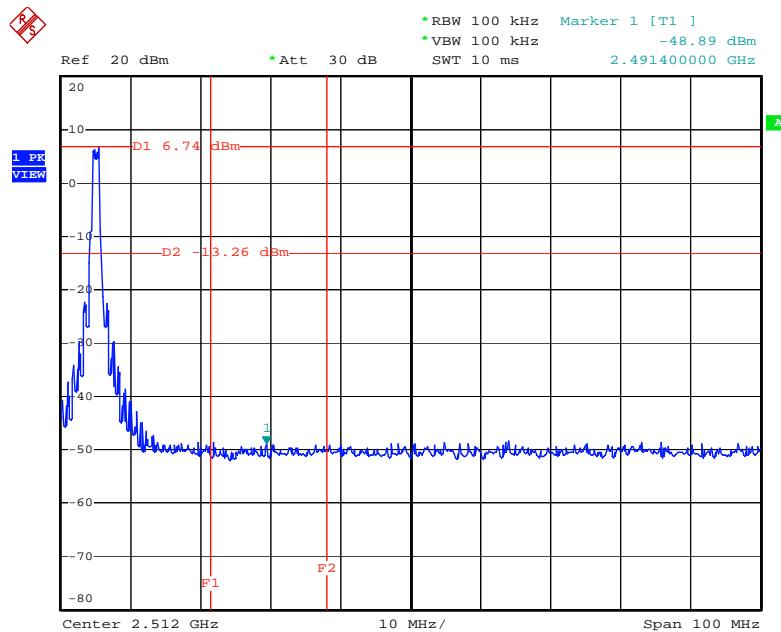

Date: 21.JUL.2006 11:17:26

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 22, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 19, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 18, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6903	1GHz ~ 18GHz	Mar. 15, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec.02, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.02, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2005	Conducted (TH01-HY)
Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jun, 10, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun, 10, 2006	Conducted (TH01-HY)
AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)
DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2005	Conducted (TH01-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: \* Calibration Interval of instruments listed above is two year.

Note: NCR means Non-Calibration required.

## 6. SPORTON COMPANY PROFILE

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test familial apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufacturers. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

### 6.1. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. TEL : 03-656-9065 FAX : 03-656-9085

## 7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce  
National Institute of Standards and Technology



### Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200079-0

**Sportun International, Inc. Hwa Ya EMC Laboratory**

Tao Yuan Hsien 333  
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in  
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.  
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:*


### ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

2006-01-01 through 2006-12-31

*Effective dates*



*For the National Institute of Standards and Technology*



NVLAP-01C (REV. 2005-05-19)