

#### FCC 47 CFR PART 15 SUBPART C

#### **TEST REPORT**

For

# FAVOR ELECTRONICS CO., LTD. HOME THEATER SPEAKER

Model: AR5701WT, JC5701S, JC5702W

Trade Name: N/A

Prepared for

FAVOR ELECTRONIC CO., LTD. Favor Industrial Park, Hi-Tech Area, XinYu City, JiangXi Province, China 338000

Prepared by

SINTEK LABORATORY CO., LTD.
No. 7, XINSHIDAI Industrial, GUANTIAN Village,
SHIYAN Town, BAO`AN District, SHENZHEN, GUANGDONG P.R.C.

TEL: 86-755-27604866 FAX: 86-755-27608359

**Note:** This report shall not be reproduced except in full, without the written approval of Sintek Laboratory Co.,Ltd. This document may be altered or revised by Sintek Laboratory Co.,Ltd. personnel only, and shall be noted in the revision section of the document.



## TABLE OF CONTENTS

1. T	EST RESULT CERTIFICATION	3
2. E	UT DESCRIPTION	4
3. T	EST METHODOLOGY	5
3.1	EUT CONFIGURATION	5
3.2	EUT EXERCISE	5
3.3		
3.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5	DESCRIPTION OF TEST MODES	6
4. IN	NSTRUMENT CALIBRATION	7
5. F	ACILITIES AND ACCREDITATIONS	8
5.1	FACILITIES8	
5.2	EQUIPMENT	8
5.3	LABORATORY ACCREDITATIONS AND LISTING	8
<b>6.</b> A	NTENNA REQUIREMENTS	9
7. SI	ETUP OF EQUIPMENT UNDER TEST	10
7.1	SETUP CONFIGURATION OF EUT	10
7.2		
8. F	CC PART 15.247 REQUIREMENTS	11
8.1	6DB BANDWIDTH	11
8.2	PEAK POWER	13
8.3	BAND EDGES MEASUREMENT	15
8.4	PEAK POWER SPECTRAL DENSITY	
8.5	RADIATED EMISSIONS	19
8.6	POWERLINE CONDUCTED EMISSIONS	24



Salon

## 1. TEST RESULT CERTIFICATION

**Applicant:** FAVOR ELECTRONIC CO., LTD.

Favor Industrial Park, Hi-Tech Area, XinYu City, JiangXi Province, CHINA 338000

**Equipment Under Test:** HOME THEATER SPEAKER

**Trade Name:** N/A

**Model:** AR5701WT, JC5701S, JC5702W

 Date of Test:
 JUL 4, 2006

 Report No.:
 ST0606010

 FCC ID:
 UET5702

APPLICABLE STANDARDS			
STANDARD	TEST RESULT		
FCC Part 15 Subpart C	No non-compliance noted		

## We hereby certify that:

For Es

The above equipment was tested by SINTEK laboratory co., ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2001 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Approved by: Reviewed by:



## 2. EUT DESCRIPTION

Product	HOME THEATER SPEAKER
Trade Name	N/A
Model Number	AR5701WT, JC5701S, JC5702W
Model Discrepancy	N/A
Power Supply	AC 120V
Frequency Range	2400 ~ 2483.5 MHz
Number of Channels	1 Channels
Antenna Specification	N/A
Temperature Range	0 ~ + 60°C

*Note:* This submittal(s) (test report) is intended for FCC ID: <u>UET5702</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.



### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and 15.247.

#### 3.1EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.247 under the FCC Rules Part 15 Subpart C.

## 3.3GENERAL TEST PROCEDURES

#### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2001, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) were rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2001.



#### 3.4FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	$\binom{2}{}$
13.36 - 13.41			

<sup>&</sup>lt;sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

#### 3.5DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

<sup>&</sup>lt;sup>2</sup> Above 38.6



## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## 5. FACILITIES AND ACCREDITATIONS

#### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at No. 7,Xinshidai industrial, Guantian Village, Shiyan Town, Baoan District Shenzhen, China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### 5.3 LABORATORY ACCREDITATIONS AND LISTING

Site on file with the FCC: The certificate registration number is 963441 for 3&10M OATS

Site listed with the VCCI: The certificate registration number is R-2023 and C-2178 for 3&10M OATS



## 6. ANTENNA REQUIREMENTS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antennas or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

The antennas are permanently attached antenna. There are no provisions for connection to an external antenna.



## 7. SETUP OF EQUIPMENT UNDER TEST

## 7.1SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## 7.2SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1	DVD PLAY	norcent	DP315	N/A	1.0m/unshield	1.5m/unshield

#### Notes:

All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 8. FCC PART 15.247 REQUIREMENTS

## 8.1 6dB BANDWIDTH

## **LIMIT**


For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3132	140301570	06/12/2006

Remark: Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



## **TEST PROCEDURE**

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set the spectrum analyzer as RBW = 300kHz, VBW = RBW, Span = 1.5MHz, Sweep = auto.

Mark the peak frequency and -6dB (upper and lower) frequency.

Repeat until all the rest channels are investigated.



TEL: +86-755-27604866 FAX: +86-755-27608359

## **TEST RESULTS**

No non-compliance noted


#### **Test Data**

Test mode: tx

Channel	Frequency	Bandwidth	Limit	Margin
	(MHz)	(kHz)	(kHz)	(kHz)
	2424.06	746	>500	PASS

#### **Test Plot**

#### 6dB Bandwidth

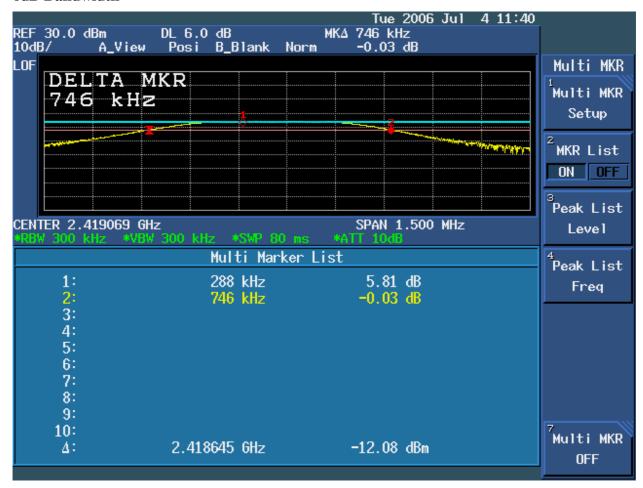



#### 8.2PEAK POWER

## **LIMIT**

The maximum peak output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.


Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3132	140301570	06/12/2006

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



## **TEST PROCEDURE**

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.



TEL: +86-755-27604866 FAX: +86-755-27608359

## **TEST RESULTS**

No non-compliance noted

#### **Test Data**

Test mode: tx

Channel	Frequency (MHz)	Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
	2424.06	-7.8	1.50	-6.3	0.0002346	1	PASS

#### **Test Plot**

#### Peak power





#### 8.3BAND EDGES MEASUREMENT

### **LIMIT**


According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3132	140301570	06/12/2006

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



#### **TEST PROCEDURE**

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.


Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Sweep = auto.

Repeat until all the rest channels are investigated.

### **TEST RESULTS**


Refer to attach spectrum analyzer data chart.







#### **Band Edges**

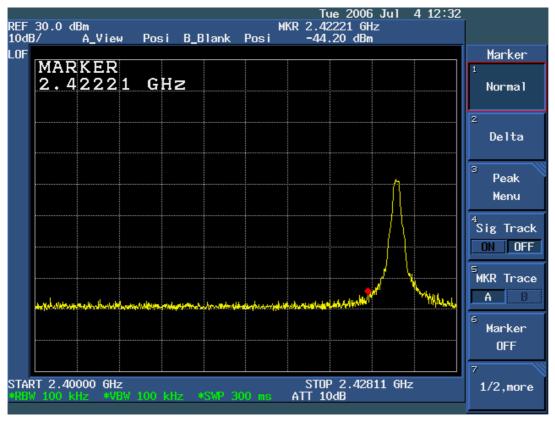





#### 8.4PEAK POWER SPECTRAL DENSITY

## **LIMIT**

For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.


The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

## MEASUREMENT EQUIPMENT USED

Name of Equipment   Manufacturer		Model	Serial Number	Calibration Due	
Spectrum Analyzer	ADVANTEST	R3132	140301570	06/12/2006	

Remark: Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**



#### **TEST PROCEDURE**

Place the EUT on the table and set it in transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set the spectrum analyzer as RBW = 3kHz, VBW = 3kHz, Span = 500kHz,

Record the max. reading.

Repeat the above procedure until the measurements for all frequencies are completed.



TEL: +86-755-27604866 FAX: +86-755-27608359

## **TEST RESULTS**

No non-compliance noted


#### Test Data

#### Test mode: tx

Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
	2440	-17.26	1.50	-15.76	8.00	PASS

#### **Test Plot**

#### **PPSD**

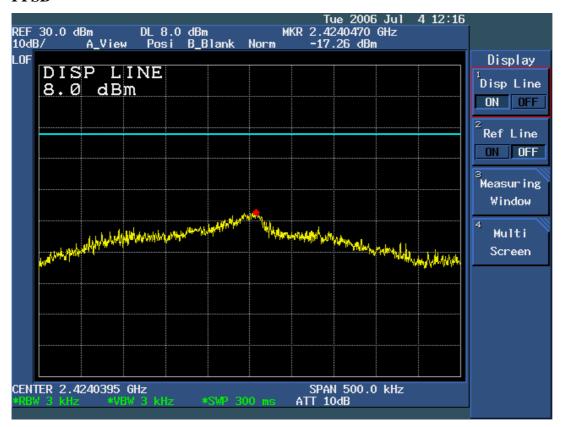



## 8.5 RADIATED EMISSIONS

## **LIMIT**

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	<b>Measurement Distance (m)</b>
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




## **MEASUREMENT EQUIPMENT USED**

Open Area Test Site								
Name of Equipment	Manufacturer	Model	Serial Number	<b>Calibration Due</b>				
Spectrum Analyzer	ADVANTEST	R3271A	85060231	06/12/2006				
Spectrum Analyzer	ADVANTEST	R3132	140301570	06/12/2006				
EMI Test Receiver	SCHAFFNER	SCR3501	464	06/12/2006				
Pre-Amplifier	COM-POWER	PA-103	161062	06/12/2006				
Bilog Antenna	SCHAFFNER	CBL6111C	2775	06/12/2006				
Turn Table	SINTEK	N/A	N/A	N.C.R				
Antenna Tower	SINTEK	N/A	N/A	N.C.R				
Controller	SINTEK	N/A	N/A	N.C.R				
RF Switch	ANRITSU	MP59B	M53867	N.C.R				
Horn antenna	EMCO	3115	9602-4659	06/12/2006				
Pre-Amplifier	НР	8449B	3008B00965	06/12/2006				

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### **Test Configuration**


#### Below 1 GHz

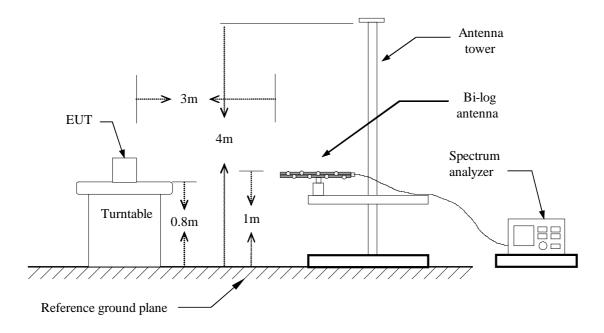



TEL: +86-755-27604866 FAX: +86-755-27608359

#### **Above 1 GHz**

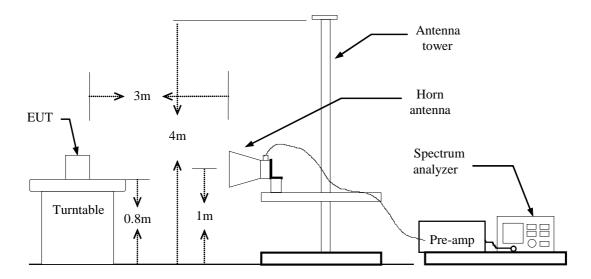

## **TEST PROCEDURE**

The EUT is placed on a turntable, which is 0.8m above ground plane.

The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until the measurements for all frequencies are complete.



TEL: +86-755-27604866 FAX: +86-755-27608359

## **TEST RESULTS**

**Below 1 GHz** 

Operation Mode: Normal Test Date: JUL 4,2006

**Temperature:** 20°C **Tested by:** Ray

**Humidity:** 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
35.82	V	Peak	18.54	15.83	34.37	40.00	-5.63
47.46	V	QP	26.76	10.51	37.27	40.00	-2.73
60.07	V	Peak	26.12	11.65	37.77	40.00	-2.23
71.71	V	QP	28.06	10.60	38.66	40.00	-1.34
83.35	V	QP	25.16	13.37	38.53	40.00	-1.47
107.6	V	QP	24.62	15.03	39.65	43.5	-3.85
47.46	Н	Peak	24.98	10.61	35.59	40.00	-4.41
60.07	Н	Peak	25.64	11.65	37.15	40.00	-2.71
71.71	Н	QP	26.09	11.06	37.15	40.00	-2.85
107.6	Н	Peak	28.45	11.29	39.74	43.5	-3.76
119.24	Н	Peak	29.28	11.93	41.21	43.5	-2.29
239.52	Н	Peak	27.93	14.57	42.5	46.00	-3.50

#### Notes:

- 1. Measuring frequencies from 30 MHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



TEL: +86-755-27604866 FAX: +86-755-27608359

#### **Above 1 GHz**

Operation Mode: Normal Test Date: JUL 4, 2006

**Temperature:** 20°C **Tested by:** Ray

**Humidity:** 70 % RH **Polarity:** Ver. / Hor.

Errog	Ant. Pol	Peak	AV	Ant. / CL	Actu	al Fs	Peak	* **		
Freq. (MHz)	H/V	Reading (dBuV)	Reading (dBuV)	CF (dB)	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1350.00	V	50.62		-9.28	41.32		74.00	54.00	-12.68	Peak
3802.00	V	41.00		1.86	42.86		74.00	54.00	-11.14	Peak
4932.67	V	41.17		3.28	44.45		74.00	54.00	-9.55	Peak
9864.33	V	35.26		7.83	43.09		74.00	54.00	-10.91	Peak
N/A										
N/A										
4932.67	Н	39.5		2.75	42.25		74.00	54.00	-11.75	Peak
9864.33	Н	38.23		3.86	42.09		74.00	54.00	-11.91	Peak
N/A										
N/A										
N/A										
N/A										

#### Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
  - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



#### 8.6POWERLINE CONDUCTED EMISSIONS

### **LIMIT**

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)			
Trequency Range (MIIIZ)	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

## MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	<b>Calibration Due</b>
EMI Test Receiver	SCHAFFNER	SCR3501	464	06/12/2006
Spectrum Analyzer	ADVANTEST	R3132	140301570	06/12/2006
LISN	COM-POWER	LI115	2027	06/12/2006
LISN	COM-POWER	LI115	2029	06/12/2006

**Remark:** Each piece of equipment is scheduled for calibration once a year.



#### **Test Configuration**

The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4: 2001

The EUT is set to transmit in a continuous mode.

## **TEST PROCEDURE**

The EUT was placed on a table, which is 0.8m above ground plane.

Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.



TEL: +86-755-27604866 FAX: +86-755-27608359

## **TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

#### **Test Data**

Operation Mode: Normal Test Date: JUL 4, 2006

**Temperature:** 18°C **Tested by:** Ray

**Humidity:** 68% RH

Freq. (MHz)	Q.P. Raw (dBuV)	AVG Raw (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Note
0.159	58.91	40.33	65.74	56	-6.82	-15.40	L1
0.235	59.42	35.13	63.57	53.57	-4.15	-18.44	L1
0.324	53.49	33.02	61.03	51.03	-7.54	-18.01	L1
0.435	54.66	33.10	57.86	47.86	-3.20	-14.76	L1
0.540	48.00	30.46	56.00		-8.00	-15.54	L1
24.00	46.57		60.00		-3.43		L1
0.159	58.54	40.51	65.74	55.74	-7.20	-15.23	L2
0.298	59.70	37.64	61.77	51.77	-2.07	-14.13	L2
0.418	45.48	35.30	58.34	48.34	-12.86	-13.04	L2
0.471	53.00	34.79	56.8	46.8	-3.78	-12.01	L2
0.477	53.00	33.99	56.64	46.64	-3.64	12.65	L2
24.00	45.02		60.00		-14.98		L2

#### Note:

Measuring frequencies from 0.15 MHz to 30MHz.

The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.

The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;

 $L1 = Line \ One \ (Live \ Line) / L2 = Line \ Two \ (Neutral \ Line)$ 

<sup>&</sup>quot;---" denotes the emission level was or more than 2dB below the Average limit