

Ke Mei Ou Laboratory Co., Ltd.

7A, Jiaxiangge, Jiahuixincheng, No.3027, Shennan Rd., Futian,
Shenzhen, Guangdong, P.R.China. Zip Code: 518033
Tel: + 86 755 83642690 Fax: + 86 755 83297077
www.kmolab.com

FCC&IC TEST REPORT

Under
FCC 15 Subpart C, Paragraph 15.249: 2007 /
RSS-210, Issue 7 and RSS-Gen Issue 2
Operating in 2400 ~ 2483.5 MHz Band

Prepared For :

Cyber Blue (HK) Limited

Room 703, 7/F., Fook Lee Commercial Centre, Town Place, 33 Lockhart Road, Wanchai,
Hong Kong

FCC ID: UFDBH08R

IC: 8227A-EM227

EUT: Bluetooth Headset

Model: BH08R

March 24, 2009

Report Type: Original Report

Test Engineer: Hans Hu

Test Date: March 2, 2009



Review By: _____
Apollo Liu / Manager

The test report consists 26 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Ke Mei Ou Laboratory Corporation. The test result in the report only applied to the tested sample.

TABLE OF CONTENTS

1. General Information.....	3
1. 1 Notes.....	3
1. 2 Testing Laboratory.....	3
1. 3 Details of Applicant	3
1. 4 Application Details.....	3
1. 5 Test Item.....	3
1. 6 Test Standards.....	3
2. Technical Test.....	4
2. 1 Summary of Test Results	4
3. EUT Modifications.....	4
4. Conducted Power Line Test.....	5
4. 1 Test Equipment	5
4. 2 Test Procedure	5
4. 3 Test Setup	5
4. 4 Configuration of the EUT.....	6
4. 5 EUT Operating Condition.....	7
4. 6 Conducted Power Line Emission Limits	7
4. 7 Conducted Power Line Test Result.....	7
5. Radiated Emission Test.....	9
5. 1 Test Equipment	9
5. 2 Test Procedure	9
5. 3 Radiated Test Setup.....	9
5. 4 Configuration of the EUT.....	10
5. 5 EUT Operating Condition.....	10
5. 6 Radiated Emission Limit	10
5. 7 Radiated Emission Test Result.....	11
6. Band Edge and 99% Occupied Bandwidth.....	13
6. 1 Test Equipment	13
6. 2 Test Procedure	13
6. 3 Radiated Test Setup.....	13
6. 4 Configuration of The EUT.....	14
6. 5 EUT Operating Condition.....	14
6. 6 Band Edge FCC 15.249(d) Limit	14
6. 7 Band Edge Test Result.....	14
7. Antenna Requirement.....	18
6. 8 99% Occupied Bandwidth Test Result.....	19
8. Photos of Testing.....	20
8. 1 EUT Test Photographs.....	20
8. 2 EUT Detailed Photographs	22
9. FCC/IC ID Label.....	25
10. Test Equipment.....	26

1. General Information

1. 1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

1. 2 Testing Laboratory

SinTek Laboratory Co., Ltd.

No.7, Xinshidai Industrial, Guantian Village, Shiyan Town, Bao'an District, Shenzhen, Guangdong China..

Tel: +86 755 27608353 Fax: +86 755 27608359

Site on File with the Federal Communications Commission – United States

Registration Number: 963441

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: 7353A

For 3 & 10 meter OATS

1. 3 Details of Applicant

Name : Cyber Blue (HK) Limited

Address : Room 703, 7/F., Fook Lee Commercial Centre, Town Place, 33 Lockhart Road, Wanchai, Hong Kong

Contact

Tel

Fax

1. 4 Application Details

Date of Receipt of Application : February 24, 2009

Date of Receipt of Test Item : March 3, 2009

Date of Test : March 3~March 24, 2009

1. 5 Test Item

Manufacturer	: Same Applicant
Address	: Same Applicant
Trade Name	: N/A
Model No.	: BH08R, BH08I, EM227, BH08
Description	: Bluetooth Headset

Additional Information

Frequency	: 2400-2483.5MHz
Number of Channels	: 79
Power Supply	: DC 3.7V(Power by battery)
Operation Distance	: N/A
Resolution	: N/A

1. 6 Test Standards

FCC 15 Subpart C, Paragraph 15.249: 2007 /

RSS-210 Issue 7 Annex 2 – Devices Operating in Frequency Bands for Any Application

A2.9 902-928, 2400-2483.5 and 5725-5875 MHz

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

2. Technical Test

2. 1 Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203 / 7.1.4 (RSS-GEN)	Antenna Requirement	PASS	Complies
FCC Part 15, Paragraph 15.207 / 7.2.2(RSS-GEN)	Conducted Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) and 15.249(b) Limit / A2.9	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209 / A2.9	Radiated Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit / A2.9	Measured Band Edges	PASS	Complies.

3. EUT Modifications

No modification by test lab.

4. Conducted Power Line Test

4. 1 Test Equipment


Please refer to Section 10 this report.

4. 2 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission., the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2003 on conducted measurement. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

4. 3 Test Setup

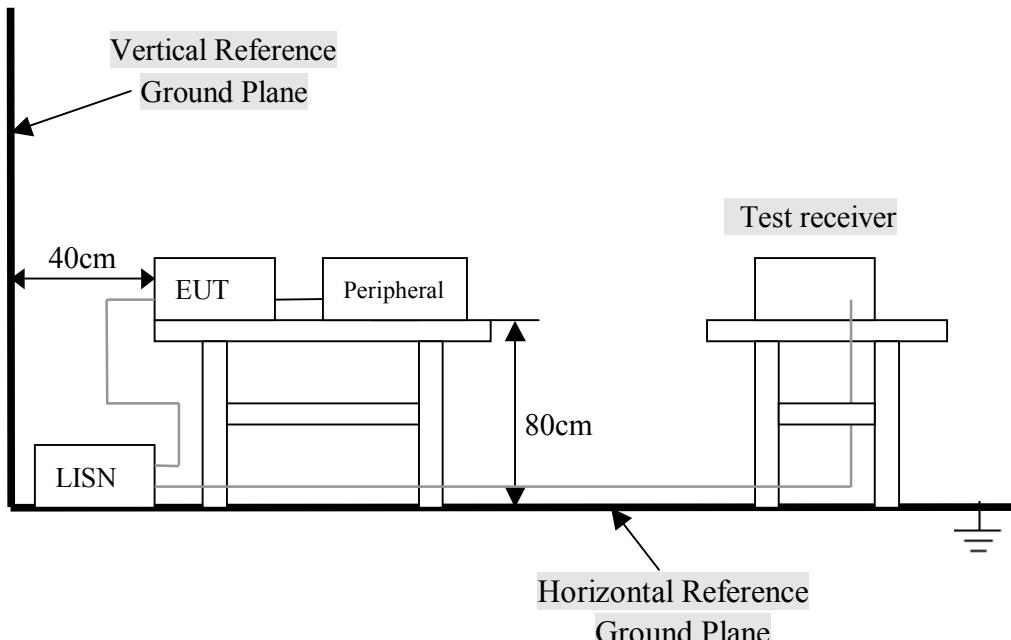

For the actual test configuration, Please refer to the related items – Photos of Testing.

4.4 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2003. EUT was used DC5V. The operation frequency is from 2400MHz~2483.5MHz. Enable the signal transmitted from the external antenna from EUT to receiver. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Note:

- 1) Below 1GHz, the channel low, middle, high were pre-tested, The channel high, worst case one, was chosen for conducted and radiated emission test.
- 2) Above 1GHz, the channel low, middle, high were tested individually.

A. EUT

Device	Manufacturer	Model #	FCC ID
Bluetooth Headset	LANYA ELECTRONIC CO., LTD.	BH08R	UFDBH08R

B. Internal Devices

Device	Manufacturer	Model #	FCC ID
N/A			


C. Peripherals

Device	Manufacturer	Model # Serial #	FCC ID/ DoC	Cable
Printer	HP	HP930C	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Modem	GVC	N/A	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Notebook	DELL	PP10L	DoC	1.5m unshielded power cord
PC	Dell	2400n	DoC	1.5m unshielded power cord

4. 5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

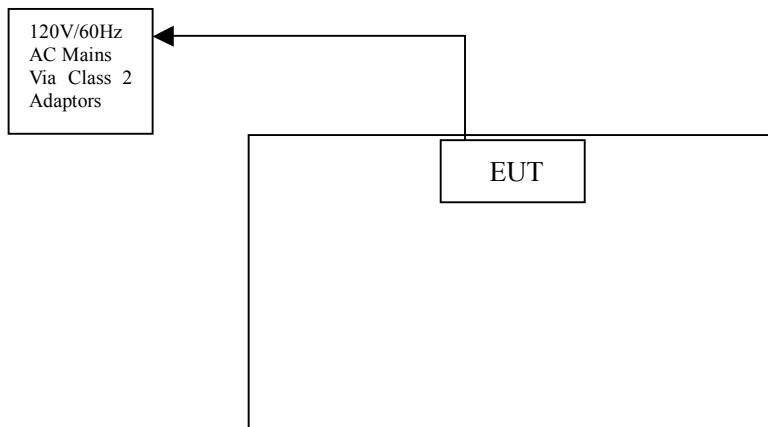

4. 6 Conducted Power Line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV) / RSS-Gen 7.2.2 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15 – 0.5	79/66	66-56/56-46
0.5 – 5.0	73/60	56/46
5.0 - 30	73/60	60/50

NOTE : In the above table, the tighter limit applies at the band edges.

4. 7 Conducted Power Line Test Result

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

- Temperature : 26 °C
- Humidity : 53 % RH
- Result : **PASSED**

EN55022 Class B							
Frequency (MHz)	Emission (dBuV)		LINE/NEUTRAL	Limit (dBuV)		Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.166	48.09	37.21	Line	65.16	55.16	-17.07	-17.95
0.170	50.67	41.12	Neutral	64.96	54.96	-14.29	-13.84
0.266	36.14	20.47	Line	61.24	51.24	-25.10	-30.77
0.294	42.92	31.89	Neutral	60.41	50.41	-17.49	-18.52
3.486	36.14	23.97	Line	56.00	46.00	-19.86	-22.03
3.478	33.18	21.97	Neutral	56.00	46.00	-22.82	-24.03

Note: NF = No Significant Peak was Found.

Remarks :

- 1.Uncertainty in conducted emission measured is <+/ -2dB.
- 2.QP and AV are abbreviations of quasi-peak and average individually.
- 3.The emission levels of other frequencies were very low against the limit.
- 4.The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
- 5.Margin Value= Emission Level – Limit Value.

Conducted Emission**EN55022**

EUT: Bluetooth Headset, M/N: BH08R

Manufacturer: LANYA ELECTRONIC CO., LTD.


Operating Condition: Receiver

Test Site:

Operator: Jacky Huang

Test Specification: LINE&NEUTRAL

Comment:

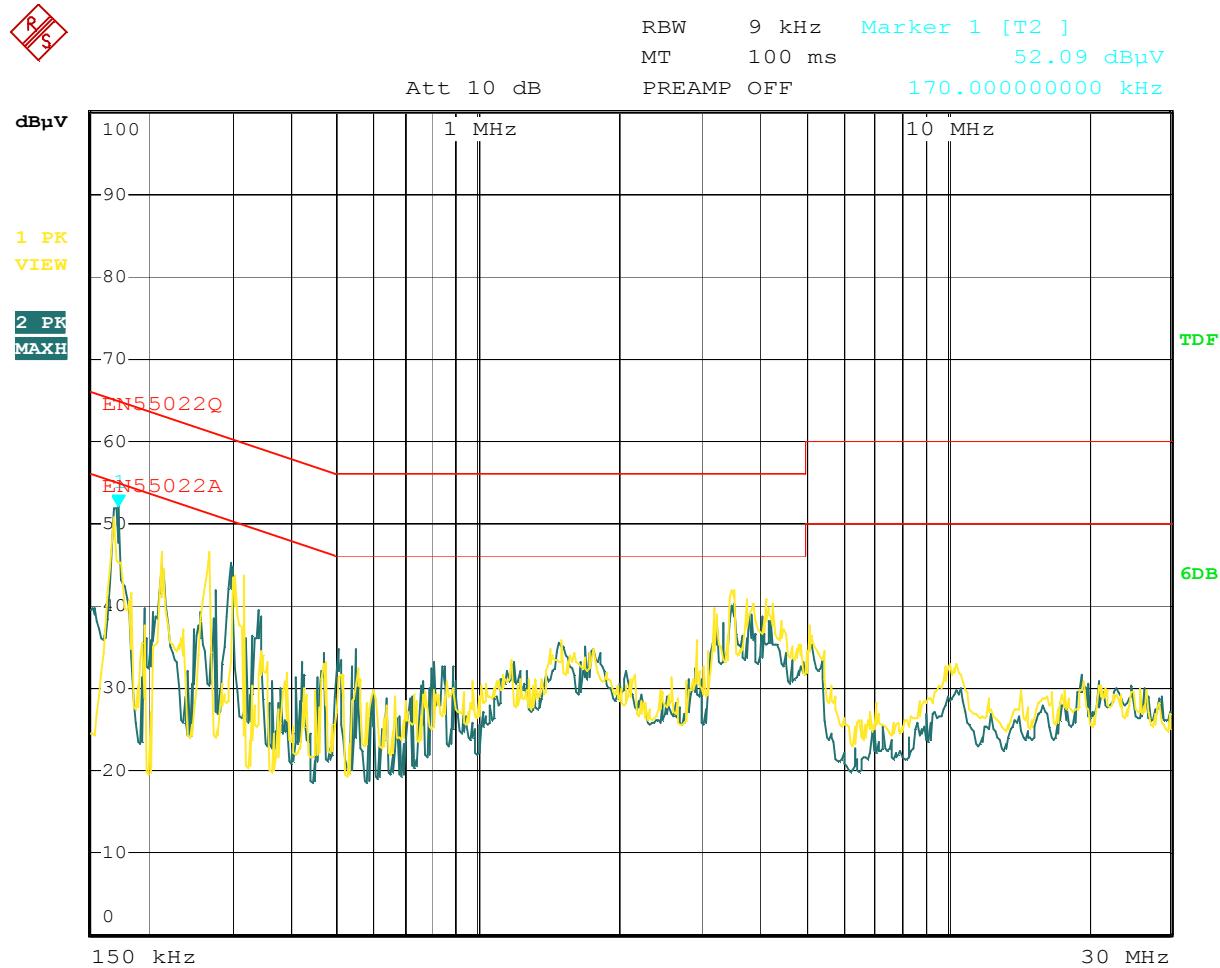

Date: 20.MAR.2009 09:54:44

5. Radiated Emission Test


5. 1 Test Equipment

Please refer to Section 10 this report.

5. 2 Test Procedure

1. The EUT was tested according to ANSI C63.4 - 2003.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The antenna height is varied from 1 m to 4 m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. The antenna polarization: Vertical polarization and Horizontal polarization.

5. 3 Radiated Test Setup

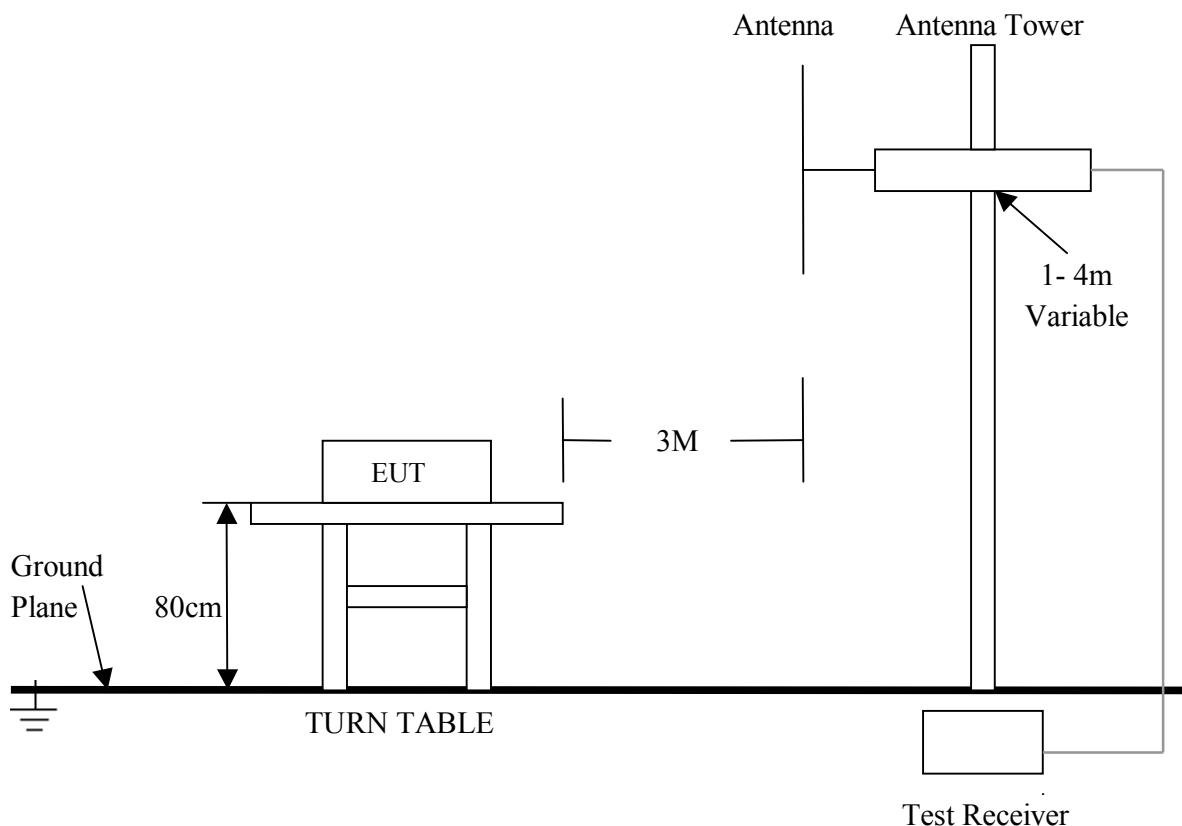

For the actual test configuration, please refer to the related items – Photos of Testing.

5. 4 Configuration of the EUT

Same as section 4.4 of this report

5. 5 EUT Operating Condition

Same as section 4.5 of this report.

5. 6 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

A. FCC Part 15 Subpart C Paragraph 15.249(a) Limit / RSS-210 Issue 7 A2.9 Limit

Fundamental Frequency (MHz)	Field Strength of Fundamental (3m)			Field Strength of Harmonics (3m)		
	mV/m	dBuV/m		uV/m	dBuV/m	
902~928	50	94(Average)	114(Peak)	500	54(Average)	74(Peak)
2400~2483.5	50	94(Average)	114(Peak)	500	54(Average)	74(Peak)

Note:

- (1) RF Voltage (dBuV) = $20 \log_{10}$ RF Voltage (uV)
- (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209. / Frequencies in restricted band are complied to limit on Section 2.7

Frequency (MHz)	Distance (m)	Field Strength (dBuV/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

Note:

- (1) RF Voltage (dBuV) = $20 \log_{10}$ RF Voltage (uV)
- (2) In the Above Table, the tighter limit applies at the band edges.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

5. 7 Radiated Emission Test Result

A. Fundamental Radiated Emission Data

Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 3.7V(Power by battery)	Humidity	: 56%RH
Test Result	: PASS		

CH Low

Freq. (GHz)	Emission (dBuV/m) Peak / Average		HORIZ / VERT	Limits (dBuV/m) Peak / Average		Margin (dB) Peak / Average	
2402.00	68.05	59.02	HORIZ	114.00	94.00	-45.95	-34.98
2402.00	67.54	58.72	VERT	114.00	94.00	-46.46	-35.28

CH Mid

Freq. (GHz)	Emission (dBuV/m) Peak / Average		HORIZ / VERT	Limits (dBuV/m) Peak / Average		Margin (dB) Peak / Average	
2441.00	68.81	59.84	HORIZ	114.00	94.00	-45.19	-34.16
2441.00	67.88	57.89	VERT	114.00	94.00	-46.12	-36.11

CH High

Freq. (GHz)	Emission (dBuV/m) Peak / Average		HORIZ / VERT	Limits (dBuV/m) Peak / Average		Margin (dB) Peak / Average	
2480.00	69.21	60.37	HORIZ	114.00	94.00	-44.79	-33.63
2480.00	68.93	59.35	VERT	114.00	94.00	-45.07	-34.65

- Note:**
- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
 - (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

B. Harmonics Radiated Emission Data

Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 3.7V(Power by battery)	Humidity	: 56%RH
Test Result	: PASS		

CH Low

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4804.00	52.58	HORZ	74.0 / 54.0	-21.42
4804.00	50.44	VERT	74.0 / 54.0	-23.56
7206.00	51.22	HORZ	74.0 / 54.0	-22.78
7206.00	50.28	VERT	74.0 / 54.0	-23.72
24020.00	51.33	HORZ	74.0 / 54.0	-22.67
24020.00	50.17	VERT	74.0 / 54.0	-23.83

CH Mid

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4882.00	51.73	HORZ	74.0 / 54.0	-22.27
4882.00	50.08	VERT	74.0 / 54.0	-23.92
7323.00	52.09	HORZ	74.0 / 54.0	-21.91
7323.00	50.33	VERT	74.0 / 54.0	-23.67
24410.00	51.17	HORZ	74.0 / 54.0	-22.83
24410.00	50.31	VERT	74.0 / 54.0	-23.69

CH High

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4960.00	52.33	HORZ	74.0 / 54.0	-24.67
4960.00	50.12	VERT	74.0 / 54.0	-23.88
7440.00	51.46	HORZ	74.0 / 54.0	-22.54
7440.00	50.72	VERT	74.0 / 54.0	-23.28
24800.00	51.08	HORZ	74.0 / 54.0	-25.92
24800.00	50.34	VERT	74.0 / 54.0	-23.66

Note:

- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
- (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
- (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

C. General Radiated Emission Data

Product	: Bluetooth Headset	Test Mode	: CH High
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 3.7V(Power by battery)	Humidity	: 56%RH
Test Result	: PASS		

Tx

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
71.60	22.97	HORZ	40.0	-17.03
171.84	29.62	VERT	43.5	-13.88
192.01	32.65	HORZ	43.5	-10.85
257.76	30.09	VERT	46.0	-15.91
352.03	34.55	HORZ	46.0	-11.45
432.21	34.43	VERT	46.0	-11.57

Note: (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

Rx

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
51.6	18.35	HORZ	40.0	-21.65
78.23	18.28	VERT	40.0	-21.72
132.5	22.36	HORZ	43.5	-21.14
148.2	23.15	VERT	43.5	-20.35
312.8	24.86	HORZ	46.0	-21.14
254.3	23.59	VERT	46.0	-22.41

Note: (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

6. Band Edge and 99% Occupied Bandwidth


6. 1 Test Equipment

Please refer to Section 10 this report.

6. 2 Test Procedure

1. The EUT was tested according to ANSI C63.4 - 2003.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.

6. 3 Radiated Test Setup

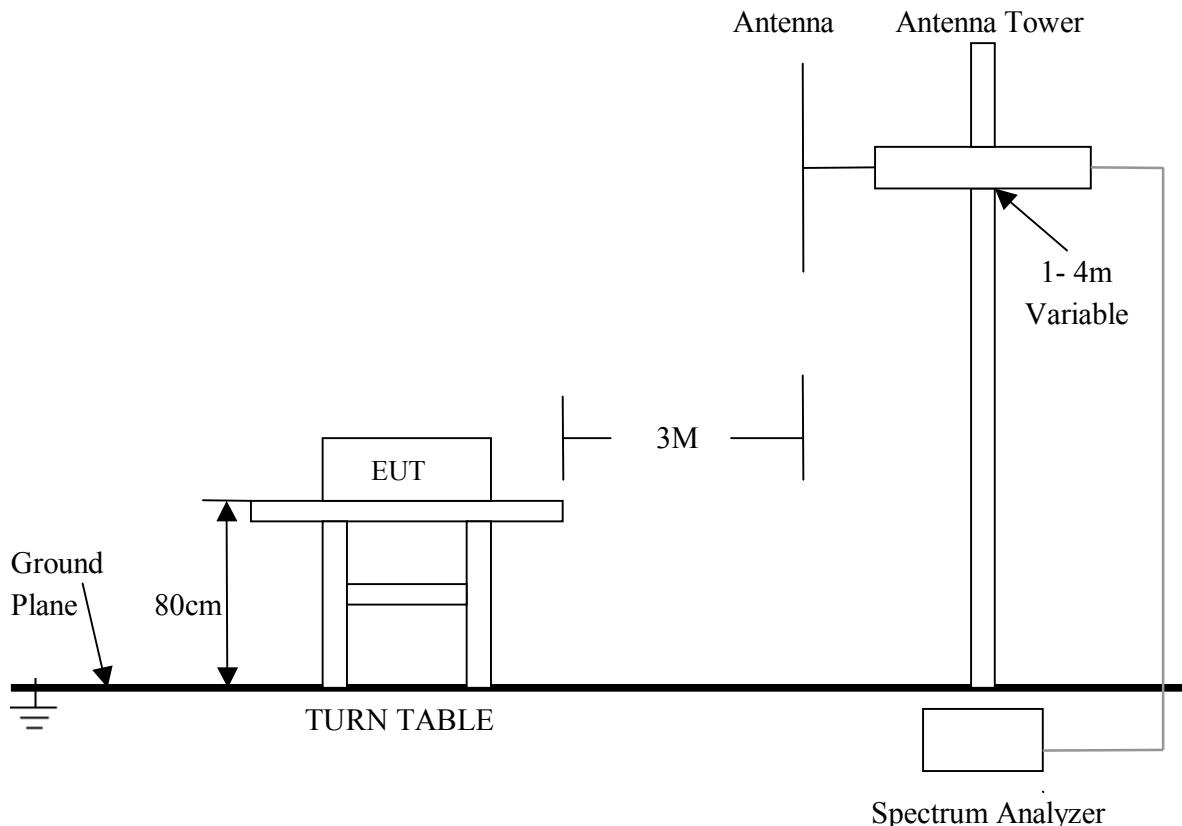

For the actual test configuration , please refer to the related items – Photos of Testing

6. 4 Configuration of The EUT

Same as section 4 . 4 of this report

6. 5 EUT Operating Condition


Same as section 4 . 5 of this report.

6. 6 Band Edge FCC 15.249(d) Limit


In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6. 7 Band Edge Test Result


Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 3.7V (Power by battery)	Humidity	: 56%RH
Test Result	: PASS		

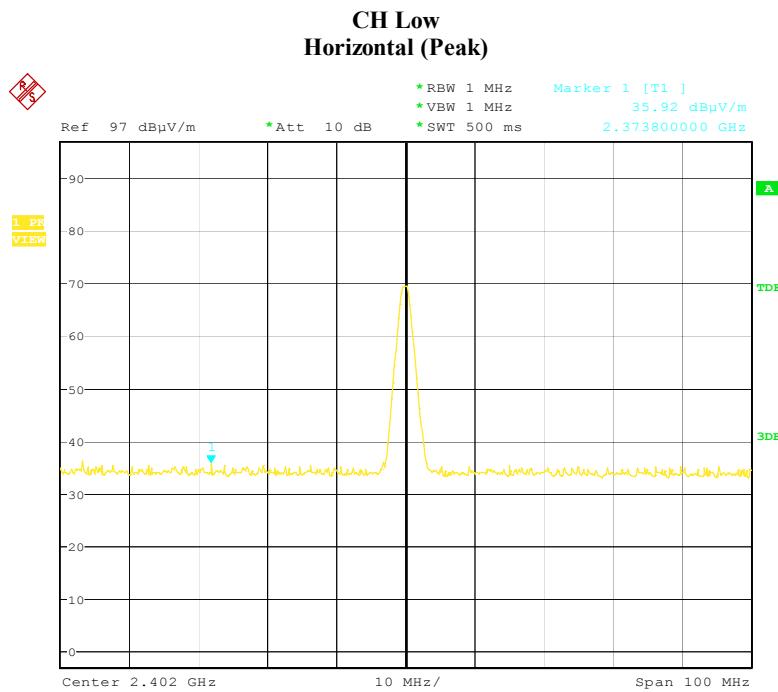


Date: 24.MAR.2009 12:59:35

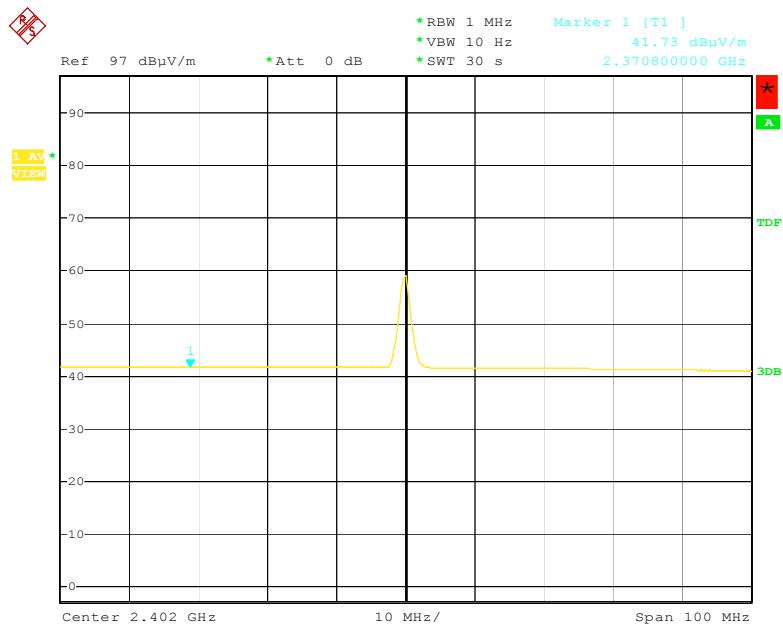Horizontal (Average)

Date: 24.MAR.2009 15:33:53

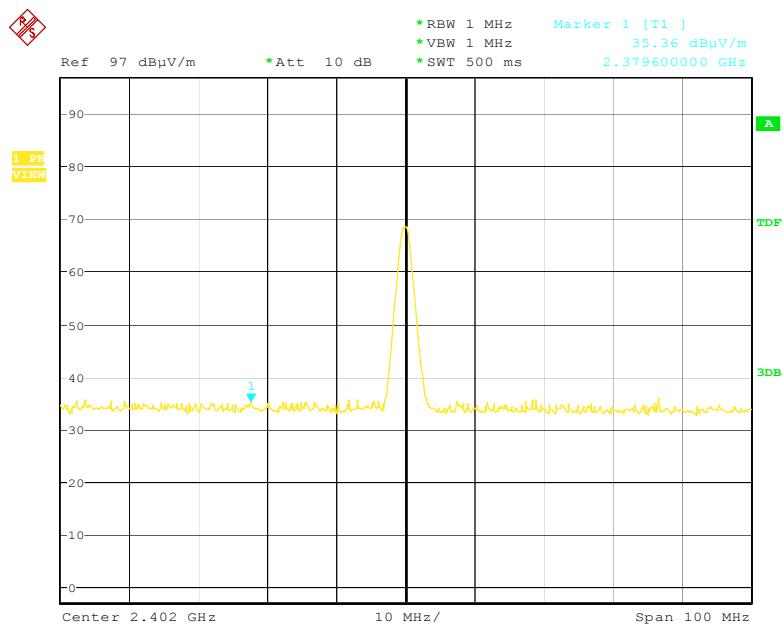
Vertical (Peak)

Date: 24.MAR.2009 13:07:41

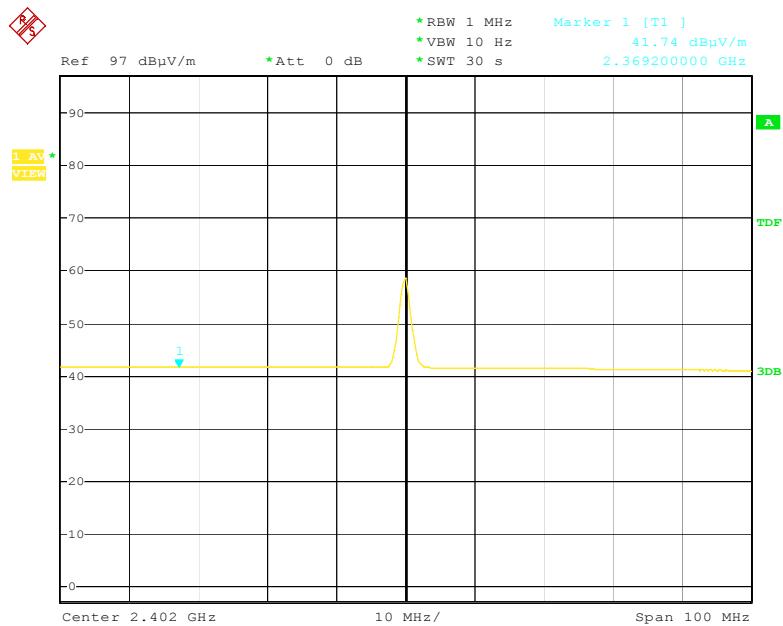
Vertical (Average)

Date: 24.MAR.2009 15:27:37


- Note:**
- (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
 - (2) The average measurement was not performed when the peak measured data under the limit of average detection.

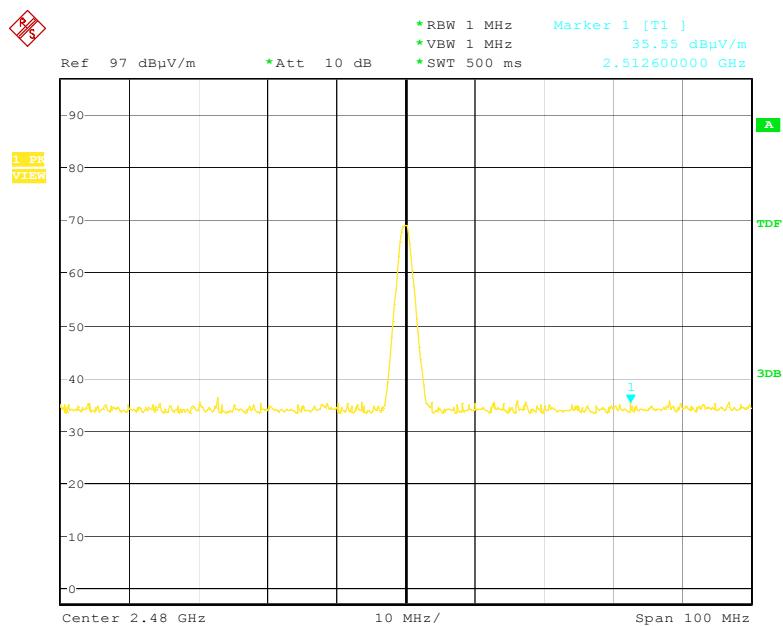**CH High
Horizontal (Peak)**


Date: 24.MAR.2009 13:12:23

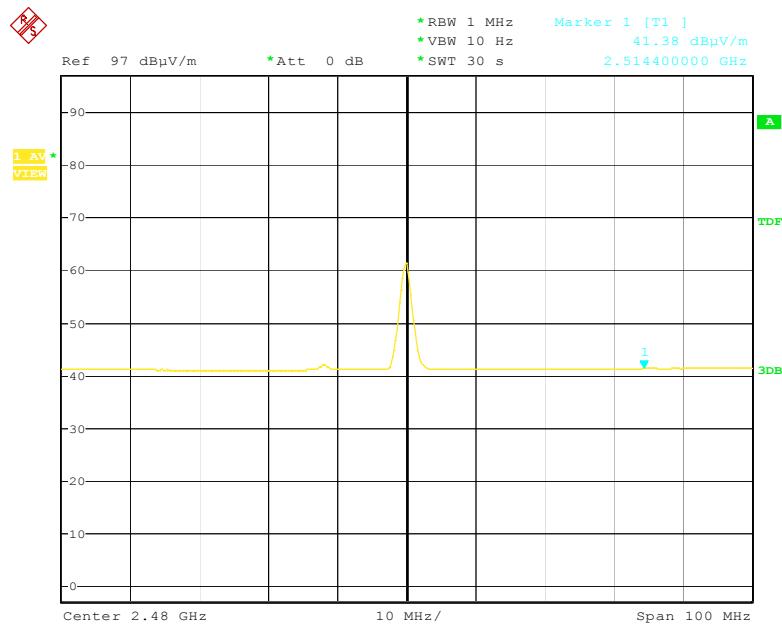Horizontal (Average)

Date: 24.MAR.2009 15:46:29

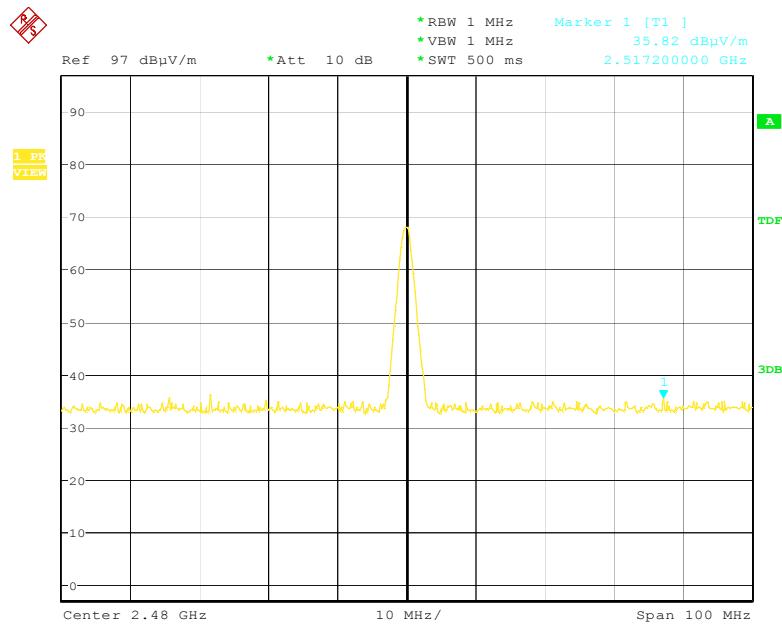Vertical (Peak)

Date: 24.MAR.2009 13:13:48

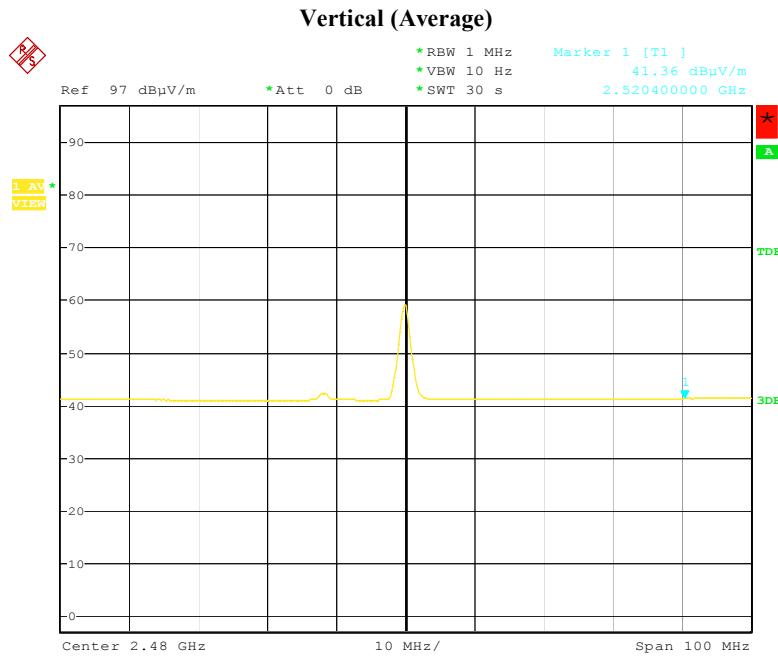

Date: 24.MAR.2009 15:39:13

- Note:**
- (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
 - (2) The average measurement was not performed when the peak measured data under the limit of average detection.

7. Antenna Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


The EUT no antenna connector for printed antenna. This is permanently attached antenna and meets the requirements of this section.

7.1.4(RSS-GEN) - A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

6.8 99% Occupied Bandwidth Test Result


Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: 20 dB Occupied Bandwidth Data	Temperature	: 25 °C
Test Voltage	: DC 3.7V(Power by battery)	Humidity	: 56%RH
Test Result	: PASS		

CH Low

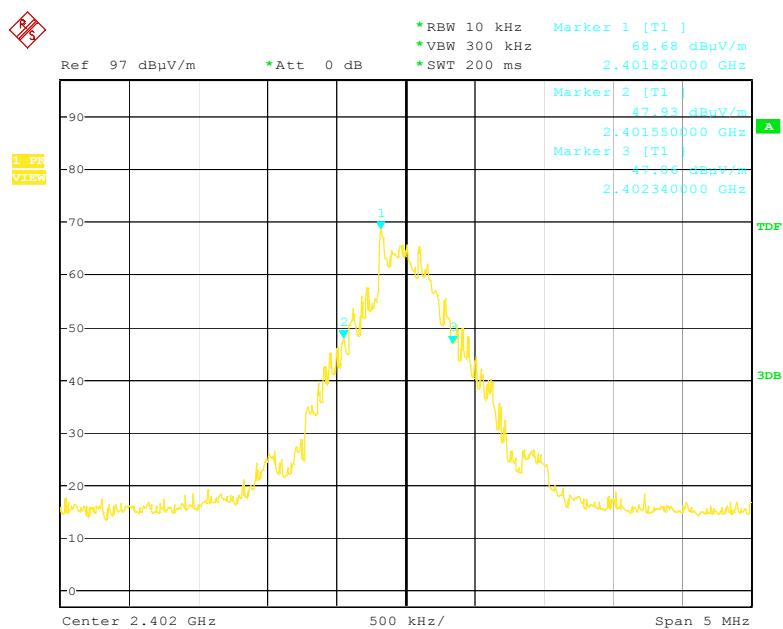

Date: 16.MAR.2009 16:55:46

CH High

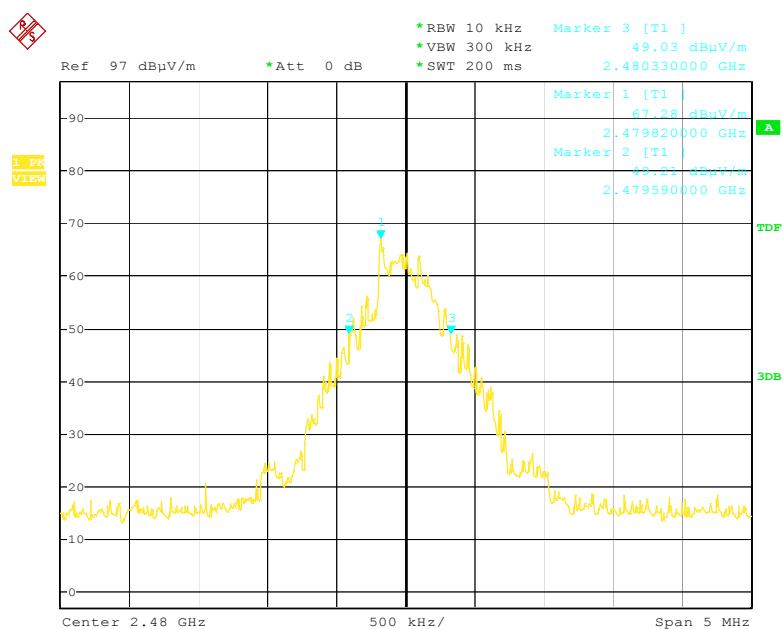

Date: 16.MAR.2009 17:00:51

8. Photos of Testing

8.1 EUT Test Photographs

Conducted emission test view



Radiated emission test view





8.2 EUT Detailed Photographs


EUT top view




EUT bottom view




EUT inside whole view

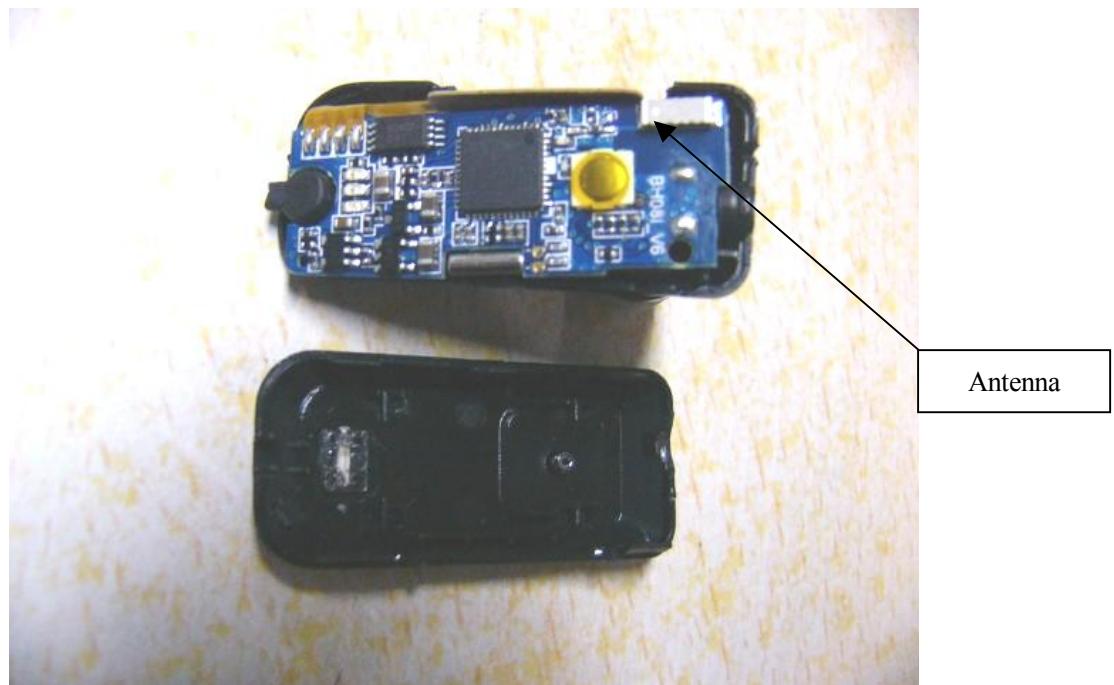

Main board component side

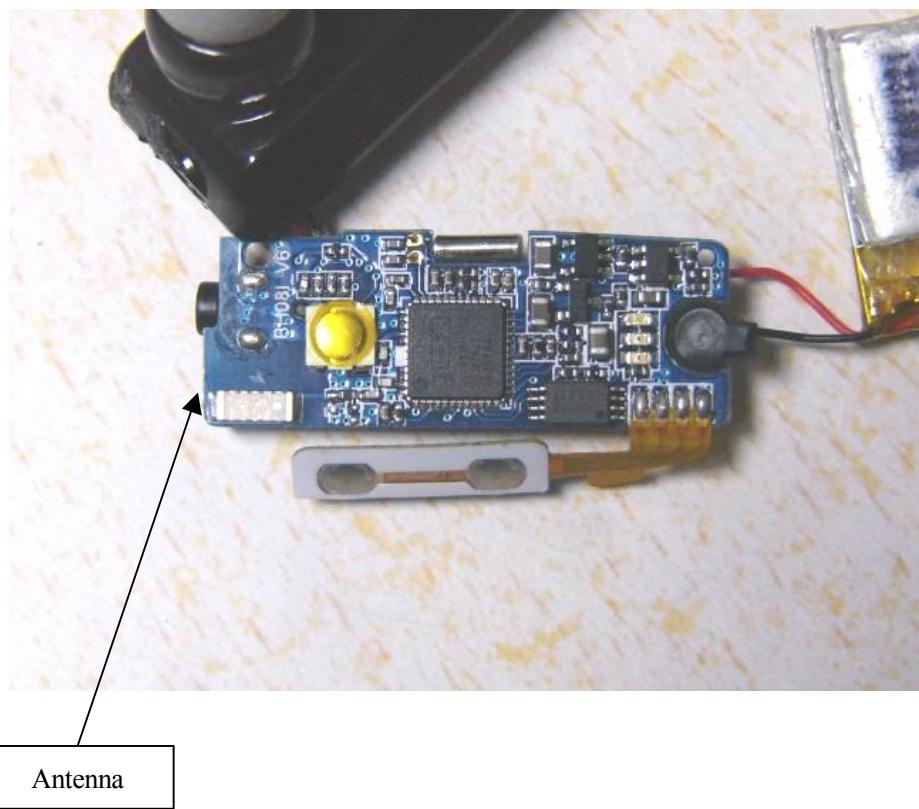

Main board solder side

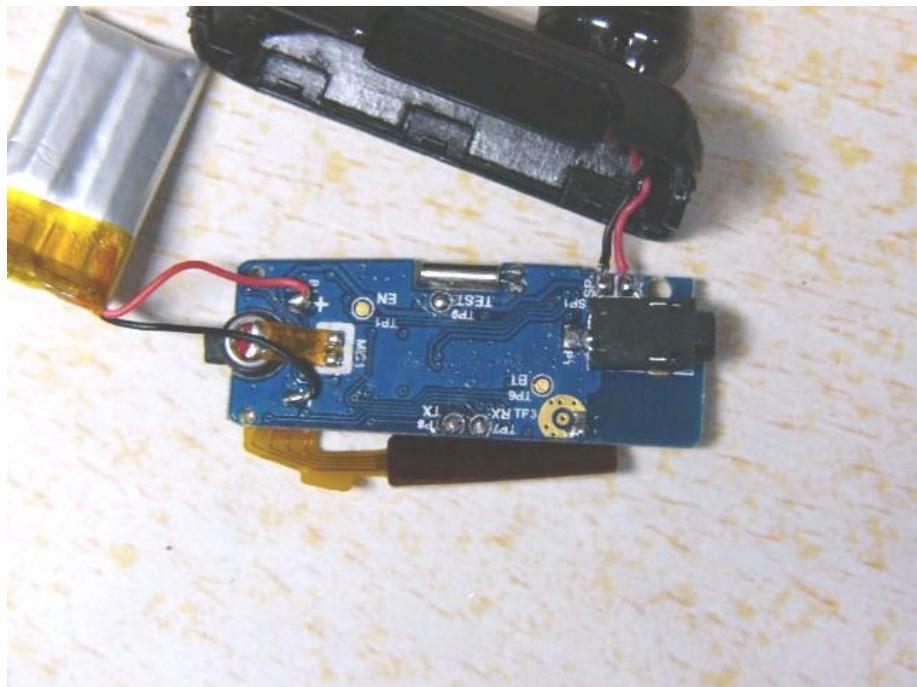

9. FCC/IC ID Label

FCC ID: UFDBH08R

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Cyber Blue (HK) Limited
Model No.: EM227
IC: 8227A-EM227

The following note shall be conspicuously placed in the users manual: **“Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.”**

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/Proposed FCC/IC ID Label Location



10. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Due Date
Turntable	SinTek	N/A	N/A	NCR
Antenna Tower	SinTek	N/A	N/A	NCR
OATS	SinTek	N/A	N/A	Oct. 9, 2010
Bilog Antenna	SCHAFFNER	CBL6111C	2775	June 12, 2009
Pre-Amplifier	HP	8449B	3008B00965	June 12, 2009
Horn Antenna	EMCO	3115	9602-4659	June 12, 2009
Horn Antenna	Rohde & Schwarz	AT4560	SB3435/03	May 4, 2009
EMI Test Receiver	Rohde & Schwarz	ESPI7	100013	July 09, 2009
Spectrum Analyzer	Rohde & Schwarz	FSP40	100273	Sep.18, 2009
Signal Generator	FLUKE	PM5418+Y/C	LO747012	Feb.10, 2010
Signal Generator	FLUKE	PM5418TX	LO738007	Feb.10, 2010
Loop Antenna	SCHWARZBECK	FMZB1516	113	Jan. 30, 2010
Loop Antenna	Rohde & Schwarz	HFH2-Z2	872096/16	Jan. 30, 2010
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4079	Sep.18, 2009
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4080	Sep.18, 2009
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-564	Sep.18, 2009
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-565	Sep.18, 2009
Ultra Broadband Antenna	Rohde & Schwarz	HL 562	100110	June.05, 2009
AMN	Rohde & Schwarz	ESH3-Z5	100196	Oct. 23, 2009
AMN	Rohde & Schwarz	ESH3-Z5	100197	Oct. 23, 2009
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A
Absorbing Clamp	Rohde & Schwarz	MDS-21	N/A	Oct. 29,2009
KMO Shielded Room	KMO	KMO-001	N/A	N/A
Coaxial Cable with N-Connectors	SCHWARZBECK	AK9515H	95549	Sep.18, 2009
Power Meter	Rohde & Schwarz	NRVD	100041	Feb.10, 2010
Radio Communication Test Set	Rohde & Schwarz	CMS 54	846621/024	Feb.10, 2010
Modulation Analyzer	Hewlett-Packard	8901B	2303A00362	Feb.10, 2010
SOHO Telephone Switching System	IKE	2000-108C	N/A	Feb.10, 2010
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb.10, 2010