



CERTIFICATION TEST REPORT

Report Number. : R13179001-E4

Applicant : iRobot Corporation
8 Crosby Drive
Bedford, MA 01730, USA

Model : AXG-Y1

FCC ID : UFE-AXGY1

IC : 6652A-AXGY1

EUT Description : Dual Band Radio Module
This report covers the 5GHz WLAN testing.

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:
2020-09-16

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2020-06-30	Initial Issue	
V2	2020-07-21	Removed straddle channel test results. Revised PCB antenna gain.	Brian T. Kiewra
V3	2020-09-01	Removed straddle channel test results.	Brian T. Kiewra
V4	2020-09-16	Updated antenna gain, power, and PSD.	Niklas Haydon

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST RESULT SUMMARY	8
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION	8
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	9
5.1. METROLOGICAL TRACEABILITY	9
5.2. DECISION RULES.....	9
5.3. MEASUREMENT UNCERTAINTY.....	9
5.4. SAMPLE CALCULATION	10
6. EQUIPMENT UNDER TEST	11
6.1. EUT DESCRIPTION	11
6.2. MAXIMUM OUTPUT POWER.....	11
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	13
6.4. SOFTWARE AND FIRMWARE.....	13
6.5. WORST-CASE CONFIGURATION AND MODE.....	13
6.6. DESCRIPTION OF TEST SETUP.....	14
7. MEASUREMENT METHOD.....	15
8. TEST AND MEASUREMENT EQUIPMENT	16
9. ANTENNA PORT TEST RESULTS	20
9.1. ON TIME AND DUTY CYCLE.....	20
9.2. 26 dB BANDWIDTH.....	22
9.2.1. 802.11a MODE IN THE 5.2 GHz BAND	23
9.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	24
9.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	25
9.2.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	26
9.2.5. 802.11a MODE IN THE 5.3 GHz BAND.....	27
9.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND	28
9.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND	29
9.2.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	30
9.2.9. 802.11a MODE IN THE 5.6 GHz BAND.....	31
9.2.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND	32

9.2.11.	802.11n HT40 MODE IN THE 5.6 GHz BAND	33
9.2.12.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	34
9.2.13.	802.11a MODE IN THE 5.8 GHz BAND	35
9.2.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	36
9.2.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	37
9.2.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	38
9.3.	99% BANDWIDTH	39
9.3.1.	802.11a MODE IN THE 5.2 GHz BAND	40
9.3.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	41
9.3.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	42
9.3.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	43
9.3.5.	802.11a MODE IN THE 5.3 GHz BAND	44
9.3.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	45
9.3.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	46
9.3.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	47
9.3.9.	802.11a MODE IN THE 5.6 GHz BAND	48
9.3.10.	802.11n HT20 MODE IN THE 5.6 GHz BAND	49
9.3.11.	802.11n HT40 MODE IN THE 5.6 GHz BAND	50
9.3.12.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	51
9.3.13.	802.11a MODE IN THE 5.8 GHz BAND	52
9.3.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	53
9.3.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	54
9.3.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	55
9.4.	6 dB BANDWIDTH	56
9.4.1.	802.11a MODE IN THE 5.8 GHz BAND	57
9.4.2.	802.11n HT20 MODE IN THE 5.8 GHz BAND	58
9.4.3.	802.11n HT40 MODE IN THE 5.8 GHz BAND	59
9.4.4.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	60
9.5.	OUTPUT POWER AND PSD	61
9.5.1.	RESULTS – PCB Antenna	63
9.5.2.	802.11a MODE IN THE 5.2 GHz BAND	63
9.5.3.	802.11n HT20 MODE IN THE 5.2 GHz BAND	67
9.5.4.	802.11n HT40 MODE IN THE 5.2 GHz BAND	71
9.5.5.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	75
9.5.6.	802.11a MODE IN THE 5.3 GHz BAND	79
9.5.7.	802.11n HT20 MODE IN THE 5.3 GHz BAND	83
9.5.8.	802.11n HT40 MODE IN THE 5.3 GHz BAND	87
9.5.9.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	91
9.5.10.	802.11a MODE IN THE 5.6 GHz BAND	95
9.5.11.	802.11n HT20 MODE IN THE 5.6 GHz BAND	99
9.5.12.	802.11n HT40 MODE IN THE 5.6 GHz BAND	103
9.5.13.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	107
9.5.14.	802.11a MODE IN THE 5.8 GHz BAND	111
9.5.15.	802.11n HT20 MODE IN THE 5.8 GHz BAND	115
9.5.16.	802.11n HT40 MODE IN THE 5.8 GHz BAND	119
9.5.17.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	123
9.5.18.	RESULTS – External Antenna	127
9.5.19.	802.11a MODE IN THE 5.2 GHz BAND	127
9.5.20.	802.11n HT20 MODE IN THE 5.2 GHz BAND	131
9.5.21.	802.11n HT40 MODE IN THE 5.2 GHz BAND	135
9.5.22.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	139

9.5.23.	802.11a MODE IN THE 5.3 GHz BAND	143
9.5.24.	802.11n HT20 MODE IN THE 5.3 GHz BAND	147
9.5.25.	802.11n HT40 MODE IN THE 5.3 GHz BAND	151
9.5.26.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	155
9.5.27.	802.11a MODE IN THE 5.6 GHz BAND	159
9.5.28.	802.11n HT20 MODE IN THE 5.6 GHz BAND	163
9.5.29.	802.11n HT40 MODE IN THE 5.6 GHz BAND	167
9.5.30.	802.11ac VHT80 MODE IN THE 5.6 GHz BAND	171
9.5.31.	802.11a MODE IN THE 5.8 GHz BAND	175
9.5.32.	802.11n HT20 MODE IN THE 5.8 GHz BAND	179
9.5.33.	802.11n HT40 MODE IN THE 5.8 GHz BAND	183
9.5.34.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	187
10.	RADIATED TEST RESULTS.....	191
10.1.	TRANSMITTER ABOVE 1 GHz.....	193
10.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND	193
10.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	209
10.1.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	225
10.1.4.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	237
10.1.5.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND	245
10.1.6.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	261
10.1.7.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	277
10.1.8.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	289
10.1.9.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND	297
10.1.10.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND.....	317
10.1.11.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND.....	337
10.1.12.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND	357
10.1.13.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND	373
10.1.14.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND.....	393
10.1.15.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND.....	413
10.1.16.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND	429
10.2.	WORST CASE BELOW 30MHZ.....	441
10.3.	WORST CASE BELOW 1 GHZ.....	444
10.4.	WORST CASE 18-26 GHZ.....	448
10.5.	WORST CASE 26-40 GHZ.....	452
11.	AC POWER LINE CONDUCTED EMISSIONS.....	456
11.1.1.	AC Power Line Host – External Antenna.....	457
11.1.2.	AC Power Line Host – PCB Antenna	459
12.	SETUP PHOTOS.....	461

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: iRobot Corporation
8 Crosby Drive
Bedford, MA 01730, USA

EUT DESCRIPTION: Dual Band Radio Module

MODEL: AXG-Y1

SERIAL NUMBER: SS0040BWW, SS0040BHN, SS040B86, SS0040B59, SS0040BXP,
SS0040BHN

DATE SAMPLE RECEIVED: 2020-05-04

DATE TESTED: 2020-05-08 to 2020-09-11

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.

Approved & Released For
UL LLC

Prepared By:



Jeffrey Moser
Operations Manager
Consumer Technology Division
UL LLC



Niklas Haydon
Operations Leader
Consumer Technology Division
UL LLC

2. TEST RESULT SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	Per ANSI C63.10, Section 12.2.
See Comment	RSS-GEN 6.7	26dB BW/99% OBW	Reporting purposes only	Per ANSI C63.10 Sections 6.9.2 and 6.9.3
15.407 (e)	RSS-247 6.2.4.1	6 dB BW	Compliant	None.
15.407 (a) (1-4), (h) (1)	RSS-247 6.2	Output Power	Compliant	None.
15.407 (a) (1-3, 5)	RSS-247 6.2	PSD	Compliant	None.
15.209, 15.205, 15.407 (b)	RSS-GEN 8.9, 8.10, RSS-247 6.2	Radiated Emissions	Compliant	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Compliant	None.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with;

- FCC CFR 47 Part 2
- FCC CFR 47 Part 15,
- FCC KDB 662911 D01 v02r01,
- FCC KDB 905462 D06 v02
- FCC KDB 789033 D02 v02r01,
- ANSI C63.10-2013,
- RSS-GEN Issue 5
- RSS-247 Issue 2
-

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Drive, Research Triangle Park, North Carolina, USA and 2800 Perimeter Park Dr., Suite B, Morrisville, North Carolina, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

12 Laboratory Dr.	2800 Perimeter Park Dr.
Site Code: 2180C	
☐ Chamber A RTP	☒ North Chamber
☒ Chamber C RTP	☒ South Chamber

The above test sites and facilities are covered under FCC Test Firm Registration # 703469. Chambers above are covered under Industry Canada company address and respective code.

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	2.00%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
RF output power, radiated (SAC) <180 MHz	6.18 dB
RF output power, radiated (SAC) <180 MHz	3.23 dB
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	5.17 dB
Conducted Emissions (0.150-30MHz) - LISN	3.07 dB
Temperature	2.26°C
Humidity	6.79%
DC Supply voltages	1.70%
Time	3.39%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a Dual band Radio module supporting 2.4GHz WLAN and 5GHz WLAN as well as BT and BLE. This report covers the 5GHz WLAN testing.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

PCB Antenna

5.2 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.2 GHz band, 1TX			
5180-5240	802.11a	12.76	18.88
5180-5240	802.11n HT20	12.86	19.32
5190-5230	802.11n HT40	11.79	15.10
5210	802.11ac VHT80	11.80	15.14

5.3 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.3 GHz band, 1TX			
5260 - 5320	802.11a	17.22	52.72
5260 - 5320	802.11n HT20	17.12	51.52
5270 - 5310	802.11n HT40	14.34	27.16
5290	802.11ac VHT80	11.78	15.07

5.6 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 1TX			
5500-5700	802.11a	16.97	49.77
5500-5700	802.11n HT20	16.72	46.99
5510-5670	802.11n HT40	16.63	46.03
5530-5610	802.11ac VHT80	15.53	35.73

5.8 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.8 GHz band, 1TX			
5745-5825	802.11a	16.74	47.21
5745-5825	802.11n HT20	16.64	46.13
5755-5795	802.11n HT40	16.90	48.98
5775	802.11ac VHT80	15.39	34.56

External Antenna

5.2 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.2 GHz band, 1TX			
5180-5240	802.11a	12.31	17.02
5180-5240	802.11n HT20	12.16	16.44
5190-5230	802.11n HT40	10.62	11.53
5210	802.11ac VHT80	10.82	12.08

5.3 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.3 GHz band, 1TX			
5260 - 5320	802.11a	15.26	33.57
5260 - 5320	802.11n HT20	15.03	31.84
5270 - 5310	802.11n HT40	11.87	15.38
5290	802.11ac VHT80	10.04	10.09

5.6 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 1TX			
5500-5700	802.11a	13.98	25.00
5500-5700	802.11n HT20	13.76	23.77
5510-5670	802.11n HT40	12.68	18.54
5530-5610	802.11ac VHT80	12.81	19.10

5.8 GHz BAND (FCC/IC)

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.8 GHz band, 1TX			
5745-5825	802.11a	14.62	28.97
5745-5825	802.11n HT20	14.36	27.29
5755-5795	802.11n HT40	14.68	29.38
5775	802.11ac VHT80	13.66	23.23

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PCB and a flexible external antennas for diversity, with a maximum gain of 4.31 dBi (PCB) and 6.37 dBi (external).

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was v sapphire+0.0.0+qcs405-som1+0000
The test utility software used during testing was QRCT version: 4.0.00127.0.

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power and PSD as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation for the PCB antenna and Z orientation was worst-case orientation for the External antenna; therefore, all final radiated testing was performed with the EUT in X orientation for the PCB antenna and in Z orientation for the external antenna.

Conducted testing was performed using PCB antenna port as worst-case, with the exception of power and PSD which was done on both antenna ports.

Radiated and AC mains emissions testing were performed using both antennas.

Worst-case data rates as were:

802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0
802.11ac VHT80 mode: MCS0

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	T450	PC-OA2UQS	PD97265NGU
Laptop Charger	Lenovo	ADLX65NCC2A	11S36200284ZZ1005380J8	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Mains	1	Terminal	Single conductor	<3m	Provides DC power to PCB

TEST SETUP

Test software from a laptop exercised the radio in the EUT.

SETUP DIAGRAMS

Please refer to R13179001-EP1 for setup diagrams.

7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 789033 D02 v02r01, Section B.

6 dB Emission BW: KDB 789033 D02 v02r01, Section C.2

26 dB Emission BW: KDB 789033 D02 v02r01, Section C.1

99% Occupied BW: KDB 789033 D02 v02r01, Section D.

Conducted Output Power: KDB 789033 D02 v02r01, Section E.3.b (Method PM-G)

Power Spectral Density: KDB 789033 D02 v02r01, Section F

Unwanted emissions in restricted bands: KDB 789033 D02 v02r01, Sections G.1, G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v02r01, Sections G.2, G.3, G.4, and G.5.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

General Radiated Emissions: ANSI C63.10-2013 Section 6.3-6.6, 6.10

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report. Note – only calibrated equipment was used at time of test.:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville - North Chamber)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
AT0069	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2019-05-15	2020-05-15
AT0072	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2020-04-27	2021-04-27
	18-40 GHz				
AT0076	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2019-11-07	2020-11-07
AT0077	Horn Antenna, 26-40GHz	ARA	MWH-2640/B	2019-11-07	2020-11-07
	Gain-Loss Chains				
N-SAC03	Gain-loss string: 1-18GHz	Various	Various	2020-03-15	2021-03-15
N-SAC04	Gain-loss string: 18-40GHz	Various	Various	2020-03-22	2021-03-22
	Receiver & Software				
SA0025	Spectrum Analyzer	Agilent	N9030A	2020-03-17	2021-03-17
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	Additional Equipment used				
s/n 181474341	Environmental Meter	Fisher Scientific	15-077-963	2018-07-27	2020-07-27
76021	DC Regulated Power Supply	CircuitSpecialists.Com	CSI3005X5	N/A	N/A
76022	DC Regulated Power Supply	CircuitSpecialists.Com	CSI3005X5	N/A	N/A

Note - Testing performed prior to 2020-06-30.

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville - South Chamber)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	0.009-30MHz	(Loop Ant.)			
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2019-08-08	2020-08-08
	30-1000 MHz				
AT0074	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2019-07-16	2020-07-16
	1-18 GHz				
AT0078	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2019-10-28	2020-10-28
	Gain-Loss Chains				
S-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2020-04-23	2021-04-23
S-SAC02	Gain-loss string: 25-1000MHz	Various	Various	2020-04-23	2021-04-23
S-SAC03	Gain-loss string: 1-18GHz	Various	Various	2020-03-17, 2020-05-15	2021-03-17, 2021-05-15
	Receiver & Software				
SA0027	Spectrum Analyzer	Agilent	N9030A	2019-05-15	2020-05-31
197954 (In service @noon on 05/31/2020)	Spectrum Analyzer	Rohde & Schwarz	ESW44	2020-03-27	2021-03-27
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	Additional Equipment used				
s/n 181474409	Environmental Meter	Fisher Scientific	15-077-963	2018-07-27	2020-07-27
76022	DC Regulated Power Supply	CircuitSpecialists.Com	CSI3005X5	N/A	N/A
76021	DC Regulated Power Supply	CircuitSpecialists.Com	CSI3005X5	N/A	N/A

Note - Testing performed prior to 2020-06-30.

Test Equipment Used - Radiated Disturbance Emissions (E-field) – Chamber C

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
AT0062	Horn Antenna	ETS-Lindgren	3117	2020-01-30	2021-01-30
	Gain-Loss Chains				
C-SAC02	Gain-loss string: 1-18GHz	Various	Various	2020-03-03	2021-03-03
C-SAC02 Path 7	Gain-loss string 1-7GHz	Various	Various	2020-04-03	2021-04-03
	Receiver & Software				
SA0018	Spectrum Analyzer	Agilent	PXA (N9030A)	2020-03-02	2021-03-02
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	Additional Equipment used				
HI0085	Temp/Humid/Pressure Meter	EXTECH	SD700	2019-04-08	2020-04-08
HI0085	Temp/Humid/Pressure Meter	EXTECH	SD700	2020-04-20	2021-04-30
HPF012	Filter	Micro-Tronics	HPM18129	2020-02-19	2021-01-19

Note - Testing performed prior to 2020-06-30.

Line Conducted Equipment List

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2020-03-26	2021-03-26
s/n 161024885	Environmental Meter	Fisher Scientific	15-0770-963	2018-09-04	2020-09-04
LISN003	LISN, 50-ohm/50-uH, 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50-25-2-01-550V	2019-08-19	2020-08-19
75141 (PRE0101521)	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2019-08-20	2020-08-20
ATA222 (In service 03/26/2020)	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2020-03-26	2021-03-26
PS214	AC Power Source	Elgar	CW2501M (s/n 1523A02396)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 June 15, 2019	NA	NA
76021	DC Power Supply	CircuitSpecialist.com	CSI3005X5	NA	NA
E3633A OEM	DC Power Supply	Keysight	E3633A	NA	NA

Note - Testing performed prior to 2020-06-30.

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Conducted Room 1					
72822 (PRE0100902)	Spectrum Analyzer	Agilent Technologies	E4446A	2020-01-02	2021-01-02
T177(PRE0079253)	Spectrum Analyzer	Agilent Technologies	E4446A	2020-04-30	2021-04-30
PWM004 (PRE0137346)	RF Power Meter	Keysight Technologies	N1911A	2019-08-23, 2020-07-31	2020-08-23, 2021-07-31
PWS004 (PRE0126443)	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	E9323A	2019-08-23, 2020-08-12	2020-08-23, 2021-08-12
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2019-06-17	2020-06-17
SN 181562858	Environmental Meter	Fisher Scientific	14-650-118	2018-09-04	2020-09-04
76022	DC Regulated Power Supply	CircuitSpecialist s.Com	CSI3005X5	N/A	N/A
SOFTEMI	EMC Software	UL	Version 2020.3.11, Version 2020.04.17 Version 2020.5.18 Version 2020.9.1	NA	NA
Conducted Room 2					
72822 (PRE0100902)	Spectrum Analyzer	Agilent Technologies	E4446A	2020-01-02	2021-01-02
SA0027	Spectrum Analyzer	Keysight Technologies	N9030A	2020-06-10	2021-06-10
PWM002 (PRE0137344)	RF Power Meter	Keysight Technologies	N1911A	2019-08-23, 2020-07-31	2020-08-23, 2021-07-31
PWS002 (PRE0137348)	Peak and Avg Power Sensor, 50MHz to 18GHz	Keysight Technologies	N1921A	2019-08-23	2020-08-23
PWM003 (PRE0137345)	RF Power Meter	Keysight Technologies	N1911A	2019-08-23, 2020-08-28	2020-08-23, 2021-08-28
PWS005 (PRE0126445)	Peak and Avg Power Sensor, 50MHz to 18GHz	Keysight Technologies	N1921A	2020-05-26	2021-05-26
PWS011 (10082)	Wideband Power Sensor	Boonton	55006	2019-08-09, 2020-08-21	2020-08-09, 2021-08-21
SN 181474341	Environmental Meter	Fisher Scientific	15-077-963	2018-07-27	2020-07-27
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2020-06-26	2021-06-26
30811	DC Regulated Power Supply	Tenma	72-6180A	N/A	N/A
SOFTEMI	EMC Software	UL	Versions 2020.3.11, 2020.04.17, 2020.5.18, 2020.9.1	NA	NA

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB) Power/PSD	Duty Cycle Correction Factor (dB) Radiated	1/B Minimum VBW (kHz)
802.11a 1TX	1.431	1.469	0.974	97.41%	0.11	0.23	0.699
802.11n HT20 1TX	1.340	1.378	0.972	97.24%	0.12	0.24	0.746
802.11n HT40 1TX	0.664	0.701	0.947	94.75%	0.23	0.47	1.507
802.11ac VHT80 1TX	0.331	0.368	0.900	90.02%	0.46	0.91	3.020

DUTY CYCLE PLOTS

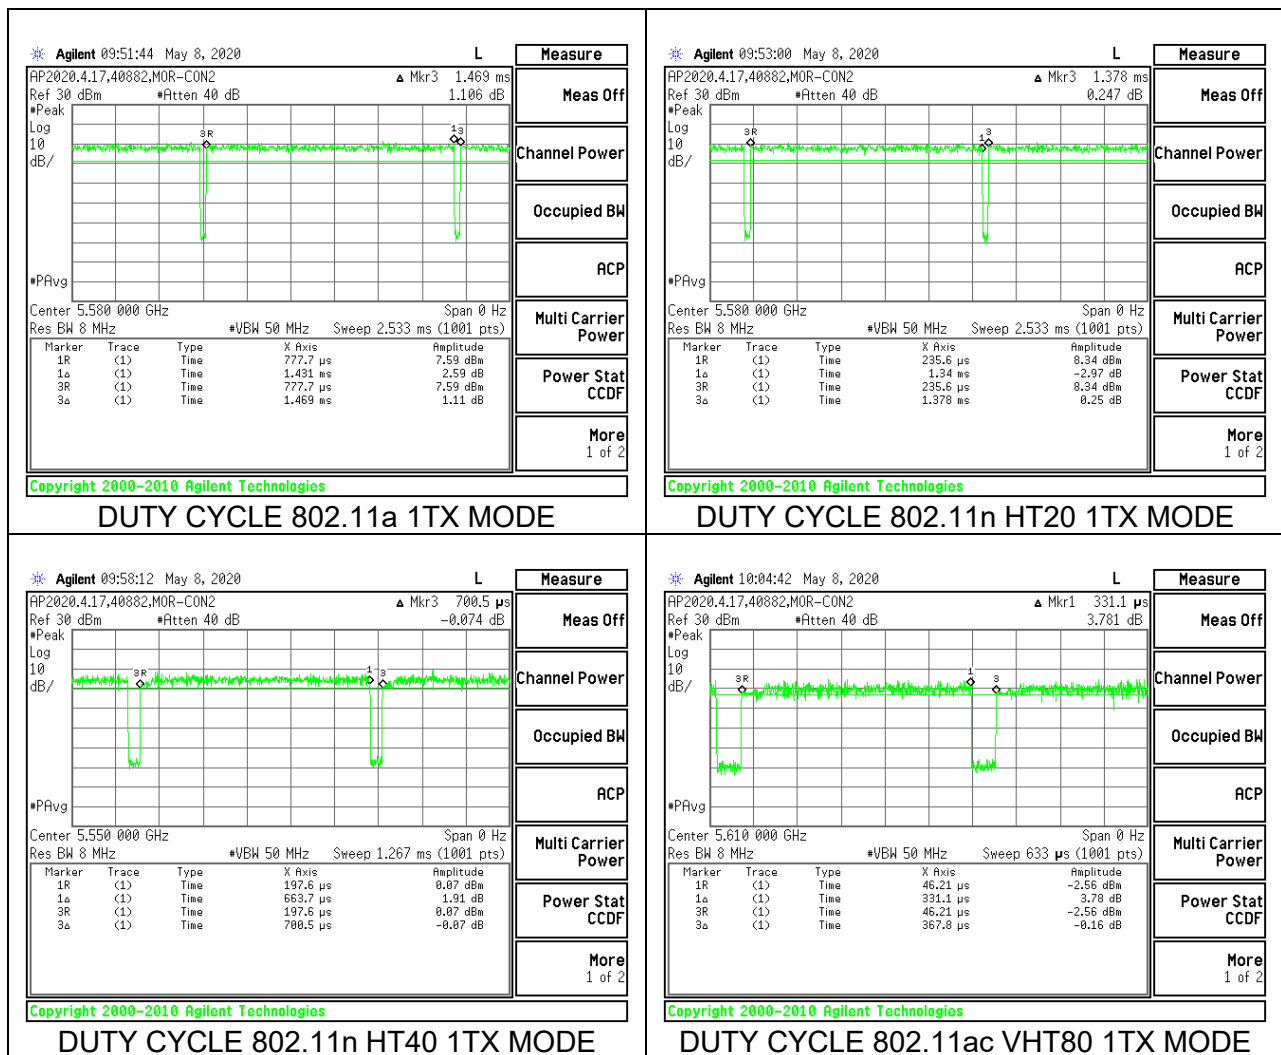

9.2. 26 dB BANDWIDTH

LIMITS


None; for reporting purposes only.

RESULTS

9.2.1. 802.11a MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5180	23.55
Mid	5200	23.65
High	5240	24.40

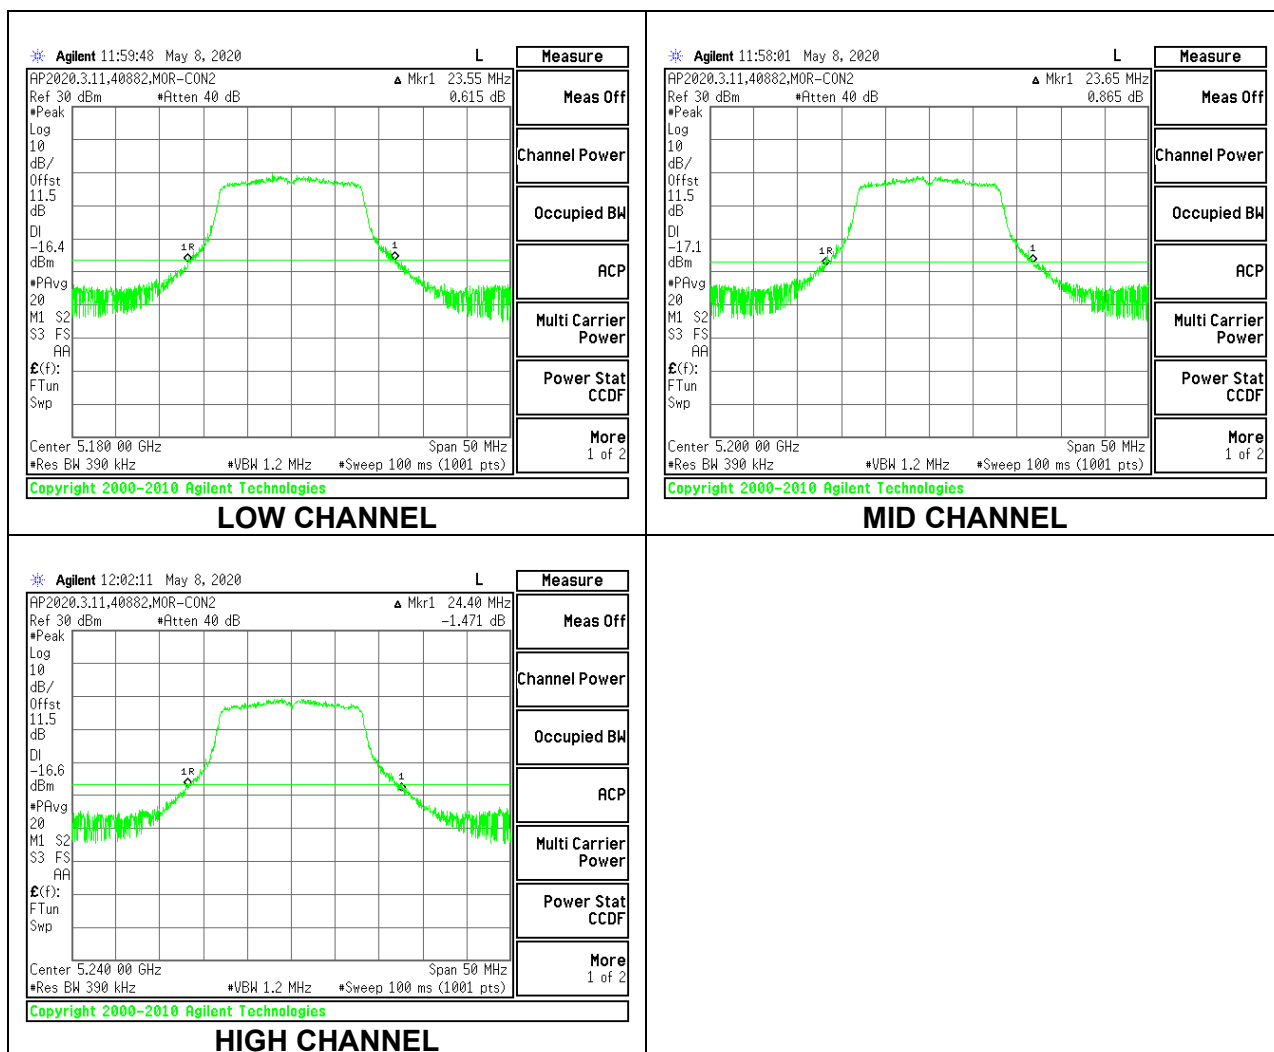

9.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5180	24.80
Mid	5200	24.90
High	5240	25.70

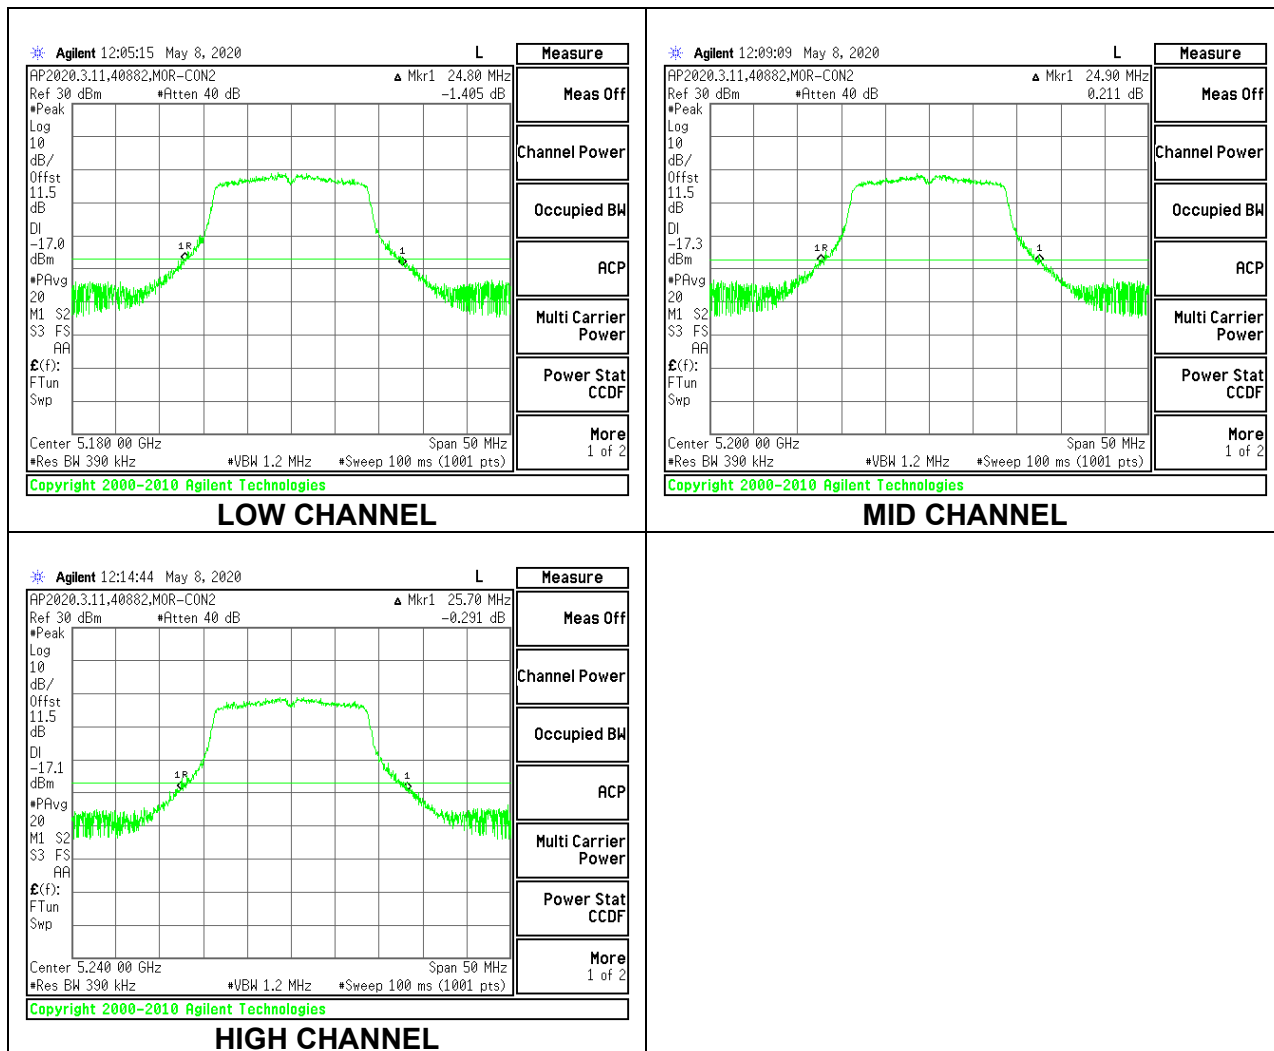

9.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26dB Bandwidth
	(MHz)	(MHz)
Low	5190	56.40
High	5230	65.20

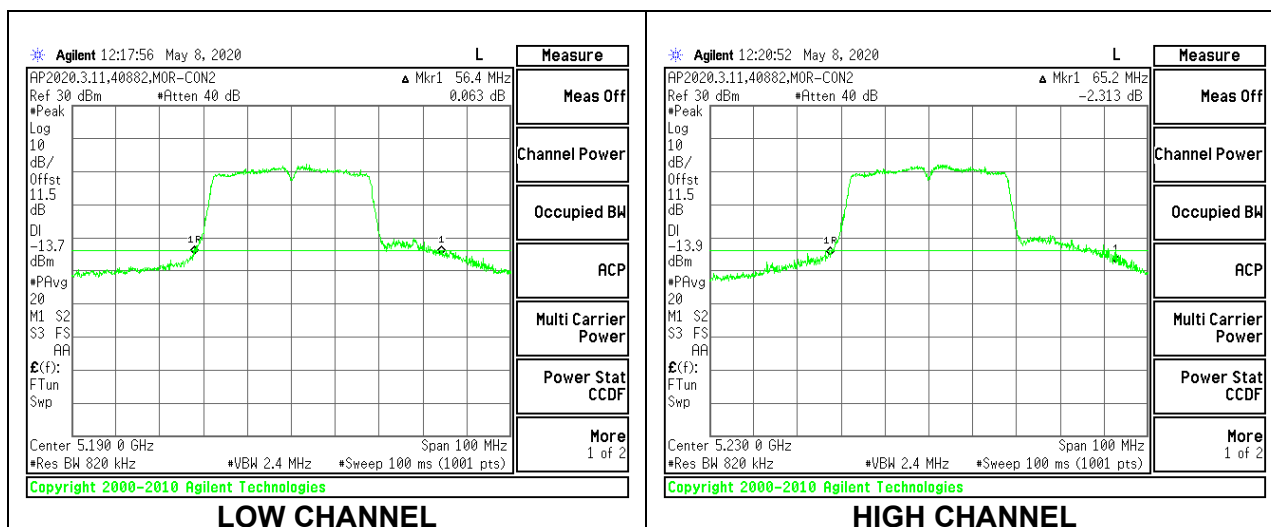

9.2.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5210	103.60

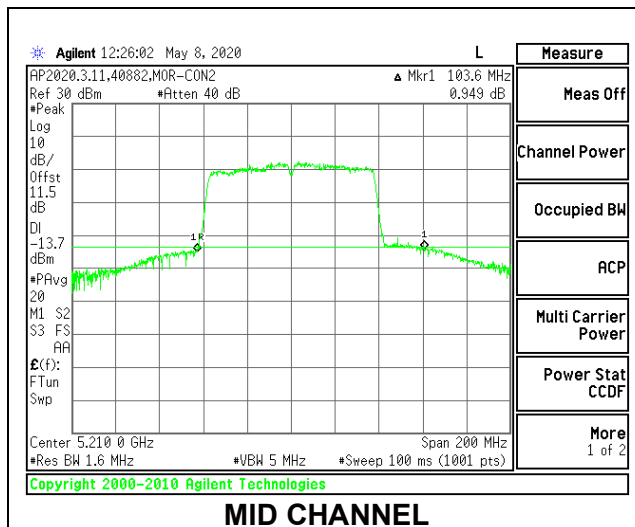

9.2.5. 802.11a MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	26.60
Mid	5300	28.25
High	5320	27.95

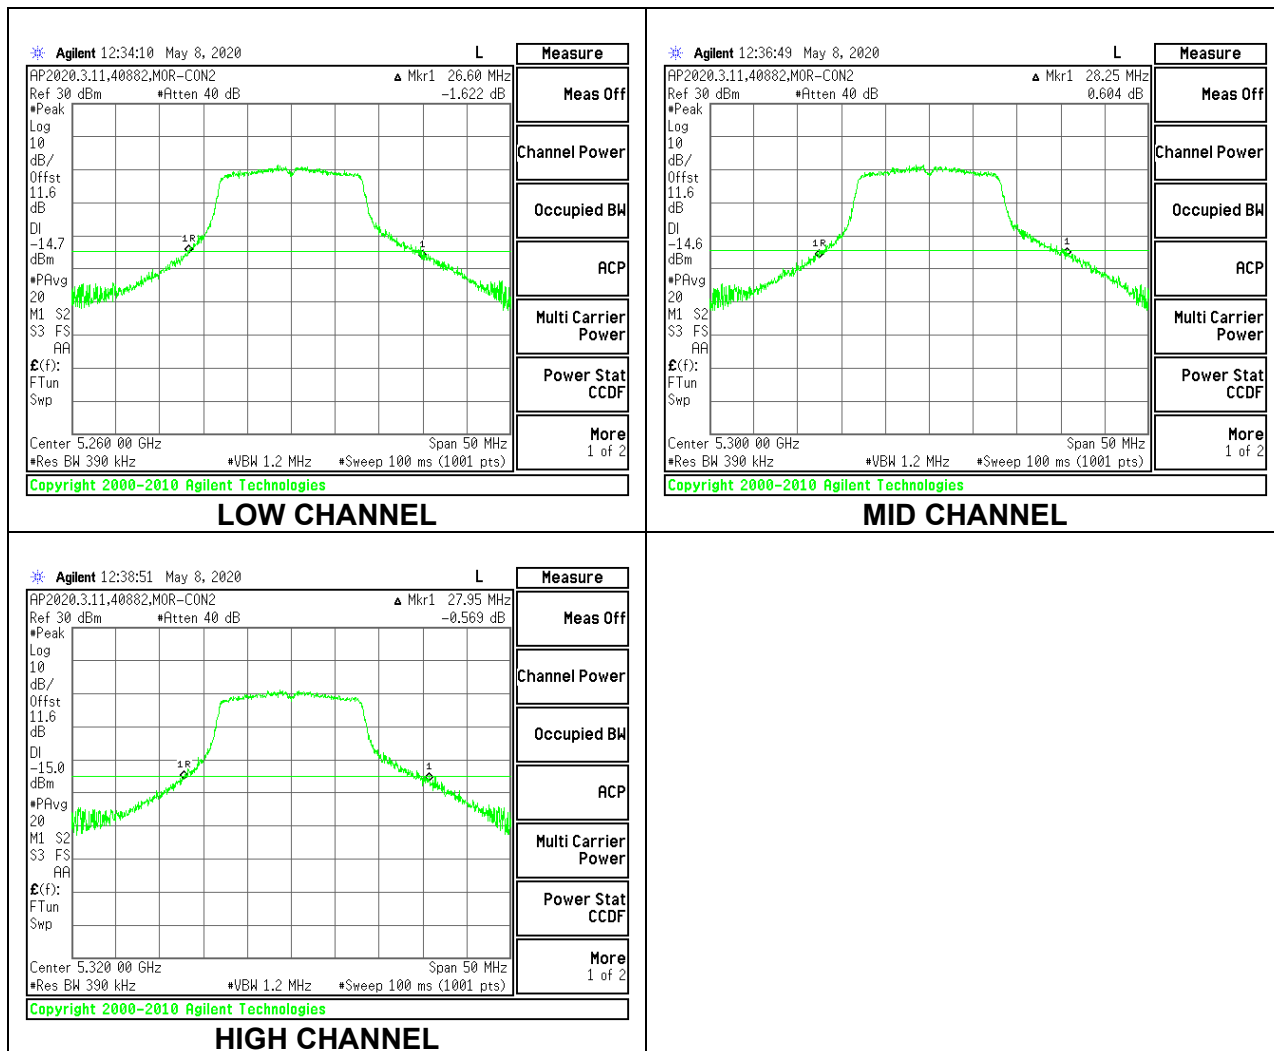

9.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5260	26.95
Mid	5300	28.70
High	5320	28.55

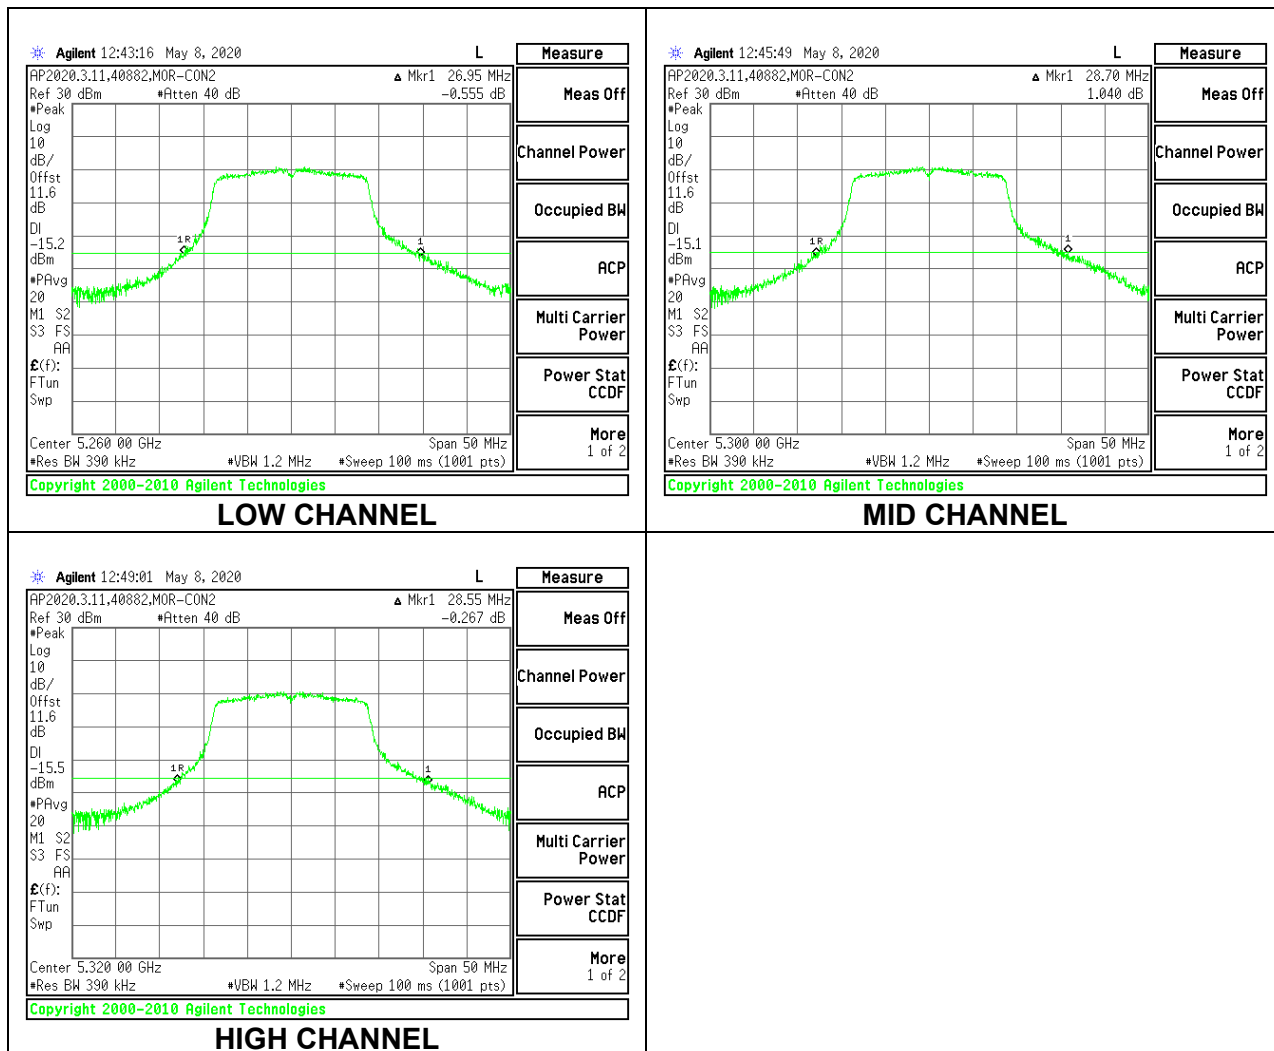

9.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26dB Bandwidth
	(MHz)	(MHz)
Low	5270	42.30
High	5310	54.00

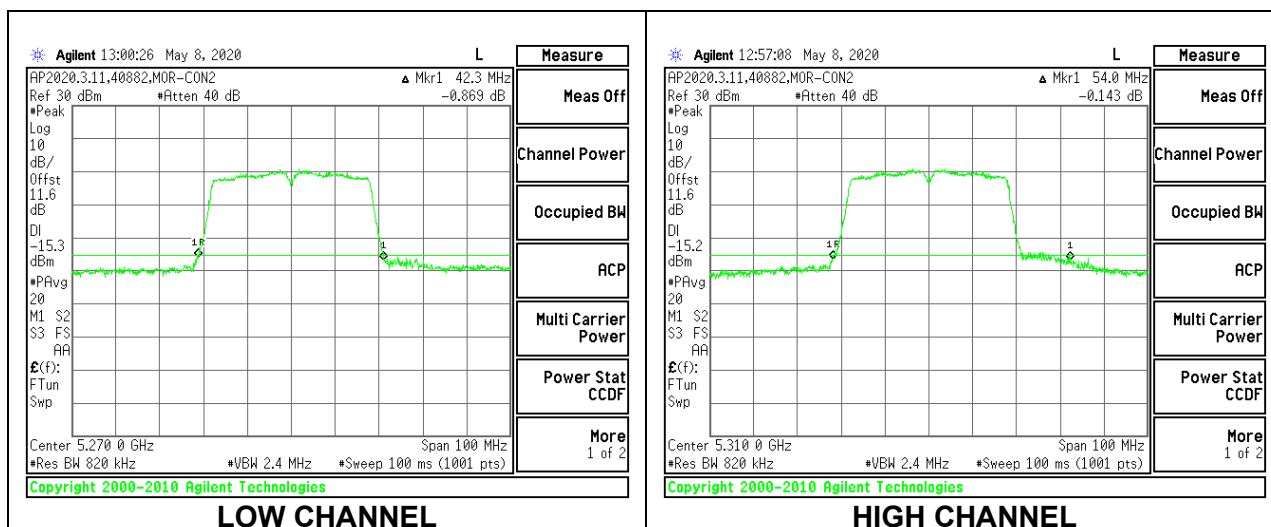

9.2.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5290	86.20

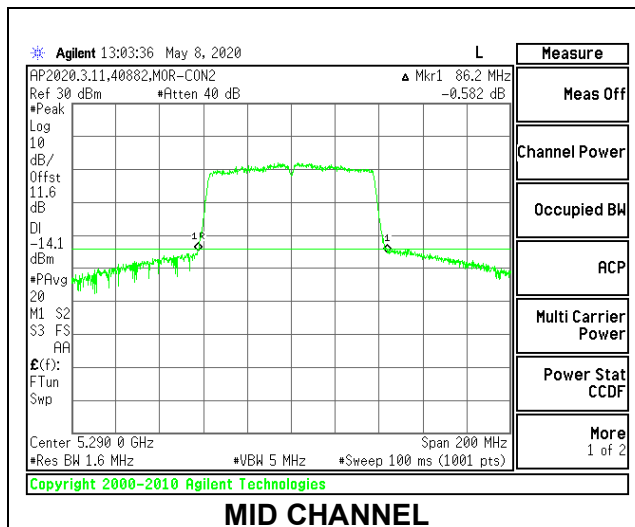

9.2.9. 802.11a MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5500	26.90
Mid	5580	27.20
High	5700	27.40

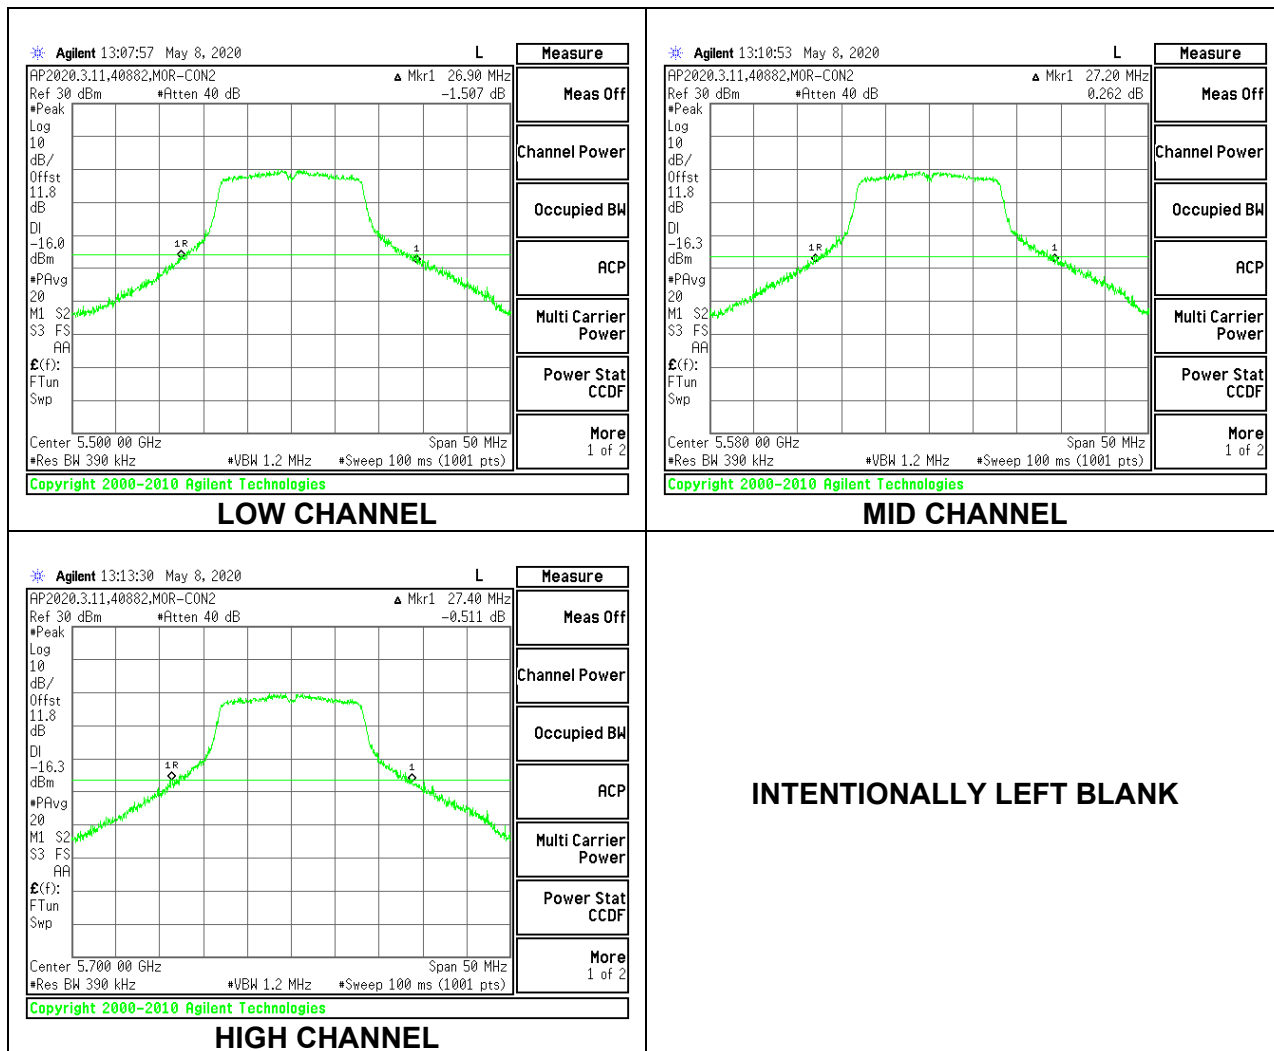

9.2.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5500	26.30
Mid	5580	27.60
High	5700	27.40

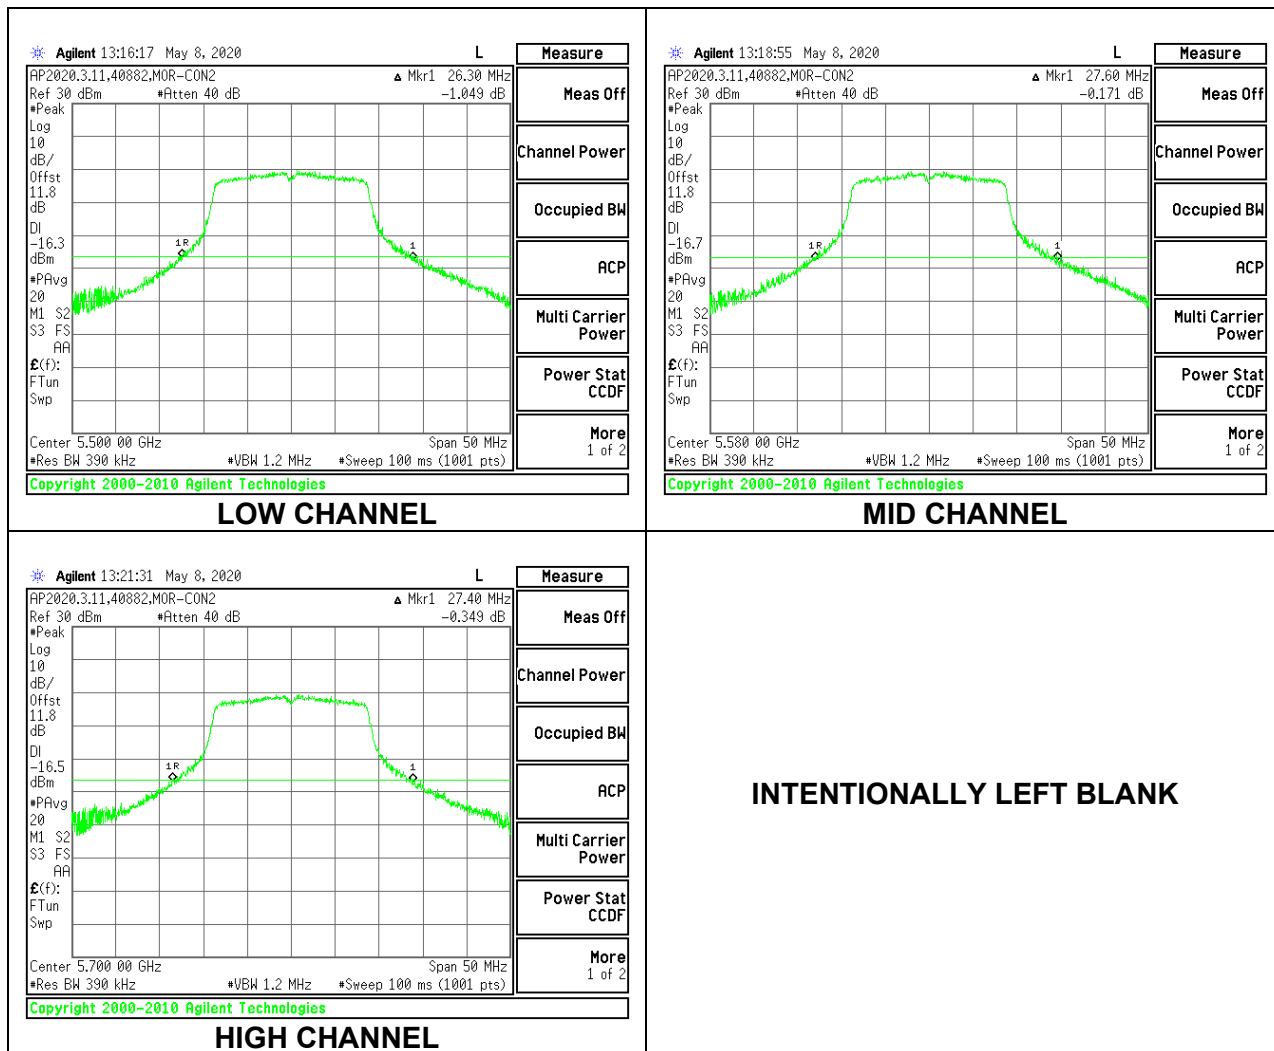


9.2.11. 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5510	42.80
Mid	5550	42.50
High	5670	42.80

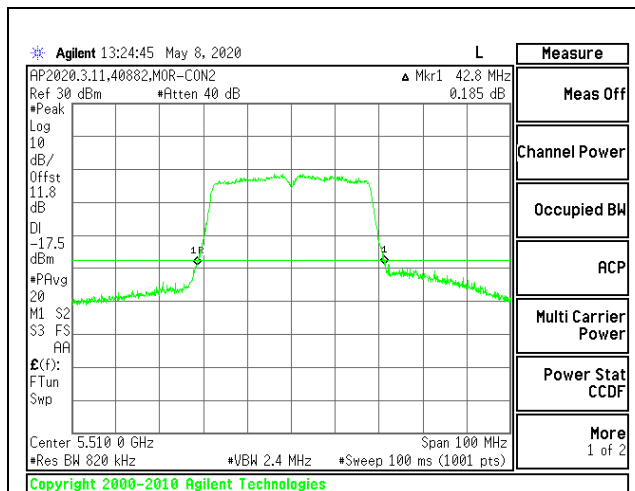

LOW CHANNEL

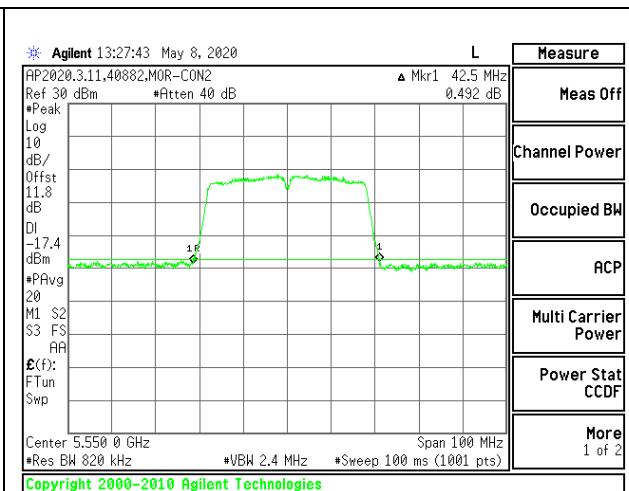

MID CHANNEL

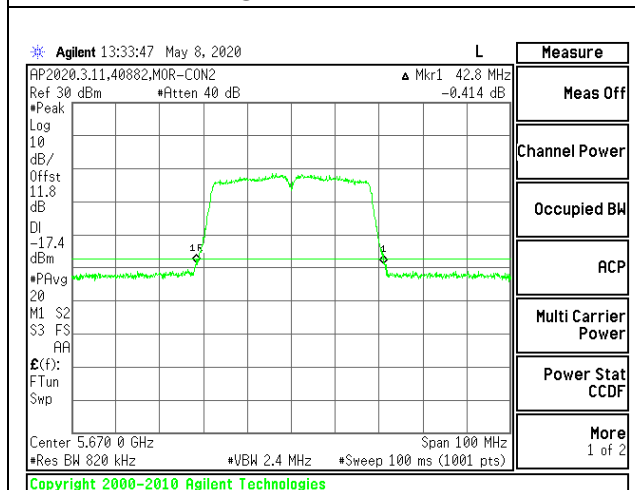


HIGH CHANNEL

INTENTIONALLY LEFT BLANK

9.2.12. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5530	135.80
High	5610	90.80

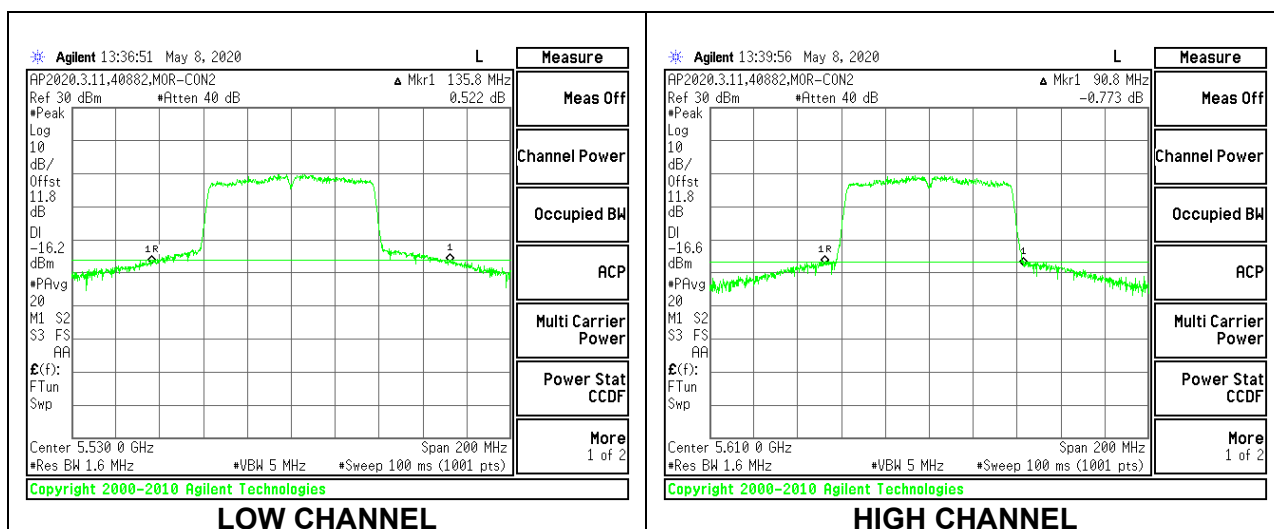

9.2.13. 802.11a MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5745	26.40
Mid	5785	26.00
High	5825	25.95

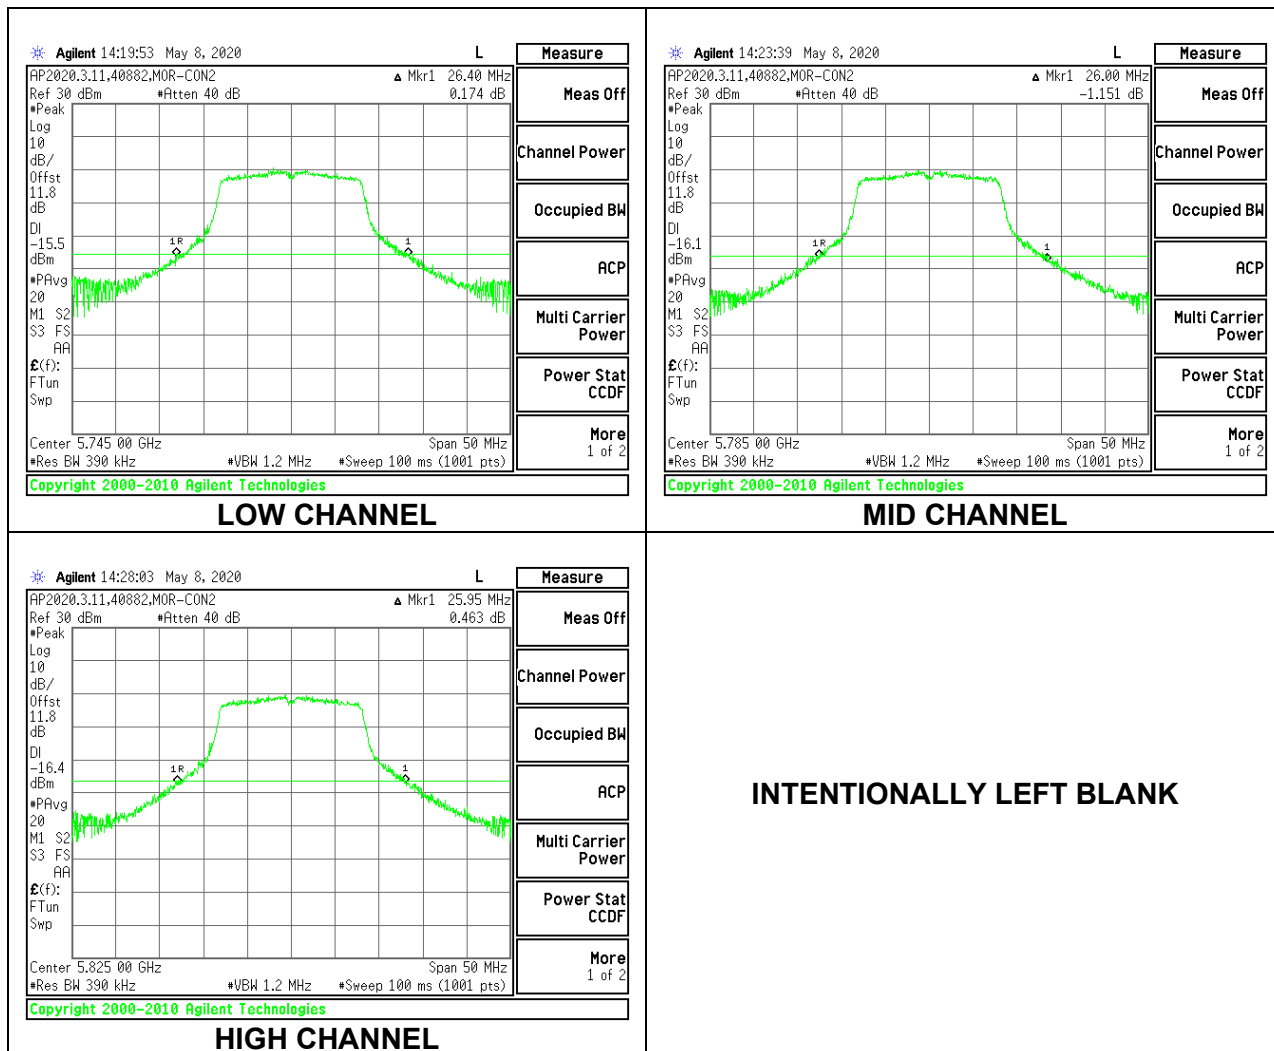

9.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Low	5745	26.30
Mid	5785	27.35
High	5825	27.35

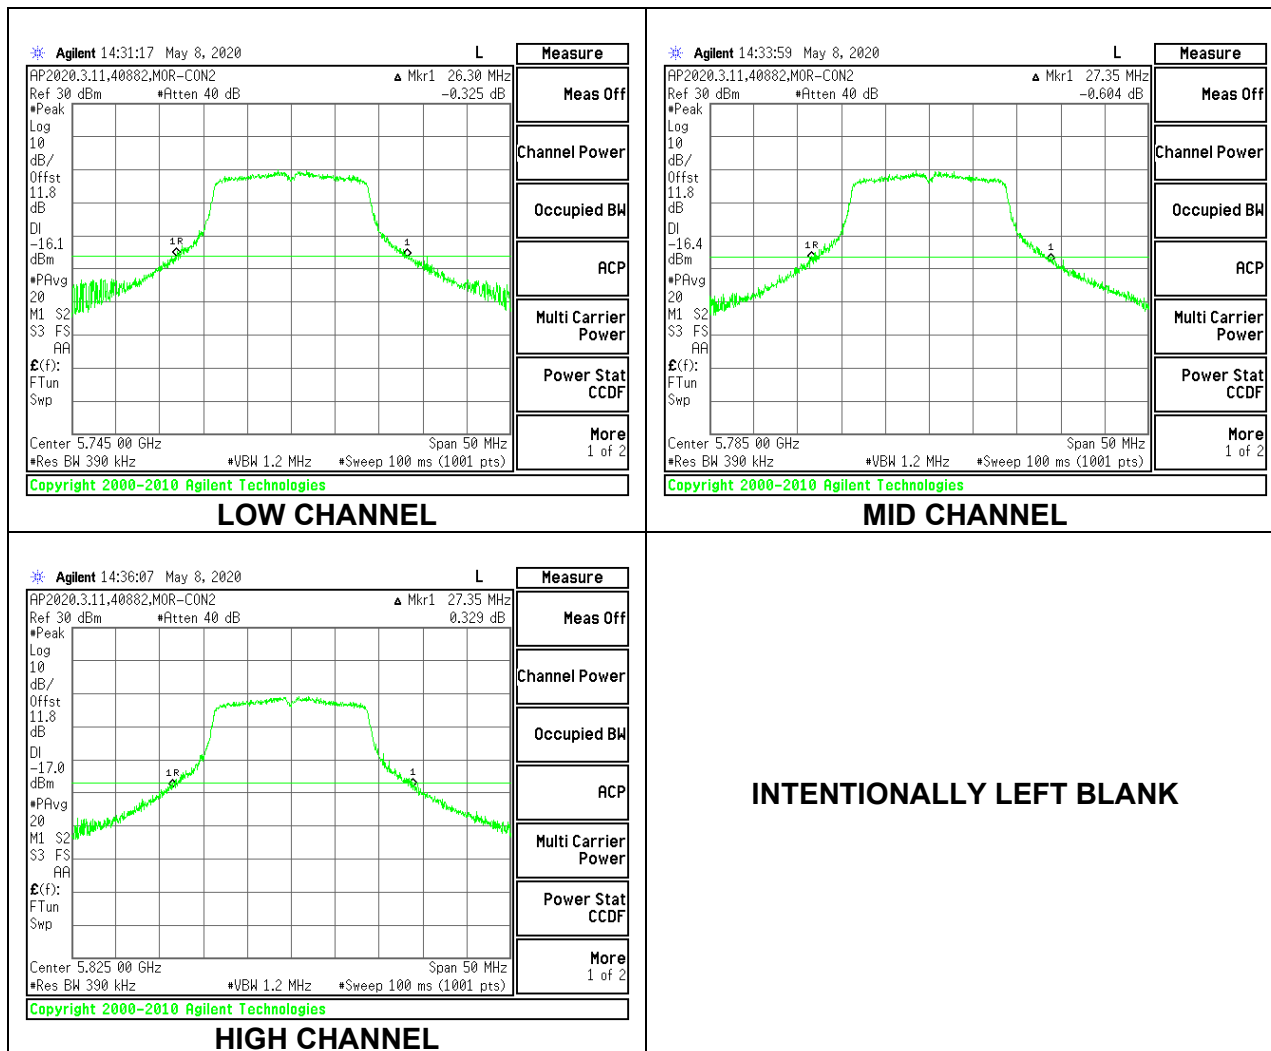

9.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	26dB Bandwidth
	(MHz)	(MHz)
Low	5755	53.40
High	5795	50.50

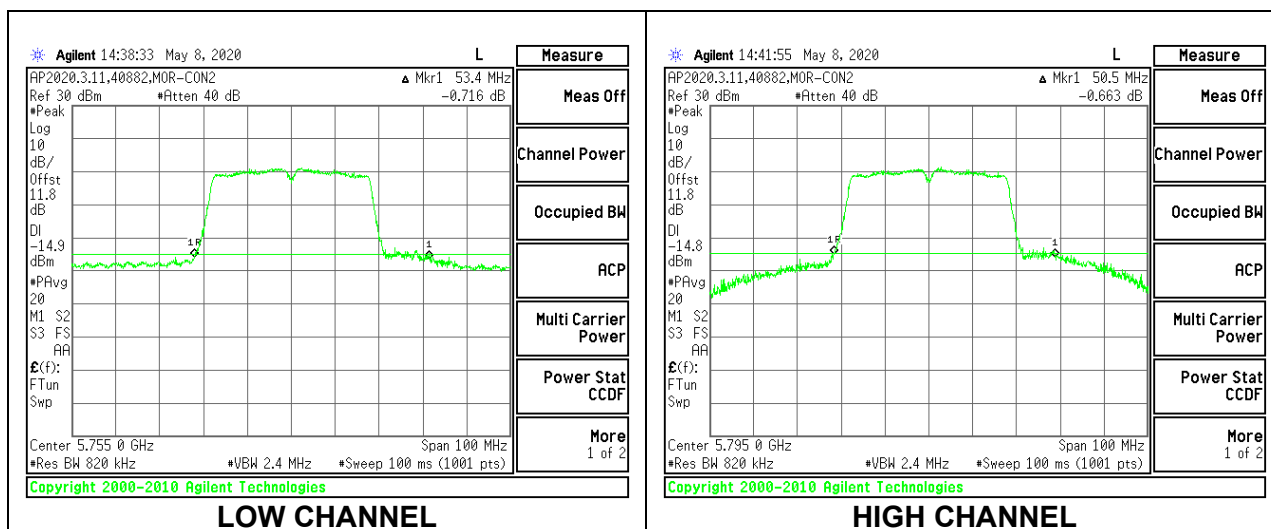

9.2.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE

Channel	Frequency	26 dB Bandwidth
	(MHz)	(MHz)
Mid	5775	104.40

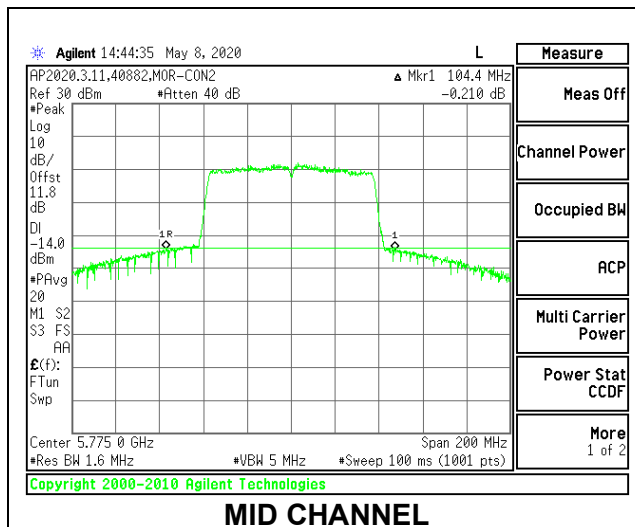

9.3. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


RESULTS

9.3.1. 802.11a MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE

Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5180	16.4390
Mid	5200	16.5360
High	5240	16.5220

Note – The occupied bandwidth of the above channels do not fall into the 5.3 GHz band (5240MHz+16.522MHz/2 = 5248.26 MHz).

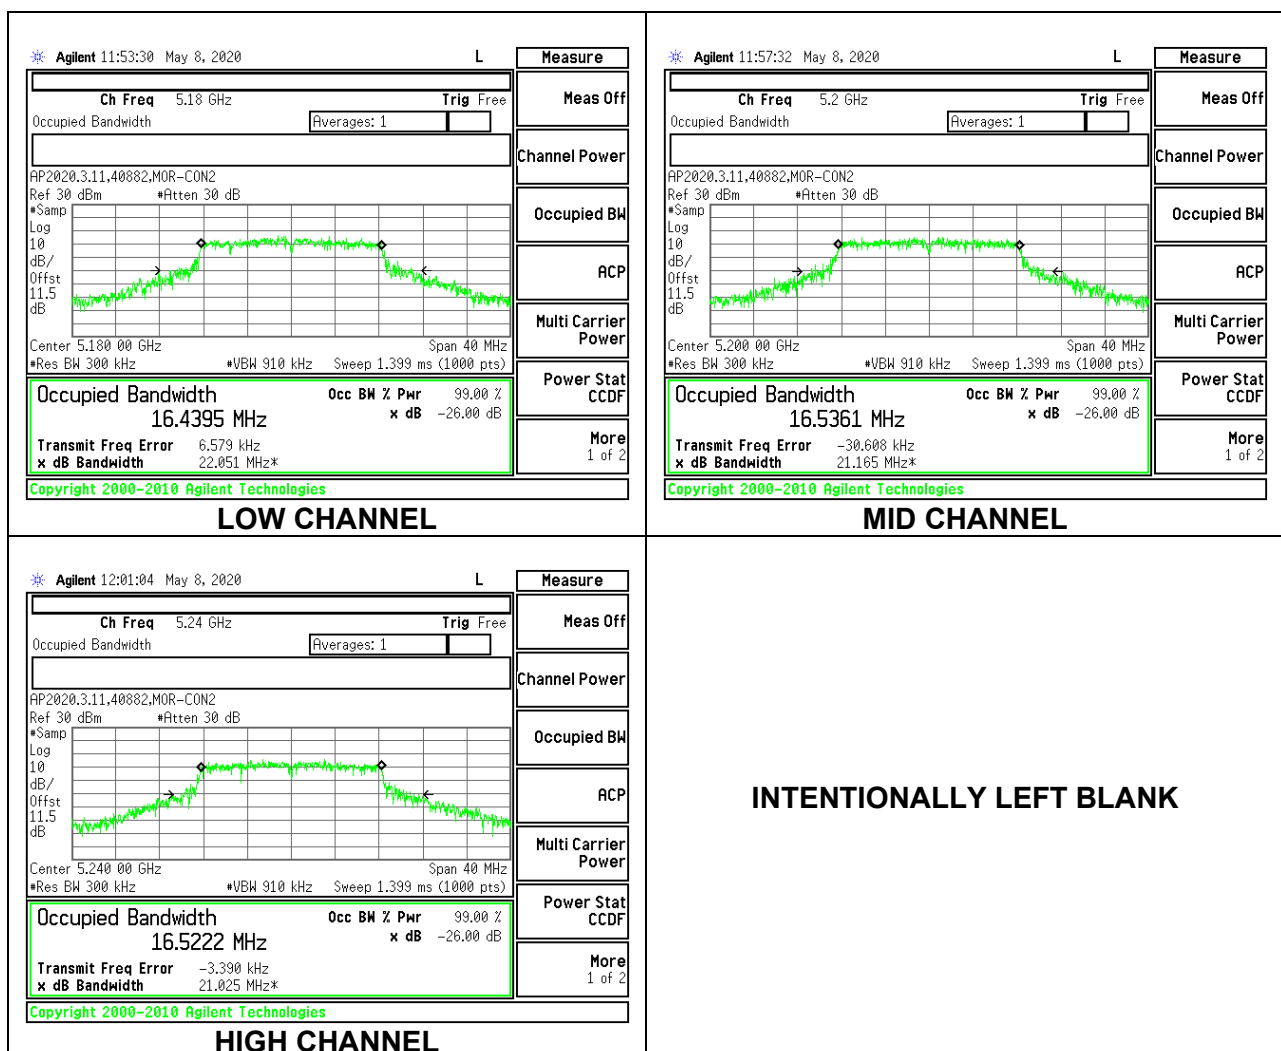


9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE

Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5180	17.7050
Mid	5200	17.6150
High	5240	17.6880

Note – The occupied bandwidth of the above channels do not fall into the 5.3 GHz band (5240MHz+17.688MHz/2 = 5248.44 MHz).

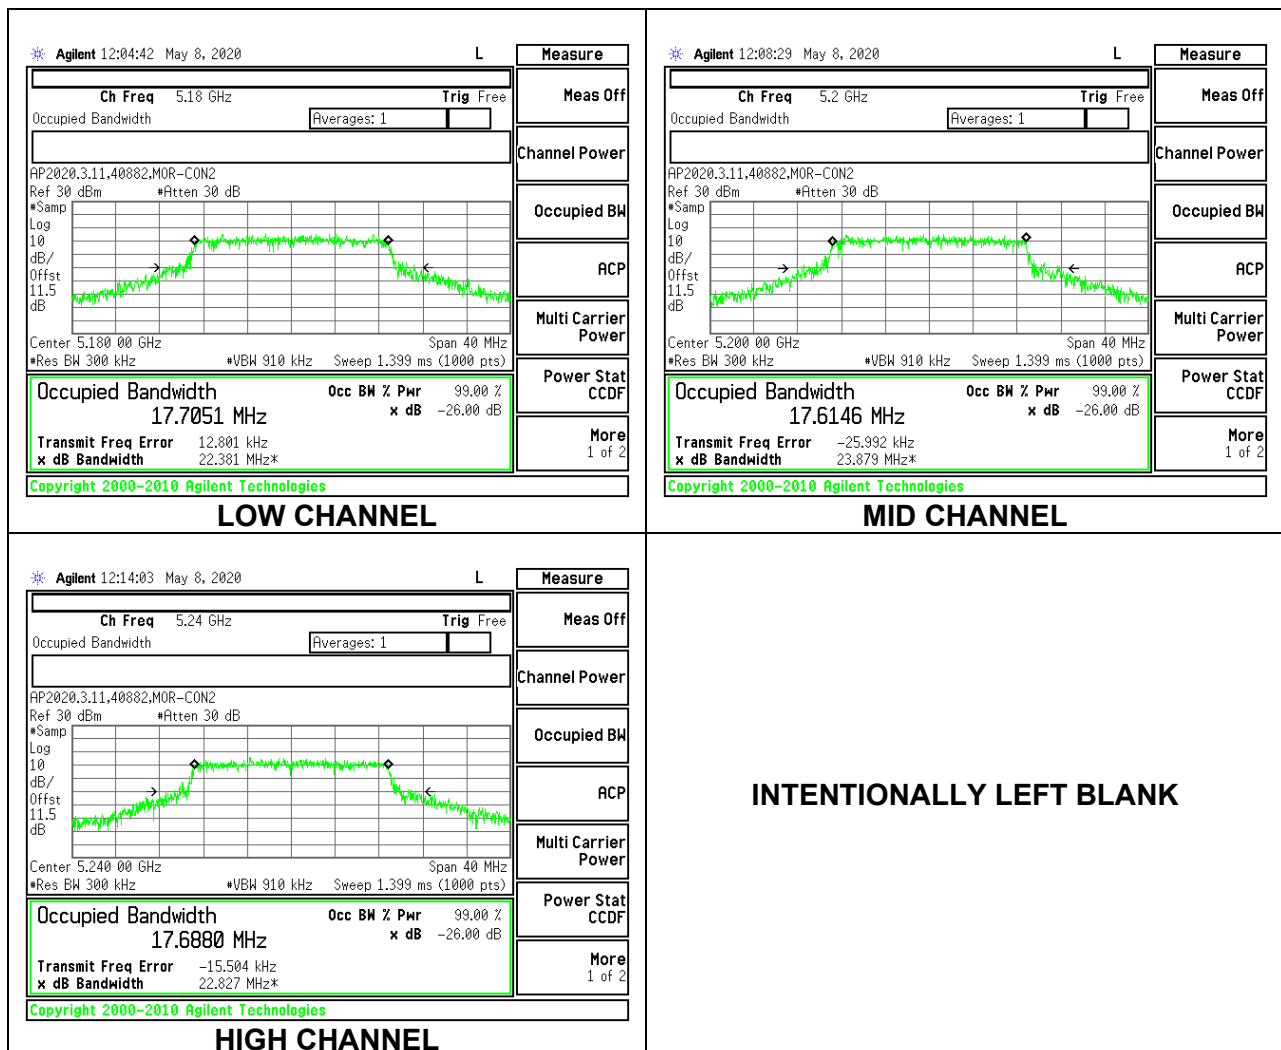


9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE

Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5190	36.4190
High	5230	36.3400

Note – The occupied bandwidth of the above channels do not fall into the 5.3 GHz band
(5230MHz+36.34MHz/2 = 5248.17 MHz).

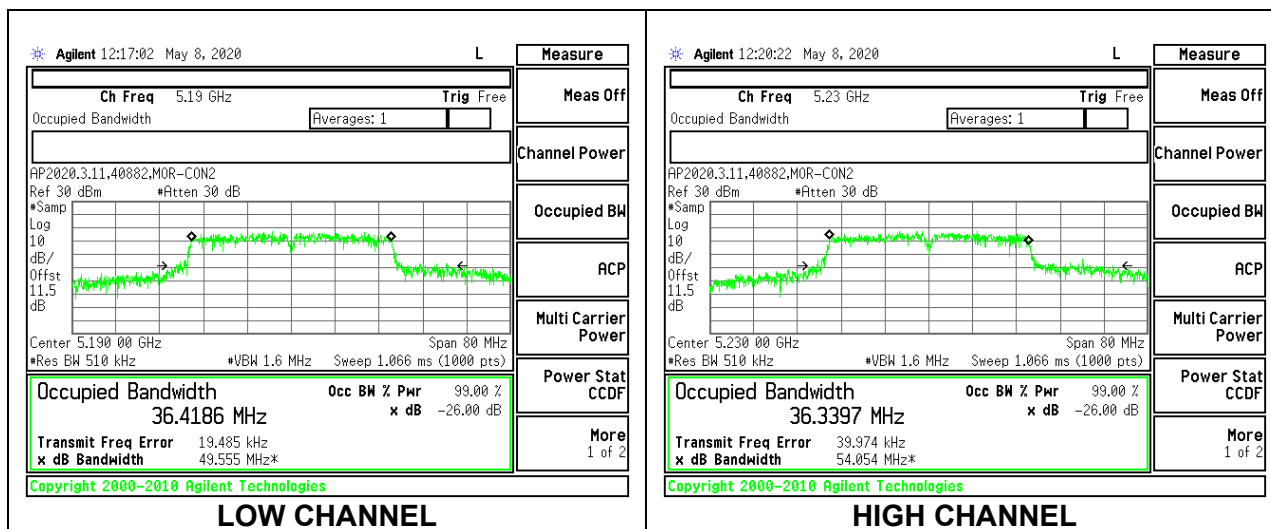


9.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE

Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Mid	5210	75.9150


Note – The occupied bandwidth of the above channels do not fall into the 5.3 GHz band (5210MHz+75.915MHz/2 = 5247.96 MHz).

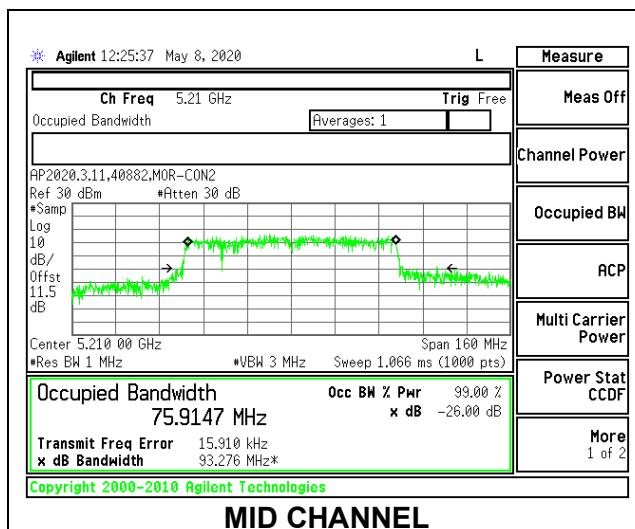

9.3.5. 802.11a MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.6243
Mid	5300	16.6284
High	5320	16.7284

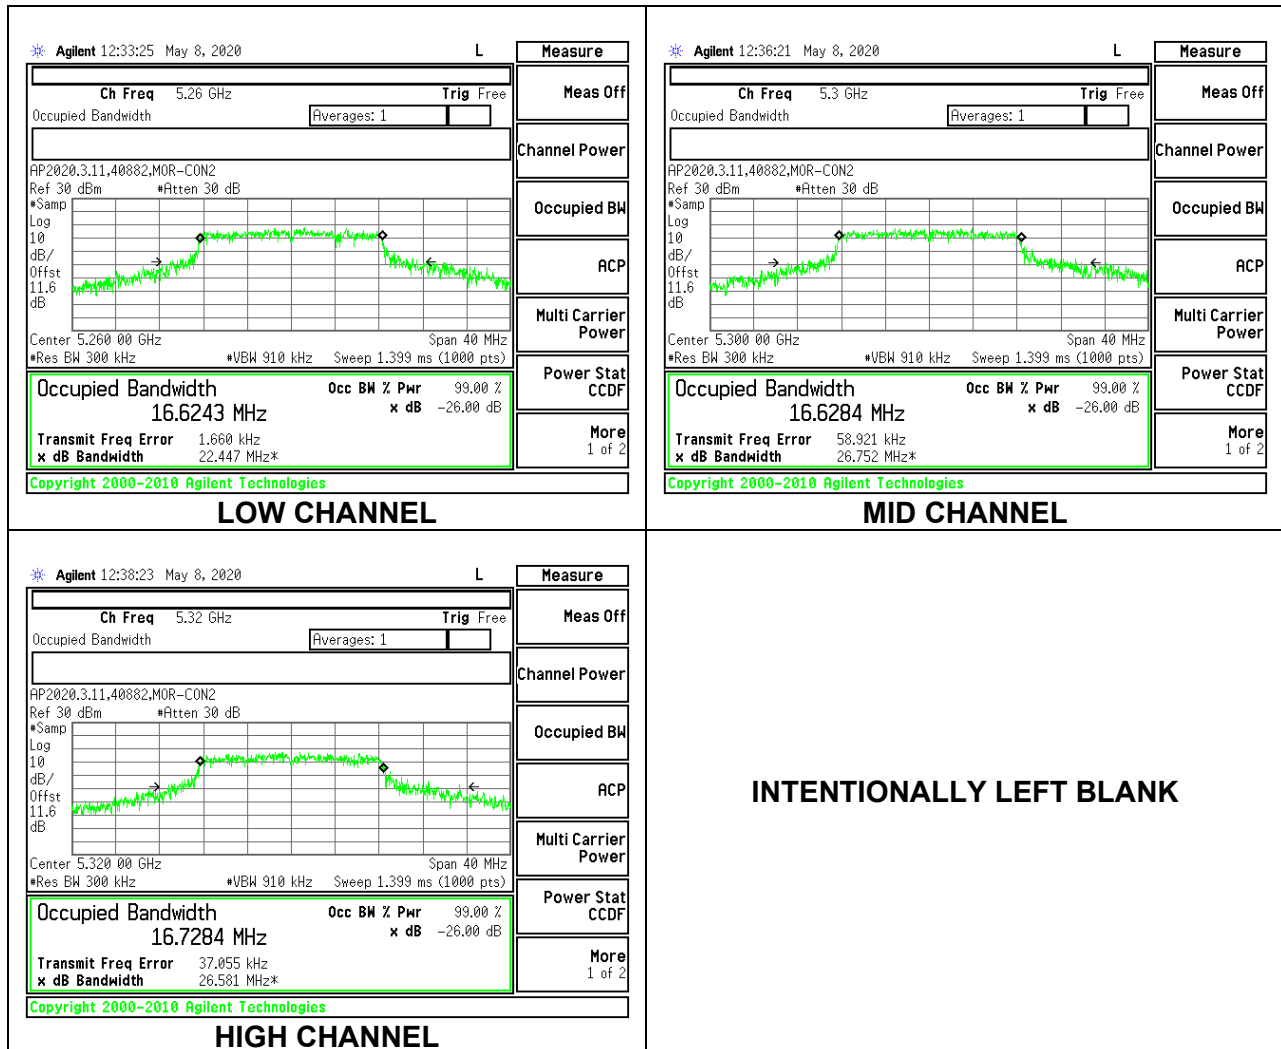

9.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5260	17.7380
Mid	5300	17.8370
High	5320	17.7420

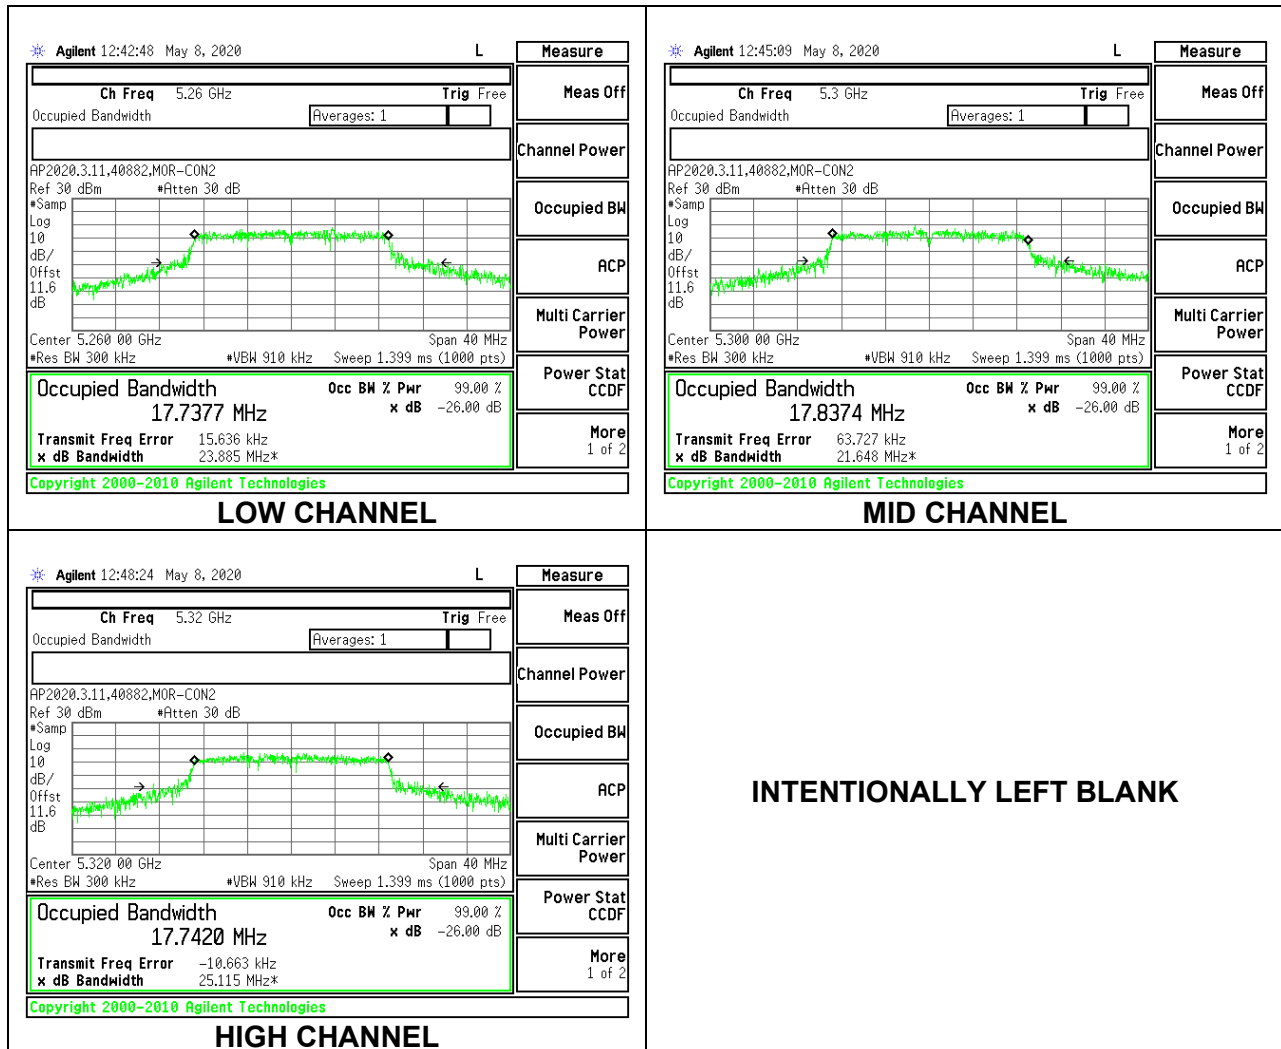

9.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5270	36.0360
High	5310	36.2840

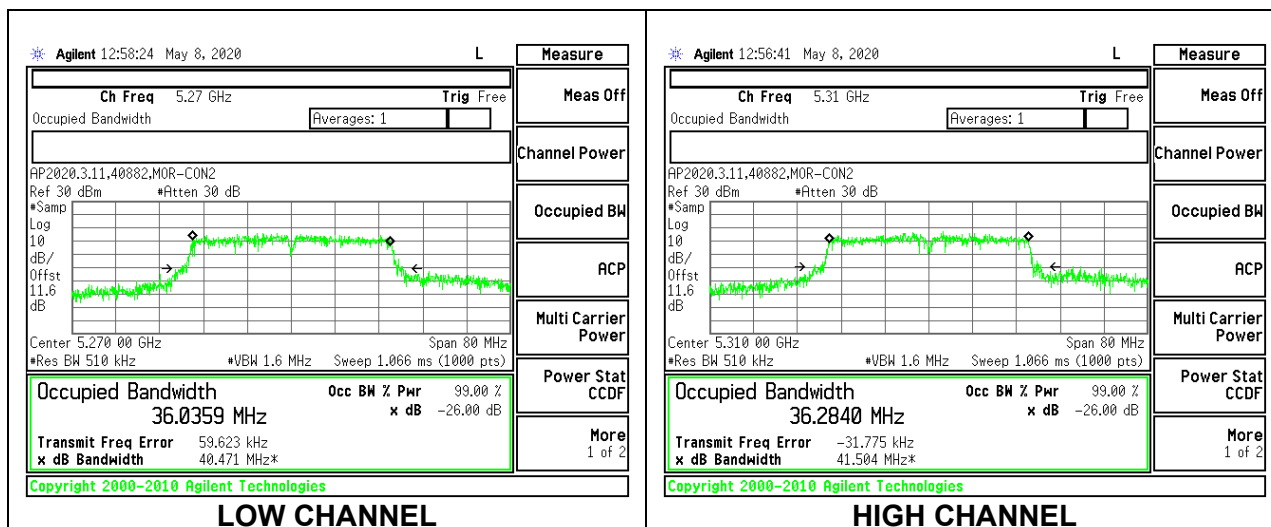

9.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Mid	5290	75.7930

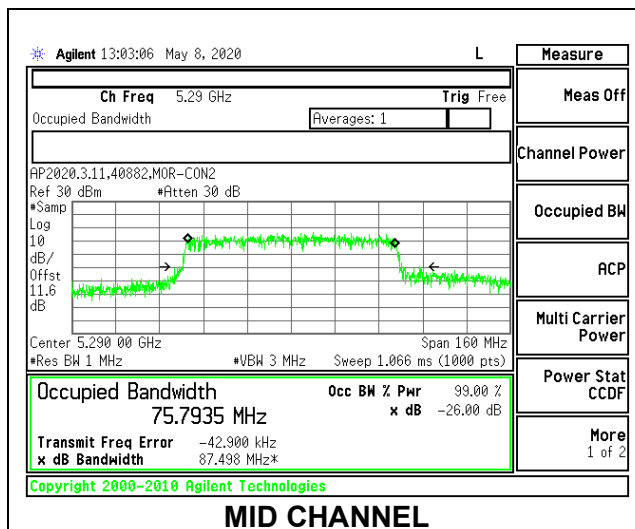

9.3.9. 802.11a MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5500	16.5630
Mid	5580	16.6090
High	5700	16.5830

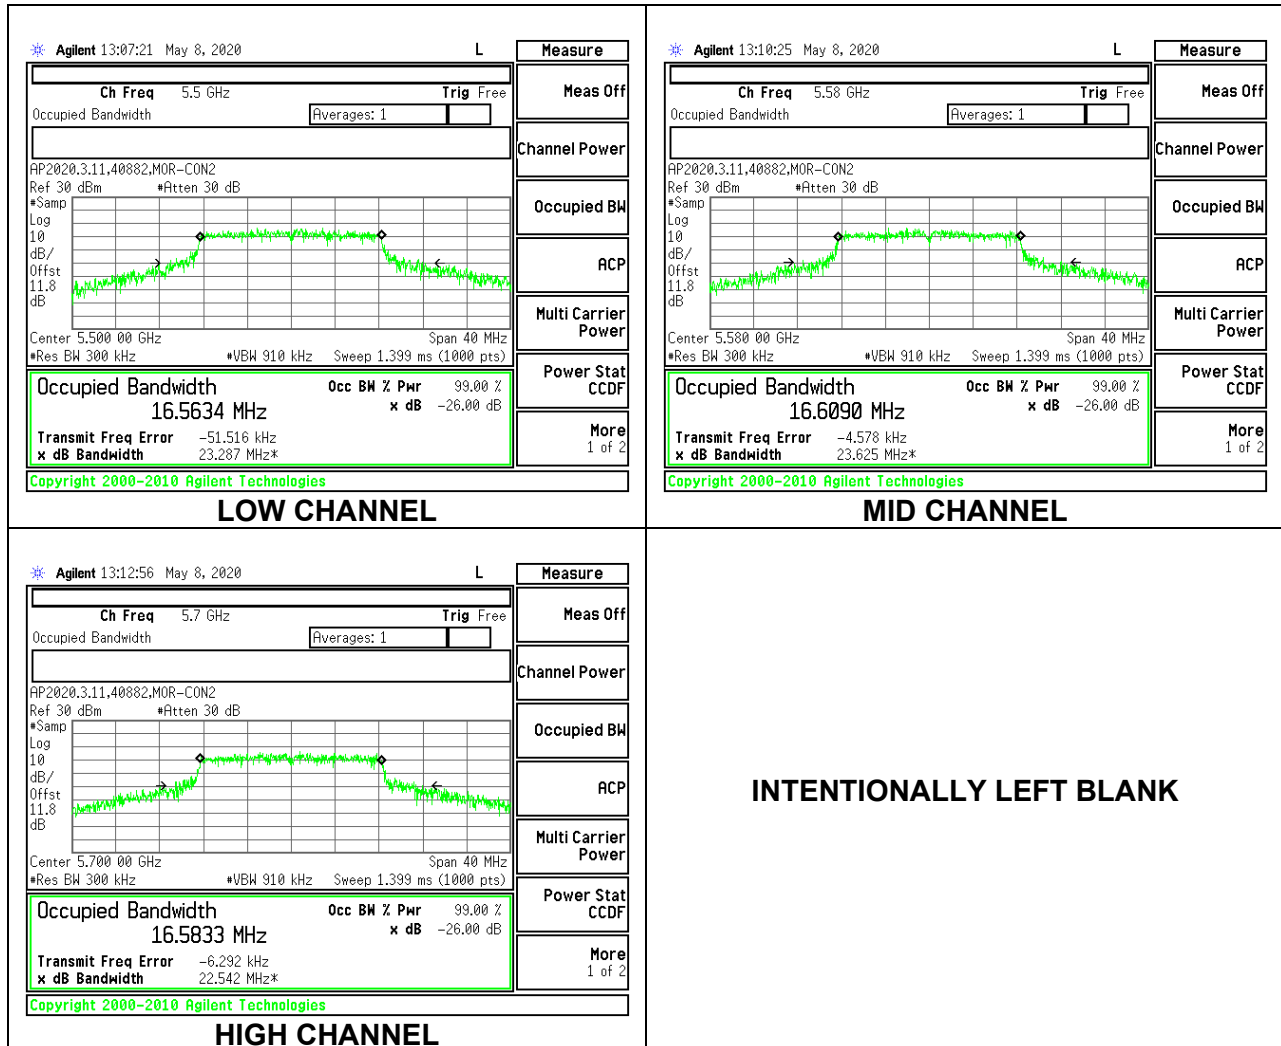

9.3.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5500	17.6990
Mid	5580	17.7550
High	5700	17.7880

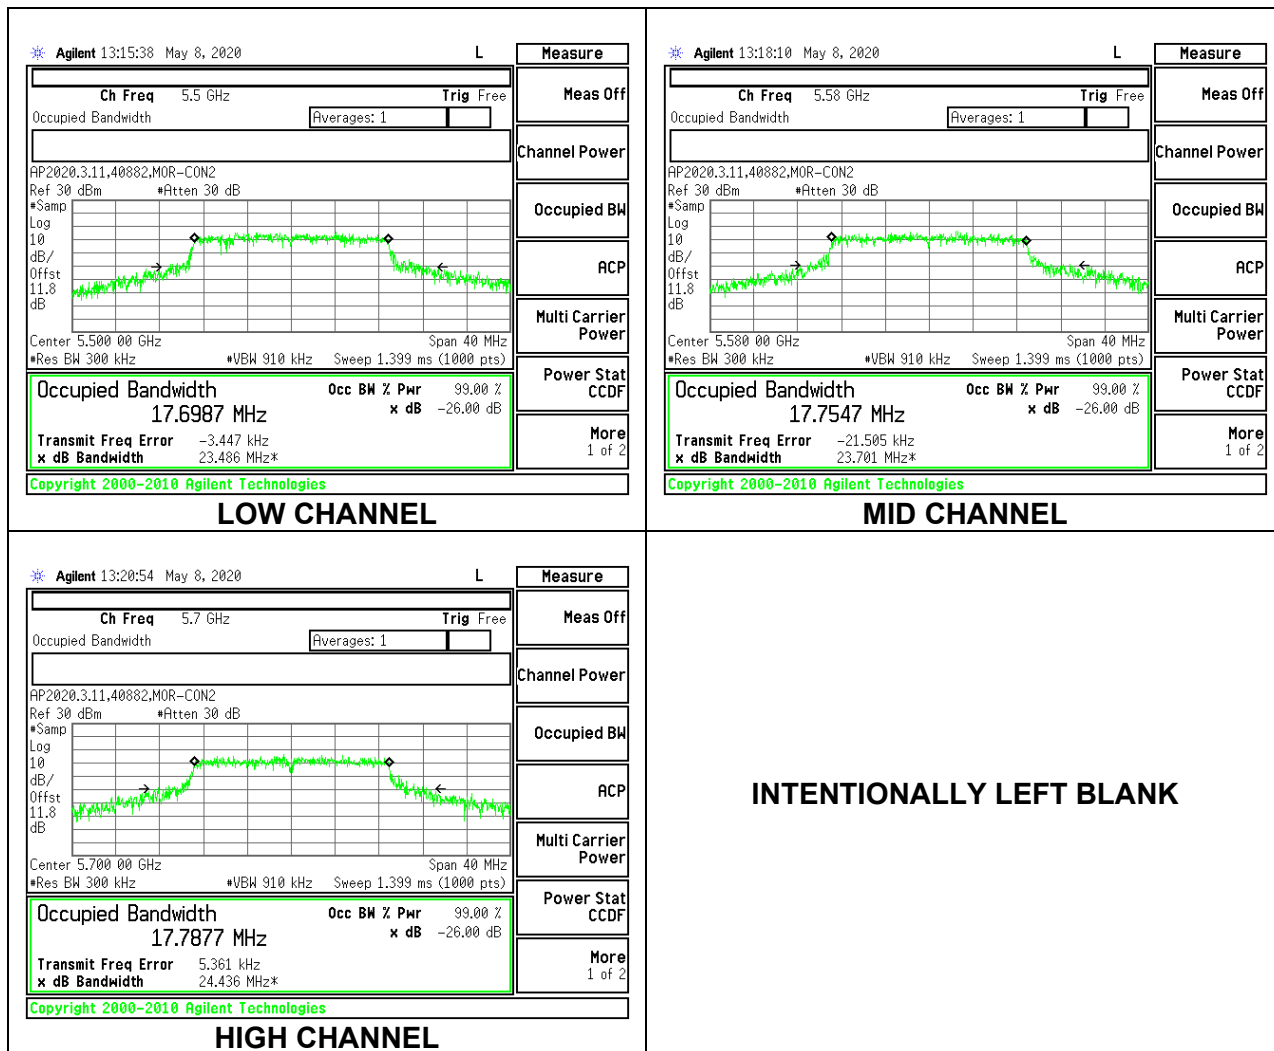

9.3.11. 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5510	36.1950
Mid	5550	36.1450
High	5670	36.1300

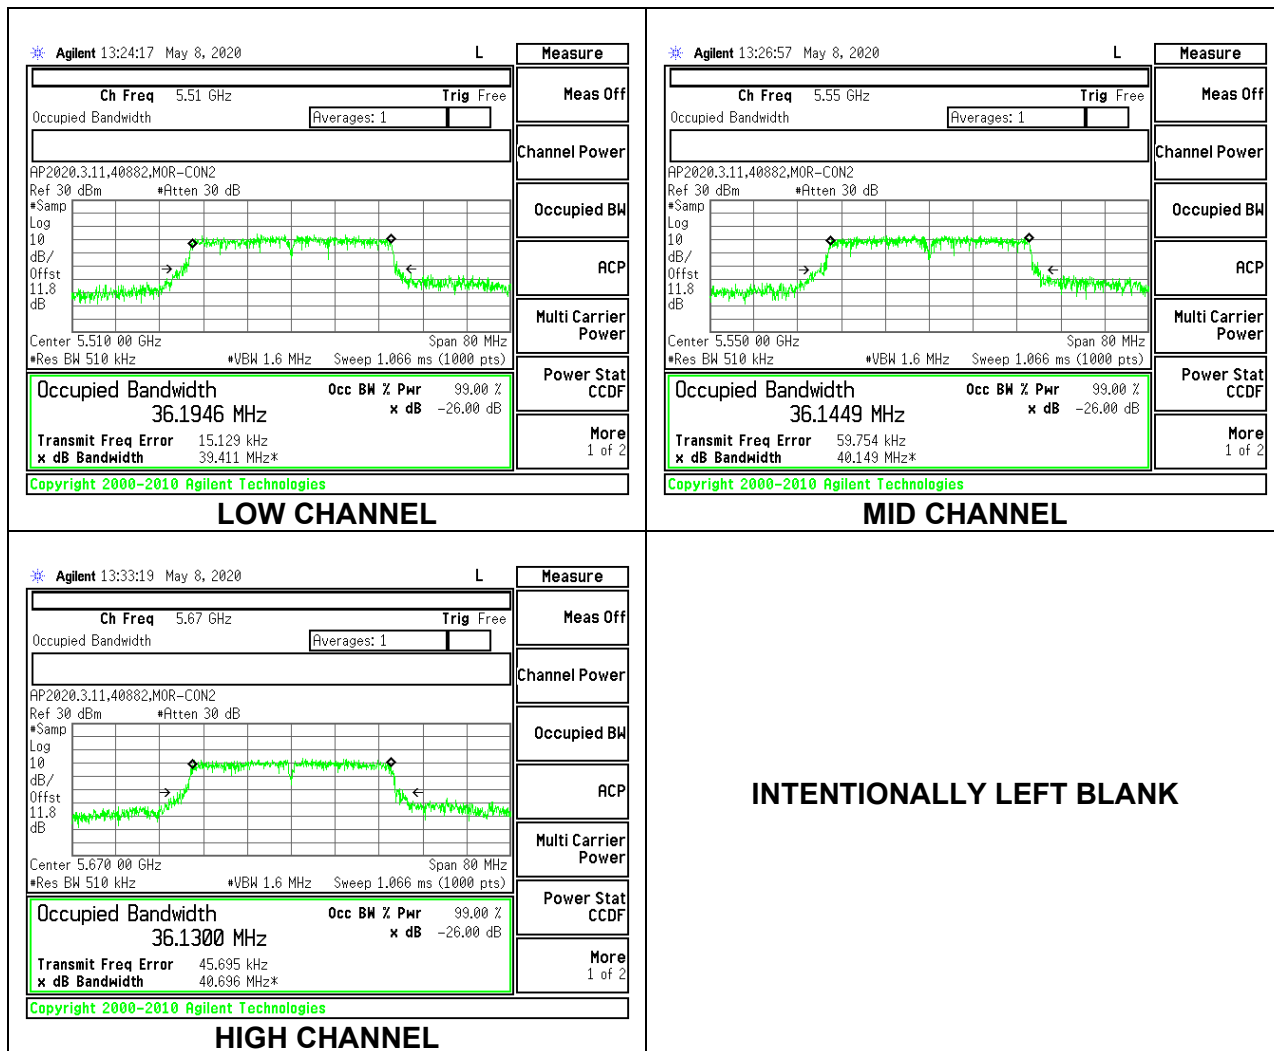

9.3.12. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5530	75.8430
High	5610	75.3550

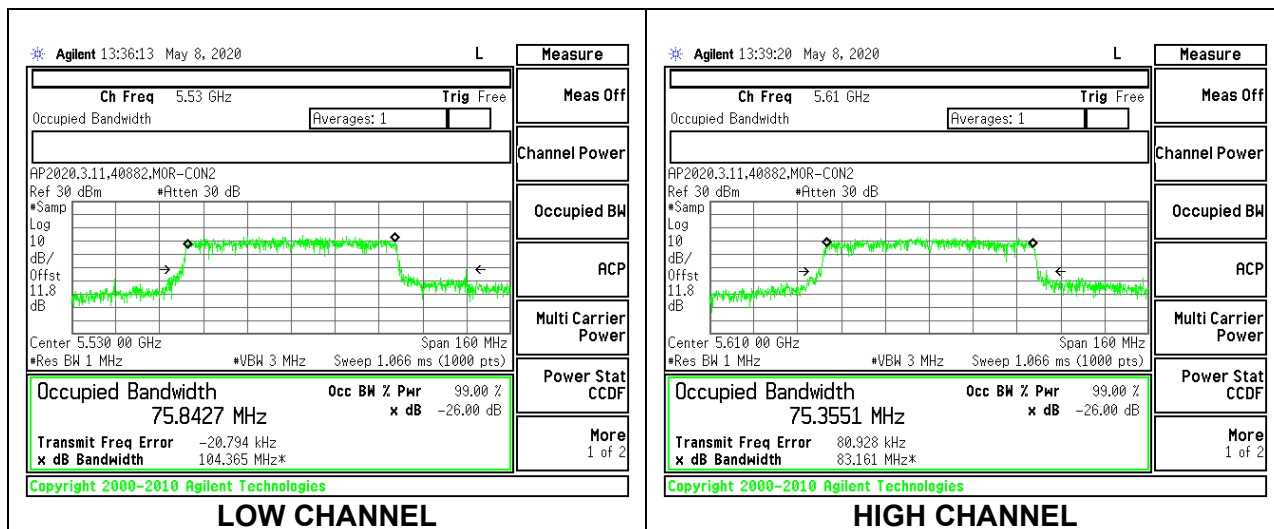

9.3.13. 802.11a MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5745	16.5560
Mid	5785	16.5540
High	5825	16.6230

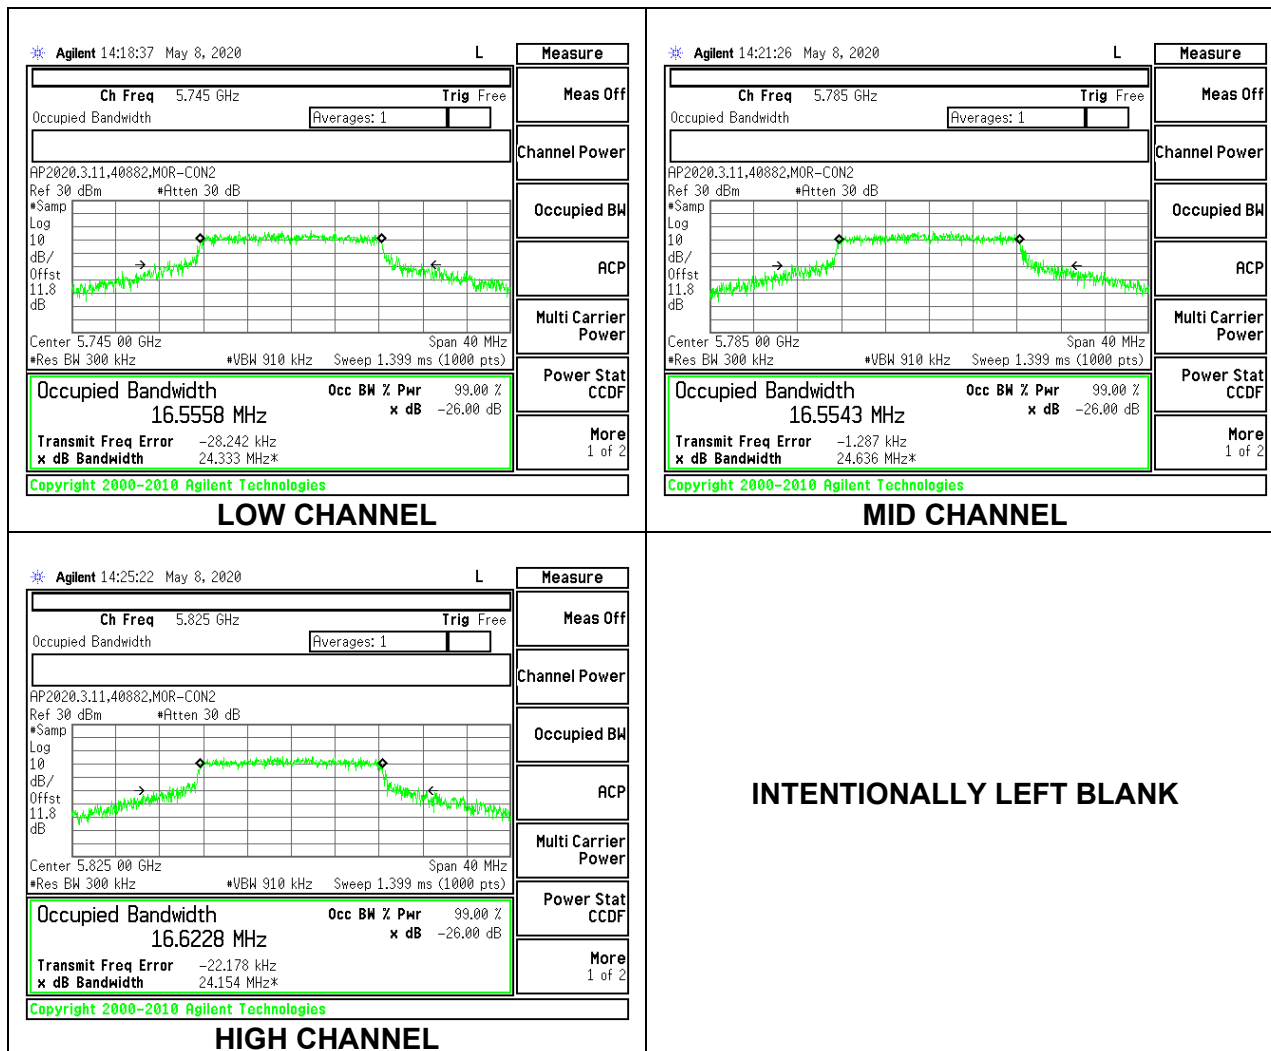

9.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5745	17.8390
Mid	5785	17.7220
High	5825	17.7690

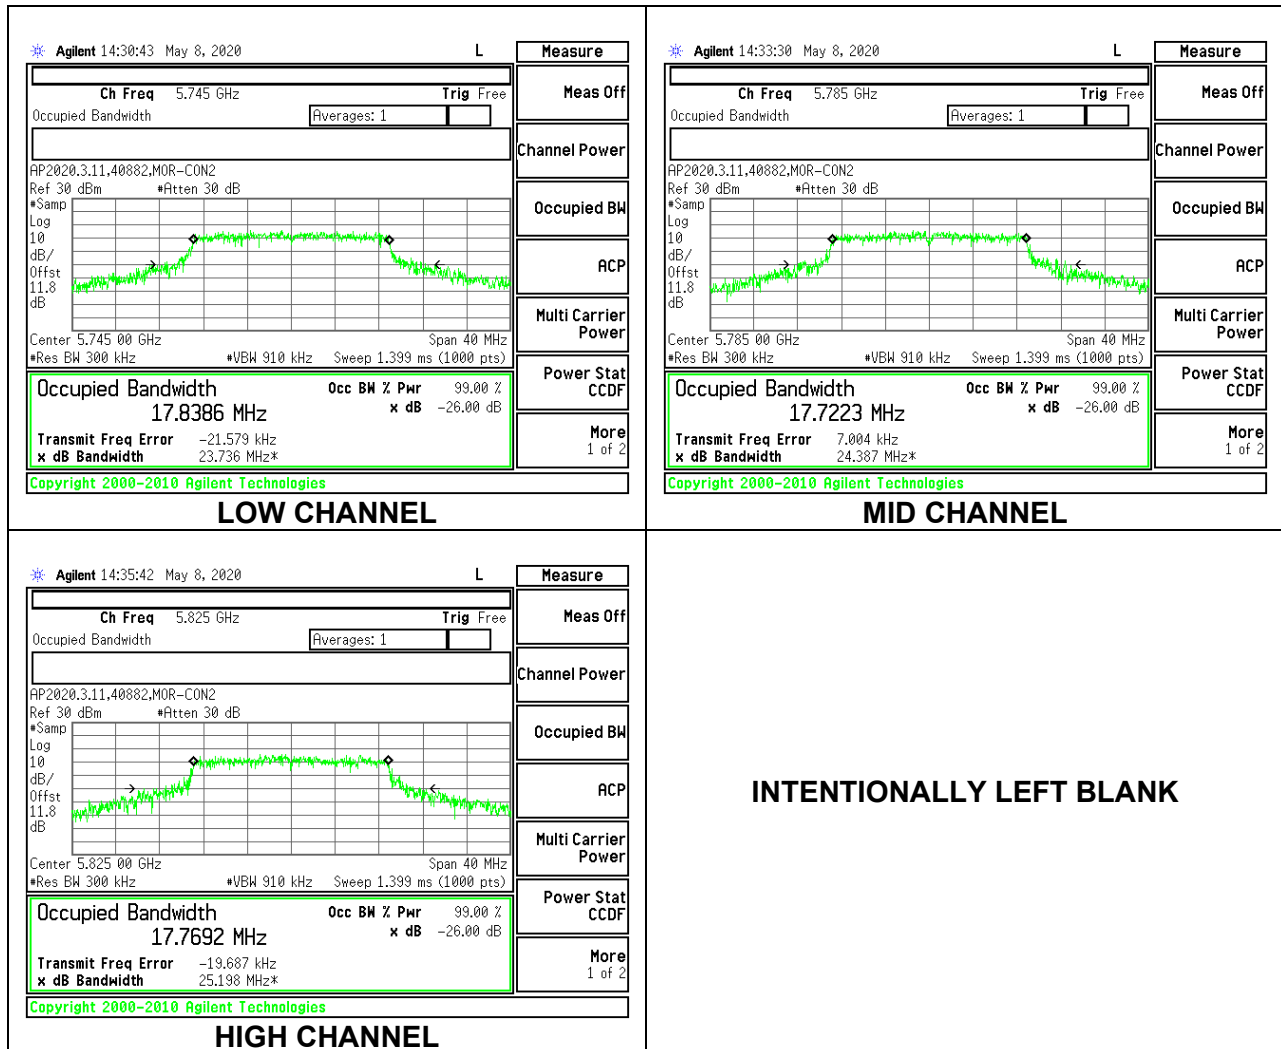

9.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Low	5755	36.3080
High	5795	36.2200

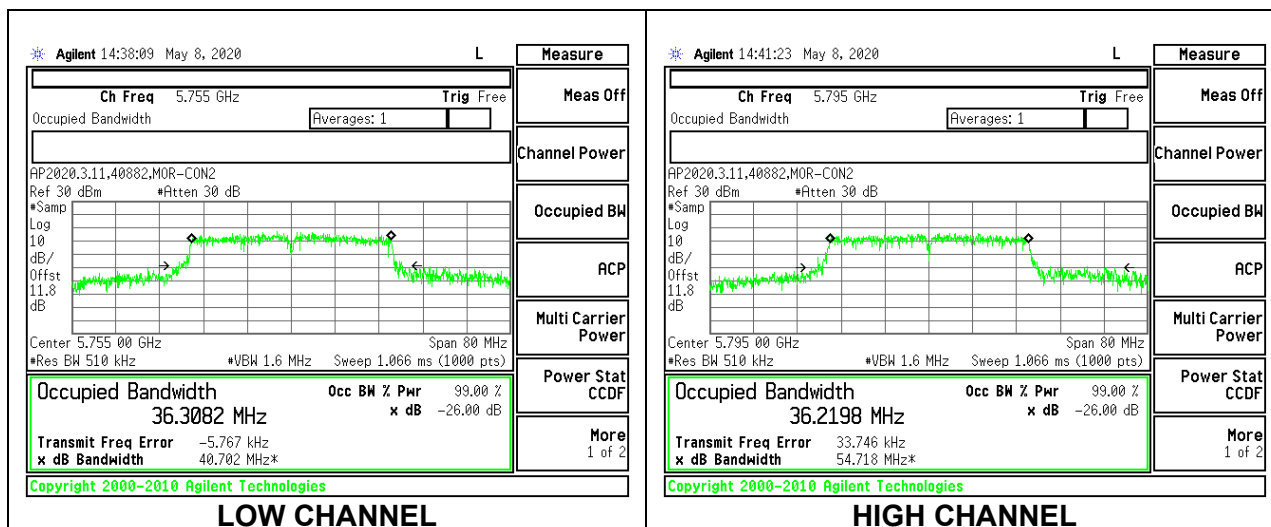

9.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE

Channel	Frequency	99% Bandwidth
	(MHz)	(MHz)
Mid	5775	75.7710

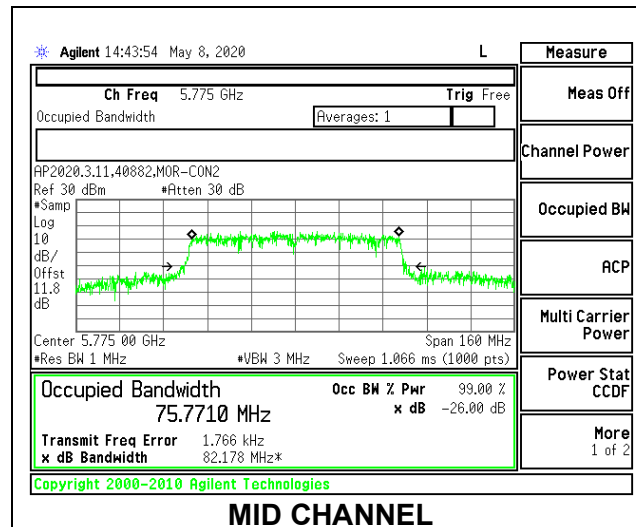

9.4. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)
RSS-247 6.2.4.1


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

9.4.1. 802.11a MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	6 dB Bandwidth	Minimum Limit
	(MHz)	(MHz)	(MHz)
Low	5745	16.1580	0.5
Mid	5785	16.4330	0.5
High	5825	15.0290	0.5

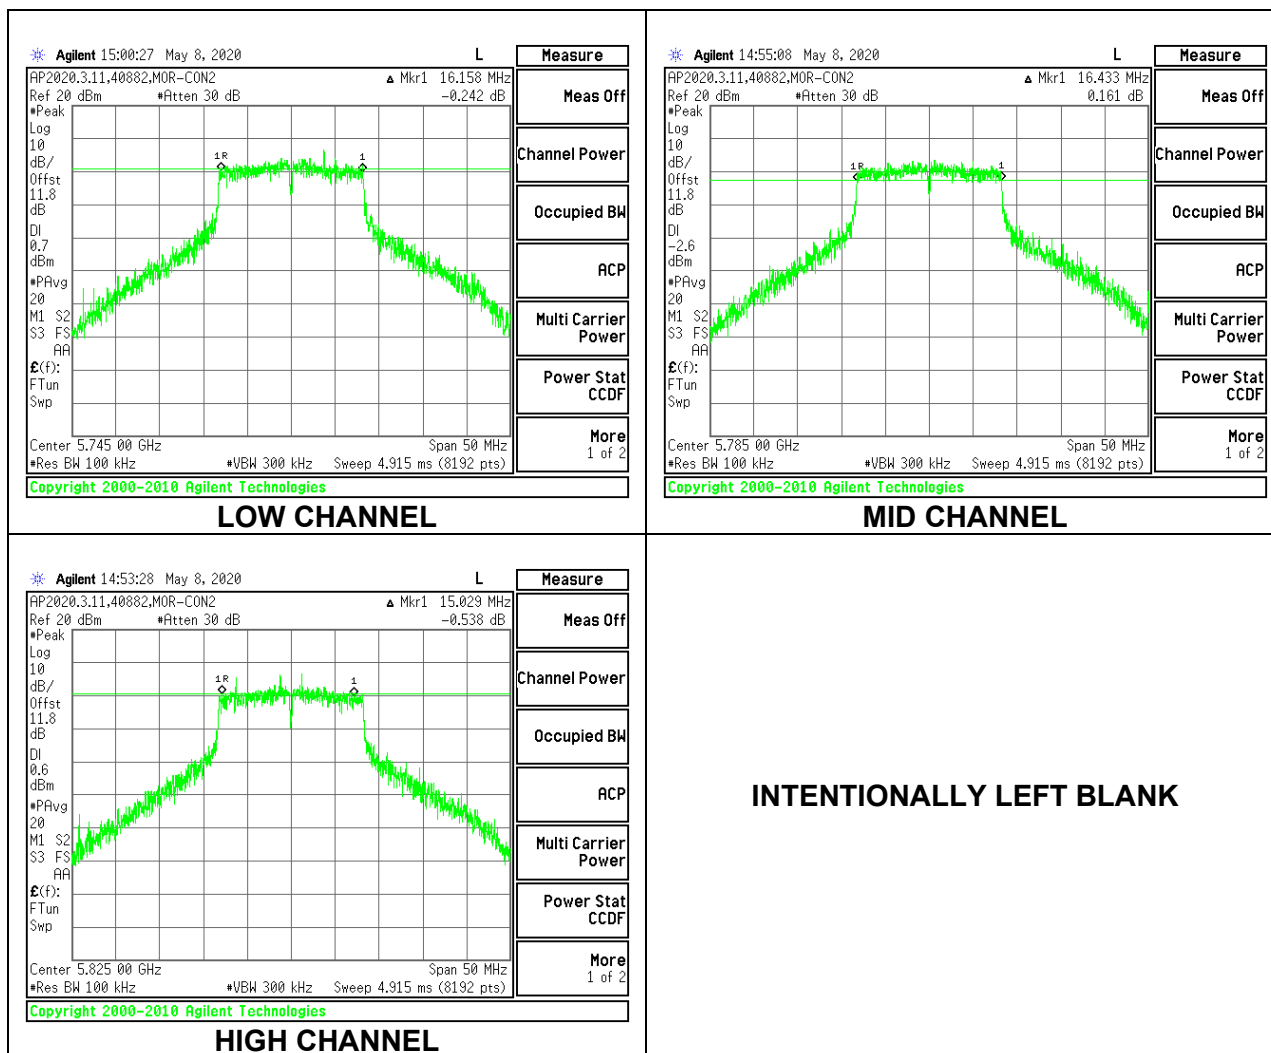


9.4.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	16.3110	0.5
Mid	5785	16.0300	0.5
High	5825	17.6540	0.5

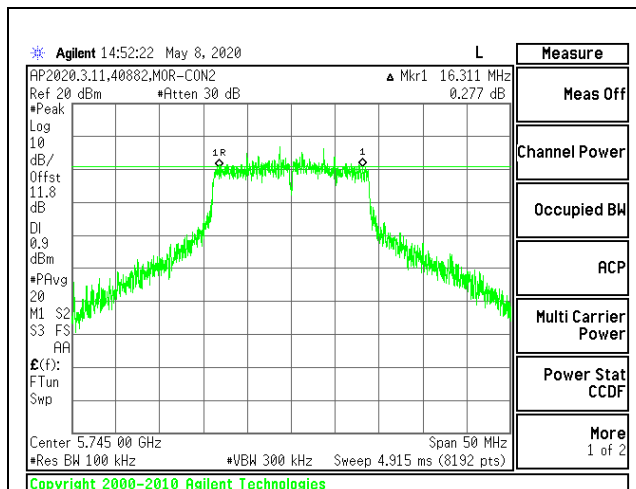

LOW CHANNEL

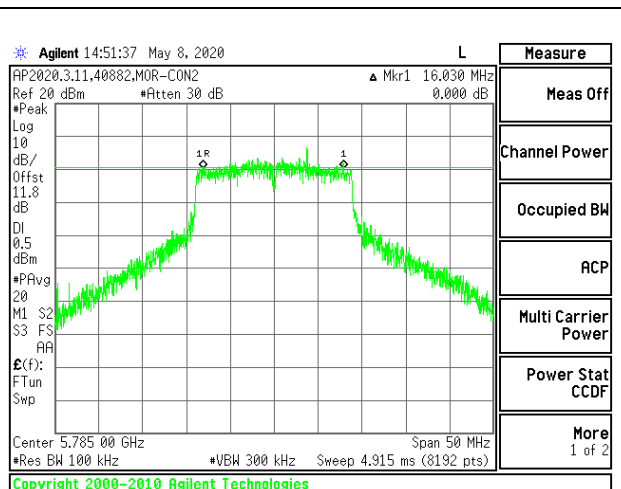

MID CHANNEL

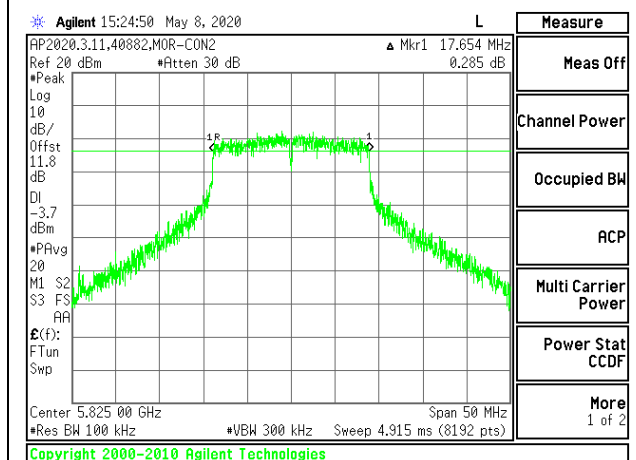


HIGH CHANNEL

INTENTIONALLY LEFT BLANK

9.4.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE


Channel	Frequency	6 dB Bandwidth	Minimum Limit
	(MHz)	(MHz)	(MHz)
Low	5755	35.7340	0.5
High	5795	36.0520	0.5

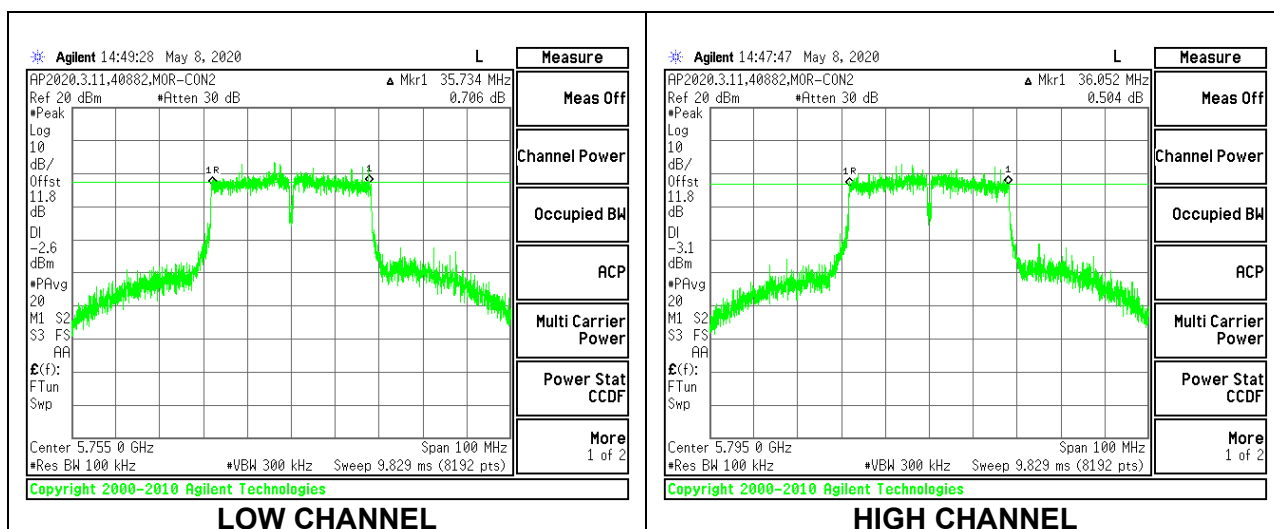

9.4.4. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE

Channel	Frequency	6 dB Bandwidth	Minimum Limit
	(MHz)	(MHz)	(MHz)
Mid	5775	75.1310	0.5

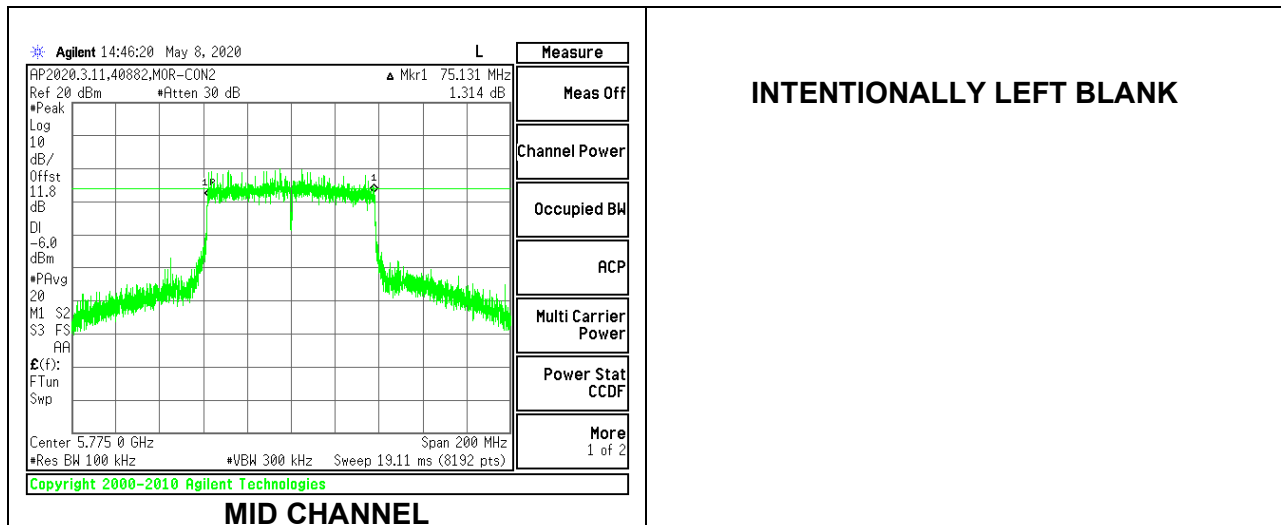

9.5. OUTPUT POWER AND PSD

LIMITS

FCC §15.407

Band 5.15–5.25 GHz

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Bands 5.25-5.35 GHz and 5.47-5.725 GHz

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Band 5.725-5.85 GHz

The maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

RSS-247

Band 5.15-5.25 GHz

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Band 5.25-5.35 GHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Bands 5.47-5.6 GHz and 5.65-5.725 GHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Band 5.725-5.85 GHz

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

TEST PROCEDURE

The measurement method used for output power is KDB 789033 D02 v02r01, Section E.3.b (Method PM-G).

The measurement method used for power spectral density is KDB 789033 D02 v02r01, Section F

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

9.5.1. RESULTS – PCB Antenna

Note – For the 5.3 and 5.6 GHz bands, the EUT EIRP value is less than 500 mW (27 dBm) and therefore does not require TPC.

9.5.2. 802.11a MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5180	4.31	24.00	11.00
Mid	5200	4.31	24.00	11.00
High	5240	4.31	24.00	11.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.580	12.58	24.00	-11.42
Mid	5200	12.620	12.62	24.00	-11.38
High	5240	12.760	12.76	24.00	-11.24

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5180	2.61	2.72	11.00	-8.28
Mid	5200	2.61	2.72	11.00	-8.28
High	5240	3.33	3.44	11.00	-7.56

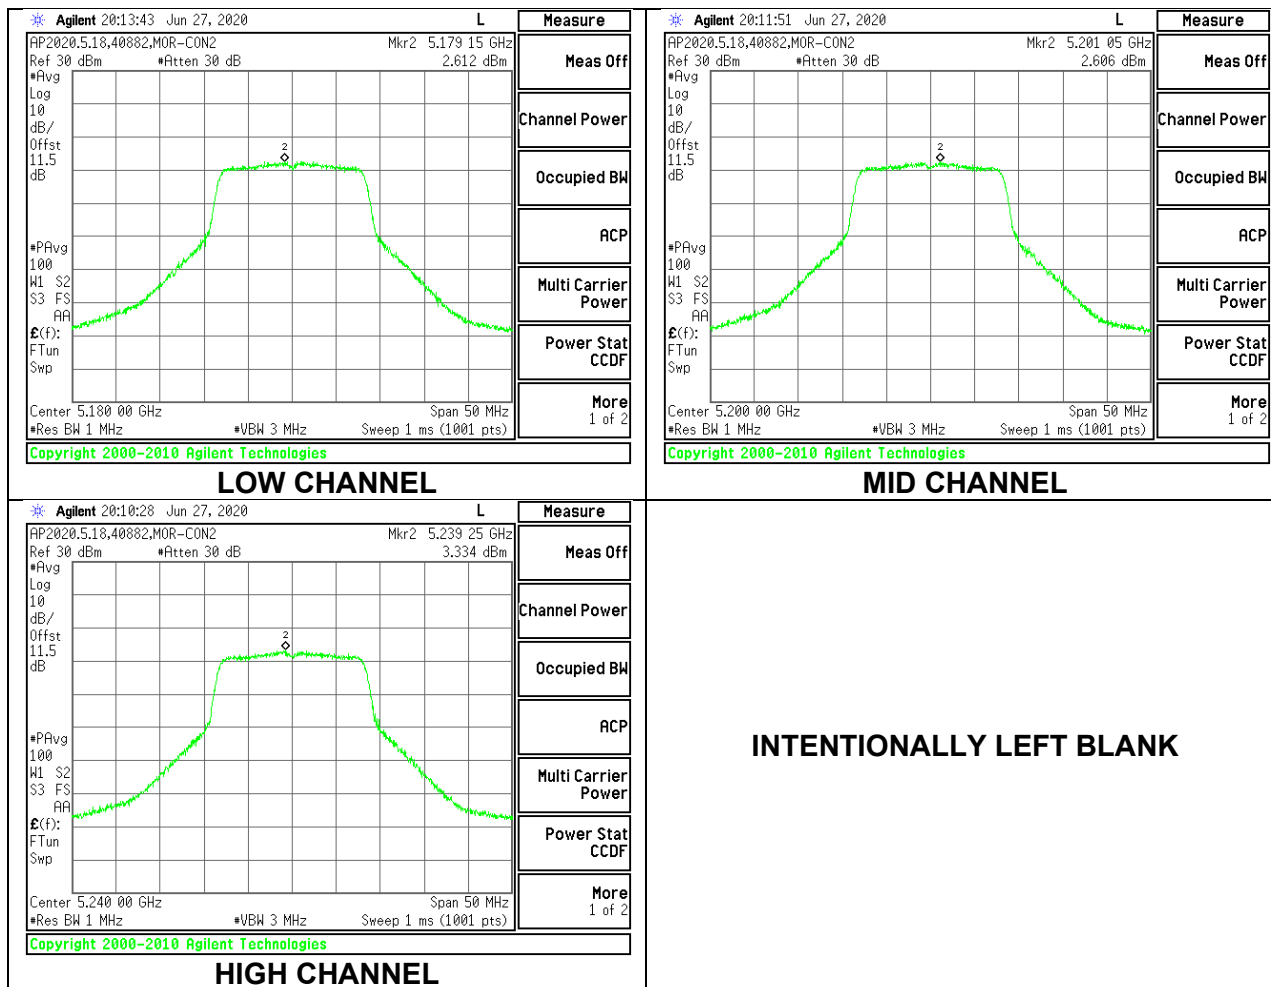

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5180	16.440	4.31	22.16	17.85	10.00	5.69
Mid	5200	16.536	4.31	22.18	17.87	10.00	5.69
High	5240	16.522	4.31	22.18	17.87	10.00	5.69


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.580	12.58	17.85	-5.27
Mid	5200	12.620	12.62	17.87	-5.25
High	5240	12.760	12.76	17.87	-5.11

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5180	2.612	2.72	5.69	-2.97
Mid	5200	2.606	2.72	5.69	-2.97
High	5240	3.334	3.44	5.69	-2.25

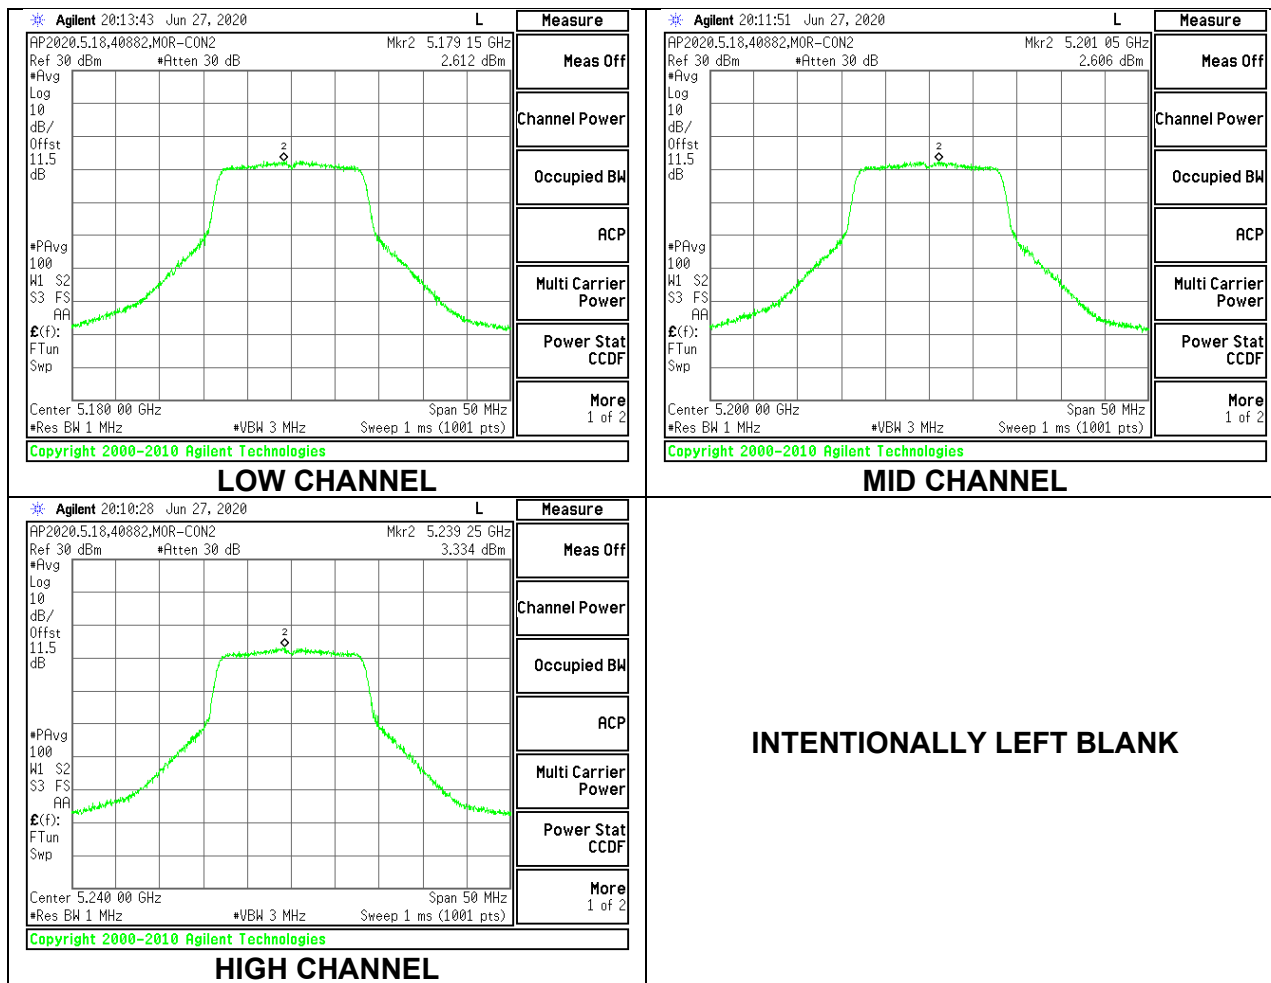

9.5.3. 802.11n HT20 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-11

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5180	4.31	24.00	11.00
Mid	5200	4.31	24.00	11.00
High	5240	4.31	24.00	11.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.270	11.27	24.00	-12.73
Mid	5200	12.540	12.54	24.00	-11.46
High	5240	12.860	12.86	24.00	-11.14

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	2.216	2.34	11.00	-8.66
Mid	5200	2.404	2.52	11.00	-8.48
High	5240	3.068	3.19	11.00	-7.81

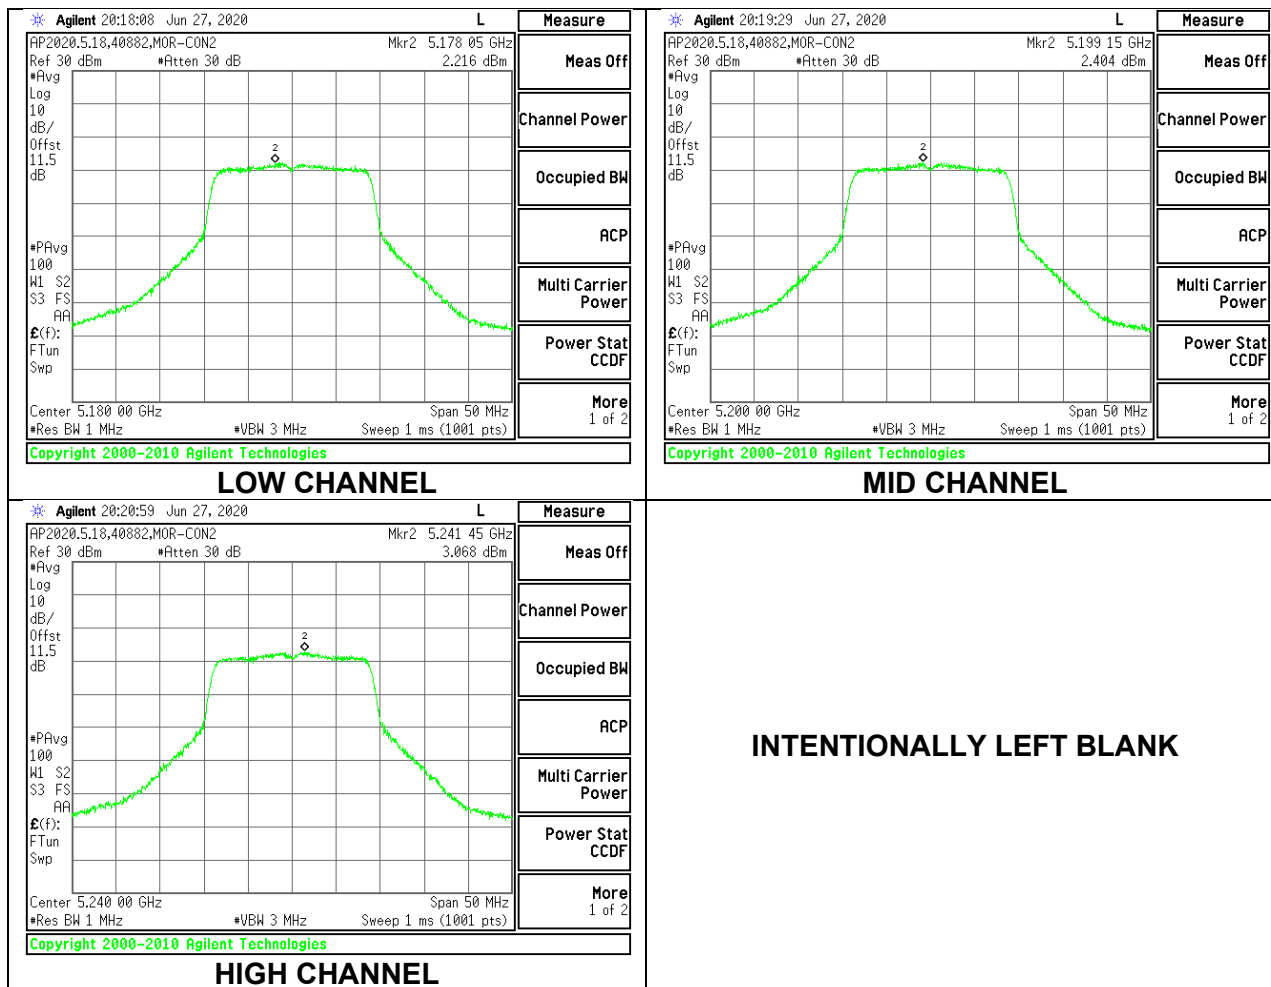

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	17.705	4.31	22.48	18.17	10.00	5.69
Mid	5200	17.615	4.31	22.46	18.15	10.00	5.69
High	5240	17.688	4.31	22.48	18.17	10.00	5.69


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.270	11.27	18.17	-6.90
Mid	5200	12.540	12.54	18.15	-5.61
High	5240	12.860	12.86	18.17	-5.31

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	2.216	2.34	5.69	-3.35
Mid	5200	2.404	2.52	5.69	-3.17
High	5240	3.068	3.19	5.69	-2.50

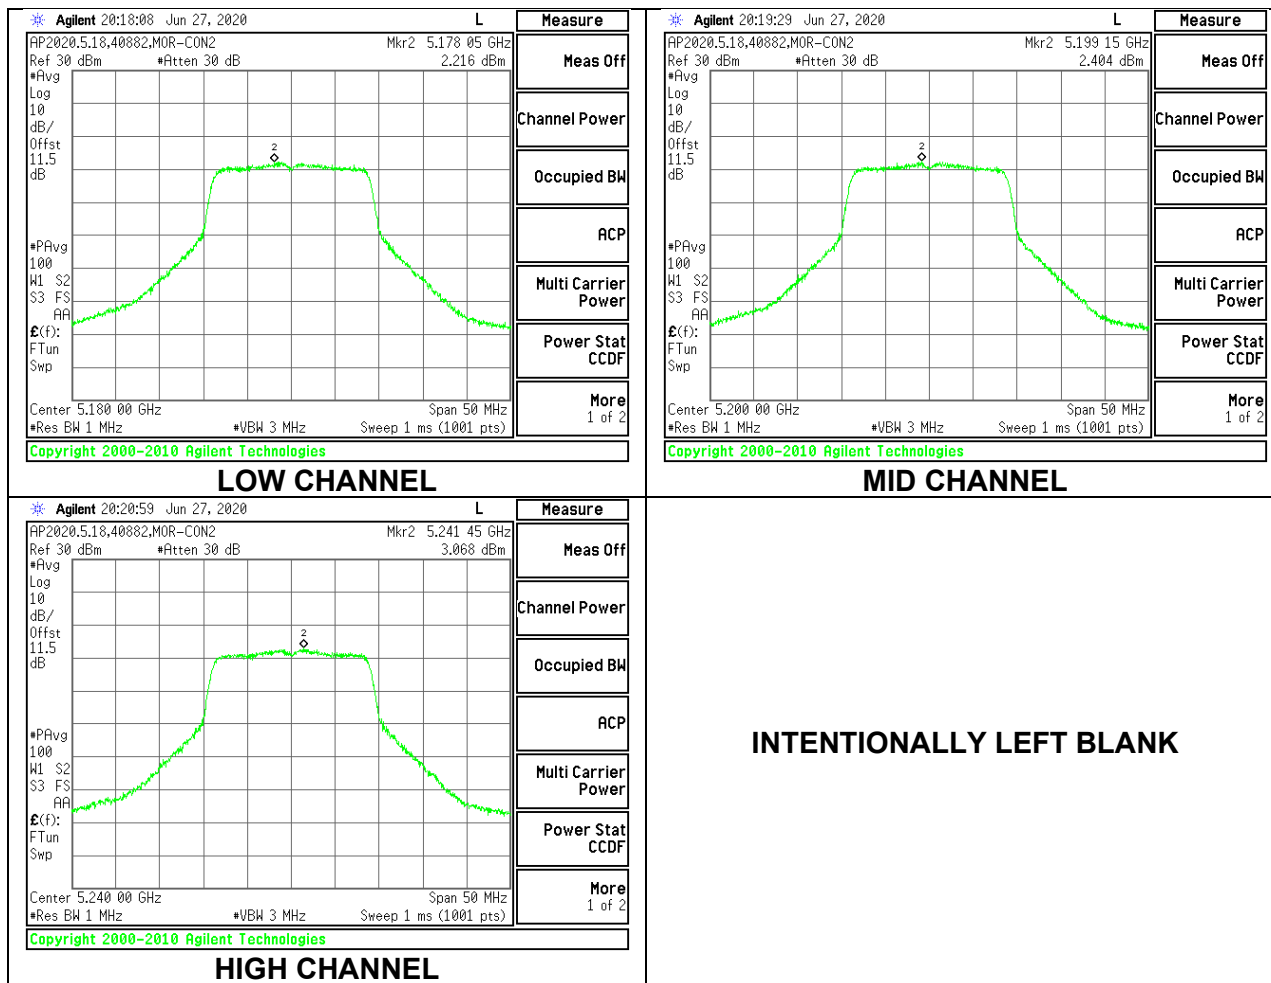

9.5.4. 802.11n HT40 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-06-27

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5190	4.31	24.00	11.00
High	5230	4.31	24.00	11.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.23	11.23	24.00	-12.77
High	5230	11.79	11.79	24.00	-12.21

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	2.560	2.79	11.00	-8.21
High	5230	2.972	3.20	11.00	-7.80

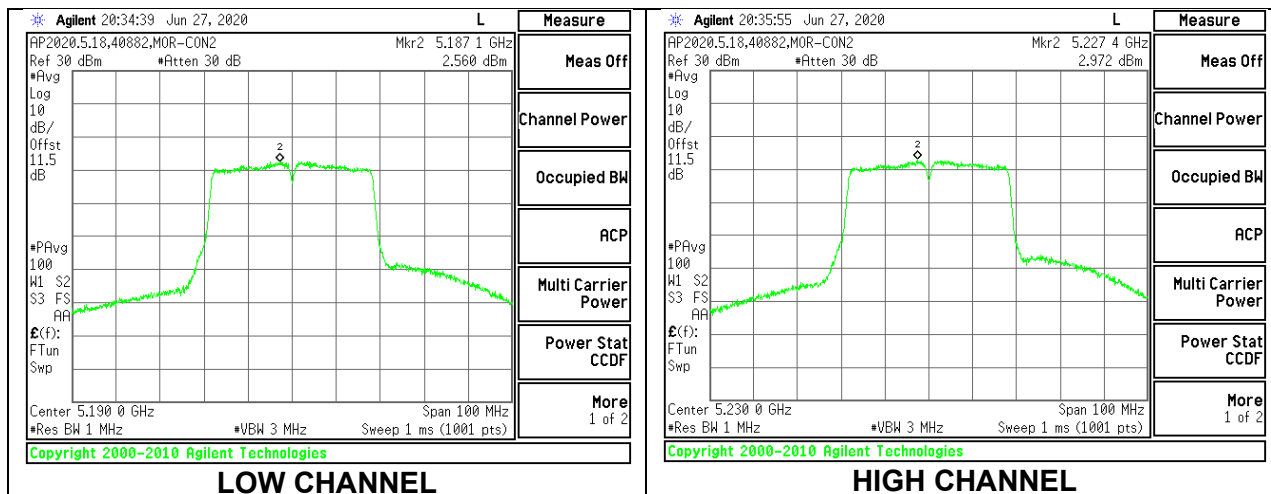

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-27

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	36.419	4.31	23.00	18.69	10.00	5.69
High	5230	36.340	4.31	23.00	18.69	10.00	5.69


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.23	11.23	18.69	-7.46
High	5230	11.79	11.79	18.69	-6.90

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	2.560	2.79	5.69	-2.90
High	5230	2.972	3.20	5.69	-2.49

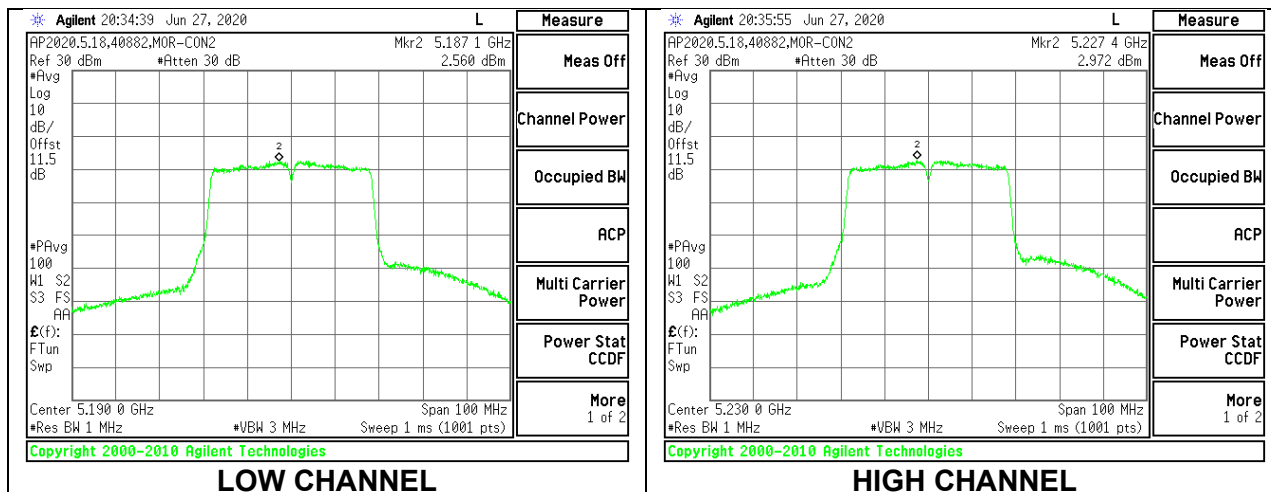

9.5.5. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

1TX PCB Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5210	4.31	24.00	11.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.80	11.80	24.00	-12.20

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-0.14	0.32	11.00	-10.68

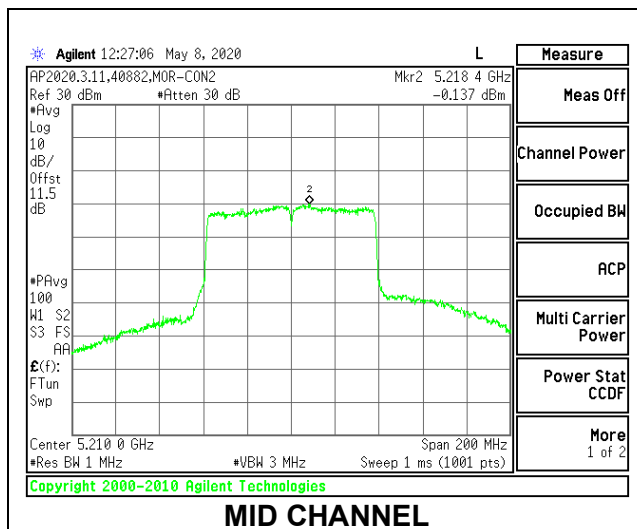

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	75.915	4.31	23.00	18.69	10.00	5.69


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.800	11.800	18.69	-6.89

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-0.137	0.32	5.69	-5.37

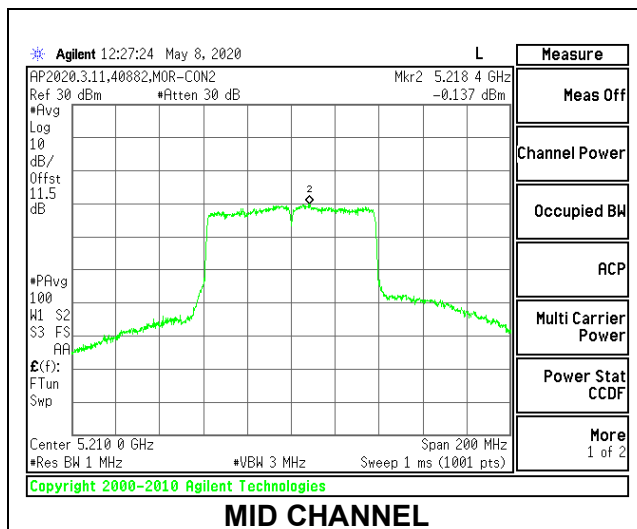

9.5.6. 802.11a MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	26.60	4.31	24.00	11.00
Mid	5300	28.25	4.31	24.00	11.00
High	5320	27.95	4.31	24.00	11.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.84	16.84	24.00	-7.16
Mid	5300	17.14	17.14	24.00	-6.86
High	5320	17.22	17.22	24.00	-6.78

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.841	6.95	11.00	-4.05
Mid	5300	7.436	7.55	11.00	-3.45
High	5320	7.023	7.13	11.00	-3.87

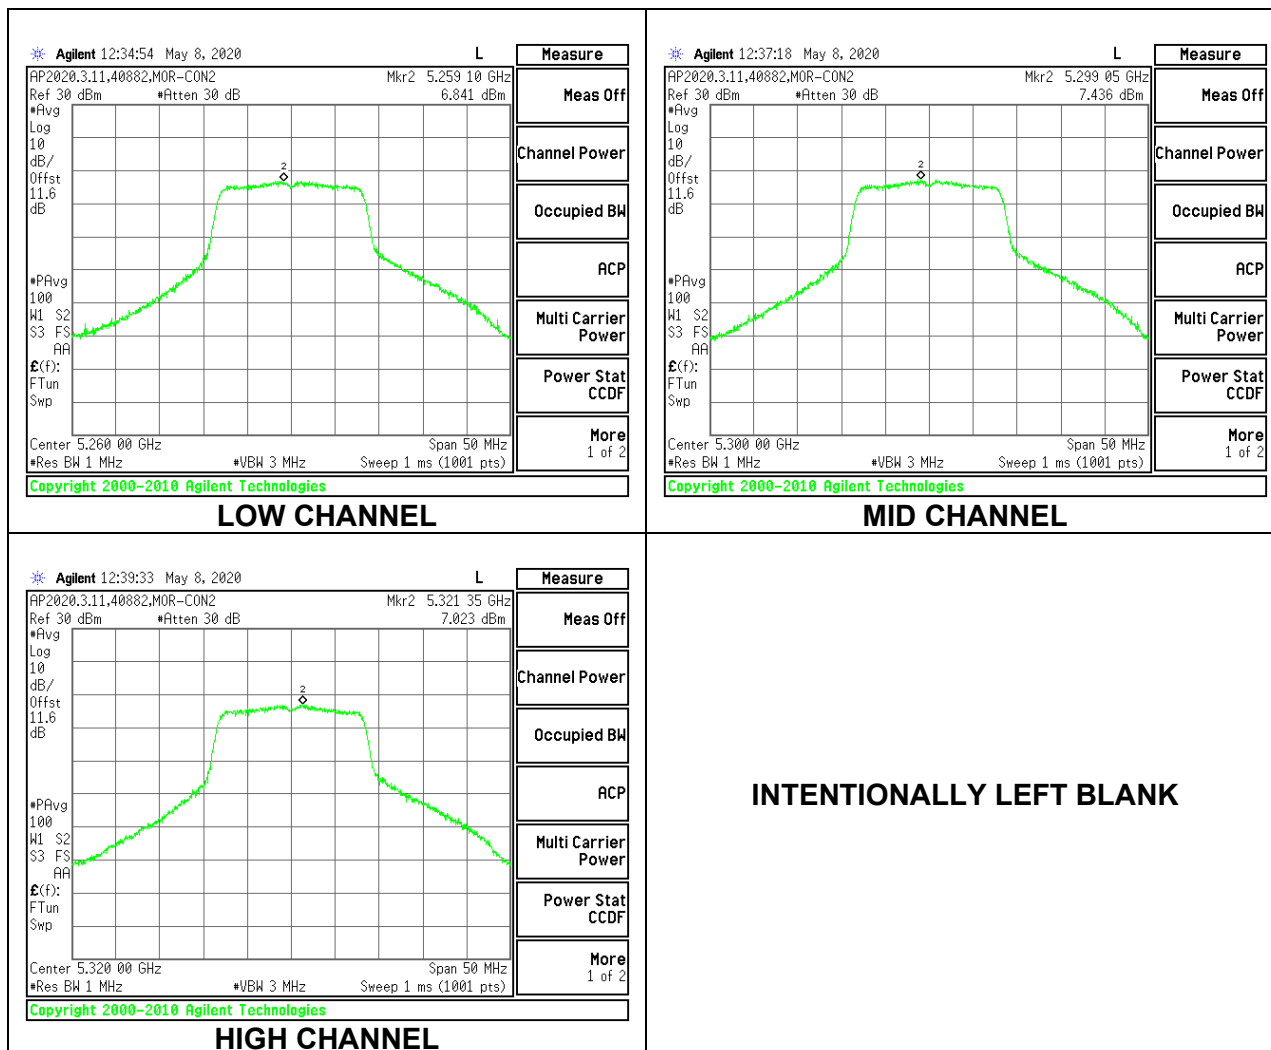

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	16.624	4.31	23.21	11.00
Mid	5300	16.628	4.31	23.21	11.00
High	5320	16.728	4.31	23.23	11.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.84	16.84	23.21	-6.37
Mid	5300	17.14	17.14	23.21	-6.07
High	5320	17.22	17.22	23.23	-6.01

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.841	6.95	11.00	-4.05
Mid	5300	7.436	7.55	11.00	-3.45
High	5320	7.023	7.13	11.00	-3.87

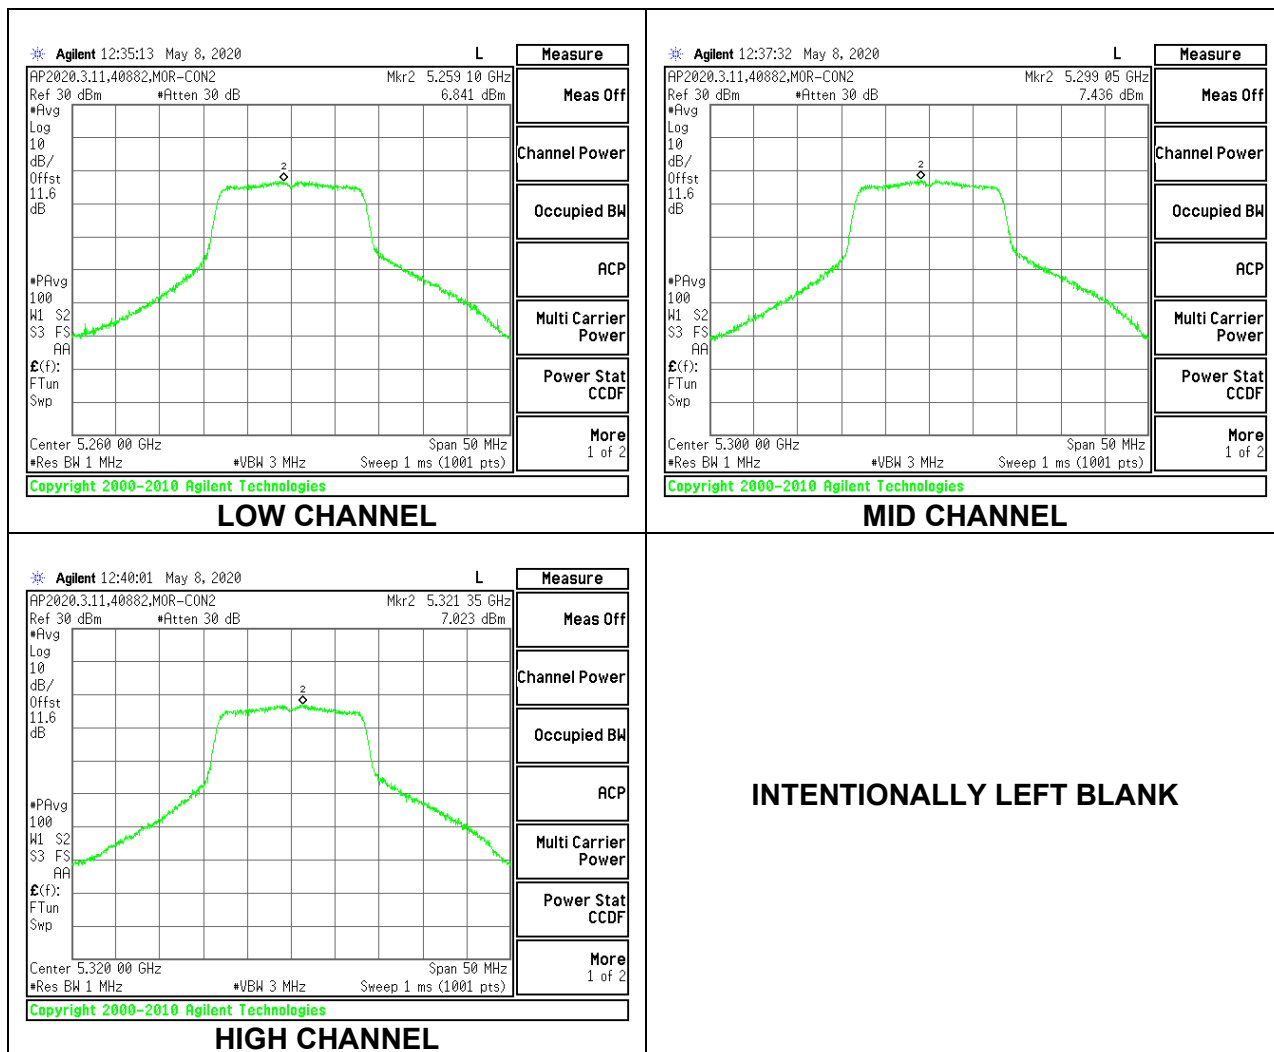

9.5.7. 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	26.95	4.31	24.00	11.00
Mid	5300	28.70	4.31	24.00	11.00
High	5320	28.55	4.31	24.00	11.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.77	16.77	24.00	-7.23
Mid	5300	17.12	17.12	24.00	-6.88
High	5320	16.97	16.97	24.00	-7.03

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.822	6.94	11.00	-4.06
Mid	5300	6.820	6.94	11.00	-4.06
High	5320	6.835	6.96	11.00	-4.05

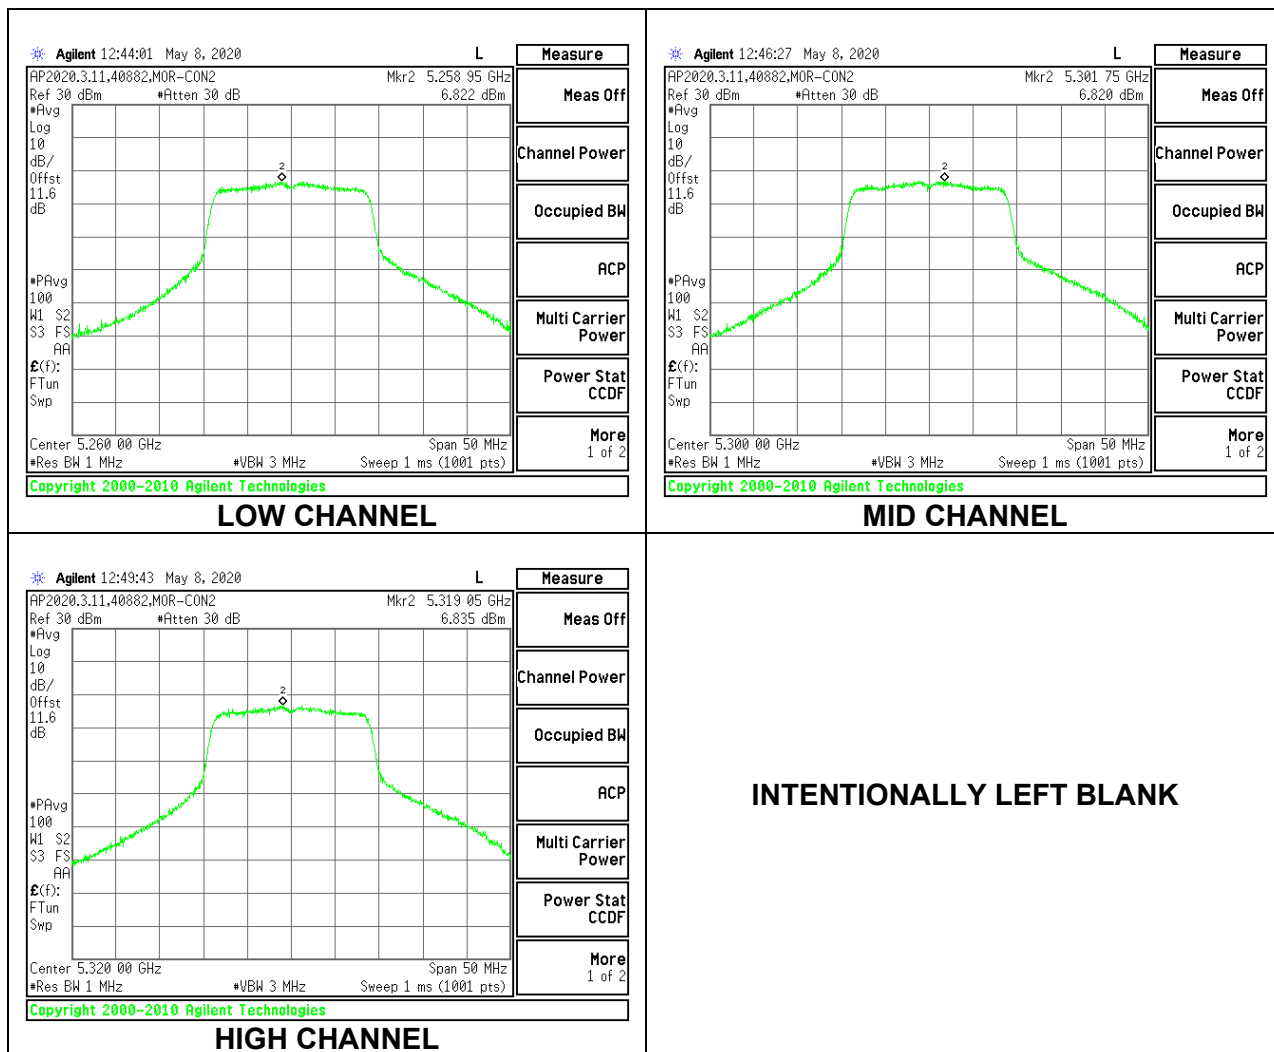

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	17.738	4.31	23.49	11.00
Mid	5300	17.837	4.31	23.51	11.00
High	5320	17.742	4.31	23.49	11.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.77	16.77	23.49	-6.72
Mid	5300	17.12	17.12	23.51	-6.39
High	5320	16.97	16.97	23.49	-6.52

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	6.822	6.94	11.00	-4.06
Mid	5300	6.820	6.94	11.00	-4.06
High	5320	6.835	6.96	11.00	-4.05

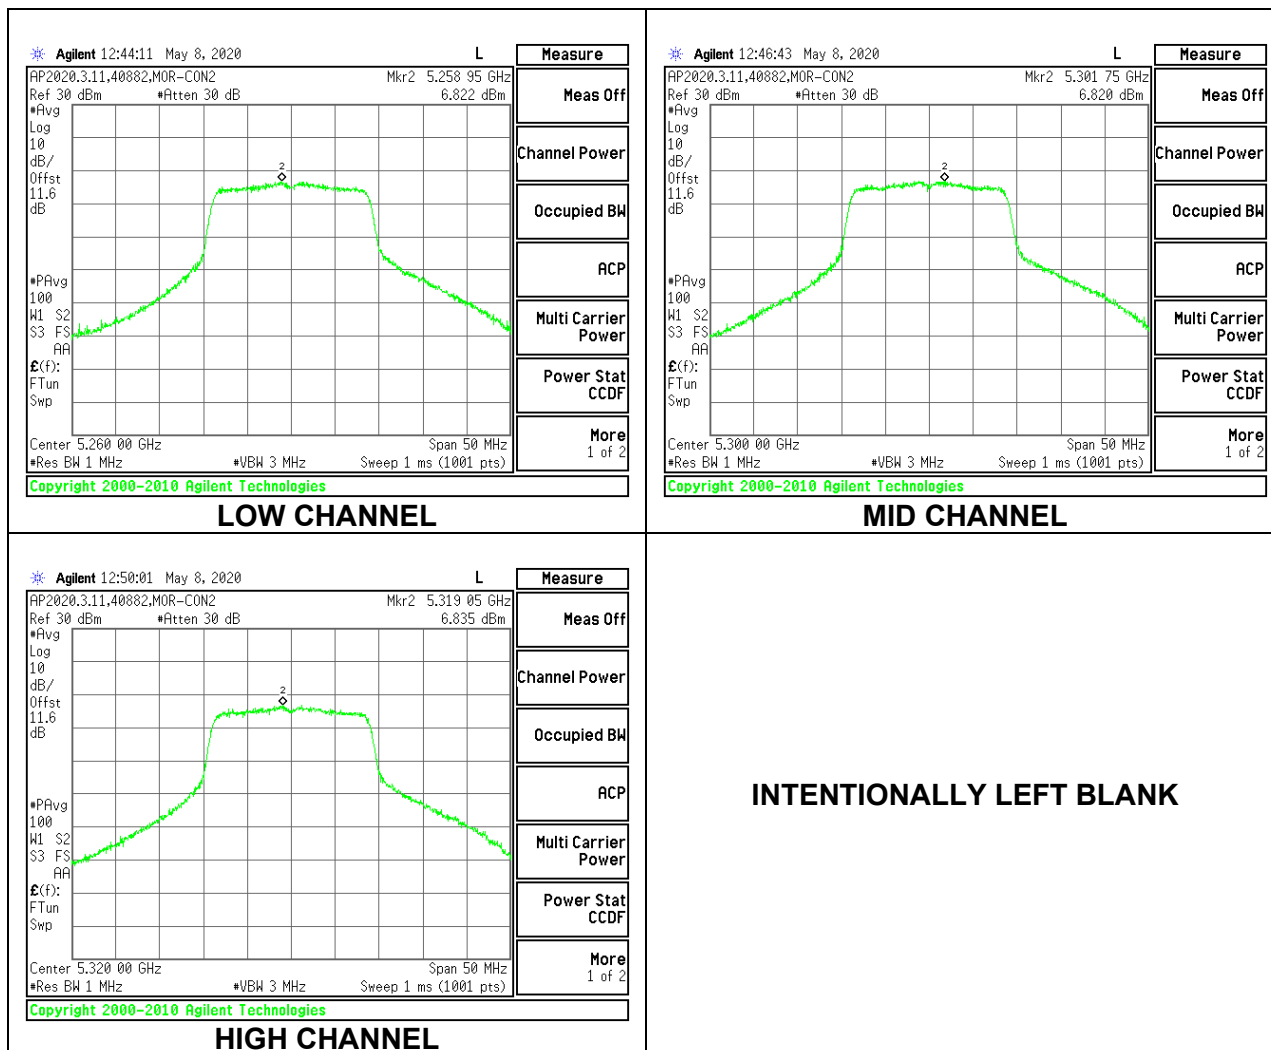

9.5.8. 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	42.30	4.31	24.00	11.00
High	5310	54.00	4.31	24.00	11.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	14.04	14.04	24.00	-9.96
High	5310	14.34	14.34	24.00	-9.66

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	3.124	3.35	11.00	-7.65
High	5310	3.398	3.63	11.00	-7.37

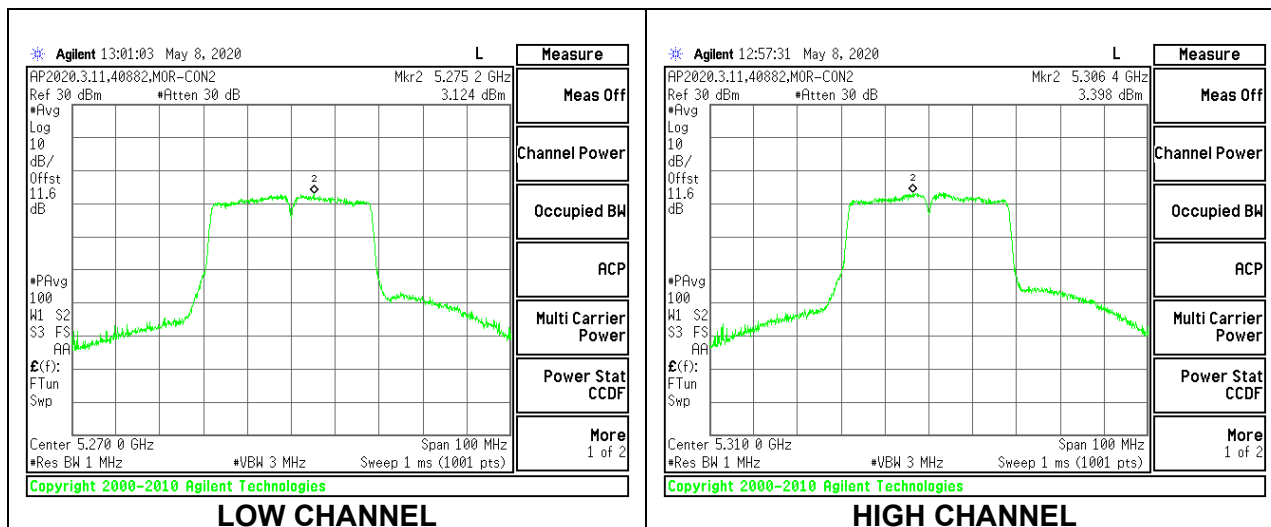

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	36.036	4.31	24.00	11.00
High	5310	36.284	4.31	24.00	11.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	14.04	14.04	24.00	-9.96
High	5310	14.34	14.34	24.00	-9.66

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	3.124	3.35	11.00	-7.65
High	5310	3.398	3.63	11.00	-7.37

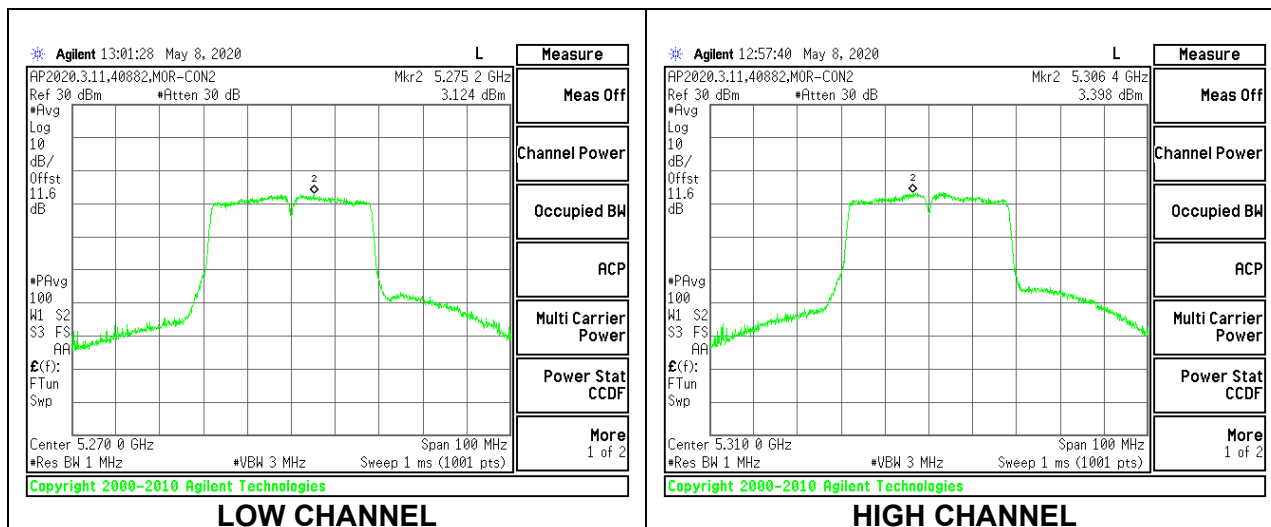

9.5.9. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	86.20	4.31	24.00	11.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.78	11.78	24.00	-12.22

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.440	0.02	11.00	-10.98

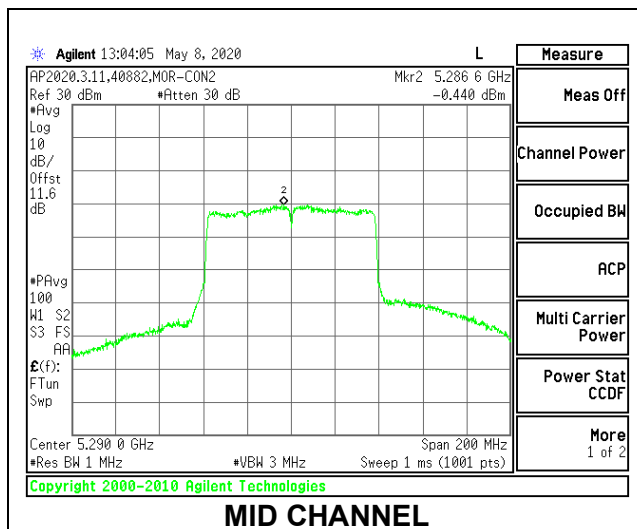

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	75.794	4.31	24.00	11.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	11.78	11.78	24.00	-12.22

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-0.440	0.02	11.00	-10.98

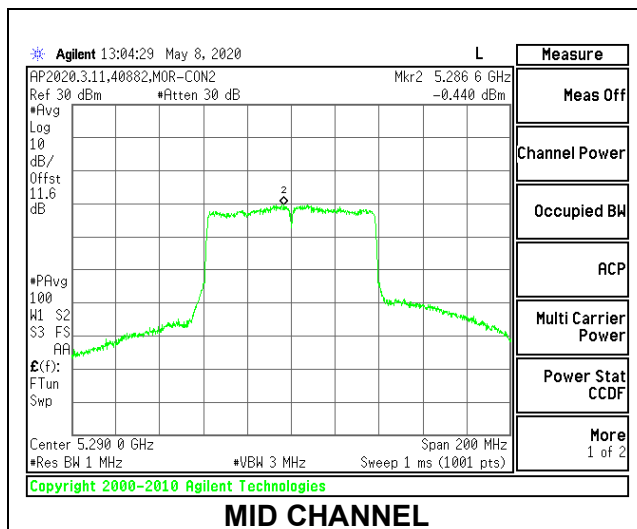

9.5.10. 802.11a MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	26.90	4.31	24.00	11.00
Mid	5580	27.20	4.31	24.00	11.00
High	5700	27.40	4.31	24.00	11.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.97	16.97	24.00	-7.03
Mid	5580	16.85	16.85	24.00	-7.15
High	5700	16.45	16.45	24.00	-7.55

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	5.96	6.07	11.00	-4.93
Mid	5580	5.42	5.53	11.00	-5.47
High	5700	5.79	5.90	11.00	-5.11

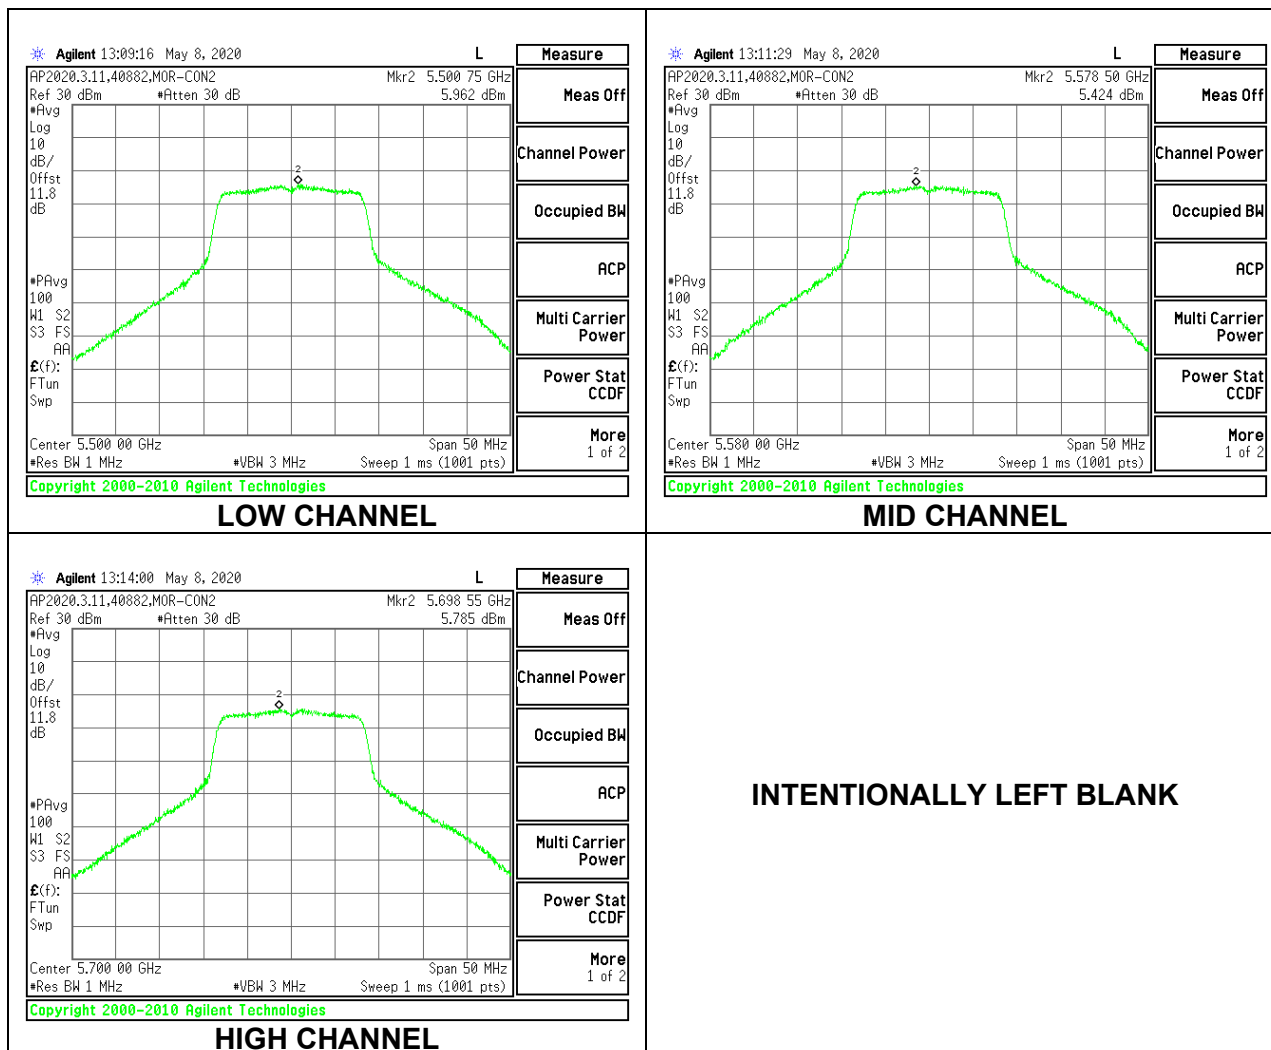

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	16.56	4.31	23.19	11.00
Mid	5580	16.61	4.31	23.20	11.00
High	5700	16.58	4.31	23.20	11.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.97	16.97	23.19	-6.22
Mid	5580	16.85	16.85	23.20	-6.35
High	5700	16.45	16.45	23.20	-6.75

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	5.96	6.07	11.00	-4.93
Mid	5580	5.42	5.53	11.00	-5.47
High	5700	5.79	5.90	11.00	-5.11

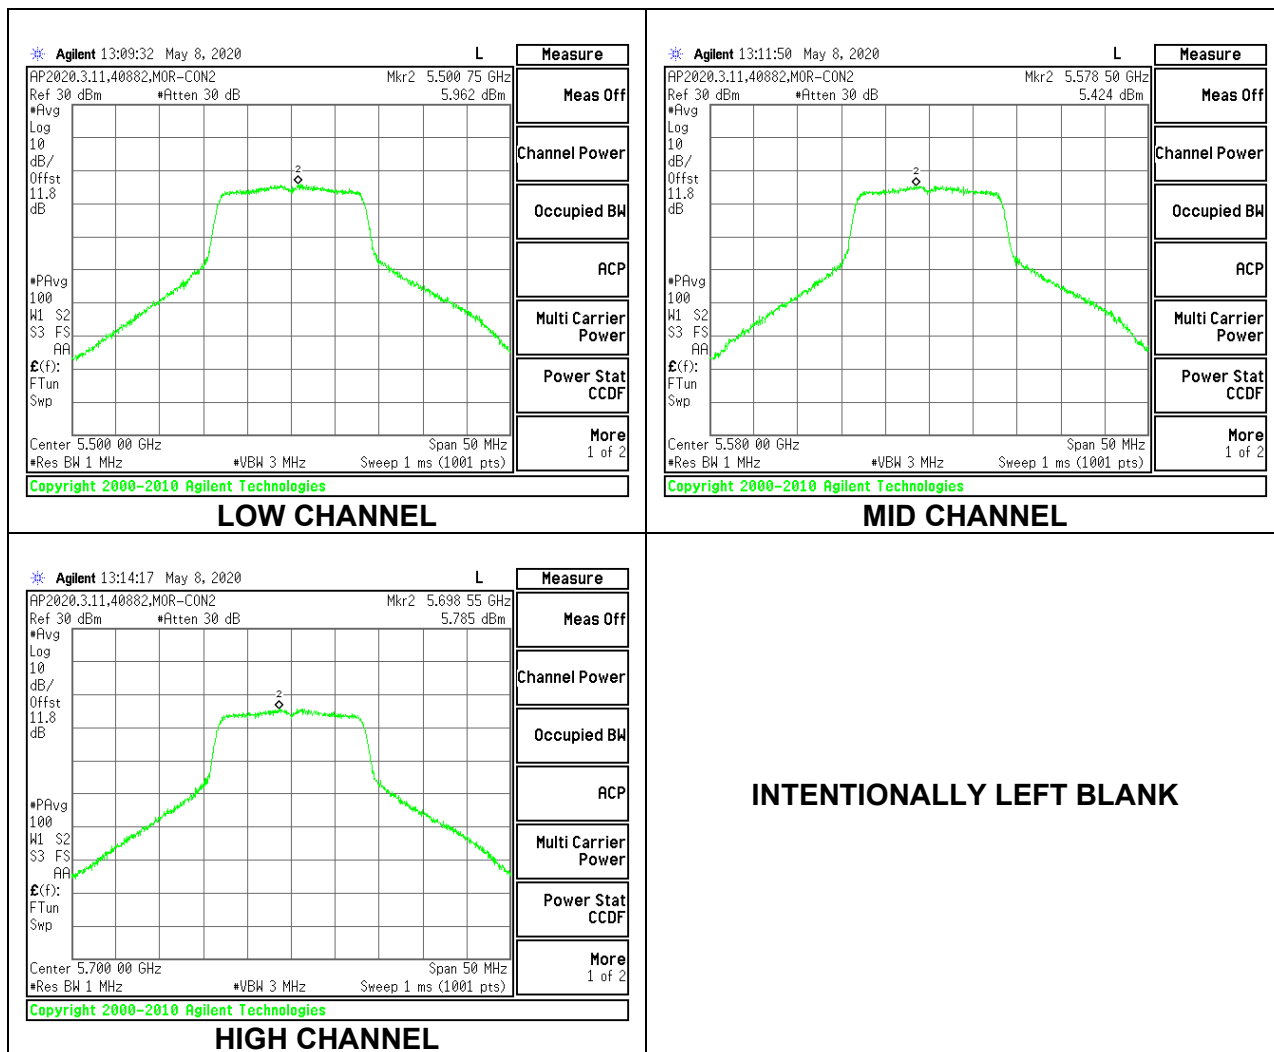

9.5.11. 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	26.30	4.31	24.00	11.00
Mid	5580	27.60	4.31	24.00	11.00
High	5700	27.40	4.31	24.00	11.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.72	16.72	24.00	-7.28
Mid	5580	16.69	16.69	24.00	-7.31
High	5700	16.30	16.30	24.00	-7.70

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	5.28	5.40	11.00	-5.60
Mid	5580	5.33	5.45	11.00	-5.55
High	5700	5.76	5.88	11.00	-5.13

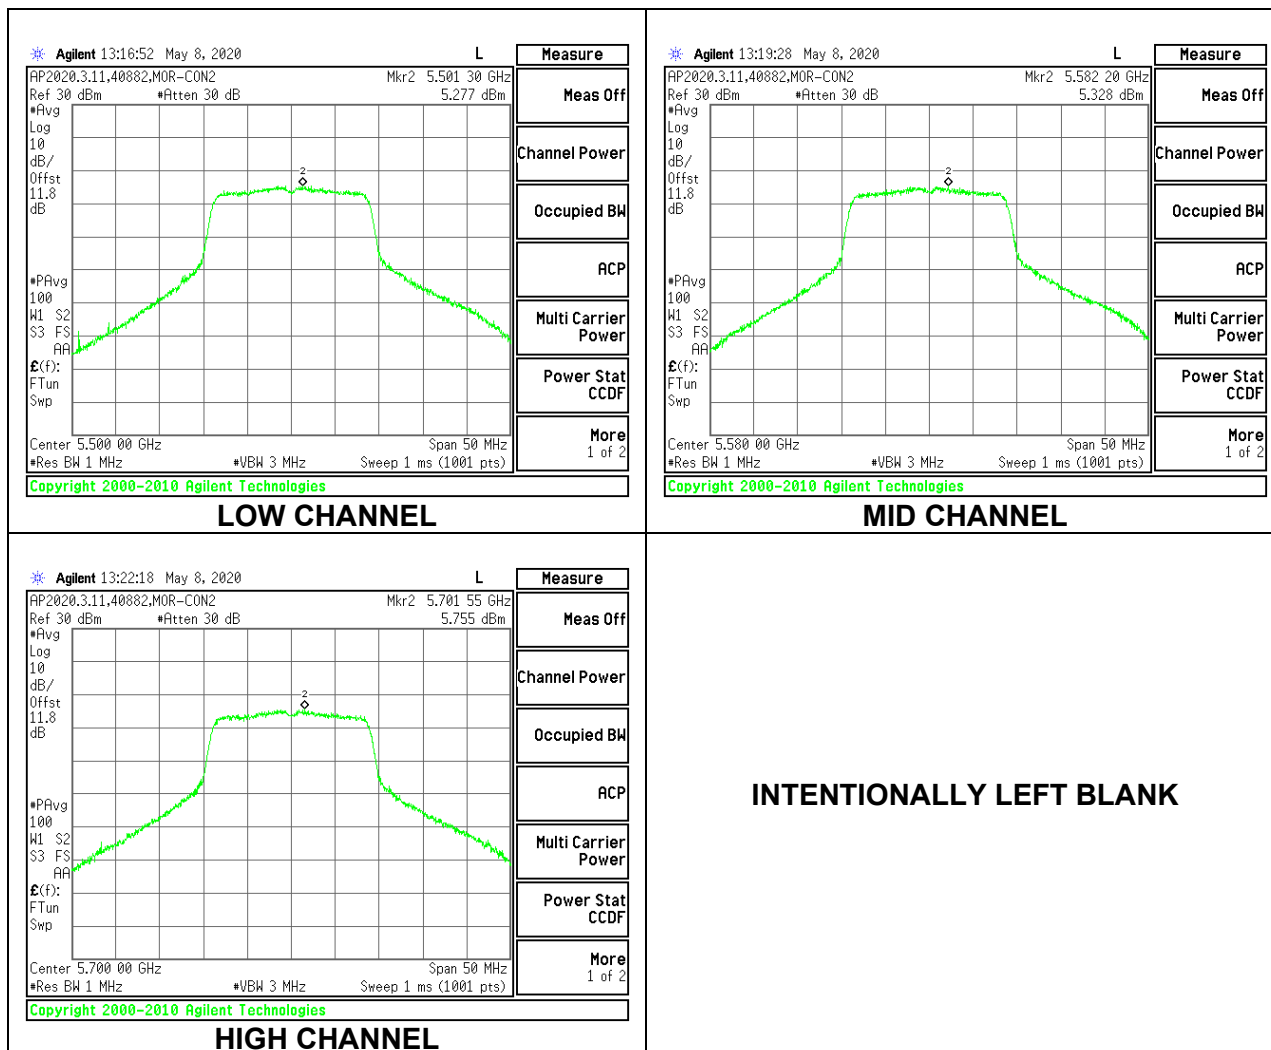

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	17.70	4.31	23.48	11.00
Mid	5580	17.75	4.31	23.49	11.00
High	5700	17.79	4.31	23.50	11.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.72	16.72	23.48	-6.76
Mid	5580	16.69	16.69	23.49	-6.80
High	5700	16.30	16.30	23.50	-7.20

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	5.28	5.40	11.00	-5.60
Mid	5580	5.33	5.45	11.00	-5.55
High	5700	5.76	5.88	11.00	-5.13

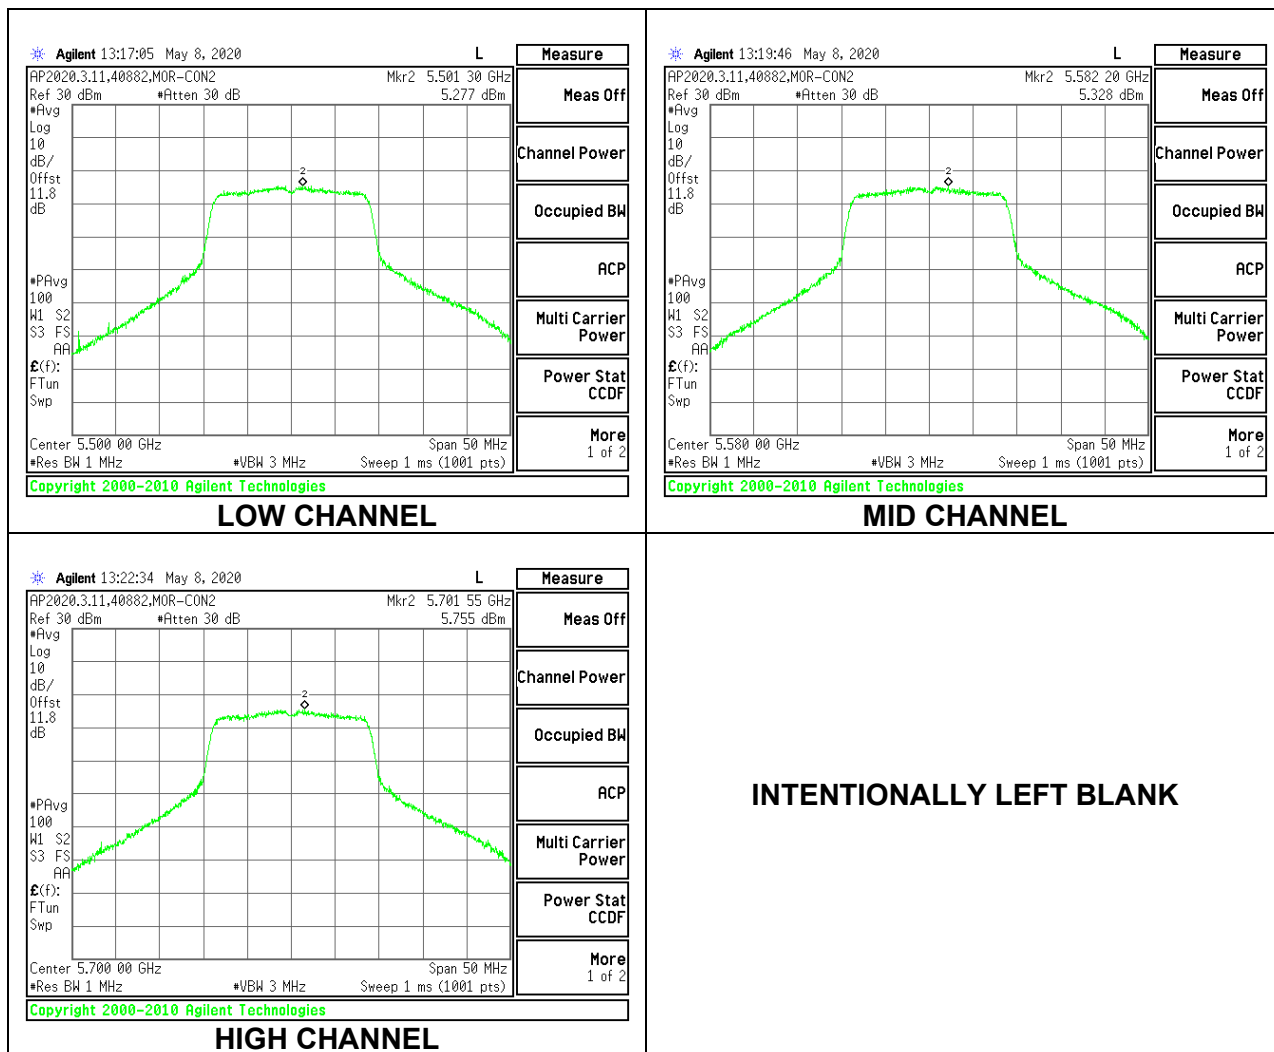

9.5.12. 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	42.80	4.31	24.00	11.00
Mid	5550	42.50	4.31	24.00	11.00
High	5670	42.80	4.31	24.00	11.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.84	15.84	24.00	-8.16
Mid	5550	15.48	15.48	24.00	-8.52
High	5670	16.63	16.63	24.00	-7.37

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	1.12	1.35	11.00	-9.65
Mid	5550	0.95	1.18	11.00	-9.83
High	5670	0.96	1.19	11.00	-9.81

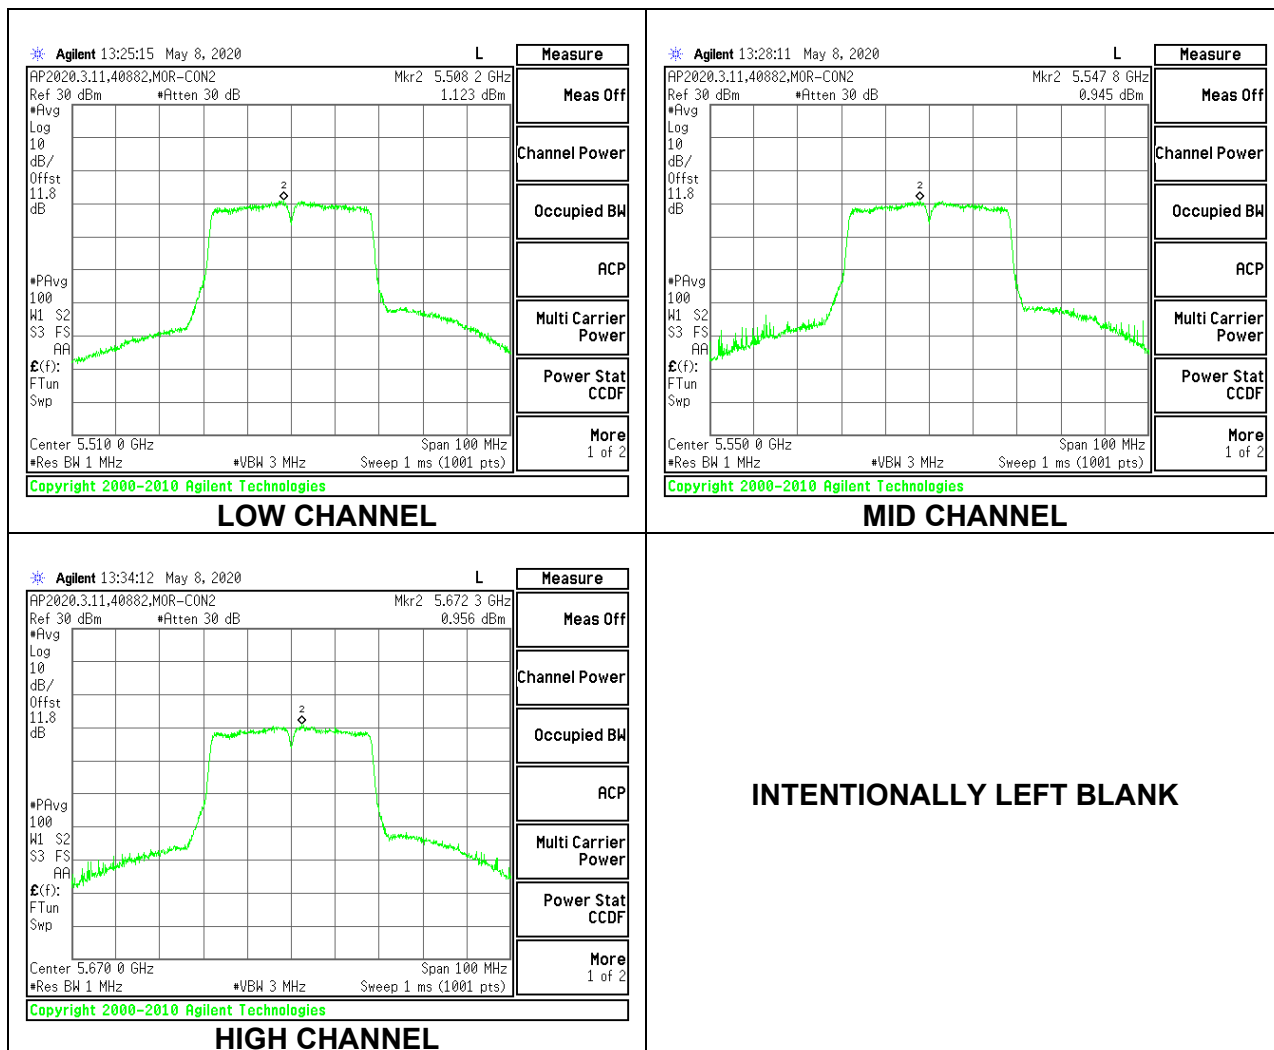

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	36.19	4.31	24.00	11.00
Mid	5550	36.14	4.31	24.00	11.00
High	5670	36.13	4.31	24.00	11.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.84	15.84	24.00	-8.16
Mid	5550	15.48	15.48	24.00	-8.52
High	5670	16.63	16.63	24.00	-7.37

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	1.12	1.35	11.00	-9.65
Mid	5550	0.95	1.18	11.00	-9.83
High	5670	0.96	1.19	11.00	-9.81

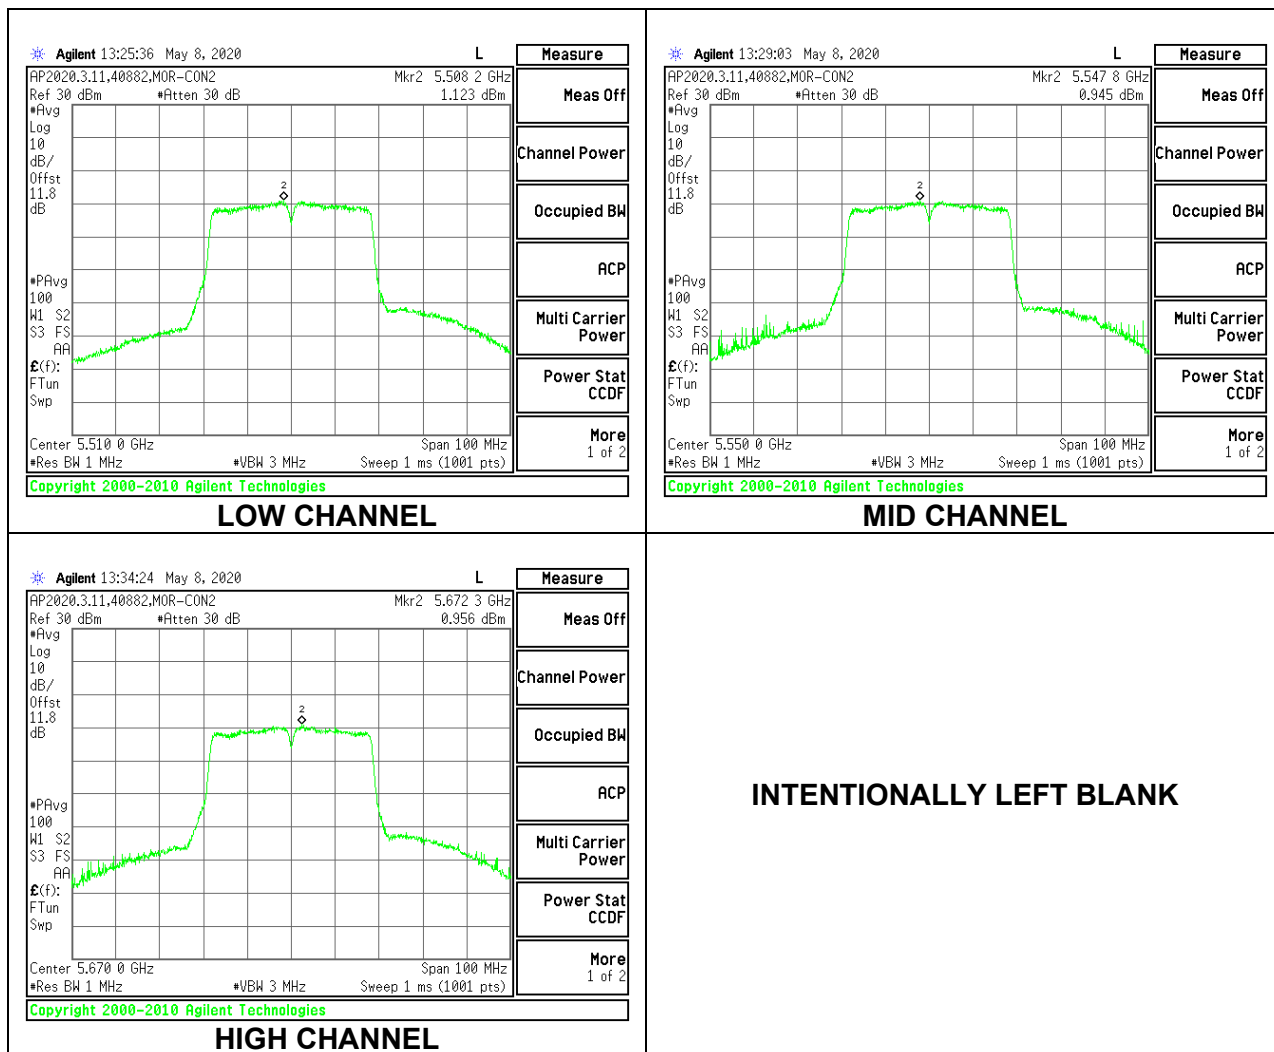

9.5.13. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	135.80	4.31	24.00	11.00
High	5610	90.80	4.31	24.00	11.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	14.53	14.53	24.00	-9.47
High	5610	15.53	15.53	24.00	-8.47

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	-2.60	-2.14	11.00	-13.14
High	5610	-3.26	-2.80	11.00	-13.80

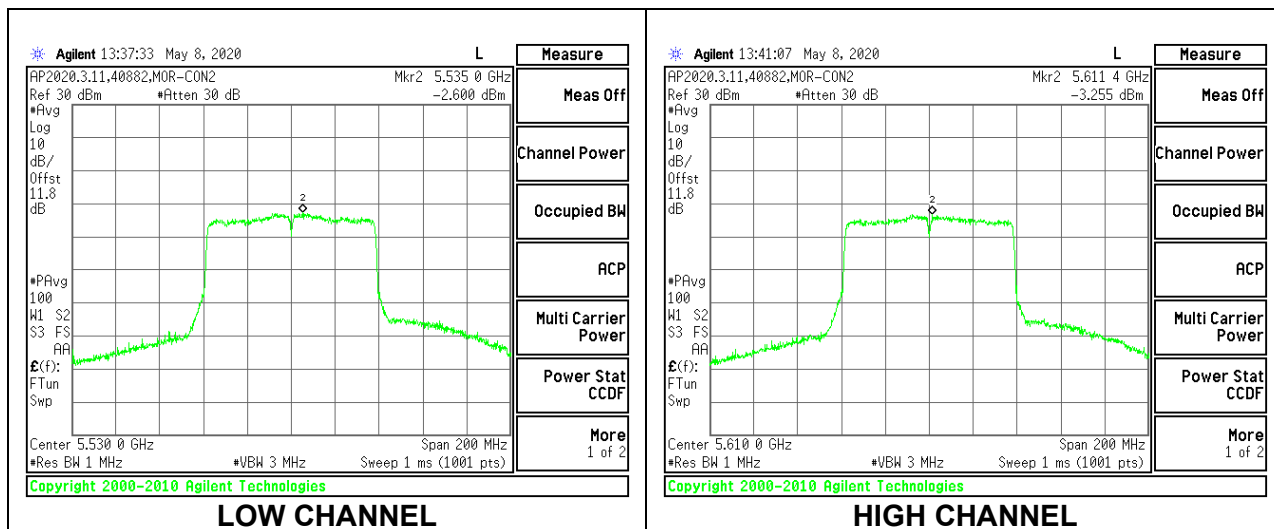

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	75.84	4.31	24.00	11.00
High	5610	75.36	4.31	24.00	11.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	14.53	14.53	24.00	-9.47
High	5610	15.53	15.53	24.00	-8.47

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	-2.60	-2.14	11.00	-13.14
High	5610	-3.26	-2.80	11.00	-13.80

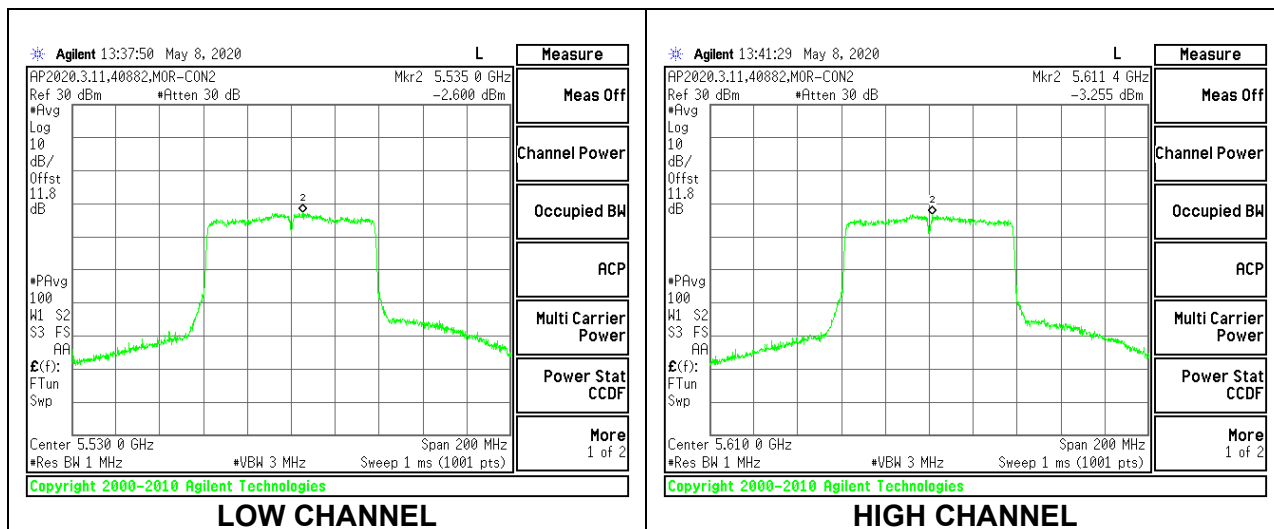

9.5.14. 802.11a MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	4.31	30.00	30.00
Mid	5785	4.31	30.00	30.00
High	5825	4.31	30.00	30.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.741	16.741	30.00	-13.26
Mid	5785	16.284	16.284	30.00	-13.72
High	5825	15.613	15.613	30.00	-14.39

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	3.393	3.503	30.00	-26.50
Mid	5785	3.258	3.368	30.00	-26.63
High	5825	3.094	3.204	30.00	-26.80

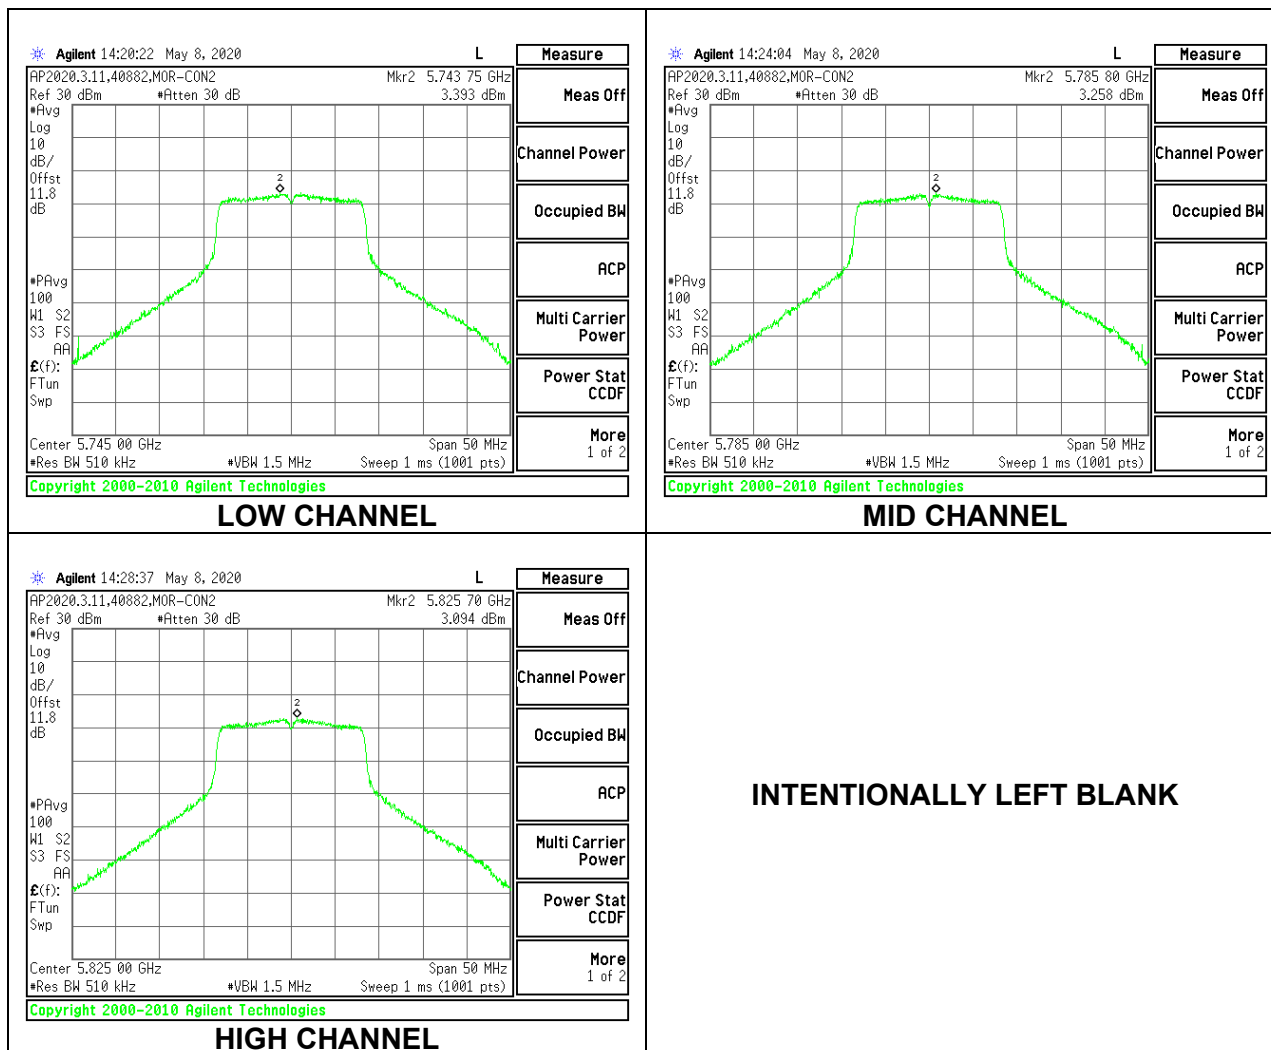

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	4.31	30.00	30.00
Mid	5785	4.31	30.00	30.00
High	5825	4.31	30.00	30.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.741	16.741	30.00	-13.26
Mid	5785	16.284	16.284	30.00	-13.72
High	5825	15.613	15.613	30.00	-14.39

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	3.393	3.503	30.00	-26.50
Mid	5785	3.258	3.368	30.00	-26.63
High	5825	3.094	3.204	30.00	-26.80

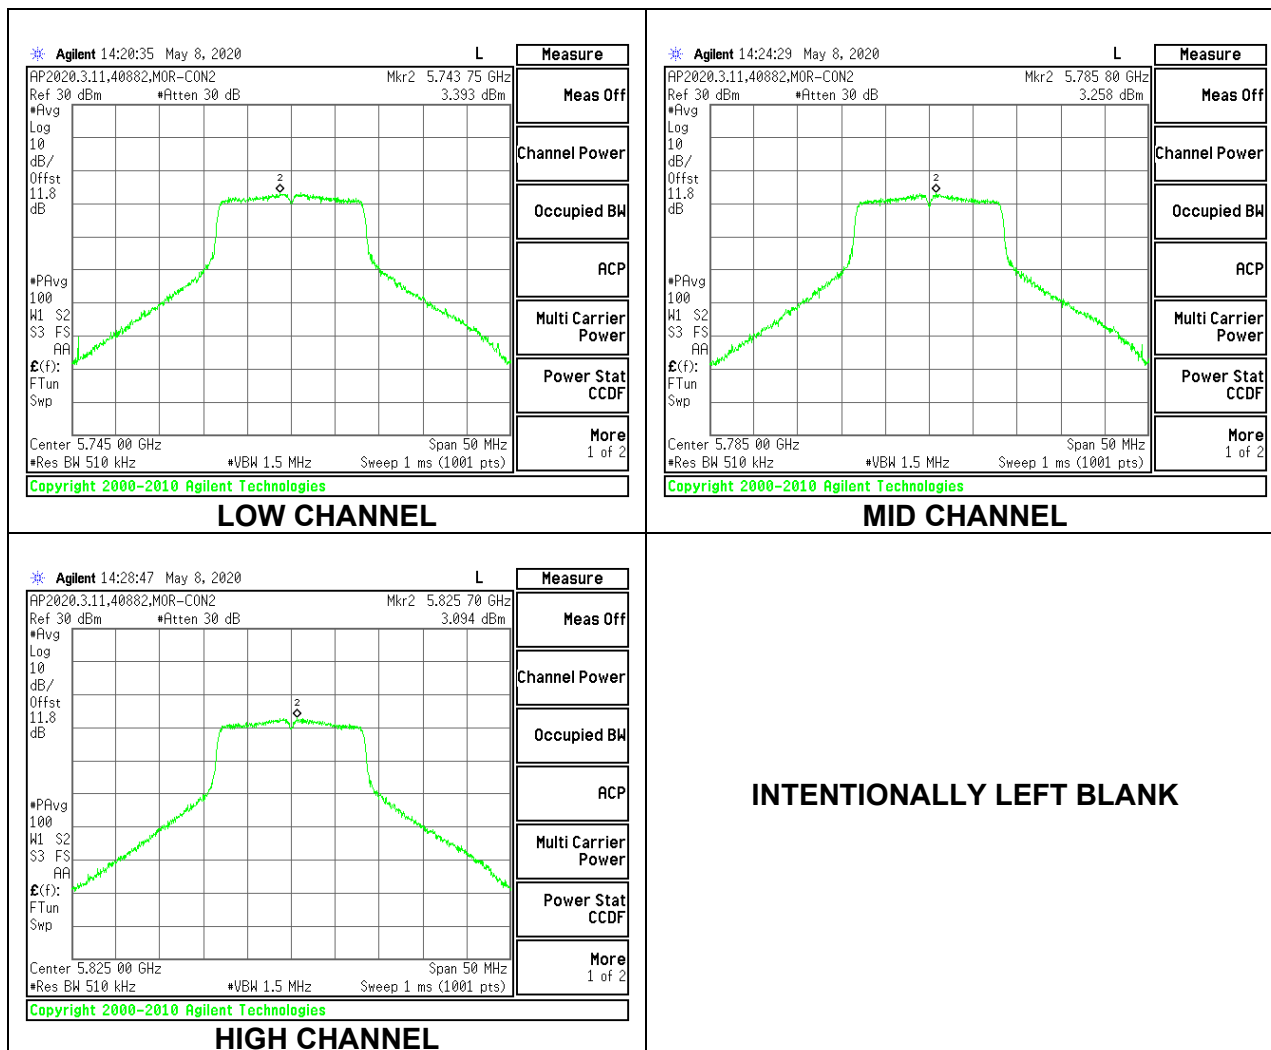

9.5.15. 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	4.31	30.00	30.00
Mid	5785	4.31	30.00	30.00
High	5825	4.31	30.00	30.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.641	16.641	30.00	-13.36
Mid	5785	16.239	16.239	30.00	-13.76
High	5825	15.655	15.655	30.00	-14.35

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	2.808	2.928	30.00	-27.07
Mid	5785	2.632	2.752	30.00	-27.25
High	5825	2.469	2.589	30.00	-27.41

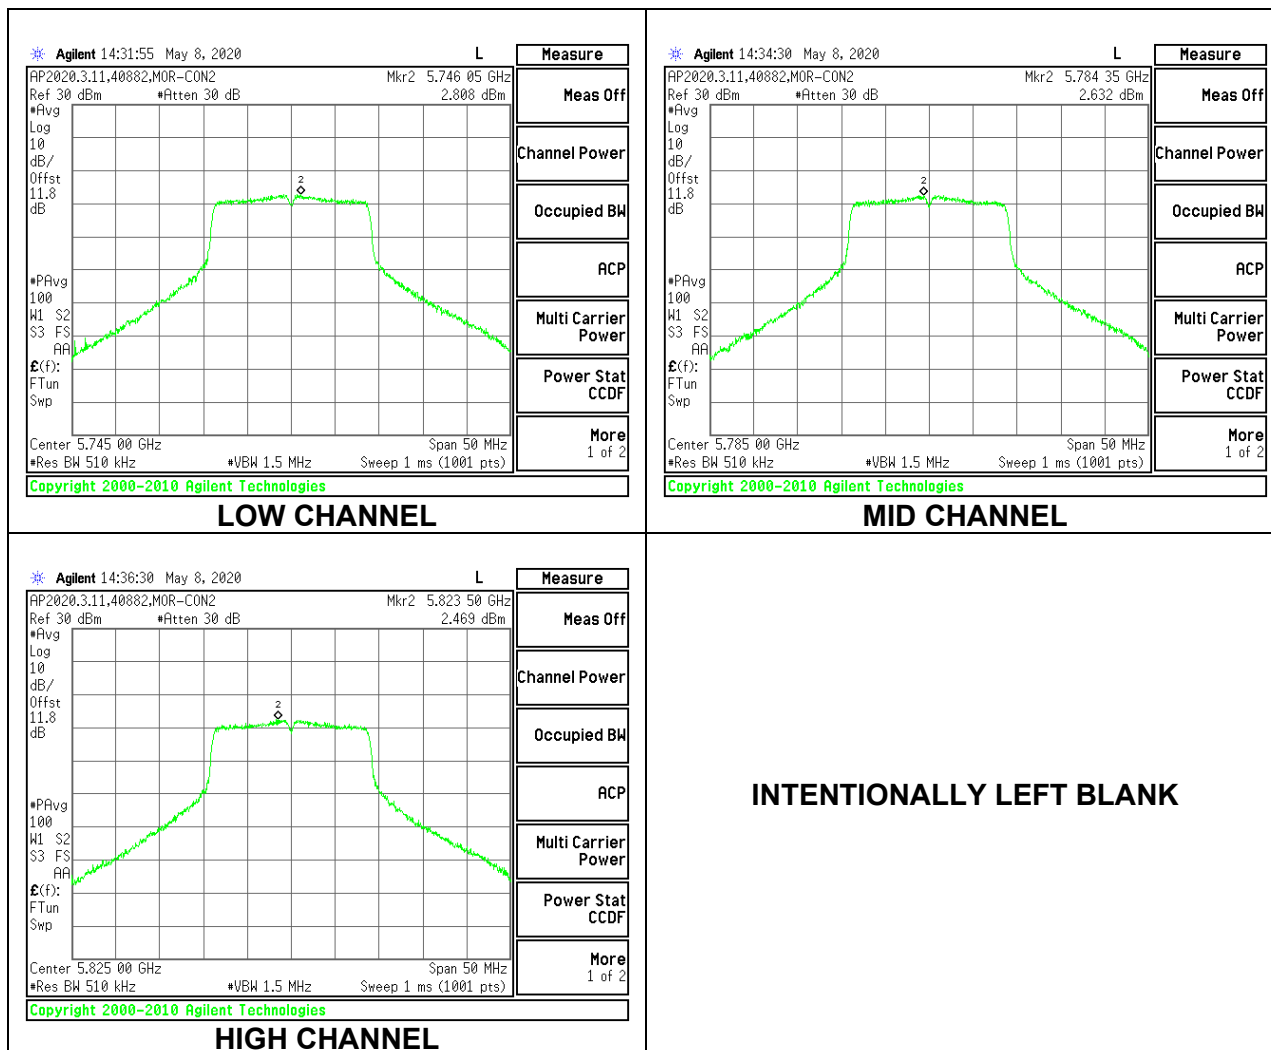

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	4.31	30.00	30.00
Mid	5785	4.31	30.00	30.00
High	5825	4.31	30.00	30.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.641	16.641	30.00	-13.36
Mid	5785	16.239	16.239	30.00	-13.76
High	5825	15.655	15.655	30.00	-14.35

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	2.808	2.928	30.00	-27.07
Mid	5785	2.632	2.752	30.00	-27.25
High	5825	2.469	2.589	30.00	-27.41

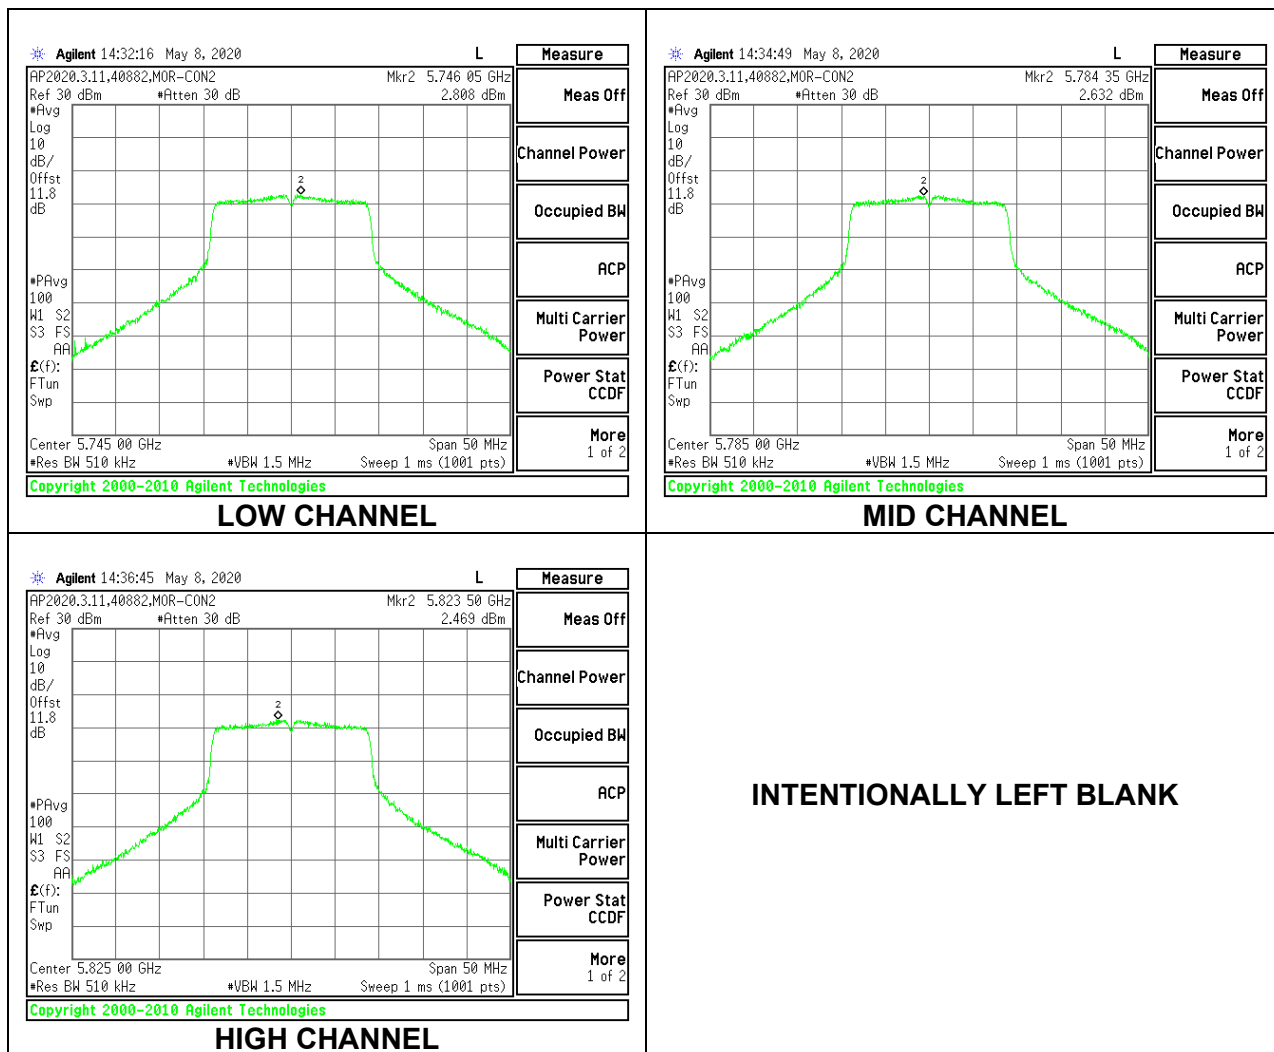

9.5.16. 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5755	4.31	30.00	30.00
High	5795	4.31	30.00	30.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	16.904	16.904	30.00	-13.10
High	5795	16.409	16.409	30.00	-13.59

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	0.871	1.101	30.00	-28.90
High	5795	0.727	0.957	30.00	-29.04

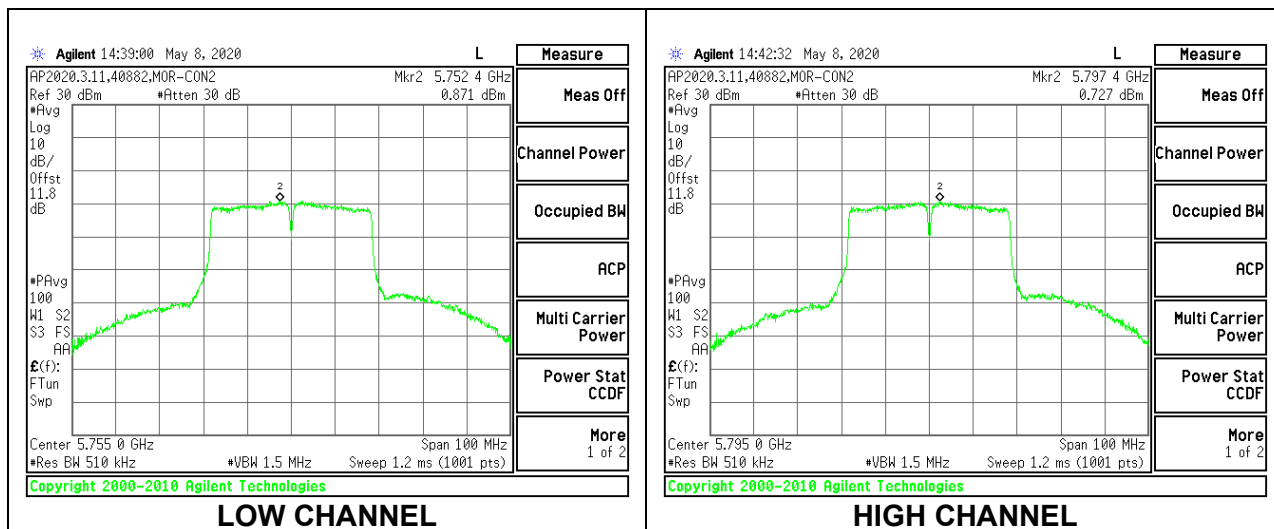

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5755	4.31	30.00	30.00
High	5795	4.31	30.00	30.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	16.904	16.904	30.00	-13.10
High	5795	16.409	16.409	30.00	-13.59

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	0.871	1.101	30.00	-28.90
High	5795	0.727	0.957	30.00	-29.04

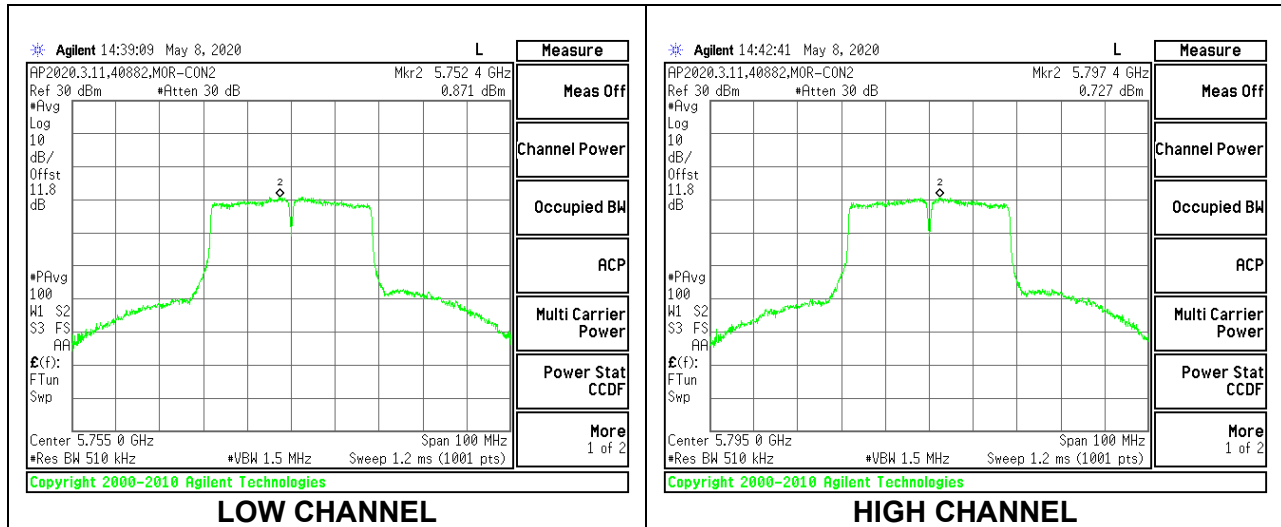

9.5.17. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX PCB Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Mid	5775	4.31	30.00	30.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.386	15.386	30.00	-14.61

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	-3.688	-3.228	30.00	-33.23

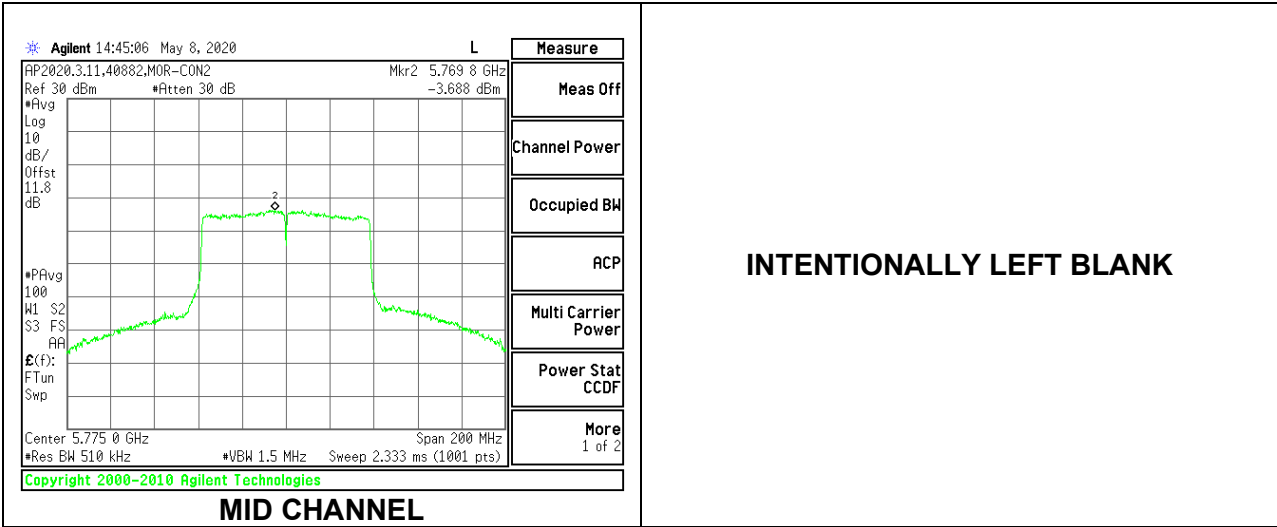

1TX PCB Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-05-08 & 2020-06-24

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Mid	5775	4.31	30.00	30.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.386	15.386	30.00	-14.61

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	-3.688	-3.228	30.00	-33.23

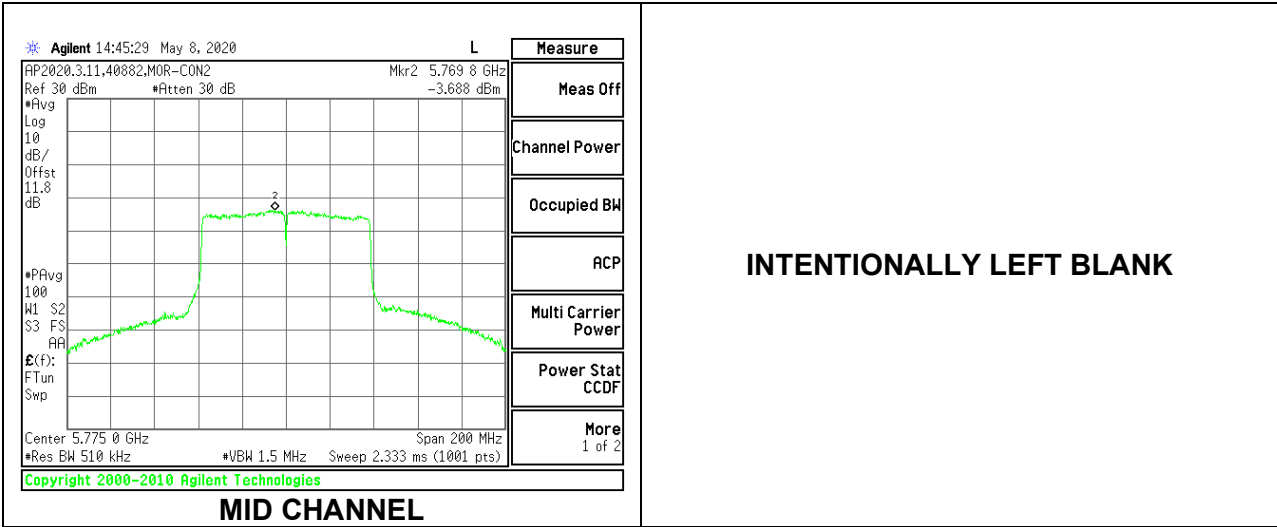

9.5.18. RESULTS – External Antenna

Note – For the 5.3 and 5.6 GHz bands, the EUT EIRP value is less than 500 mW (27 dBm) and therefore does not require TPC.

9.5.19. 802.11a MODE IN THE 5.2 GHz BAND

1TX External Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-10

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5180	6.37	23.63	10.63
Mid	5200	6.37	23.63	10.63
High	5240	6.37	23.63	10.63


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.31	12.31	23.63	-11.32
Mid	5200	11.98	11.98	23.63	-11.65
High	5240	12.00	12.00	23.63	-11.63

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5180	1.497	1.61	10.63	-9.02
Mid	5200	1.264	1.37	10.63	-9.26
High	5240	0.813	0.92	10.63	-9.71

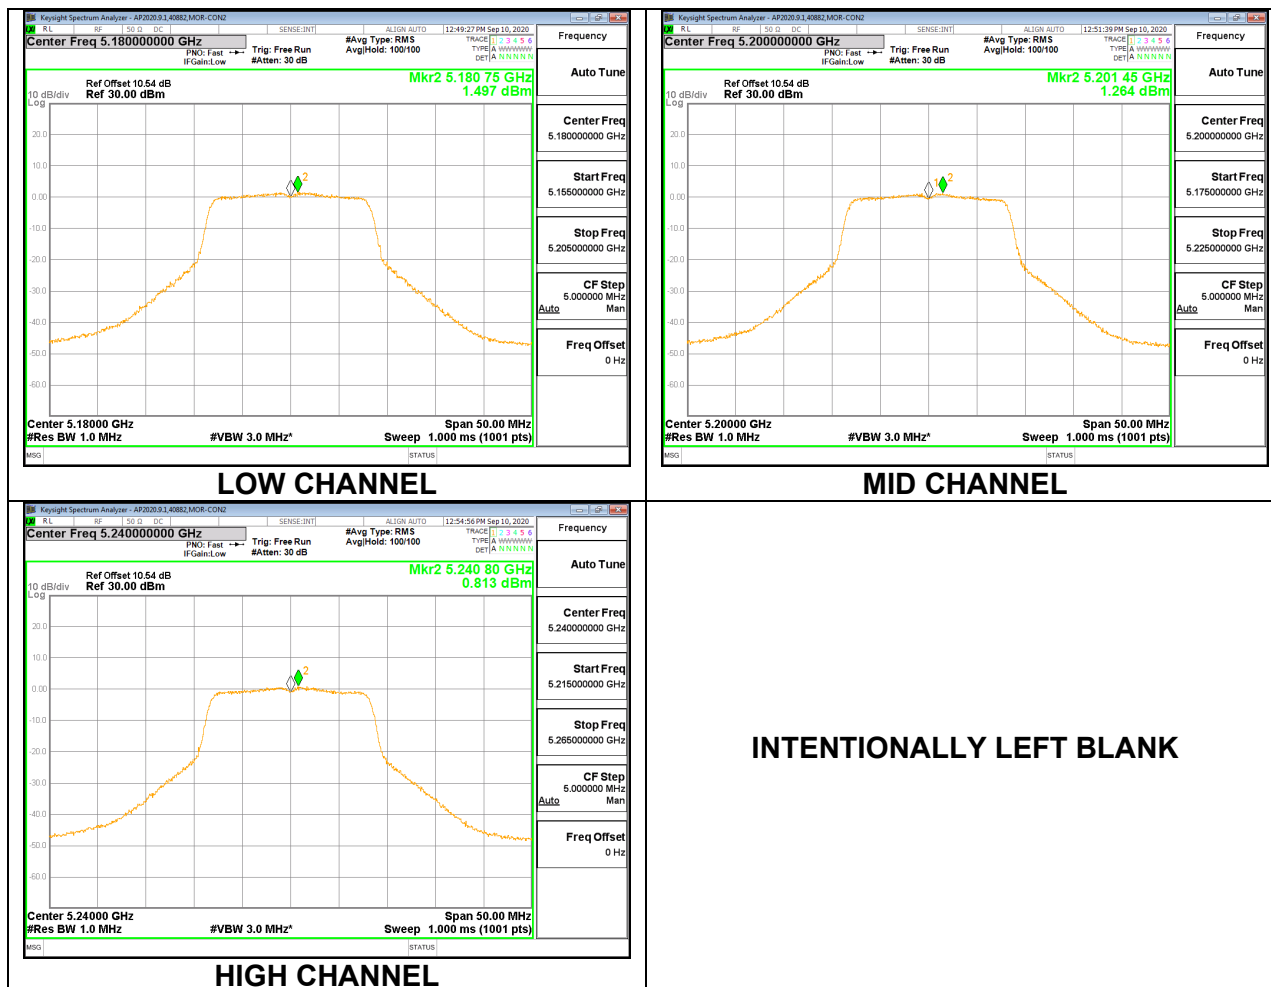

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/1MHz)	PSD Limit (dBm/1MHz)
Low	5180	16.440	6.37	22.16	15.79	10.00	3.63
Mid	5200	16.536	6.37	22.18	15.81	10.00	3.63
High	5240	16.522	6.37	22.18	15.81	10.00	3.63


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.31	12.31	15.79	-3.48
Mid	5200	11.98	11.98	15.81	-3.83
High	5240	12.00	12.00	15.81	-3.81

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5180	1.497	1.61	3.63	-2.02
Mid	5200	1.264	1.37	3.63	-2.26
High	5240	0.813	0.92	3.63	-2.71

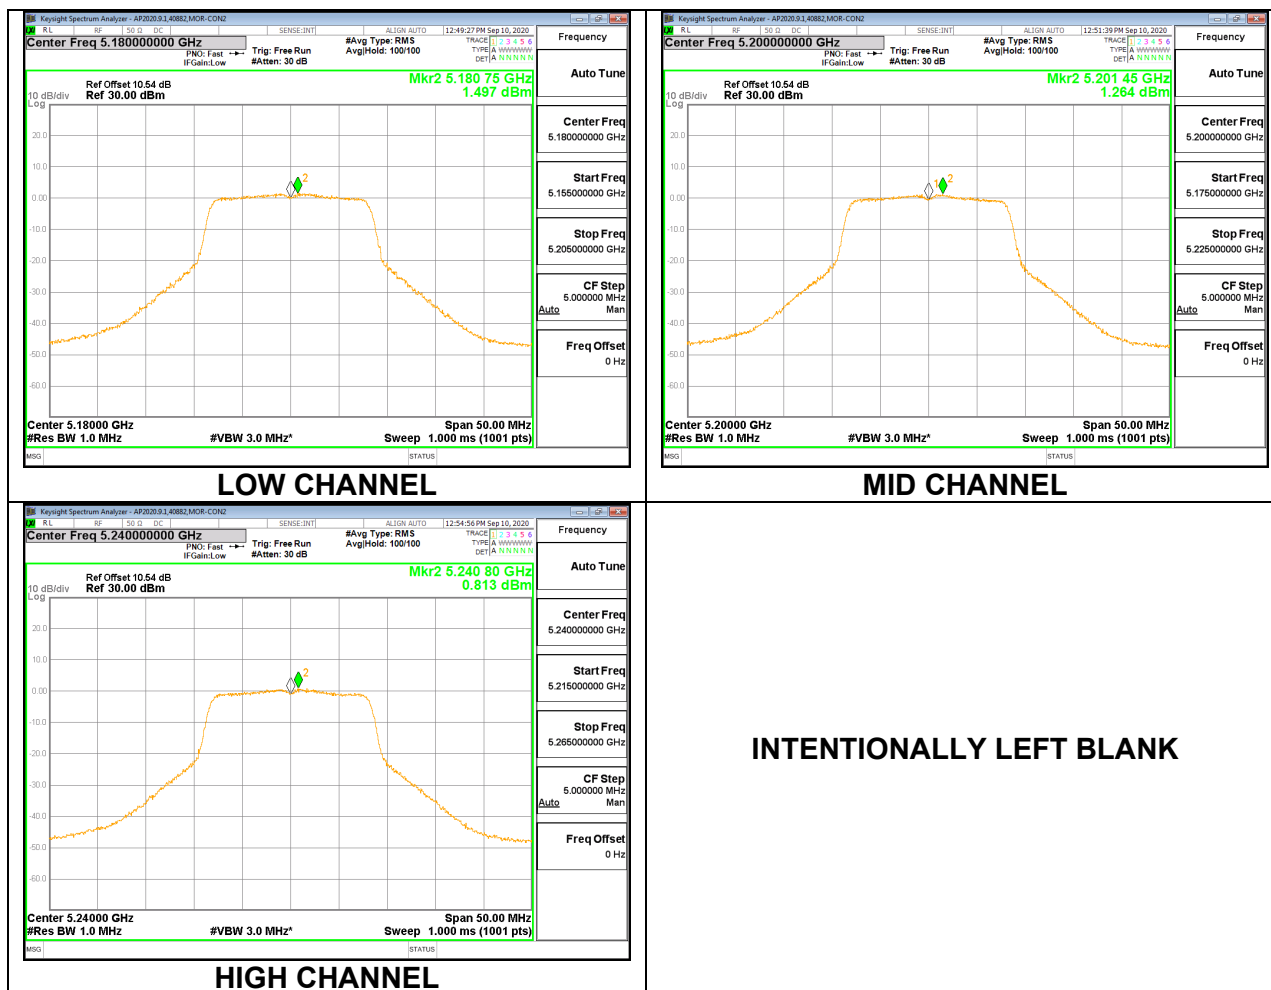

9.5.20. 802.11n HT20 MODE IN THE 5.2 GHz BAND

1TX External Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-10

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5180	6.37	23.63	10.63
Mid	5200	6.37	23.63	10.63
High	5240	6.37	23.63	10.63


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.16	12.16	23.63	-11.47
Mid	5200	11.99	11.99	23.63	-11.64
High	5240	12.01	12.01	23.63	-11.62

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	1.403	1.52	10.63	-9.11
Mid	5200	0.896	1.02	10.63	-9.61
High	5240	0.488	0.61	10.63	-10.02

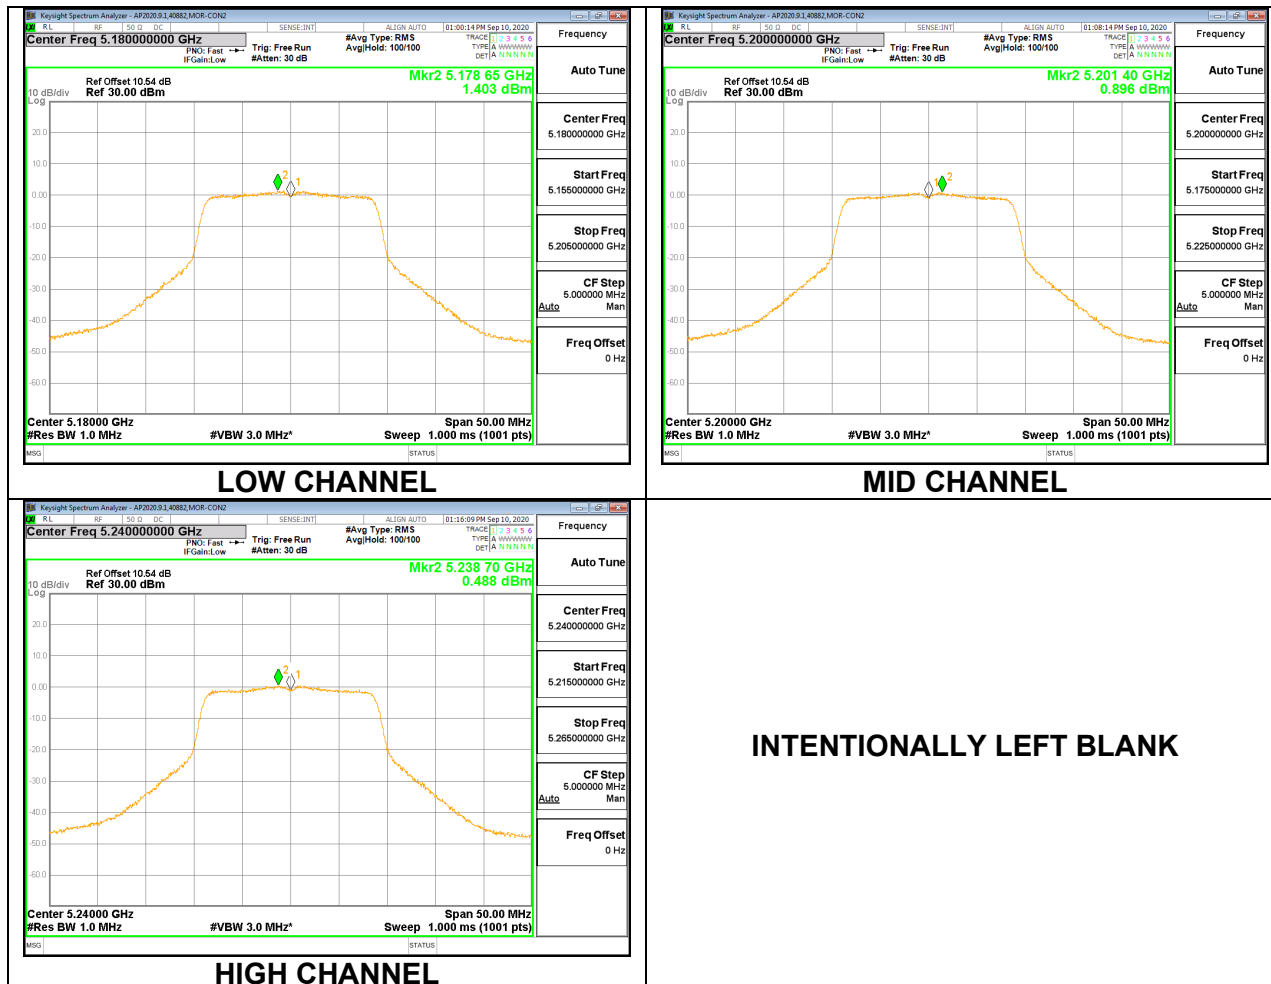

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5180	17.705	6.37	22.48	16.11	10.00	3.63
Mid	5200	17.615	6.37	22.46	16.09	10.00	3.63
High	5240	17.688	6.37	22.48	16.11	10.00	3.63


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.16	12.16	16.11	-3.95
Mid	5200	11.99	11.99	16.09	-4.10
High	5240	12.01	12.01	16.11	-4.10

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5180	1.403	1.52	3.63	-2.11
Mid	5200	0.896	1.02	3.63	-2.61
High	5240	0.488	0.61	3.63	-3.02

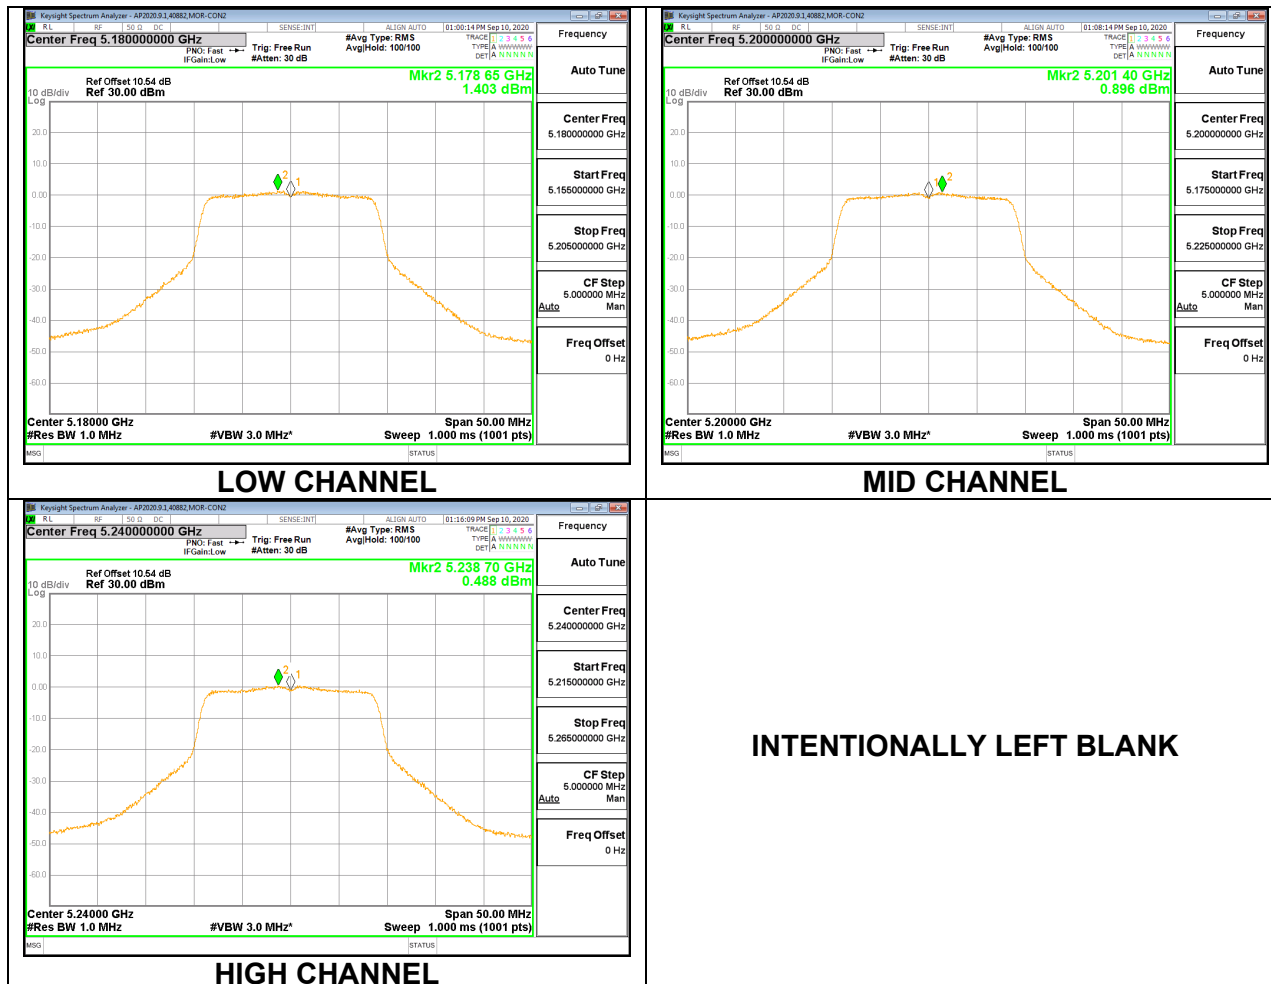

9.5.21. 802.11n HT40 MODE IN THE 5.2 GHz BAND

1TX External Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-10

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5190	6.37	23.63	10.63
High	5230	6.37	23.63	10.63


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.62	10.62	23.63	-13.01
High	5230	10.59	10.59	23.63	-13.04

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	-2.601	-2.37	10.63	-13.00
High	5230	-2.748	-2.52	10.63	-13.15

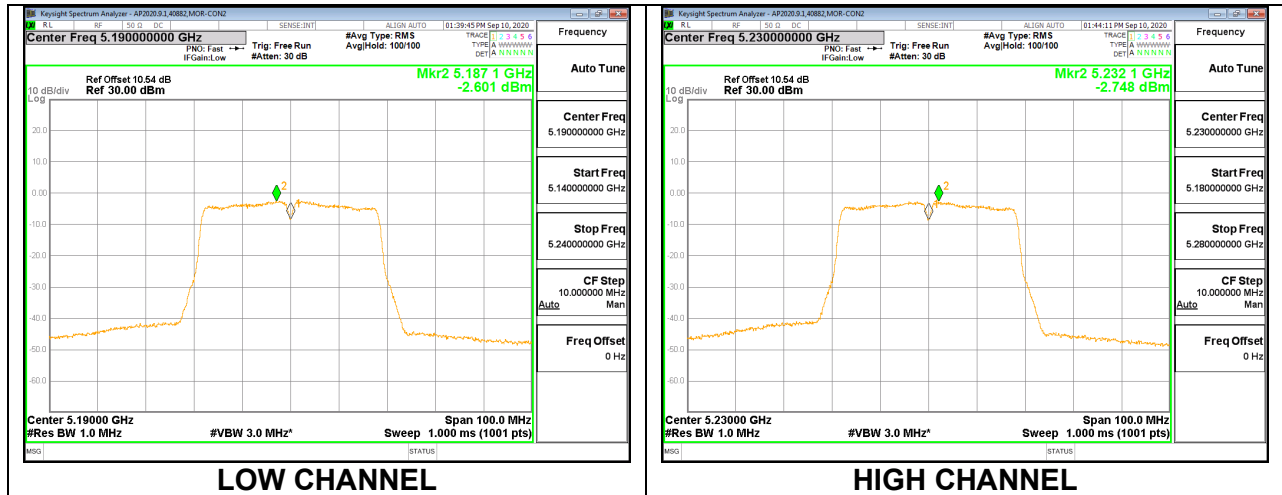

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-27, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Low	5190	36.419	6.37	23.00	16.63	10.00	3.63
High	5230	36.340	6.37	23.00	16.63	10.00	3.63


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.620	10.62	16.63	-6.01
High	5230	10.590	10.59	16.63	-6.04

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5190	-2.601	-2.37	3.63	-6.00
High	5230	-2.748	-2.52	3.63	-6.15

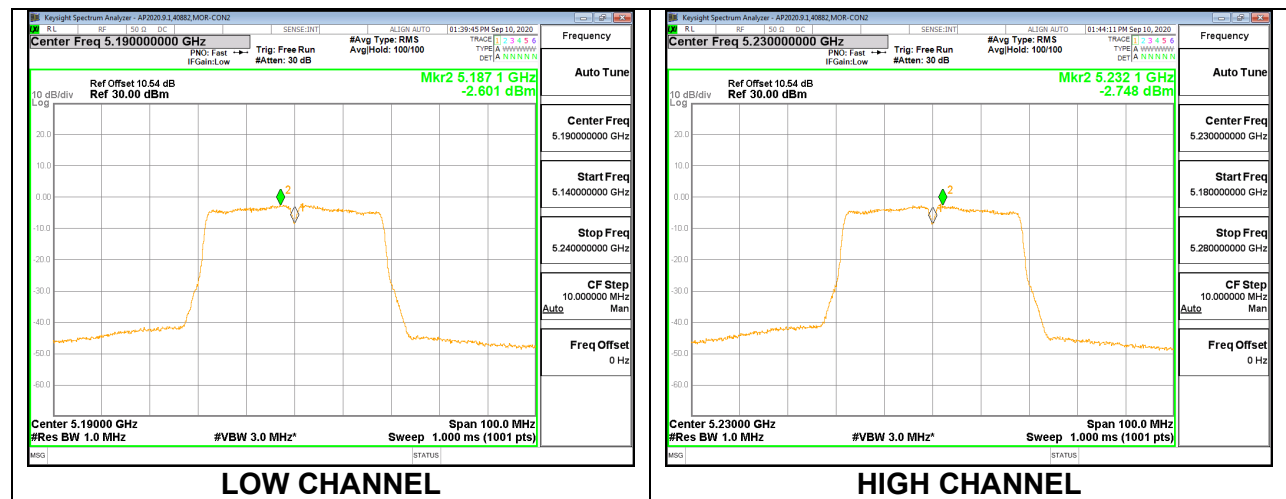

9.5.22. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

1TX External Antenna MODE (FCC) MOBILE

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5210	6.37	23.63	10.63


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	10.82	10.82	23.63	-12.81

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-5.273	-4.81	10.63	-15.44

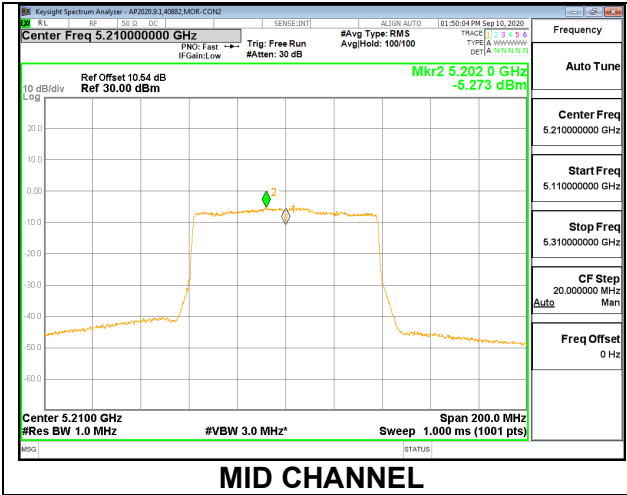

INTENTIONALLY LEFT BLANK

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	EIRP Power Limit (dBm)	Power Limit (dBm)	EIRP PSD Limit (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)
Mid	5210	75.915	6.37	23.00	16.63	10.00	3.63


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	10.820	10.82	16.63	-5.81

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5210	-5.273	-4.81	3.63	-8.44

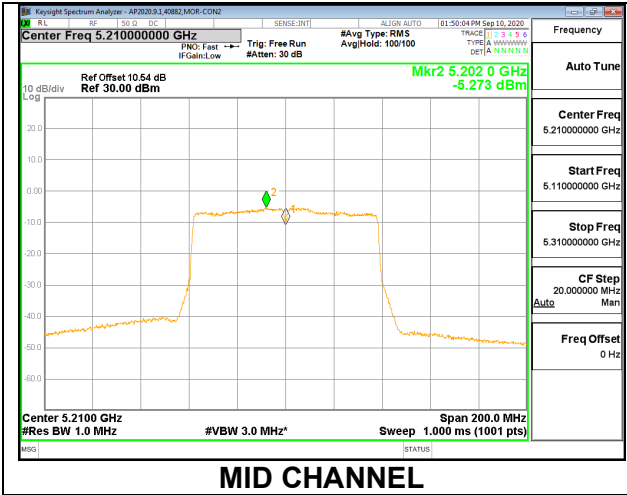

INTENTIONALLY LEFT BLANK

9.5.23. 802.11a MODE IN THE 5.3 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	26.60	6.37	23.63	10.63
Mid	5300	28.25	6.37	23.63	10.63
High	5320	27.95	6.37	23.63	10.63


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.26	15.26	23.63	-8.37
Mid	5300	15.09	15.09	23.63	-8.54
High	5320	15.10	15.10	23.63	-8.53

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	4.989	5.10	10.63	-5.53
Mid	5300	4.185	4.30	10.63	-6.34
High	5320	4.000	4.11	10.63	-6.52

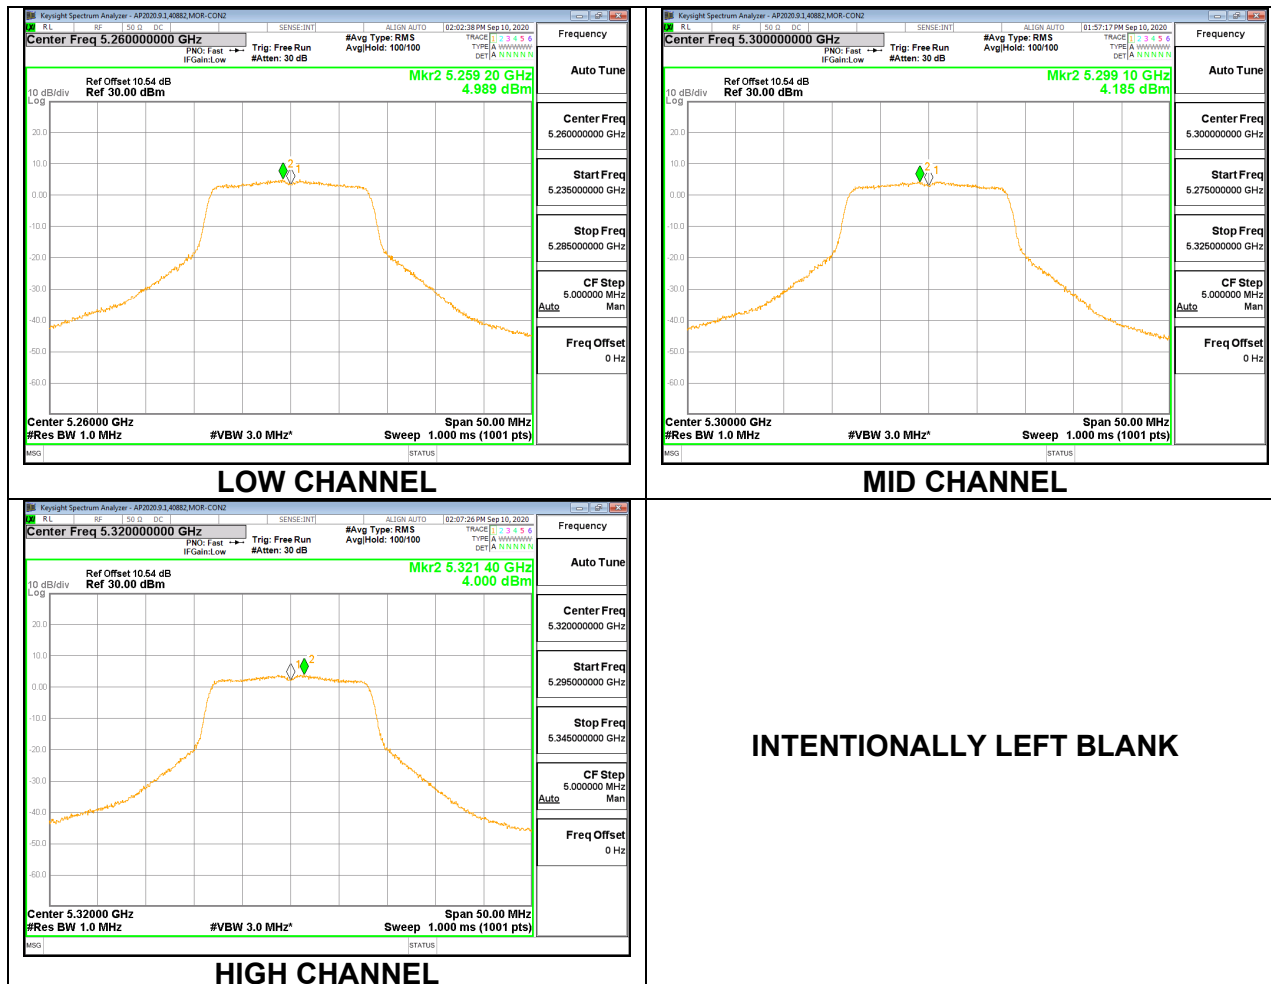

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	16.624	6.37	22.84	11.00
Mid	5300	16.628	6.37	22.84	11.00
High	5320	16.728	6.37	22.86	11.00


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.26	15.26	22.84	-7.58
Mid	5300	15.09	15.09	22.84	-7.75
High	5320	15.10	15.10	22.86	-7.76

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	4.989	5.10	11.00	-5.90
Mid	5300	4.185	4.30	11.00	-6.71
High	5320	4.000	4.11	11.00	-6.89

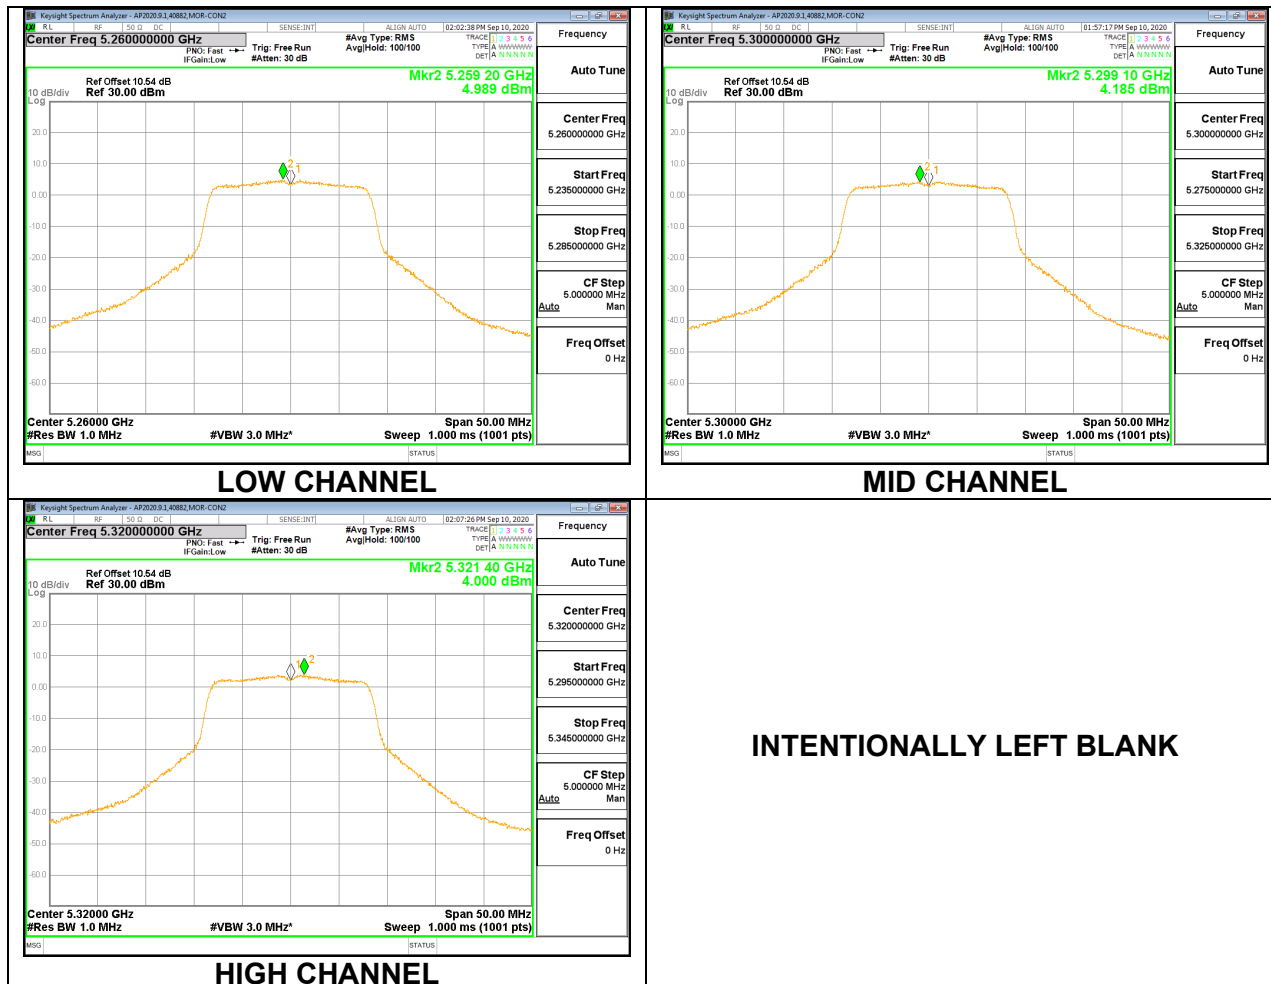

9.5.24. 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	26.95	6.37	23.63	10.63
Mid	5300	28.70	6.37	23.63	10.63
High	5320	28.55	6.37	23.63	10.63


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	14.93	14.93	23.63	-8.70
Mid	5300	15.03	15.03	23.63	-8.60
High	5320	14.62	14.62	23.63	-9.01

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	4.237	4.36	10.63	-6.27
Mid	5300	3.962	4.08	10.63	-6.55
High	5320	3.661	3.78	10.63	-6.85

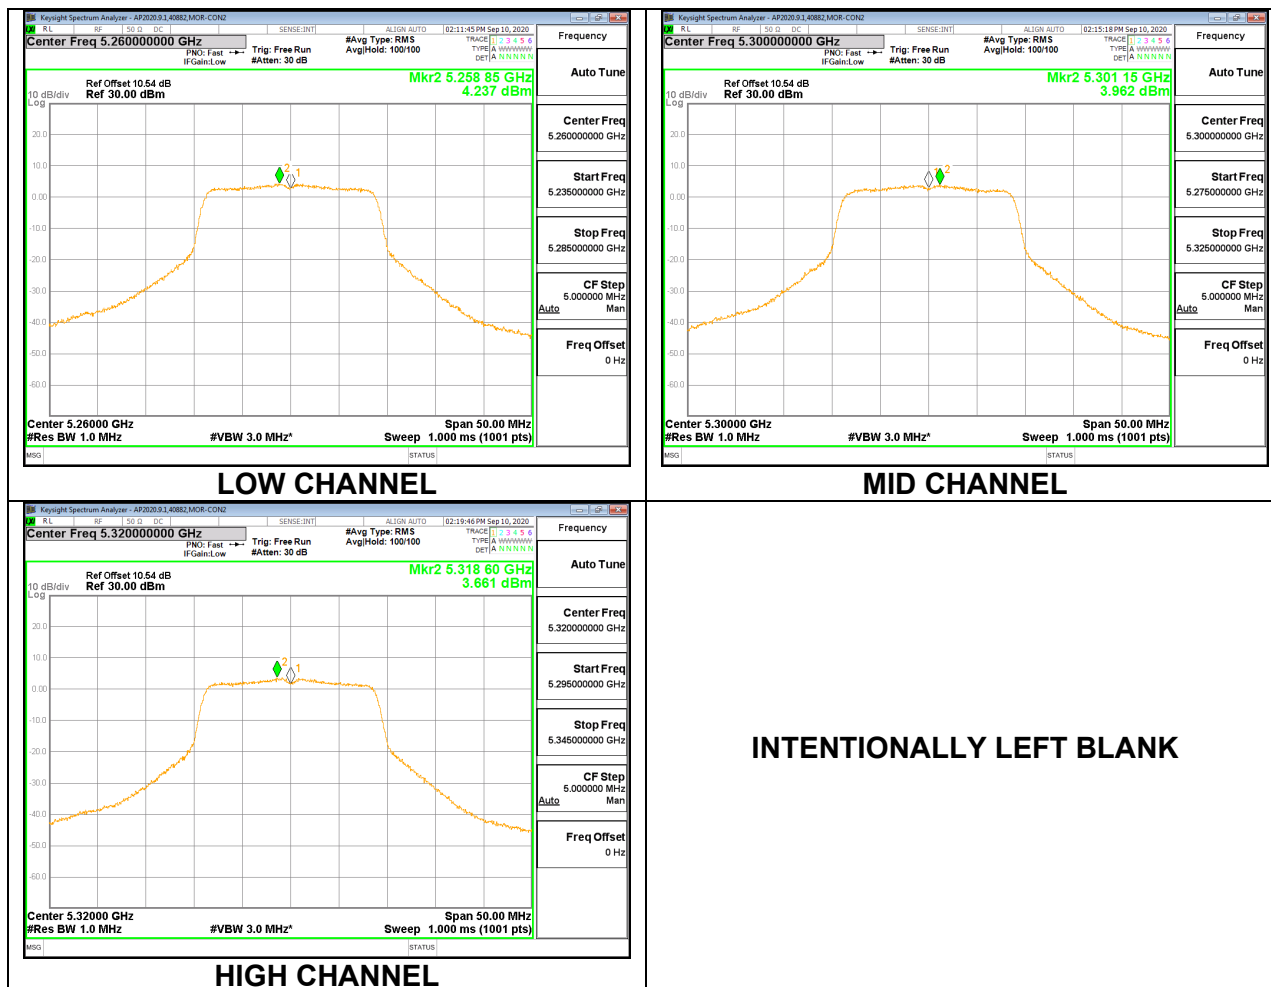

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	17.738	6.37	23.12	11.00
Mid	5300	17.837	6.37	23.14	11.00
High	5320	17.742	6.37	23.12	11.00


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	14.93	14.93	23.12	-8.19
Mid	5300	15.03	15.03	23.14	-8.11
High	5320	14.62	14.62	23.12	-8.50

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	4.237	4.36	11.00	-6.64
Mid	5300	3.962	4.08	11.00	-6.92
High	5320	3.661	3.78	11.00	-7.22

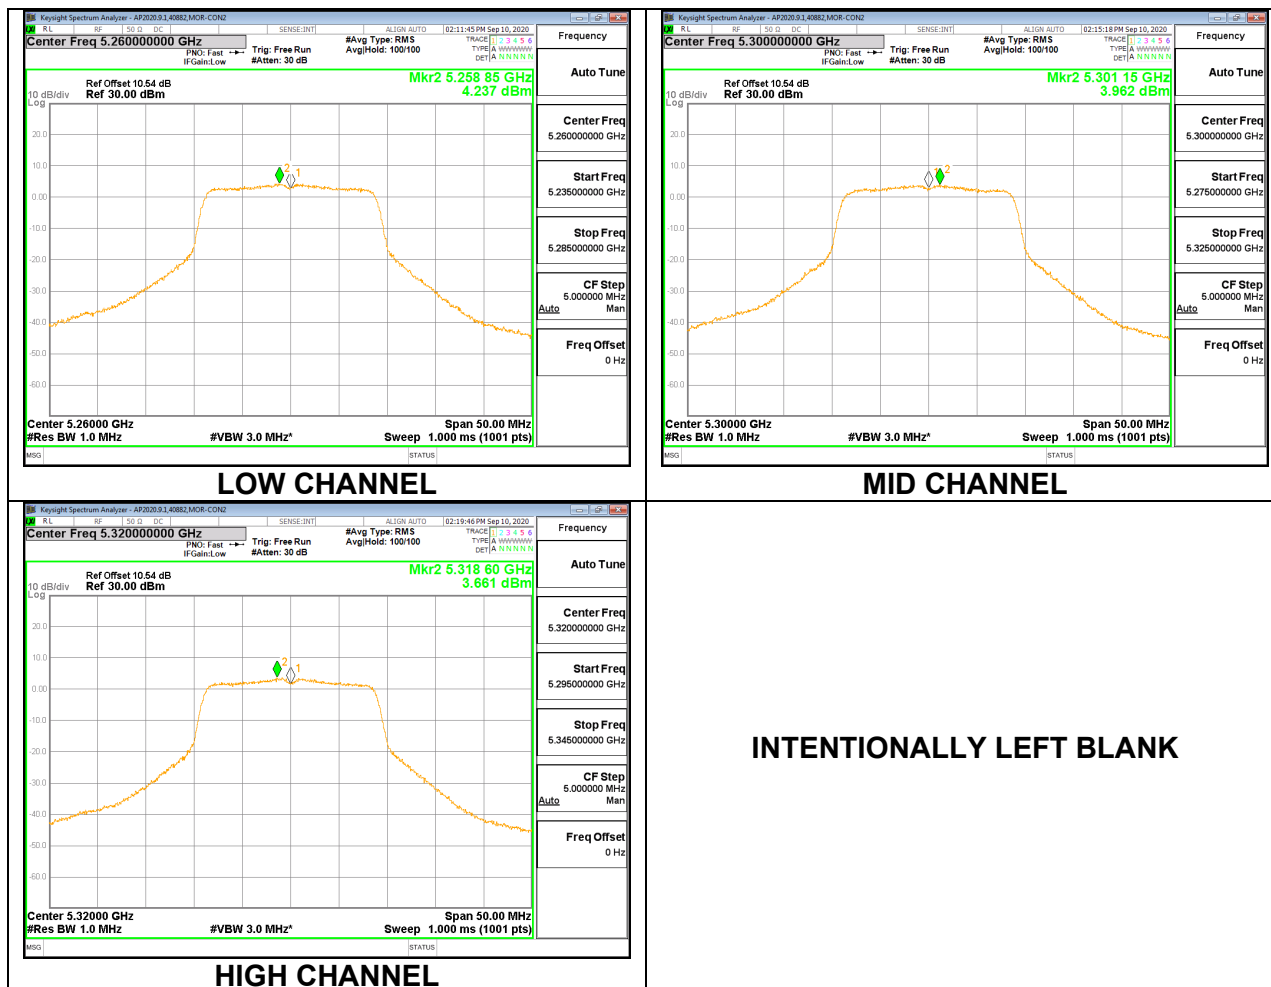

9.5.25. 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	42.30	6.37	23.63	10.63
High	5310	54.00	6.37	23.63	10.63


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.67	11.67	23.63	-11.96
High	5310	11.87	11.87	23.63	-11.76

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	-1.126	-0.90	10.63	-11.53
High	5310	-1.540	-1.31	10.63	-11.94

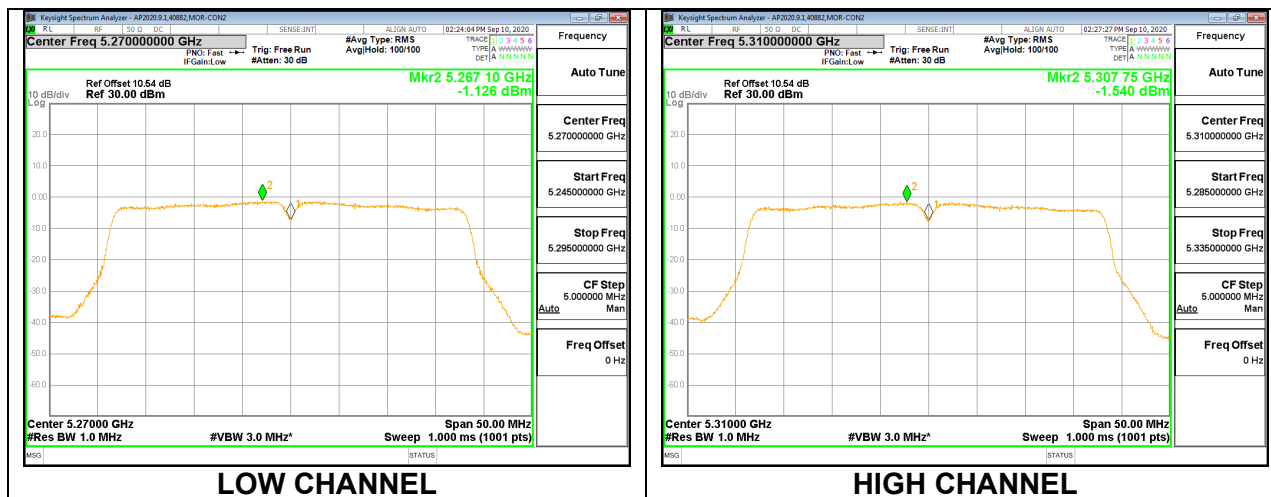

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	36.036	6.37	23.63	11.00
High	5310	36.284	6.37	23.63	11.00


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.67	11.67	23.63	-11.96
High	5310	11.87	11.87	23.63	-11.76

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	-1.126	-0.90	11.00	-11.90
High	5310	-1.540	-1.31	11.00	-12.31

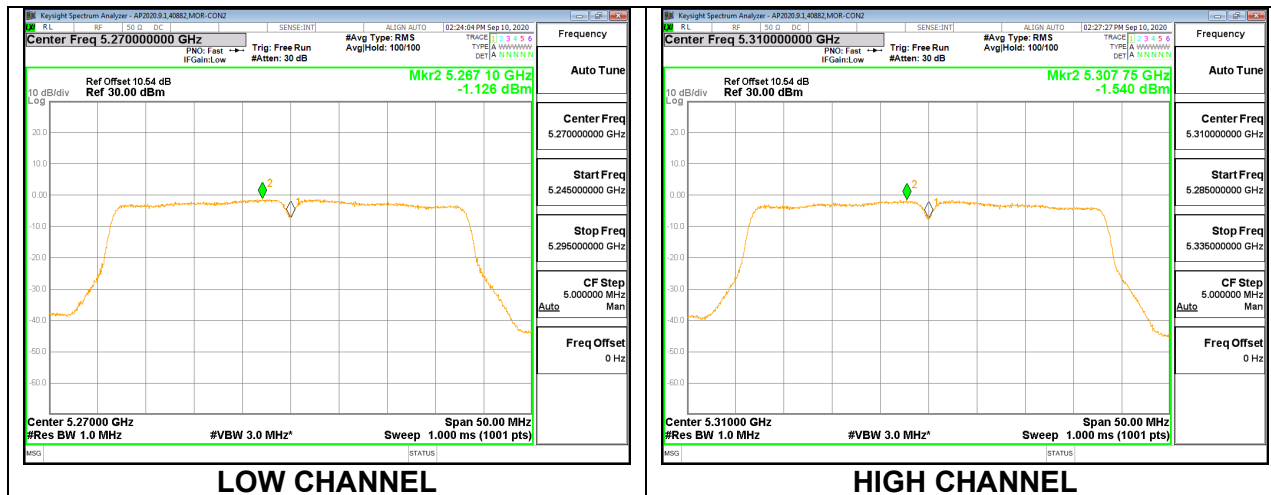

9.5.26. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	86.20	6.37	23.63	10.63


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	10.04	10.04	23.63	-13.59

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-7.117	-6.66	10.63	-17.29

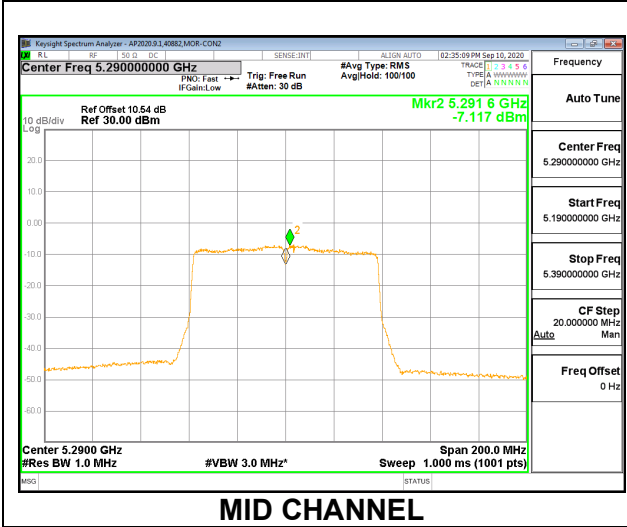

INTENTIONALLY LEFT BLANK

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-10

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	75.794	6.37	23.63	11.00


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	10.04	10.04	23.63	-13.59

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-7.117	-6.66	11.00	-17.66

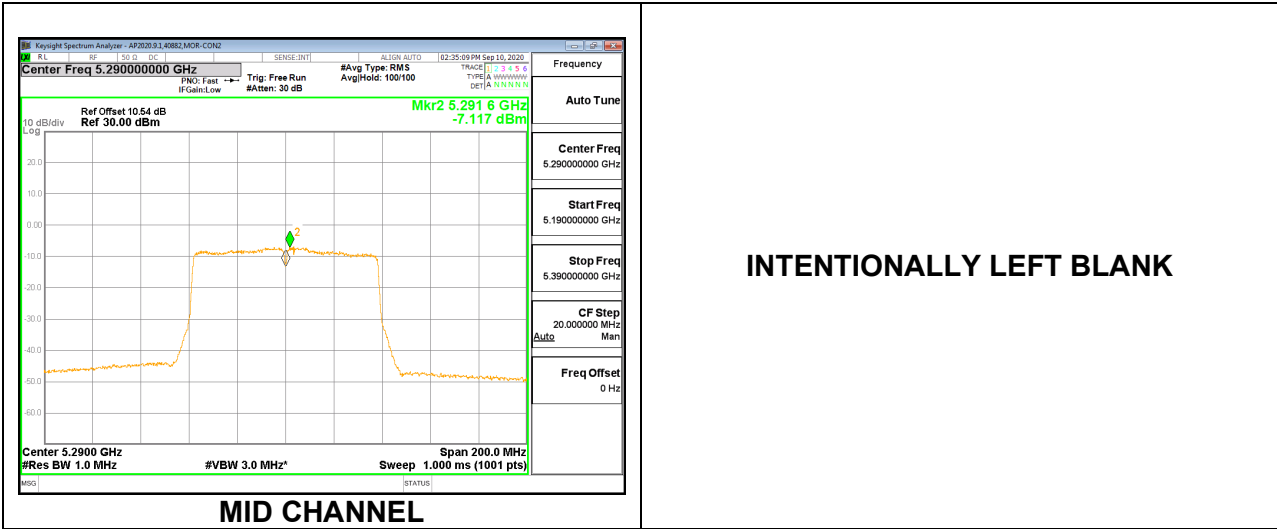

9.5.27. 802.11a MODE IN THE 5.6 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	26.90	6.37	23.63	10.63
Mid	5580	27.20	6.37	23.63	10.63
High	5700	27.40	6.37	23.63	10.63


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.70	13.70	23.63	-9.93
Mid	5580	13.66	13.66	23.63	-9.97
High	5700	13.98	13.98	23.63	-9.65

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	2.77	2.88	10.63	-7.75
Mid	5580	3.31	3.42	10.63	-7.21
High	5700	3.87	3.98	10.63	-6.65

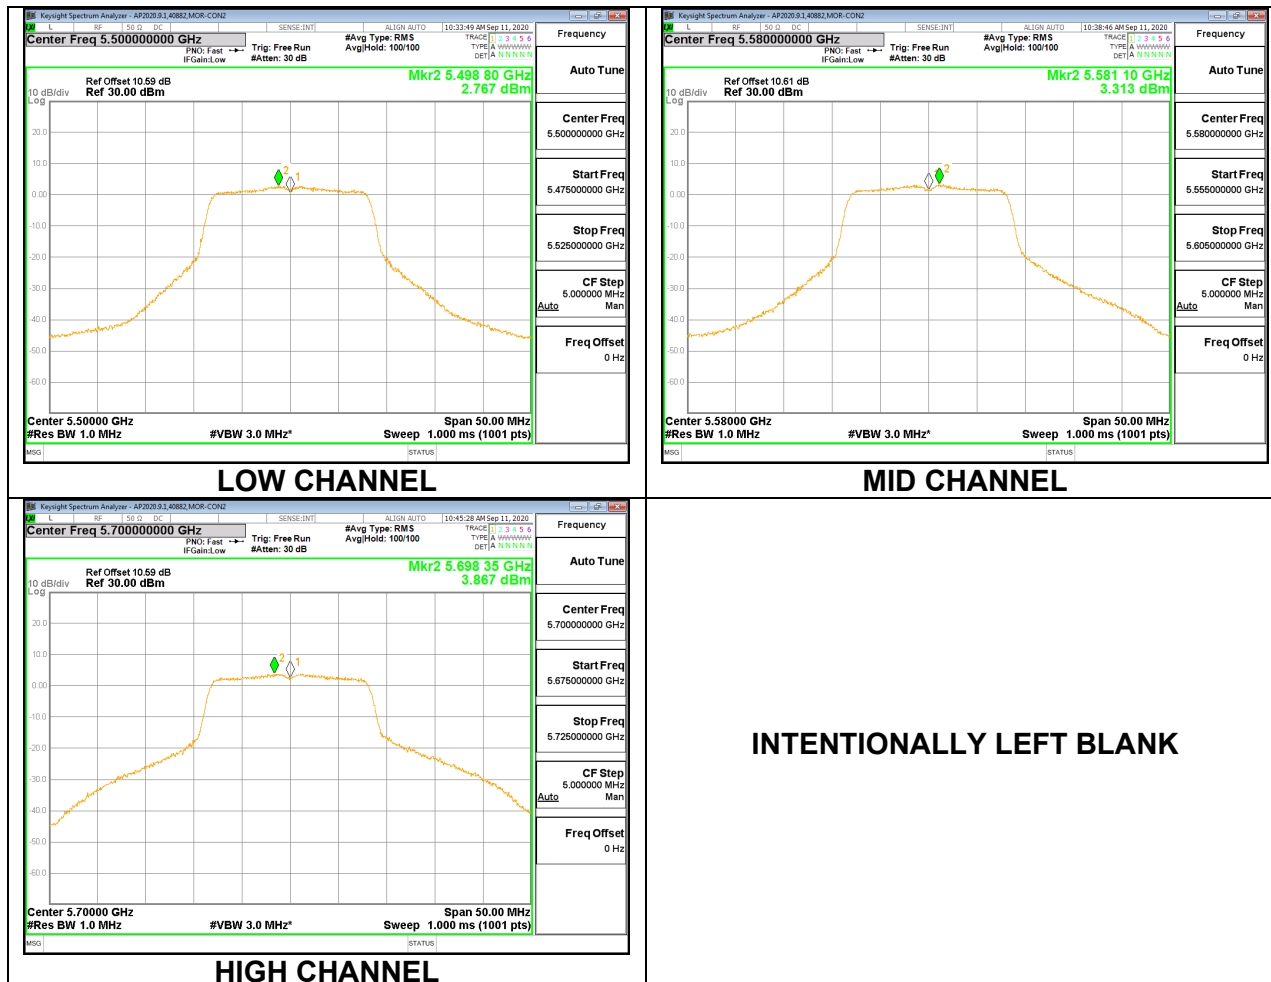

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	16.563	6.37	22.82	10.63
Mid	5580	16.609	6.37	22.83	10.63
High	5700	16.583	6.37	22.83	10.63


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.70	13.70	22.82	-9.12
Mid	5580	13.66	13.66	22.83	-9.17
High	5700	13.98	13.98	22.83	-8.85

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	2.77	2.88	10.63	-7.75
Mid	5580	3.31	3.42	10.63	-7.21
High	5700	3.87	3.98	10.63	-6.65

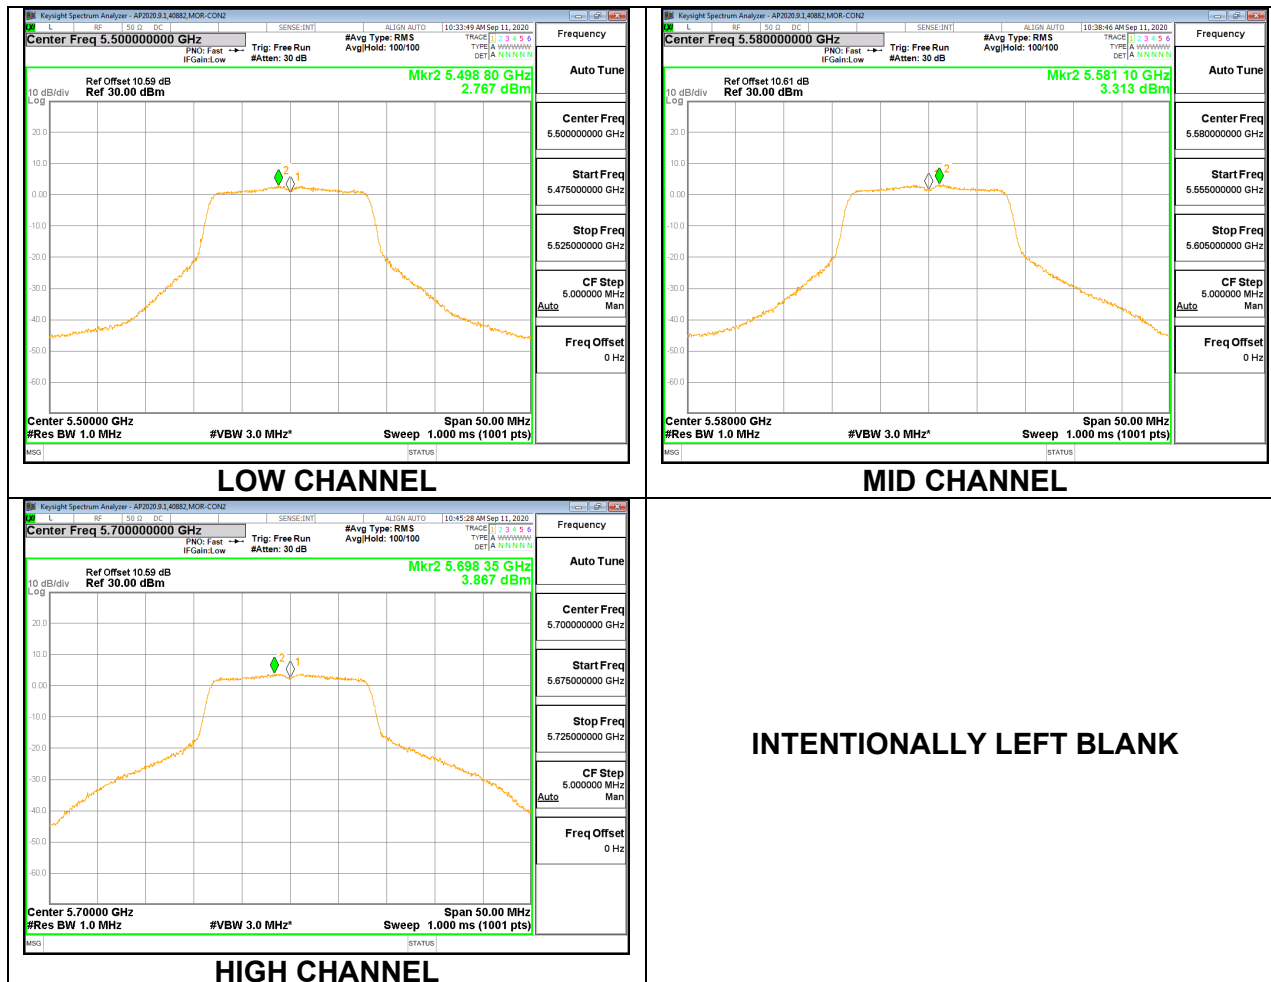

9.5.28. 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	26.30	6.37	23.63	10.63
Mid	5580	27.60	6.37	23.63	10.63
High	5700	27.40	6.37	23.63	10.63


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.43	13.43	23.63	-10.20
Mid	5580	13.63	13.63	23.63	-10.00
High	5700	13.76	13.76	23.63	-9.87

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	2.23	2.35	10.63	-8.28
Mid	5580	3.01	3.13	10.63	-7.50
High	5700	3.45	3.57	10.63	-7.06

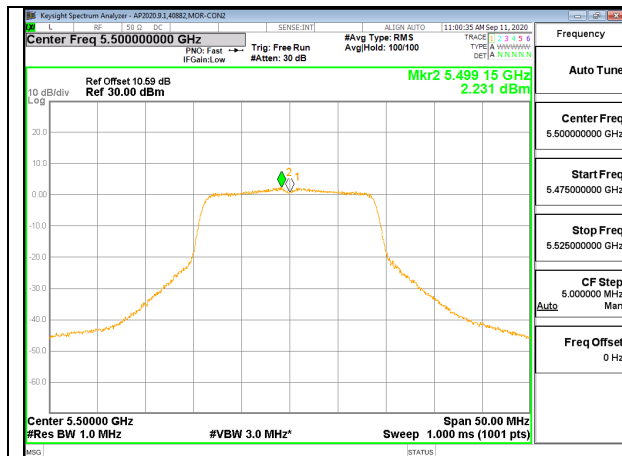

LOW CHANNEL

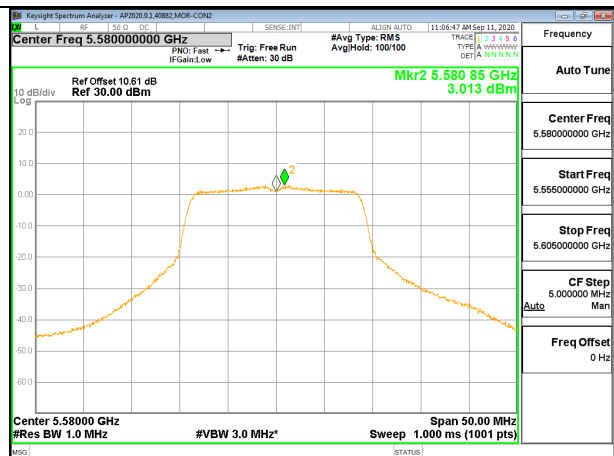

MID CHANNEL

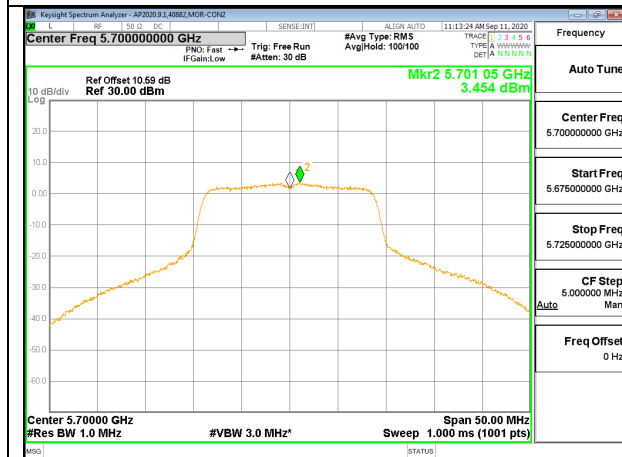

HIGH CHANNEL

INTENTIONALLY LEFT BLANK

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	17.699	6.37	23.11	10.63
Mid	5580	17.755	6.37	23.12	10.63
High	5700	17.788	6.37	23.13	10.63


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.43	13.43	23.11	-9.68
Mid	5580	13.63	13.63	23.12	-9.49
High	5700	13.76	13.76	23.13	-9.37

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	2.23	2.35	10.63	-8.28
Mid	5580	3.01	3.13	10.63	-7.50
High	5700	3.45	3.57	10.63	-7.06

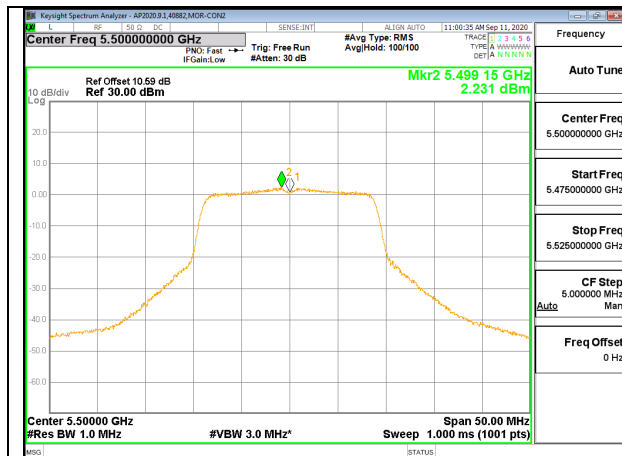

LOW CHANNEL

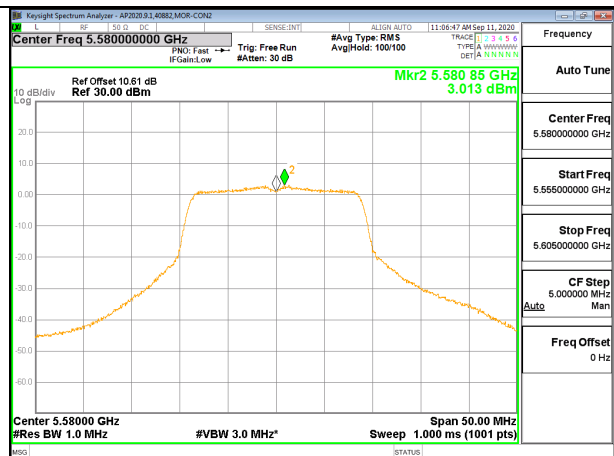

MID CHANNEL

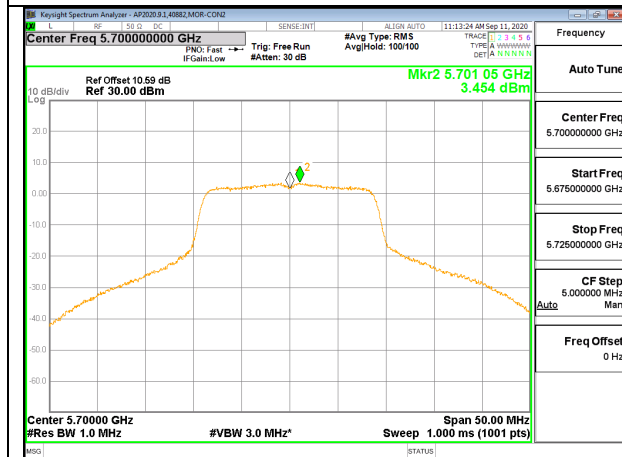

HIGH CHANNEL

INTENTIONALLY LEFT BLANK

9.5.29. 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	42.80	6.37	23.63	10.63
Mid	5550	42.50	6.37	23.63	10.63
High	5670	42.80	6.37	23.63	10.63


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.61	12.61	23.63	-11.02
Mid	5550	12.49	12.49	23.63	-11.14
High	5670	12.68	12.68	23.63	-10.95

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	-1.14	-0.91	10.63	-11.54
Mid	5550	-0.61	-0.38	10.63	-11.01
High	5670	1.25	1.48	10.63	-9.15

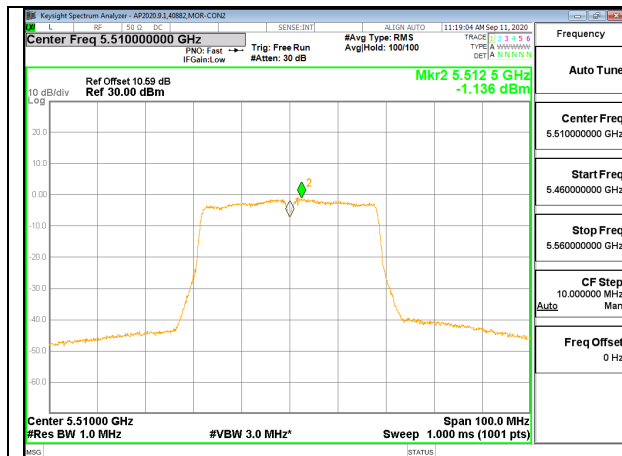

LOW CHANNEL

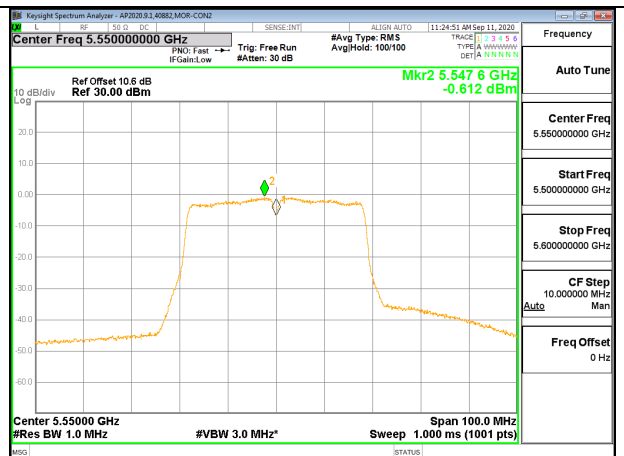

MID CHANNEL

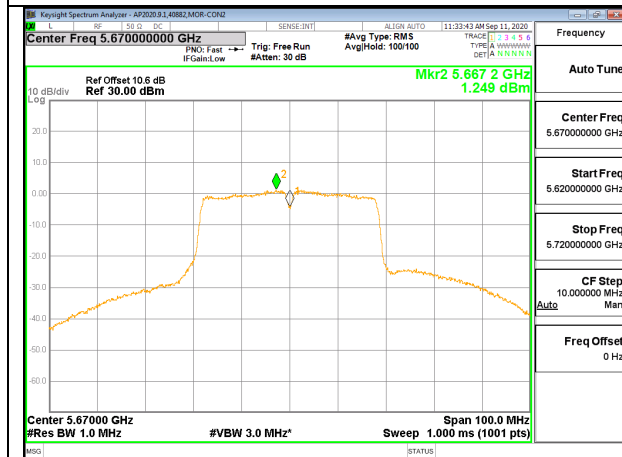

HIGH CHANNEL

INTENTIONALLY LEFT BLANK

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	36.195	6.37	23.63	10.63
Mid	5550	36.145	6.37	23.63	10.63
High	5670	36.130	6.37	23.63	10.63


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.61	12.61	23.63	-11.02
Mid	5550	12.49	12.49	23.63	-11.14
High	5670	12.68	12.68	23.63	-10.95

PSD Results


Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	-1.14	-0.91	10.63	-11.54
Mid	5550	-0.61	-0.38	10.63	-11.01
High	5670	1.25	1.48	10.63	-9.15

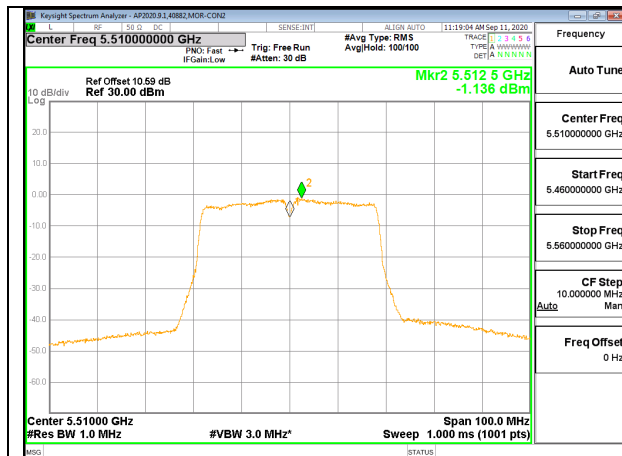

LOW CHANNEL

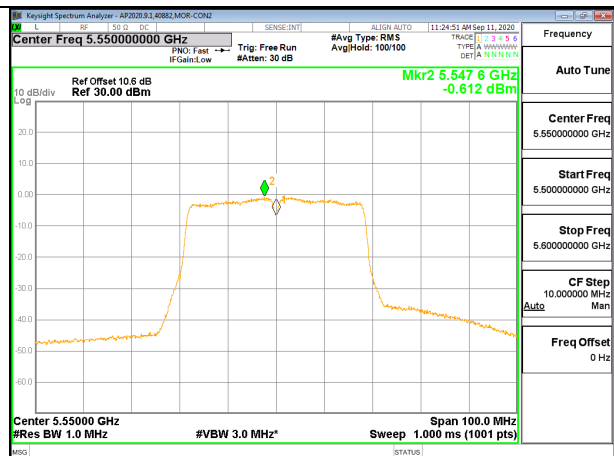

MID CHANNEL

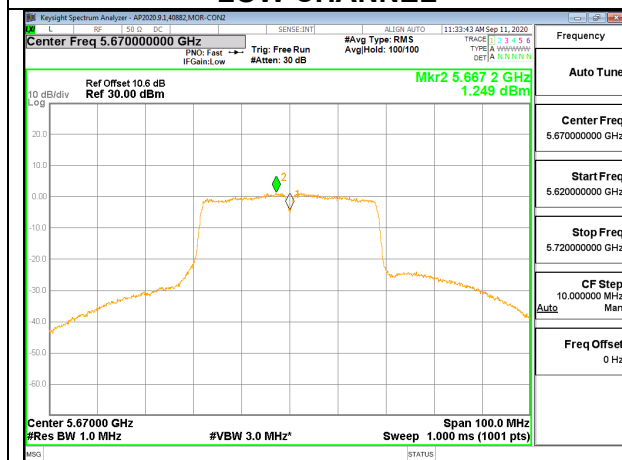

HIGH CHANNEL

INTENTIONALLY LEFT BLANK

9.5.30. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	135.80	6.37	23.63	10.63
High	5610	90.80	6.37	23.63	10.63


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.49	11.49	23.63	-12.14
High	5610	12.81	12.81	23.63	-10.82

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	-5.50	-5.04	10.63	-15.67
High	5610	-3.83	-3.37	10.63	-14.00

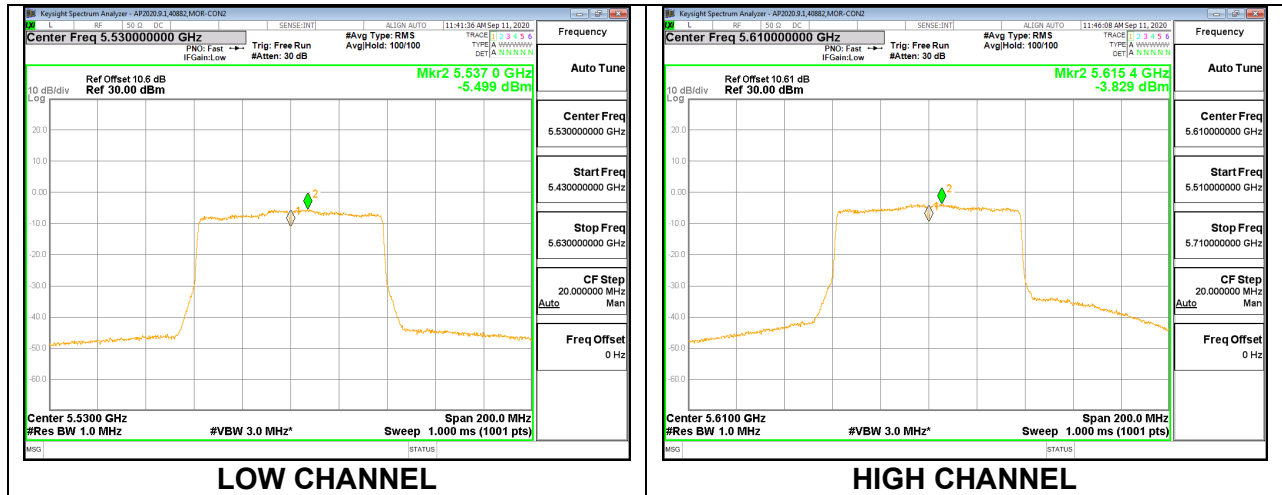

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	75.843	6.37	23.63	10.63
High	5610	75.355	6.37	23.63	10.63


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.49	11.49	23.63	-12.14
High	5610	12.81	12.81	23.63	-10.82

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	-5.50	-5.04	10.63	-15.67
High	5610	-3.83	-3.37	10.63	-14.00

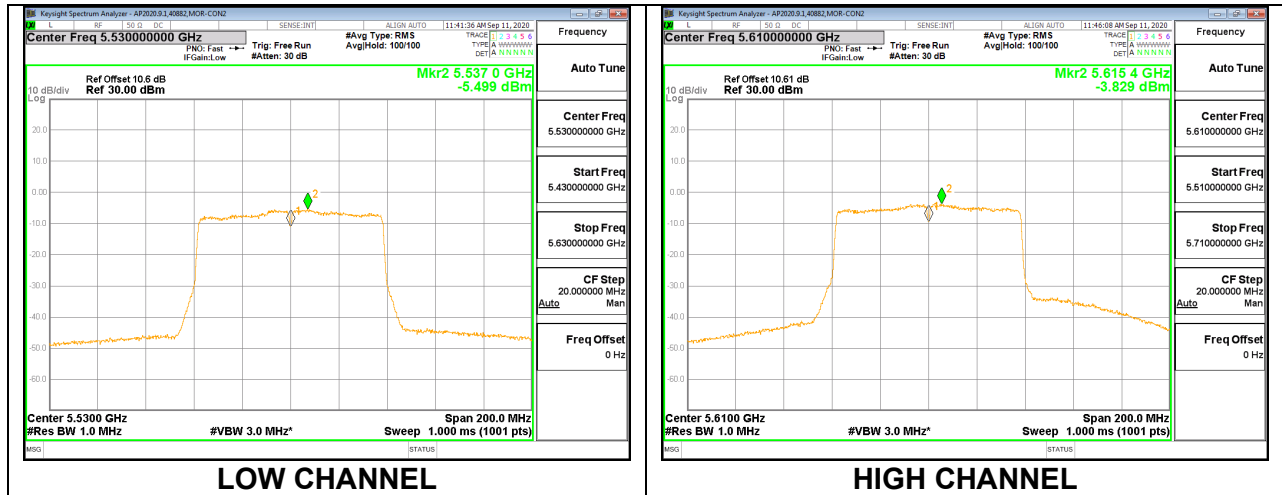

9.5.31. 802.11a MODE IN THE 5.8 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	6.37	29.63	29.63
Mid	5785	6.37	29.63	29.63
High	5825	6.37	29.63	29.63


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	14.617	14.617	29.63	-15.01
Mid	5785	14.486	14.486	29.63	-15.14
High	5825	14.107	14.107	29.63	-15.52

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	1.743	1.853	29.63	-27.78
Mid	5785	2.126	2.236	29.63	-27.39
High	5825	1.784	1.894	29.63	-27.74

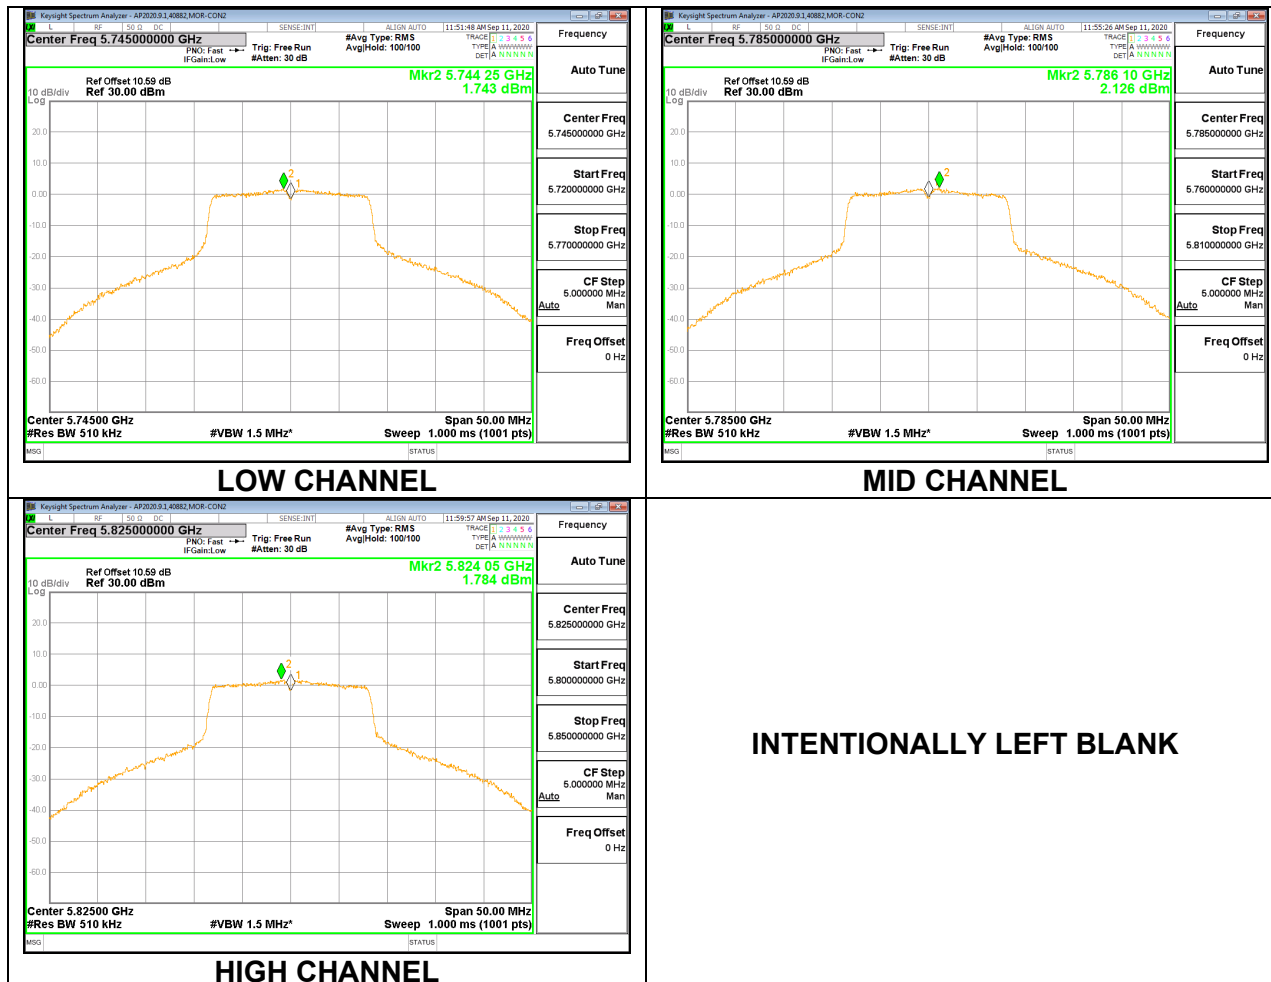

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	6.37	29.63	29.63
Mid	5785	6.37	29.63	29.63
High	5825	6.37	29.63	29.63


Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	14.617	14.617	29.63	-15.01
Mid	5785	14.486	14.486	29.63	-15.14
High	5825	14.107	14.107	29.63	-15.52

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	1.743	1.853	29.63	-27.78
Mid	5785	2.126	2.236	29.63	-27.39
High	5825	1.784	1.894	29.63	-27.74

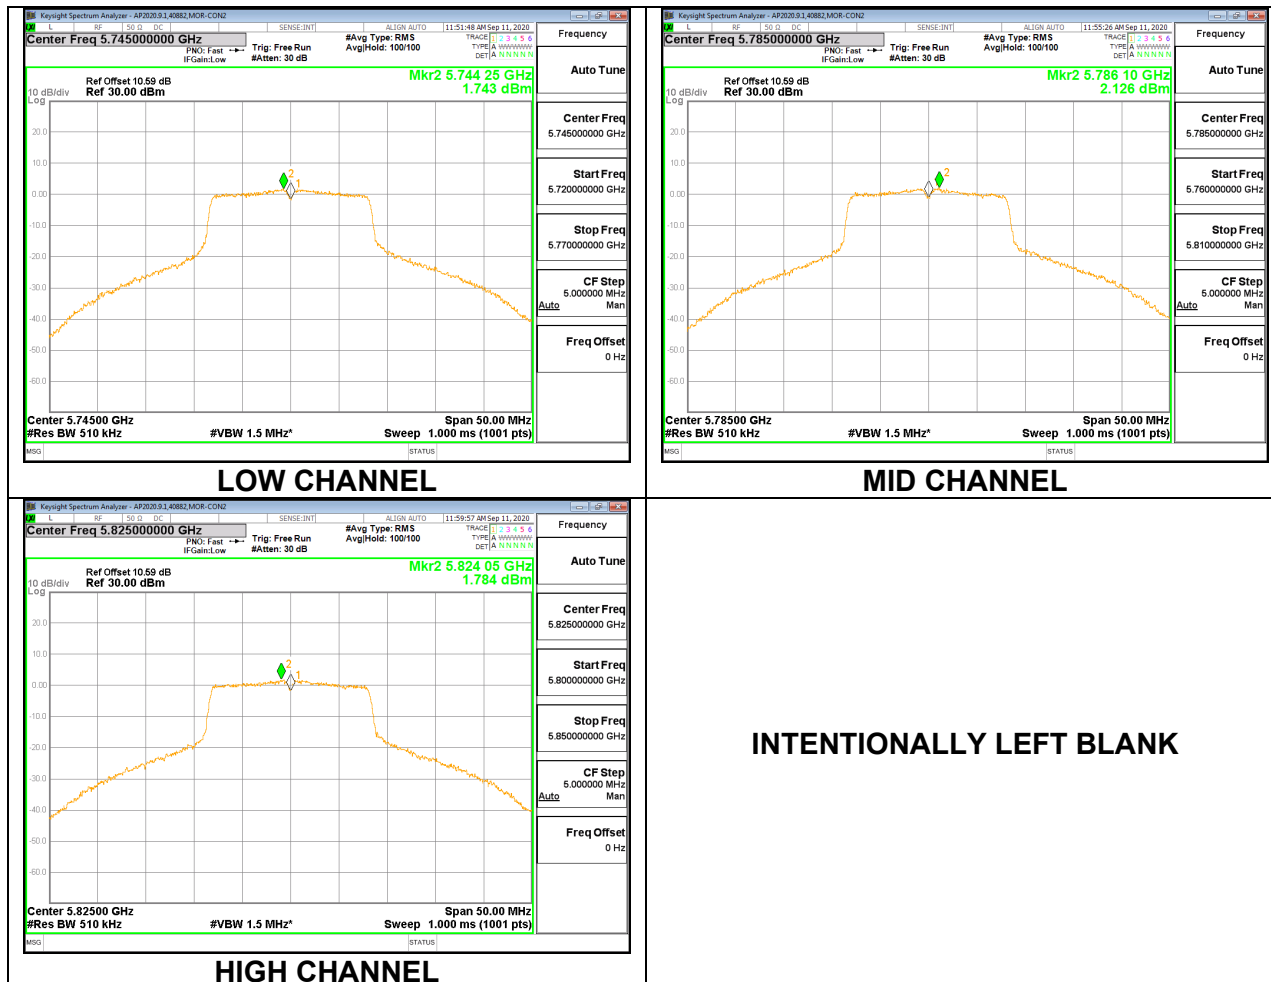

9.5.32. 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	6.37	29.63	29.63
Mid	5785	6.37	29.63	29.63
High	5825	6.37	29.63	29.63


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	14.359	14.359	29.63	-15.27
Mid	5785	14.273	14.273	29.63	-15.36
High	5825	14.346	14.346	29.63	-15.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	1.441	1.561	29.63	-28.07
Mid	5785	1.908	2.028	29.63	-27.60
High	5825	1.409	1.529	29.63	-28.10

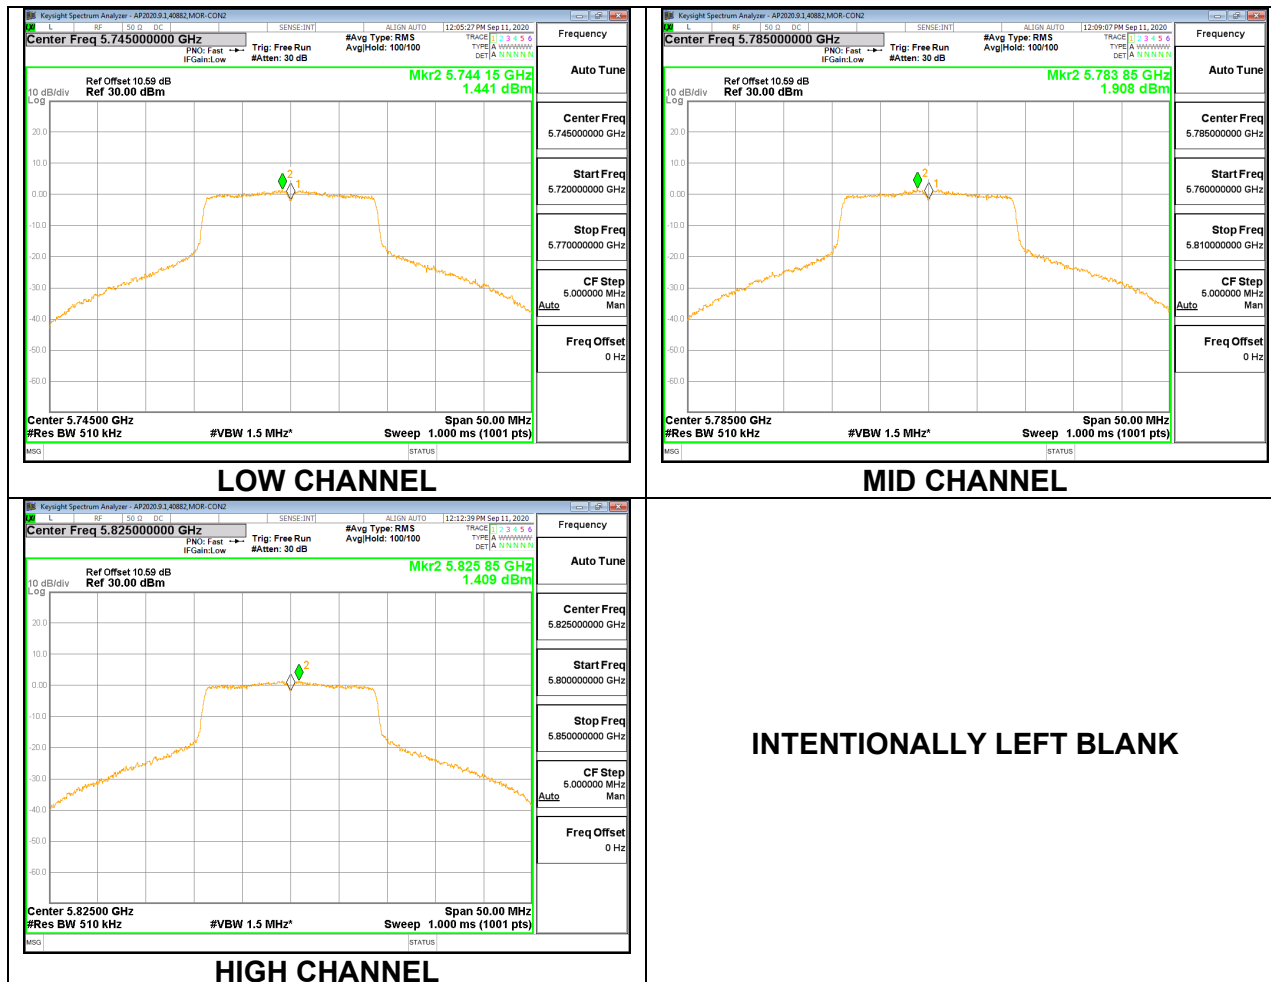

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	6.37	29.63	29.63
Mid	5785	6.37	29.63	29.63
High	5825	6.37	29.63	29.63


Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	14.359	14.359	29.63	-15.27
Mid	5785	14.273	14.273	29.63	-15.36
High	5825	14.346	14.346	29.63	-15.28

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	1.441	1.561	29.63	-28.07
Mid	5785	1.908	2.028	29.63	-27.60
High	5825	1.409	1.529	29.63	-28.10

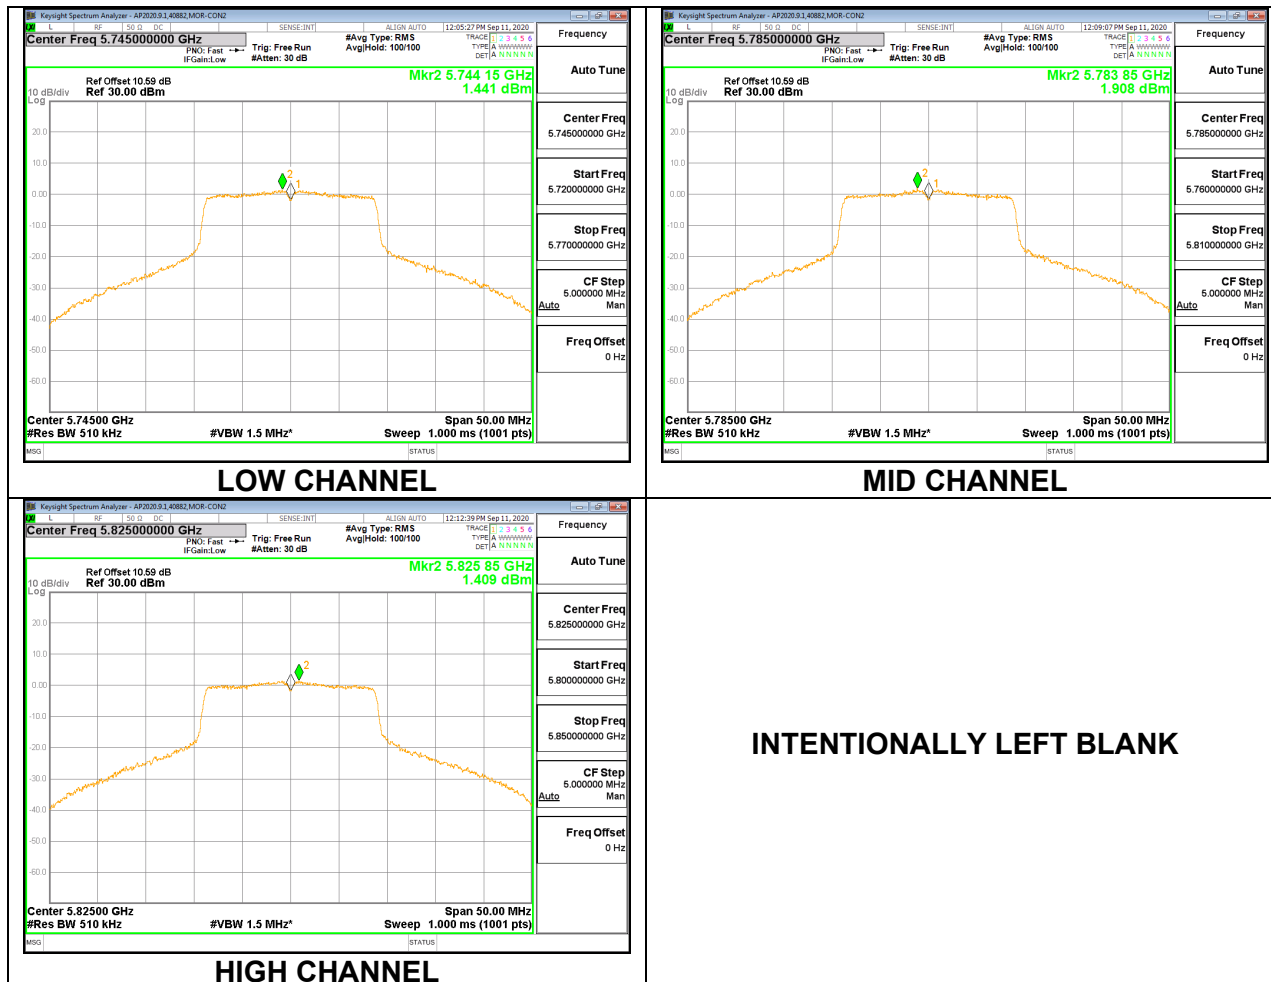

9.5.33. 802.11n HT40 MODE IN THE 5.8 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5755	6.37	29.63	29.63
High	5795	6.37	29.63	29.63


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	14.410	14.410	29.63	-15.22
High	5795	14.679	14.679	29.63	-14.95

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-0.692	-0.462	29.63	-30.09
High	5795	-1.053	-0.823	29.63	-30.45

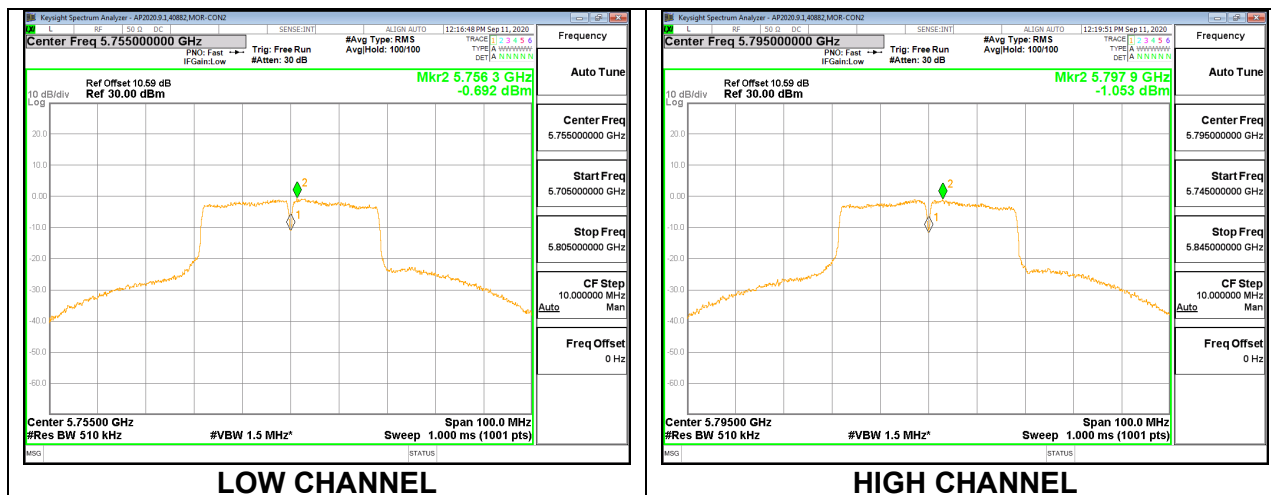

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5755	6.37	29.63	29.63
High	5795	6.37	29.63	29.63


Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	14.410	14.410	29.63	-15.22
High	5795	14.679	14.679	29.63	-14.95

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-0.692	-0.462	29.63	-30.09
High	5795	-1.053	-0.823	29.63	-30.45

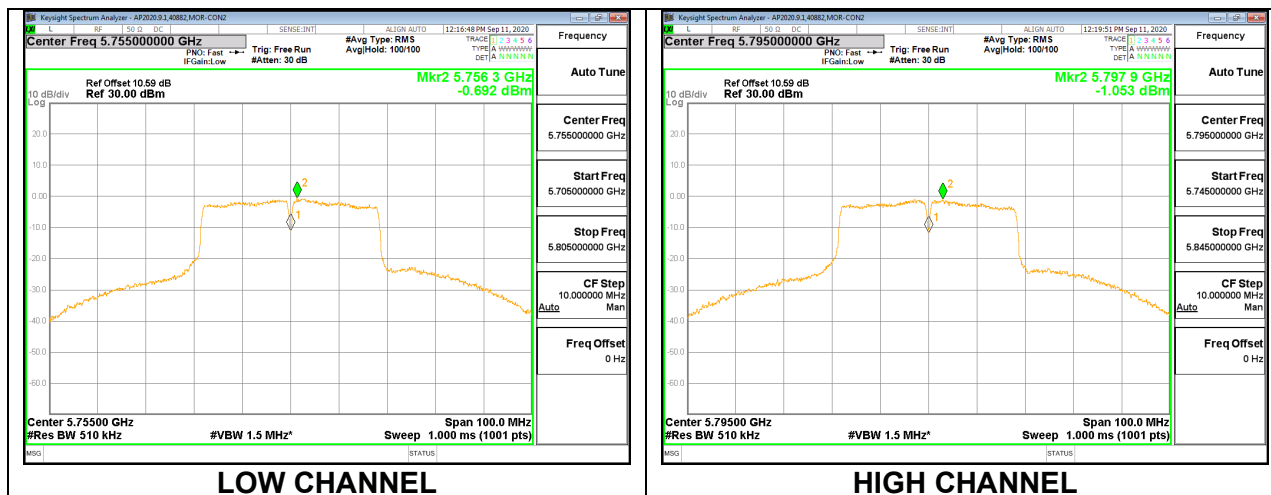

9.5.34. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX External Antenna MODE (FCC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Mid	5775	6.37	29.63	29.63


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	13.655	13.655	29.63	-15.98

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	-5.489	-5.029	29.63	-34.66

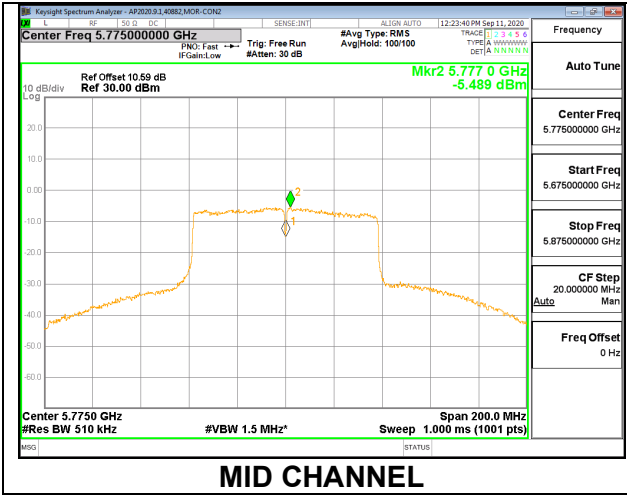

INTENTIONALLY LEFT BLANK

1TX External Antenna MODE (IC)

Test Engineer:	40882
Test Date:	2020-06-24, 2020-09-11

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Mid	5775	6.37	29.63	29.63


Duty Cycle CF (dB)	0.46	Included in Calculations of Corr'd PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	13.655	13.655	29.63	-15.98

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5775	-5.489	-5.029	29.63	-34.66

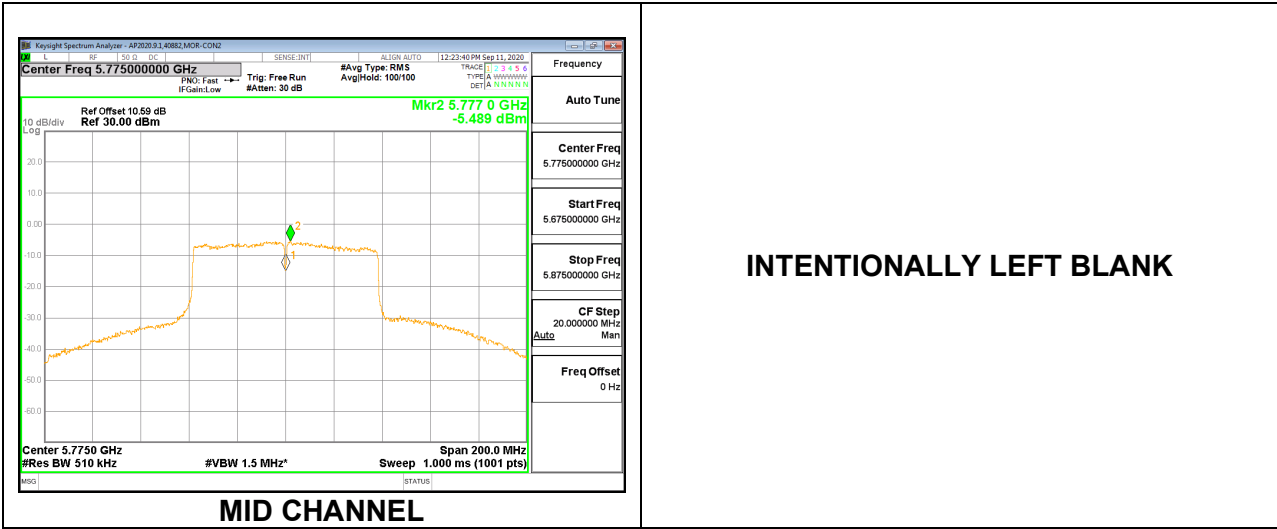

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands
FCC §15.407(b)(1-3) -Un-Restricted bands

After January 01, 2019 for Outside of the Restricted Bands Emissions

RSS-GEN Section 8.9 and 8.10 – Restricted bands
RSS 247 Issue 2 Sections – Non-restricted bands:

- 6.2.1.2 (for 5150-5250 MHz band)
- 6.2.2.2 (for 5250-5350 MHz band)
- 6.2.3.2 (for 5470-5600 MHz and 5650-5725 MHz bands)
- 6.2.4.2 (for 5725-5850 MHz band)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements. The particular averaging method used for this test program was voltage averaging.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power and PSD as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

3D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel).

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND

1TX External Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

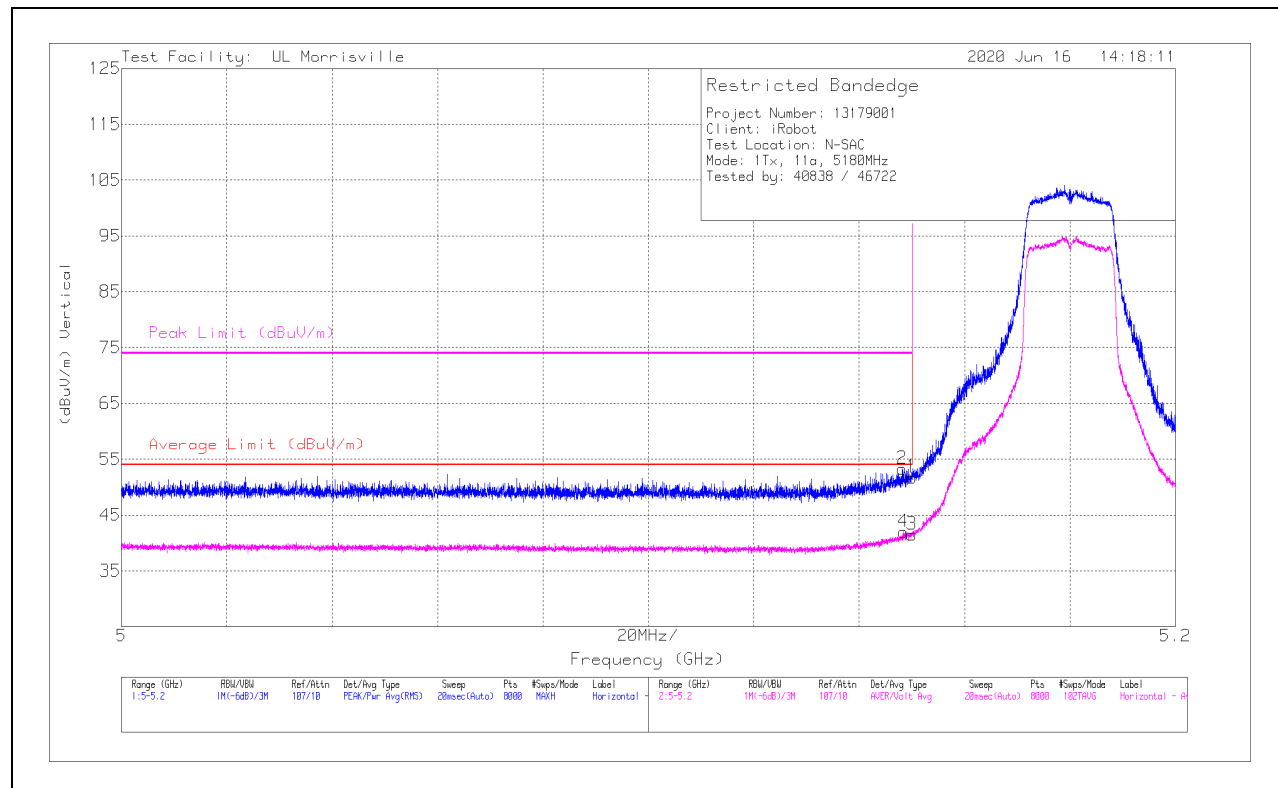

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	39.24	Pk	34.2	-21.7	0	51.74	-	-	74	-22.26	30	120	H
2	*** 5.14817	40.78	Pk	34.2	-21.7	0	53.28	-	-	74	-20.72	30	120	H
3	*** 5.14999	28.78	ADV	34.2	-21.7	.23	41.51	54	-12.49	-	-	30	120	H
4	*** 5.14839	29.24	ADV	34.2	-21.7	.23	41.97	54	-12.03	-	-	30	120	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

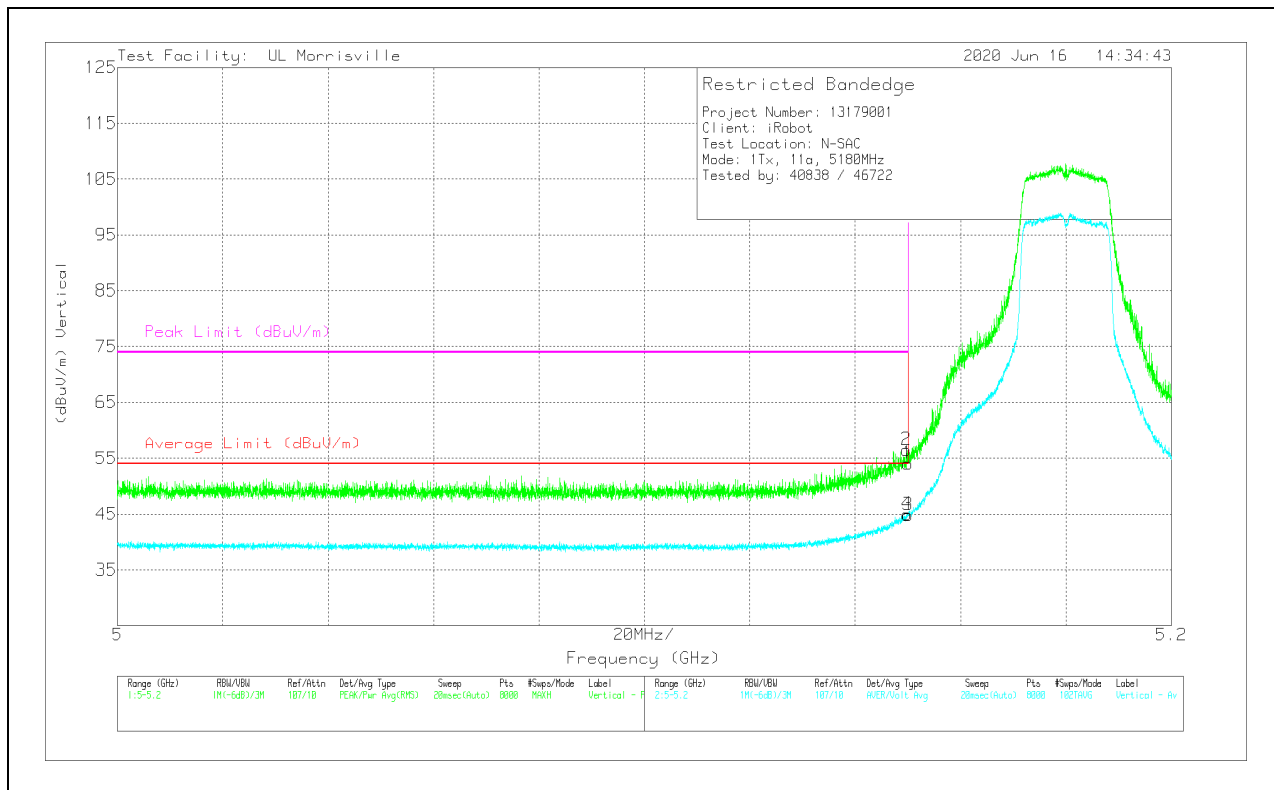

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB/(m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.14999	41.54	Pk	34.2	-21.7	0	54.04	-	-	74	-19.96	36	102	V
2	* ** 5.14967	43.97	Pk	34.2	-21.7	0	56.47	-	-	74	-17.53	36	102	V
3	* ** 5.14999	32.08	ADV	34.2	-21.7	.23	44.81	54	-9.19	-	-	36	102	V
4	* ** 5.14979	32.18	ADV	34.2	-21.7	.23	44.91	54	-9.09	-	-	36	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

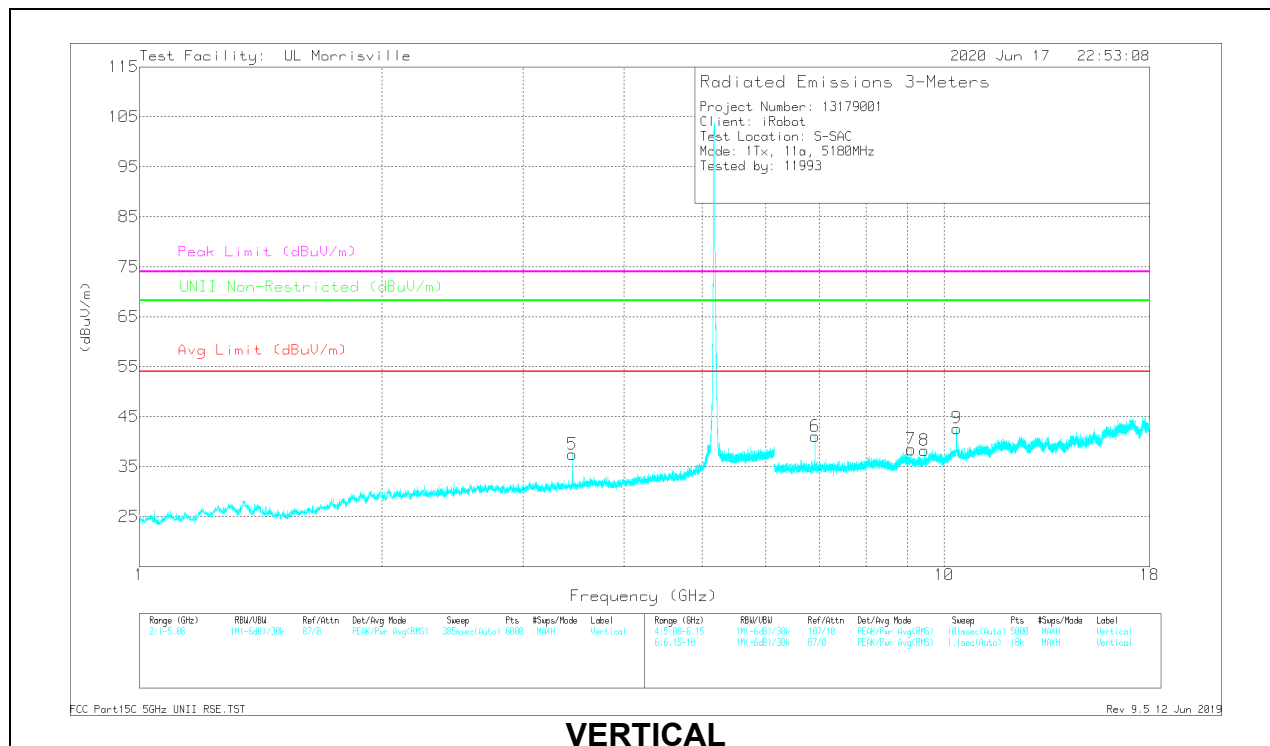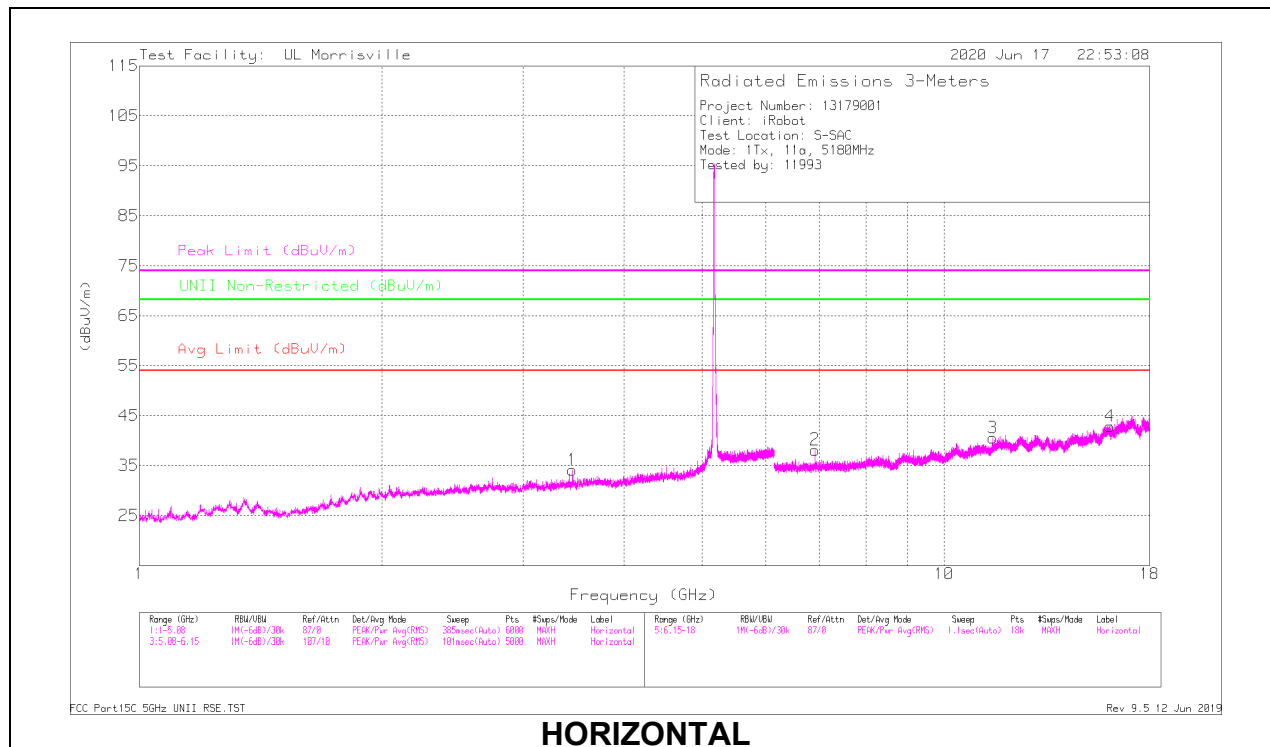

RADIATED EMISSIONS

Masrker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0078 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.48716	33.8	PK-U	38.2	-24.4	0	47.6	-	-	74	-26.4	-	-	28	112	H
	* ** 11.48659	21.81	ADV	38.2	-24.4	.23	35.84	54	-18.16	-	-	-	-	28	112	H
4	* ** 16.07067	34.91	PK-U	40.5	-24.6	0	50.81	-	-	74	-23.19	-	-	37	333	H
	* ** 16.07274	22.61	ADV	40.5	-24.7	.23	38.64	54	-15.36	-	-	-	-	37	333	H
7	* ** 9.10047	35.98	PK-U	36.2	-26	0	46.18	-	-	74	-27.82	-	-	5	146	V
	* ** 9.09984	23.62	ADV	36.2	-26	.23	34.05	54	-19.95	-	-	-	-	5	146	V
8	* ** 9.45688	36.35	PK-U	36.5	-26.5	0	46.35	-	-	74	-27.65	-	-	275	147	V
	* ** 9.45481	23.8	ADV	36.5	-26.5	.23	34.03	54	-19.97	-	-	-	-	275	147	V
5	3.45309	44.26	PK-U	32.9	-32.5	0	44.66	-	-	-	-	68.2	-23.54	84	108	V
1	3.45341	40.41	PK-U	32.9	-32.5	0	40.81	-	-	-	-	68.2	-27.39	245	130	H
6	6.90644	41.99	PK-U	35.5	-28.5	0	48.99	-	-	-	-	68.2	-19.21	76	104	V
2	6.90652	40.12	PK-U	35.5	-28.5	0	47.12	-	-	-	-	68.2	-21.08	311	114	H
9	10.36103	40.89	PK-U	37.3	-24.9	0	53.29	-	-	-	-	68.2	-14.91	284	209	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL RESULTS

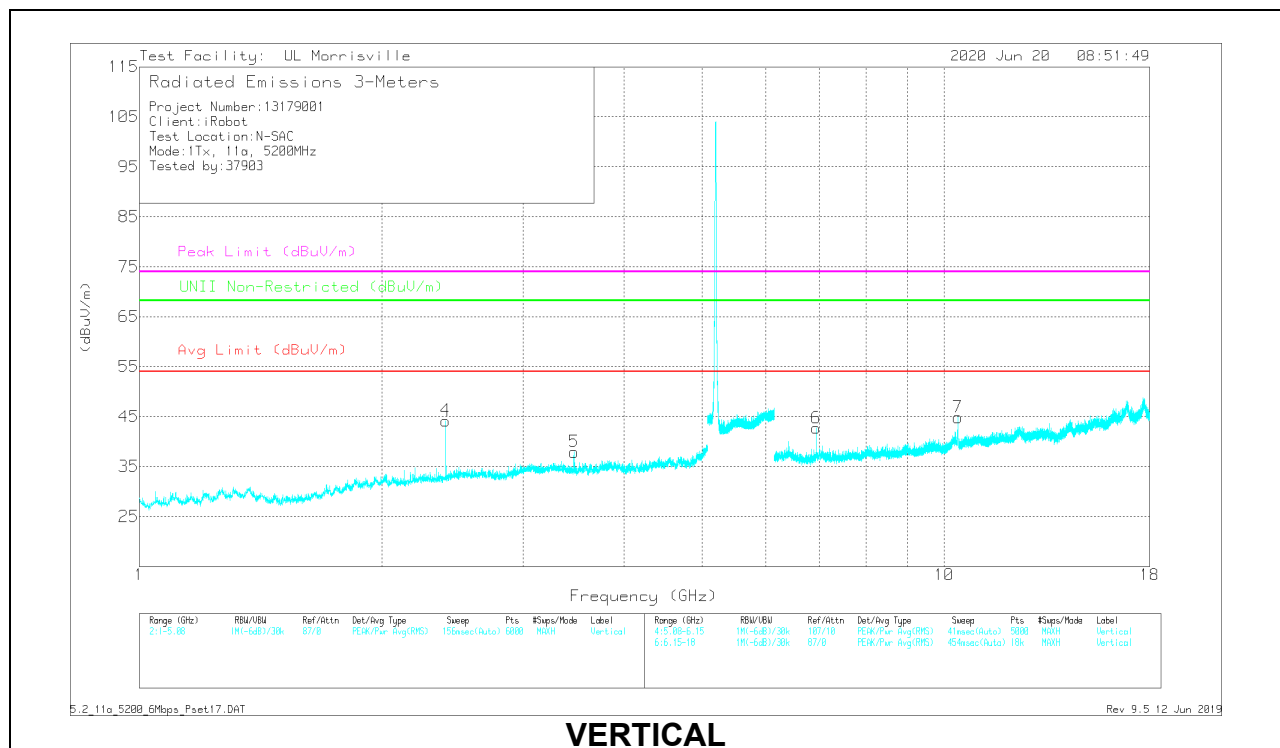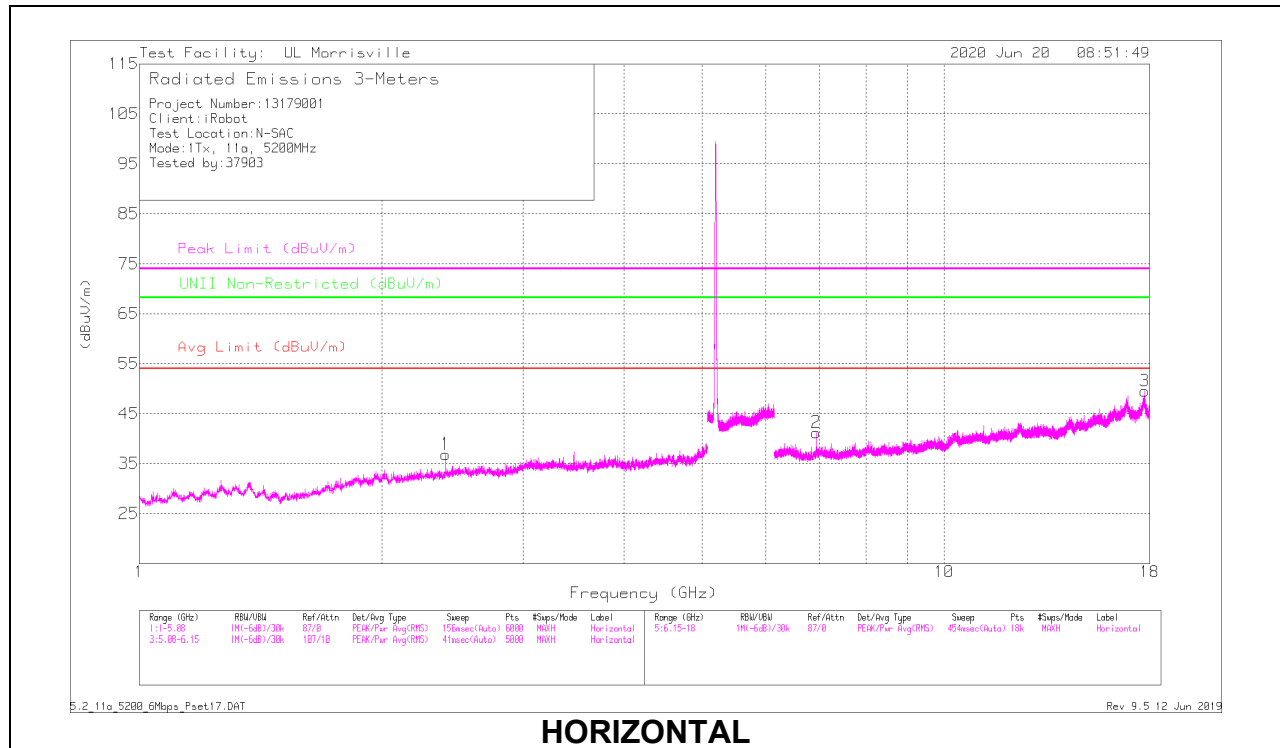

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 17.74978	33.38	PK-U	41.6	-20.1	0	54.88	-	-	74	-19.12	-	-	88	366	H
	* ** 17.74947	20.02	ADV	41.6	-20	.23	41.85	54	-12.15	-	-	-	-	88	366	H
1	2.40219	45.54	PK-U	31.9	-33.6	0	43.84	-	-	-	-	68.2	-24.36	357	201	H
2	6.93318	39.72	PK-U	35.8	-28.7	0	46.82	-	-	-	-	68.2	-21.38	313	112	H
4	2.40212	47.94	PK-U	31.9	-33.6	0	46.24	-	-	-	-	68.2	-21.96	195	186	V
5	3.4667	45.31	PK-U	32.9	-32.8	0	45.41	-	-	-	-	68.2	-22.79	45	203	V
6	6.9333	41.34	PK-U	35.8	-28.7	0	48.44	-	-	-	-	68.2	-19.76	314	116	V
7	10.40024	40.56	PK-U	37.5	-25.6	0	52.46	-	-	-	-	68.2	-15.74	279	108	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL RESULTS

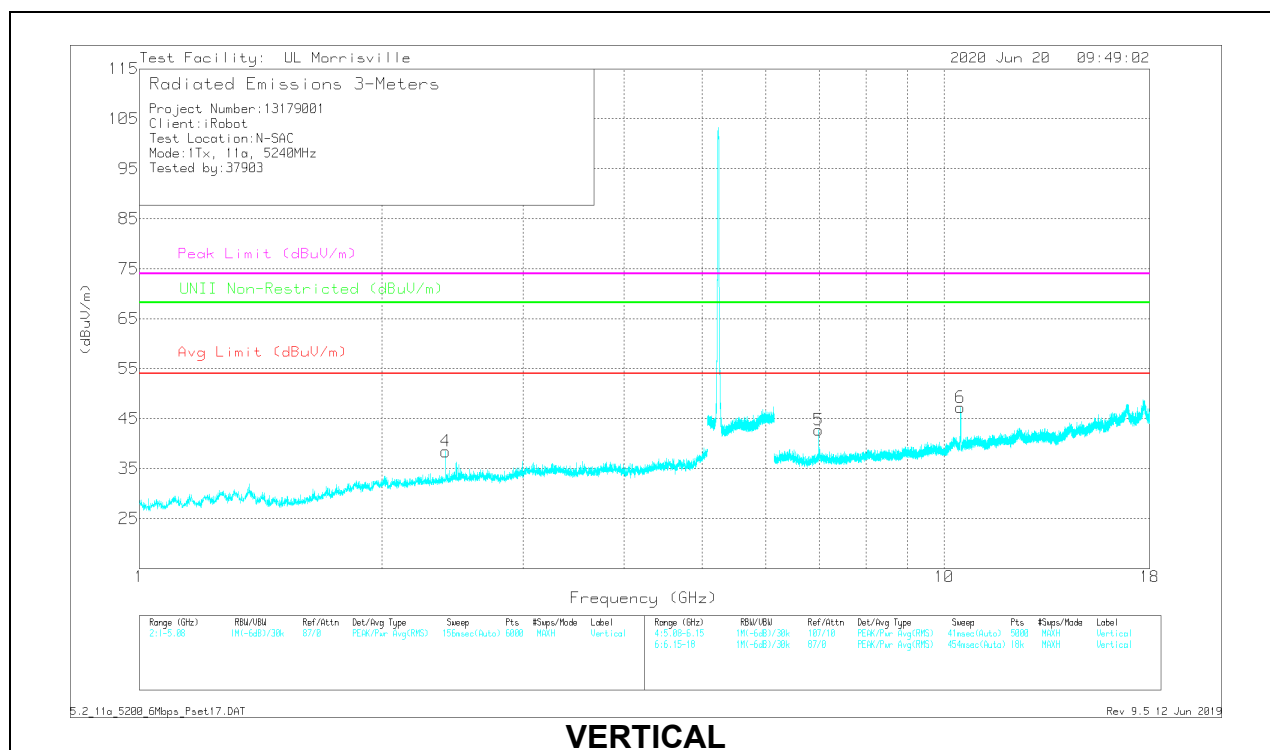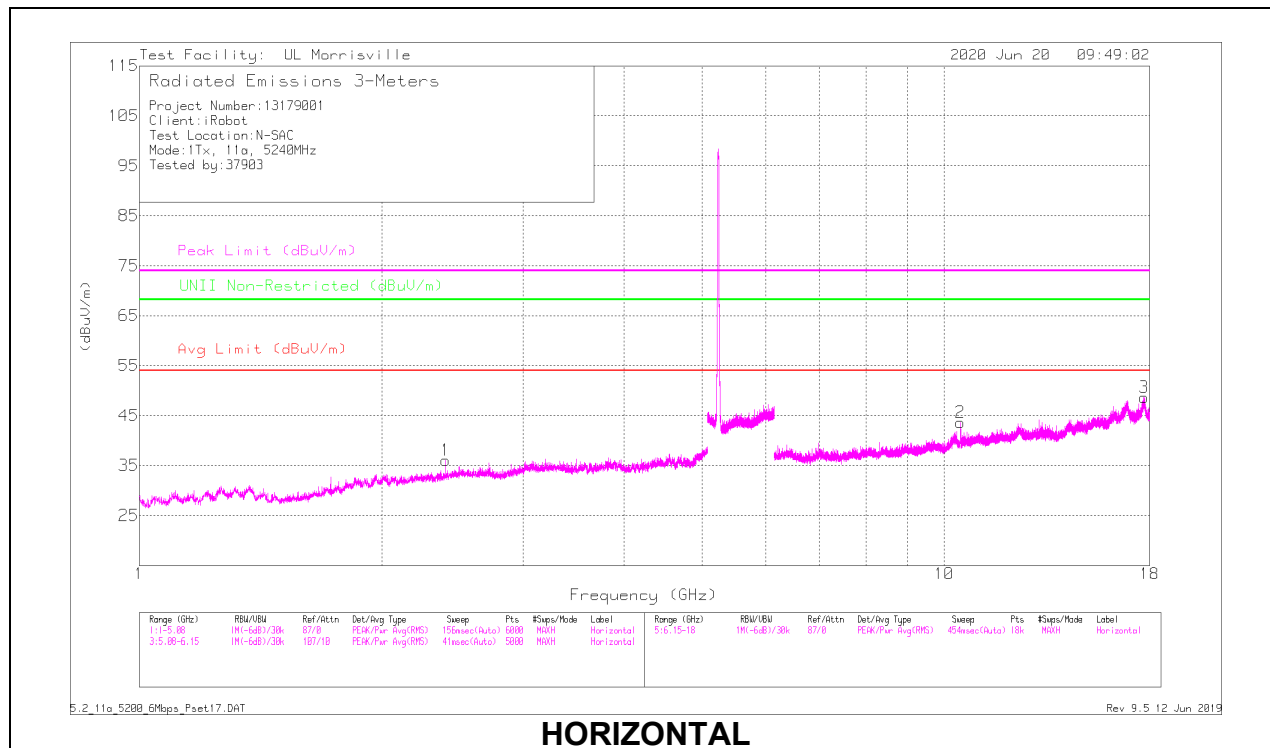

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 17.72728	32.57	PK-U	41.7	-19.7	0	54.57	-	-	74	-19.43	-	-	353	131	H
	* ** 17.72757	19.16	ADV	41.7	-19.7	.23	41.39	54	-12.59	-	-	-	-	353	131	H
4	2.40222	46.99	PK-U	31.9	-33.6	0	45.29	-	-	-	-	68.2	-22.91	167	193	V
1	2.4023	43.86	PK-U	31.9	-33.6	0	42.16	-	-	-	-	68.2	-26.04	130	350	H
5	6.98659	40.28	PK-U	35.7	-28.5	0	47.48	-	-	-	-	68.2	-20.72	356	378	V
6	10.47847	42.03	PK-U	37.6	-26.5	0	53.13	-	-	-	-	68.2	-15.07	170	203	V
2	10.48037	42.24	PK-U	37.6	-26.5	0	53.34	-	-	-	-	68.2	-14.86	344	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


PK-U - Maximum Peak

ADV - Linear Voltage Average

1TX PCB Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

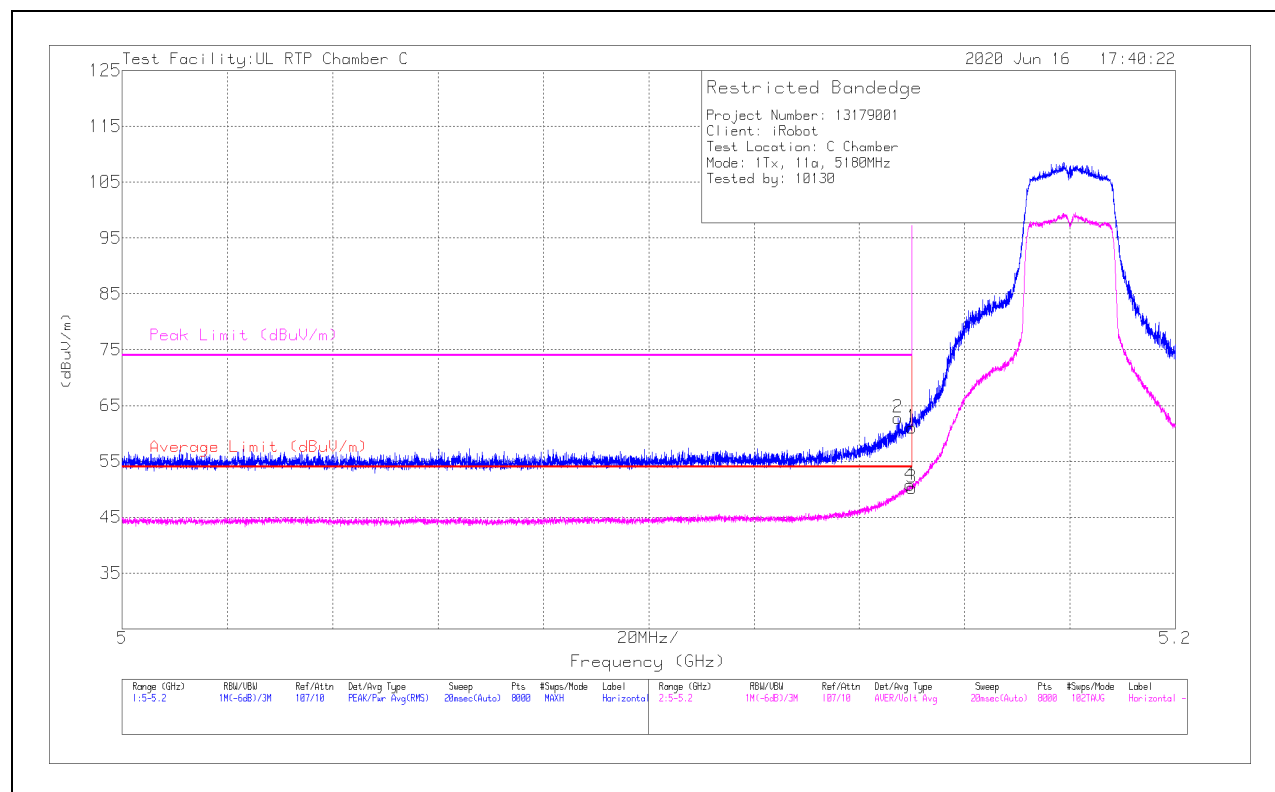

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	42.68	Pk	34.2	-15.8	0	61.08	-	-	74	-12.92	354	113	H
2	*** 5.14729	44.4	Pk	34.2	-15.8	0	62.8	-	-	74	-11.2	354	113	H
3	*** 5.14999	31.64	ADV	34.2	-15.8	.23	50.27	54	-3.73	-	-	354	113	H
4	*** 5.14962	32.15	ADV	34.2	-15.8	.23	50.78	54	-3.22	-	-	354	113	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

VERTICAL RESULT

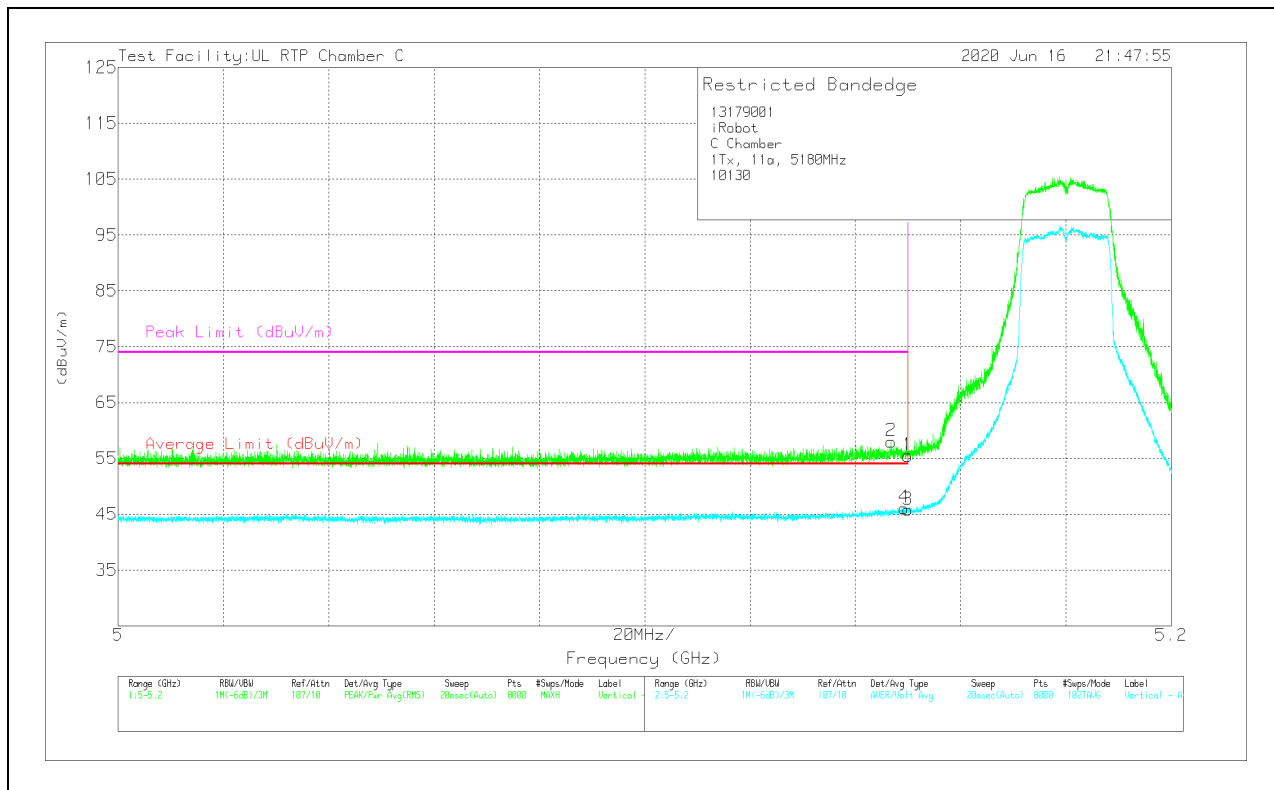

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	37.1	Pk	34.2	-15.8	0	55.5	-	-	74	-18.5	152	331	V
2	*** 5.14679	39.65	Pk	34.2	-15.8	0	58.05	-	-	74	-15.95	152	331	V
3	*** 5.14999	27.17	ADV	34.2	-15.8	.23	45.8	54	-8.2	-	-	152	331	V
4	*** 5.14927	27.48	ADV	34.2	-15.8	.23	46.11	54	-7.89	-	-	152	331	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

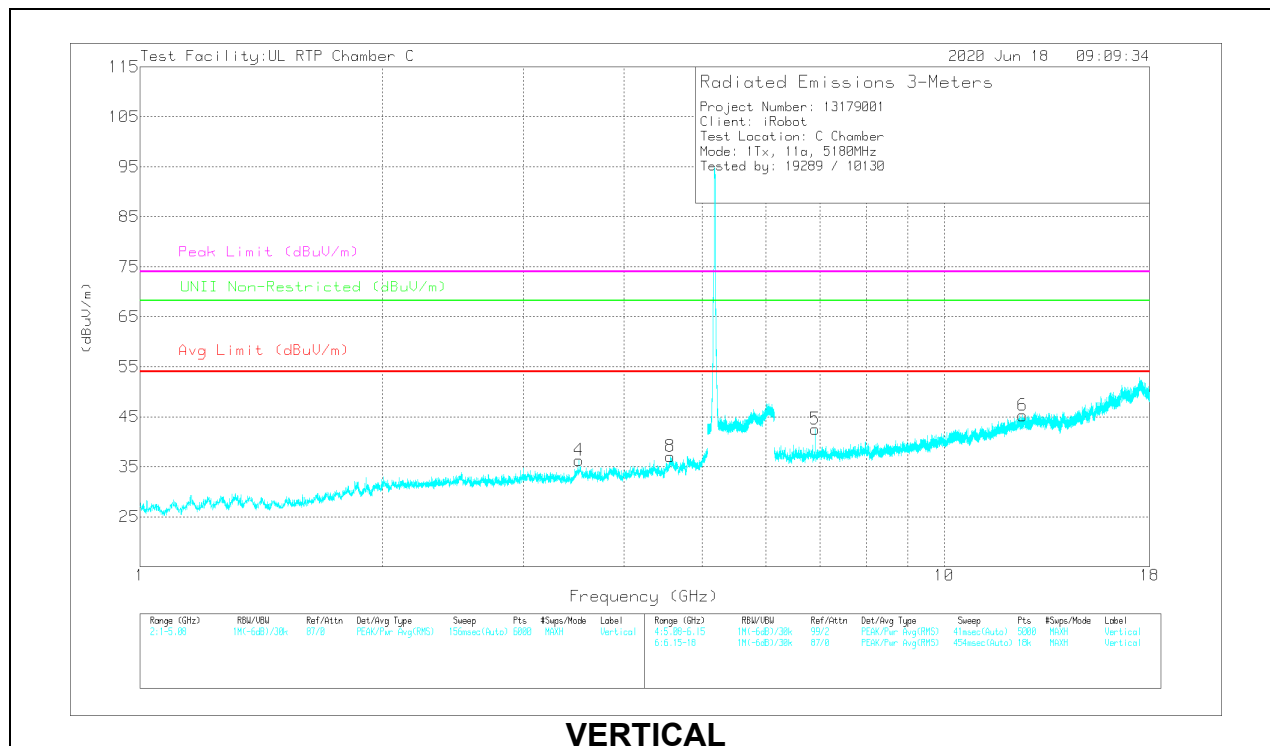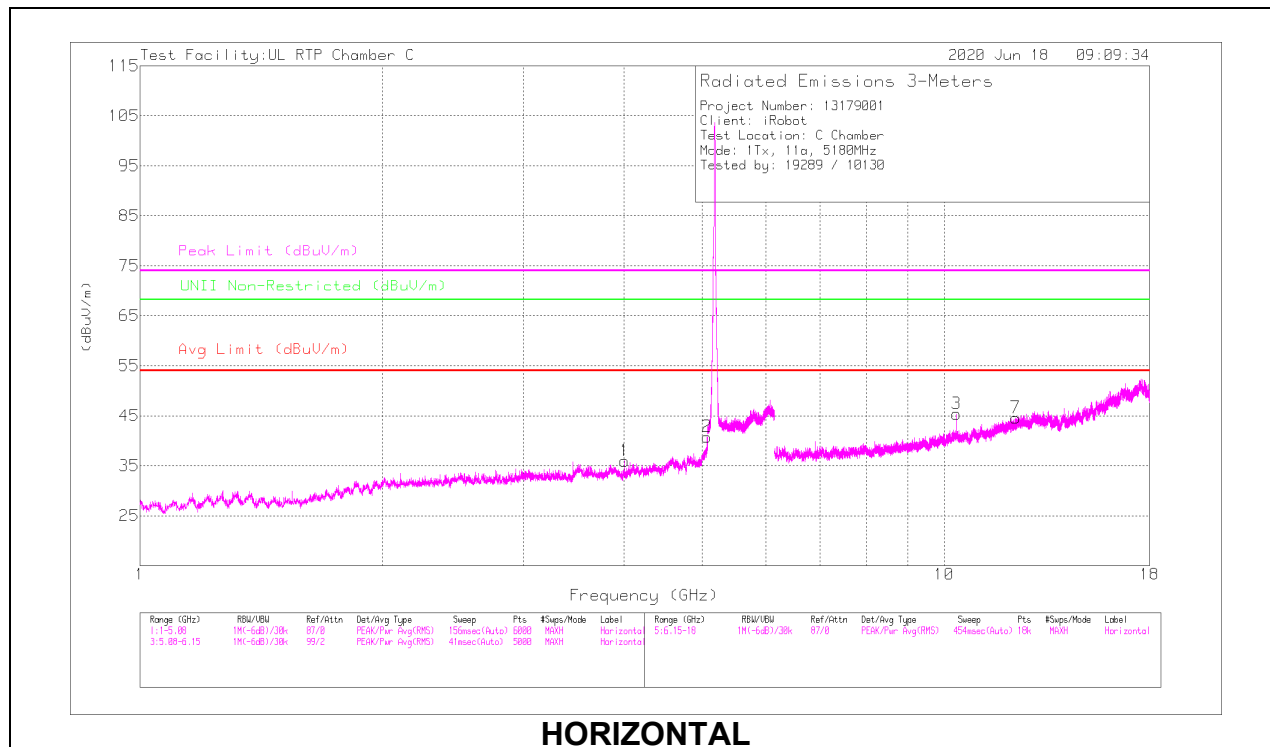

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.00538	57.03	PK-U	33.4	-49.2	0	41.23	-	-	74	-32.77	-	-	282	313	H
	*** 4.00455	44.22	ADV	33.4	-49.2	.23	28.65	54	-25.35	-	-	-	-	282	313	H
2	*** 5.07024	58.63	PK-U	34.1	-46.8	0	45.93	-	-	74	-28.07	-	-	112	263	H
	*** 5.07196	44.68	ADV	34.1	-46.7	.23	32.31	54	-21.69	-	-	-	-	112	263	H
4	*** 3.51165	56.19	PK-U	33.8	-49.5	0	40.49	-	-	74	-33.51	-	-	352	231	V
	*** 3.51155	43.87	ADV	33.8	-49.5	.23	28.4	54	-25.6	-	-	-	-	352	231	V
8	*** 4.5636	57.59	PK-U	34.1	-49.2	0	42.49	-	-	74	-31.51	-	-	71	305	V
	*** 4.56011	44.96	ADV	34.1	-49.2	.23	30.09	54	-23.91	-	-	-	-	71	305	V
7	*** 12.26863	51.24	PK-U	38.9	-41	0	49.14	-	-	74	-24.86	-	-	97	252	H
	*** 12.26641	38.88	ADV	38.9	-41.1	.23	36.91	54	-17.09	-	-	-	-	97	252	H
6	*** 12.51122	52.56	PK-U	39.1	-41.4	0	50.26	-	-	74	-23.74	-	-	67	230	V
	*** 12.51319	40.03	ADV	39.1	-41.4	.23	37.96	54	-16.04	-	-	-	-	67	230	V
5	6.90663	58.58	PK-U	35.7	-46.8	0	47.48	-	-	-	-	68.2	-20.72	277	102	V
3	10.36121	56.6	PK-U	37.3	-44	0	49.9	-	-	-	-	68.2	-18.3	1	102	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak

ADV - Linear Voltage Average

MID CHANNEL RESULTS

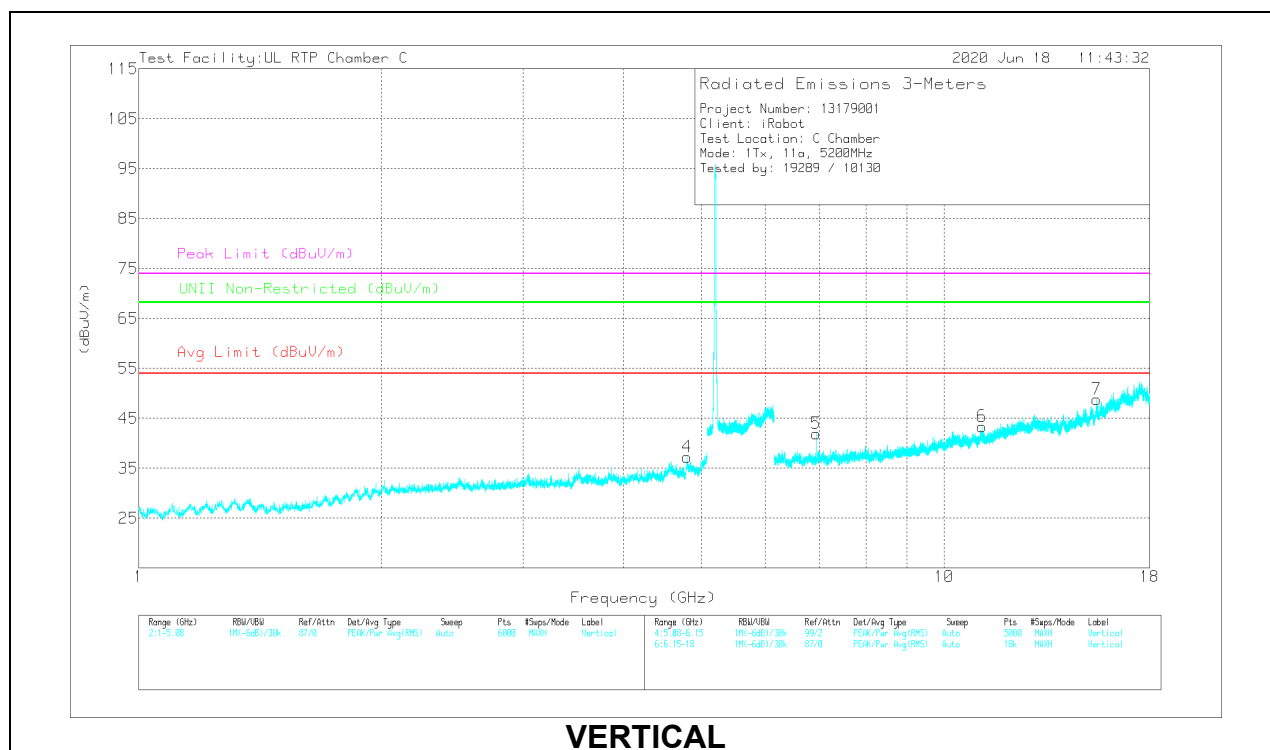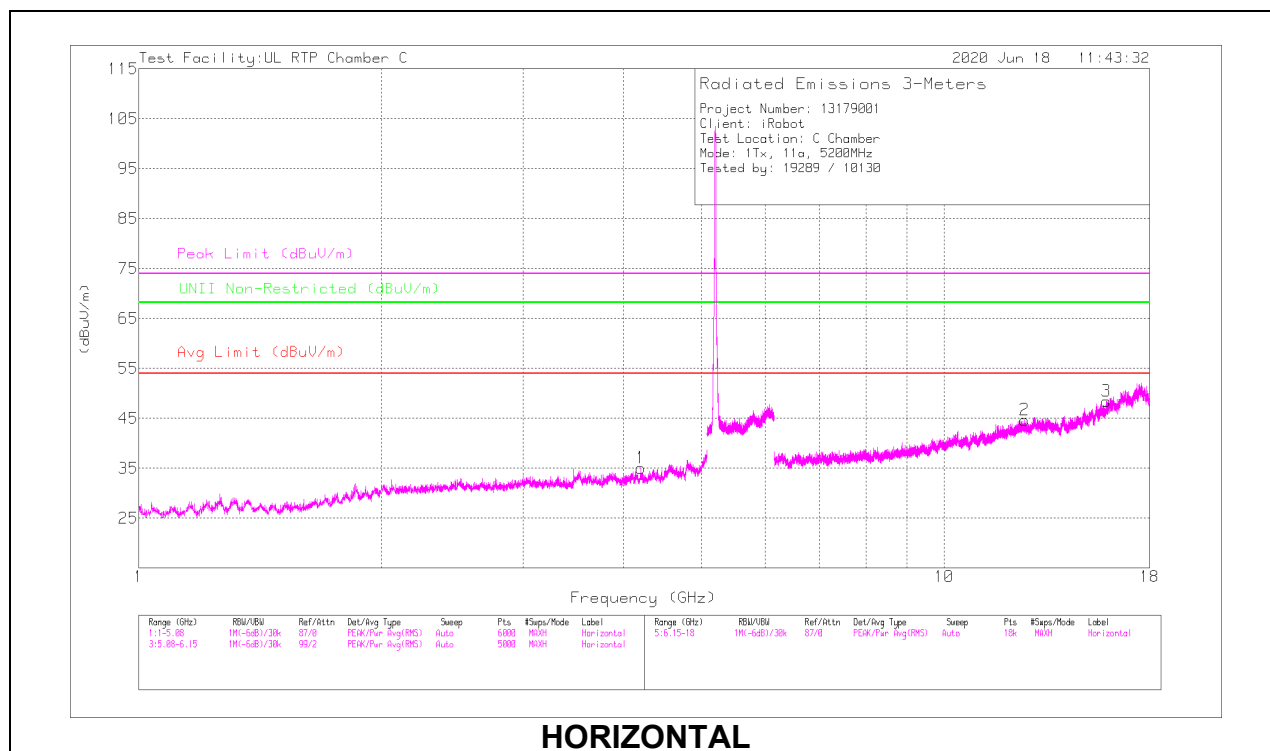

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.20344	56.96	PK-U	33.5	-49.2	0	41.26	-	-	74	-32.74	-	-	55	257	H
	*** 4.20235	43.78	ADV	33.5	-49.2	.23	28.31	54	-25.69	-	-	-	-	55	257	H
4	*** 4.79653	57.05	PK-U	34.1	-48.5	0	42.65	-	-	74	-31.35	-	-	0	251	V
	*** 4.79706	44.61	ADV	34.1	-48.6	.23	30.34	54	-23.66	-	-	-	-	0	251	V
2	*** 12.58754	52.56	PK-U	39.2	-40.3	0	51.46	-	-	74	-22.54	-	-	98	391	H
	*** 12.5839	39.76	ADV	39.2	-40.4	.23	38.79	54	-15.21	-	-	-	-	98	391	H
3	*** 15.90615	50.67	PK-U	41	-37.1	0	54.57	-	-	74	-19.43	-	-	51	395	H
	*** 15.90811	38.63	ADV	41	-37.3	.23	42.56	54	-11.44	-	-	-	-	51	395	H
6	*** 11.14271	53.28	PK-U	37.8	-42.9	0	48.18	-	-	74	-25.82	-	-	326	298	V
	*** 11.14003	40.99	ADV	37.8	-42.9	.23	36.12	54	-17.88	-	-	-	-	326	298	V
7	*** 15.46694	50.25	PK-U	40.3	-36.5	0	54.05	-	-	74	-19.95	-	-	146	376	V
	*** 15.46813	37.59	ADV	40.3	-36.4	.23	41.72	54	-12.28	-	-	-	-	146	376	V
5	6.93313	57.71	PK-U	35.7	-47.3	0	46.11	-	-	-	-	68.2	-22.09	120	396	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL RESULTS

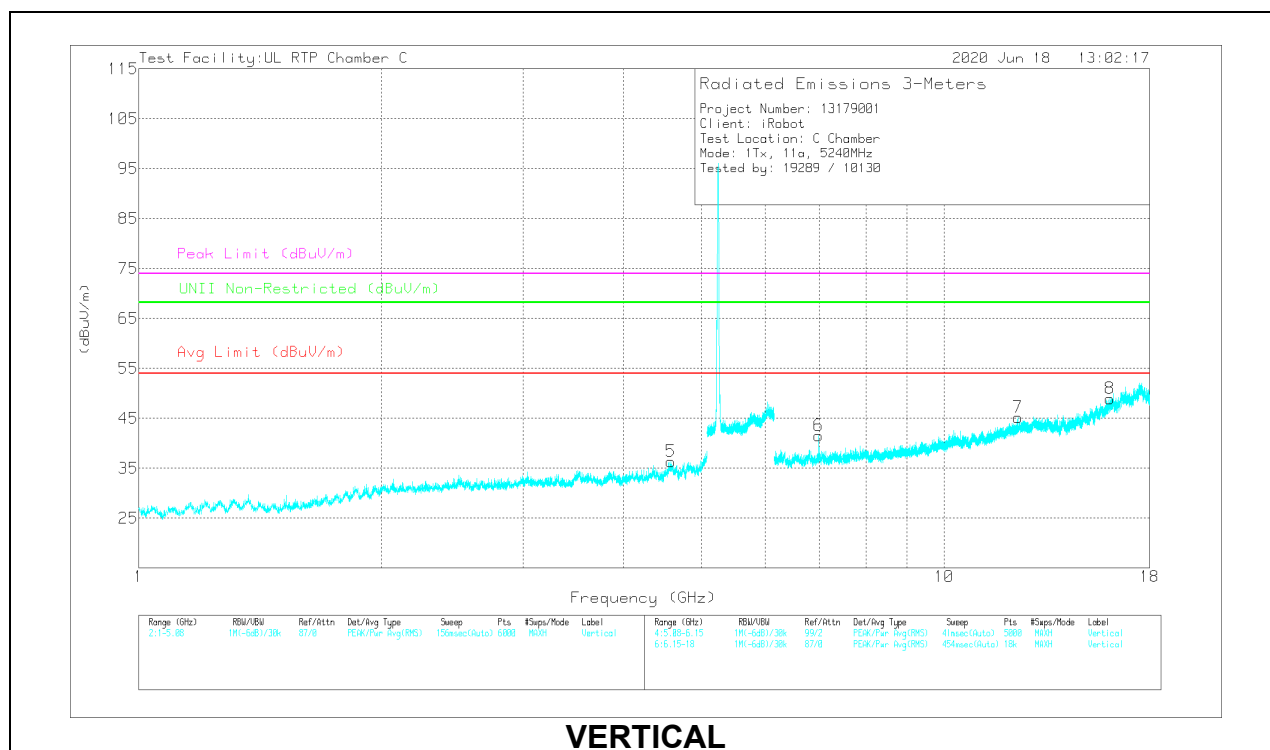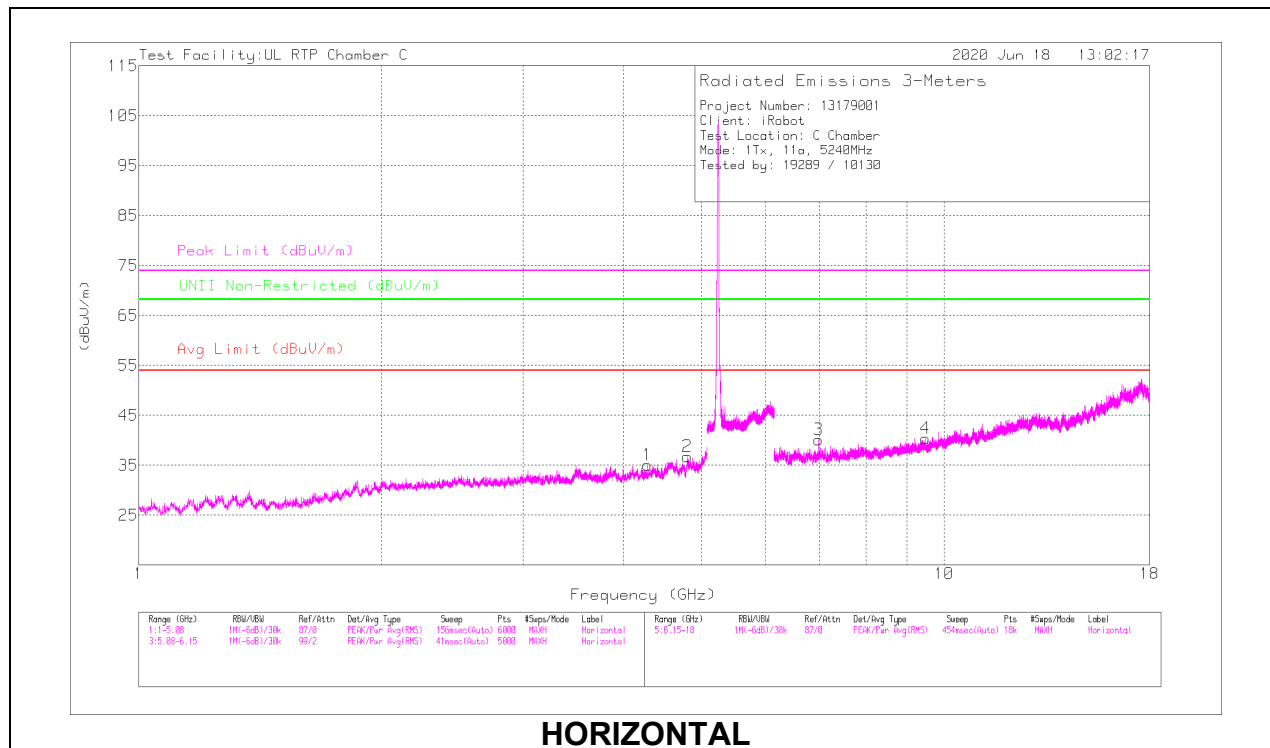

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.27914	56.66	PK-U	33.5	-50.3	0	39.86	-	-	74	-34.14	-	-	45	102	H
	*** 4.28145	43.99	ADV	33.5	-50.2	.23	27.52	54	-26.48	-	-	-	-	45	102	H
2	*** 4.80229	56.36	PK-U	34.1	-48.8	0	41.66	-	-	74	-32.34	-	-	281	341	H
	*** 4.80246	44.65	ADV	34.1	-48.8	.23	30.18	54	-23.82	-	-	-	-	281	341	H
5	*** 4.57654	57.59	PK-U	34.1	-49.5	0	42.19	-	-	74	-31.81	-	-	140	223	V
	*** 4.57543	44.97	ADV	34.1	-49.5	.23	29.8	54	-24.2	-	-	-	-	140	223	V
4	*** 9.48071	54.89	PK-U	36.5	-45.4	0	45.99	-	-	74	-28.01	-	-	312	239	H
	*** 9.48088	42.11	ADV	36.5	-45.4	.23	33.44	54	-20.56	-	-	-	-	312	239	H
7	*** 12.36055	52.08	PK-U	38.9	-40.6	0	50.38	-	-	74	-23.62	-	-	70	267	V
	*** 12.35845	39.55	ADV	38.9	-40.7	.23	37.98	54	-16.02	-	-	-	-	70	267	V
8	*** 16.07224	50.88	PK-U	41.3	-36.4	0	55.78	-	-	74	-18.22	-	-	115	150	V
	*** 16.0723	37.87	ADV	41.3	-36.4	.23	43	54	-11	-	-	-	-	115	150	V
6	6.98646	59.43	PK-U	35.7	-48.2	0	46.93	-	-	-	-	68.2	-21.27	270	102	V
3	6.9865	58.87	PK-U	35.7	-48.2	0	46.37	-	-	-	-	68.2	-21.83	178	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - Maximum Peak


ADV - Linear Voltage Average

10.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

1TX External Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

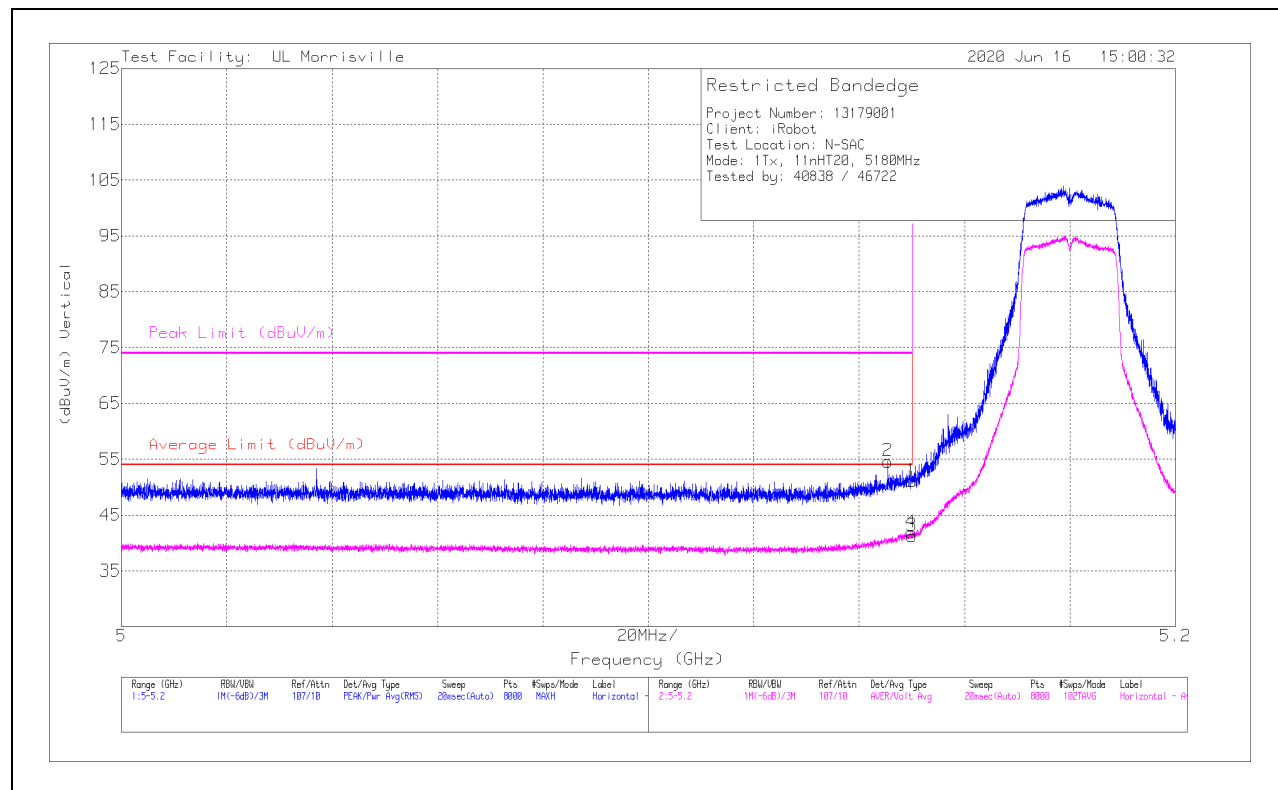

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.14999	38.6	Pk	34.2	-21.7	0	51.1	-	-	74	-22.9	17	115	H
2	*** 5.14542	42.1	Pk	34.2	-21.7	0	54.6	-	-	74	-19.4	17	115	H
3	*** 5.14999	28.53	ADV	34.2	-21.7	.24	41.27	54	-12.73	-	-	17	115	H
4	*** 5.14987	29.09	ADV	34.2	-21.7	.24	41.83	54	-12.17	-	-	17	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

ADV - Linear Voltage Average