

COMPLIANCE WORLDWIDE INC. TEST REPORT 100-20

In Accordance with the Requirements of

**Federal Communications Commission 47 CFR Part 15.250, Subpart C
Wideband Systems within the band 5925 to 7250 MHz**

**ISED RSS-220, Issue 1 (March 2009) + Amendment 1 (July 2018)
Devices Using Ultra-Wideband (UWB) Technology**

Issued to

**iRobot Corporation
8 Crosby Drive
Bedford, MA 01730**


For the

**Terra™ t7 Remote
Model # AXA-Y1, Part # 4515706**

FCC ID: UFEAXA-Y2

Report Issued on February 25, 2020

Tested By

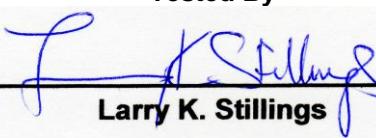
Larry K. Stillings

Reviewed By


Brian F. Breault

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope.....	3
2. Product Details	3
2.1. Manufacturer	3
2.2. Model Number.....	3
2.3. Serial Number	3
2.4. Description	3
2.5. Power Source.....	3
2.6. Hardware Revision.....	3
2.7. Software Revision	3
2.8. Modulation Type.....	3
2.9. Operating Frequency	3
2.10. EMC Modifications	3
3. Product Configuration.....	3
3.1. Operational Characteristics & Software	3
3.2. Cables	3
3.3. EUT Hardware	4
3.4. Support Equipment	4
3.5. Test Setup.....	4
4. Measurements Parameters	5
4.1. Measurement Equipment Used to Perform Test	5
4.2. Measurement & Equipment Setup	6
4.3. Measurement Procedure	6
4.4. Measurement Uncertainty	6
5. Measurement Summary	7
6. Measurement Data	8
6.1. Antenna Requirement	8
6.2. Operational Requirements	8
6.3. UWB Bandwidth	9
6.4. Spurious Radiated Emissions	10
6.5. Radiated Emissions in GPS Bands.....	23
6.6. RMS Power in a 1 MHz Bandwidth.....	26
6.7. Peak Emissions in a 50 MHz Bandwidth	28
6.8. Conducted Emissions Test Setup.....	30
6.9. Public Exposure to Radio Frequency Energy Levels.....	32
7. Test Site Description	33
8. Test Images.....	34
8.1. Spurious and Harmonic Emissions - 10 kHz to 1 GHz Front.....	34
8.2. Spurious and Harmonic Emissions - 10 kHz to 30 MHz Rear	35
8.3. Spurious and Harmonic Emissions - 30 MHz to 1 GHz Rear	36
8.4. Spurious and Harmonic Emissions - 1 to 18 GHz Front	37
8.5. Spurious and Harmonic Emissions - 1 to 18 GHz Rear.....	38
8.6. Spurious and Harmonic Emissions - 18 to 40 GHz Side	39
8.7. Frequency Stability Setup	40

1. Scope

This test report certifies that the iRobot Corporation Terra™ t7 Remote AXA-Y1 as tested, meets the FCC Part 15.250, Subpart C and ISED RSS-220 requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

2. Product Details

2.1. Manufacturer:	iRobot Corporation
2.2. Product Name:	Terra™ t7 Remote
2.3. Model Number:	AXA-Y1
2.4. Serial Number:	RC #09
2.5. Description:	The robot's remote control communicates with the robot using Bluetooth Low Energy (BLE) and Ultra WideBand (UWB) technology. This remote control is used during installation to train the robot to the user's yard shape. The remote control can also be used anytime by the user to drive the robot manually (not while mowing) when the robot is in "remote" mode.
2.6. Power Source:	2 - AA Batteries
2.7. Hardware Revision:	Rev F
2.8. Software Revision:	AoA v7.7
2.9. Modulation Type:	Pulse Modulation, Frequency Hopping
2.10. Operating Frequency:	CH 5 – 6.49 GHz Nominal
2.11. EMC Modifications:	None

3. Product Configuration

3.1 Operational Characteristics & Software

Hardware Setup:

Install the batteries within the unit. Using a laptop and serial cable the unit was programmed to transmit a typical waveform used for communication in "continuous" mode (back to back mode).

3.2. Cables

Cable Type	Length	Shield	From	To
None				

3. Product Configuration (cont.)


3.3. EUT Hardware

Manufacturer	Model/Part # / Options	Serial Number	Input Volts	Freq (Hz)	Description/Function
iRobot	AXA-Y1	RC #09	3.0	DC	(2) AA Batteries

3.4. Support Equipment

Manufacturer	Model/Part #	Serial Number	Description
None			

3.5. Test Setup Diagram

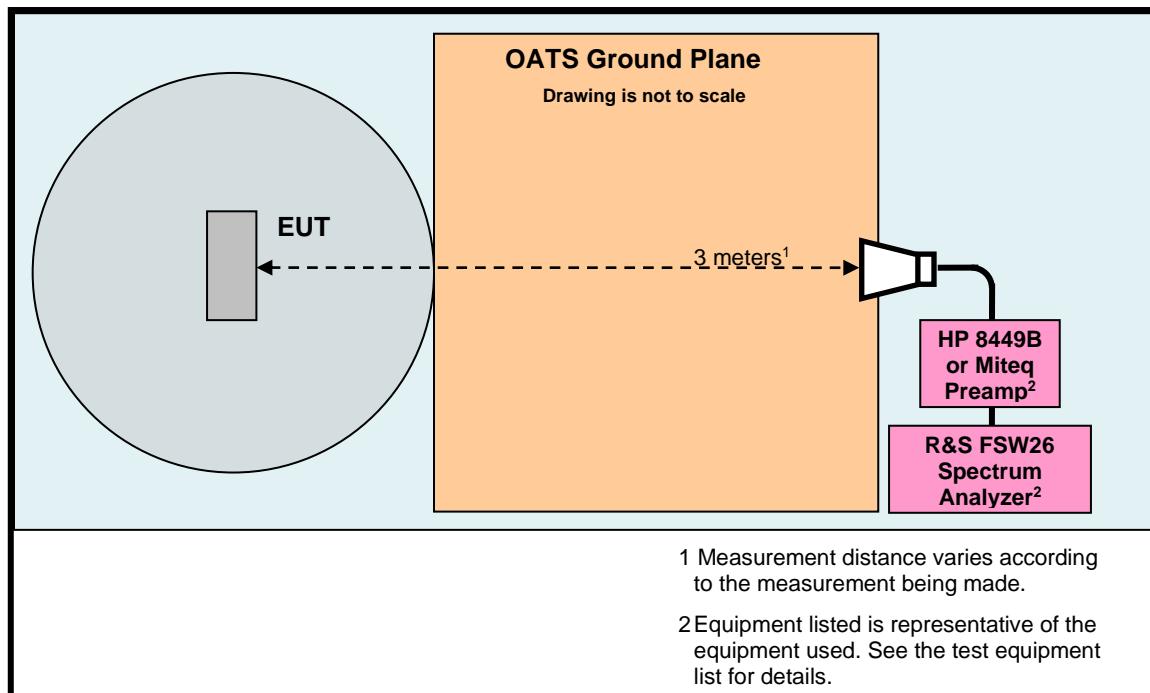

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Receiver 9 kHz to 7 GHz	Rohde & Schwarz	ESR7	101156	9/10/2020	2 Years
Spectrum Analyzer 9 kHz to 40 GHz	Rohde & Schwarz	FSV40	100899	9/10/2020	2 Years
Spectrum Analyzer 10 Hz to 40 GHz	Rohde & Schwarz	FSVR40	100909	5/3/2020	3 Years
Spectrum Analyzer 3 Hz to 26.5 GHz	Rohde & Schwarz	FSW26	102044	9/13/2020	2 Years
Bilog Antenna 30 to 2000 MHz	Com-Power	AC-220	25509	2/13/2022	3 Years
Loop Antenna 9 kHz to 30 MHz	EMCO	6512	9309-1139	1/28/2022	3 Years
Preamplifier 100 MHz to 7 GHz	Miteq	AFS3-00100200-10-15P-4	988773	4/17/2020	2 Years
Preamplifier 100 MHz to 18 GHz	Miteq	AMF-7D-00101800-30-10P	1953081	4/16/2020	2 Years
Preamplifier 2 to 12 GHz	JCA	JCA48-4111B1	7087S	4/17/2020	2 Years
Preamplifier 1 to 26.5 GHz	Hewlett Packard	8449B	3008A01323	9/11/2020	2 Years
Preamplifier 18 to 40 GHz	Miteq	JSD42-21004200-40-5P	649199/649219	1/6/2021	1 Year
Horn Antenna 1 to 18 GHz	ETS-Lindgren	3117	00143292	3/21/2022	3 Years
Horn Antenna 18-40 GHz	Com Power	AH-840	101032	10/9/2020	2 Years
High Pass Filter 8 to 18 GHz	Micro-Tronics	HPM50107	G036	1/6/2021	1 Year
2.4 GHz Band Pass Filter	Micro-Tronics	BRM50702	150	4/1/2020	1 Year
Barometer	Control Company	4195	Cal ID# 236	4/3/2020	2 Years

¹ ESR7 Firmware revision: V3.36, SP2 Date installed: 11/02/2017 Previous V3.36, installed 05/16/2017.

² FSV40 Firmware revision: V2.30 SP4, Date installed: 05/04/2016 Previous V2.30 SP1, installed 10/22/2014.

³ FSVR40 Firmware revision: V2.23 SP1, Date installed: 08/19/2016 Previous V2.23, installed 10/20/2014.

⁴ FSW26 Firmware revision: V2.80, Date installed: 10/28/2017 Previous V2.61, installed 04/04/2017.

4. Measurements Parameters (continued)

4.2. Measurement & Equipment Setup

Test Dates:	1/2/2020, 1/9/2020
Test Engineers:	Brian Breault, Larry Stillings
Normal Site Temperature (15 - 35°C):	21.6
Relative Humidity (20 -75%RH):	35
Frequency Range:	30 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 10 kHz to 150 kHz 9 kHz – 10 to 30 MHz 120 kHz - 30 MHz to 1 GHz 1 MHz - Above 1 GHz
EMI Receiver Avg Bandwidth:	300 Hz – 10 kHz to 150 kHz 30 kHz – 10 to 30 MHz 300 kHz - 30 MHz to 1 GHz 3 MHz - Above 1 GHz
Detector Function:	Peak, Quasi-Peak, RMS & CISPR Average

4.3. Measurement Procedure

Test measurements were made in accordance FCC Parts 15.209, 15.250 Subpart C and ISED RSS-220, Issue 1 & A1.

The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

4.4. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

RF Frequency (out of band)	$\pm 1 \times 10^{-8}$
Radiated Emission of Transmitter to 100 GHz	± 4.55 dB
Radiated Emission of Receiver	± 4.55 dB
Temperature	$\pm 0.91^\circ$ C
Humidity	$\pm 5\%$

5. Measurements Summary

Test Requirement	FCC Rule Requirement	ISED Rule Requirement	Test Report Section	Result	Comment
Antenna Requirement	15.203	RSS-220 5.1 (b)	6.1	Compliant	
Operational Requirements	15.250 (a)	RSS-220	6.2	Compliant	
Wideband Bandwidth	15.250 (b)	RSS-220 2 RSS-220 5.1	6.3	Compliant	
Spurious Radiated Emissions	15.250 (d) (1) 15.209	RSS-220 3.4	6.4	Compliant	
Radiated Emissions in GPS Bands	15.250 (d) (2)	RSS-220 5.3.1 (e)	6.5	Compliant	
RMS Power in a 1 MHz Bandwidth	15.250 (d) (1)	RSS-220 5.3.1 (d)	6.6	Compliant	
Peak Emissions in a 50 MHz Bandwidth	15.250 (d) (3)	RSS-220 5.3.1 (g)	6.7	Compliant	
Conducted Emissions	15.207	RSS-GEN	6.8	N/A	EUT is Battery Powered
Radio Frequency Exposure	FCC OET Bulletin 65 1.1307 (b) (1)	RSS-102, Issue 5	6.9	Compliant	

6. Measurement Data

6.1. Antenna Requirement (15.203, RSS-220 5.1 (b))

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply

Result: The antenna are utilized by is a chip antenna.

6.2. Operational Requirements of the Device under Test (15.250 (a), RSS-220)

Requirement: The -10 dB bandwidth of a device operating under the provisions of this section must be contained within the 5925 to 7250 MHz band under all conditions of operation including the effects from stepped frequency, frequency hopping or other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

Result: Compliant

6.2.1 Frequency Stability over Temperature

Marker	Temp °C	Measured Frequency (MHz)	-10 dB Band Edges		15.250 Frequency Band		Result
			Lower	Upper	F _{MIN} (MHz)	F _{MAX} (MHz)	
-	OATS	6486.1	6272.2	6683.8	5925	7250	Compliant
-	Ambient	6458.3	6226.9	6755.4	5925	7250	Compliant
1	-20	6452.5	6270.3	6730.4	5925	7250	Compliant
2	-10	6454.5	6269.9	6730.2	5925	7250	Compliant
3	0	6452.5	6270.1	6724.3	5925	7250	Compliant
4	+10	6452.6	6269.9	6755.3	5925	7250	Compliant
5	+20	6459.0	6270.0	6755.1	5925	7250	Compliant
6	+30	6457.9	6270.2	6754.7	5925	7250	Compliant
7	+40	6457.7	6274.1	6754.6	5925	7250	Compliant
8	+50	6454.3	6270.3	6715.1	5925	7250	Compliant

6. Measurement Data (continued)

6.3. Wideband Bandwidth (15.250 (b), RSS-220 2, 5.1)


Requirement: The -10 dB bandwidth of the fundamental emission shall be at least 50 MHz.

Result: Compliant

6.3.1. Measurement Data – Values in GHz

f_M	The highest emission peak	6.486
f_L	10 dB below the highest peak	6.2722
f_H	10 dB above the highest peak	6.6838
Bandwidth	Calculated: $(f_H - f_L)$	0.4116

6.3.2. Measurement Plot of 10 dB frequencies

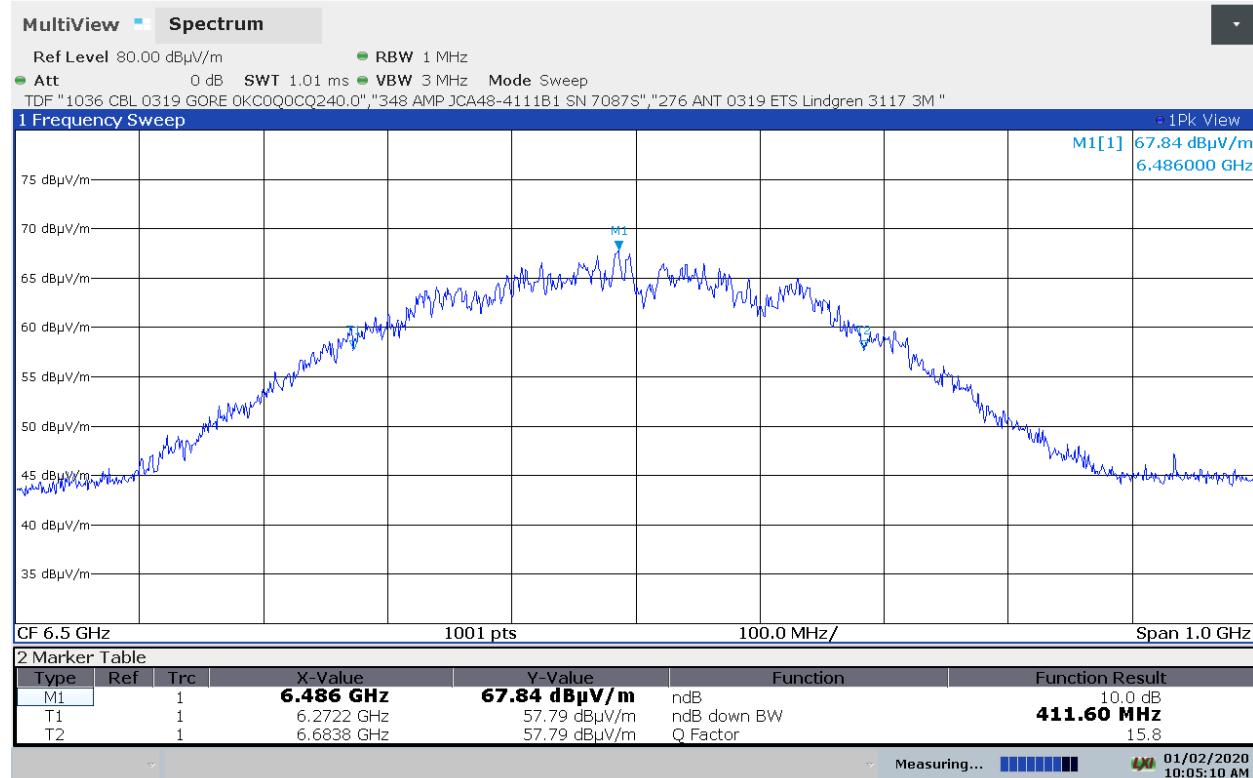100-20 iRobot Terra Remote

10:05:10 AM 01/02/2020

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1), 15.209, RSS-220 3.4)

Requirement: The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
960 - 1610	-75.3	19.9
1610 - 1990	-63.3	31.9
1990 - 3100	-61.3	33.9
3100 - 5925	-51.3	43.9
5925 - 7250	-41.3	53.9
7250 - 10,600	-51.3	43.9
Above 10,600	-61.3	33.9

Spurious Radiated Emissions (RSS-220 5.3.1 (d))

Requirement: The radiated emissions at or below 960 MHz from a device shall not exceed the limits in Section 3.4. The radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
960 - 1610	-75.3	19.9
1610 - 4750	-70.0	25.2
4750 - 10,600	-41.3	53.9
Above 10,600	-61.3	33.9

6. Measurement Data (continued)
6.4. Spurious Radiated Emissions (15.250 (d) (1), 15.209, RSS-220 3.4 continued)
Radiated Emissions Field Strength Limits at 3 Meters (Section 15.250 (d), 15.209)

Frequency (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)
0.009 to 0.490	2,400/F	128.5 to 93.8
0.490 to 1.705	24,000/F	73.8 to 63
1.705 - 30	30	69.5
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
960 - 40,000	500	54

Test Notes: Refer to Section 4.1 for the test equipment used.

Frequency Range:	10 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 10 kHz to 150 kHz 9 kHz – 150 kHz to 30 MHz 120 kHz - 30 MHz to 1 GHz 1 MHz - Above 1 GHz
EMI Receiver Avg Bandwidth (minimum):	300 Hz – 10 kHz to 150 kHz 30 kHz – 150 kHz to 30 MHz 300 kHz - 30 MHz to 1 GHz 3 MHz - Above 1 GHz
Detector Function:	Peak, Quasi-Peak & Average


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.1 Parallel Measurement Antenna – 30 to 150 kHz

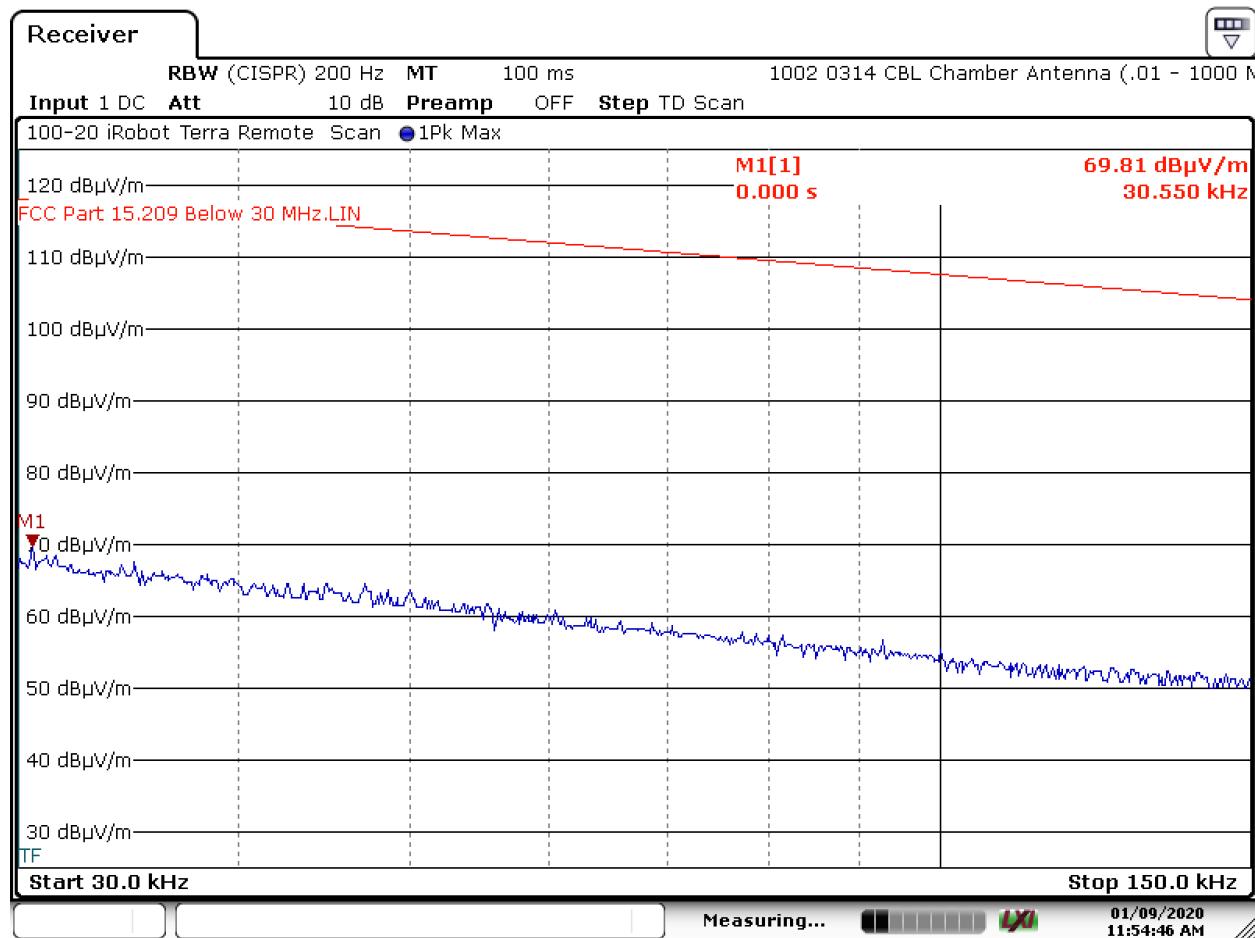

Date: 9.JAN.2020 11:54:46


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.2 Perpendicular Measurement Antenna – 30 to 150 kHz

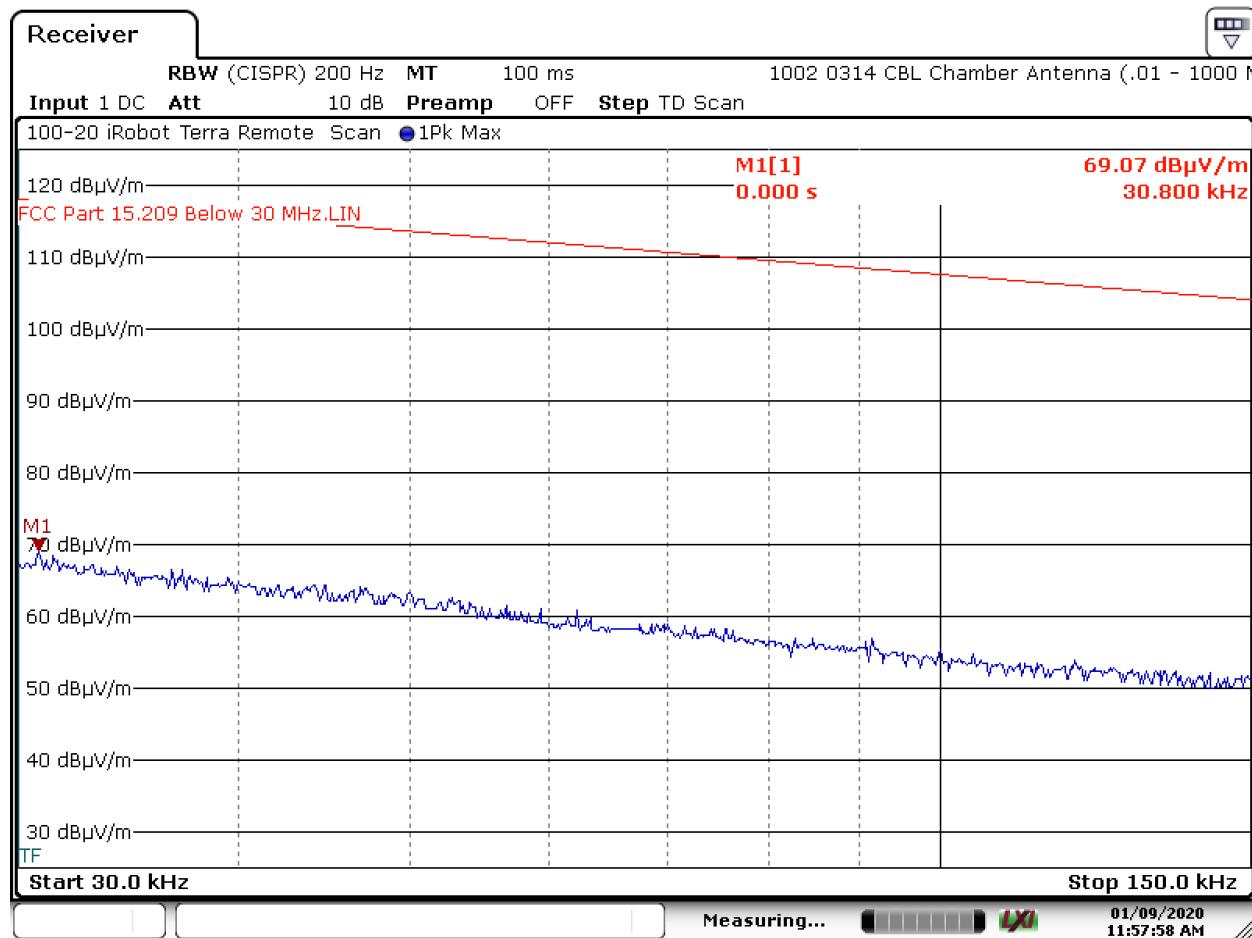

Date: 9.JAN.2020 11:57:59


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.3 Ground Parallel Measurement Antenna – 30 to 150 kHz

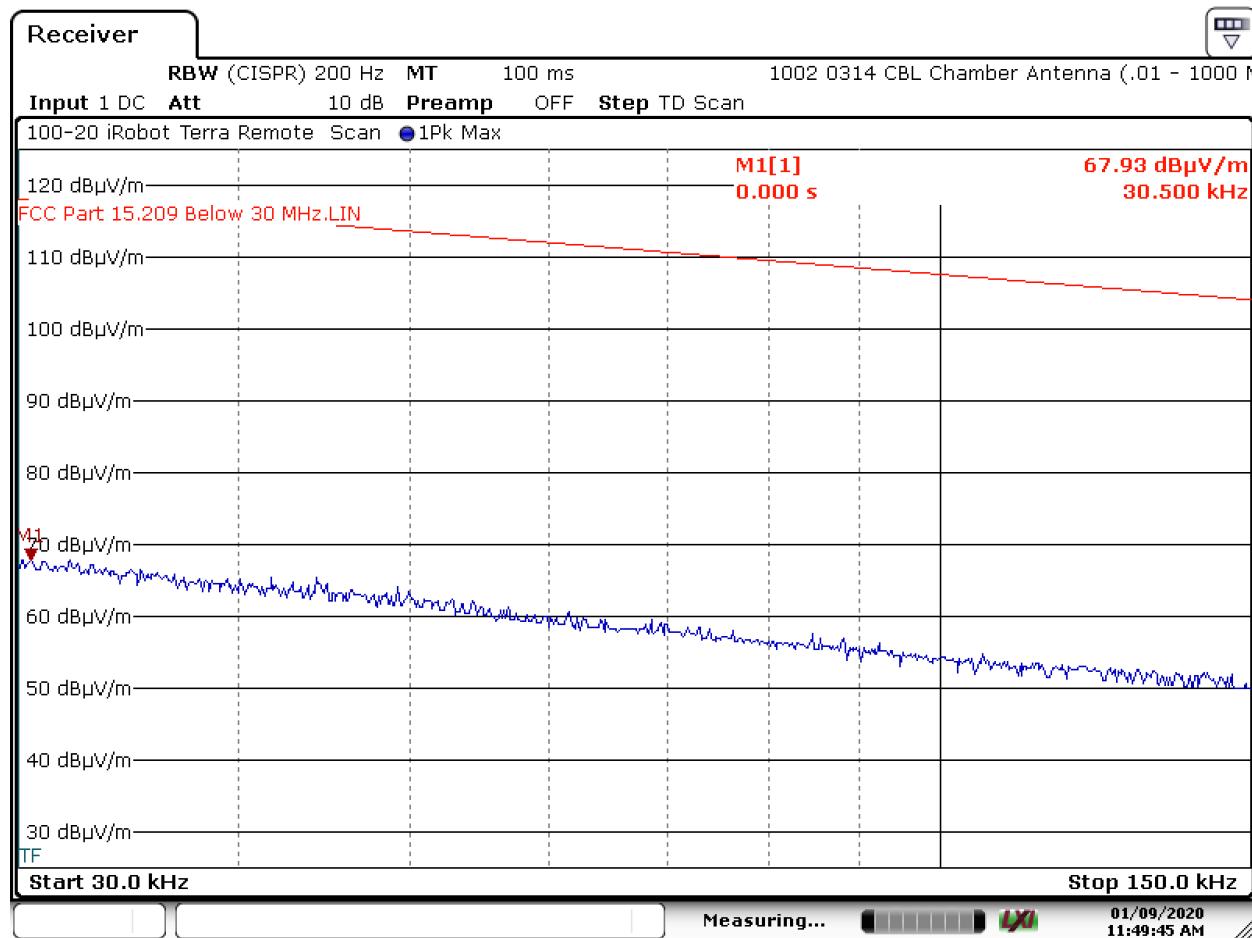

Date: 9.JAN.2020 11:49:46


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.4 Parallel Measurement Antenna – 150 kHz to 30 MHz

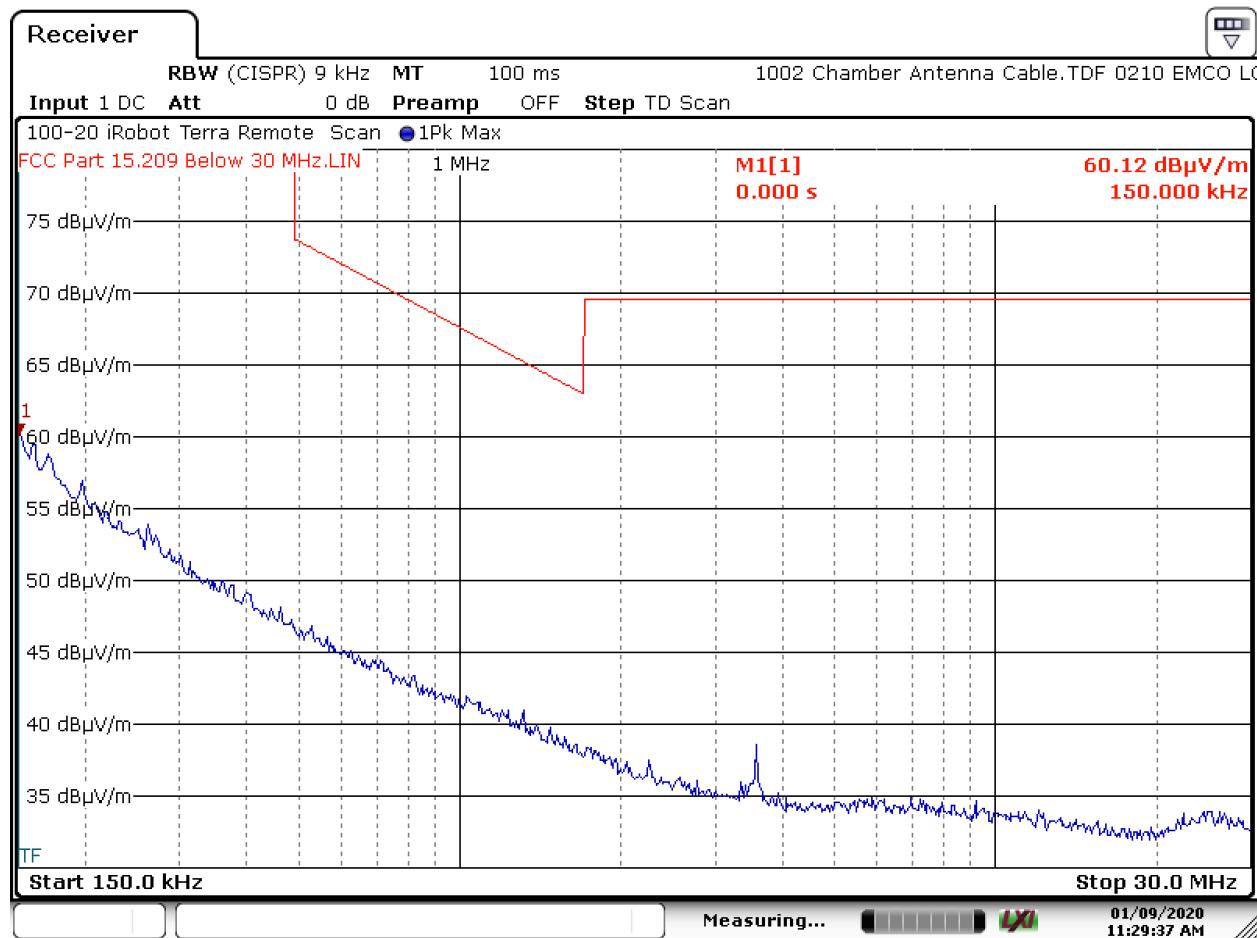

Date: 9.JAN.2020 11:29:37


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.5 Perpendicular Measurement Antenna – 150 kHz to 30 MHz

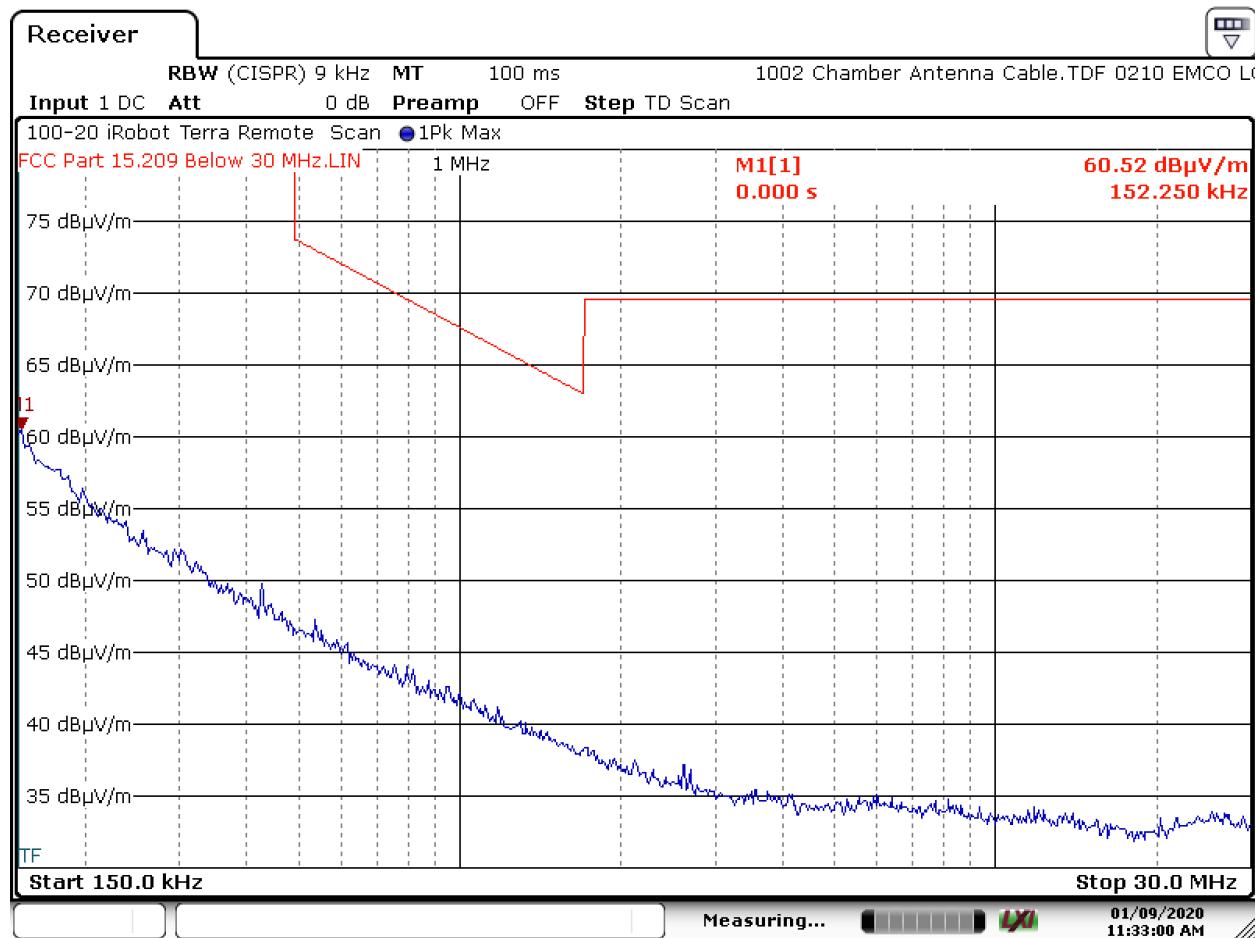

Date: 9.JAN.2020 11:33:00


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.6 Ground Parallel Measurement Antenna – 150 kHz to 30 MHz

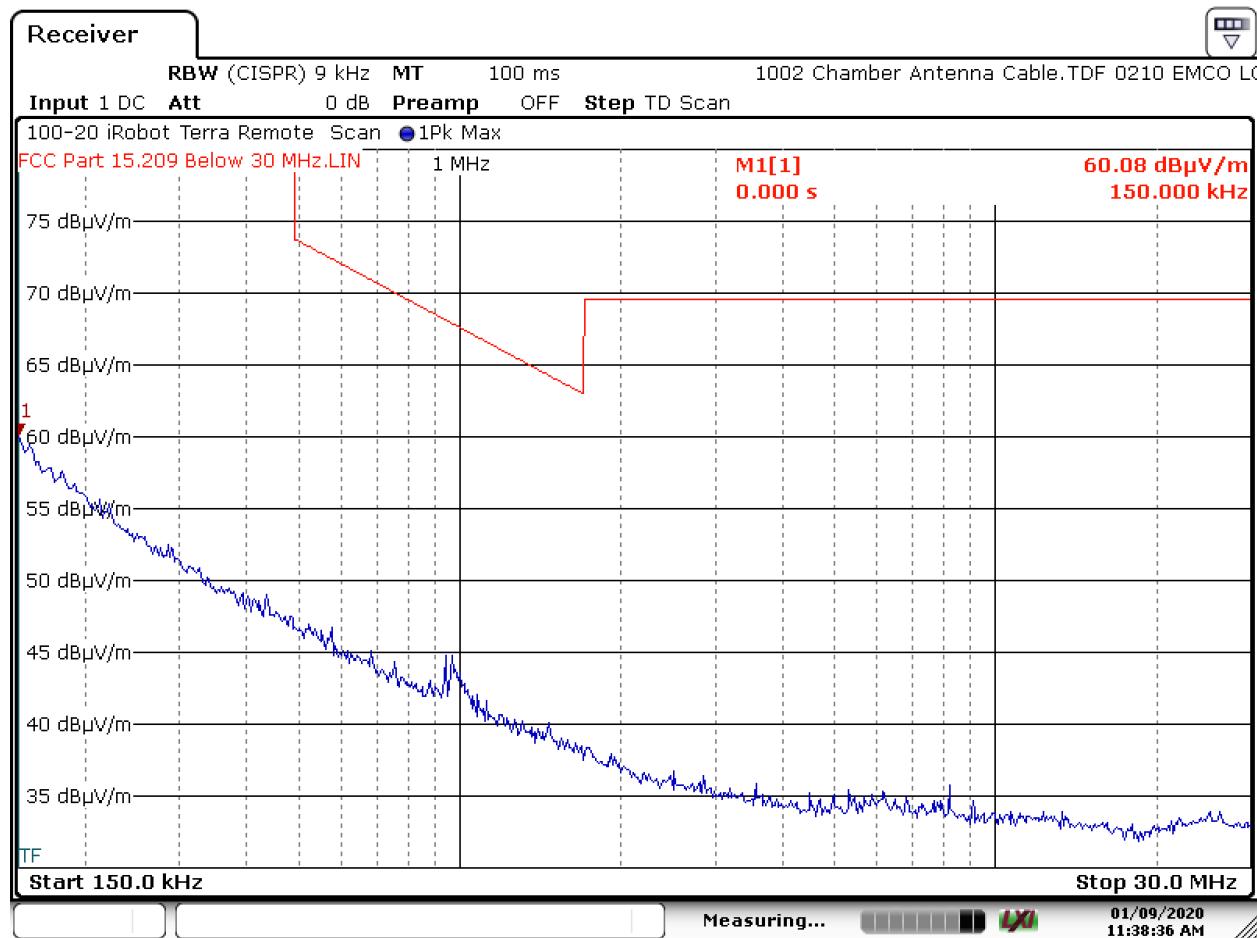

Date: 9.JAN.2020 11:38:37


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.7 Horizontal Polarity – 30 to 960 MHz

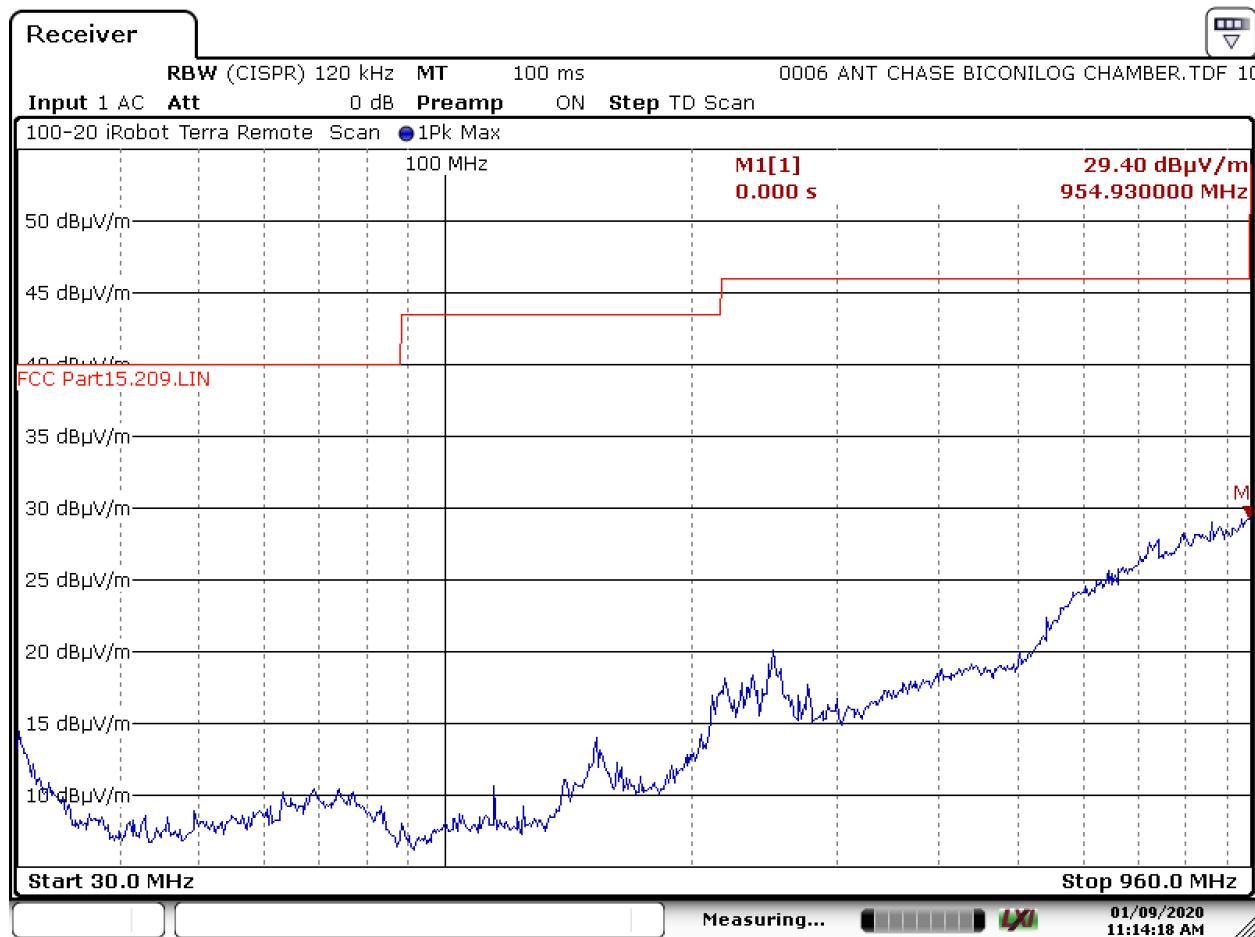

Date: 9.JAN.2020 11:14:19


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.8 Vertical Polarity – 30 to 960 MHz

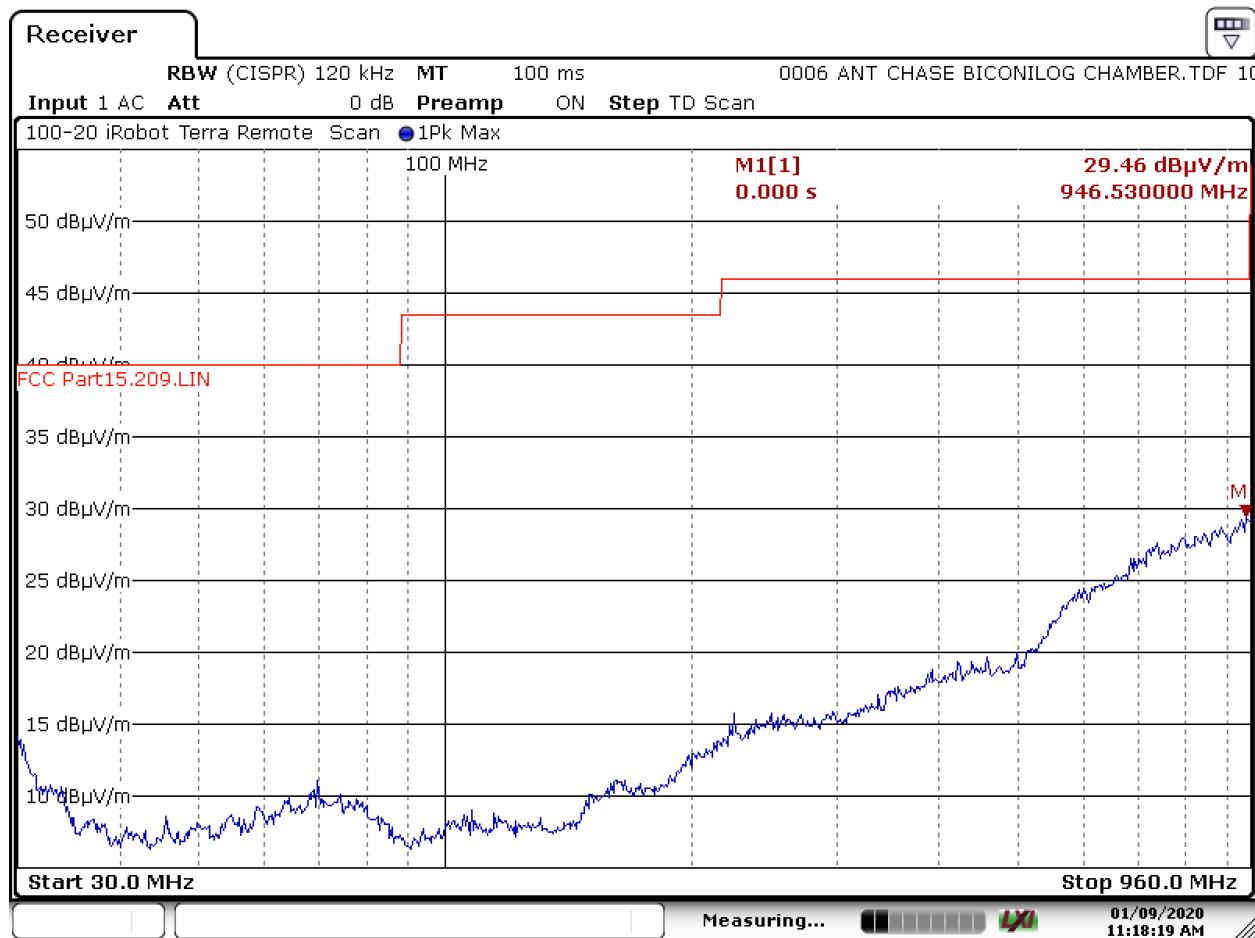


Date: 9.JAN.2020 11:18:20


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1), RSS-220 5.3.1(d))

6.4.2. 960 MHz to 8 GHz Horizontal at 1 Meter (Directional 16M PRF)

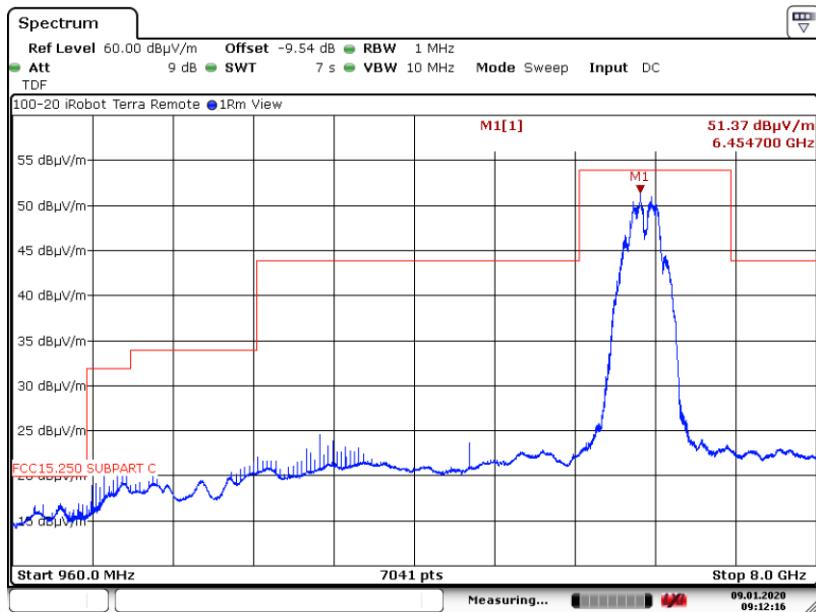


6.4.3. 960 MHz to 8 GHz Vertical at 1 Meter

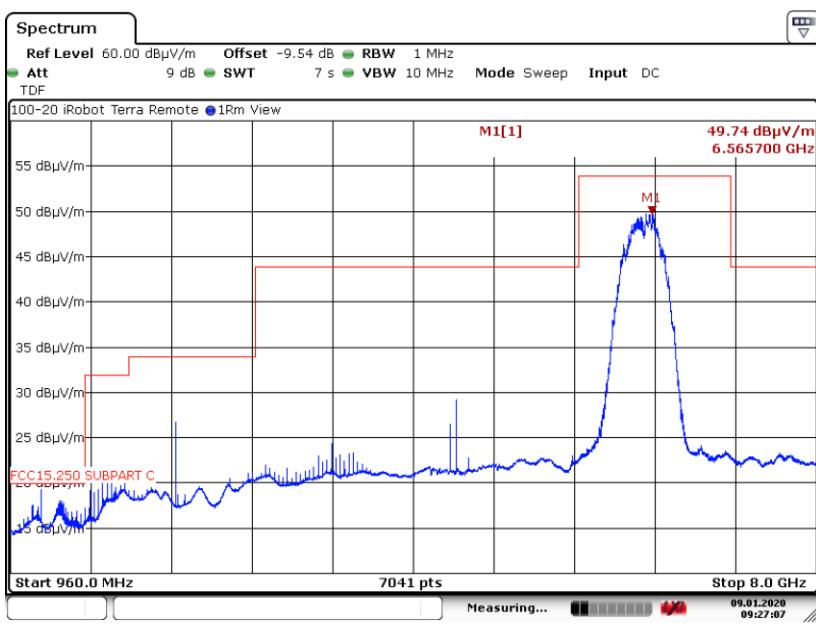


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1), RSS-220 5.3.1 (d) continued)

6.4.4. 8 to 18 GHz Horizontal at 1 Meter

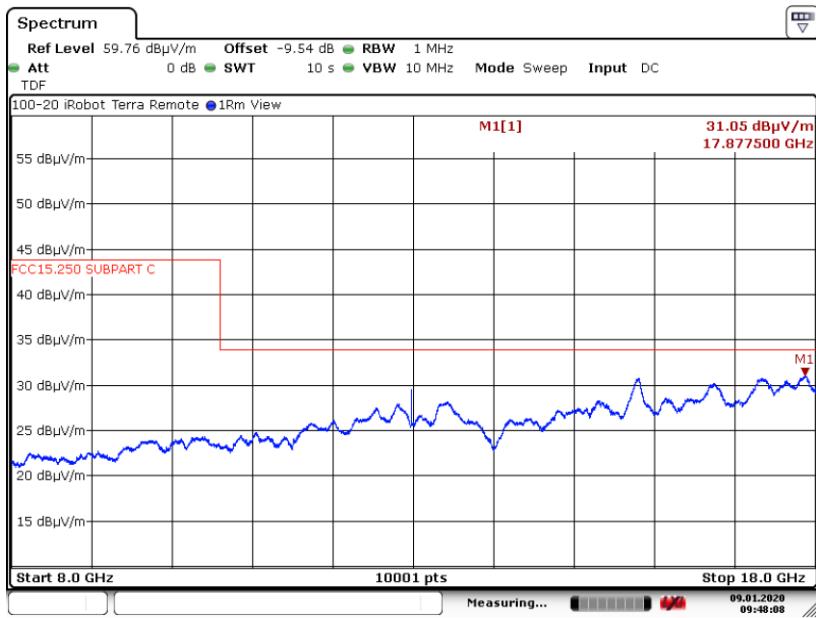


6.4.5. 8 to 18 GHz Vertical at 1 Meter

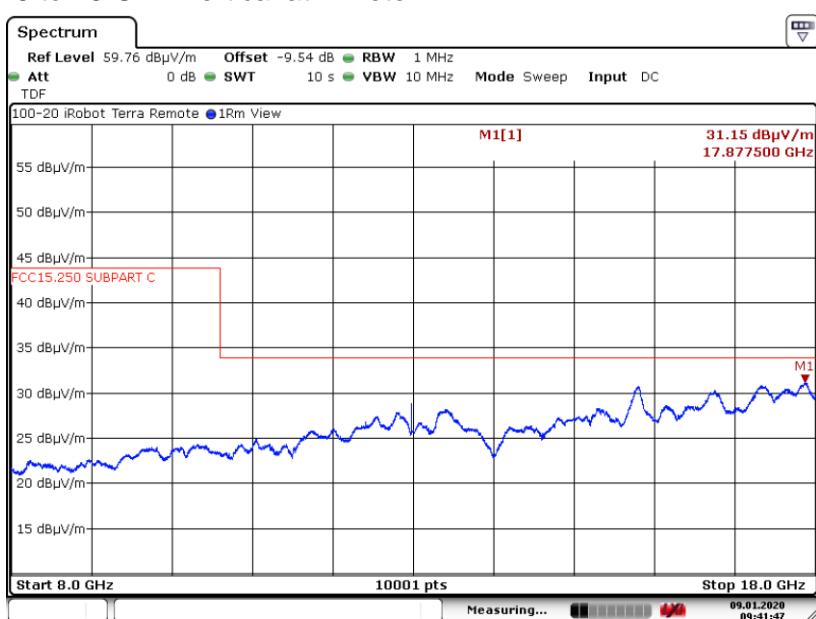

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (1), RSS-220 5.3.1 (d) continued)

6.4.6. 18 to 40 GHz Horizontal at 0.3 Meter

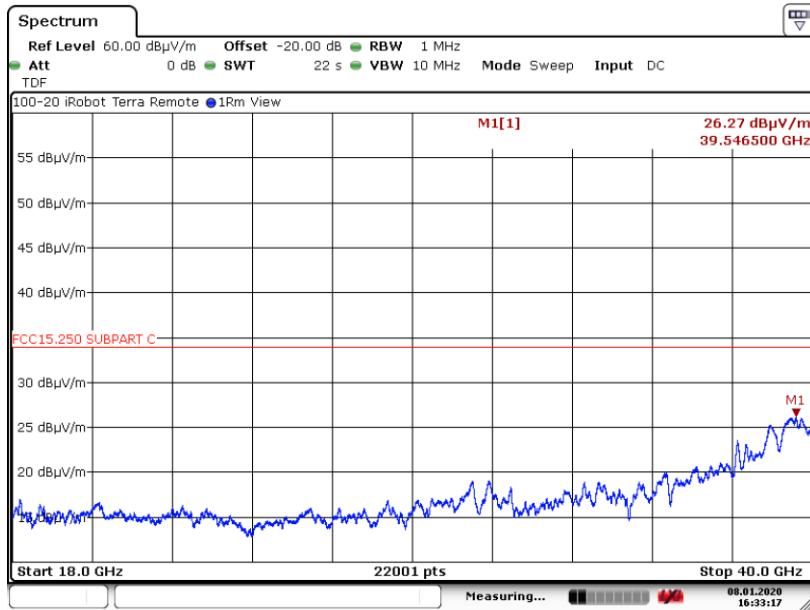

Date: 8.JAN.2020 16:33:17

6.4.7. 18 to 40 GHz Vertical at 0.3 Meter

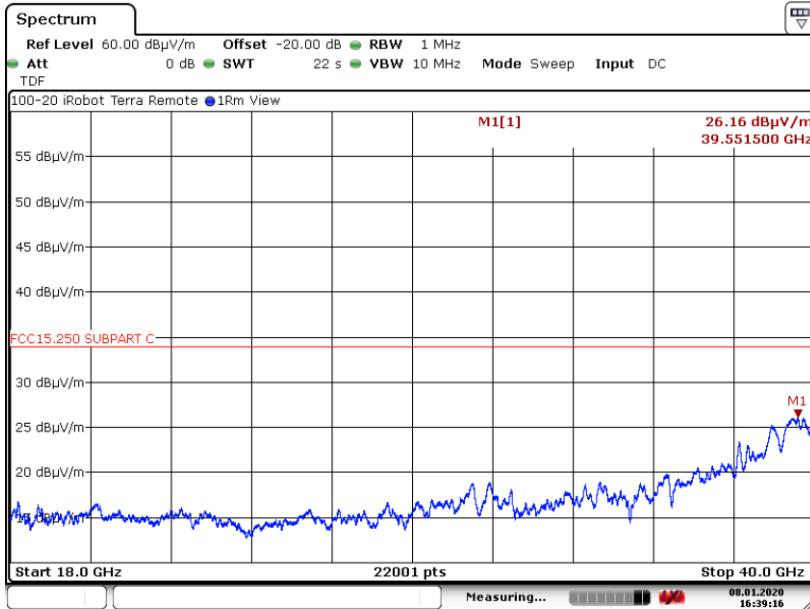

Date: 8.JAN.2020 16:39:16

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2), RSS-220 5.3.1 (e))

Requirement: In addition to the radiated emission limits specified in the table in paragraph (d) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
1164 - 1240	-85.3	9.9
1559 - 1610	-85.3	9.9

6.5.1. Measurement & Equipment Setup

EMI Receiver IF Bandwidth: 1 kHz
EMI Receiver Avg Bandwidth: 10 kHz
Detector Function: RMS

6.5.2. Test Procedure

Test measurements were made in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

6.5.3. 1164 to 1240 MHz & 1559 to 1610 MHz

There were no broadband emissions related to the UWB transmitter. Measured signals were narrowband and related to the microprocessor / clocks and do not fall under the requirements of this section. At 3 Meters the -85.3 dBm limit is converted to a field strength limit of 9.9 dB μ V/m using a distance correction factor of 95.2.

A distance correction factor of -9.54 dB was entered into the analyzer as an offset since the measurements were made at 1 meter.


Note: Narrowband emissions are due to processor noise and are subjected to a different limit.

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2), RSS-220 5.3.1 (e))

6.5.2 1164 to 1240 MHz Band

6.5.2.1 Horizontal Measurement Polarity 1164 to 1240 MHz

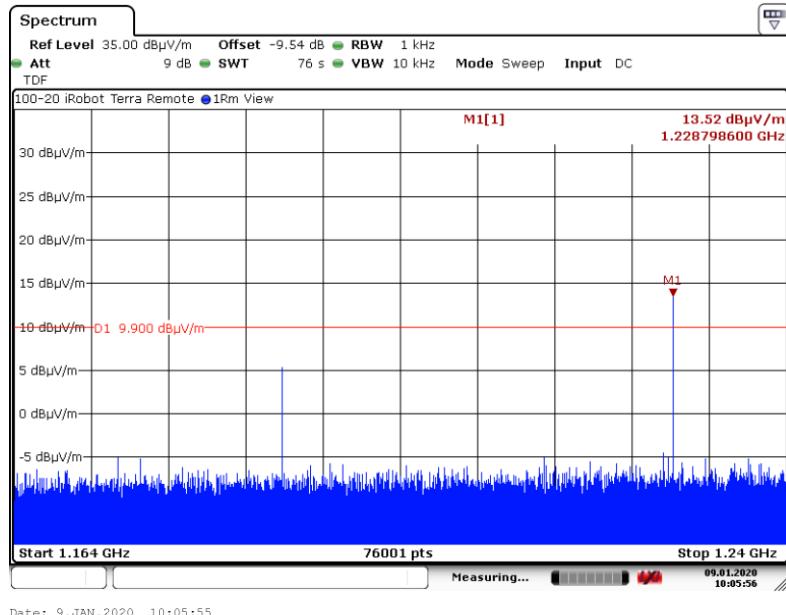

6.5.2.2 Vertical Measurement Polarity 1164 to 1240 MHz

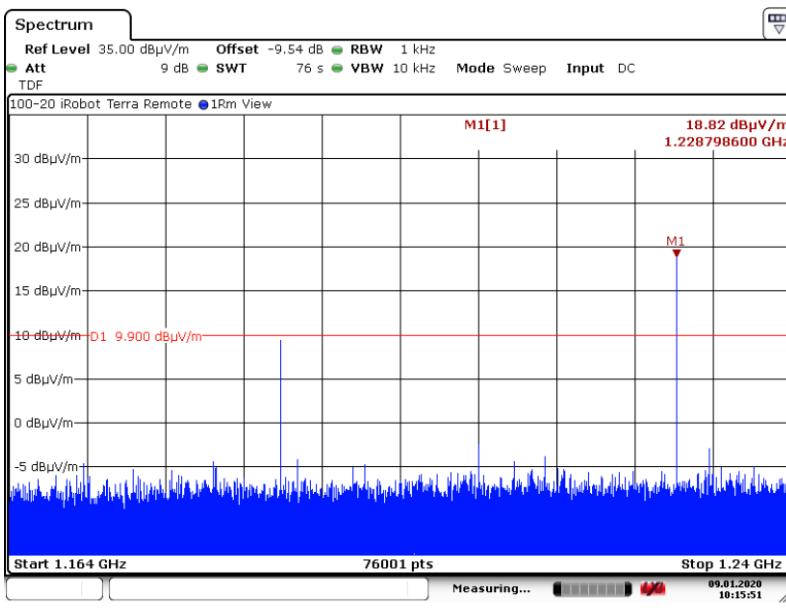


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2), RSS-220 5.3.1 (e))

6.5.3 1559 to 1610 MHz Band

6.5.3.1 Horizontal Measurement Polarity 1559 to 1610 MHz

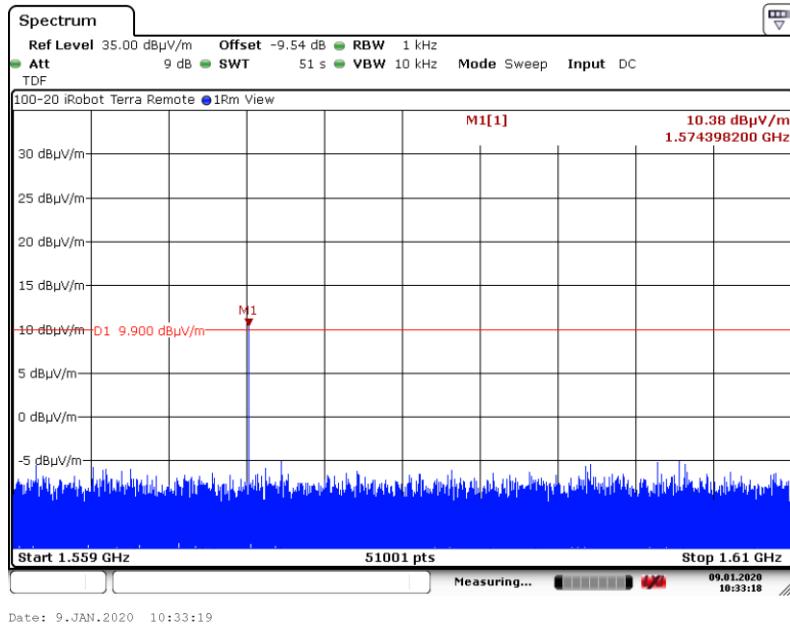

6.5.3.2 Vertical Measurement Polarity 1559 to 1610 MHz

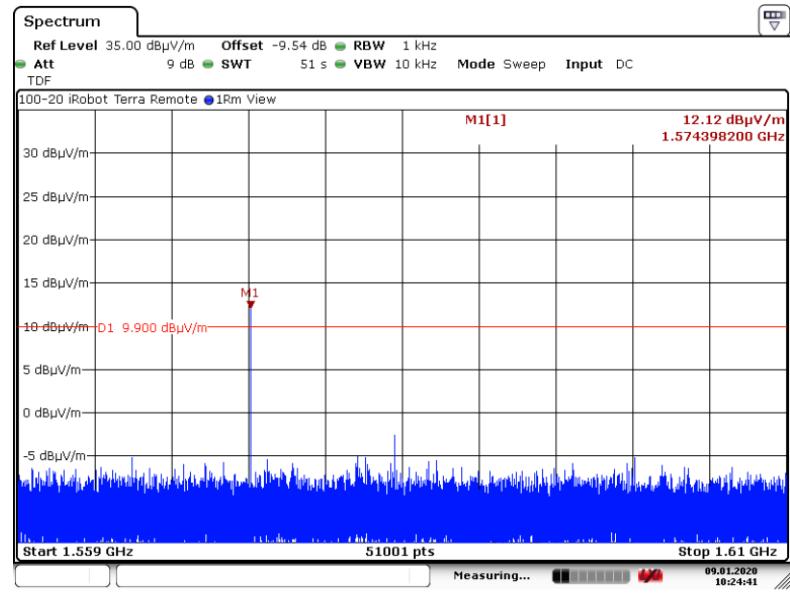

6. Measurement Data (continued)**6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1), RSS-220 5.3.1 (d))**

Requirement: The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

The EIRP in terms of dBm, can be converted to a field strength, in dB μ V/m at 3 Meters by adding 95.2.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
5925 - 7250	-41.3	53.9

Frequency Range:	6 to 7 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	1 MHz
EMI Receiver Avg Bandwidth	10 MHz
Detector Function:	RMS 1 mS Average

6. Measurement Data (continued)

6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1), RSS-220 5.3.1 (d))

Requirement: The limit for operation in the 5925 to 7250 MHz band is -41.3 dBm EIRP.


Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.466	51.55	53.90	-2.35	V	212	289	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, EIRP = E_{meas} + 20 log (d_{meas}) - 104.7; d_{meas} = 3
EIRP (dBm) = E_{meas} (dB μ V/m) - 95.2

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.466	-43.65	-41.30	-2.35	V	212	289	Compliant

6.6.1. Plot of RMS Power at 3 Meters

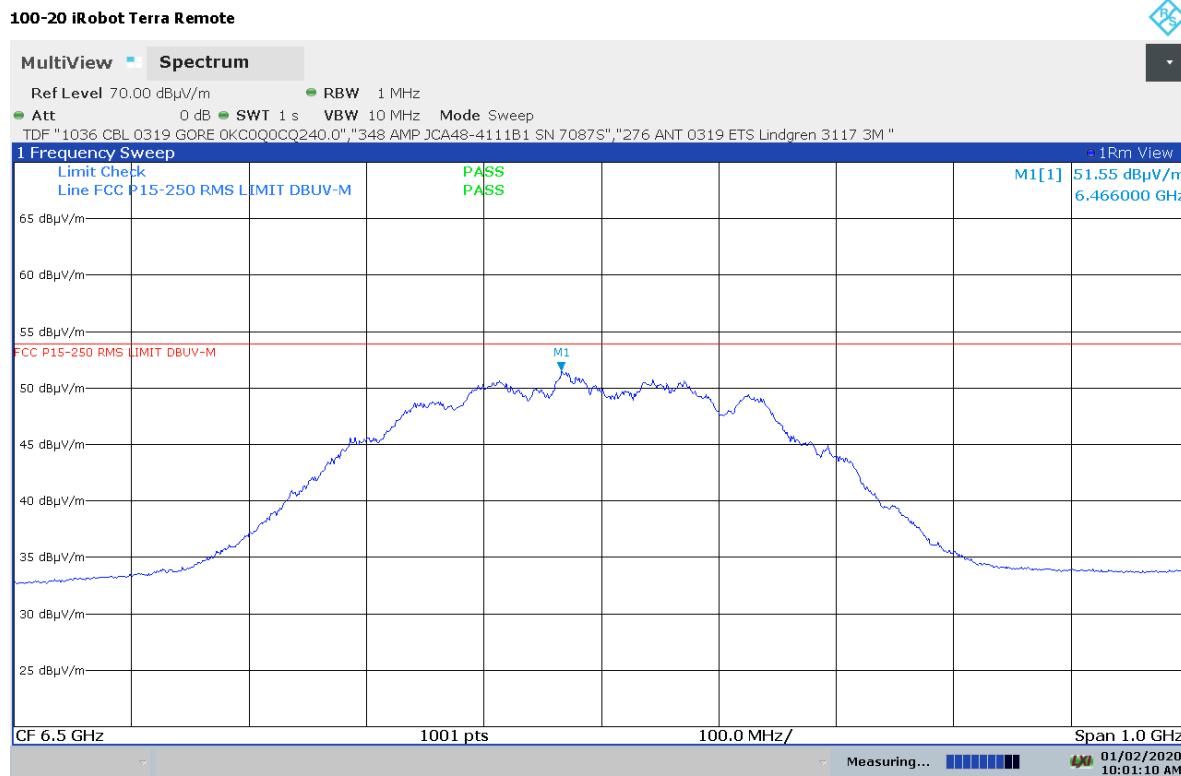

10:01:10 AM 01/02/2020

6. Measurement Data (continued)**6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3), RSS-220 5.3.1 (g))**

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

The EIRP in terms of dBm, can be converted to a field strength, in dB μ V/m at 3 Meters by adding 95.2.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
5925 - 7250	0	95.2

Frequency Range: 6 to 7 GHz
Measurement Distance: 3 Meters
EMI Receiver IF Bandwidth: 50 MHz
EMI Receiver Avg Bandwidth: 80 MHz
Detector Function: Peak, Max Held

6. Measurement Data (continued)

6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3), RSS-220 5.3.1 (g))

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.490	91.30	95.20	-3.90	V	212	289	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log (d_{meas}) - 104.7$; $d_{meas} = 3$

$$EIRP (\text{dBm}) = E_{meas} (\text{dB}\mu\text{V/m}) - 95.2$$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.490	-3.90	0.00	-3.90	V	212	289	Compliant

6.7.1 Plot of Peak Power at 3 Meters

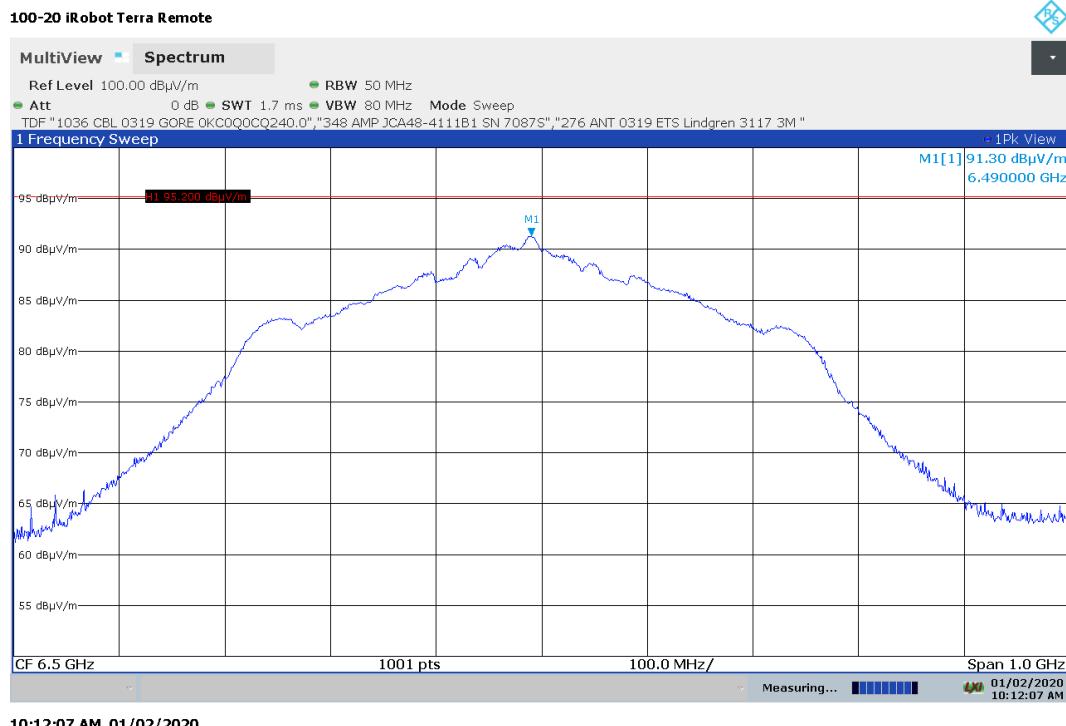

6. Measurement Data (continued)

6.8 Conducted Emissions Test Setup

6.8.1. Regulatory Limit: FCC Part 15.207, RSS-Gen

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

6.8.2 Measurement Equipment and Software Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due
EMI Receiver	Rohde & Schwarz	ESR7	101156	9/10/2020
LISN	EMCO	3825/2	9109-1860	9/10/2020
Manufacturer	Software Description		Title/Model #	Rev.
Compliance Worldwide	Test Report Generation Software		Test Report Generator	1.0

6.8.3. Measurement & Equipment Setup

Test Date:	N/A
Test Engineer:	N/A
Site Temperature (°C):	22.2
Relative Humidity (%RH):	45.3
Frequency Range:	0.15 MHz to 30 MHz
EMI Receiver IF Bandwidth:	9 kHz
EMI Receiver Avg Bandwidth:	30 kHz
Detector Functions:	Peak, Quasi-Peak. & Average

6.8.4. Test Procedure

Test measurements were made in accordance with ANSI C63.4-2014, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

6. Measurement Data (continued)

6.9. Public Exposure to Radio Frequency Energy Levels (1.1310)


6.9.1 RF Exposure for devices that operate above 6 GHz (continued)

Requirement: TCB Workshop November 2019 RF Exposure Policy Updates dated November 13, 2019, specifically slide 11.

Test exclusion based on 1 mW may be used now with the portable device $f > 6\text{GHz}$ FCC MPE power density limits. Maximum time-averaged conducted power irrespective of distance from the body.

Worst Case conducted peak power = **-5.46 dBm**

137-20 iRobot Terra Remote

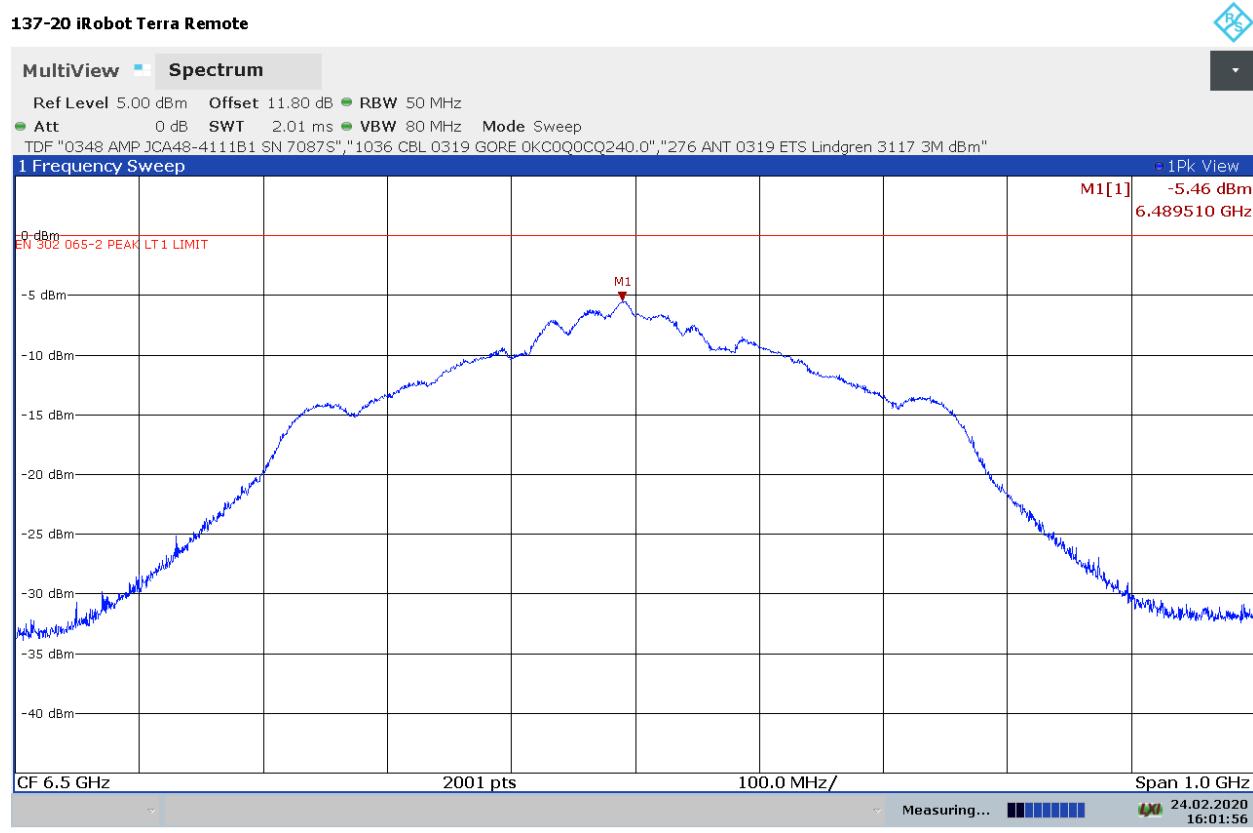

16:01:56 24.02.2020

Result: Device is compliant with the Test Exclusion requirement of 1 mW.

The BLE Module and UWB radios do not operate simultaneously.

7. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0274.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 32, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

The radiated emissions test site for measurements above 1GHz is a 3 Meter open area test site (OATS) with a 3.6 by 3.6 meter anechoic absorber floor patch to achieve a quasi-free space measurement environment per ANSI C63.4/C63.10 and CISPR 16-1-4 standards.

The sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

8. Test Images

8.1. Spurious and Harmonic Emissions – 30 kHz to 1 GHz Front



8. Test Images

8.2. Spurious and Harmonic Emissions – 30 kHz to 30 MHz Rear



8. Test Images

8.3. Spurious and Harmonic Emissions – 30 MHz to 1 GHz Rear



8. Test Images

8.4. Spurious and Harmonic Emissions – 1 to 18 GHz Front




8. Test Images

8.5. Spurious and Harmonic Emissions – 1 to 18 GHz Rear



8. Test Images

8.6. Spurious and Harmonic Emissions – 18 to 40 GHz Side

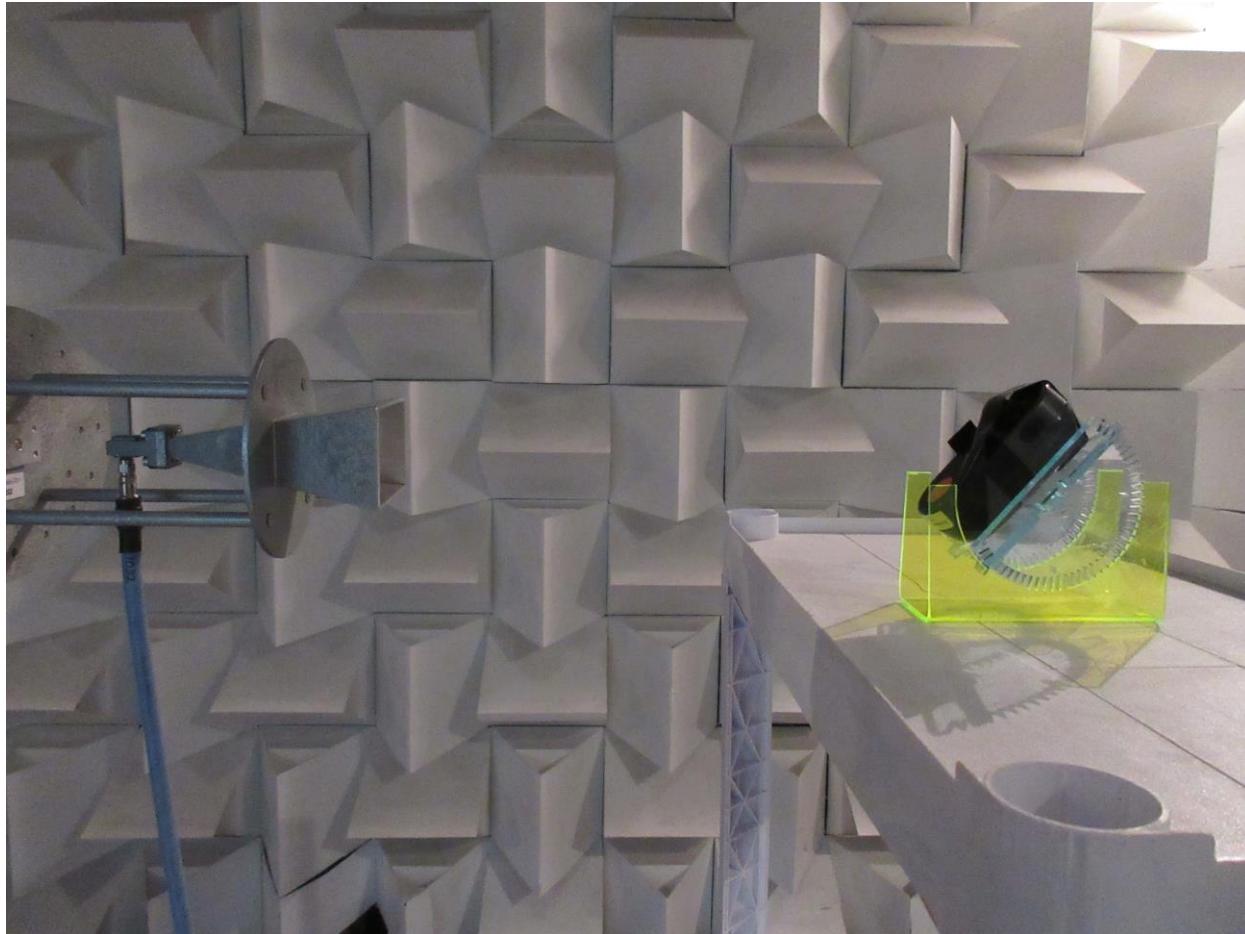

8. Test Images

8.7. Frequency Stability (Setup)



8. Test Images

8.8. Frequency Stability (Setup)

