



Nemko Test Report: 28620RUS1

Applicant: DRS Tactical Systems
1110 West Hibiscus DR.
Melbourne, FL 32901
USA

FCC ID.: UGL980026010

**Equipment Under Test:
(E.U.T.)** Armor X10

In Accordance With: **FCC Part 15, Subpart C, 15.247, 15.407 and
RSS-210, Issue 7 for**
Digital Transmission Systems and
UNII Devices

Tested By: Nemko USA, Inc.
802 N. Kealy
Lewisville, Texas 75057-3136


TESTED BY:



David Light, Senior Wireless Engineer

DATE: 25 September 2009

APPROVED BY:



Tom Tidwell, Telecom Direct

DATE: 2 October 2009

Number of Pages: 13

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	EQUIPMENT UNDER TEST (E.U.T.)	5
SECTION 3.	RADIATED EMISSIONS	7
SECTION 4.	TEST EQUIPMENT LIST	9
ANNEX A - TEST DETAILS		10
ANNEX B - TEST DIAGRAMS		12

EQUIPMENT: Armor X10

Section 1. Summary of Test Results

Manufacturer: DRS Tactical Systems

Model No.: Armor X10

Serial Nos.: L TTL 1 H80 U02 EFB4

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Digital Transmission Systems. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



NVLAP Lab Code 100426-0

Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Powerline Conducted Emissions	15.207(a) / RSS-Gen 7.2.2	Not tested
Minimum 6 dB Bandwidth	15.247(a)(2) / RSS-210 A8.2(a)	Not tested
Maximum Peak Power Output	15.247(b)(3) / 15.407(a) / RSS-210 A8.4(4)	Not tested
Spurious Emissions (Antenna Conducted)	15.247(d) / 15.407(b) / RSS-210 A8.5	Not tested
Spurious Emissions (Restricted Bands)	15.209(a) / RSS-210 2.7 Table 1	Complies
Peak Power Spectral Density	15.247(e) / RSS-210 A8.2	Not tested
Receiver Spurious Emissions	RSS-Gen 7.2.3	Not tested

Footnotes:

The Intel wireless module contained in this device is approved under FCC Identifier PD9WM3945EBG and Industry Canada Identifier 1000M-WM3945ABG. DRS Tactical Systems has modified the antenna used so only radiated spurious emissions testing was repeated.

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Band (MHz):	902-928	2400-2483.5	5725-5850
	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Operating Frequency of Test Sample: 2412 to 2462 MHz and 5180 to 5825 MHz


User Frequency Adjustment: Software controlled

EQUIPMENT: Armor X10

Description of EUT

The Armor X10 is a ruggedized tablet PC incorporating Bluetooth® and 802.11abg radios.

System Diagram

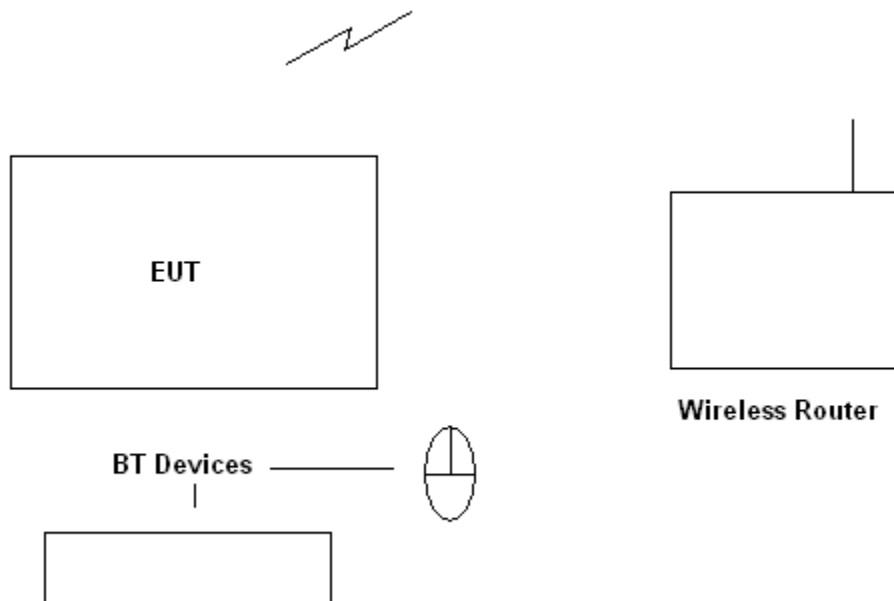

Section 3. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.247 (d)
TESTED BY: David Light	DATE: 24 September 2009

Test Results: Complies.**Measurement Data:** See attached table.**Test Conditions:** %RH
°C**Measurement Uncertainty:** +/-1.7 dB**Test Equipment Used:****Notes:**

- ☒ For handheld devices, the EUT was tested on three orthogonal axis'
- ☒ The device was tested from 30 MHz to the 40 GHz per 15.33
- ☒ The device was tested on three channels per 15.31(l).
- ☒ No emissions were detected within 20 dB of the specification limit therefore none are reported per 15.31(o). Band edge data is presented below.

RBW=VBW=100 kHz below 1000 MHz
RBW=VBW=1 MHz above 1000 MHz (Peak)
RBW= 1 MHz, VBW=10Hz (Average)

Radiated Emissions

There were no emissions detected above the noise floor. Band edge data at the highest channel in the 2.4 GHz band is presented to demonstrate compliance in the restricted band. All readings are peak unless otherwise indicated.

Channels tested:

802.11b	2412, 2440 and 2462 MHz	11 Mbps
802.11g	2412, 2440 and 2462 MHz	54 Mbps
802.11a	5180, 5320 and 5825 MHz	54 Mbps

802.11g Data

Measurement Data: Reading listed by order taken. Test Distance: 3 Meters

Freq MHz	Rdng dBμV	Pre-A dB	Horn dB	Cable dB	Cable dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
2483.50	50.2	-33.0	+29.0	+0.8	+2.3	+0.0	49.3	54.0	-4.7	Vert
2483.50	52.2	-33.0	+29.0	+0.8	+2.3	+0.0	51.3	54.0	-2.7	Horiz

802.11b Data

Measurement Data: Reading listed by order taken. Test Distance: 3 Meters

Freq MHz	Rdng dBμV	Pre-A dB	Horn dB	Cable dB	Cable dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
2483.50	45.7	-33.0	+29.0	+0.8	+2.3	+0.0	44.8	54.0	-9.2	Horiz
2483.50	46.0	-33.0	+29.0	+0.8	+2.3	+0.0	45.1	54.0	-8.9	Vert

All tests were conducted with the Bluetooth radio transmitting at 2440 MHz. There were no Intermodulation products detected.

Section 4. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	02/27/09	02/28/11
1484	Cable	Storm PR90-010-072	N/A	06/23/09	06/23/10
1485	Cable	Storm PR90-010-216	N/A	06/23/09	06/23/10
1480	Bilog Antenna	Schaffner-Chase CBL6111C	2572	10/17/08	10/17/09
791	PREAMP, 25dB	Nemko USA, Inc. LNA25	398	05/28/09	05/28/10
993	Horn antenna	A.H. Systems SAS-200/571	XXX	9/9/09	9/9/10
991	Horn antenna	EMCO 3160-10	9704-1049	CNR	N/A
992	Horn antenna	EMCO 3160-09	9705-1079	CNR	N/A

ANNEX A - TEST DETAILS

EQUIPMENT: Armor X10

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

ANNEX B - TEST DIAGRAMS

Test Site For Radiated Emissions

