


1 BLOCK DIAGRAM OF EQUIPMENT

1.1 Block diagram of SACxx0 product

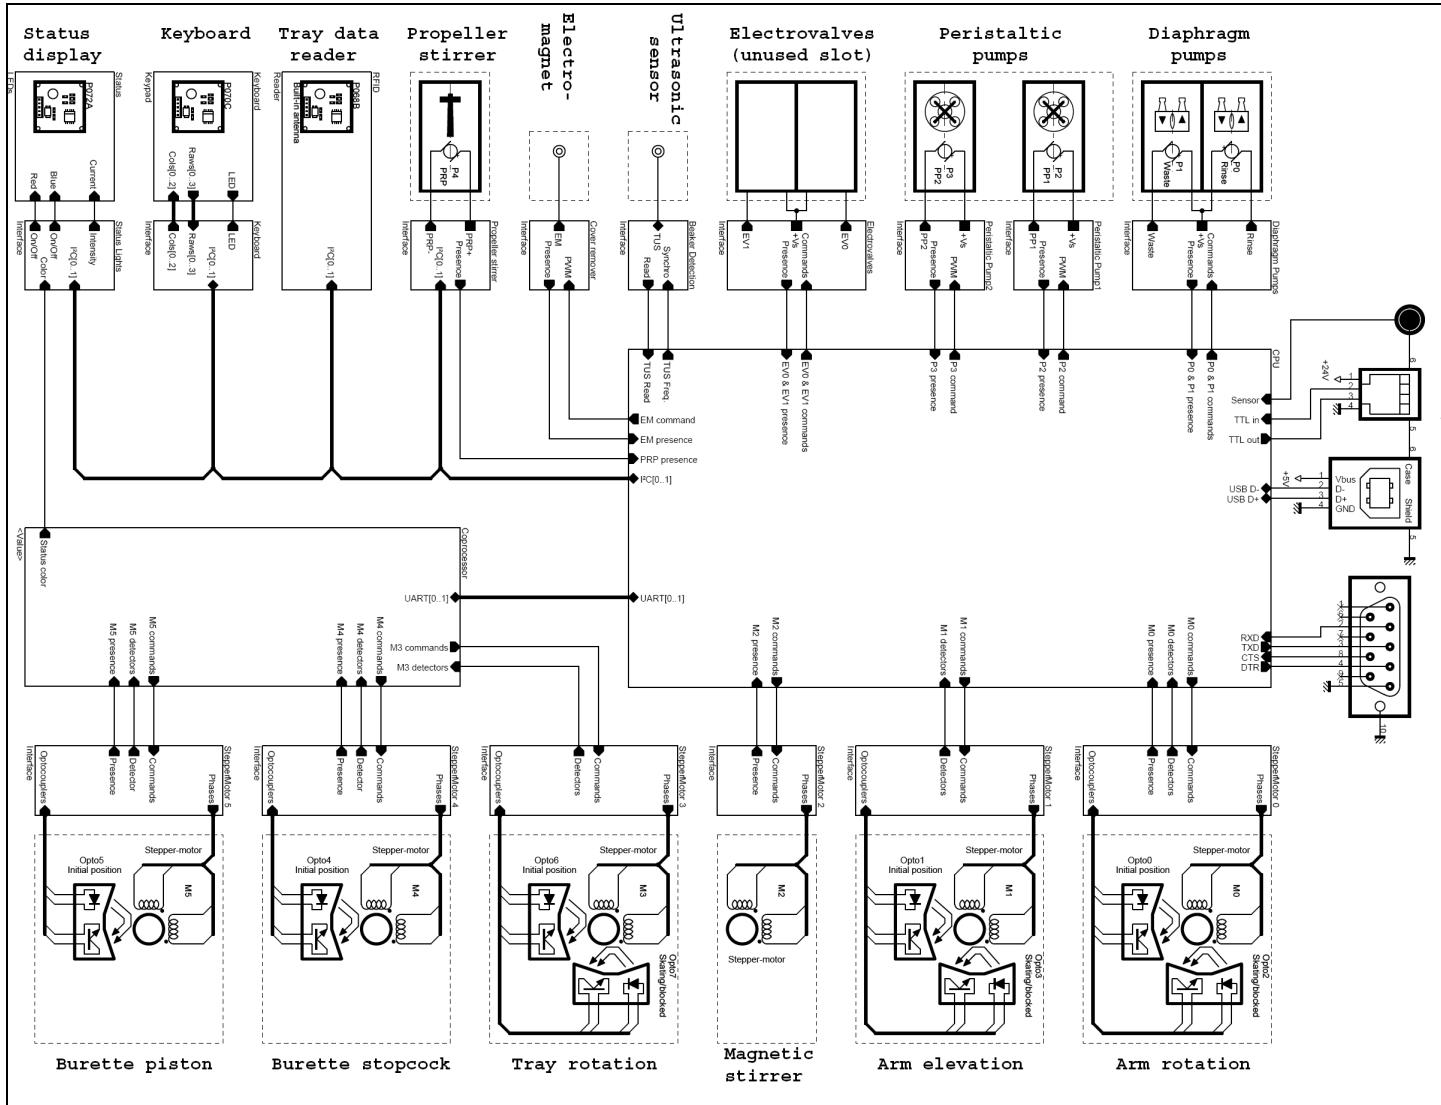

1.2 Clock list

- 40MHz: Main micro-controller clock, supplied by an integrated oscillator circuit
- 6.4MHz: Auxiliary time base, performed by quartz and a logic gate
- 12MHz: Coprocessor integrated clock
- 13.56MHz: RF integrated circuit