

# EMI TEST REPORT

On Model Name: Microwave Oven

Model Numbers: D10043(X)RIIH-(Y)

Brand Name: Galanz

FCC ID Number: UHW10043003

Prepared for Guangdong Galanz Enterprises Co., Ltd.

According to

FCC Part 18(2016)

Industrial, Scientific and Medical Equipment

FCC/OST MP-5(1986)

FCC methods of measurements of radio noise emission from industrial, scientific and medical equipment



Test Report #: GUA-1609-11573-FCC

Prepared by: <u>FCMG</u>
ViVi Huang/Assistant Company Name

... FCMC

Jawen Yin/Senior Engineer Company Name

QC Manager: ECMG

Swall Zhang/QC Manager Company Name

Test Report Released by: September 20th, 2016

Swall Zhang Date

# Verdict

Test Result :	Pass*
---------------	-------

<sup>\*:</sup>In the configuration,the EUT complied with the standard specified above.

# **Revision History**

Rev.	Issue date	Revision	Revised by
01	09/20/2016	Initial review	Jawen Yin

### **Test Location**

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

**Test Site Location** : EMC Laboratory of Guangdong

Galanz Enterprises Co., Ltd.

No.25 South Ronggui Rd., Shunde, Foshan, Guangdong,

China.

**Tel** : (86)-757-23612785

*Fax* : (86)-757- 23612537

### **Test Facility**

The test facility was recognized, certified, or accredited by the following organizations:

In compliance with the site registration requirements of section 2.948 of the FCC rules to perform EMI measurements for the general public.

FCC Registration Number: 580210

# **Table of Contents**

GOVERNMENT DISCLAIMER NOTICE	2
REPRODUCTION CLAUSE	2
OPINIONS AND INTERPRETATIONS	2
STATEMENT OF MEASUREMENT UNCERTAINTY	2
ADMINISTRATIVE DATA	3
EUT DESCRIPTION	4
TYPE OF DERIVER	4
TEST SUMMARY	5
LOAD FOR MICROWAVE OVEN	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATION	6
EUT SAMPLE PHOTOS FOR MODEL D10043MSLRIIH-WP	7
TEST SYSTEM DETAILS	12
CONFIGURATION OF TESTED SYSTEM	13
ATTACHMENT 1 -RADIATION HAZARD TEST	14
ATTACHMENT 2 - INPUT POWER MEASUREMENT	16
ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT	18
ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT	20
ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS	23
ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS	28

### **List Attached Files**

Exhibit Type	File Description	File Name
Test Report	Test Report	UHW10043003_Test Report.pdf
Operation Description	Technical Description	UHW10043003_Operation Description.pdf
External Photos	External Photos	UHW10043003_External Photos.pdf
Internal Photos	Internal Photos	UHW10043003 _Internal Photos.pdf
Block Diagram	Block Diagram	UHW10043003 _Block Diagram.pdf
Schematics	Circuit Diagram	UHW10043003_Schematics.pdf
ID Label/Location	Label and Location	UHW10043003_Label & Location.pdf
User Manual	User Manual	UHW10043003_User's Manual.pdf
Test set-up photos	Test set-up photos	UHW10043003 _Test Set-up Photos

### **Government Disclaimer Notice**

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

### **Reproduction Clause**

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

### **Opinions and Interpretations**

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

### Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

#### Administrative Data

Test Sample : Microwave Oven

Model Numbers : D10043(X)RIIH-(Y)

Model Tested : D10043MSLRIIH-WP

Brand Name : Galanz

Receipt Date : August 28th, 2016

Date Tested : August 30th, 2016

Applicant : Guangdong Galanz Enterprises Co., Ltd.

Address No.25 South Ronggui Rd., Shunde, Foshan,

Guangdong, China

Telephone : (86)-757-23612785

Fax : (86)-757-23612537

Manufacturer 01 : Guangdong Galanz Microwave Oven Electrical

Appliance Manufacture Co., Ltd.

Address 25 Ronggui Nan Rd., Shunde, Foshan,

Guangdong, China

Manufacturer 02 : Guangdong Galanz Microwave Electrical

Appliances Manufacturing Co., Ltd.

Address No.3, Xingpu Road, Maxin Industrial Zone,

Huangpu Town, Zhongshan City, Guangdong

Province, China

### **EUT Description**

Guangdong Galanz Enterprises Co., Ltd. model tested D10043MSLRIIH-WP (referred to as the EUT in this report) is a Microwave Oven.

The technical specifications of EUT are as below:

Power consumption	120VAC 60Hz, 1500W(Microwave)
Output	1000W
Operation frequency	2450Hz
Magnetron brand	Galanz
Magnetron number	M24FC-610A
Outside dimensions(HxWxD)	554X312X570 mm
Capacity	1.5 cu.ft
Cooking uniformity	Turntable System
Net weight	Approx. 43.65lbs.

Note: For more detailed information or features please refer to user's manual of EUT.

### Type of Deriver

Model Numbers: D10043(X)RIIH-(Y)
Model Tested: D10043MSLRIIH-WP
D10043(X)RIIH-(Y) model designations:
D: With microwave, grill function;

100: denote the output power is 1000W; 43: denote different capacity in 43 liters;

RII:With convection function H: denote humidity sensor

(X): Variable (X) may be

L,P,SL,SP,TL,TP,YL,YP,YTL,YTP,AL,AP,ASL,ASP,ATL,ATP,AYL,AYP,AYTL,A YTP,EL,EP,ESL,ESP,ETL,ETP,EYL,EYP,EYTL,EYTP,ML,MP,MSL,MSP,MTL,MT P,MYL,MYP,MYTL,MYTP.

The last letter "L" is pull-out type door, "P" is push-button type door. The first letter when there is no letter before "L" and "P" denotes mechanical control model; when there are "A" or "E" or "M" denotes the electrical control model. In the middle when no suffixes denotes the oven cavity made of epoxy painted steel, "S" denotes the oven cavity made of stainless steel, "T" denotes the color of cavity is black, "Y" denotes the color of cavity is white, "YT" denotes the color of cavity is gray.

(Y): Variable (Y) demotes the appearance;

Model D10043MSLRIIH-WP was actually tested in this report.

### **Test Summary**

The electromagnetic compatibility requirements on model D10043MSLRIIH-WP for this test are stated below. all results listed in this report relate exclusively to this above-mentioned model as the equipment under test. this report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 18:2016 FCC/OST MP-5:1986 ANSI C63.4-2014	Radiation Hazard Measurement	Passed	Enclosure	Attachment 1
FCC Part 18:2016 FCC/OST MP-5:1986 ANSI C63.4-2014	Input Power Measurement	Passed	AC Input Port	Attachment 2
FCC Part 18:2016 FCC/OST MP-5:1986 ANSI C63.4-2014	RF Output power Measurement	Passed	EUT	Attachment 3
FCC Part 18:2016 FCC/OST MP-5:1986 ANSI C63.4-2014	Operating Frequency Measurement	Passed	EUT	Attachment 4
FCC Part 18:2016 FCC/OST MP-5:1986 ANSI C63.4-2014	Conducted Emission	Passed	AC Input Port	Attachment 5
FCC Part 18:2016 FCC/OST MP-5:1986 ANSI C63.4-2014	Radiated Emission	Passed	Enclosure	Attachment 6

### Load for Microwave Oven

For all measurements the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tag water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

- -Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- -Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- -Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.
- -Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.

### **EUT Exercise Software**

No Exercise software support this test.

#### **Equipment Modification**

Any modifications installed previous to testing by Guangdong Galanz Enterprises Co., Ltd., will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.

# **EUT Sample Photos for Model D10043MSLRIIH-WP**




**EUT Front View** 




**EUT Back View** 



**Door Opend View** 

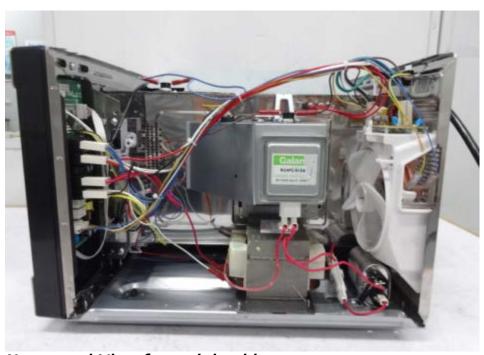


Uncovered View from right side

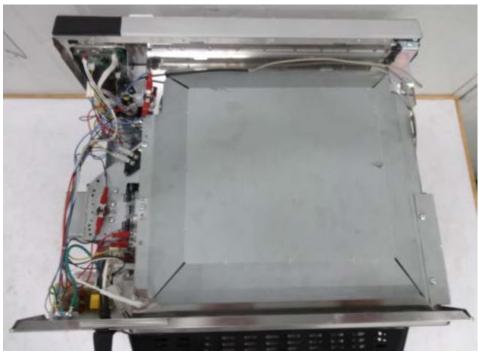


Uncovered View from top side




**Magnetron Front View** 

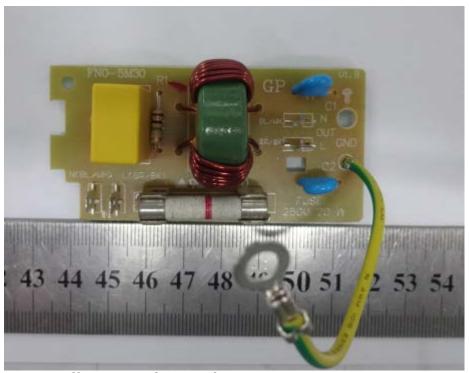


Power Filter Board Top View

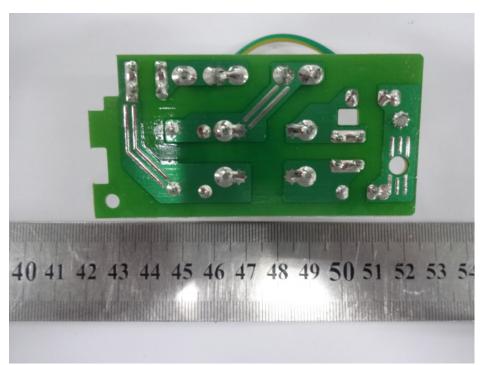

Power Filter Board Bottom View

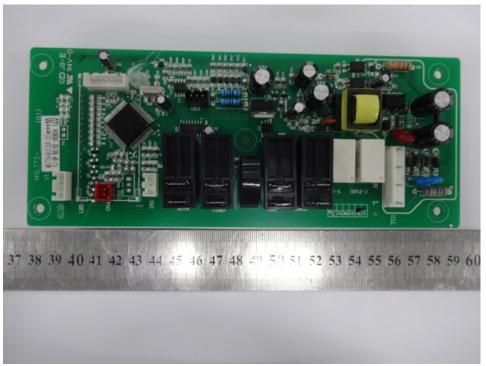

Mother board - Top View

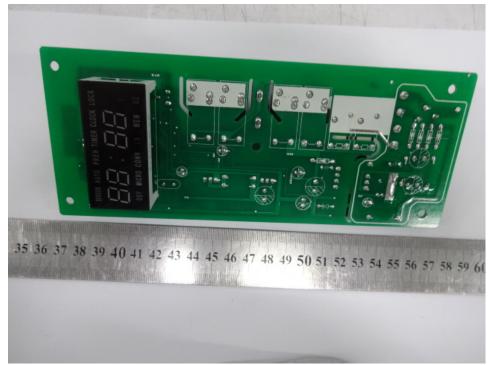

Mother board - Bottom View


### **Test System Details**

			EUT			
Model Number:	D1004	13(X)RIIH-(Y)				
Model Tested:	D1004	13MSLRIIH-WP	•			
Description:	Micro	vave Oven				
Input:	AC 12	0V/60Hz				
Manufacturer:	Guang	dong Galanz	Enterprises Co.	., Ltd.		
	<u> </u>	Suppor	t Equipment			
Description	Мо	del Number	Serial Num	ber	Ма	nufacturer
			N/A			
		Cable I	Description			
Description	From	То	Length (Meters)	Shie (Y/		Ferrite (Y/N)
Power Cable	EUT	Plug	1.10	٨	J	N

#### Note:

The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

# **Configuration of Tested System**

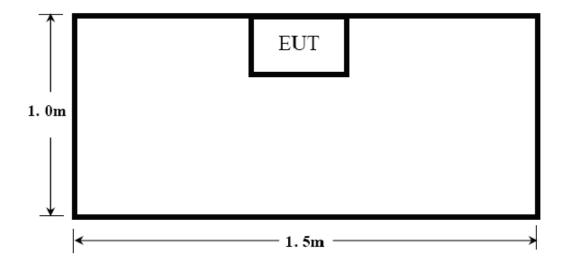

### ATTACHMENT 1 -RADIATION HAZARD TEST

CLIENT:	Guangdong Galanz Enterprises Co Ltd.	TEST STANDERD:	FCC Part 18	
MODEL NUMBERS:	D10043(X)RIIH-(Y)	PRODUCT:	Microwave Oven	
MODEL TESTED:	D10043MSLRIIH-WP	EUT DESIGNATION:	Home or Office	
TEMPERATURE:	23°C	HUMIDITY:	51%	
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord	
TESTED BY:	Daomen Guan	DATE OF TEST:	August 30 <sup>th</sup> ,2016	
TEST REFERENCE:	ANSI C63.4-2014, FCC/OST N	MP-5:1986		
TEST PROCEDURE:	The EUT was set-up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement. The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed. A 700ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven operating, the microwavemeter will check the leakage and then record the maximum leakage.			
TESTED RANGE:	N/A			
TEST VOLTAGE:	AC 120V/60Hz			
RESULTS:	There was no microwave leakage exceeding a power level of 0.19mW/cm <sup>2</sup> observed at any point 5cm or more from the external surface of the oven.  A maximum of 1.0 mW/cm <sup>2</sup> is allowed in accordance with the applicable FCC standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed. The test results relate only to the equipment under test provided by client.			
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.			
M. UNCERTAINTY:	0.03 mW/cm <sup>2</sup>			

Test Equipment List:

Test Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Microwave Measurement system	HOLADAY	HI-1710	98370	2017.1.16

TESTED BY:

**ENGINEER** 

REVIEWED BY:

SENIOR ENGINEER

Radiation Hazard Test Set up:



### ATTACHMENT 2 - INPUT POWER MEASUREMENT

CLIENT:	Guangdong Galanz Enterprises Co Ltd.	TEST STANDERD:	FCC Part 18	
MODEL NUMBERS:	D10043(X)RIIH-(Y)	PRODUCT:	Microwave Oven	
MODEL TESTED:	D10043MSLRIIH-WP	EUT DESIGNATION:	Home or Office	
TEMPERATURE:	22°C	HUMIDITY:	59%	
ATM PRESSURE:	103.1kPa	GROUNDING:	Through AC Power Cord	
TESTED BY:	Daomen Guan	DATE OF TEST:	August 30 <sup>th</sup> ,2016	
TEST REFERENCE:	ANSI C63.4-2014, FCC/OST MP-5:1986			
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for input power measurement. The input power and current was measured using a power analyzer. A 700ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven is operating, use a voltmeter and an ampmeter to test the AC input voltage and current.			
TESTED RANGE:	N/A			
TEST VOLTAGE:	120VAC / 60Hz			
RESULTS:	Based on the measured input power, the EUT was found to be operating within the intended specifications. The test results relate only to the equipment under test provided by client.			
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.			
M. UNCERTAINTY:	± 5W			

### Test Data:

Input voltage	Input Current	Measured Input Power	Rated input Power
(V)	(A)	(W)	(W)
120.0V/60Hz	14.26	1614	1650

# Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Power Meter	Ainuo	AN8720P	058704074	2017.07.19

TESTED BY: ENGINEER

REVIEWED BY:

SENIOR ENGINEER

Input power Test Set up:



### ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT

	1		T	
CLIENT:	Guangdong Galanz Enterprises Co Ltd.	TEST STANDERD:	FCC Part 18	
MODEL NUMBERS:	D10043(X)RIIH-(Y)	PRODUCT:	Microwave Oven	
MODEL TESTED:	D10043MSLRIIH-WP	EUT DESIGNATION:	Home or Office	
TEMPERATURE:	22 °C	HUMIDITY:	60%RH	
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord	
TESTED BY:	Daomen Guan	DATE OF TEST:	August 30 <sup>th</sup> ,2016	
TEST REFERENCE:	ANSI C63.4-2014, FCC/OST	MP-5:1986		
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 1000ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.  RF Output Power			
	= (4.2joules/calorie)(volume i			
	= 4.2 joules/calorie × 1000 ×	(гінаі тетір - іпіцаі теті	U) / 12U	
TESTED RANGE:	N/A			
TEST VOLTAGE:	120VAC / 60Hz			
RESULTS:	The test results relate only to the equipment under test provided by client.			
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.			
M. UNCERTAINTY:	± 0.3°C			

### Test Result:

Initial Temp	Final Temp	Measured Times	Measured out put
(°C)	(で)	(s)	Power(W)
20.2	47.8	1235	973

RF Output Power (W) =  $4.2 \times 1000 \times (Final Temp - Initial Temp) / 120 = 973 watts$ 

Test Equipments list:

Test Equipment	Test Equipment Manufacturer		Serial No.	Cal. Due Date	
Digit Thermometer	TES	TES1310	021108782	2017.08.12	
Electronic scale	le USA.HZ&HUAZI 5kg		11038	2017.03.24	
Power Meter	Power Meter Ainuo		058704074	2017.07.19	

TESTED BY:

ENGINEER

REVIEWED BY:

SENIOR ENGINEER

RF Output power Test Set up:



# ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT

	1		1	
CLIENT:	Guangdong Galanz Enterprises Co Ltd.	TEST STANDERD:	FCC Part 18	
MODEL NUMBERS:	D10043(X)RIIH-(Y)	PRODUCT:	Microwave Oven	
MODEL TESTED:	D10043MSLRIIH-WP	EUT DESIGNATION:	Home or Office	
TEMPERATURE:	<b>22</b> °C	HUMIDITY:	60%RH	
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord	
TESTED BY:	Daomen Guan	DATE OF TEST:	August 30 <sup>th</sup> ,2016	
TEST REFERENCE:	ANSI C63.4-2014, FCC/OST	MP-5:1986		
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating Frequency Measurement.  1) The variation of frequency with time. The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000ml water load in a beaker was located in the center of the oven. Set a spectrum analyzer with antenna at 3 meters distance form the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.  2) The variation of frequency with Line Voltage. The operating frequency was measured using a spectrum analyzer. The EUT was operated/warmed by at least 10 minutes of use with a 1000ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.			
TESTED RANGE:	2450 ± 50MHz			
TEST VOLTAGE:	120VAC / 60Hz			
RESULTS:	Please refer to following pages for details of the variation in operating frequency with time & line voltage measurement. The test results relate only to the equipment under test provided by client.			
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.			
M. UNCERTAINTY:	Freq. ±10kHz			

# Variation in Operating Frequency with Time:

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2420.4	2468.4

# Variation in Operating Frequency with Line Voltage:

Minimum Frequency (MHz)	Maximum Frequency (MHz)			
2406.8	2446.0			
Note: Line voltage varied from 96Vac to 150Vac.				

### Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Spectrum Analyzer	R&S	FSP30	100755	11/20/2015	11/19/2016
Horn Antenna	ETS	3115	6587	10/24/2015	10/23/2016

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:

**ENGINEER** 

REVIEWED BY:

**SENIOR ENGINEER** 


**Operating Frequency Test Set-up:** 



### ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS

CLIENT:	Guangdong Galanz Enterprises Co Ltd.	TEST STANDERD:	FCC Part 18			
MODEL NUMBERS:	D10043(X)RIIH-(Y)	PRODUCT:	Microwave Oven			
MODEL TESTED:	D10043MSLRIIH-WP	EUT DESIGNATION:	Home or Office			
TEMPERATURE:	<b>22</b> °C	HUMIDITY:	60%RH			
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord			
TESTED BY:	Daomen Guan	n DATE OF TEST: August 30 <sup>th</sup> ,2016				
TEST REFERENCE:	ANSI C63.4-2014, FCC/OST	MP-5:1986				
TEST PROCEDURE:	The EUT was set up according for conducted emissions. The an EMI receiver peak scan which six highest significant peaks when the quasi-peaked and averaged. 150kHz to 30MHz.	e measurement was using as made at the frequency were then marked, and th	g a AMN on each line and measurement range. The less signals were then			
TESTED RANGE:	150kHz to 30MHz					
TEST VOLTAGE:	120VAC / 60Hz					
RESULTS:	The EUT meets the requirements of test reference for Conducted Emissions.The test results relate only to the equipment under test provided by client.					
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.					
M. UNCERTAINTY:	The maximum measurement 150KHz~ 30MHz: 3.0dB	uncertainty is evaluated	as:			

### Conducted Emission Test Set up:

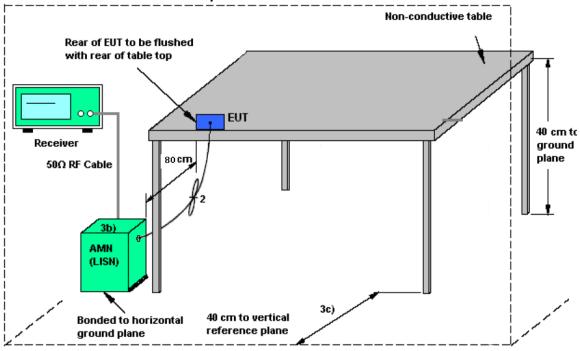


AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test


ISN = Impedance stabilization network

#### Scan Diagram

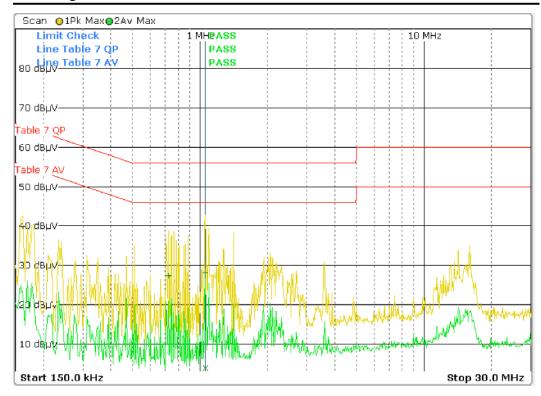

Line L Conducted Emission Graph

#### Scan Diagram

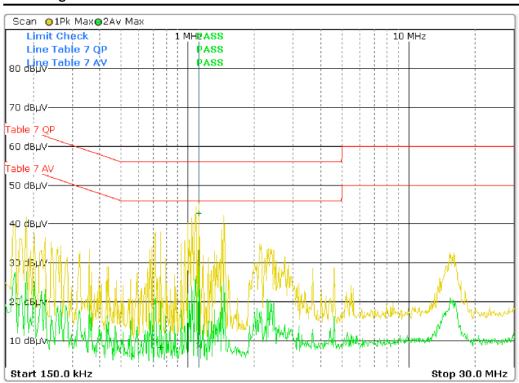

Line N Conducted Emission Graph

### Test Data:

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	0.1830	36.5	64.3	27.8	0.1830	26.5	54.3	27.8
L	0.3650	29.3	58.6	29.3	0.3650	18.4	48.6	30.2
L	0.7540	8.3	56.0	47.7	0.7540	6.5	46.0	39.5
L	1.1260	42.7	56.0	13.3	1.1260	8.8	46.0	37.2
L	1.4760	36.6	56.0	19.4	1.4760	17.3	46.0	28.7
L	26.7250	25.6	60.0	36.7	26.7250	15.7	50.0	29.5
N	0.6280	27.9	56.0	28.1	0.6280	20.1	46.0	25.9
N	0.7260	27.4	56.0	28.6	0.7260	19.5	46.0	26.5
N	1.0540	28	56.0	28.0	1.0540	4.0	46.0	42.0
N	1.4753	31.2	56.0	24.8	1.4753	18.7	46.0	27.3
N	2.1650	25.8	56.0	30.2	2.1650	17.4	46.0	28.6
N	16.7320	29.6	60.0	30.4	16.7320	16.7	50.0	33.3

#### Note:

- All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not used.
   "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- The other reading are too low against official limits that are not be recorded.

### Test Equipments List:

Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due
EMI Receiver	R&S	ESR3	102050	2016-06-21	2017-06-20
AMN	R&S	ESH2-Z5	0338.5219.5 3-100396-vj	2016-03-31	2017-03-31
Shielding Room	ETS	RFD-100	3181	2016-05-24	2017-05-24

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:

**ENGINEER** 

REVIEWED BY:


**SENIOR ENGINEER** 

### Conducted Emission Test Set-up:




### **ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS**

CLIENT:	Guangdong Galanz Enterprises Co Ltd.	TEST STANDERD:	FCC Part 18		
MODEL NUMBERS:	D10043(X)RIIH-(Y)	PRODUCT:	Microwave Oven		
MODEL TESTED:	D10043MSLRIIH-WP	EUT DESIGNATION:	Home or Office		
TEMPERATURE:	22 °C HUMIDITY: 63%RH				
ATM PRESSURE:	103.0kPa GROUNDING: Through AC Power C				
TESTED BY:	Daomen Guan	DATE OF TEST:	August 30 <sup>th</sup> ,2016		
TEST REFERENCE:	ANSI C63.4-2014, FCC/OST	MP-5:1986			
TEST PROCEDURE:	The EUT was set up according 5 for radiated emissions. Michael nonconductive table. The top placed on a flush mounted made at the frequency meast Signal discrimination was the data was recorded in Quasi-paverage detector mode above. The following data lists the signary corrected readings against the given as follows:  FS= RA + AF + CF - AG  Where: FS = Field Strength  RA = Receiver Amplitude  AF = Antenna Factor  CF = Cable Attenuation Factor  AG = Amplifier Gain	rowave Oven was placed of the table is 0.8 m about a turntable. An EMI requirement range (pre-scan performed and the sign peak detection mode from a 1GHz.  gnificant emission freque cable and antenna correcte limits. Explanation of the scan and antenna corrected the scan and ant	d on a 1m *1.5m eve the ground. The table is ceiver peak scan was in an Anechoic chamber. enificant peaks marked. All en 30 MHz to 1GHz and encies, measured levels, etion factors), and the		
TESTED RANGE:	30MHz to 24.5GHz				
TEST VOLTAGE:	120VAC / 60Hz				
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.				
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.				
M. UNCERTAINTY:	The maximum measurement 30~1000MHz: 3.20dB; 1~25GHz: 3.52dB	uncertainty is evaluated	as:		

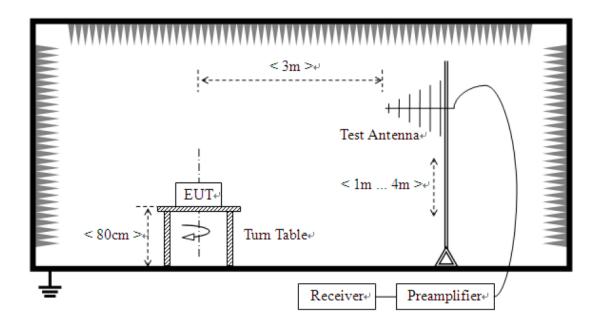

For radiated emissions above 1GHz

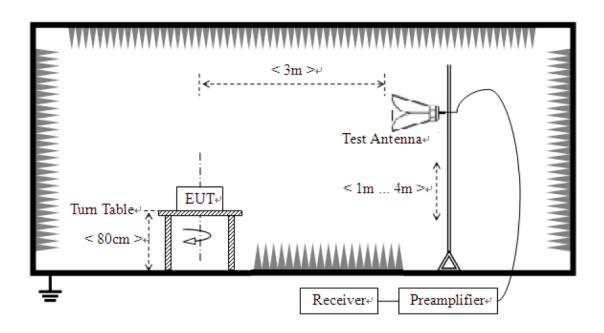

### Field strength limits for out-of-band emissions:

For RF output power <500W, Limit at 300m = 27.96dBuV/mFor RF output power>500W, Limit at 300m = 20log [25\*SQRT(Power/500)]dBuV/m

#### Test Data:

7.99282

	30MHz - 1GHz								
Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dBµV/m]	Factor Field Strength [dB) [dBµV/m]		Delta, QP [dB]	3 Meters Limits [dBµV/m]			
51.60	V	/	/	34.00	-36.85	70.85			
67.08	V	/	/	51.36	-19.49	70.85			
315.24	V	/	/	39.85	-31.00	70.85			
33.44	Н	/	/	29.82	-41.03	70.85			
51.76	Н	/	/	32.89	-37.96	70.85			
67.80	Н	/	/	48.13	-22.72	70.85			

Note: 1) All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.

1 GHz - 25 GHz									
Frequency [GHz]	Antenna Polarization [V/H]	Corrected Reading [dBµV/m]	Factor (dB)	Field Strength [dBµV/m]	Delta, AV [dB]	3 Meters Limits [dBµV/m]			
2.14866	V	/	/	30.58	-40.27	70.85			
4.91532	V	/	/	50.10	-20.75	70.85			
7.98166	V	/	/	44.74	-26.11	70.85			
9.82078	V	/	/	51.69	-19.16	70.85			
2.20968	Н	/	/	31.88	-38.97	70.85			
4.35140	Н	/	/	38.33	-32.52	70.85			
7.36684	Н	/	/	50.93	-19.92	70.85			
7 00282	Н	/	/	45.08	-25.77	70.85			

Note: 1) All readings are average unless stated otherwise, using a bandwidth of 1MHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.

# Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI Receiver	SCHAFFNER	SMR4503	44	2015-10-26	2016-10-26
Horn Antenna	ETS	3115	6587	2014-10-24	2016-10-24
Broadband Antenna	ETS	3142C	00042672	2014-10-24	2016-10-24
Band-pass Filter	Micro-Tronic	BRM50702	030	2015-12-22	2016-12-22
Spectrum Analyzer	R&S	FSP30	100755	2015-11-20	2016-11-20
3m Anechoic chamber	ETS	RFD-F-100	3187	2015-05-20	2017-05-20

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:

ENGINEER

REVIEWED BY:

SENIOR ENGINEER

# Radiated Emission Test Set-up (30-1000MHz):



# Radiated Emission Test Set-up (1-25GHz):



\*\*\* End Of Report \*\*\*

FCC Test Report #: GUA-1609-11573-FCC Prepared for Guangdong Galanz Enterprises Co., Ltd. Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).