



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

December 17, 2015

ARRIS Group, Inc.  
3871 Lakefield Drive, Suite 300  
Suwanee, Georgia 30024

Dear Tony Figueiredo,

Enclosed is the EMC Wireless test report for compliance testing of the ARRIS Group, Inc., TG1682G as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 1).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\ARRIS Group, Inc.\ EMC87008-FCC407 UNII 1 Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

---

### **Electromagnetic Compatibility Criteria Test Report**

for the

**ARRIS Group, Inc.  
Model TG1682G**

**Tested under**  
The FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E

**MET Report: EMC87008-FCC407 UNII 1 Rev. 3**

December 17, 2015

#### **Prepared For:**

**ARRIS Group, Inc.  
3871 Lakefield Drive, Suite 300  
Suwanee, Georgia 30024**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 W. Patapsco Ave.  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the


**ARRIS Group, Inc.**  
**Model TG1682G**

### Tested under

The FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E



Surinder Singh, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 2, 2015	Initial Issue.
1	November 9, 2015	Revised FCC ID.
2	December 14, 2015	Revised to reflect engineer corrections.
3	December 17, 2015	Revised per customer request.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	4
	C. Test Site .....	5
	D. Description of Test Sample .....	5
	E. Equipment Configuration.....	5
	F. Support Equipment .....	6
	G. Ports and Cabling Information.....	6
	H. Mode of Operation.....	6
	I. Method of Monitoring EUT Operation .....	6
	J. Modifications .....	6
	a) Modifications to EUT .....	6
	b) Modifications to Test Standard .....	6
	K. Disposition of EUT .....	6
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>7</b>
	§ 15.203 Antenna Requirement .....	8
	§ 15.403(i) 26dB Bandwidth .....	9
	§15.407(a)(1) Maximum Conducted Output Power .....	16
	§15.407(a)(1) Maximum Power Spectral Density .....	24
	§15.407(b) & (6 - 7) Undesirable Emissions .....	32
	§ 15.407(b)(6) Conducted Emissions .....	52
	§ 15.407(f) RF Exposure .....	55
<b>IV.</b>	<b>Test Equipment .....</b>	<b>56</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>58</b>
	A. Certification Information .....	59
	B. Label and User's Manual Information .....	63

## List of Tables

Table 1. Executive Summary of EMC Part 15.407 ComplianceTesting .....	2
Table 2. EUT Summary.....	4
Table 3. References .....	4
Table 4. Equipment Configuration .....	5
Table 5. Support Equipment.....	6
Table 6. Ports and Cabling Information .....	6
Table 7. Conducted Output Power, 802.11a/ac/n 20 MHz.....	17
Table 8. Conducted Output Power, 802.11ac/n 40 MHz.....	17
Table 9. Conducted Output Power, 802.11ac 80 MHz.....	17
Table 10. Peak Spectrum Density, 802.11a/ac/n 20 MHz.....	25
Table 11. Peak Spectrum Density, 802.11ac/n 40 MHz.....	25
Table 12. Peak Spectrum Density, 802.11ac 80 MHz.....	25
Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	52
Table 14. Conducted Emissions, Test Results, Phase Line .....	53
Table 15. Conducted Emissions, Test Results, Neutral Line.....	54
Table 16. Test Equipment List .....	57

## List of Figures

Figure 1. Block Diagram of Test Configuration.....	5
--	---

## List of Plots

Plot 1. 26 dB Occupied Bandwidth, Channel 36, 802.11a 20 MHz .....	10
Plot 2. 26 dB Occupied Bandwidth, Channel 40, 802.11a 20 MHz .....	10
Plot 3. 26 dB Occupied Bandwidth, Channel 48, 802.11a 20 MHz .....	10
Plot 4. 26 dB Occupied Bandwidth, Channel 36, 802.11ac 20 MHz .....	11
Plot 5. 26 dB Occupied Bandwidth, Channel 40, 802.11ac 20 MHz .....	11
Plot 6. 26 dB Occupied Bandwidth, Channel 48, 802.11ac 20 MHz .....	11
Plot 7. 26 dB Occupied Bandwidth, Channel 36, 802.11ac 40 MHz .....	12
Plot 8. 26 dB Occupied Bandwidth, Channel 44, 802.11ac 40 MHz .....	12
Plot 9. 26 dB Occupied Bandwidth, Channel 36, 802.11ac 80 MHz .....	13
Plot 10. 26 dB Occupied Bandwidth, Channel 36, 802.11n 20 MHz .....	14
Plot 11. 26 dB Occupied Bandwidth, Channel 40, 802.11n 20 MHz .....	14
Plot 12. 26 dB Occupied Bandwidth, Channel 48, 802.11n 20 MHz .....	14
Plot 13. 26 dB Occupied Bandwidth, Channel 36, 802.11n 40 MHz .....	15
Plot 14. 26 dB Occupied Bandwidth, Channel 44, 802.11n 40 MHz .....	15
Plot 15. Maximum Conducted Output Power, Channel 36, 802.11a 20 MHz.....	18
Plot 16. Maximum Conducted Output Power, Channel 40, 802.11a 20 MHz.....	18
Plot 17. Maximum Conducted Output Power, Channel 48, 802.11a 20 MHz.....	18
Plot 18. Maximum Conducted Output Power, Channel 36, 802.11ac 20 MHz.....	19
Plot 19. Maximum Conducted Output Power, Channel 40, 802.11ac 20 MHz.....	19
Plot 20. Maximum Conducted Output Power, Channel 48, 802.11ac 20 MHz.....	19
Plot 21. Maximum Conducted Output Power, Channel 38, 802.11ac 40 MHz.....	20
Plot 22. Maximum Conducted Output Power, Channel 46, 802.11ac 40 MHz.....	20
Plot 23. Maximum Conducted Output Power, Channel 36, 802.11ac 80 MHz.....	21
Plot 24. Maximum Conducted Output Power, Channel 36, 802.11n 20 MHz .....	22
Plot 25. Maximum Conducted Output Power, Channel 40, 802.11n 20 MHz .....	22
Plot 26. Maximum Conducted Output Power, Channel 48, 802.11n 20 MHz .....	22
Plot 27. Maximum Conducted Output Power, Channel 38, 802.11n 40 MHz .....	23
Plot 28. Maximum Conducted Output Power, Channel 46, 802.11n 40 MHz .....	23
Plot 29. Peak Power Spectral Density, Channel 36, 802.11a 20 MHz .....	26
Plot 30. Peak Power Spectral Density, Channel 40, 802.11a 20 MHz .....	26
Plot 31. Peak Power Spectral Density, Channel 48, 802.11a 20 MHz .....	26
Plot 32. Peak Power Spectral Density, Channel 36, 802.11ac 20 MHz .....	27
Plot 33. Peak Power Spectral Density, Channel 40, 802.11ac 20 MHz .....	27
Plot 34. Peak Power Spectral Density, Channel 48, 802.11ac 20 MHz .....	27
Plot 35. Peak Power Spectral Density, Channel 36, 802.11ac 40 MHz .....	28
Plot 36. Peak Power Spectral Density, Channel 44, 802.11ac 40 MHz .....	28
Plot 37. Peak Power Spectral Density, Channel 36, 802.11ac 80 MHz .....	29
Plot 38. Peak Power Spectral Density, Channel 36, 802.11n 20 MHz .....	30
Plot 39. Peak Power Spectral Density, Channel 40, 802.11n 20 MHz .....	30
Plot 40. Peak Power Spectral Density, Channel 48, 802.11n 20 MHz .....	30
Plot 41. Peak Power Spectral Density, Channel 36, 802.11n 40 MHz .....	31
Plot 42. Peak Power Spectral Density, Channel 44, 802.11n 40 MHz .....	31
Plot 43. Radiated Spurious Emissions, 30 MHz – 1 GHz, Worst Case Emission .....	33
Plot 44. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11a 20 MHz .....	34
Plot 45. Radiated Spurious Emissions, Above 1 GHz, Channel 40, 802.11a 20 MHz .....	34
Plot 46. Radiated Spurious Emissions, Above 1 GHz, Channel 48, 802.11a 20 MHz .....	34
Plot 47. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11ac 20 MHz .....	35
Plot 48. Radiated Spurious Emissions, Above 1 GHz, Channel 40, 802.11ac 20 MHz .....	35
Plot 49. Radiated Spurious Emissions, Above 1 GHz, Channel 48, 802.11ac 20 MHz .....	35

Plot 50. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11ac 40 MHz .....	36
Plot 51. Radiated Spurious Emissions, Above 1 GHz, Channel 44, 802.11ac 40 MHz .....	36
Plot 52. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11ac 80 MHz .....	37
Plot 53. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11n 20 MHz.....	38
Plot 54. Radiated Spurious Emissions, Above 1 GHz, Channel 40, 802.11n 20 MHz.....	38
Plot 55. Radiated Spurious Emissions, Above 1 GHz, Channel 48, 802.11n 20 MHz.....	38
Plot 56. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11n 40 MHz.....	39
Plot 57. Radiated Spurious Emissions, Above 1 GHz, Channel 44, 802.11n 40 MHz.....	39
Plot 58. Radiated Band Edge, -27 dBm, Channel 36, 802.11a 20 MHz.....	40
Plot 59. Radiated Band Edge, -27 dBm, Channel 40, 802.11a 20 MHz.....	40
Plot 60. Radiated Band Edge, -27 dBm, Channel 48, 802.11a 20 MHz.....	40
Plot 61. Radiated Band Edge, -27 dBm, Channel 36, 802.11ac 20 MHz .....	41
Plot 62. Radiated Band Edge, -27 dBm, Channel 40, 802.11ac 20 MHz .....	41
Plot 63. Radiated Band Edge, -27 dBm, Channel 48, 802.11ac 20 MHz .....	41
Plot 64. Radiated Band Edge, -27 dBm, Channel 36, 802.11ac 40 MHz .....	42
Plot 65. Radiated Band Edge, -27 dBm, Channel 44, 802.11ac 40 MHz .....	42
Plot 66. Radiated Band Edge, -27 dBm, Channel 36, 802.11ac 80 MHz .....	43
Plot 67. Radiated Band Edge, -27 dBm, Channel 36, 802.11n 20 MHz.....	44
Plot 68. Radiated Band Edge, -27 dBm, Channel 40, 802.11n 20 MHz.....	44
Plot 69. Radiated Band Edge, -27 dBm, Channel 48, 802.11n 20 MHz.....	44
Plot 70. Radiated Band Edge, -27 dBm, Channel 36, 802.11n 40 MHz.....	45
Plot 71. Radiated Band Edge, -27 dBm, Channel 44, 802.11n 40 MHz.....	45
Plot 72. Radiated Band Edge, Average, Channel 36, 802.11a 20 MHz .....	46
Plot 73. Radiated Band Edge, Average, Channel 40, 802.11a 20 MHz .....	46
Plot 74. Radiated Band Edge, Average, Channel 48, 802.11a 20 MHz .....	46
Plot 75. Radiated Band Edge, Average, Channel 36, 802.11ac 20 MHz.....	47
Plot 76. Radiated Band Edge, Average, Channel 40, 802.11ac 20 MHz.....	47
Plot 77. Radiated Band Edge, Average, Channel 48, 802.11ac 20 MHz.....	47
Plot 78. Radiated Band Edge, Average, Channel 36, 802.11ac 40 MHz.....	48
Plot 79. Radiated Band Edge, Average, Channel 44, 802.11ac 40 MHz.....	48
Plot 80. Radiated Band Edge, Average, Channel 36, 802.11ac 80 MHz.....	49
Plot 81. Radiated Band Edge, Average, Channel 36, 802.11n 20 MHz .....	50
Plot 82. Radiated Band Edge, Average, Channel 40, 802.11n 20 MHz .....	50
Plot 83. Radiated Band Edge, Average, Channel 48, 802.11n 20 MHz .....	50
Plot 84. Radiated Band Edge, Average, Channel 36, 802.11n 40 MHz .....	51
Plot 85. Radiated Band Edge, Average, Channel 44, 802.11n 40 MHz .....	51
Plot 86. Conducted Emissions, Phase Line .....	53
Plot 87. Conducted Emissions, Neutral Line.....	54

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	Kilohertz
<b>kPa</b>	Kilopascal
<b>kV</b>	Kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	Microhenry
<b>μ</b>	Microfarad
<b>μs</b>	Microseconds
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the ARRIS Group, Inc. TG1682G, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TG1682G. ARRIS Group, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TG1682G, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with ARRIS Group, Inc., purchase order number AR1067910. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26dB Occupied Bandwidth	Compliant
§15.407 (a)(1)	Maximum Conducted Output Power	Compliant
§15.407 (a)(1)	Maximum Power Spectral Density	Compliant
§15.407 (b)(1)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Compliant
§15.407(f)	RF Exposure	Compliant

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by ARRIS Group, Inc. to perform testing on the TG1682G, under ARRIS Group, Inc.'s purchase order number AR1067910.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the ARRIS Group, Inc. TG1682G.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	TG1682G
<b>Model(s) Covered:</b>	TG1682G
<b>EUT Specifications:</b>	Primary Power: 120 VAC, 60 Hz
	FCC ID: UIDTG1682-3
	Type of Modulations: OFDM, MCS, MNSS
	Equipment Code: NII
	Max. RF Output Power: 28.92dBm
	EUT Frequency Ranges: 5180-5240MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C
	Relative Humidity: 30-60%
	Barometric Pressure: 860-1060 mbar
<b>Type of Filing:</b>	Original
<b>Evaluated by:</b>	Surinder Singh
<b>Report Date(s):</b>	December 17, 2015

Table 2. EUT Summary

## B. References

<b>CFR 47, Part 15, Subpart E</b>	Unlicensed National Information Infrastructure Devices (UNII)
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices
<b>789033 D02 General UNII Test Procedures New Rules v01</b>	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

Table 3. References

### C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

### D. Description of Test Sample

The ARRIS Group, Inc. TG1682G, Equipment Under Test (EUT), is a DOCSIS® 3.0 Dual Band Concurrent 802.11ac Wireless Telephony Gateway with MoCA®2.0.

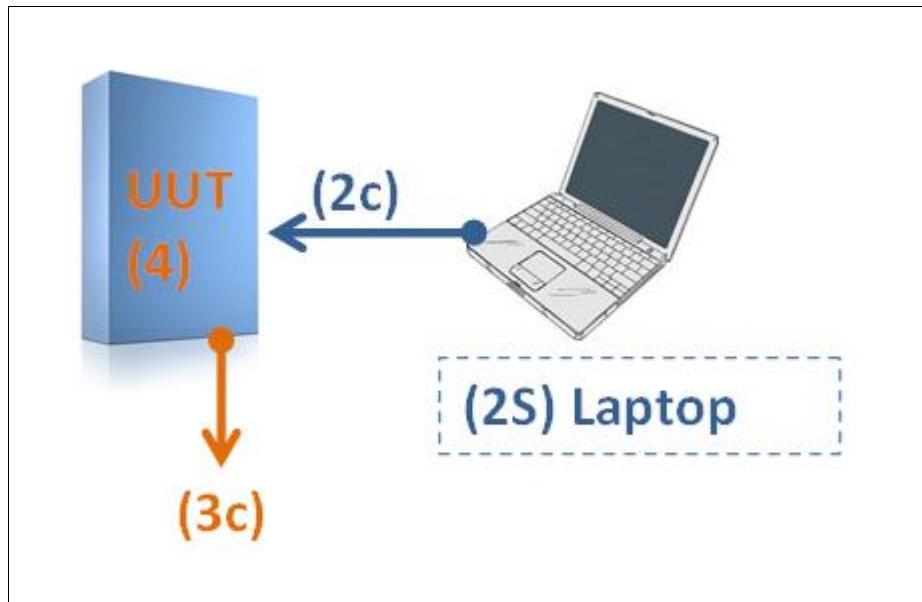


Figure 1. Block Diagram of Test Configuration

### E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Revision
4	UUT	TG1682G	--	--	--

Table 4. Equipment Configuration

## F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
2s	Laptop	Assorted	N/A

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
2C	Ethernet	5e Modular 8 pin	1	1	No	--
3C	AC Input	2 conductor, 18 AWG	1	2	No	(115v/60Hz)

**Table 6. Ports and Cabling Information**

## H. Mode of Operation

The provided instructions and software will configure the unit for operation at each required test mode.

## I. Method of Monitoring EUT Operation

All indicator lights are active and pinging constantly through system, both Wi-Fi 2.4G and 5 G passing traffic.

## J. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to ARRIS Group, Inc. upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. The EUT has an internal antenna.

**Test Engineer(s):** Surinder Singh

**Test Date(s):** 10/05/15

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 403(i)      26dB Bandwidth

**Test Requirements:** **§ 15.403(i):** For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

**Test Procedure:** The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 26 dB Bandwidth was measured and recorded.


**Test Results** The 26 dB Bandwidth was compliant with the requirements of this section.

**Test Engineer(s):** Surinder Singh


**Test Date(s):** 10/05/15




## 26 dB Occupied Bandwidth, 802.11a 20 MHz

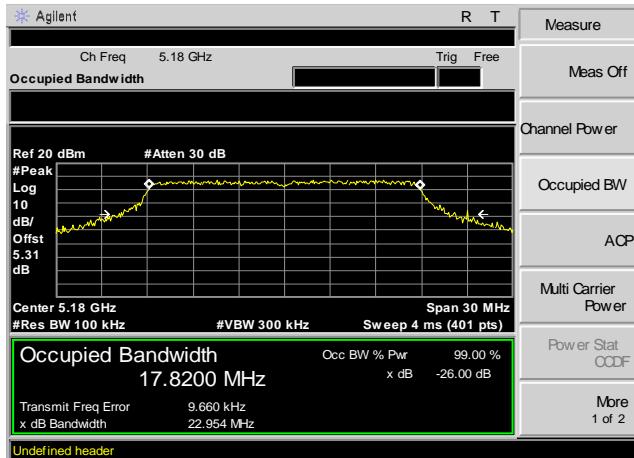

Plot 1. 26 dB Occupied Bandwidth, Channel 36, 802.11a 20 MHz

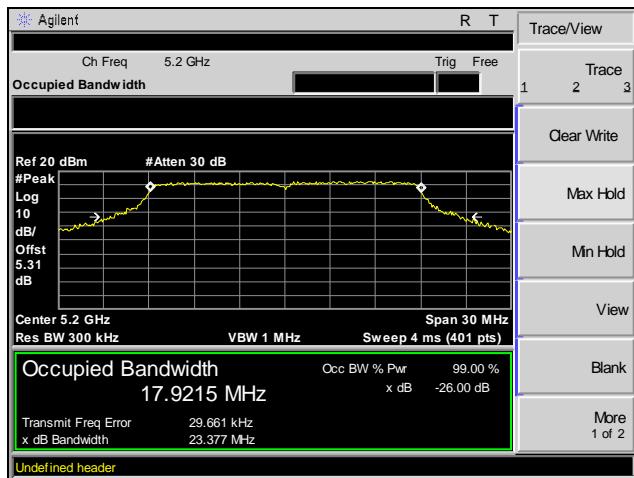


Plot 2. 26 dB Occupied Bandwidth, Channel 40, 802.11a 20 MHz

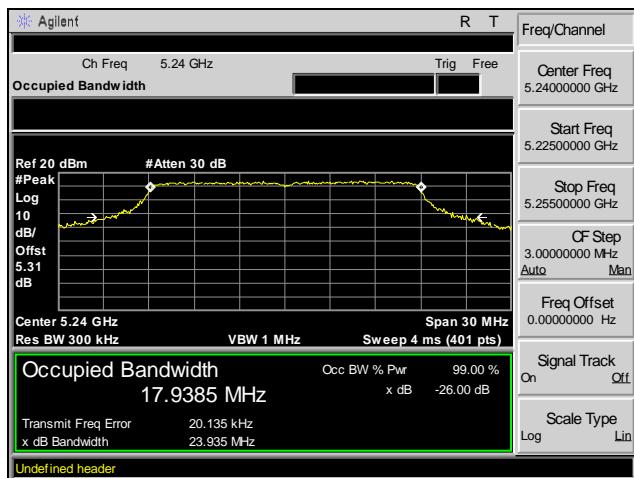


Plot 3. 26 dB Occupied Bandwidth, Channel 48, 802.11a 20 MHz


## 26 dB Occupied Bandwidth, 802.11ac 20 MHz

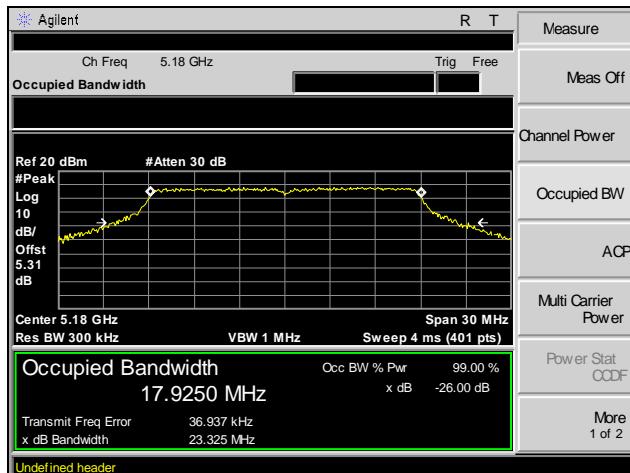

Plot 4. 26 dB Occupied Bandwidth, Channel 36, 802.11ac 20 MHz

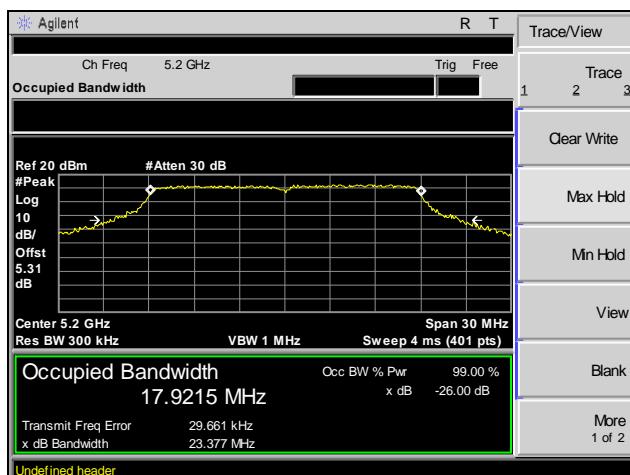


Plot 5. 26 dB Occupied Bandwidth, Channel 40, 802.11ac 20 MHz

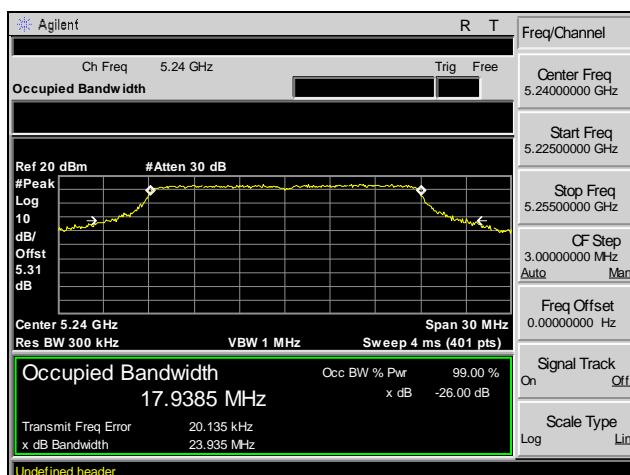


Plot 6. 26 dB Occupied Bandwidth, Channel 48, 802.11ac 20 MHz

## 26 dB Occupied Bandwidth, 802.11ac 40 MHz

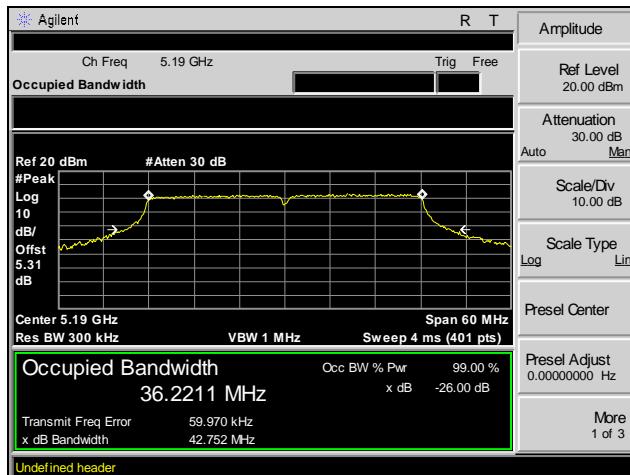


Plot 7. 26 dB Occupied Bandwidth, Channel 36, 802.11ac 40 MHz

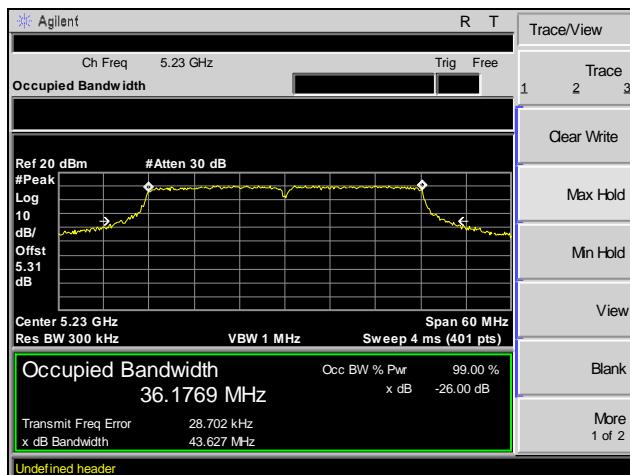


Plot 8. 26 dB Occupied Bandwidth, Channel 44, 802.11ac 40 MHz

## 26 dB Occupied Bandwidth, 802.11ac 80 MHz

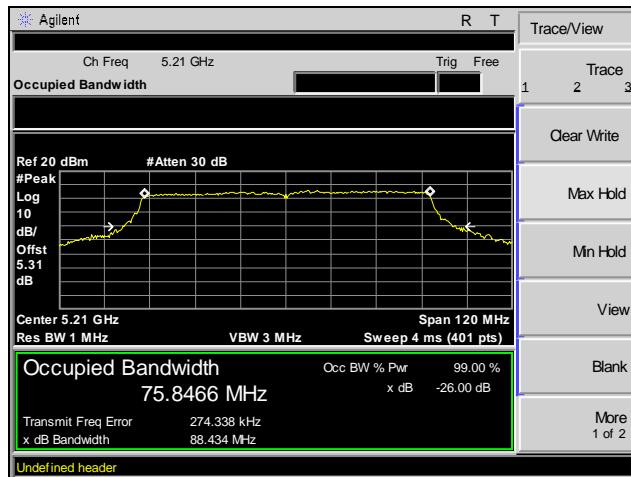


Plot 9. 26 dB Occupied Bandwidth, Channel 36, 802.11ac 80 MHz


## 26 dB Occupied Bandwidth, 802.11n 20 MHz

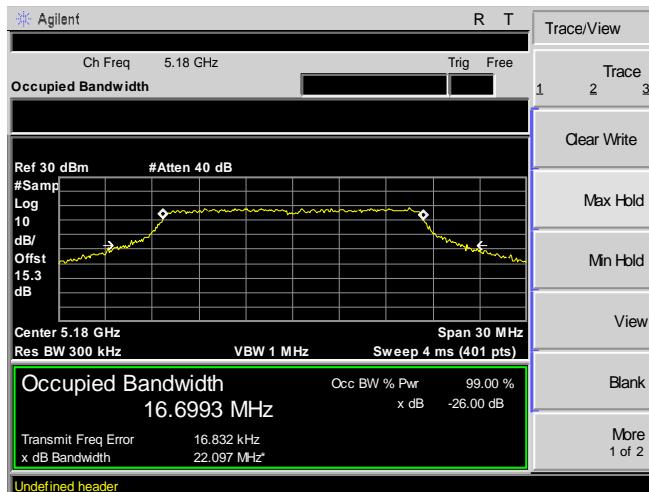

Plot 10. 26 dB Occupied Bandwidth, Channel 36, 802.11n 20 MHz

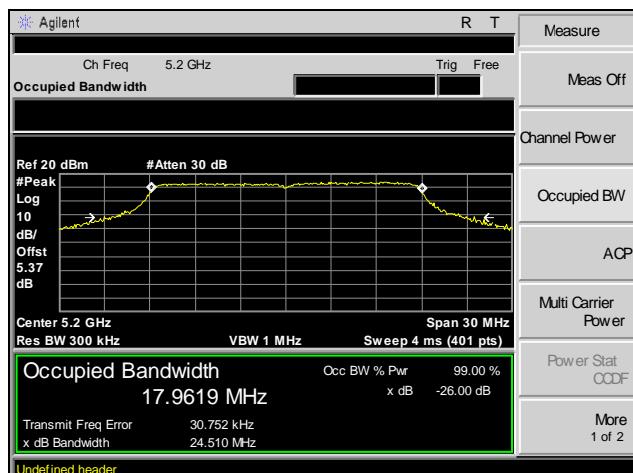


Plot 11. 26 dB Occupied Bandwidth, Channel 40, 802.11n 20 MHz

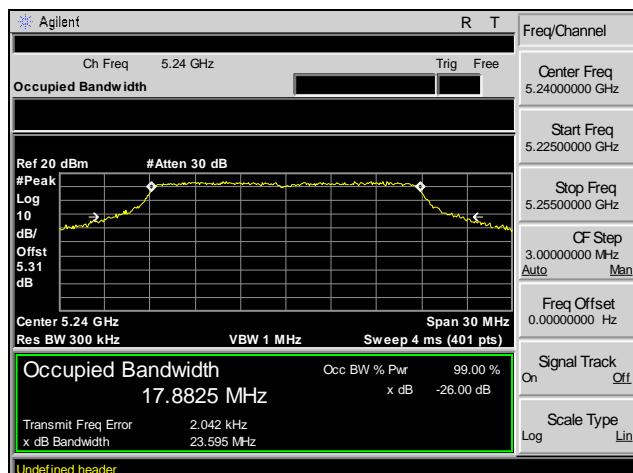


Plot 12. 26 dB Occupied Bandwidth, Channel 48, 802.11n 20 MHz

## 26 dB Occupied Bandwidth, 802.11n 40 MHz

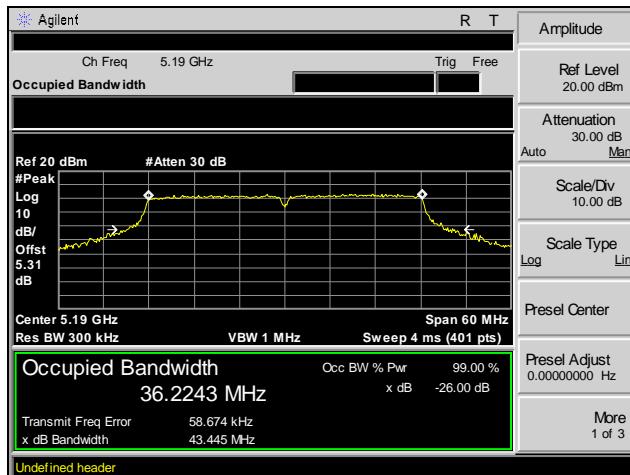

Plot 13. 26 dB Occupied Bandwidth, Channel 36, 802.11n 40 MHz

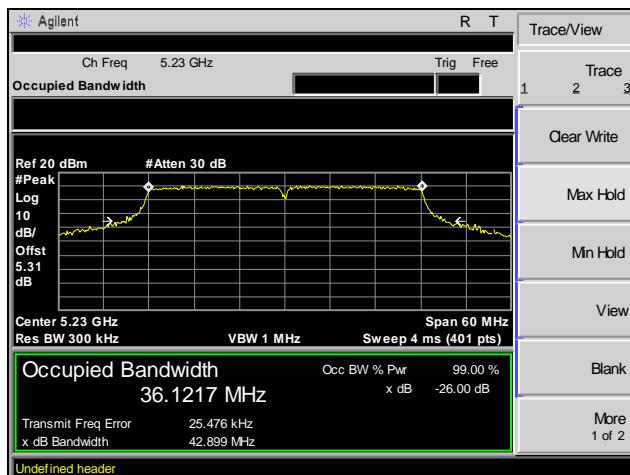

Plot 14. 26 dB Occupied Bandwidth, Channel 44, 802.11n 40 MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15. 407(a)(1) Maximum Conducted Output Power

**Test Requirements:** **§15.407(a)(1)(i):** For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(a)(1)(ii):** For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(a)(1)(iii):** For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

**§15.407(a)(1)(iv):** For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.


If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01.

**Test Results:** The EUT as tested is compliant with the requirements of this section.

**Test Engineer(s):** Surinder Singh

**Test Date(s):** 10/05/15

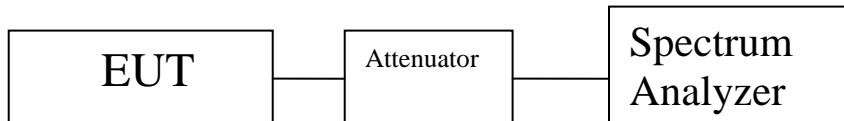

Maximum Conducted Output Power 20MHz Band 802.11a/n/ac Mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Measured Peak Output Power (dBm)/20MHz Ant 0	Output Power (dBm)/20MHz Ant 1	Output Power (dBm)/20MHz Ant 2	Mode	Total Output Power (dBm)	Antenna Gain (dB)	Power Limit (dBm)	Margin (dB)
36	5180	17.4	17.67	17.73	a	22.37	7.07	28.93	-6.56
40	5200	18.23	18.35	18.53	a	23.14	7.07	28.93	-5.79
48	5240	20.19	20.43	20.68	a	25.39	7.07	28.93	-3.54
36	5180	17.17	17.18	17.65	n	22.11	2.3	30	-7.89
40	5200	21.55	21.72	22.06	n	26.55	2.3	30	-3.45
48	5240	23.95	24.1	24.14	n	28.84	2.3	30	-1.16
36	5180	17.19	17.49	17.65	ac	22.22	2.3	30	-7.78
40	5200	21.79	22.1	22.23	ac	26.82	2.3	30	-3.18
48	5240	24.09	24.16	24.2	ac	28.92	2.3	30	-1.08

Table 7. Conducted Output Power, 802.11a/ac/n 20 MHz


Maximum Conducted Output Power 40MHz Band 11n/ac mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Output Power (dBm)/40MHz Ant 0	Output Power (dBm)/40MHz Ant 1	Output Power (dBm)/40MHz Ant 2	Mode	Total Output Power (dBm)	Antenna Gain (dB)	Power Limit (dBm)	Margin (dB)
36	5190	14.7	14.76	15.18	n	19.66	2.3	30	-10.34
36	5190	14.47	14.72	14.66	ac	19.39	2.3	30	-10.61
44	5230	22.35	22.83	22.96	n	27.49	2.3	30	-2.51
44	5230	22.5	22.67	22.71	ac	27.4	2.3	30	-2.6

Table 8. Conducted Output Power, 802.11ac/n 40 MHz


Maximum Conducted Output Power 80MHz Band 802.11ac mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Output Power (dBm)/80MHz Ant 0	Output Power (dBm)/80MHz Ant 1	Output Power (dBm)/80MHz Ant 2	Total Output Power (dBm)	Antenna Gain (dB)	Power Limit (dBm)	Margin (dB)	
36	5210	13.77	14.04	14.21	18.78	2.3	30	-11.22	

Table 9. Conducted Output Power, 802.11ac 80 MHz


## Maximum Conducted Output Power, 802.11a 20 MHz

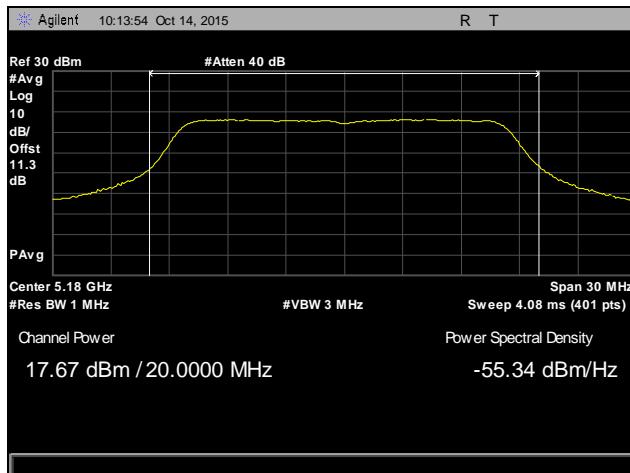

Plot 15. Maximum Conducted Output Power, Channel 36, 802.11a 20 MHz

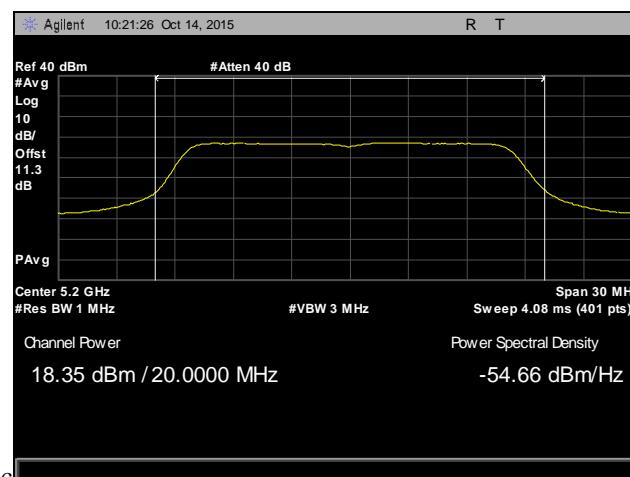


Plot 16. Maximum Conducted Output Power, Channel 40, 802.11a 20 MHz

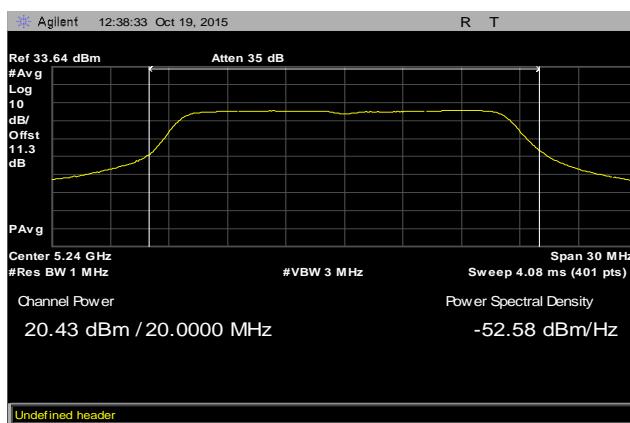


Plot 17. Maximum Conducted Output Power, Channel 48, 802.11a 20 MHz


## Maximum Conducted Output Power, 802.11ac 20 MHz

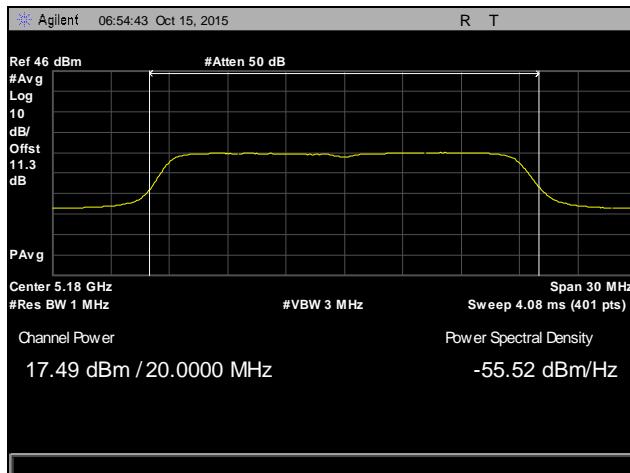

Plot 18. Maximum Conducted Output Power, Channel 36, 802.11ac 20 MHz

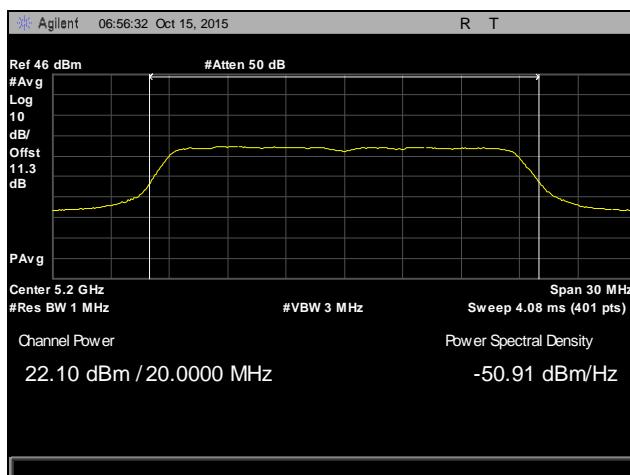


Plot 19. Maximum Conducted Output Power, Channel 40, 802.11ac 20 MHz

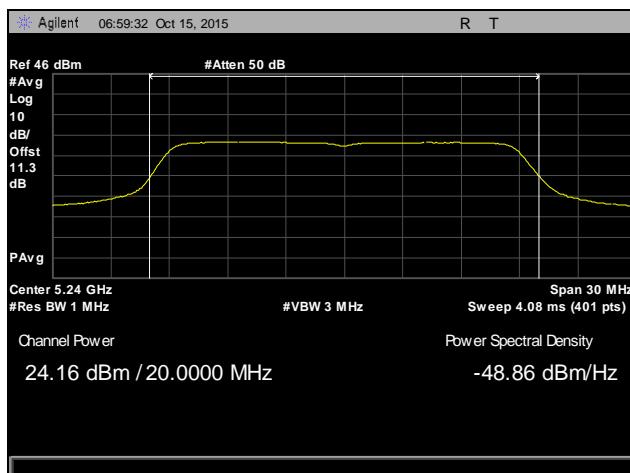


Plot 20. Maximum Conducted Output Power, Channel 48, 802.11ac 20 MHz

## Maximum Conducted Output Power, 802.11ac 40 MHz

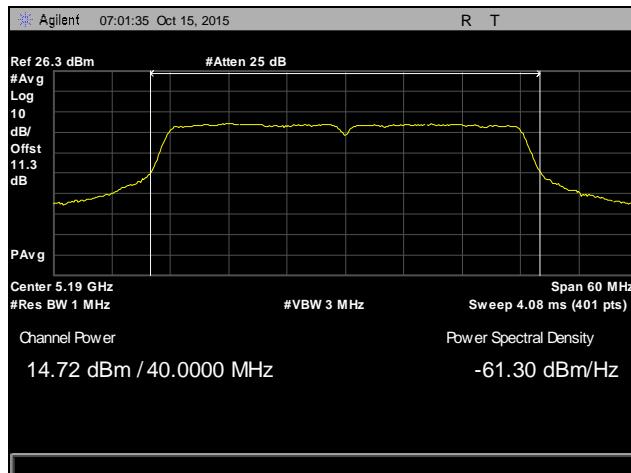


Plot 21. Maximum Conducted Output Power, Channel 38, 802.11ac 40 MHz

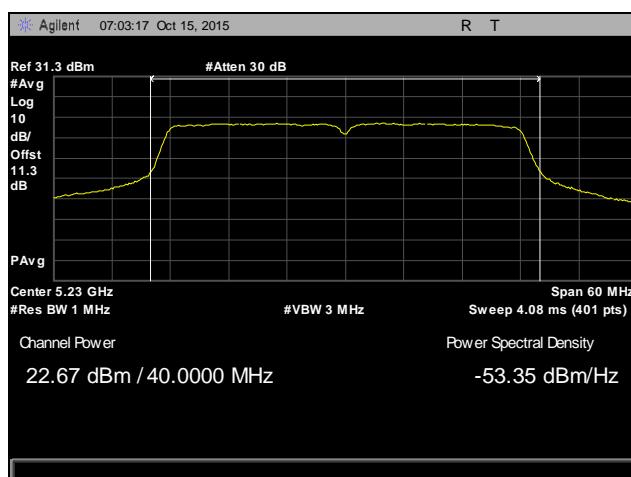


Plot 22. Maximum Conducted Output Power, Channel 46, 802.11ac 40 MHz

## Maximum Conducted Output Power, 802.11ac 80 MHz

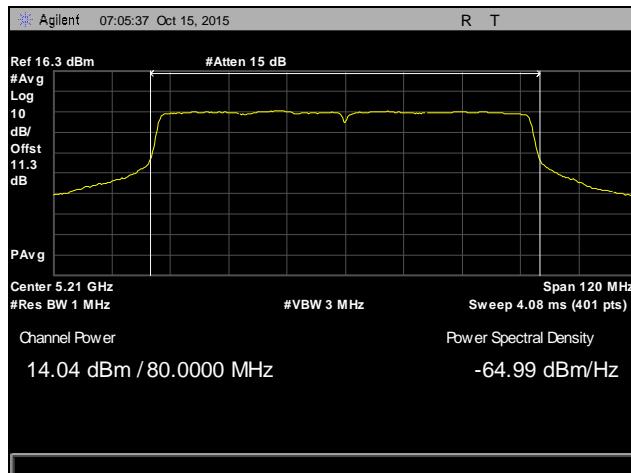


Plot 23. Maximum Conducted Output Power, Channel 36, 802.11ac 80 MHz


## Maximum Conducted Output Power, 802.11n 20 MHz

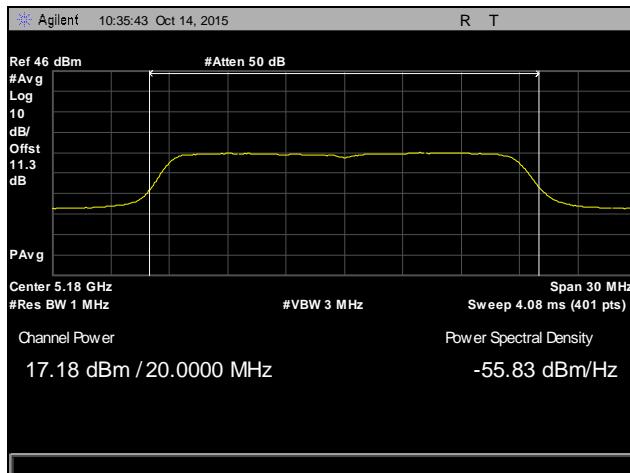

Plot 24. Maximum Conducted Output Power, Channel 36, 802.11n 20 MHz

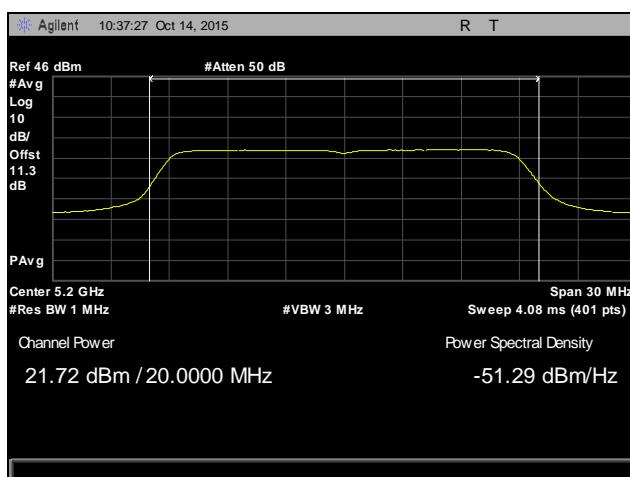


Plot 25. Maximum Conducted Output Power, Channel 40, 802.11n 20 MHz

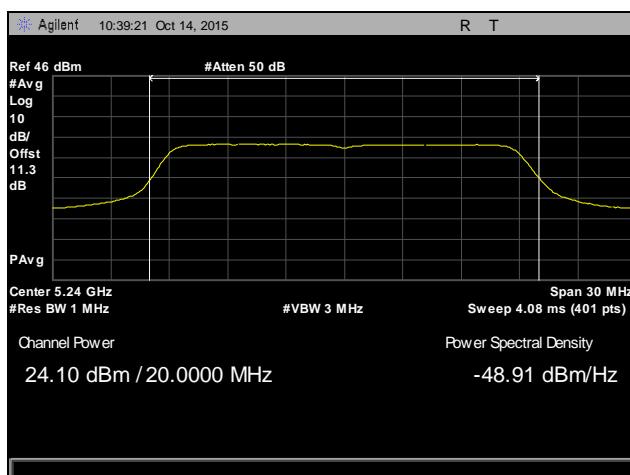


Plot 26. Maximum Conducted Output Power, Channel 48, 802.11n 20 MHz

## Maximum Conducted Output Power, 802.11n 40 MHz

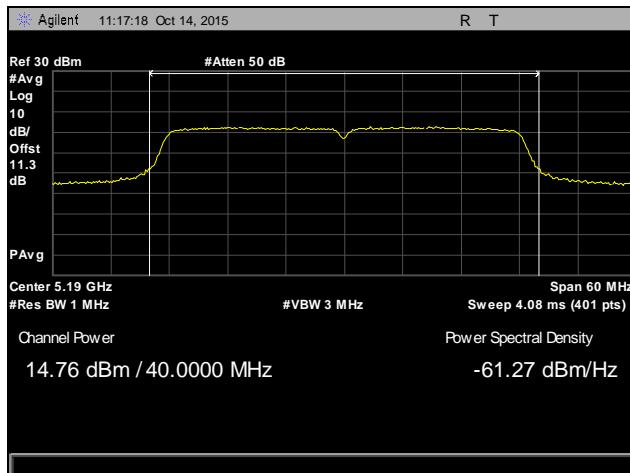

Plot 27. Maximum Conducted Output Power, Channel 38, 802.11n 40 MHz

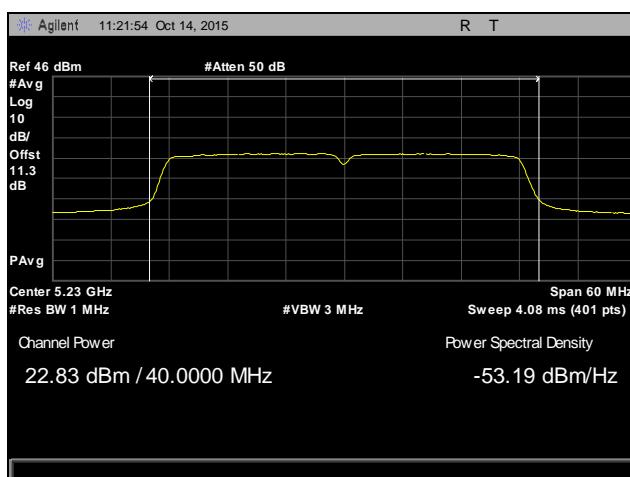

Plot 28. Maximum Conducted Output Power, Channel 46, 802.11n 40 MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(a)(1) Maximum Power Spectral Density

**Test Requirements:**

**§15.407(a)(1)(i):** In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(a)(1)(ii):** In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi..

**§15.407(a)(1)(iii):** In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

**§15.407(a)(1)(iv):** In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test Procedure:**

The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v01.

**Test Results:**


The EUT as tested is compliant with the requirements of this section.

**Test Engineer(s):**

Surinder Singh

**Test Date(s):**

10/05/15

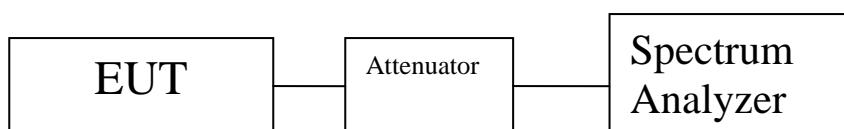

Maximum Conducted PSD 20MHz Band 802.11a/n/ac Mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Measured PSD(dBm) / 1MHz Ant0	Measured PSD(dBm) / 1MHz Ant1	Measured PSD(dBm) / 1MHz Ant1	Mode	Total Output PSD (dBm)	Antenna Gain (dB)	PSD Limit (dBm)	Margin (dB)
36	5180	3.48	3.36	3.64	a	8.27	7.07	15.93	-7.66
40	5200	4.64	4.6	4.84	a	9.47	7.07	15.93	-6.46
48	5240	8.16	9	8.15	a	13.23	7.07	15.93	-2.7
36	5180	3.19	3.17	3.5	n	8.06	2.3	17	-8.94
40	5200	10.19	10.34	10.05	n	14.97	2.3	17	-2.03
48	5240	10.1	10.3	10.21	n	14.98	2.3	17	-2.02
36	5180	3.15	3.41	3.37	ac	8.08	2.3	17	-8.92
40	5200	9.1	9.5	9.64	ac	14.19	2.3	17	-2.81
48	5240	10.11	10.38	10.34	ac	15.05	2.3	17	-1.95

Table 10. Peak Spectrum Density, 802.11a/ac/n 20 MHz


Maximum PSD 40MHz Band 11n/ac mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Measured PSD(dBm) / 1MHz Ant0	Measured PSD(dBm) / 1MHz Ant1	Measured PSD(dBm) / 1MHz Ant1	Mode	Total Output PSD(dBm)	Antenna Gain (dB)	PSD Limit (dBm)	Margin (dB)
36	5190	0.1	-0.3	-0.22	n	4.63	2.3	17	-12.37
36	5190	-0.12	-0.01	-0.21	ac	4.66	2.3	17	-12.34
44	5230	6.68	6.55	6.94	n	11.50	2.3	17	-5.50
44	5230	6.31	6.58	6.28	ac	11.16	2.3	17	-5.84

Table 11. Peak Spectrum Density, 802.11ac/n 40 MHz


Maximum PSD 80MHz Band 802.11ac mode MIMO (3*3) (dBm)									
Chanel Carrier	Frequency MHz	Measured PSD(dBm) / 1MHz Ant0	Measured PSD(dBm) / 1MHz Ant1	Measured PSD(dBm) / 1MHz Ant1	Mode	Total Output PSD(dBm)	Antenna Gain (dB)	PSD Limit (dBm)	Margin (dB)
36	5210	-4.19	-4.52	-4.84		0.26	2.3	17	-16.74

Table 12. Peak Spectrum Density, 802.11ac 80 MHz


## Peak Power Spectral Density, 802.11a 20 MHz

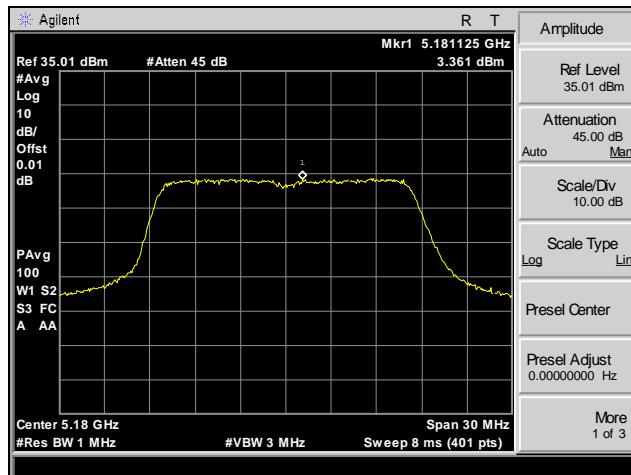

Plot 29. Peak Power Spectral Density, Channel 36, 802.11a 20 MHz

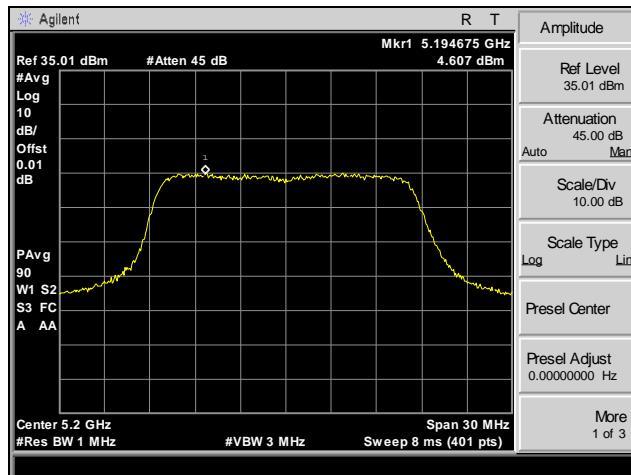


Plot 30. Peak Power Spectral Density, Channel 40, 802.11a 20 MHz

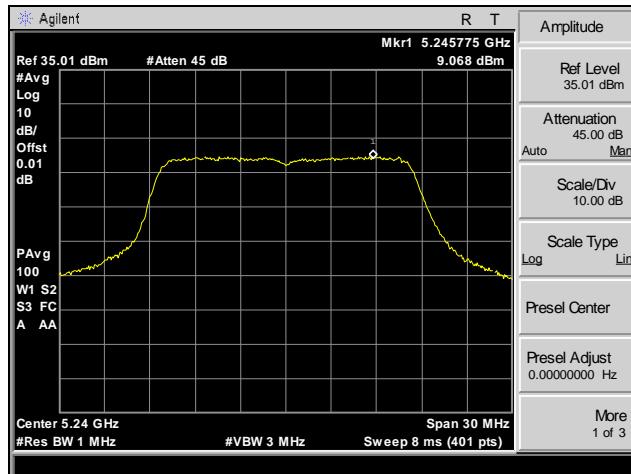


Plot 31. Peak Power Spectral Density, Channel 48, 802.11a 20 MHz

## Peak Power Spectral Density, 802.11ac 20 MHz

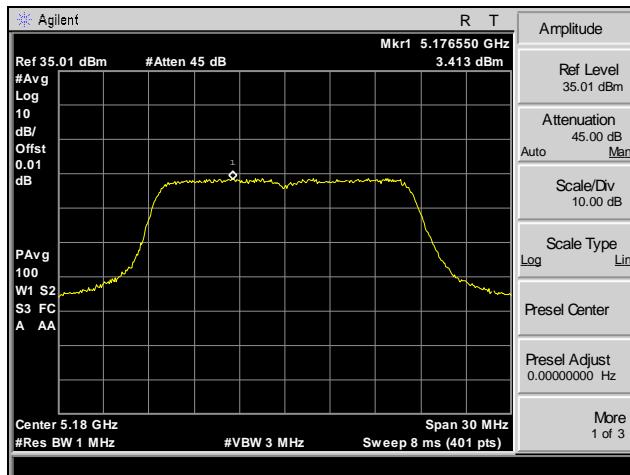

Plot 32. Peak Power Spectral Density, Channel 36, 802.11ac 20 MHz

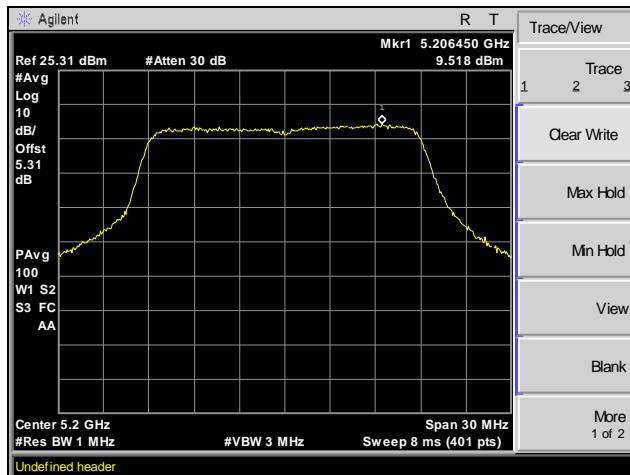


Plot 33. Peak Power Spectral Density, Channel 40, 802.11ac 20 MHz




Plot 34. Peak Power Spectral Density, Channel 48, 802.11ac 20 MHz

## Peak Power Spectral Density, 802.11ac 40 MHz

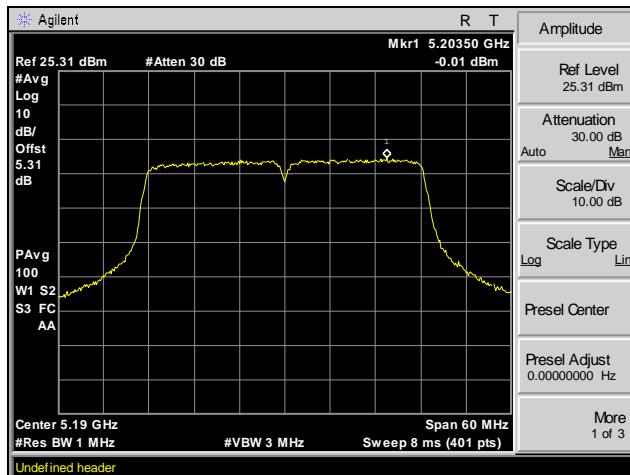


Plot 35. Peak Power Spectral Density, Channel 36, 802.11ac 40 MHz

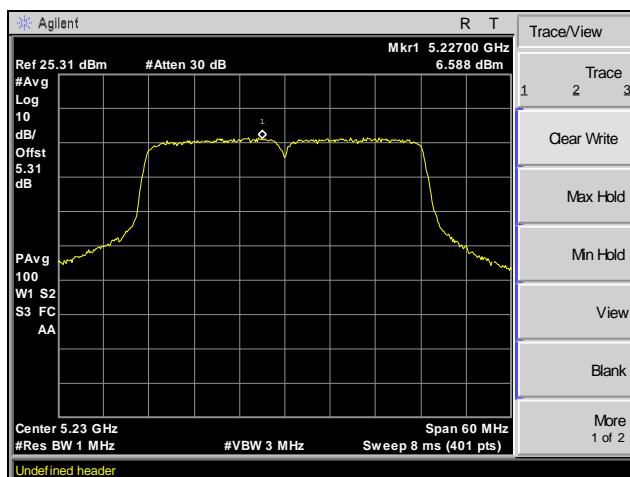


Plot 36. Peak Power Spectral Density, Channel 44, 802.11ac 40 MHz

## Peak Power Spectral Density, 802.11ac 80 MHz

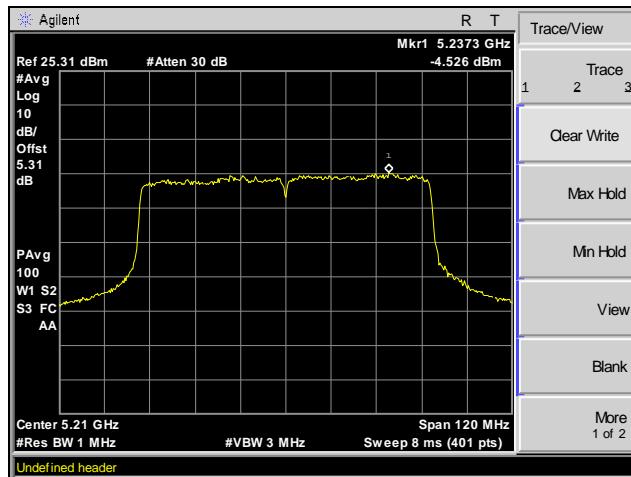


Plot 37. Peak Power Spectral Density, Channel 36, 802.11ac 80 MHz


## Peak Power Spectral Density, 802.11n 20 MHz

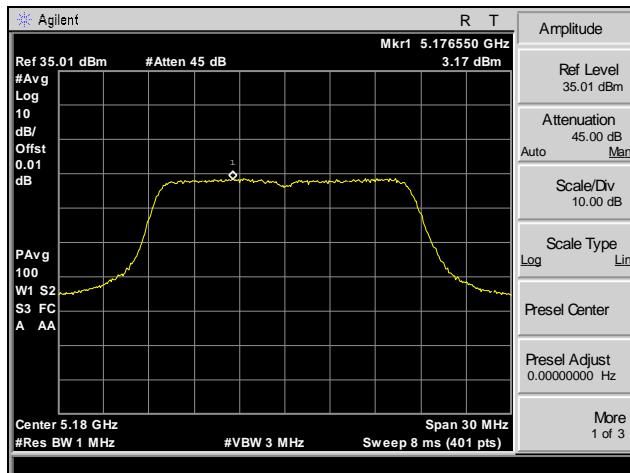

Plot 38. Peak Power Spectral Density, Channel 36, 802.11n 20 MHz

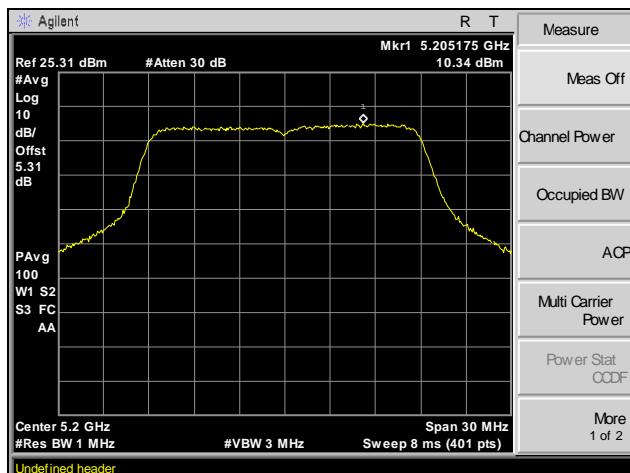


Plot 39. Peak Power Spectral Density, Channel 40, 802.11n 20 MHz

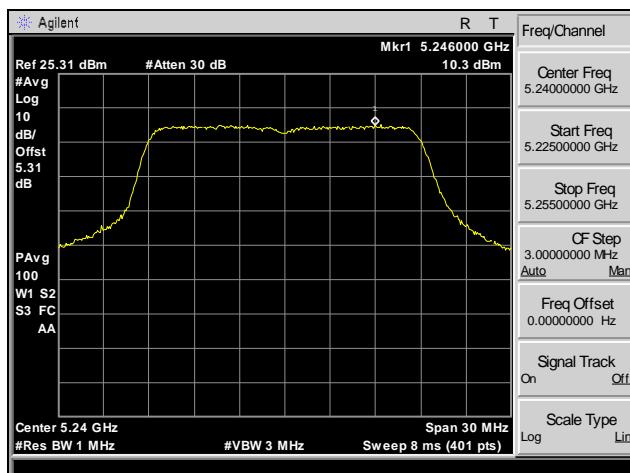


Plot 40. Peak Power Spectral Density, Channel 48, 802.11n 20 MHz

## Peak Power Spectral Density, 802.11n 40 MHz

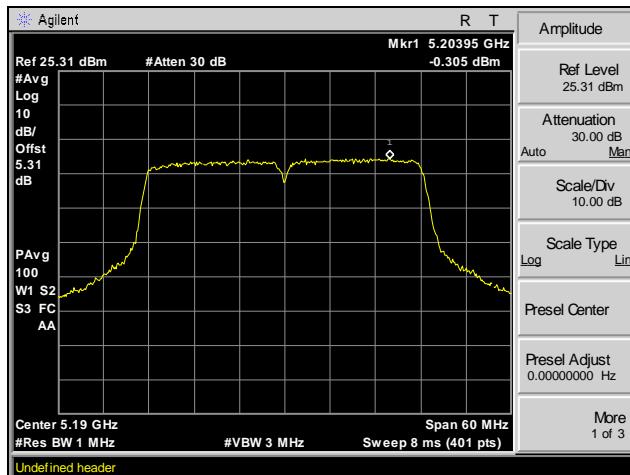

Plot 41. Peak Power Spectral Density, Channel 36, 802.11n 40 MHz

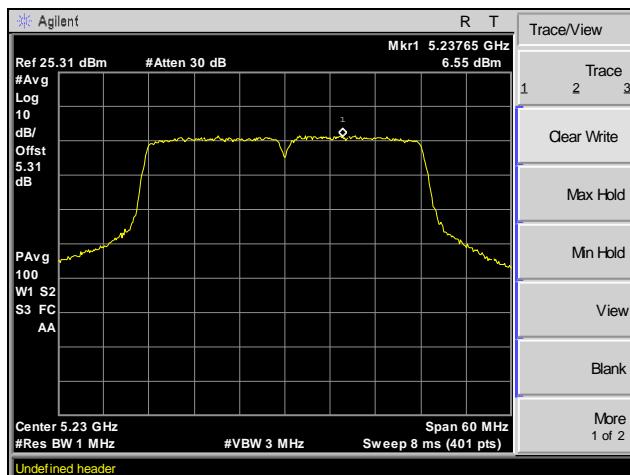

Plot 42. Peak Power Spectral Density, Channel 44, 802.11n 40 MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(b)(1) & (6 – 7) Undesirable Emissions

**Test Requirements:** **§ 15.407(b)(1):** For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

**§ 15.407(b)(6):** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

**§ 15.407(b)(7):** The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v01. The equation, **EIRP = E + 20 log D - 104.8** was used to convert field strength to EIRP (**E** = field strength (dB $\mu$ V/m) and **D** = Reference measurement distance).

For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209.

As an alternative, according to FCC KDB 789033 D02 General UNII Test Procedure New Rules v01, all emissions above 1 GHz that comply with the peak and average limits of 15.209 satisfy the requirements of unwanted emissions in 15.407.


**Test Results:** For below 1 GHz, the EUT was compliant with the requirements of this section.

For above 1 GHz, the EUT was compliant with the requirements of this section.

**Test Engineer(s):** Surinder Singh


**Test Date(s):** 10/05/15

## Radiated Spurious Emissions, Below 1 GHz

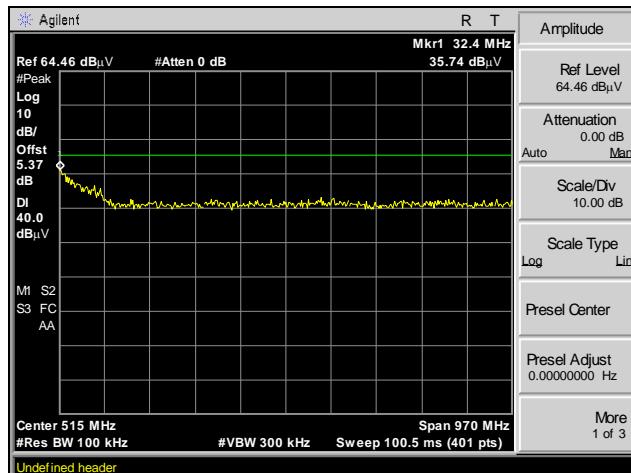


Plot 43. Radiated Spurious Emissions, 30 MHz – 1 GHz, Worst Case Emission


## Radiated Spurious Emissions, 802.11a 20 MHz

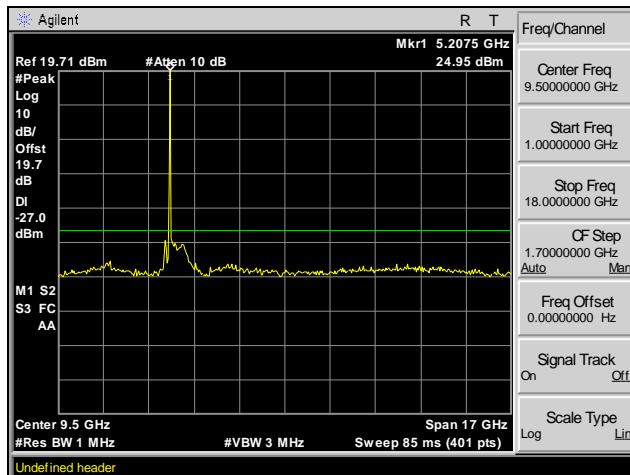

Plot 44. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11a 20 MHz

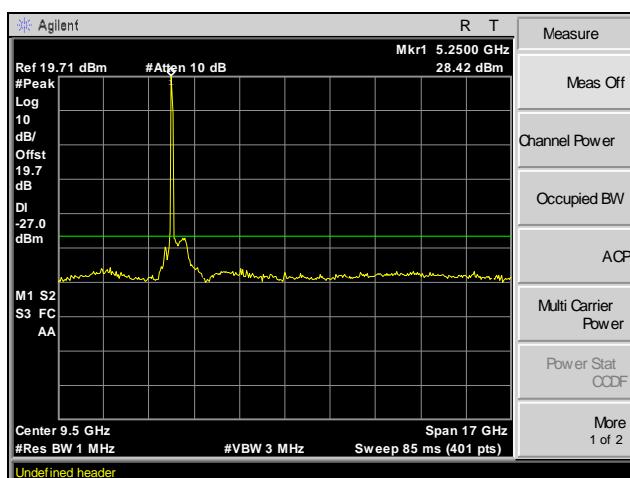


Plot 45. Radiated Spurious Emissions, Above 1 GHz, Channel 40, 802.11a 20 MHz

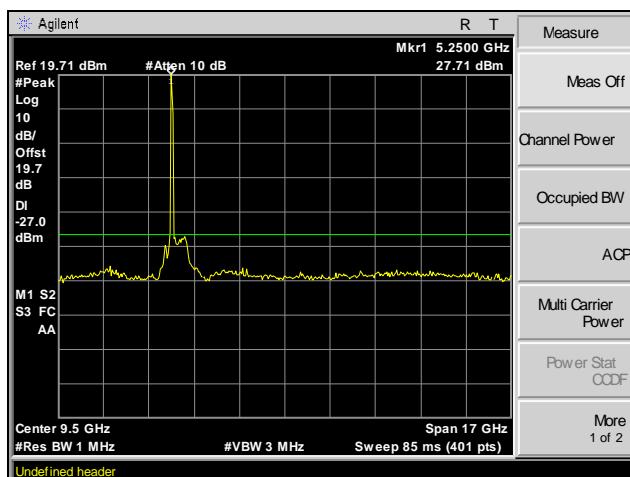


Plot 46. Radiated Spurious Emissions, Above 1 GHz, Channel 48, 802.11a 20 MHz


## Radiated Spurious Emissions, 802.11ac 20 MHz

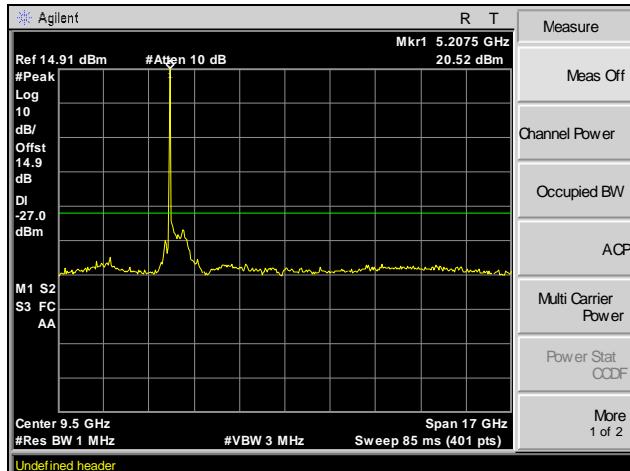

Plot 47. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11ac 20 MHz

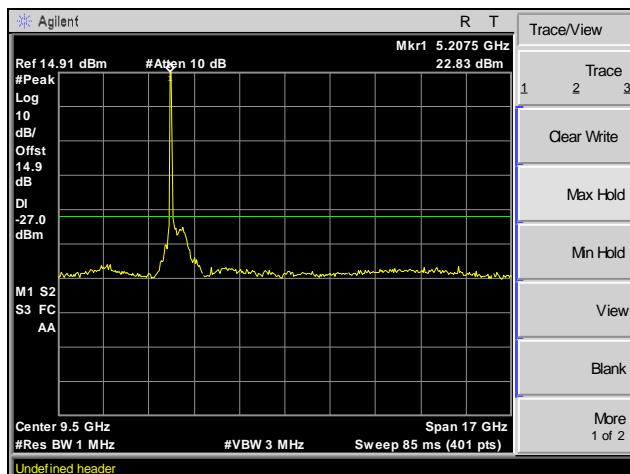


Plot 48. Radiated Spurious Emissions, Above 1 GHz, Channel 40, 802.11ac 20 MHz

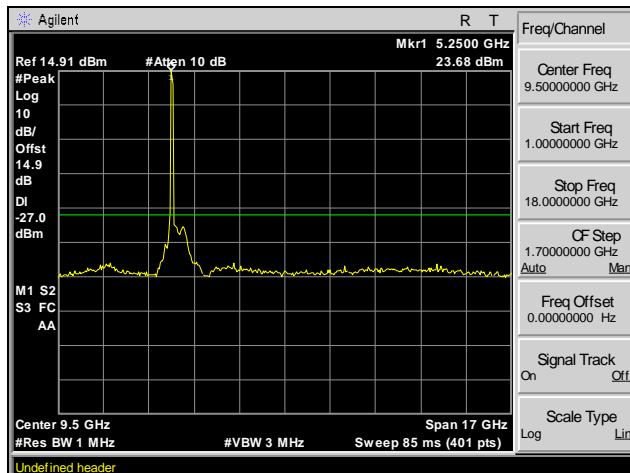


Plot 49. Radiated Spurious Emissions, Above 1 GHz, Channel 48, 802.11ac 20 MHz

## Radiated Spurious Emissions, 802.11ac 40 MHz

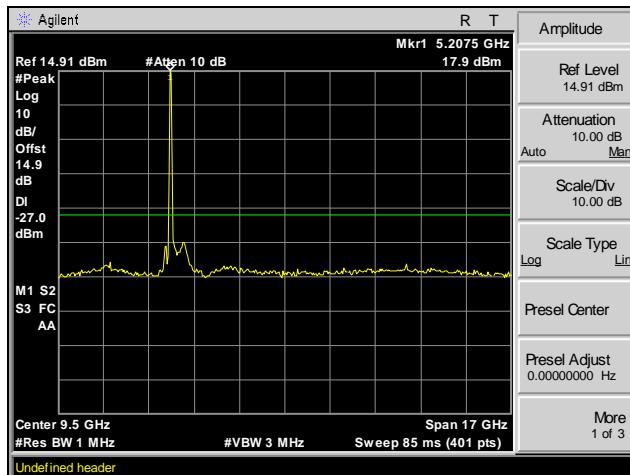


Plot 50. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11ac 40 MHz

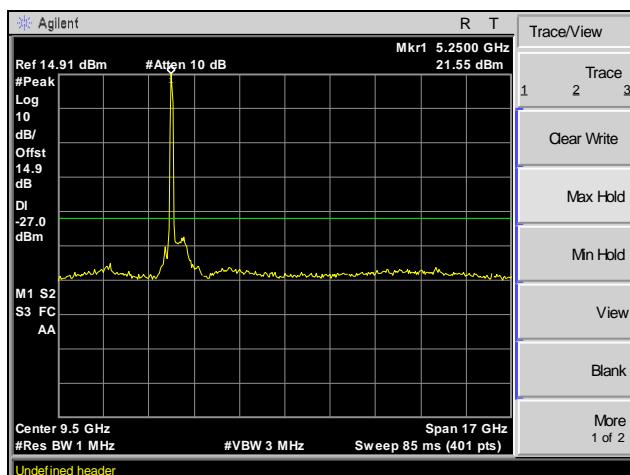


Plot 51. Radiated Spurious Emissions, Above 1 GHz, Channel 44, 802.11ac 40 MHz

## Radiated Spurious Emissions, 802.11ac 80 MHz

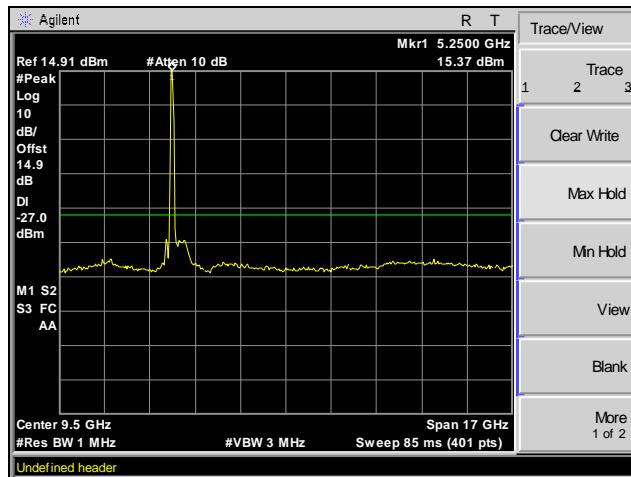


Plot 52. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11ac 80 MHz


## Radiated Spurious Emissions, 802.11n 20 MHz

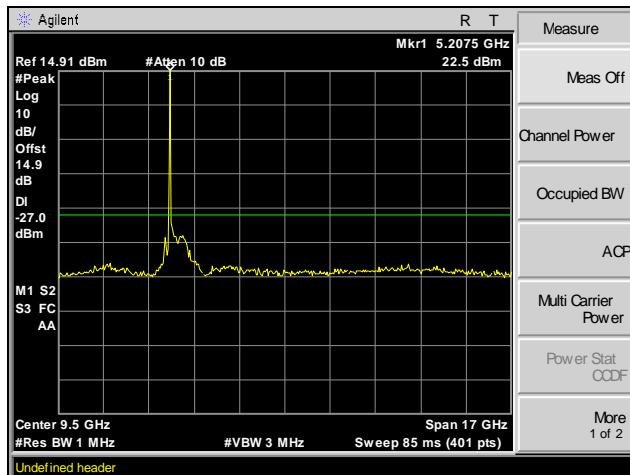

Plot 53. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11n 20 MHz

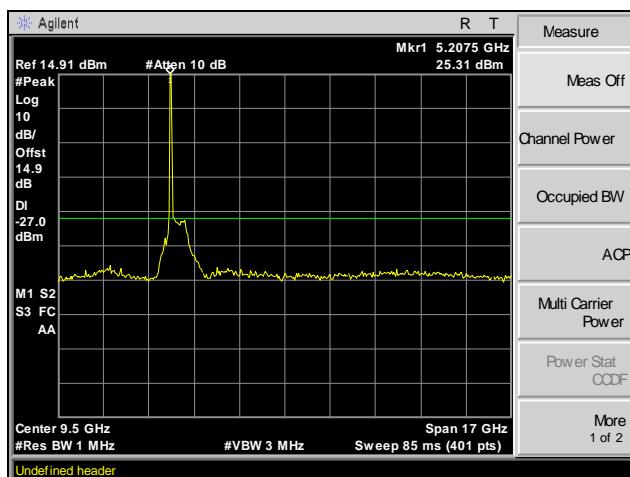


Plot 54. Radiated Spurious Emissions, Above 1 GHz, Channel 40, 802.11n 20 MHz

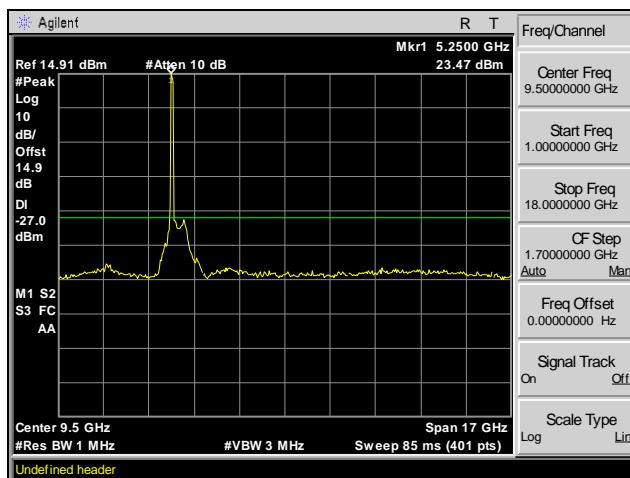


Plot 55. Radiated Spurious Emissions, Above 1 GHz, Channel 48, 802.11n 20 MHz

## Radiated Spurious Emissions, 802.11n 40 MHz

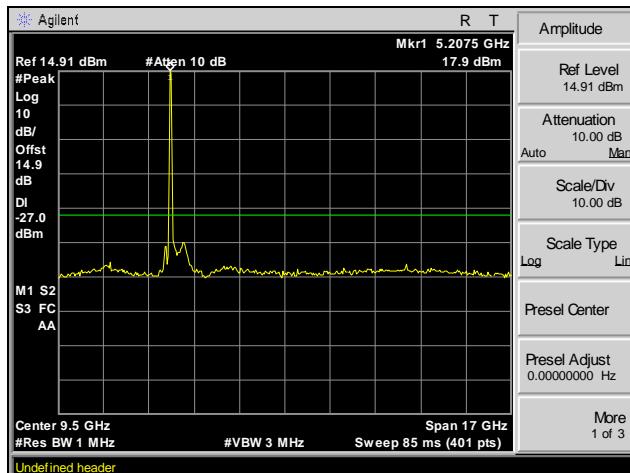


Plot 56. Radiated Spurious Emissions, Above 1 GHz, Channel 36, 802.11n 40 MHz

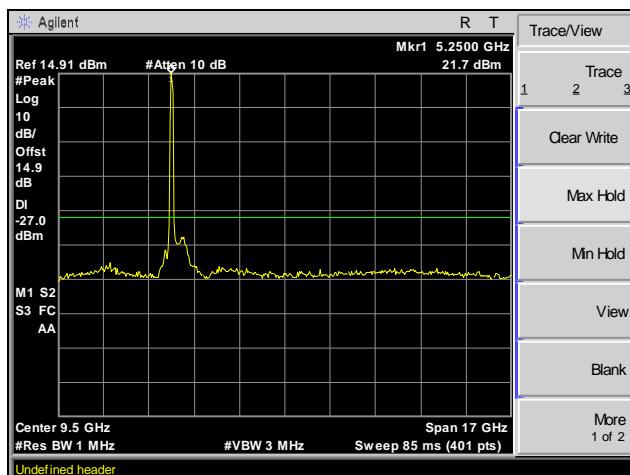


Plot 57. Radiated Spurious Emissions, Above 1 GHz, Channel 44, 802.11n 40 MHz


## Radiated Band Edge, -27 dBm, 802.11a 20 MHz

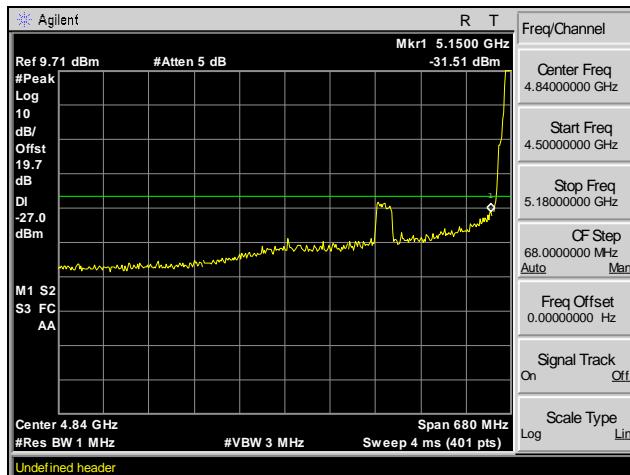

Plot 58. Radiated Band Edge, -27 dBm, Channel 36, 802.11a 20 MHz

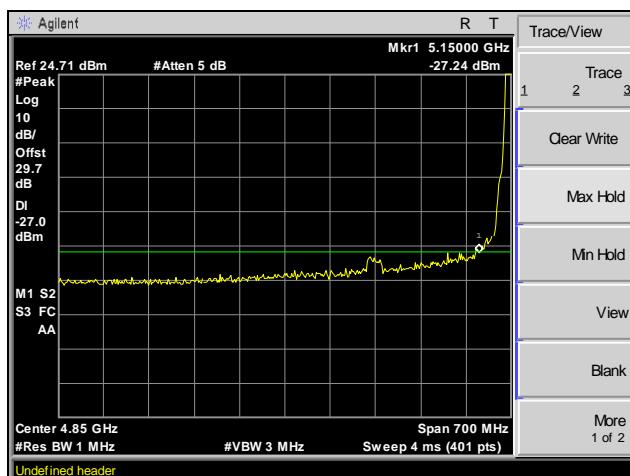


Plot 59. Radiated Band Edge, -27 dBm, Channel 40, 802.11a 20 MHz

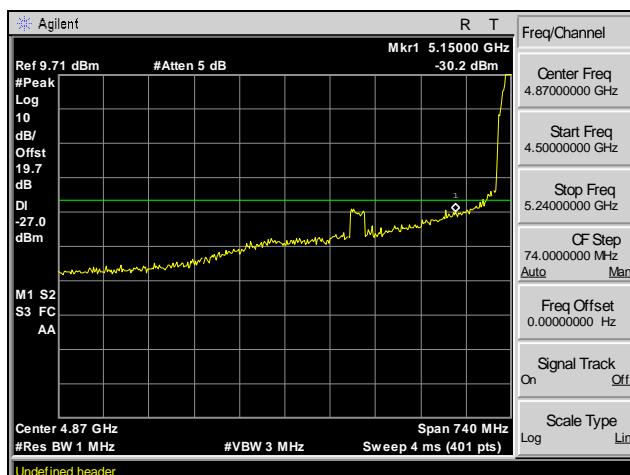


Plot 60. Radiated Band Edge, -27 dBm, Channel 48, 802.11a 20 MHz

## Radiated Band Edge, -27 dBm, 802.11ac 20 MHz

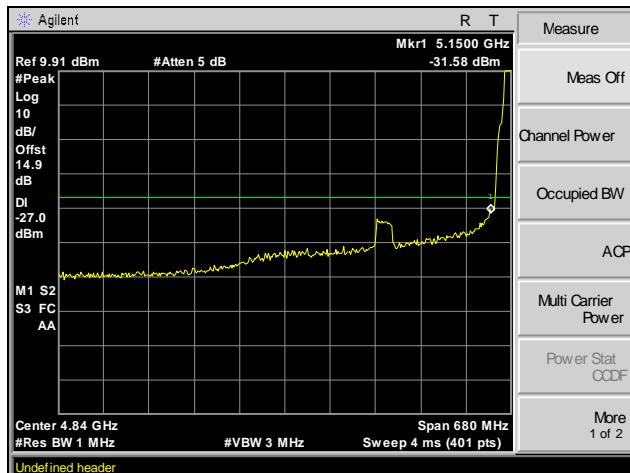

Plot 61. Radiated Band Edge, -27 dBm, Channel 36, 802.11ac 20 MHz

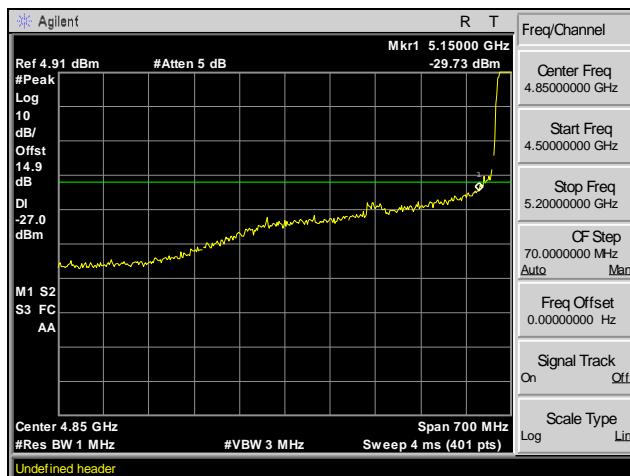


Plot 62. Radiated Band Edge, -27 dBm, Channel 40, 802.11ac 20 MHz




Plot 63. Radiated Band Edge, -27 dBm, Channel 48, 802.11ac 20 MHz

## Radiated Band Edge, -27 dBm, 802.11ac 40 MHz

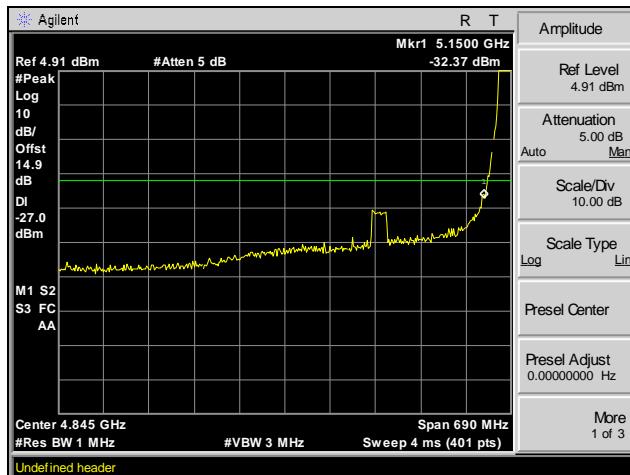


Plot 64. Radiated Band Edge, -27 dBm, Channel 36, 802.11ac 40 MHz

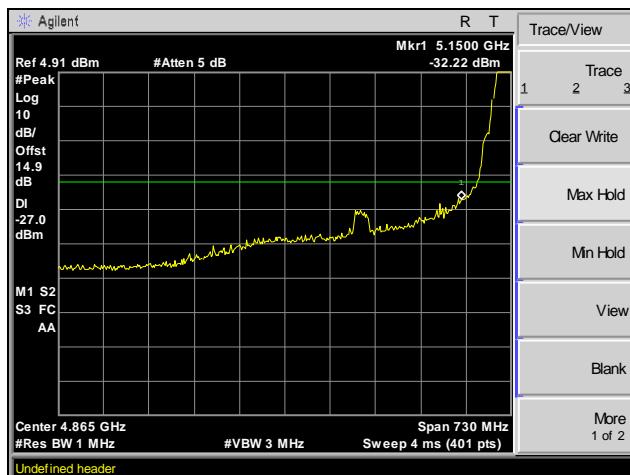


Plot 65. Radiated Band Edge, -27 dBm, Channel 44, 802.11ac 40 MHz

### Radiated Band Edge, -27 dBm, 802.11ac 80 MHz

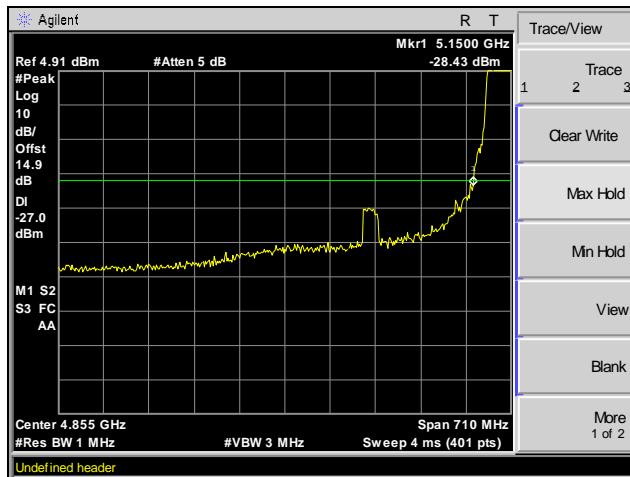

Plot 66. Radiated Band Edge, -27 dBm, Channel 36, 802.11ac 80 MHz


## Radiated Band Edge, -27 dBm, 802.11n 20 MHz

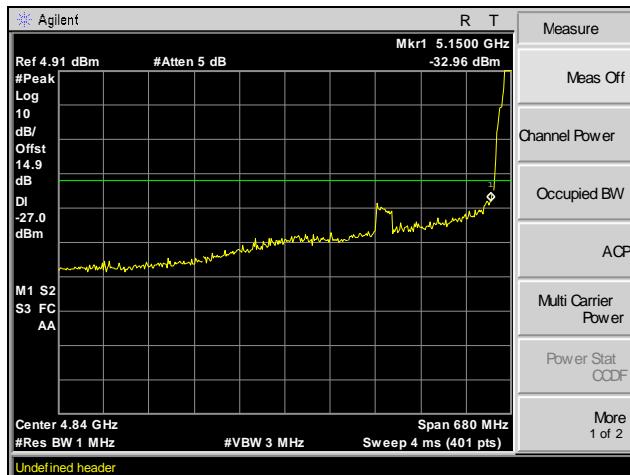

Plot 67. Radiated Band Edge, -27 dBm, Channel 36, 802.11n 20 MHz




Plot 68. Radiated Band Edge, -27 dBm, Channel 40, 802.11n 20 MHz

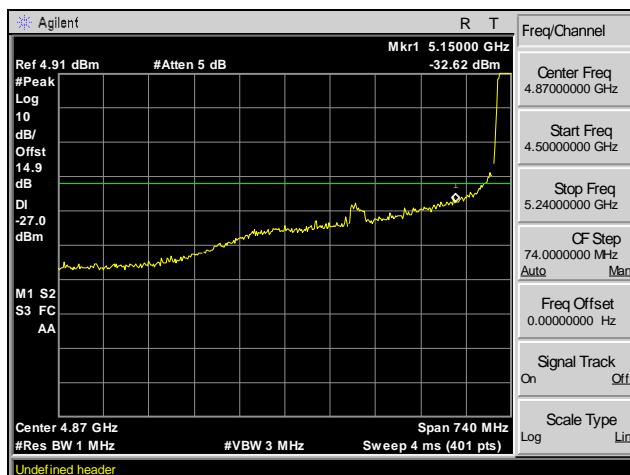


Plot 69. Radiated Band Edge, -27 dBm, Channel 48, 802.11n 20 MHz

### Radiated Band Edge, -27 dBm, 802.11n 40 MHz

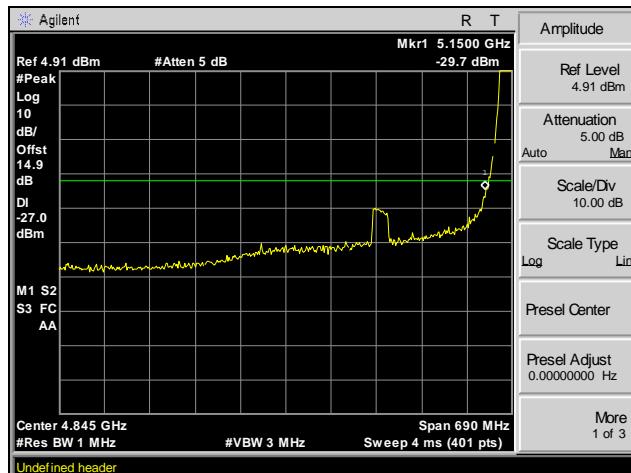


Plot 70. Radiated Band Edge, -27 dBm, Channel 36, 802.11n 40 MHz

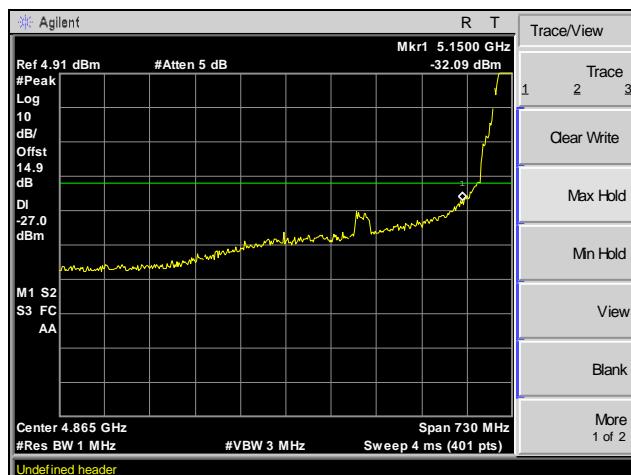


Plot 71. Radiated Band Edge, -27 dBm, Channel 44, 802.11n 40 MHz


## Radiated Band Edge, Average, 802.11a 20 MHz

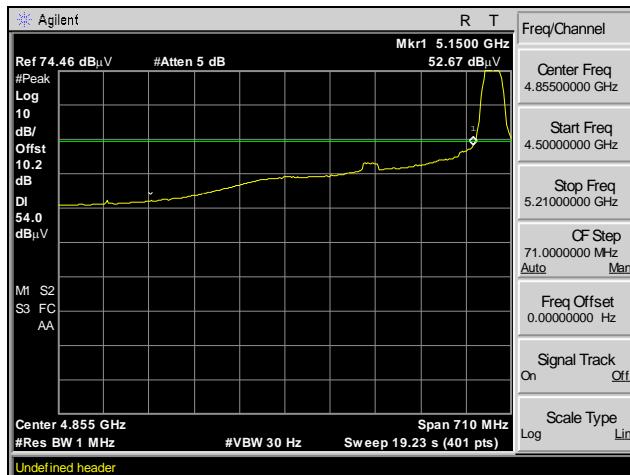

Plot 72. Radiated Band Edge, Average, Channel 36, 802.11a 20 MHz

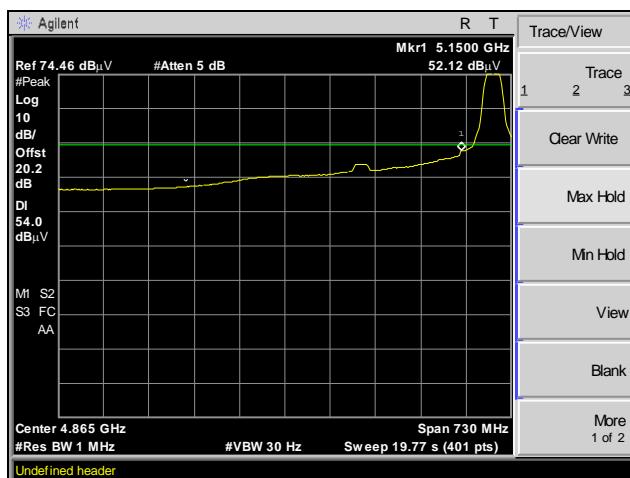


Plot 73. Radiated Band Edge, Average, Channel 40, 802.11a 20 MHz

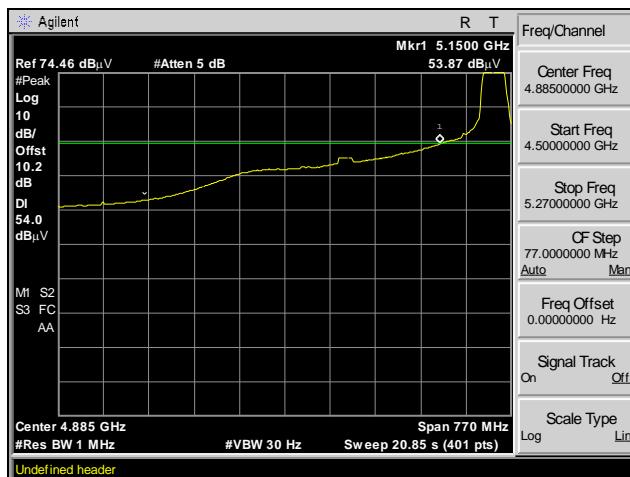

Plot 74. Radiated Band Edge, Average, Channel 48, 802.11a 20 MHz


## Radiated Band Edge, Average, 802.11ac 20 MHz

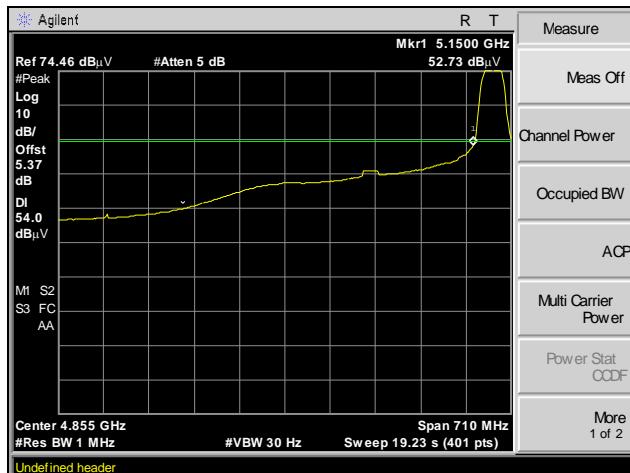

Plot 75. Radiated Band Edge, Average, Channel 36, 802.11ac 20 MHz




Plot 76. Radiated Band Edge, Average, Channel 40, 802.11ac 20 MHz

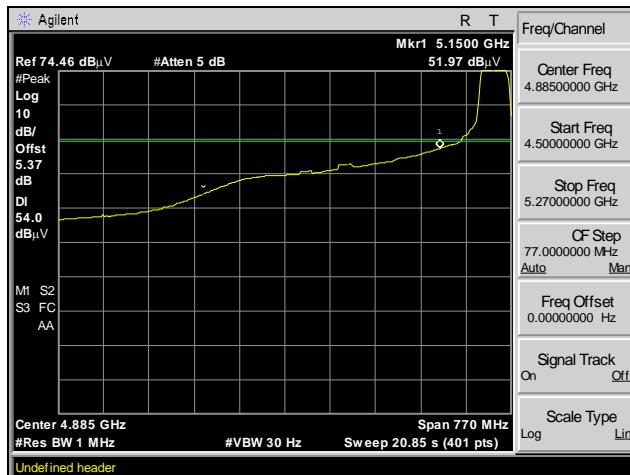


Plot 77. Radiated Band Edge, Average, Channel 48, 802.11ac 20 MHz

## Radiated Band Edge, Average, 802.11ac 40 MHz

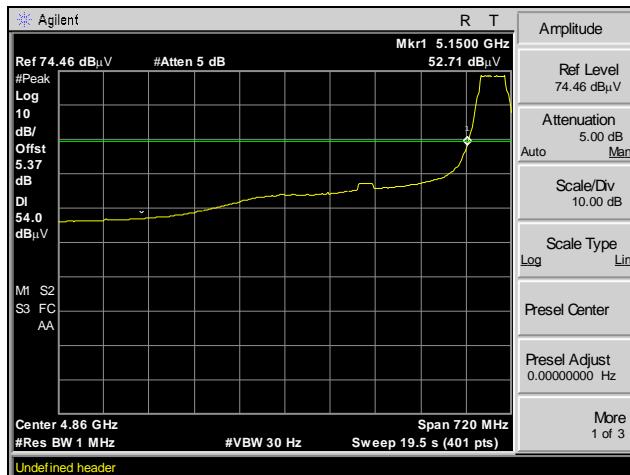


Plot 78. Radiated Band Edge, Average, Channel 36, 802.11ac 40 MHz

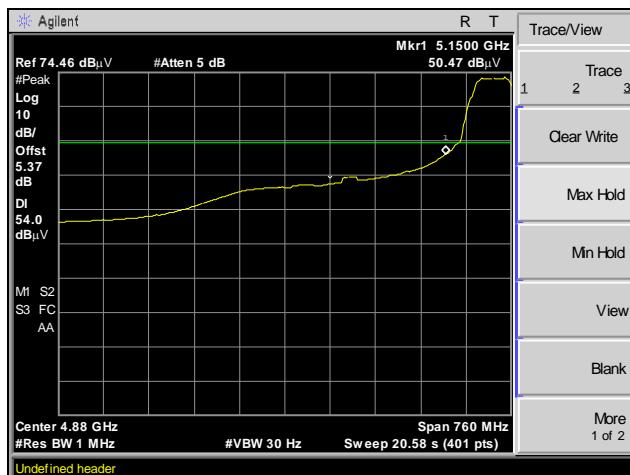


Plot 79. Radiated Band Edge, Average, Channel 44, 802.11ac 40 MHz

## Radiated Band Edge, Average, 802.11ac 80 MHz

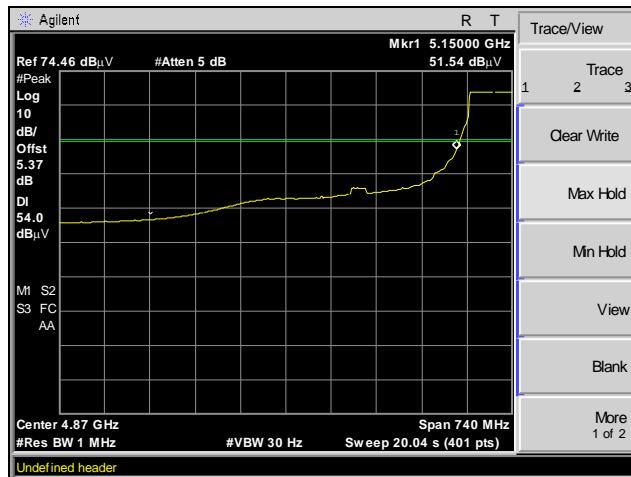

Plot 80. Radiated Band Edge, Average, Channel 36, 802.11ac 80 MHz


## Radiated Band Edge, Average, 802.11n 20 MHz

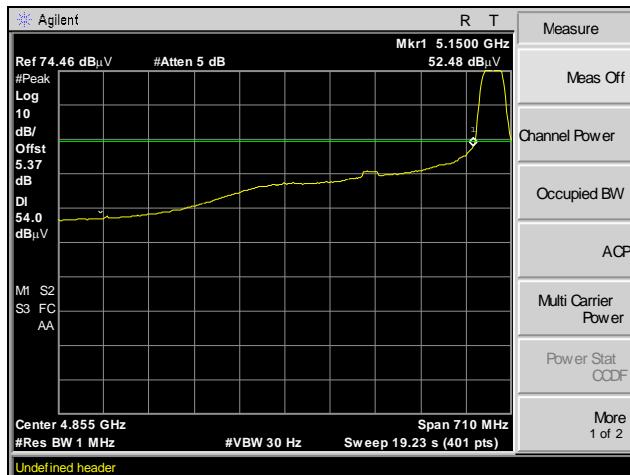

Plot 81. Radiated Band Edge, Average, Channel 36, 802.11n 20 MHz




Plot 82. Radiated Band Edge, Average, Channel 40, 802.11n 20 MHz

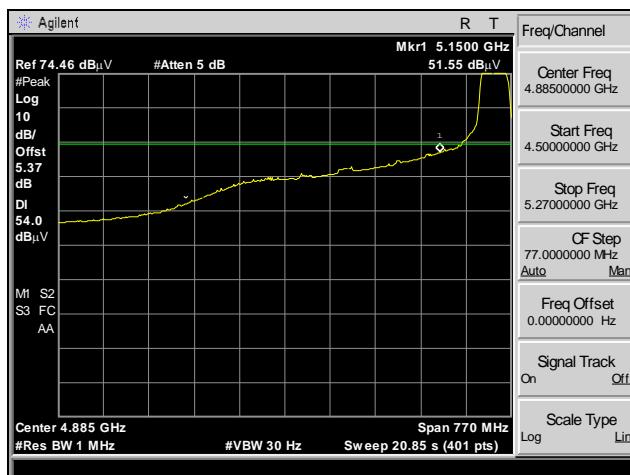


Plot 83. Radiated Band Edge, Average, Channel 48, 802.11n 20 MHz

## Radiated Band Edge, Average, 802.11n 40 MHz

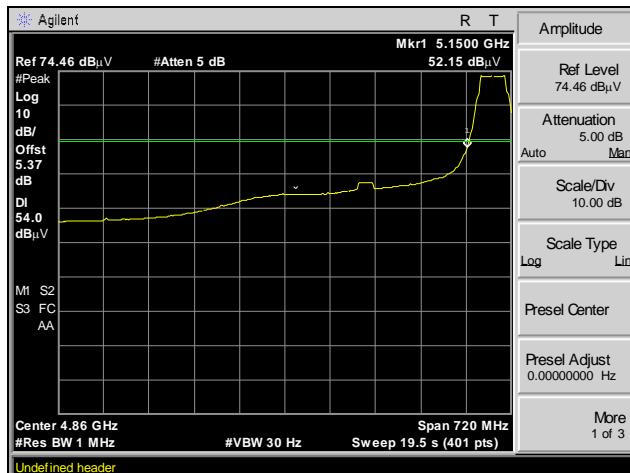

Plot 84. Radiated Band Edge, Average, Channel 36, 802.11n 40 MHz

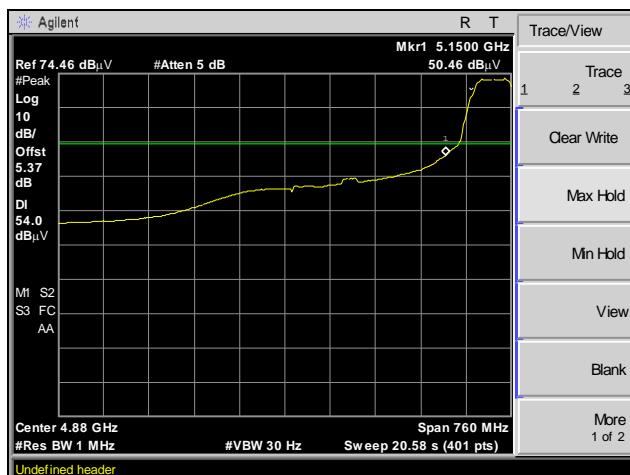

Plot 85. Radiated Band Edge, Average, Channel 44, 802.11n 40 MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(6)      Conducted Emissions

**Test Requirement(s):**    **§ 15.407 (b)(6):** Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

**§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Sigma$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. Scans were performed with the transmitter on.

**Test Results:**

The EUT was compliant with requirements of this section.

**Test Engineer(s):**


Surinder Singh

**Test Date(s):**

06/12/15

Frequency (MHz)	Uncorrected Meter Reading (dB $\mu$ V) QP	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) QP	Limit (dB $\mu$ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB $\mu$ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) AVG	Limit (dB $\mu$ V) AVG	Margin (dB) AVG
0.155	57.21	0	57.21	65.73	-8.52	34.31	0	34.31	55.73	-21.42
0.518	34.28	0	34.28	56	-21.72	35.89	0	35.89	46	-10.11
3.34	28.66	0	28.66	56	-27.34	21.88	0	21.88	46	-24.12
5.65	26.87	0.17	27.04	60	-32.96	20.45	0.17	20.62	50	-29.38
19.95	53.17	0	53.17	60	-6.83	47.24	0	47.24	50	-2.76
20.02	53.61	0	53.61	60	-6.39	47.45	0	47.45	50	-2.55


**Table 14. Conducted Emissions, Test Results, Phase Line**

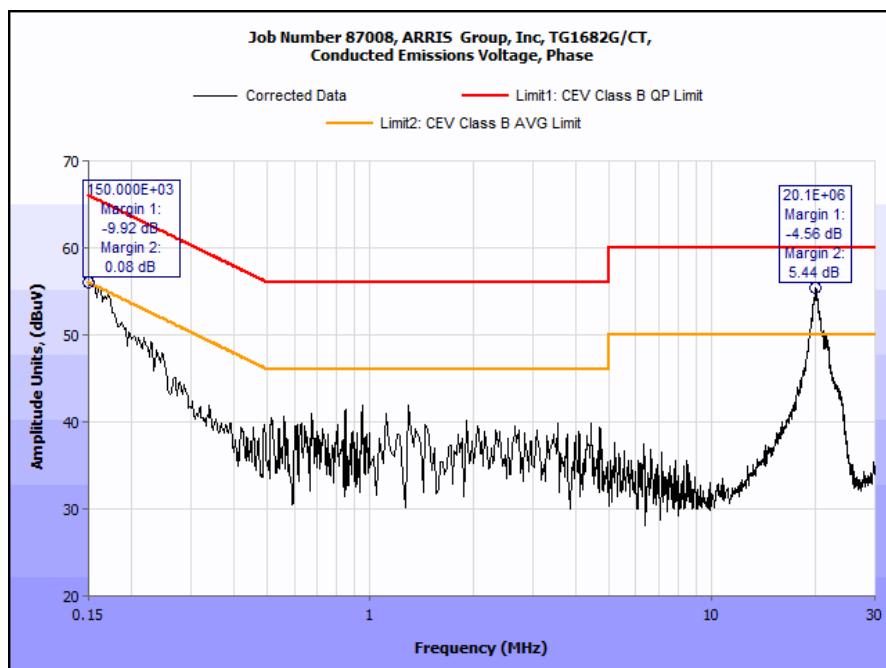

**Plot 86. Conducted Emissions, Phase Line**

Frequency (MHz)	Uncorrected Meter Reading (dB $\mu$ V) QP	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) QP	Limit (dB $\mu$ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB $\mu$ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) AVG	Limit (dB $\mu$ V) AVG	Margin (dB) AVG
0.15	48.57	0	48.57	66	-17.43	29.64	0	29.64	56	-26.36
0.714	32.64	0	32.64	56	-23.36	22.6	0	22.6	46	-23.4
2.25	30.52	0	30.52	56	-25.48	22.12	0	22.12	46	-23.88
5.125	28.53	0	28.53	60	-31.47	21.32	0	21.32	50	-28.68
19.53	53.74	0	53.74	60	-6.26	48.55	0	48.55	50	-1.45
20.3	54.49	0	54.49	60	-5.51	49.14	0	49.14	50	-0.86

**Table 15. Conducted Emissions, Test Results, Neutral Line**

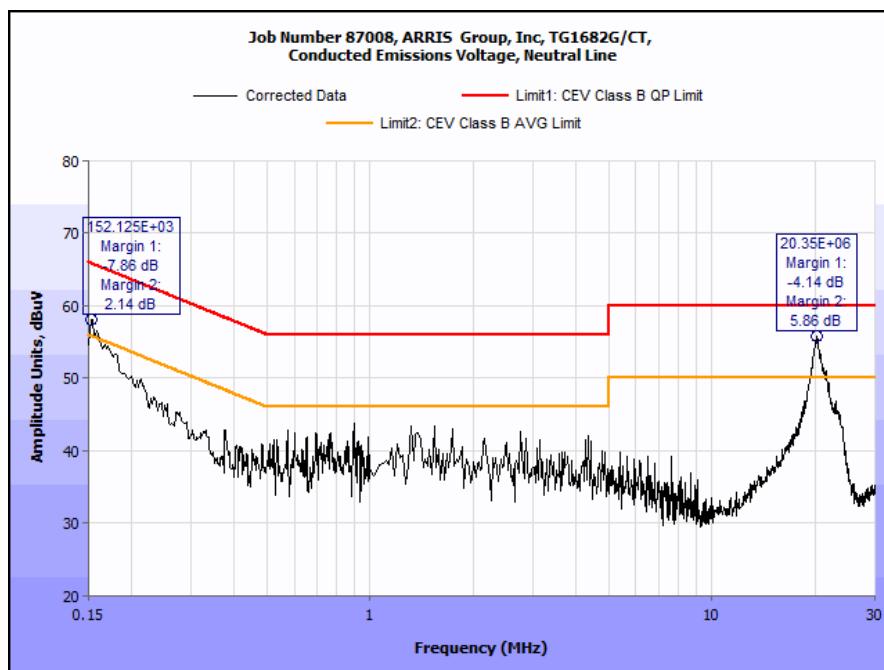

**Plot 87. Conducted Emissions, Neutral Line**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(f)

### RF Exposure

#### Test Requirement(s):

**§15.407(f):** U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

#### RF Radiation Exposure Limit:

**§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5150-5250 MHz; **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

Case 1:

Output Power = 25.39dBm

Antenna Gain = 7.07dBi

Power density is equal to 0.351mW/cm<sup>2</sup>.

At a distance of 20 cm.

Case 2:

Output Power = 28.92dBm

Antenna Gain = 2.3dBi

Power density is equal to 0.263mW/cm<sup>2</sup>.

At a distance of 20 cm.

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4300	SEMI-ANECHOIC CHAMBER # 1 (NSA)	EMC TEST SYSTEMS	NONE	2/6/2015	2/6/2018
1T2665	ANTENNA; HORN	EMCO	3115	5/3/2014	11/3/2015
1T4565	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	7/1/2015	7/1/2016
1T4504	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	NOT REQUIRED	
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY PROOF	81	NOT REQUIRED	
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	11/25/2014	5/25/2016
1T6658	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	11/5/2014	11/5/2015
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	

**Table 16. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## V. Certification & User's Manual Information

## Certification & User's Manual Information

### L. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.