MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE ● BALTIMORE, MARYLAND 21230-3432 ● PHONE (410) 354-3300 ● FAX (410) 354-3313
33439 WESTERN AVENUE ● UNION CITY, CALIFORNIA 94587 ● PHONE (510) 489-6300 ● FAX (510) 489-6372
3162 BELICK STREET ● SANTA CLARA, CALIFORNIA 95054 ● PHONE (408) 748-3585 ● FAX (510) 489-6372
13501 MCCALLEN PASS ● AUSTIN, TX 78753 ● PHONE (512) 287-2500 ● FAX (512) 287-2513

November 21, 2016

ARRIS Group, Inc.
3871 Lakefield Drive Suite 300
Suwanee, GA 30024

Dear Tony Figueiredo,

Enclosed is the EMC Wireless test report for compliance testing of the ARRIS Group, Inc., TG3482 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 3).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.



Jennifer Warnell
Documentation Department

Reference: (\ARRIS Group, Inc.\ EMC89082A-FCC407 UNII 3 Rev. 1)

MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE ● BALTIMORE, MARYLAND 21230-3432 ● PHONE (410) 354-3300 ● FAX (410) 354-3313
33439 WESTERN AVENUE ● UNION CITY, CALIFORNIA 94587 ● PHONE (510) 489-6300 ● FAX (510) 489-6372
3162 BELICK STREET ● SANTA CLARA, CALIFORNIA 95054 ● PHONE (408) 748-3585 ● FAX (510) 489-6372
13501 MCCALLEN PASS ● AUSTIN, TX 78753 ● PHONE (512) 287-2500 ● FAX (512) 287-2513

Electromagnetic Compatibility Criteria
Test Report

for the

ARRIS Group, Inc.
Model TG3482

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E

MET Report: EMC89082A-FCC407 UNII 3 Rev. 1

November 21, 2016

Prepared For:

ARRIS Group, Inc.
3871 Lakefield Drive Suite 300
Suwanee, GA 30024

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria
Test Report

for the

ARRIS Group, Inc.
Model TG3482

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E



Hadid Jones, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.

Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	September 27, 2016	Initial Issue.
1	November 21, 2016	Engineer provided corrections.

Table of Contents

List of Tables

List of Figures

List of Plots

List of Terms and Abbreviations

AC	**A**lternating **C**urrent
ACF	**A**ntenna **C**orrection **F**actor
Cal	**Cal**ibration
d	**M**easurement **D**istance
dB	**D**eci**b**els
dBµA	**D**eci**b**els above one **micro**amp
dBµV	**D**eci**b**els above one **micro**volt
dBµA/m	**D**eci**b**els above one **micro**amp **per m**eter
dBµV/m	**D**eci**b**els above one **micro**volt **per m**eter
DC	**D**irect **C**urrent
E	**E**lectric Field
DSL	**D**igital **S**ubscriber **L**ine
ESD	**E**lectro**s**tatic **D**ischarge
EUT	**E**quipment **U**nder **T**est
f	**F**requency
FCC	**F**ederal **C**ommunications **C**ommission
GRP	**G**round **R**eference **P**lane
H	Magnetic Field
HCP	**H**orizontal **C**oupling **P**lane
Hz	**H**ert**z**
IEC	**I**nternational **E**lectrotechnical **C**ommission
kHz	**K**ilo**h**ert**z**
kPa	**K**ilo**pa**scal
kV	**K**ilo**v**olt
LISN	**L**ine **I**mpedance **S**tabilization **N**etwork
MHz	**M**ega**h**ertz
µH	**Microh**enry
µ	**Microf**arad
µs	**Micros**econds
PRF	**P**ulse **R**epetition **F**requency
RF	**R**adio **F**requency
RMS	**R**oot-**M**ean-**S**quare
TWT	**T**raveling **W**ave **T**ube
V/m	**V**olts **per m**eter
VCP	**V**ertical **C**oupling **P**lane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the ARRIS Group, Inc. TG3482, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TG3482. ARRIS Group, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TG3482, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with ARRIS Group, Inc., purchase order number AR1079104. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26 dB Bandwidth	Compliant
§15.407 (a)(3)	Maximum Conducted Output Power	Compliant
§15.407 (a)(3)	Maximum Power Spectral Density	Compliant
§15.407 (b)(4)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Compliant
§15.407(e)	6 dB Bandwidth	Compliant
§15.407(f)	RF Exposure	Compliant

Table 1. Executive Summary of EMC Part 15.407 ComplianceTesting

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by ARRIS Group, Inc. to perform testing on the TG3482, under ARRIS Group, Inc.'s purchase order number AR1079104.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the ARRIS Group, Inc. TG3482.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	TG3482	
Model(s) Covered:	TG3482	
EUT Specifications:	Primary Power: 115 VAC, 60 Hz	
	FCC ID: UIDTG3482ER	
	Type of Modulations:	OFDM
	Equipment Code:	NII
	Max. RF Output Power:	27.07dBm @ 5795MHz
	EUT Frequency Ranges:	5745MHz – 5825MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35º C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Type of Filing:	Original	
Evaluated by:	Hadid Jones	
Report Date(s):	November 21, 2016	

Table 2. EUT Summary

B. References

CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The ARRIS Group, Inc. TG3482 Telephony Wireless Gateway supporting DOCSIS 3.1, Equipment Under Test (EUT), along with its 8x8 802.11ac Dual Band Wireless radios. The IoT subsystem is capable of supporting personal area networks based on ZigBee, Thread and BTLE.

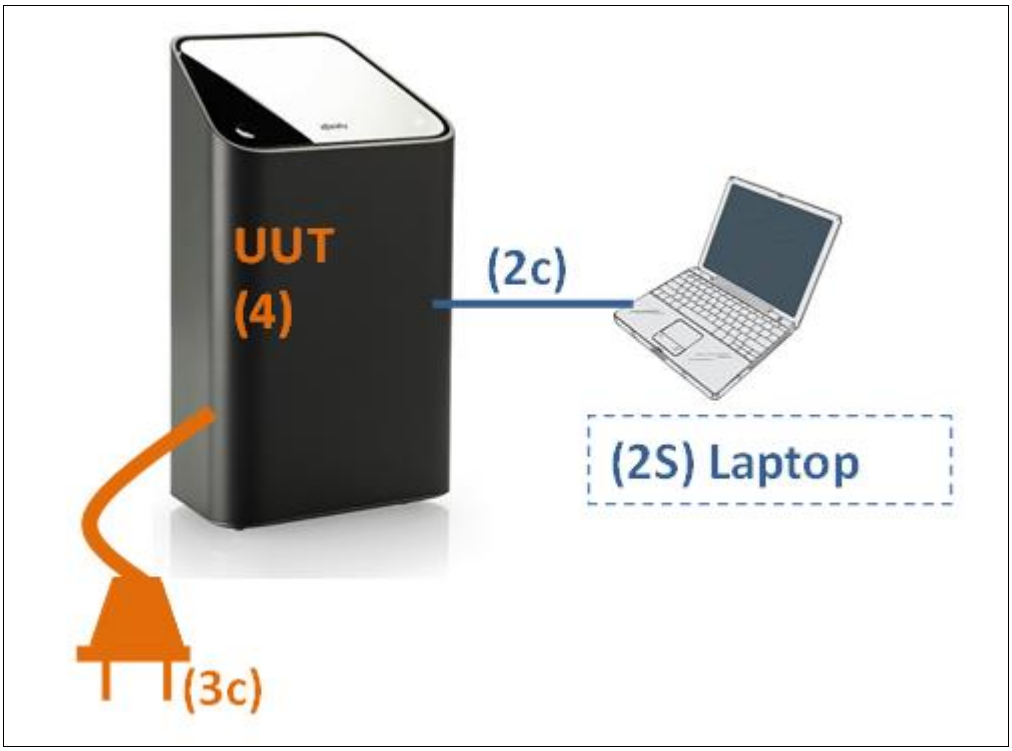

Figure 1. Block Diagram of Test Configuration

Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Revision
--	TG3482	TG3482	--	--	--

Table 4. Equipment Configuration

E. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
2s	Laptop	Assorted	N/A

Table 5. Support Equipment

F. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
2C	USB	USB-to-Serial	1	1	No	--
3C	AC Input	2 conductor, 18 AWG	1	2	No	(115v/60hz)

Table 6. Ports and Cabling Information

G. Mode of Operation

The provided instructions and software will configure the TG3482 for operation at each required test mode.

H. Method of Monitoring EUT Operation

The measured emission value is over the specified FCC limits.

I. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

J. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to ARRIS Group, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

a.) Antenna must be permanently attached to the unit.

b.) Antenna must use a unique type of connector to attach to the EUT.

c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The EUT has an integral antenna.

A modified sample was used for conducted testing where applicable.

Test Engineer(s): Hadid Jones

Test Date(s): 08/12/16

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15. 403(i) 26 dB Bandwidth

Test Requirements: **§ 15.403(i):** For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

Test Results The 26 dB Bandwidth was compliant with the requirements of this section.

Test Engineer(s): Hadid Jones

Test Date(s): 08/12/16



26 dB Occupied Bandwidth

4x8				
Frequency	**Bandwidth**	**Mode**	**26dB**	**99%**
Ch 5745M	BW 20M	a mode	20.86	16.51
Ch 5745M	BW 20M	ac mode	21.34	17.74
Ch 5745M	BW 20M	n mode	21.3	17.71
Ch 5805M	BW 20M	a mode	21.04	16.49
Ch 5805M	BW 20M	ac mode	21.5	17.72
Ch 5805M	BW 20M	n mode	21.61	17.72
Ch 5825M	BW 20M	a mode	20.5	16.48
Ch 5825M	BW 20M	ac mode	21.72	17.72
Ch 5825M	BW 20M	n mode	21.33	17.72
Ch 5755M	BW 40M	ac mode	40.08	36.09
Ch 5755M	BW 40M	n mode	39.59	36.12
Ch 5795M	BW 40M	ac mode	39.51	36.07
Ch 5795M	BW 40M	n mode	39.3	36.1
Ch 5775M	BW 80M	ac mode	79.83	75.3

Table 7. Occupied Bandwidth, Test Results, 4x8

6x8				
Frequency	**Bandwidth**	**Mode**	**26dB**	**99%**
Ch 5745M	BW 20M	a mode	21.09	16.46
Ch 5745M	BW 20M	ac mode	21.92	17.72
Ch 5745M	BW 20M	n mode	21.8	17.7
Ch 5805M	BW 20M	a mode	20.73	16.52
Ch 5805M	BW 20M	ac mode	21.92	17.72
Ch 5805M	BW 20M	n mode	21.63	17.72
Ch 5825M	BW 20M	a mode	20.24	16.51
Ch 5825M	BW 20M	ac mode	21.93	17.73
Ch 5825M	BW 20M	n mode	21.84	17.7
Ch 5755M	BW 40M	ac mode	40.4	36.12
Ch 5755M	BW 40M	n mode	40.26	36.12
Ch 5795M	BW 40M	ac mode	39.85	36.1
Ch 5795M	BW 40M	n mode	39.57	36.13
Ch 5775M	BW 80M	ac mode	80.35	75.28

Table 8. Occupied Bandwidth, Test Results, 6x8

26 dB Occupied Bandwidth, 802.11a 20 MHz, 4x8

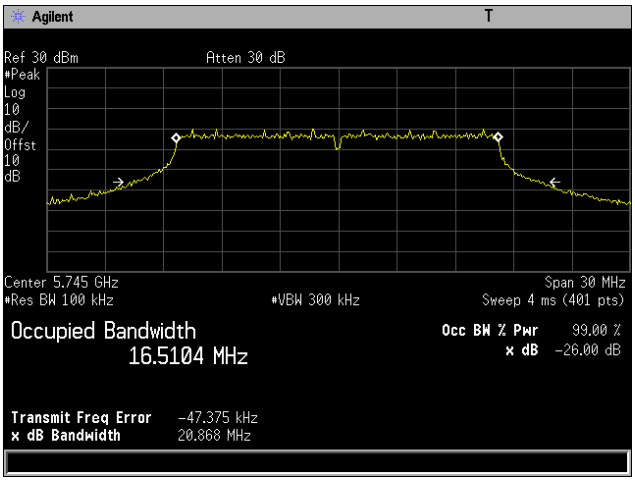

Plot 1. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M

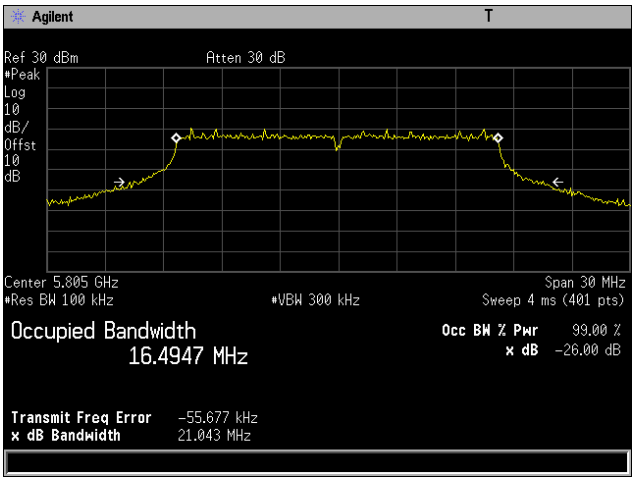

Plot 2. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M

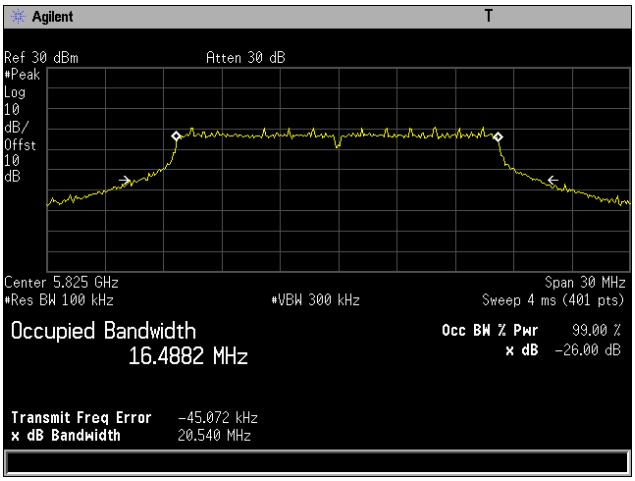

Plot 3. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M

26 dB Occupied Bandwidth, 802.11ac 20 MHz, 4x8

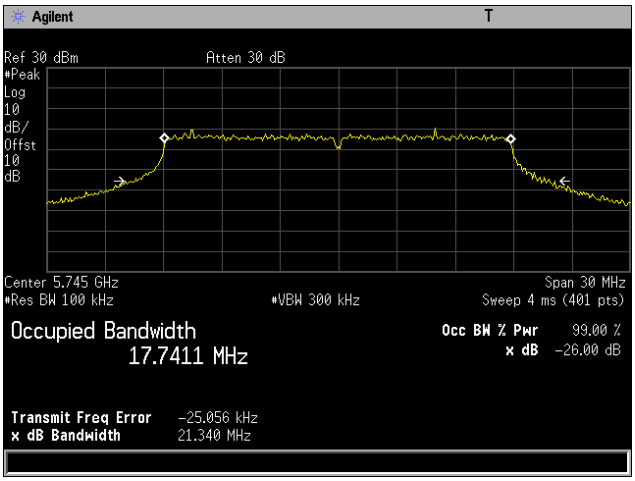

Plot 4. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0

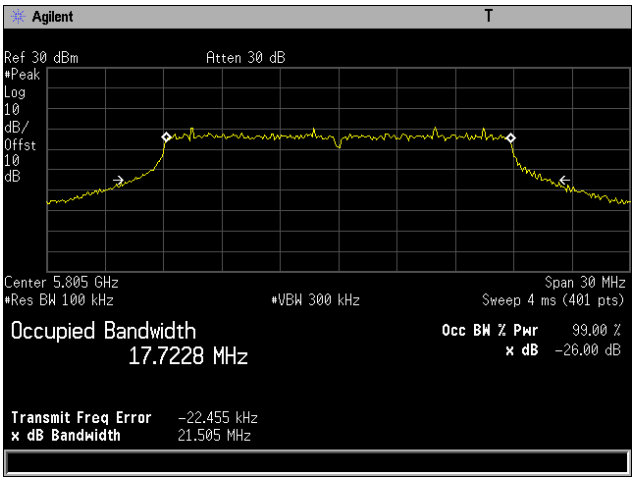

Plot 5. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, NSS1 MCS0

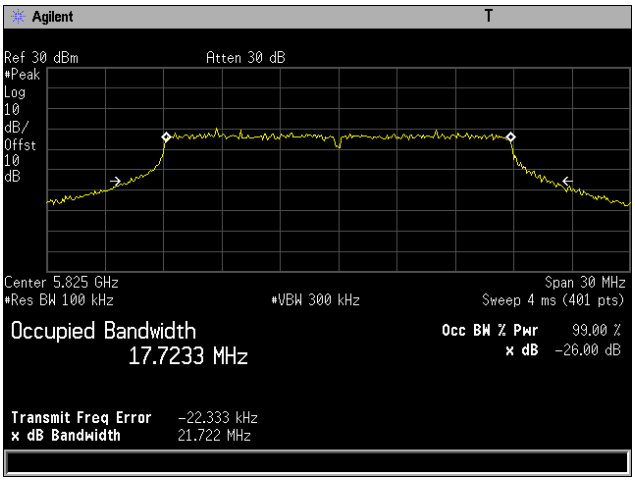

Plot 6. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0

26 dB Occupied Bandwidth, 802.11ac 40 MHz, 4x8

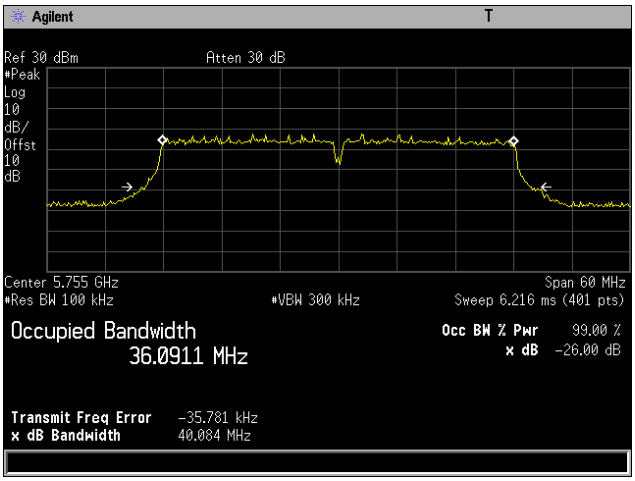

Plot 7. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0

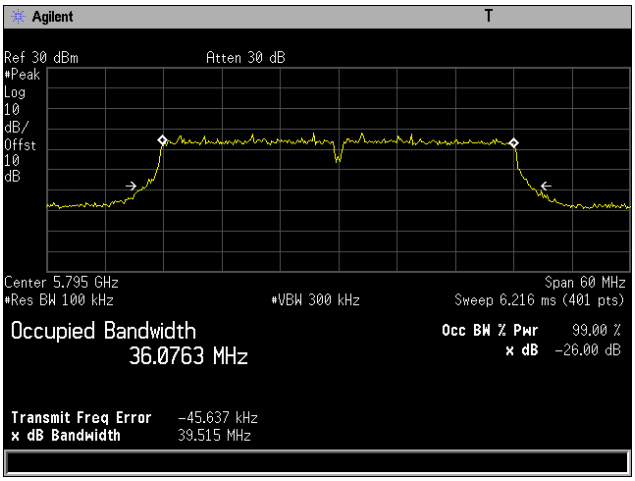

Plot 8. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0

26 dB Occupied Bandwidth, 802.11ac 80 MHz, 4x8

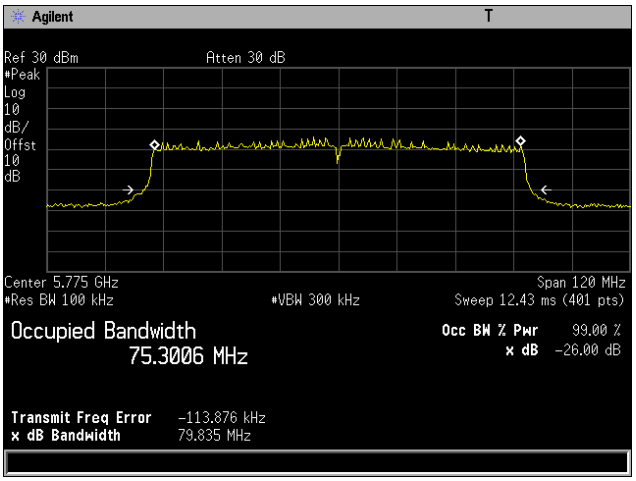

Plot 9. 26 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0

26 dB Occupied Bandwidth, 802.11n 20 MHz, 4x8

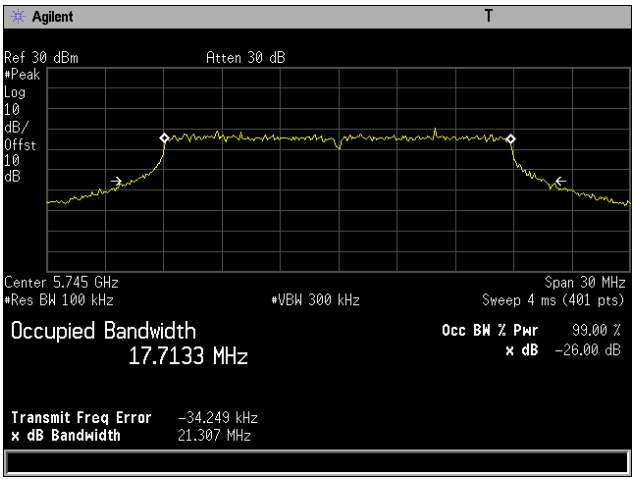

Plot 10. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0

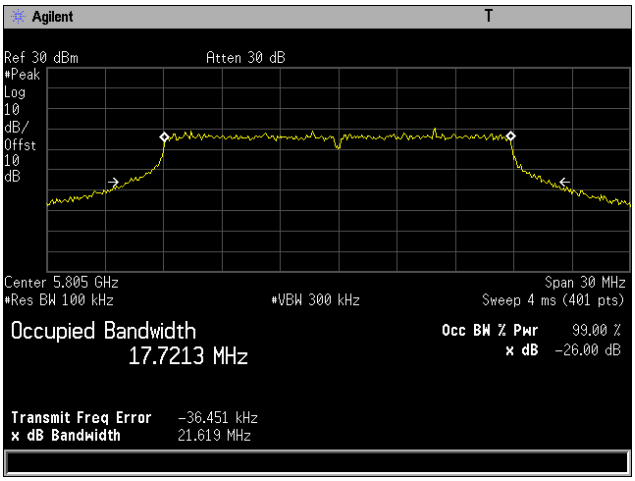

Plot 11. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0

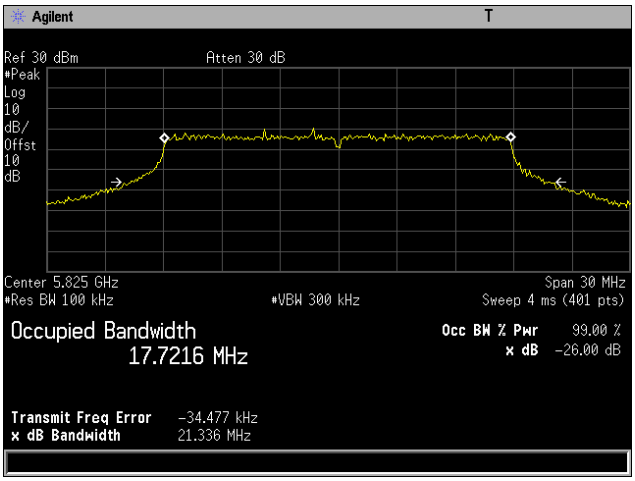

Plot 12. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0

26 dB Occupied Bandwidth, 802.11n 40 MHz, 4x8

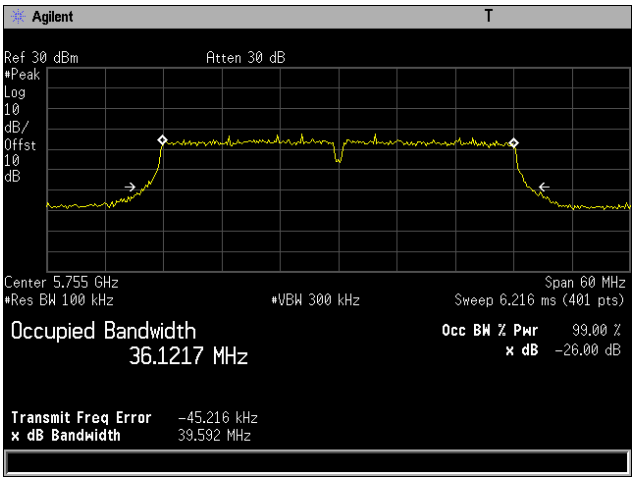

Plot 13. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0

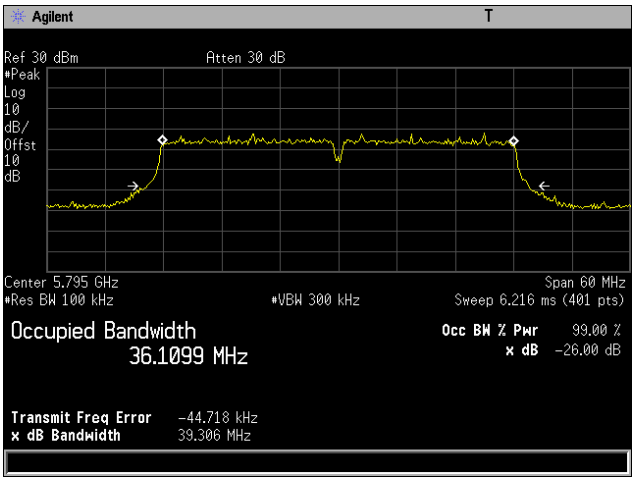

Plot 14. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0

26 dB Occupied Bandwidth, 802.11a, 20 MHz, 6x8

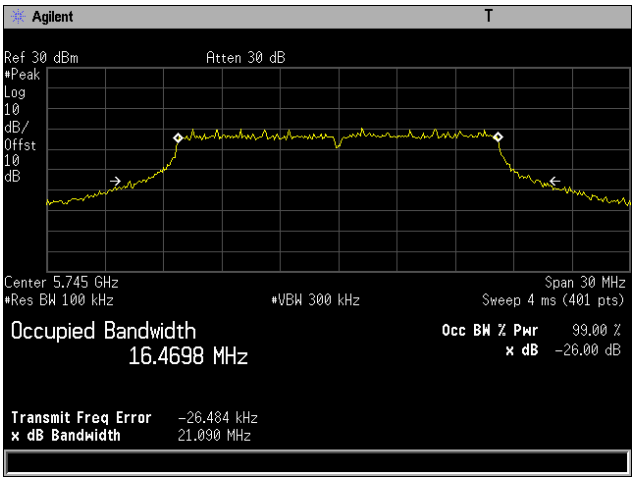

Plot 15. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M

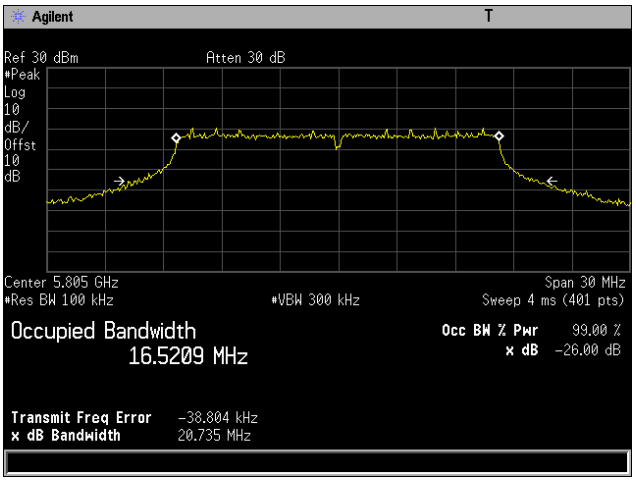

Plot 16. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M

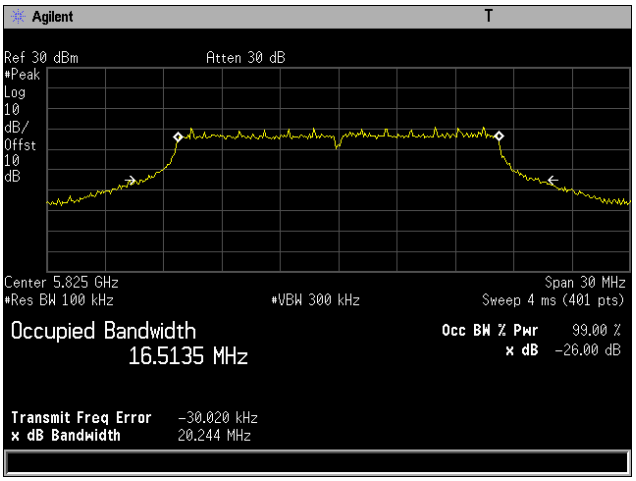

Plot 17. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M

26 dB Occupied Bandwidth, 802.11ac 20 MHz, 6x8

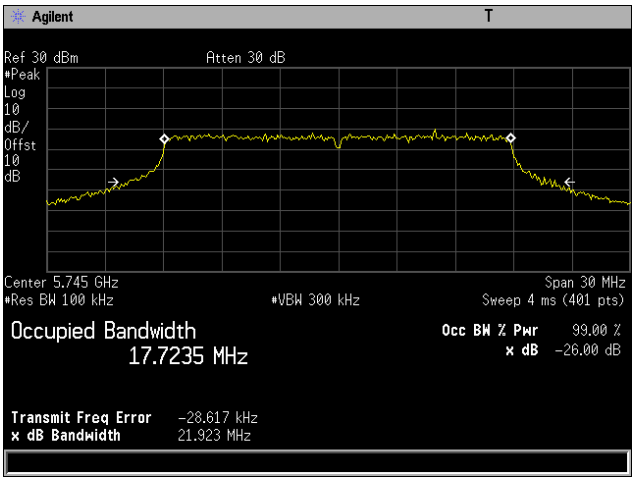

Plot 18. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, NSS1 MCS0

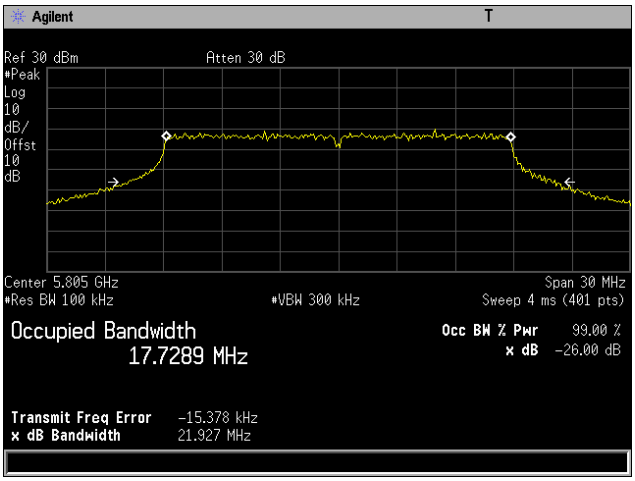

Plot 19. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, NSS1 MCS0

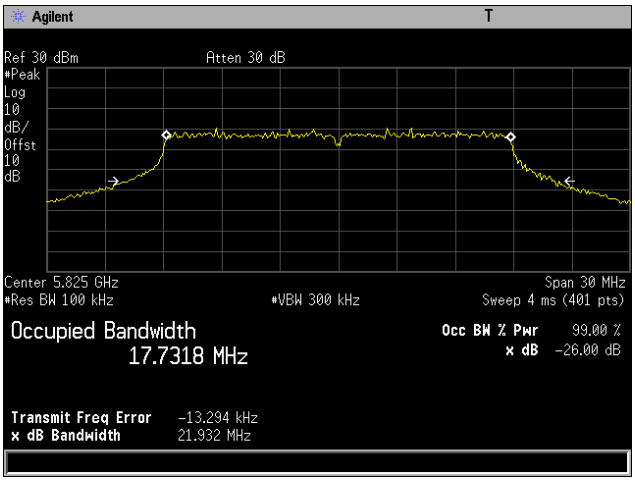

Plot 20. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, NSS1 MCS0

26 dB Occupied Bandwidth, 802.11ac 40 MHz, 6x8

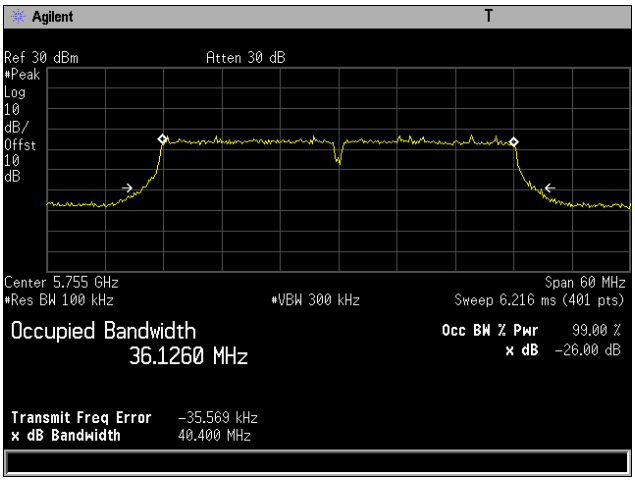

Plot 21. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, NSS1 MCS0

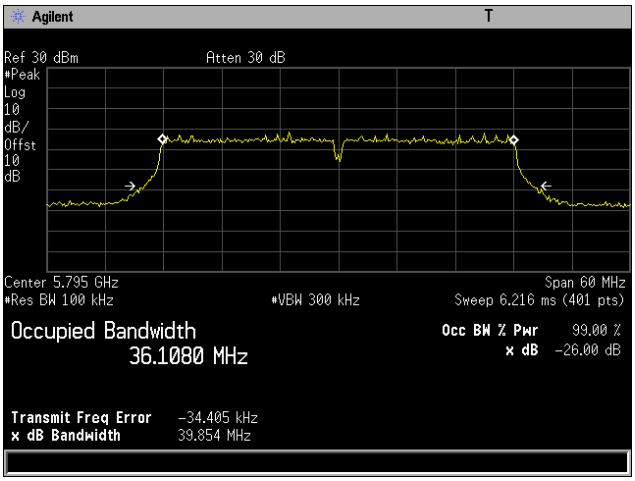

Plot 22. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, NSS1 MCS0

26 dB Occupied Bandwidth, 802.11ac 80 MHz, 6x8

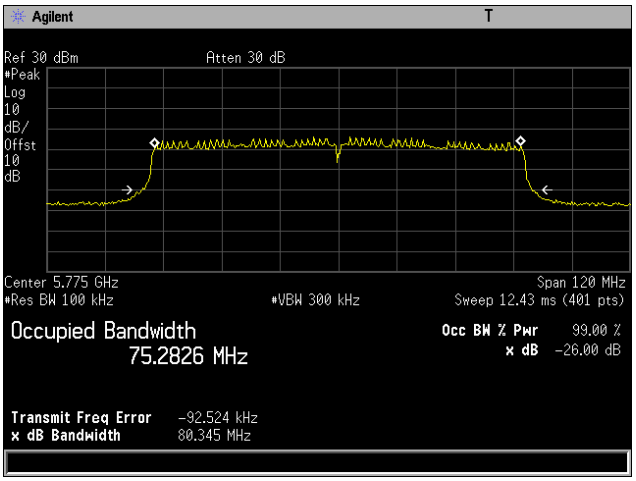

Plot 23. 26 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, NSS1 MCS0

26 dB Occupied Bandwidth, 802.11n 20 MHz, 6x8

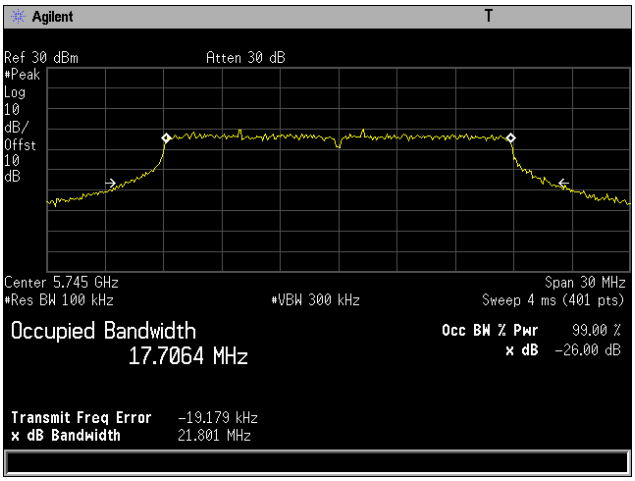

Plot 24. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0

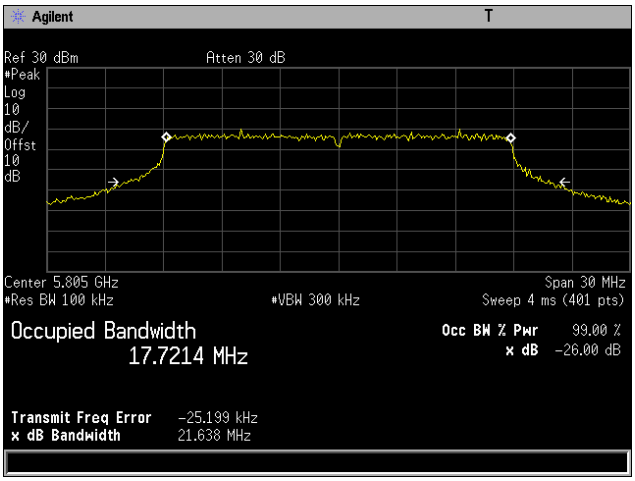

Plot 25. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0

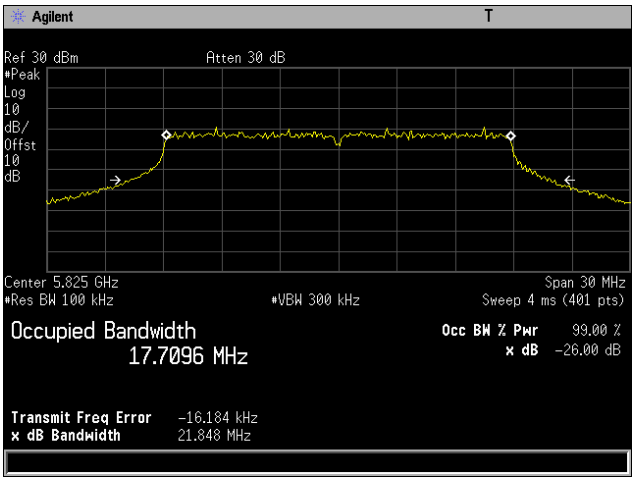

Plot 26. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0

26 dB Occupied Bandwidth, 802.11n 40 MHz, 6x8

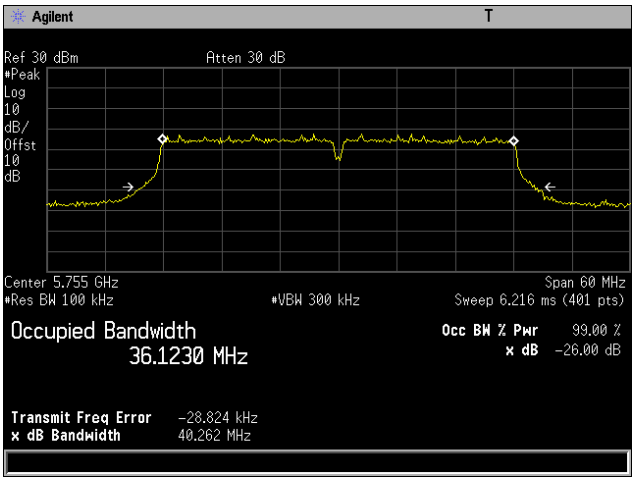

Plot 27. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0

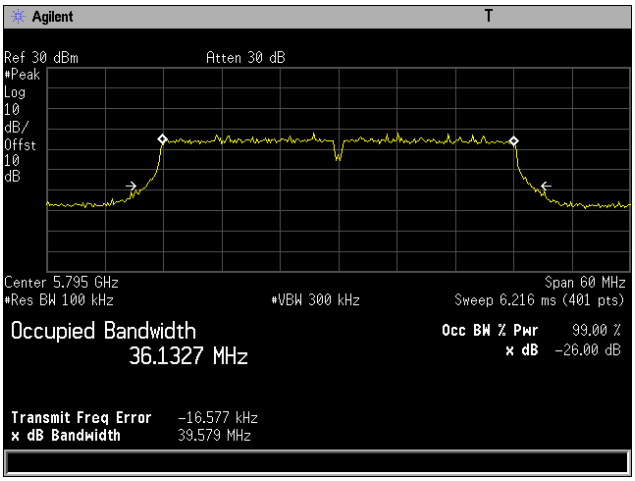

Plot 28. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0

Electromagnetic Compatibility Criteria for Intentional Radiators

§15. 407(a)(3) Maximum Conducted Output Power

Test Requirements: **§15.407(a)(3):** For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

Test Procedure: The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01.

The unit was placed in MIMO configuration.
The directional gain presented in the measured composite gain of all antennas.
A modified sample, having coaxial pigtails in place of the antenna, was used for testing.

Test Results: The EUT as tested is compliant with the requirements of this section.

Test Engineer(s): Hadid Jones

Test Date(s): 08/21/16



4x8											
Frequency	**Bandwidth**	**Mode**	**Port 3 Data (dBm)**	**Port 4 Data (dBm)**	**Port 5 Data (dBm)**	**Port 6 Data (dBm)**	**Sum (dBm)**	**Limit (dBm)**	**Antenna Gain (dbi)**	**Final limit (dBm)**	**Margin dB**
Ch 5745M	BW 20M	a mode	18.61	18.65	18.8	18.67	24.71	30	6.1	29.9	-5.19
Ch 5745M	BW 20M	ac mode	19.55	17.01	17.99	20.67	25.06	30	6.1	29.9	-4.84
Ch 5745M	BW 20M	n mode	19.02	18.68	18.27	19.71	24.98	30	6.1	29.9	-4.92
Ch 5805M	BW 20M	a mode	18.21	18.63	18.74	19.64	24.86	30	6.1	29.9	-5.04
Ch 5805M	BW 20M	ac mode	19.76	19.94	18.88	19.83	25.65	30	6.1	29.9	-4.25
Ch 5805M	BW 20M	n mode	19.53	17.53	18.91	20.09	25.19	30	6.1	29.9	-4.71
Ch 5825M	BW 20M	a mode	18.72	18.73	18.88	19.86	25.1	30	6.1	29.9	-4.8
Ch 5825M	BW 20M	ac mode	19.29	18.59	18.93	20.14	25.3	30	6.1	29.9	-4.6
Ch 5825M	BW 20M	n mode	19.05	18.26	18.44	19.45	24.85	30	6.1	29.9	-5.05
Ch 5755M	BW 40M	ac mode	18.45	19.37	19.3	20.35	25.45	30	6.1	29.9	-4.45
Ch 5755M	BW 40M	n mode	18.44	19.29	20.12	21.35	25.96	30	6.1	29.9	-3.94
Ch 5795M	BW 40M	ac mode	19.5	19.48	19.34	21.45	26.06	30	6.1	29.9	-3.84
Ch 5795M	BW 40M	n mode	19.61	18.35	19.9	20.64	25.73	30	6.1	29.9	-4.17
Ch 5775M	BW 80M	ac mode	18.71	16.82	17.04	17.48	23.6	30	6.1	29.9	-6.3

Table 9. Conducted Output Power, Test Results, 4x8

6x8													
Frequency	**Bandwidth**	**Mode**	**Port 2 Data (dBm)**	**Port 3 Data (dBm)**	**Port 4 Data (dBm)**	**Port 5 Data (dBm)**	**Port 6 Data (dBm)**	**Port 7 Data (dBm)**	**Sum (dBi)**	**Limit (dBm)**	**Antenna Gain (dBi)**	**Final limit**	**Margin dB**
Ch 5745M	BW 20M	a mode	17.52	19.01	18.97	18.53	18.4	18.27	26.26	30	6.8	29.2	-2.94
Ch 5745M	BW 20M	ac mode	16.06	18.74	18.48	18.3	18.96	16.86	25.81	30	6.8	29.2	-3.39
Ch 5745M	BW 20M	n mode	17.3	19.95	18.16	18.59	19.8	17.84	26.5	30	6.8	29.2	-2.7
Ch 5805M	BW 20M	a mode	16.17	18.13	17.29	17.11	16.52	17.65	24.98	30	6.8	29.2	-4.22
Ch 5805M	BW 20M	ac mode	16.48	19.37	18.64	19.35	20.89	17.82	26.76	30	6.8	29.2	-2.44
Ch 5805M	BW 20M	n mode	18.17	19.49	18.58	19.41	19.78	18.92	26.88	30	6.8	29.2	-2.32
Ch 5825M	BW 20M	a mode	14.05	17.85	15.85	16.4	17.63	17.46	24.51	30	6.8	29.2	-4.69
Ch 5825M	BW 20M	ac mode	15.05	20.07	19.7	19.6	14.68	20.1	26.54	30	6.8	29.2	-2.66
Ch 5825M	BW 20M	n mode	14.89	19.64	18.69	18.38	19.67	19.27	26.47	30	6.8	29.2	-2.73
Ch 5755M	BW 40M	ac mode	16.47	18.91	18.31	19.03	19.29	17.94	26.21	30	6.8	29.2	-2.99
Ch 5755M	BW 40M	n mode	16.26	19.55	19.06	20.47	20.31	17.73	26.92	30	6.8	29.2	-2.28
Ch 5795M	BW 40M	ac mode	15.33	19.66	18.54	20.28	19.94	17.87	26.68	30	6.8	29.2	-2.52
Ch 5795M	BW 40M	n mode	18.01	19.62	18.23	19.98	20.56	18.68	27.07	30	6.8	29.2	-2.13
Ch 5775M	BW 80M	ac mode	17.81	19.88	19.12	18.54	19.12	17.56	26.53	30	6.8	29.2	-2.67

Table 10. Conducted Output Power, Test Results, 6x8

Conducted Output Power, 802.11a, 4x8, CH3

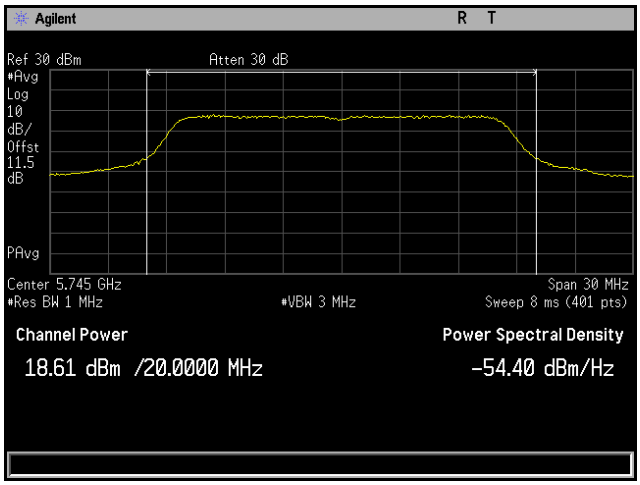

Plot 29. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH3

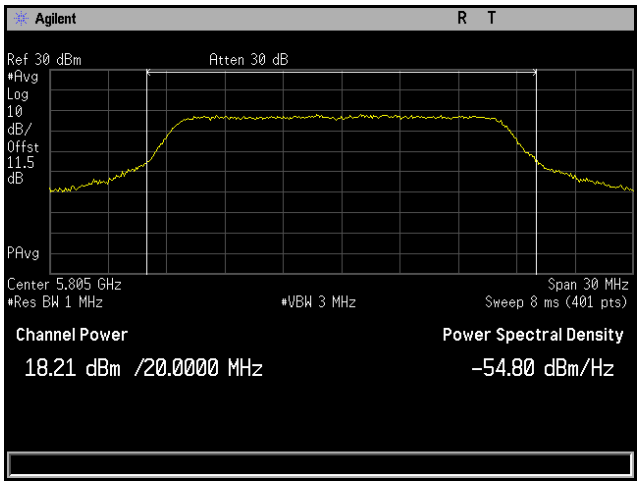

Plot 30. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH3

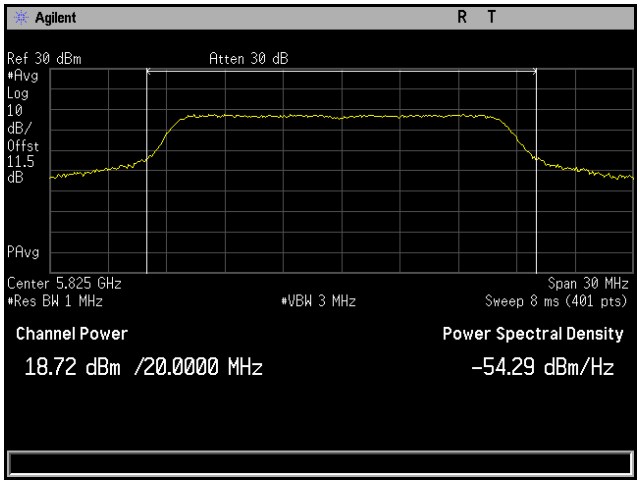

Plot 31. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH3

Conducted Output Power, 802.11a, 4x8, CH4

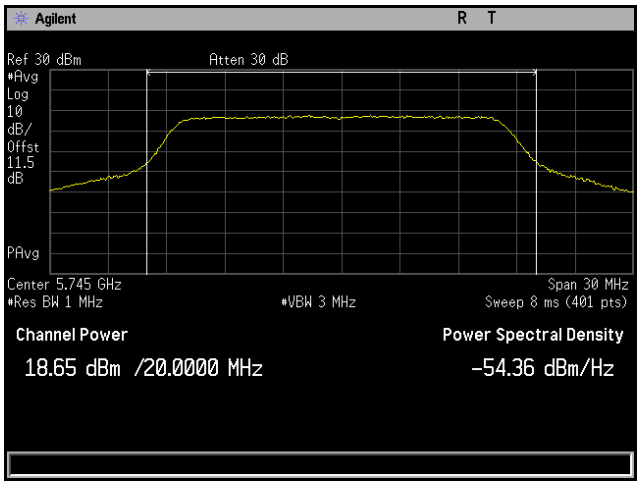

Plot 32. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH4

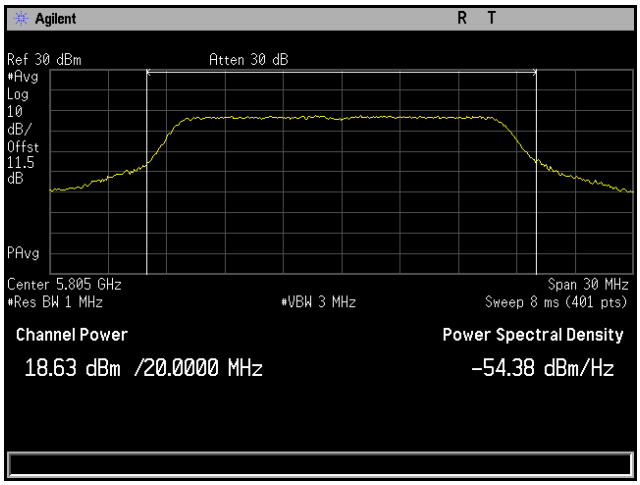

Plot 33. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH4

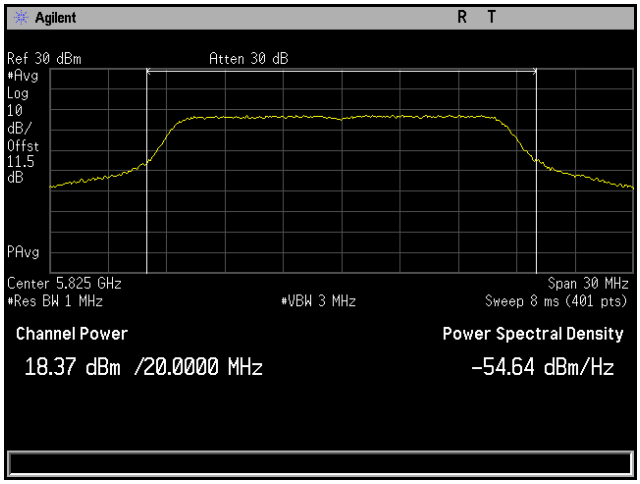

Plot 34. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH4

Conducted Output Power, 802.11a, 4x8, CH5

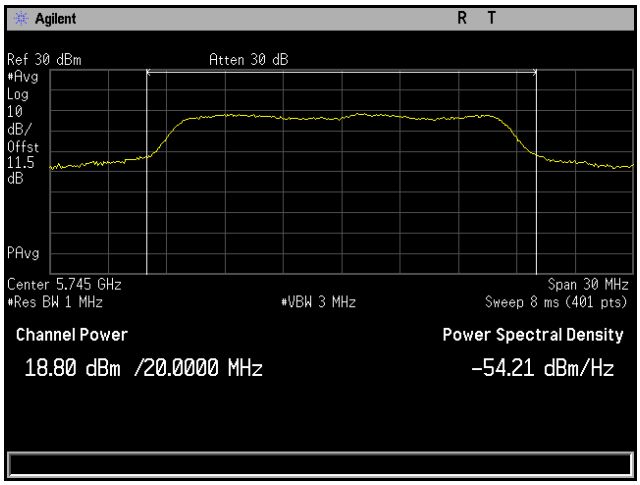

Plot 35. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH5

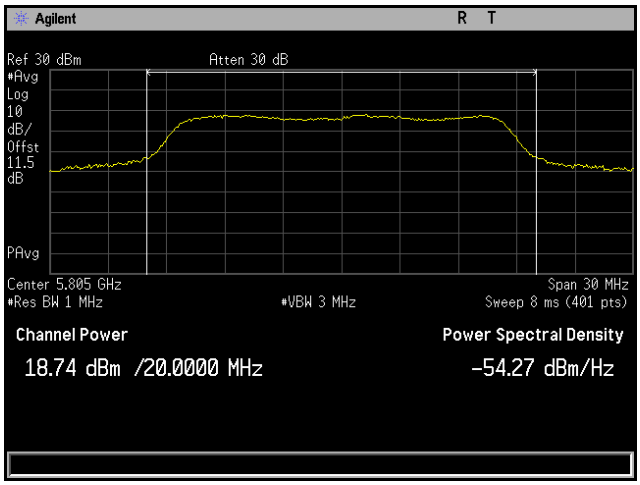

Plot 36. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH5

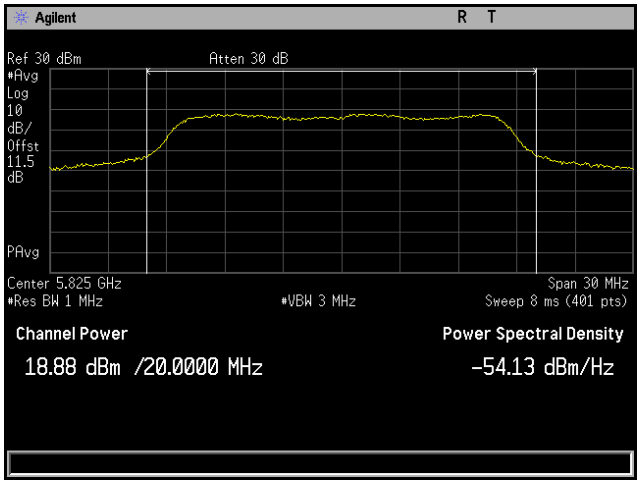

Plot 37. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH5

Conducted Output Power, 802.11a, 4x8, CH6

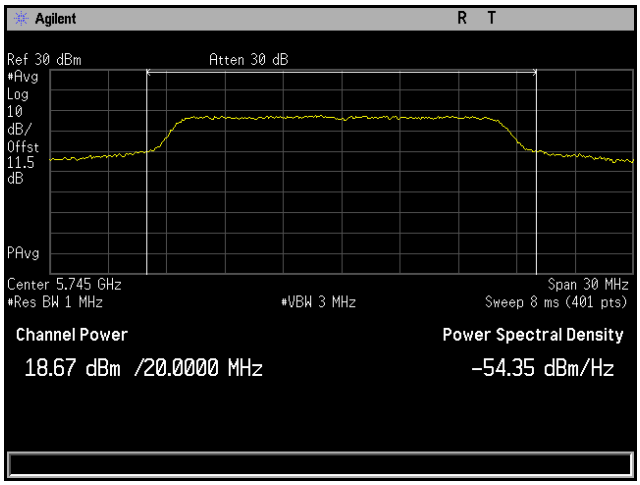

Plot 38. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH6

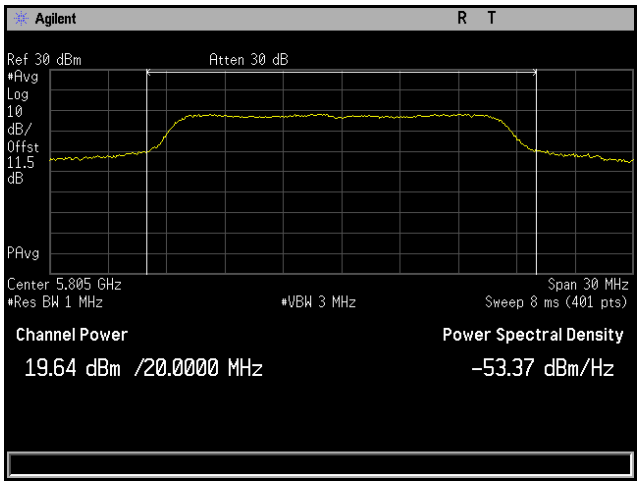

Plot 39. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH6

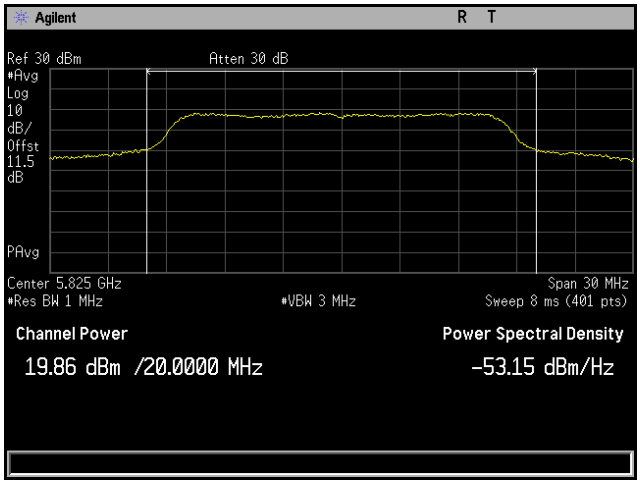

Plot 40. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH6

Conducted Output Power, 802.11ac 20 MHz, 4x8, CH3

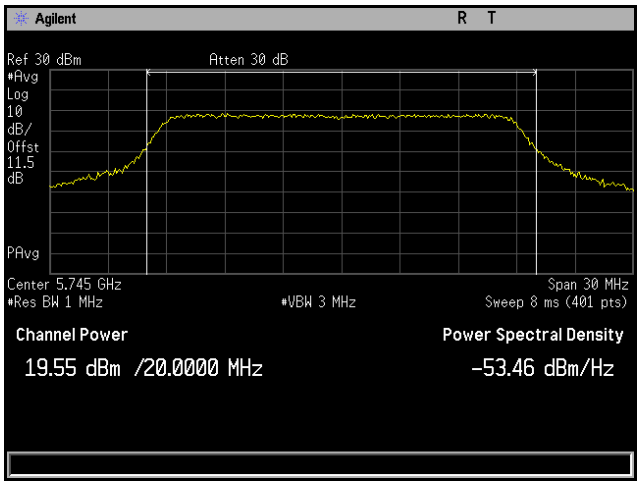

Plot 41. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3

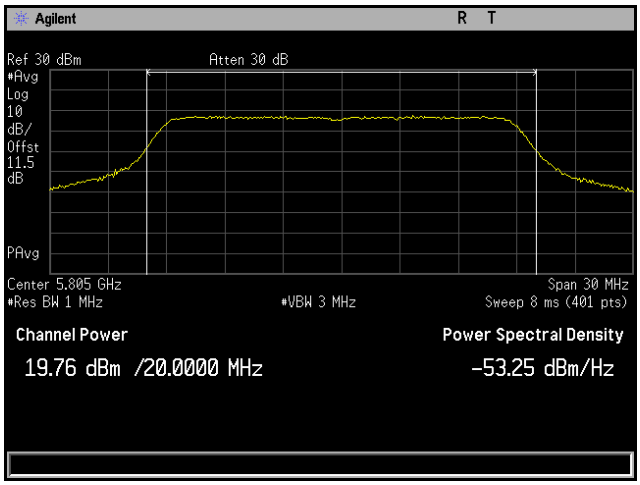

Plot 42. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3

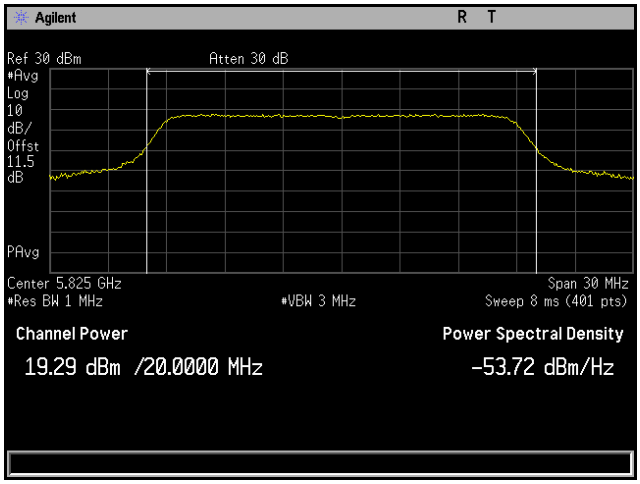

Plot 43. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11ac 20 MHz, 4x8, CH4

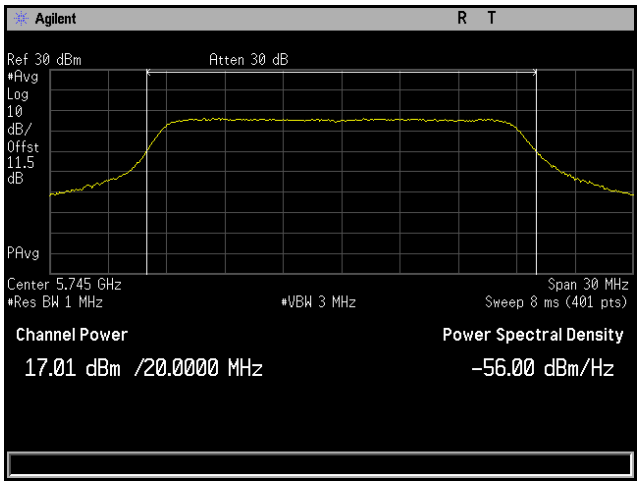

Plot 44. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH4

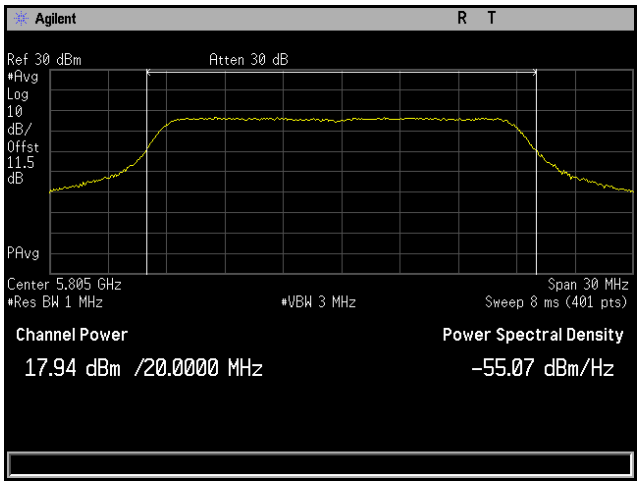

Plot 45. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH4

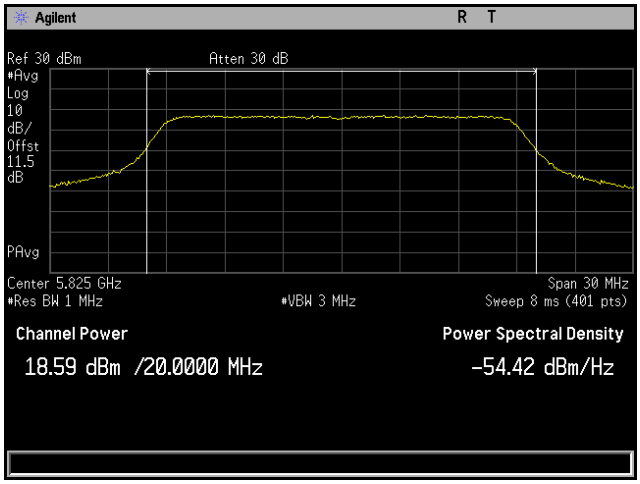

Plot 46. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11ac 20 MHz, 4x8, CH5

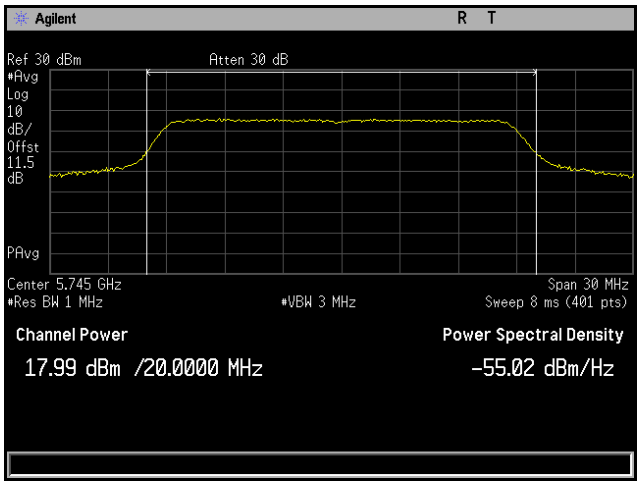

Plot 47. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH5

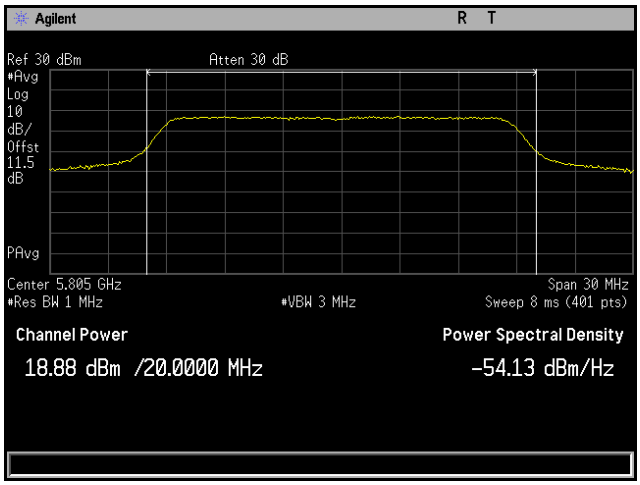

Plot 48. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH5

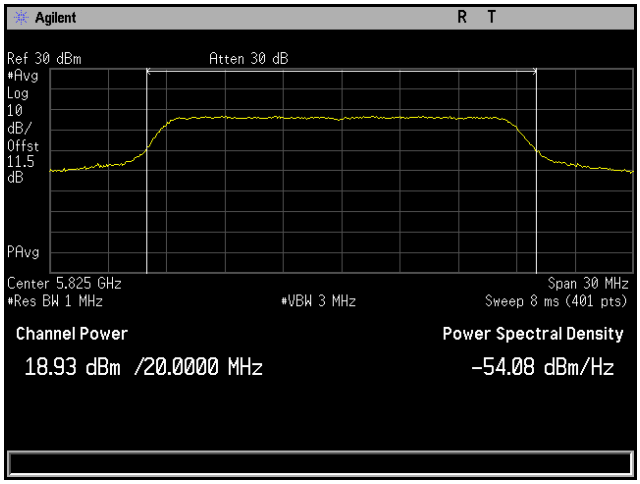

Plot 49. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11ac 20 MHz, 4x8, CH6

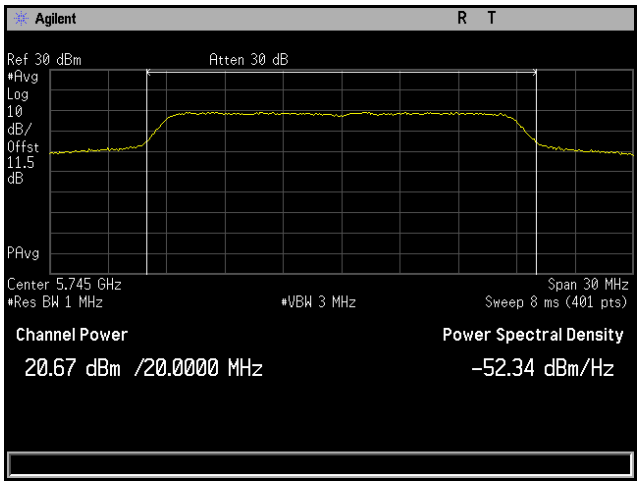

Plot 50. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH6

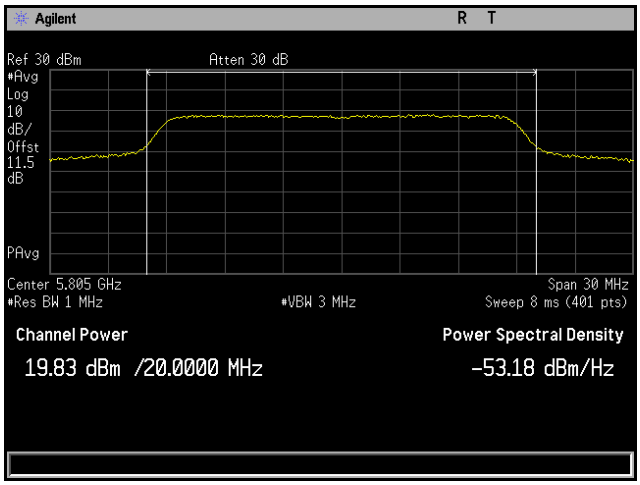

Plot 51. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH6

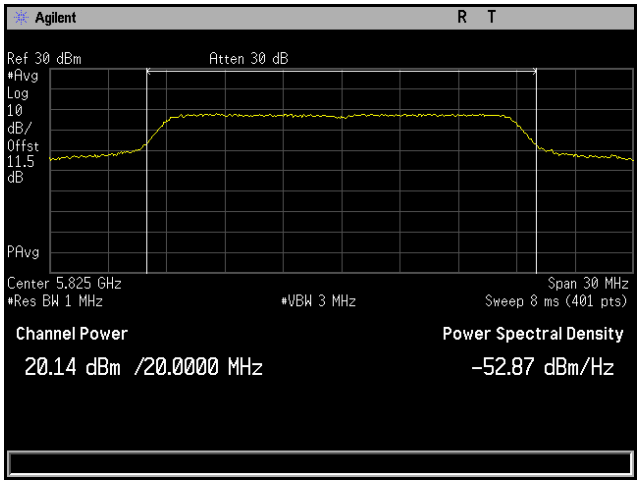

Plot 52. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11ac 40 MHz, 4x8, CH3

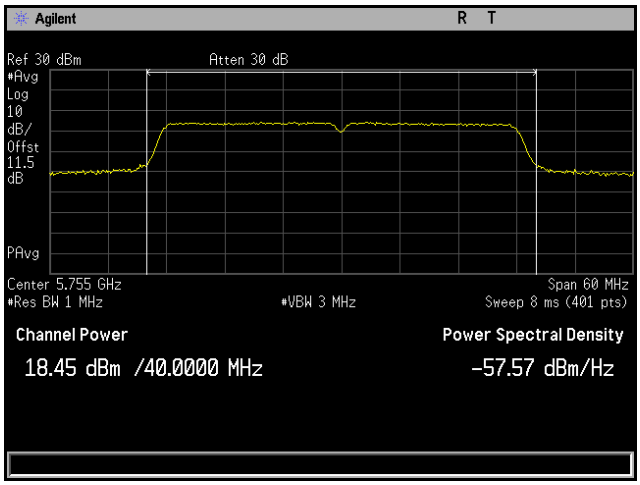

Plot 53. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3

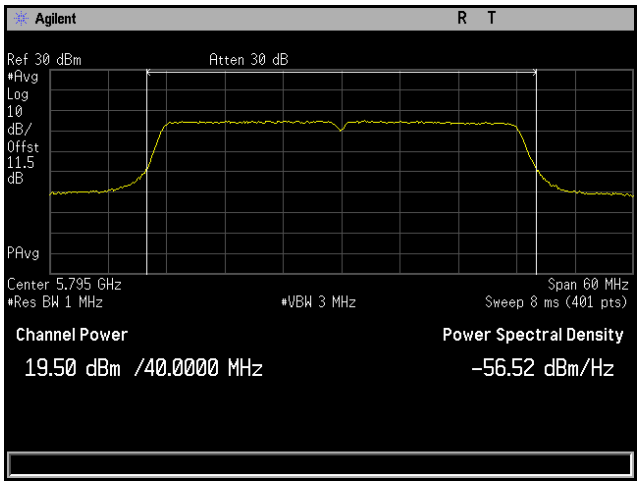

Plot 54. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11ac 40 MHz, 4x8, CH4

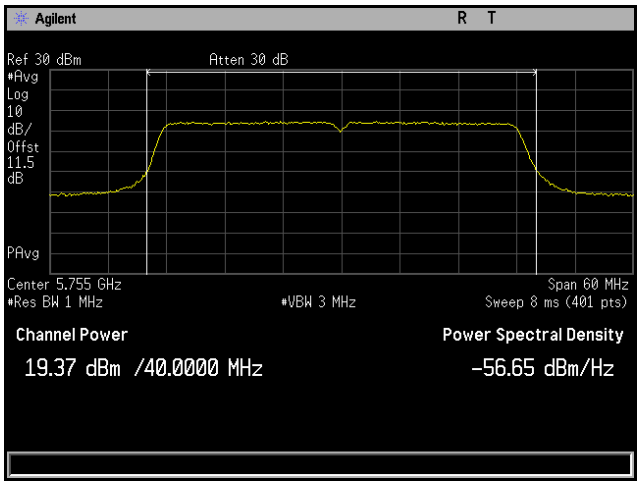

Plot 55. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH4

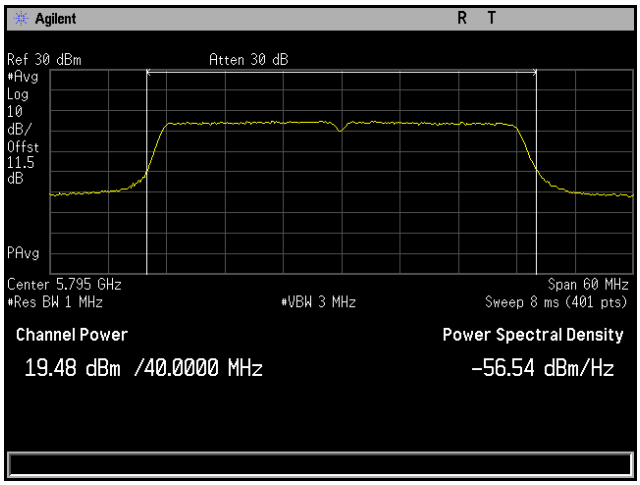

Plot 56. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11ac 40 MHz, 4x8, CH5

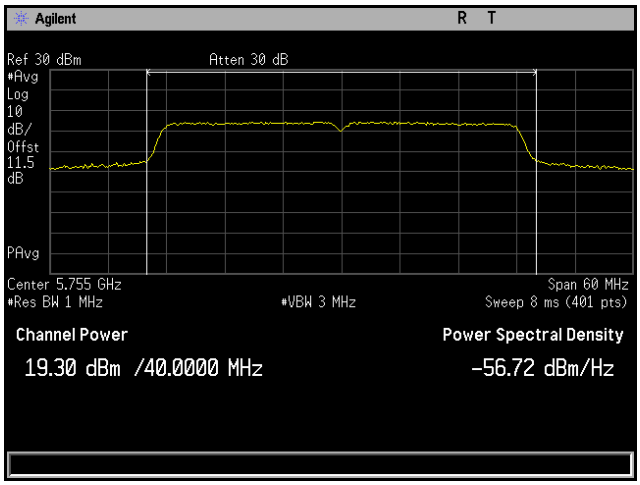

Plot 57. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH5

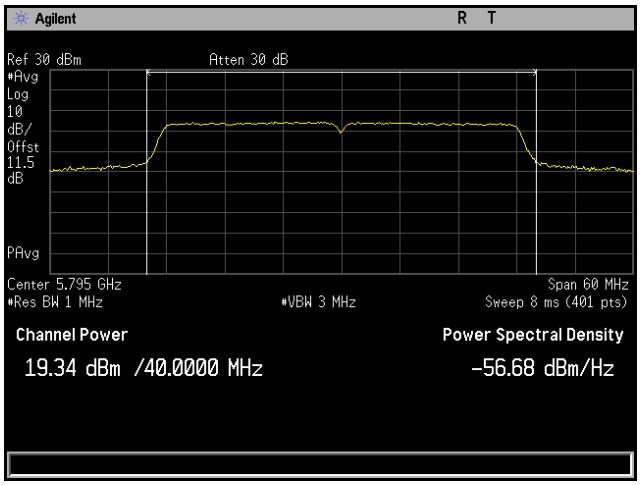

Plot 58. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11ac 40 MHz, 4x8, CH6

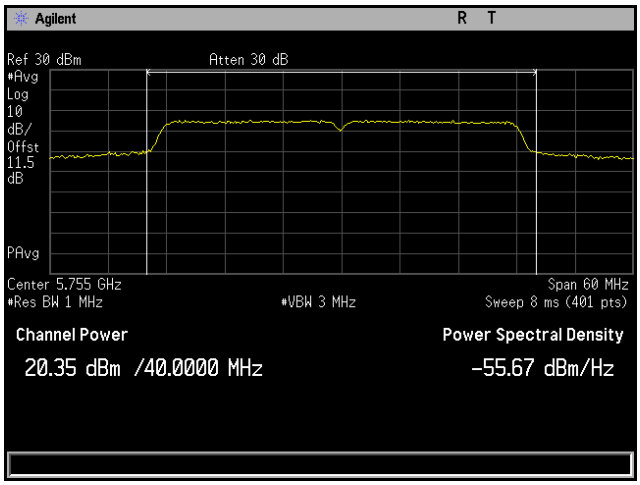

Plot 59. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH6

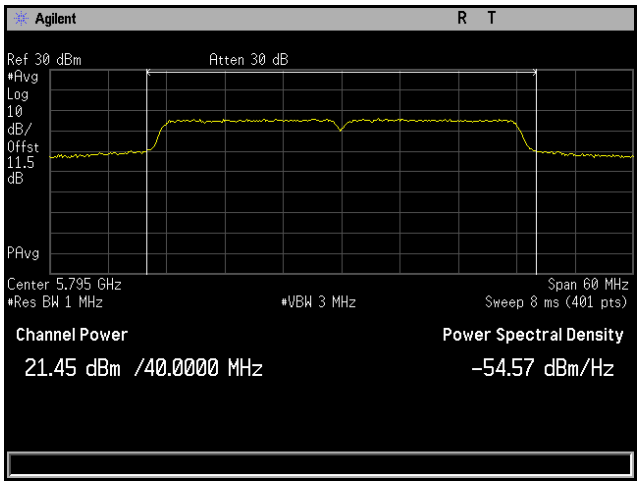

Plot 60. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11ac 80 MHz, 4x8, CH3

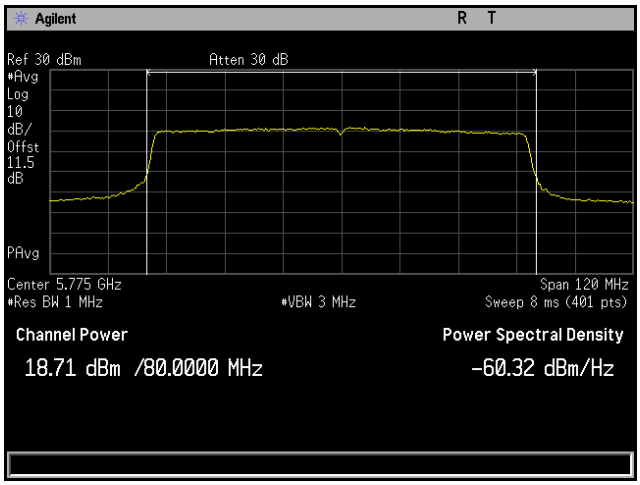

Plot 61. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11ac 80 MHz, 4x8, CH4

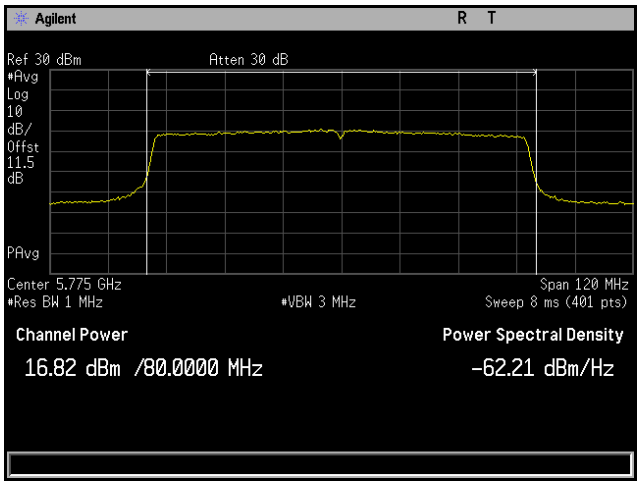

Plot 62. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11ac 80 MHz, 4x8, CH5

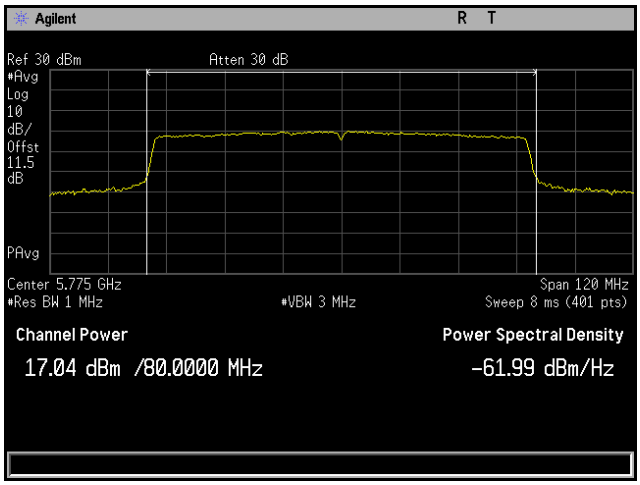

Plot 63. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11ac 80 MHz, 4x8, CH6

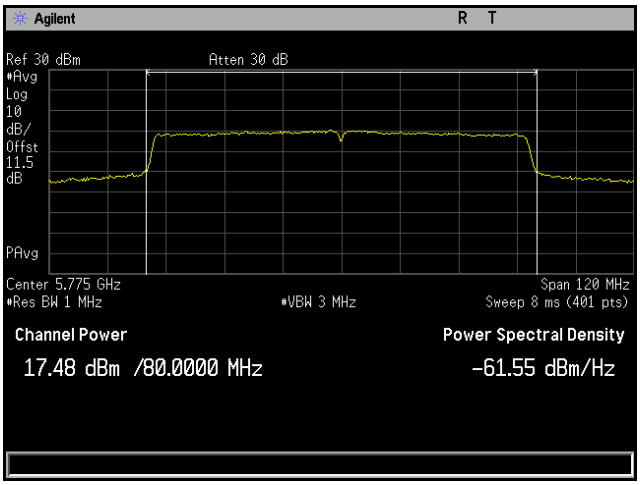

Plot 64. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11n 20 MHz, 4x8, CH3

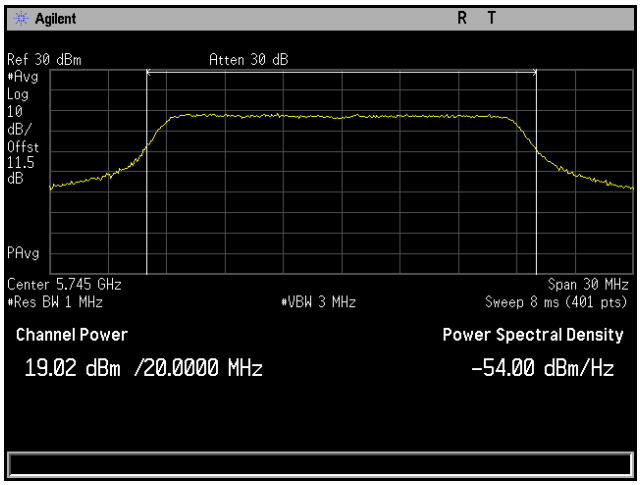

Plot 65. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3

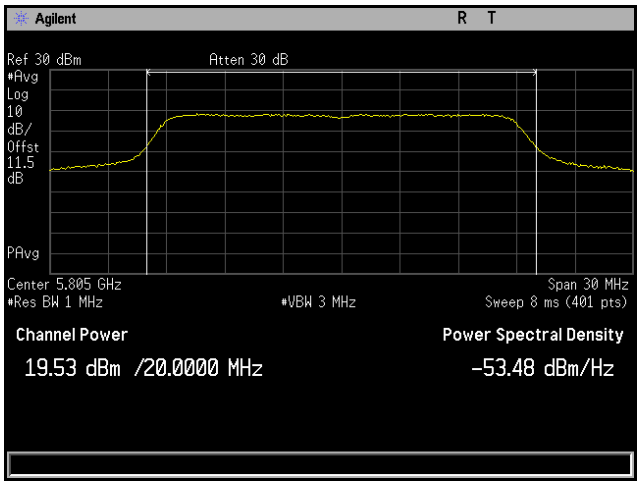

Plot 66. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3

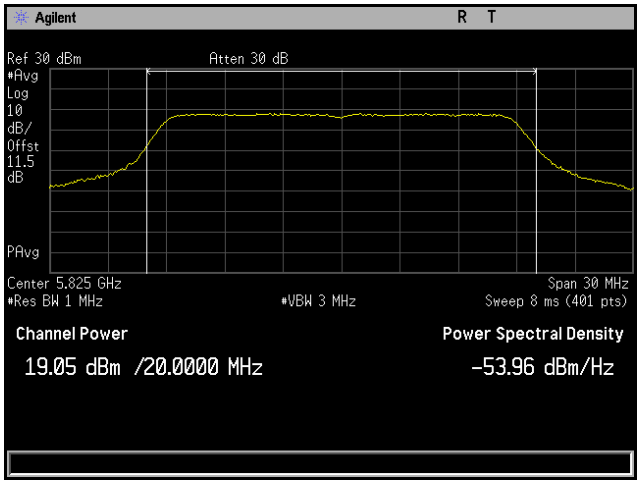

Plot 67. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11n 20 MHz, 4x8, CH4

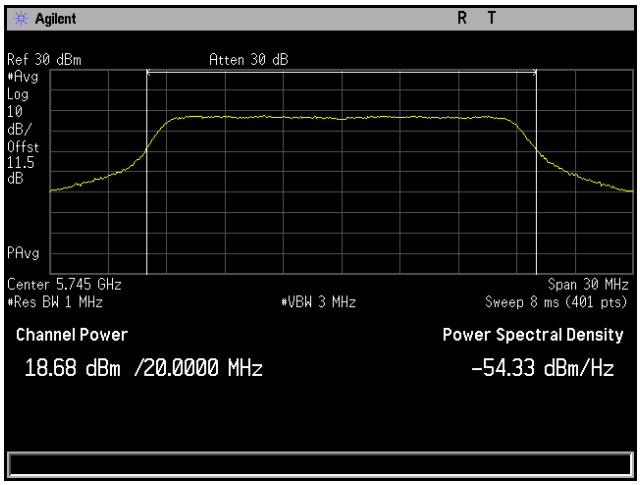

Plot 68. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH4

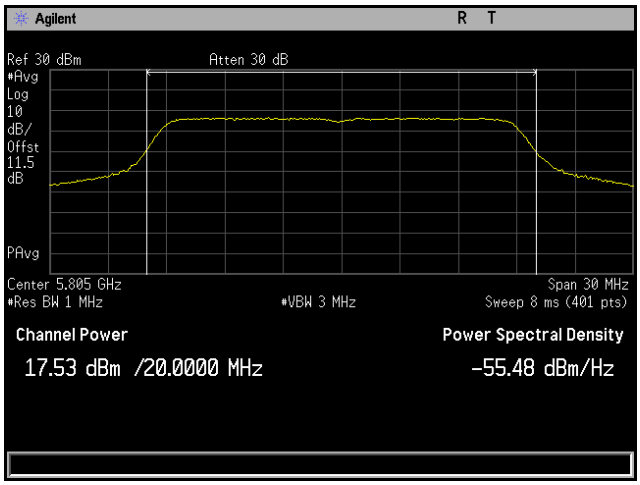

Plot 69. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH4

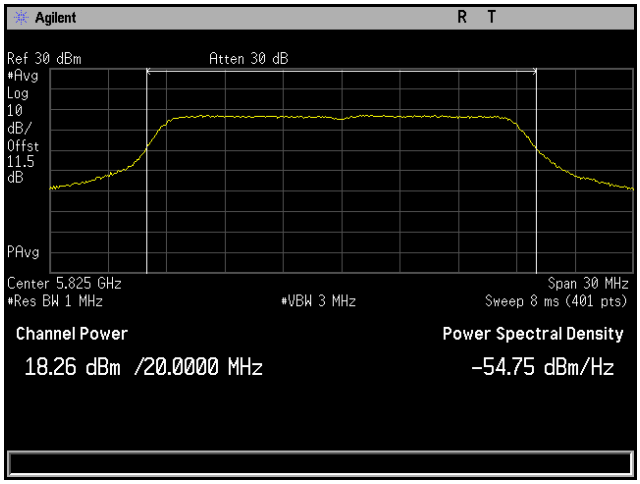

Plot 70. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11n 20 MHz, 4x8, CH5

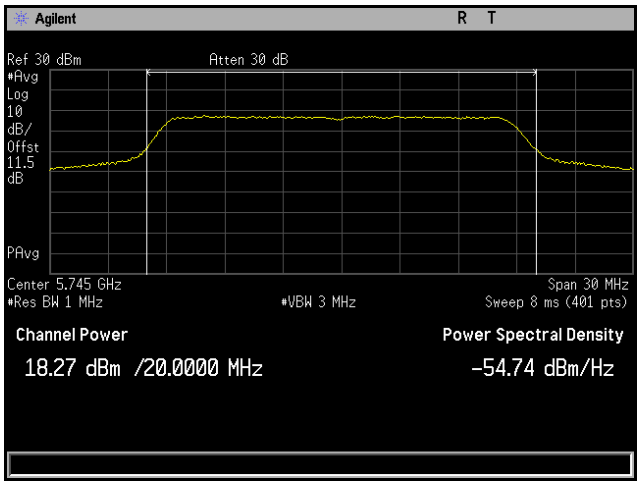

Plot 71. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH5

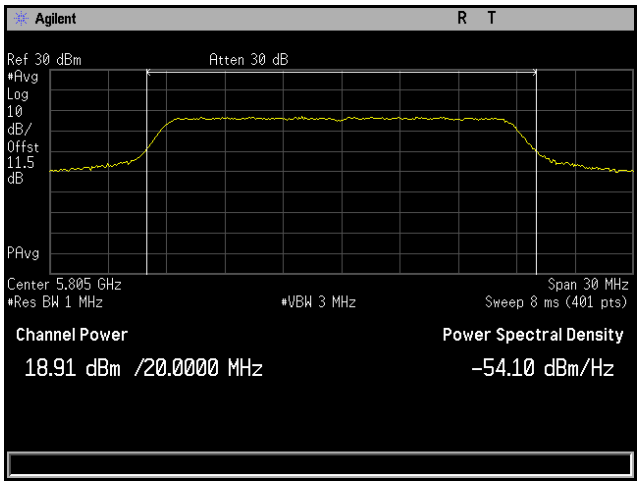

Plot 72. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH5

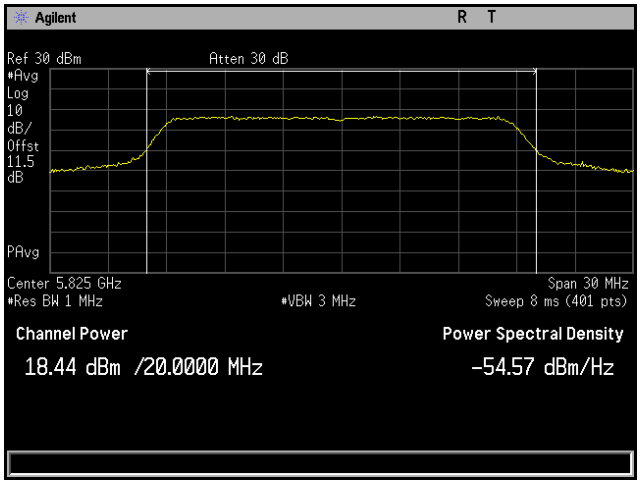

Plot 73. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11n 20 MHz, 4x8, CH6

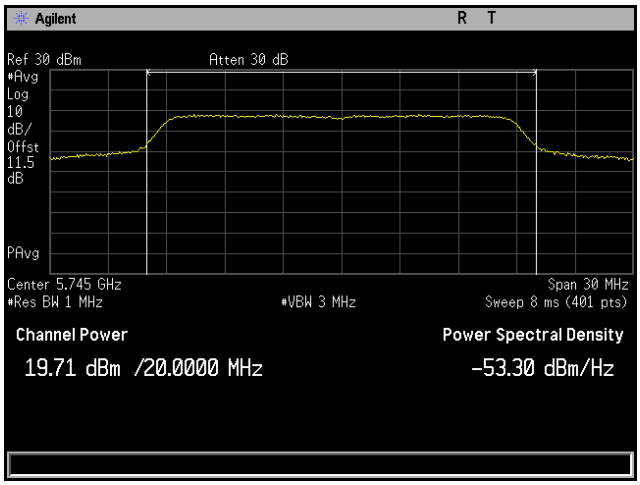

Plot 74. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH6

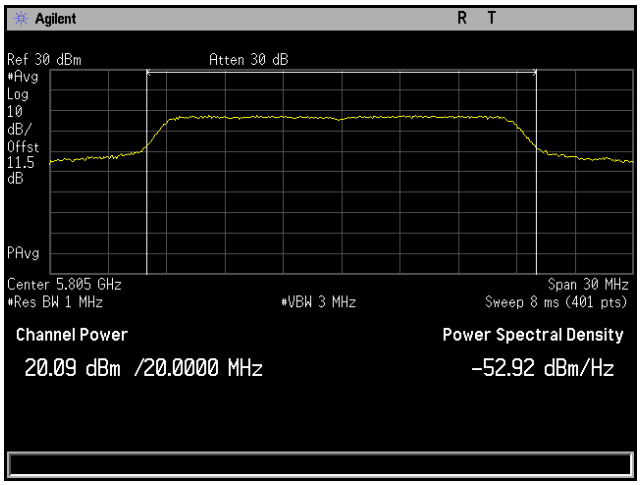

Plot 75. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH6

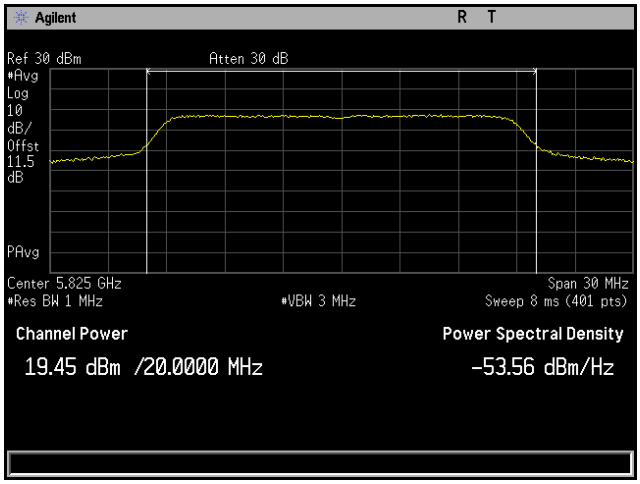

Plot 76. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11n 40 MHz, 4x8, CH3

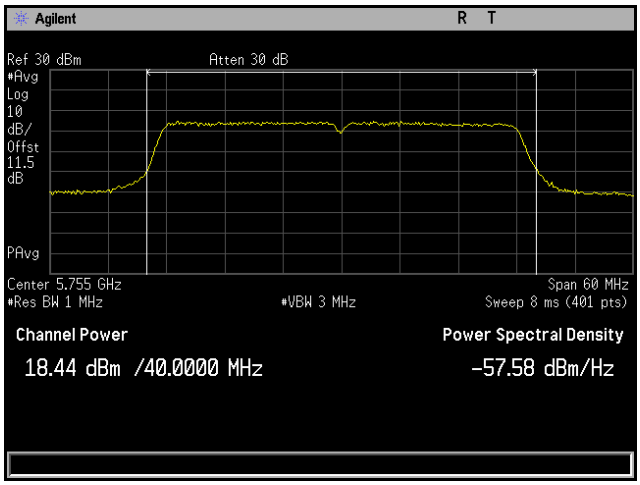

Plot 77. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3

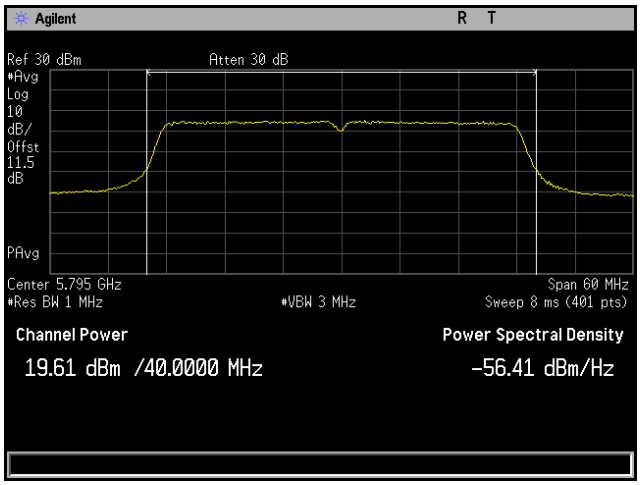

Plot 78. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11n, 4x8, CH4

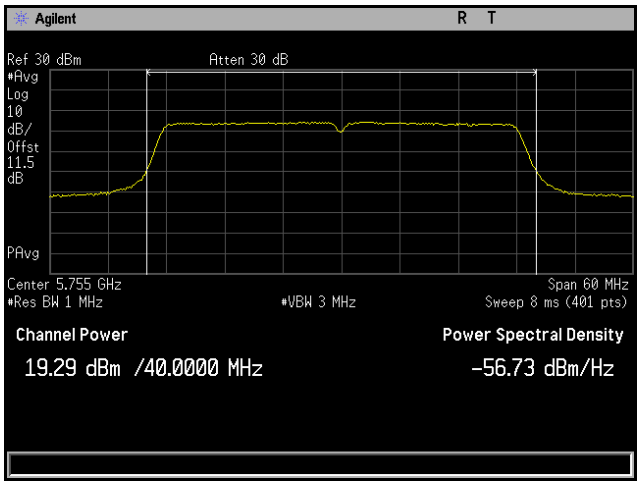

Plot 79. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH4

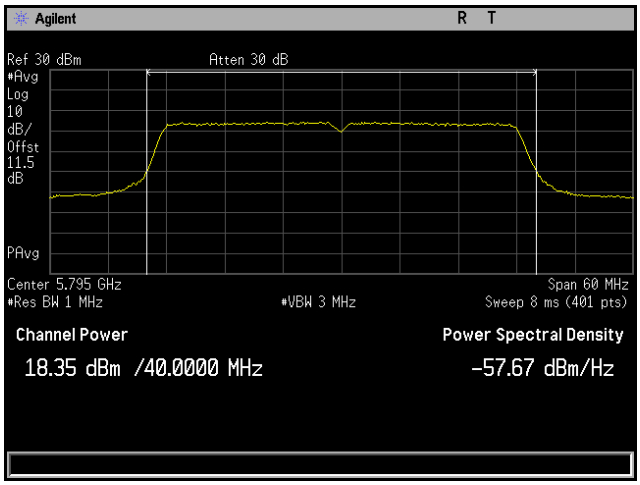

Plot 80. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11n, 4x8, CH5

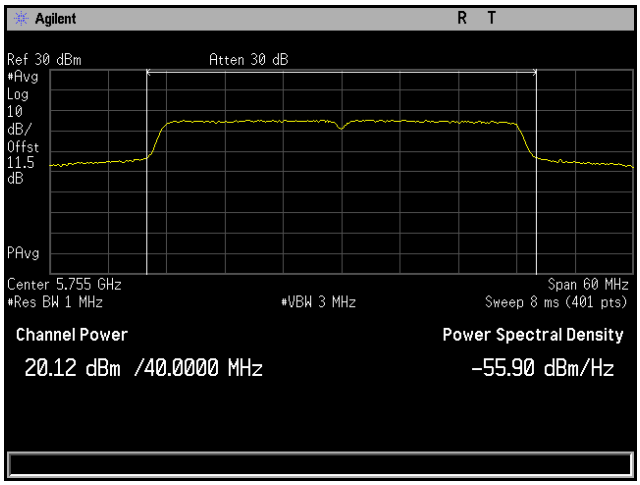

Plot 81. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH5

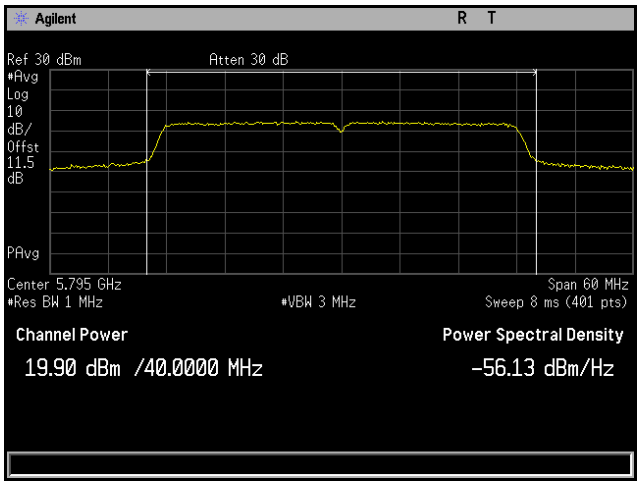

Plot 82. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11n, 4x8, CH6

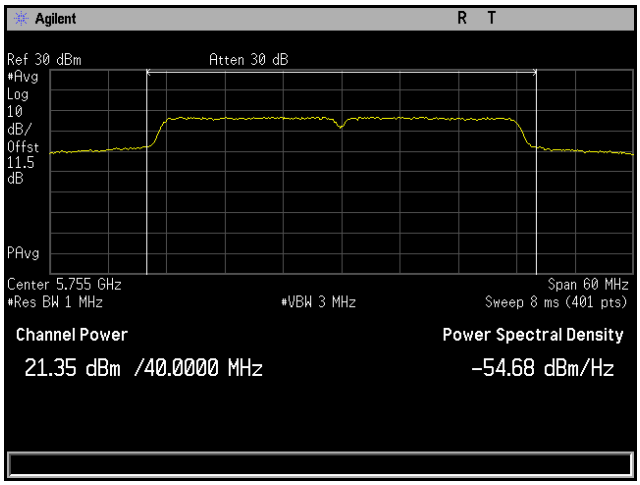

Plot 83. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH6

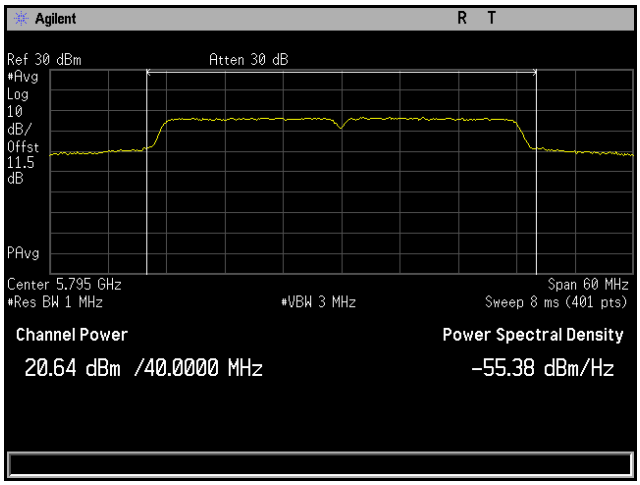

Plot 84. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11a, 6x8, CH2

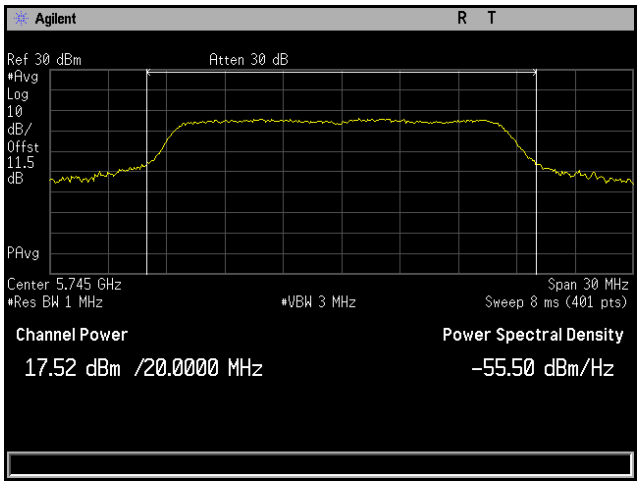

Plot 85. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH2

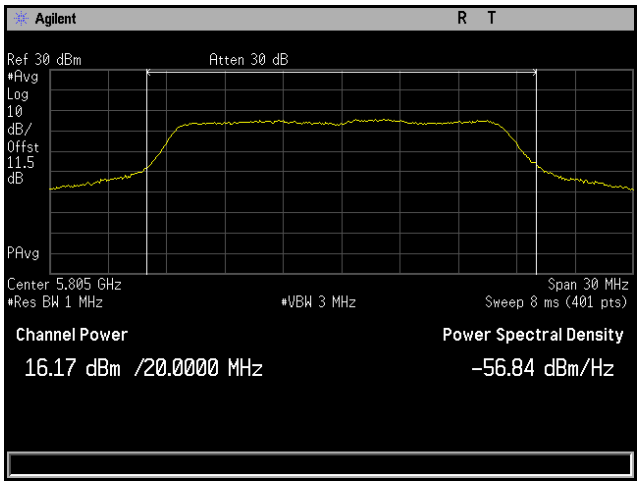

Plot 86. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH2

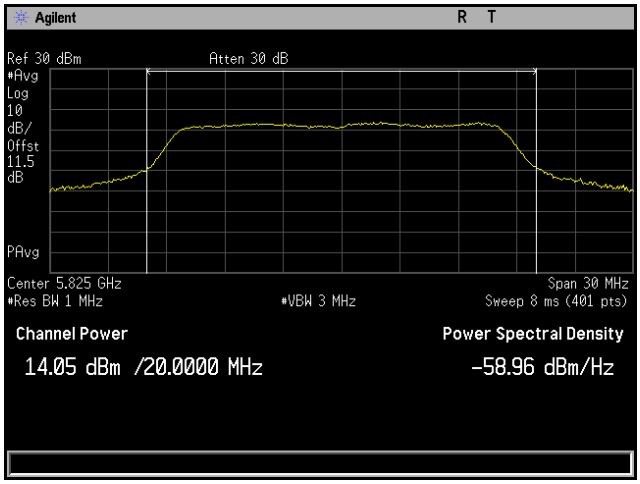

Plot 87. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH2

Conducted Output Power, 802.11a, 6x8, CH3

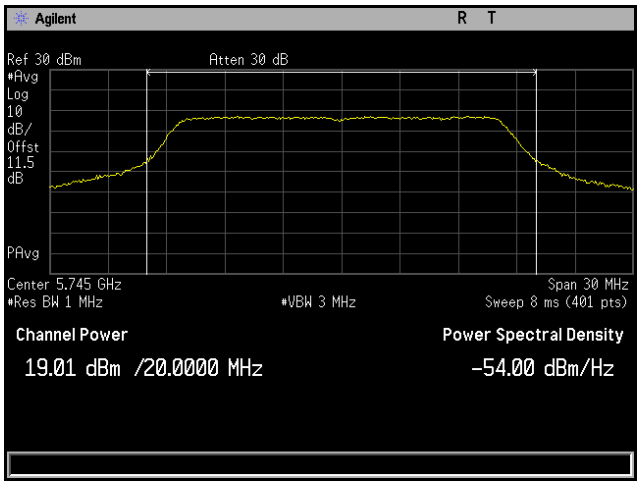

Plot 88. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH3

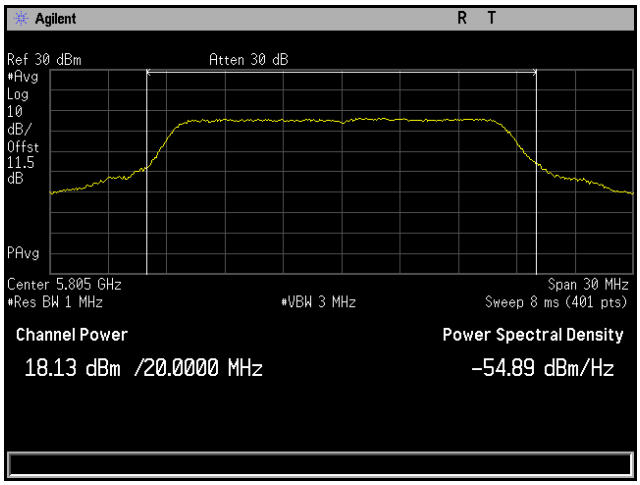

Plot 89. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH3

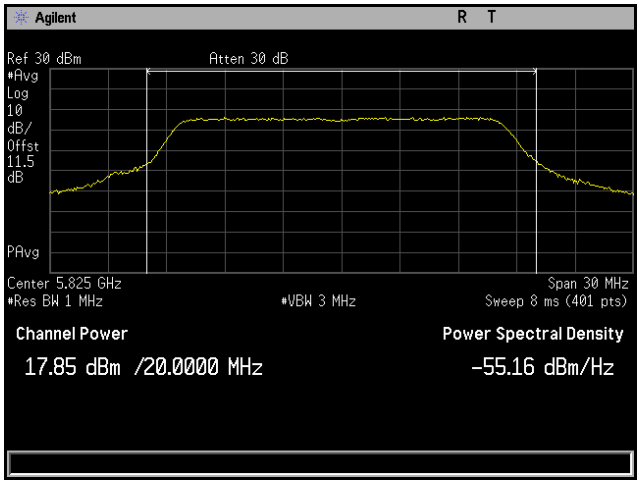

Plot 90. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH3

Conducted Output Power, 802.11a, 6x8, CH4

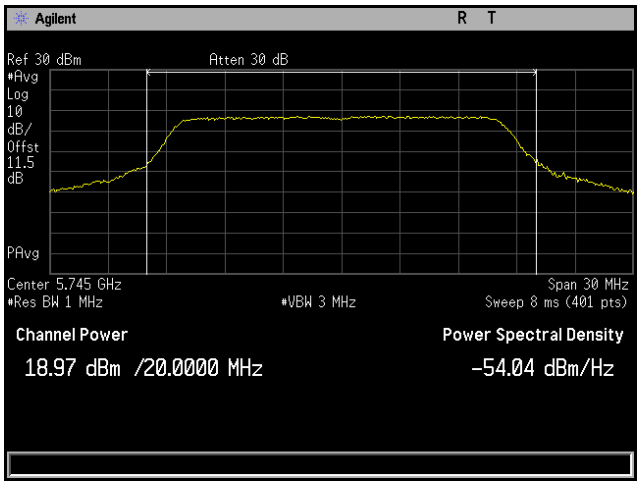

Plot 91. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH4

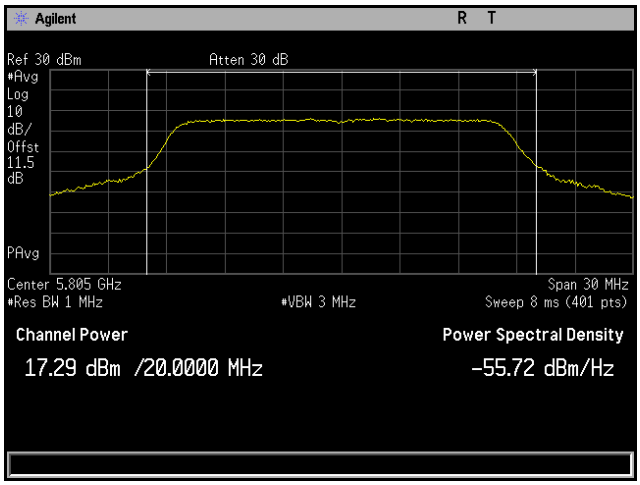

Plot 92. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH4

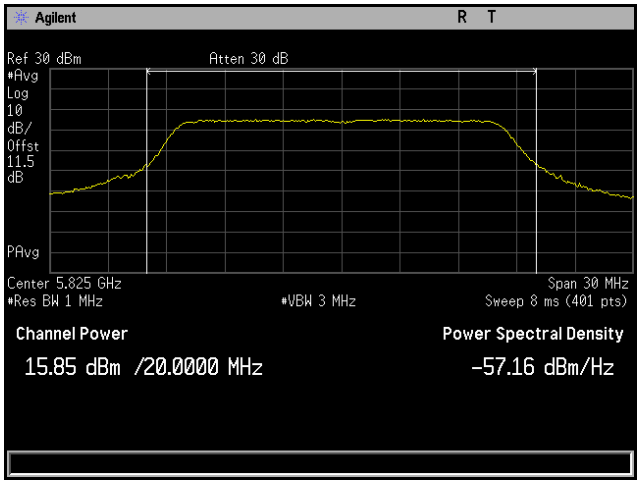

Plot 93. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH4

Conducted Output Power, 802.11a, 6x8, CH5

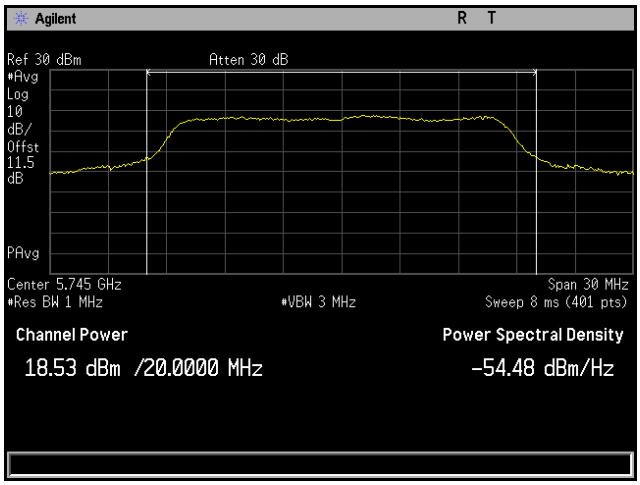

Plot 94. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH5

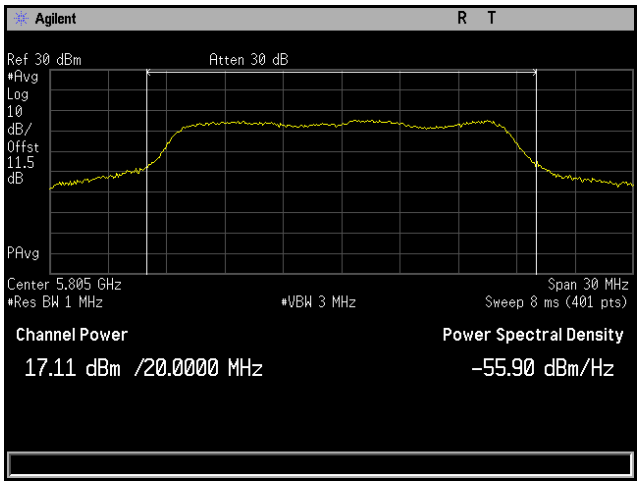

Plot 95. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH5

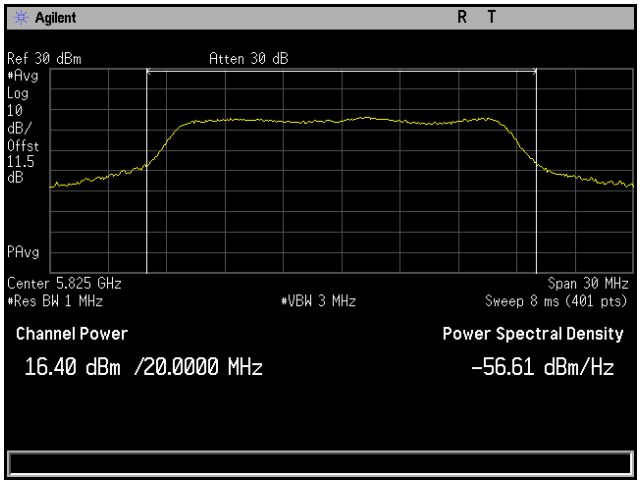

Plot 96. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH5

Conducted Output Power, 802.11a, 6x8, CH6

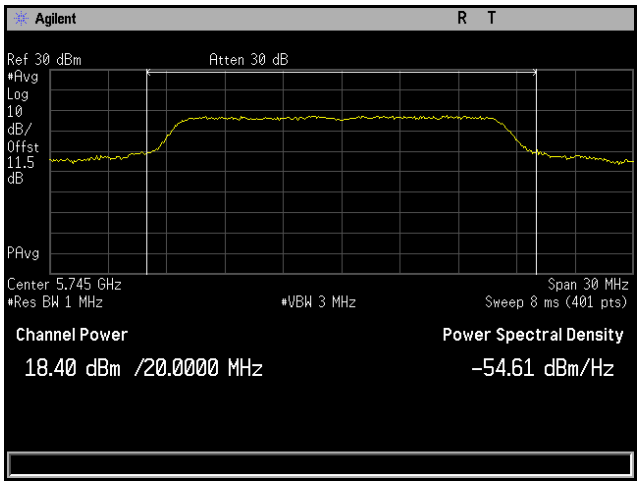

Plot 97. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH6

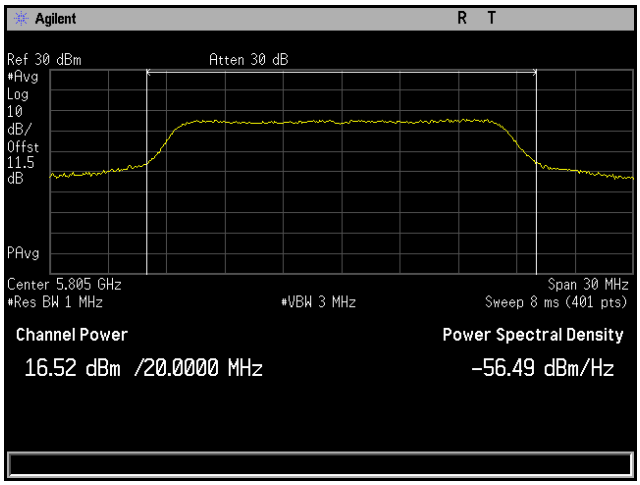

Plot 98. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH6

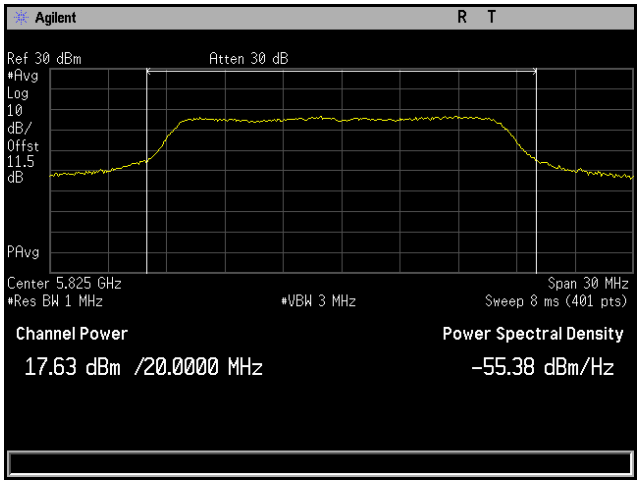

Plot 99. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH6

Conducted Output Power, 802.11a, 6x8, CH7

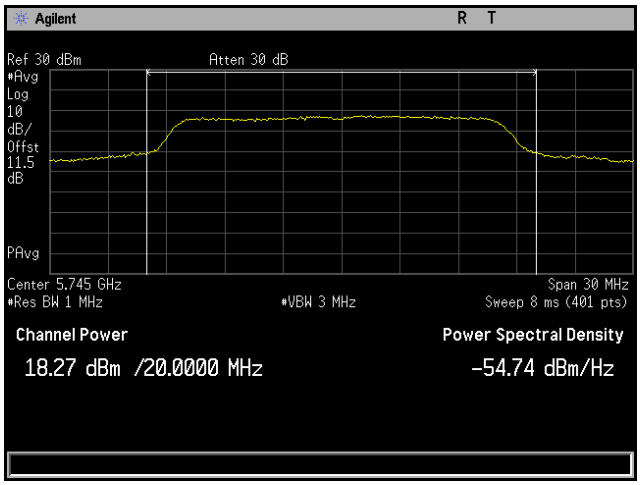

Plot 100. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH7

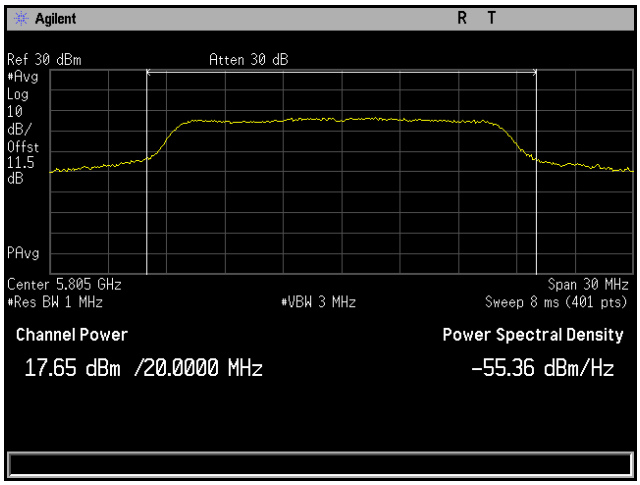

Plot 101. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH7

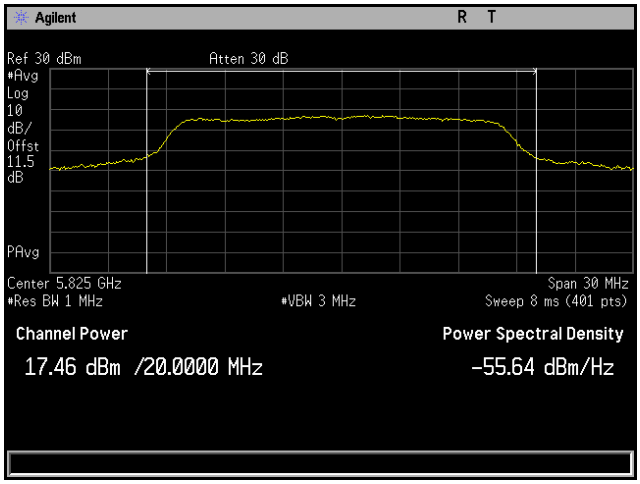

Plot 102. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH7

Conducted Output Power, 802.11ac 20 MHz, 6x8, CH2

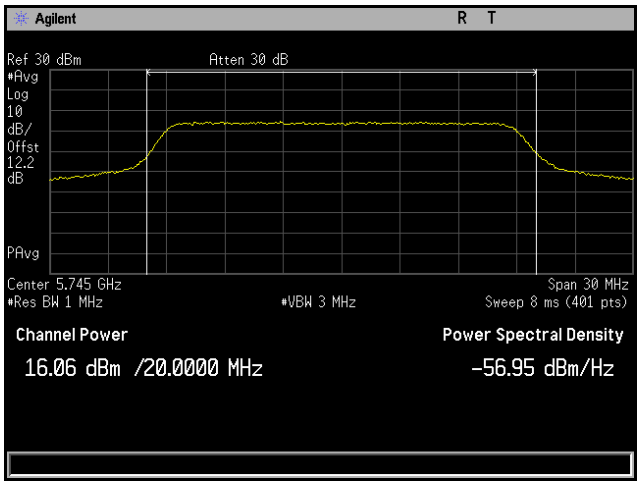

Plot 103. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH2

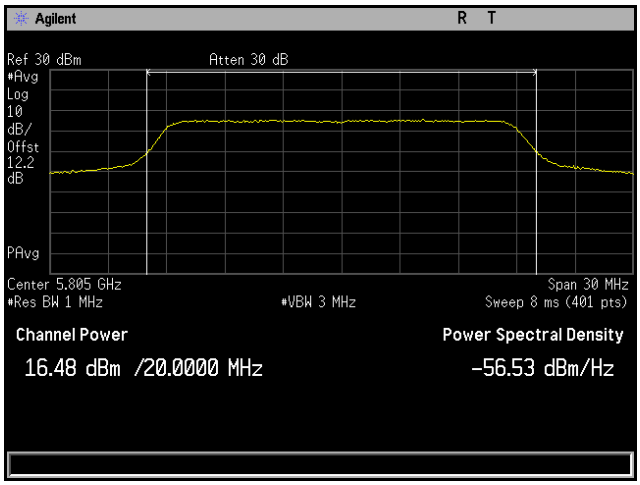

Plot 104. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH2

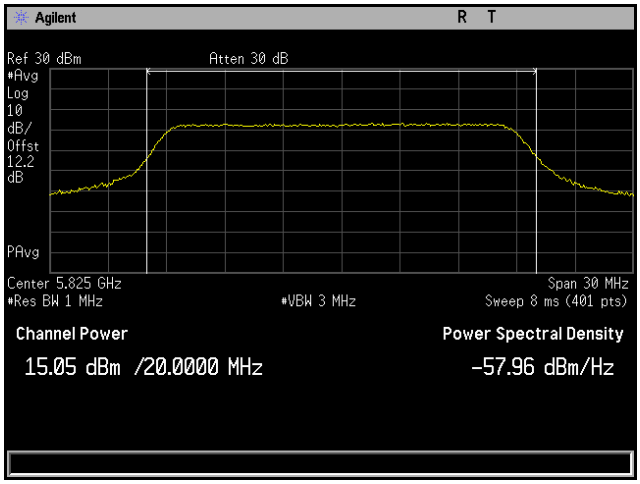

Plot 105. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH2

Conducted Output Power, 802.11ac 20 MHz, 6x8, CH3

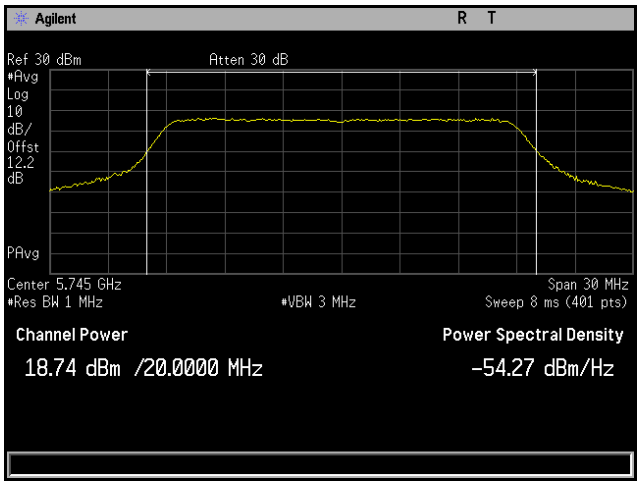

Plot 106. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH3

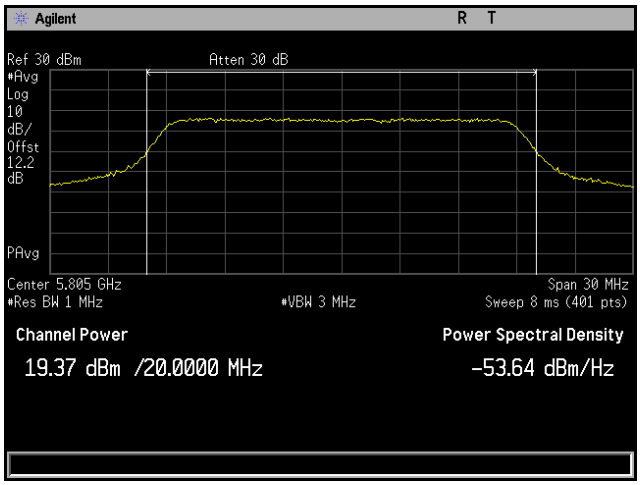

Plot 107. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH3

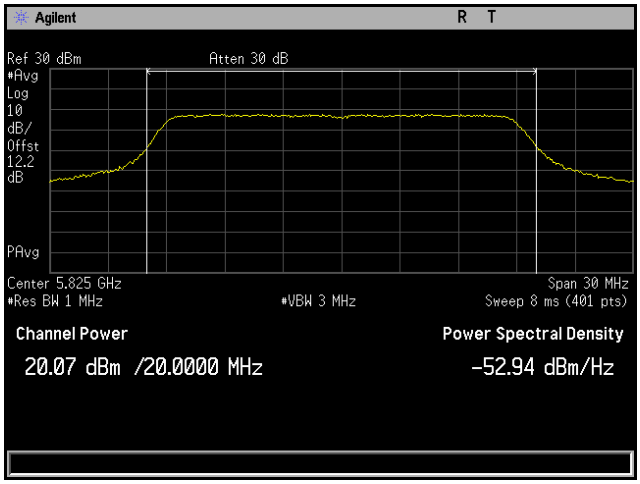

Plot 108. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11ac 20 MHz, 6x8, CH4

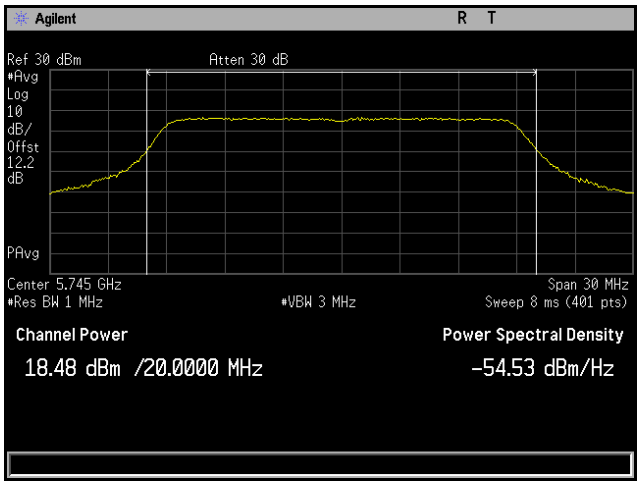

Plot 109. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH4

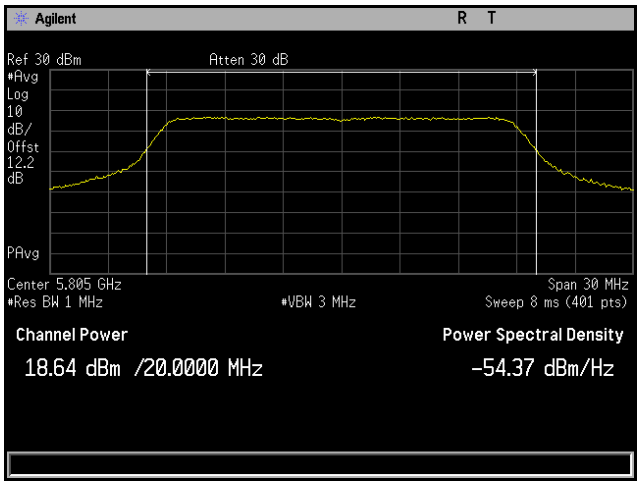

Plot 110. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH4

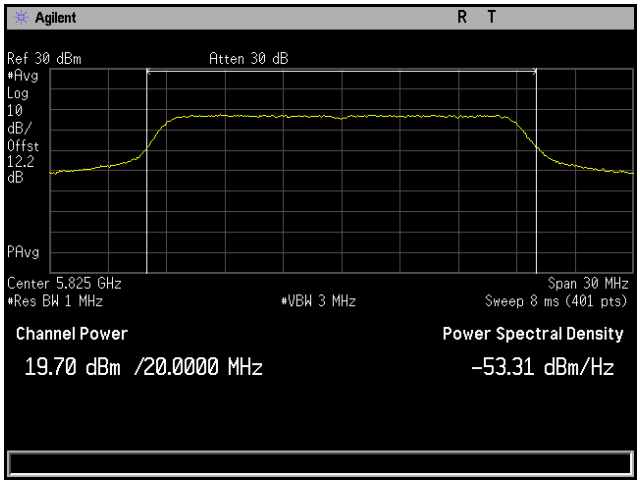

Plot 111. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11ac 20 MHz, 6x8, CH5

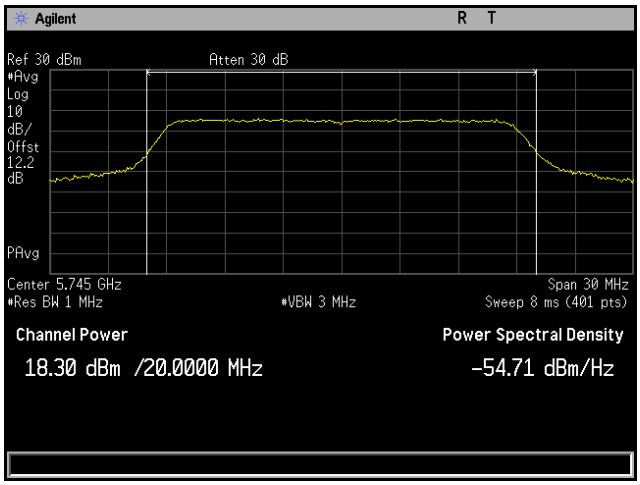

Plot 112. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH5

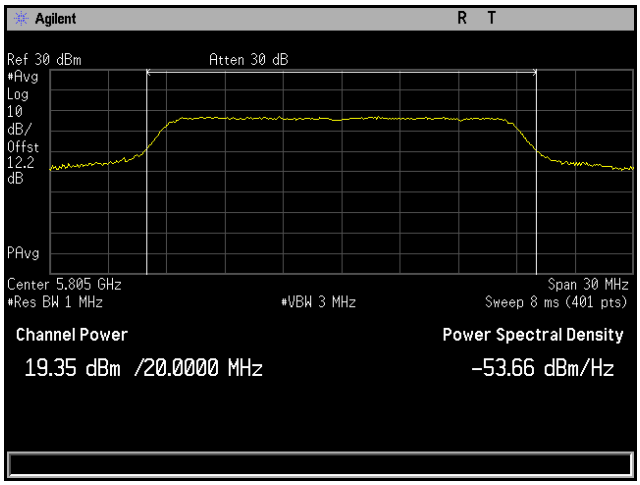

Plot 113. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH5

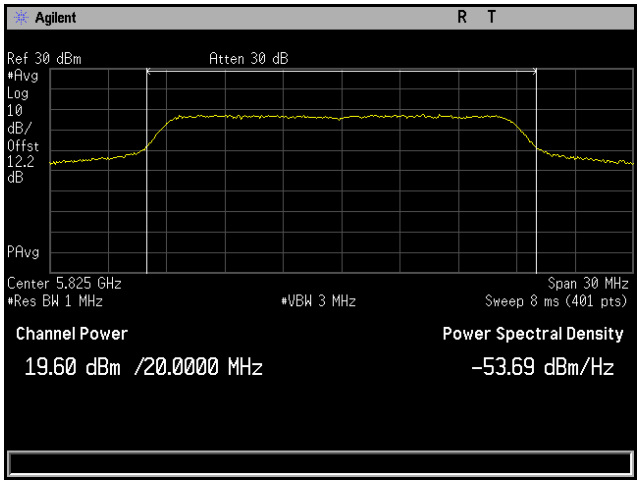

Plot 114. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11ac 20 MHz, 6x8, CH6

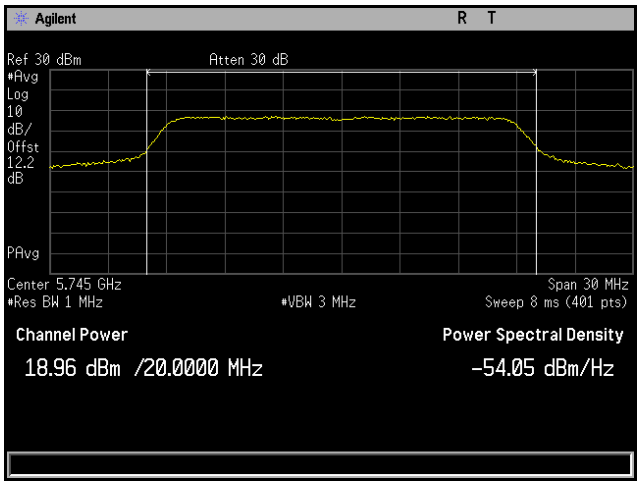

Plot 115. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH6

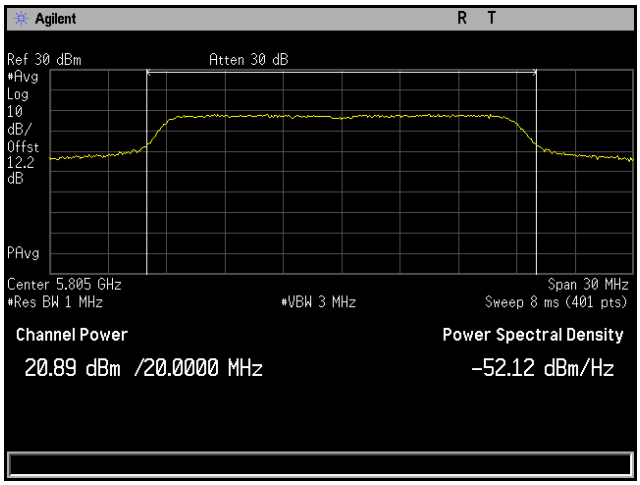

Plot 116. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH6

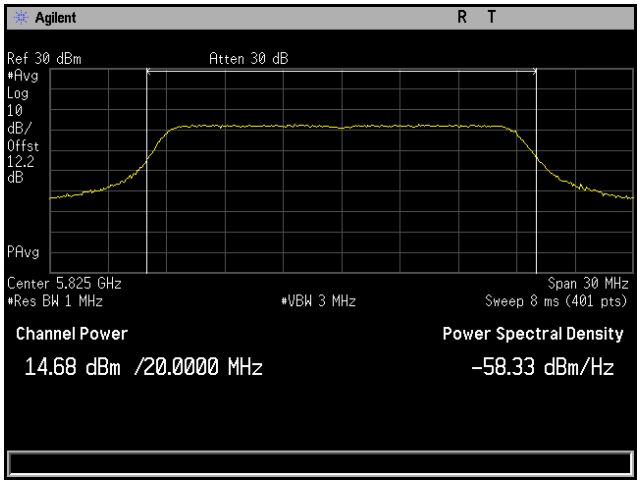

Plot 117. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11ac 20 MHz, 6x8, CH7

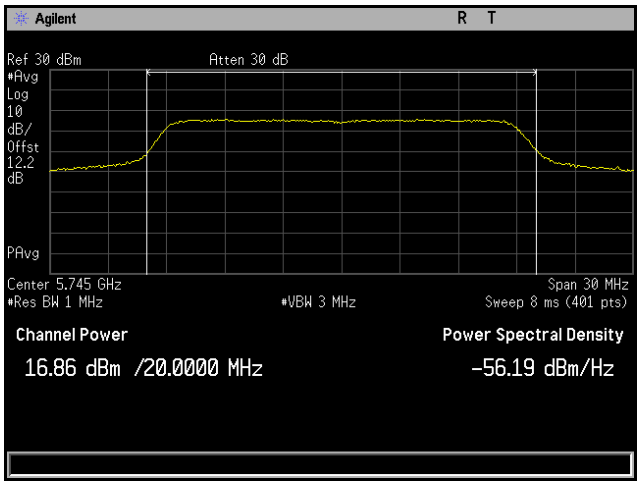

Plot 118. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH7

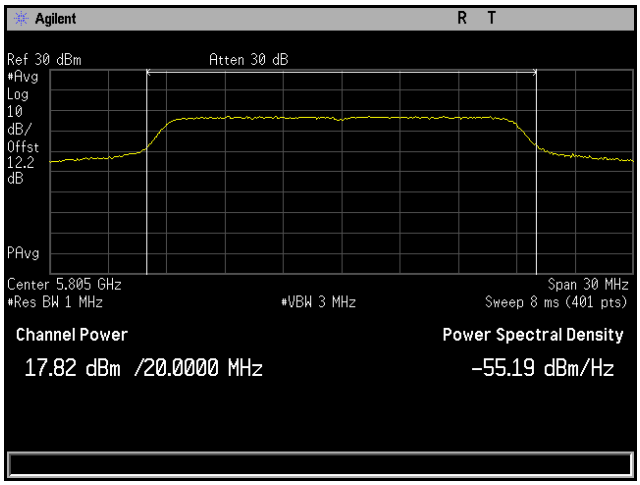

Plot 119. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH7

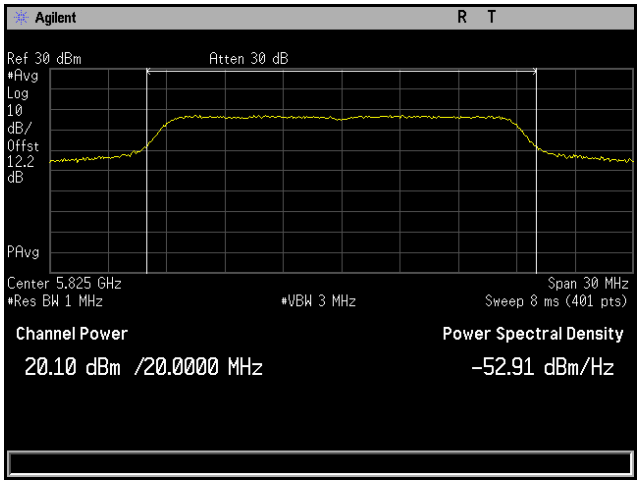

Plot 120. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH7

Conducted Output Power, 802.11ac 40 MHz, 6x8, CH2

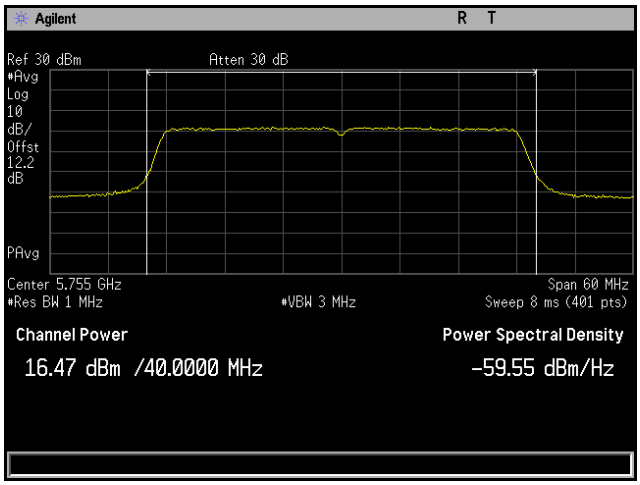

Plot 121. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH2

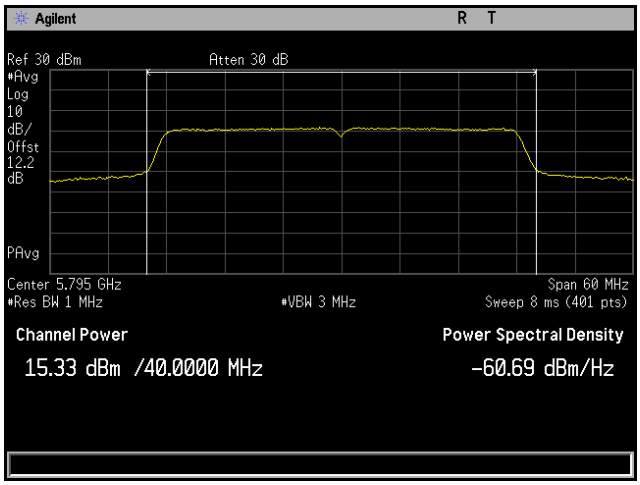

Plot 122. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH2

Conducted Output Power, 802.11ac 40 MHz, 6x8, CH3

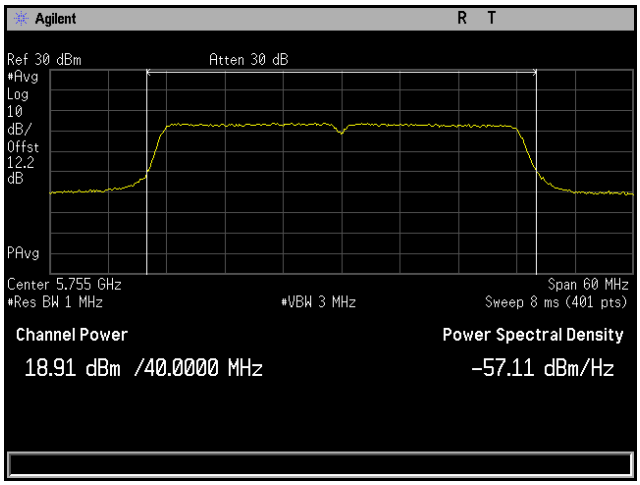

Plot 123. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH3

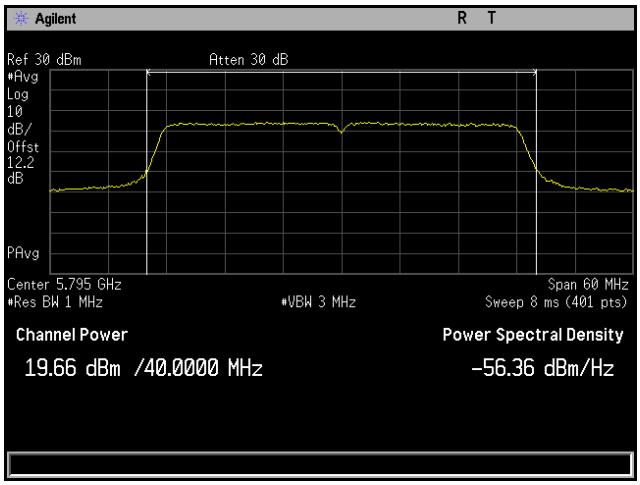

Plot 124. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11ac 40 MHz, 6x8, CH4

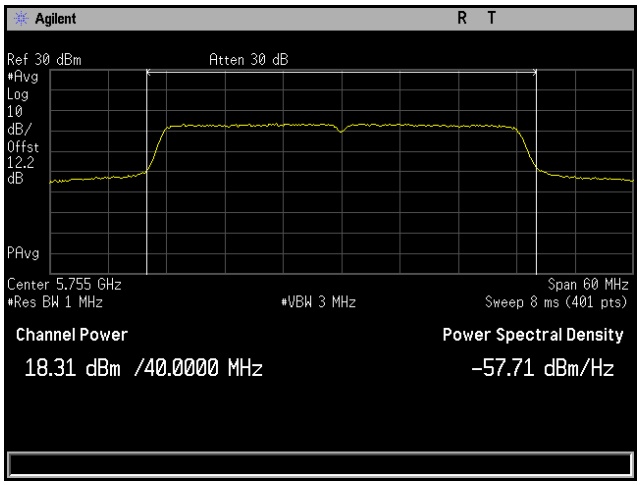

Plot 125. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH4

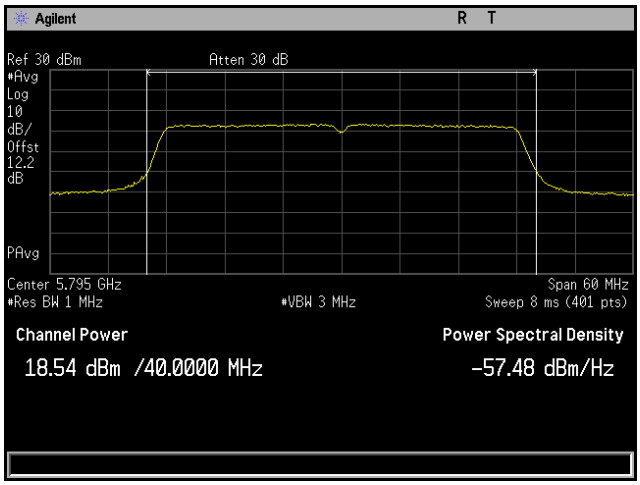

Plot 126. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11ac 40 MHz, 6x8, CH5

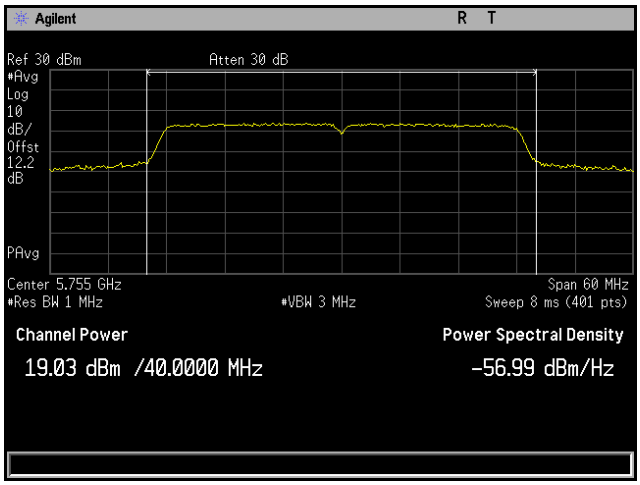

Plot 127. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH5

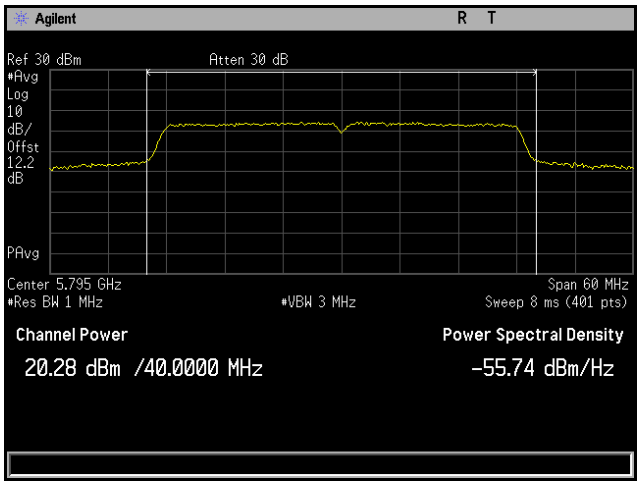

Plot 128. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11ac 40 MHz, 6x8, CH6

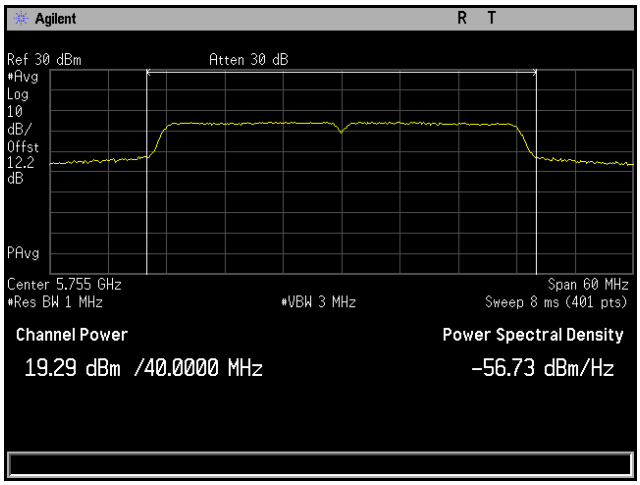

Plot 129. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH6

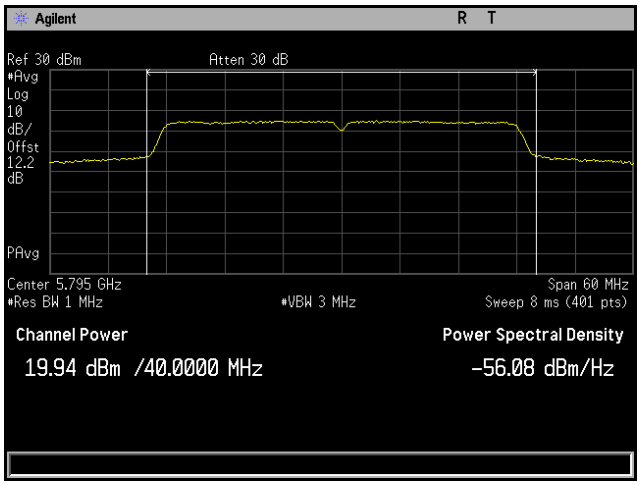

Plot 130. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11ac 40 MHz, 6x8, CH7

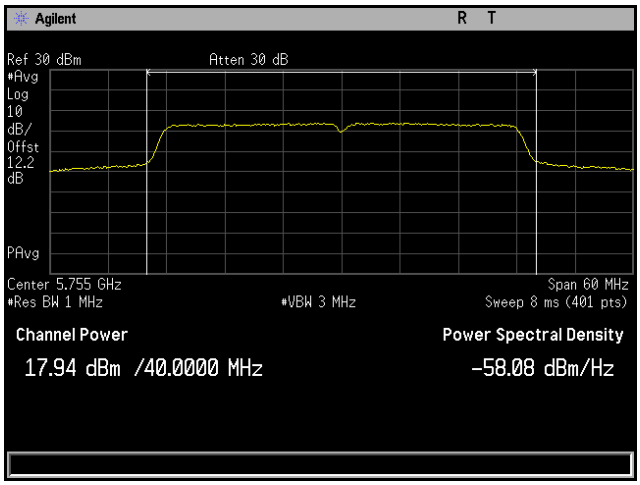

Plot 131. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH7

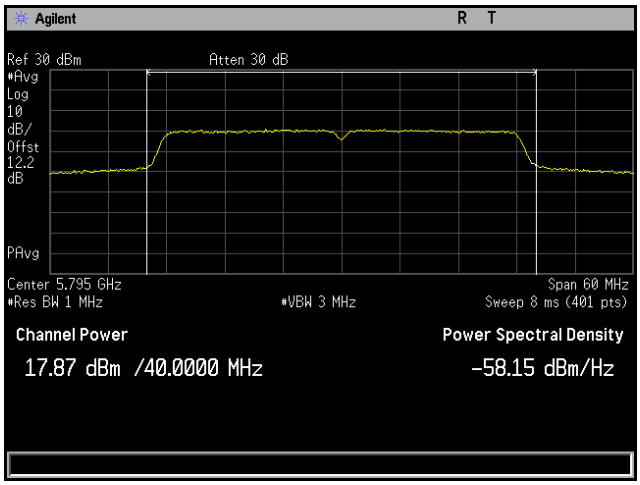

Plot 132. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH7

Conducted Output Power, 802.11ac 80 MHz, 6x8, CH2

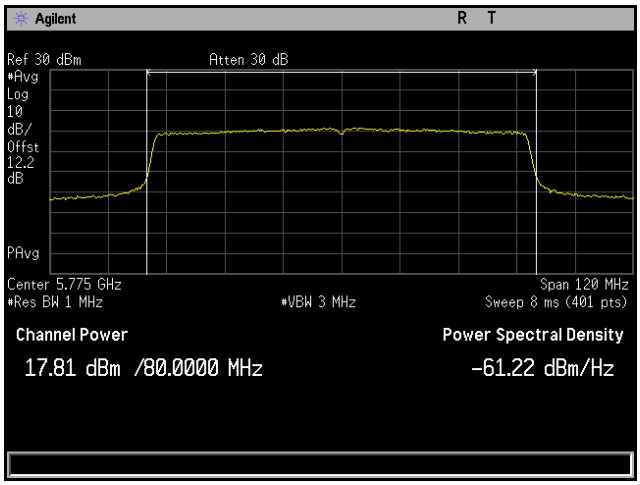

Plot 133. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH2

Conducted Output Power, 802.11ac 80 MHz, 6x8, CH3

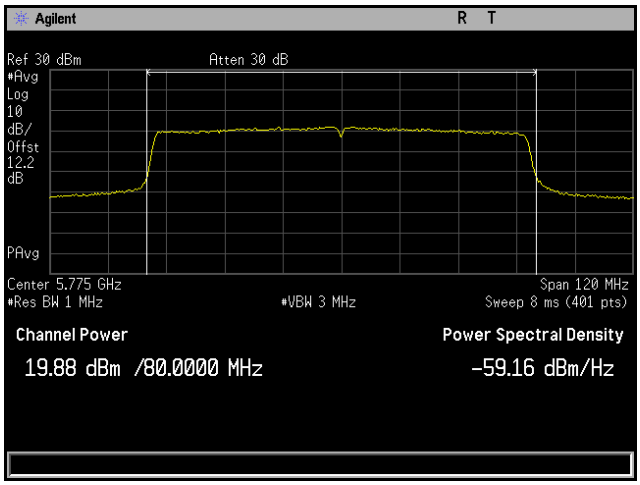

Plot 134. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11ac 80 MHz, 6x8, CH4

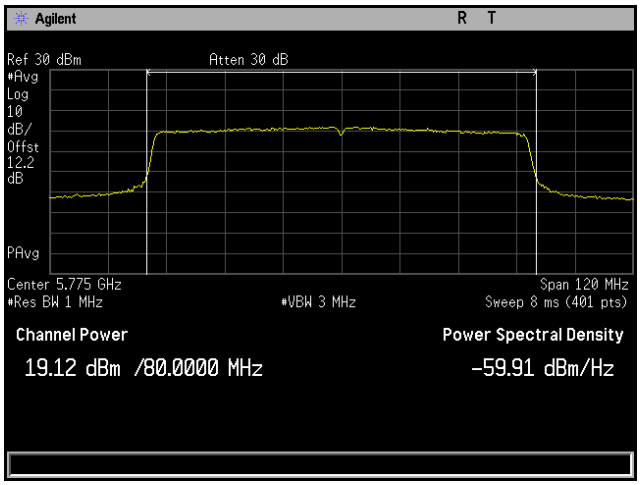

Plot 135. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11ac 80 MHz, 6x8, CH5

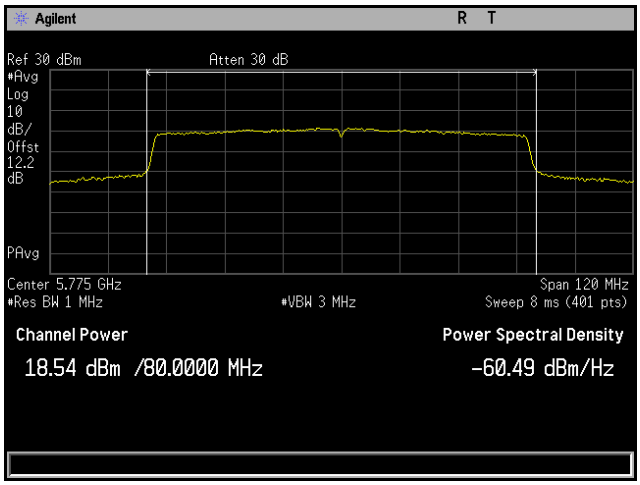

Plot 136. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11ac 80 MHz, 6x8, CH6

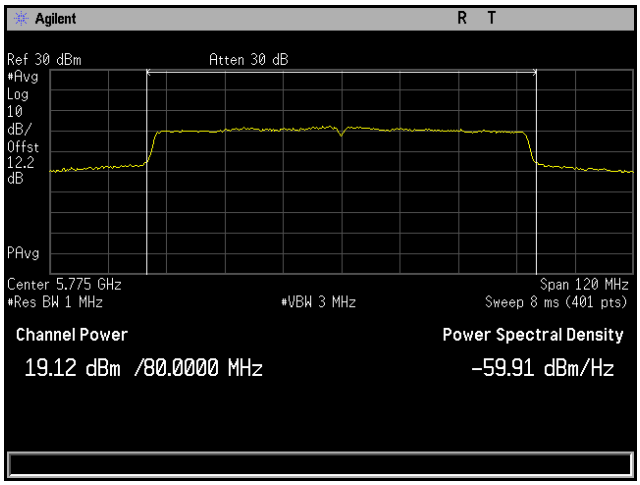

Plot 137. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11ac 80 MHz, 6x8, CH7

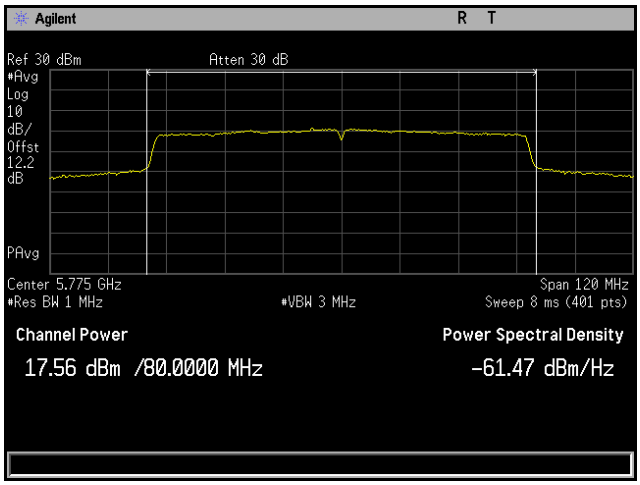

Plot 138. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH7

Conducted Output Power, 802.11n 20 MHz, 6x8, CH2

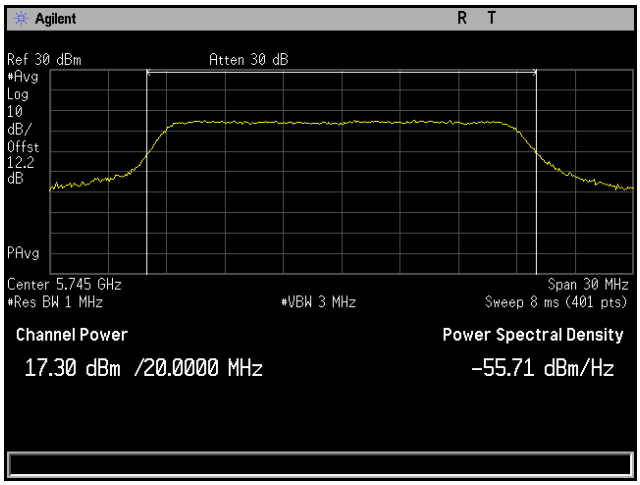

Plot 139. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH2

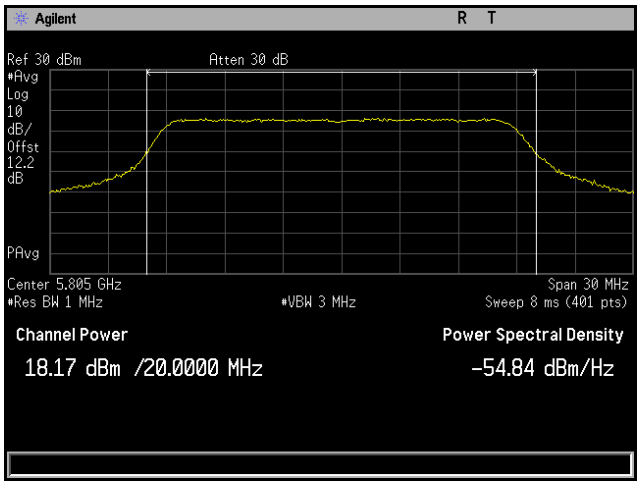

Plot 140. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH2

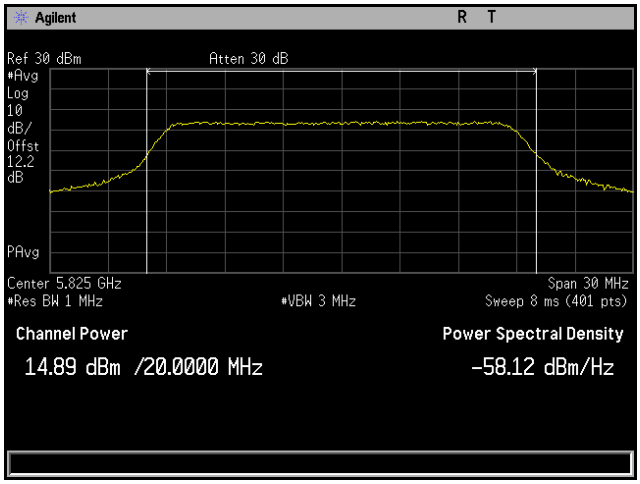

Plot 141. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH2

Conducted Output Power, 802.11n 20 MHz, 6x8, CH3

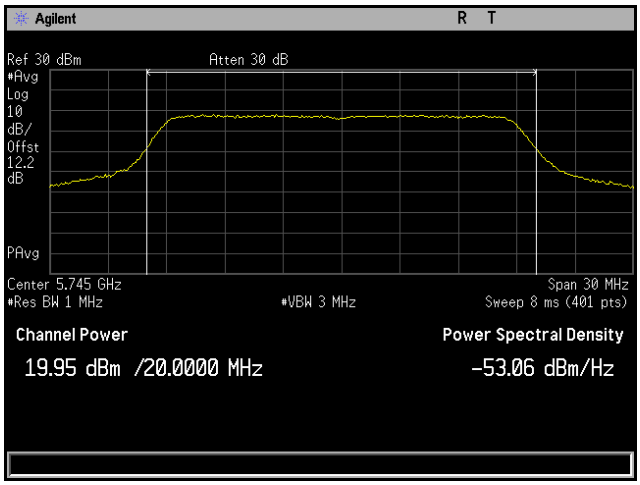

Plot 142. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH3

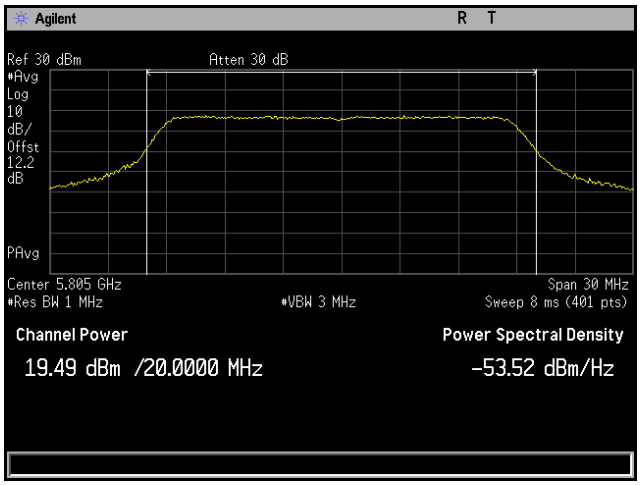

Plot 143. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH3

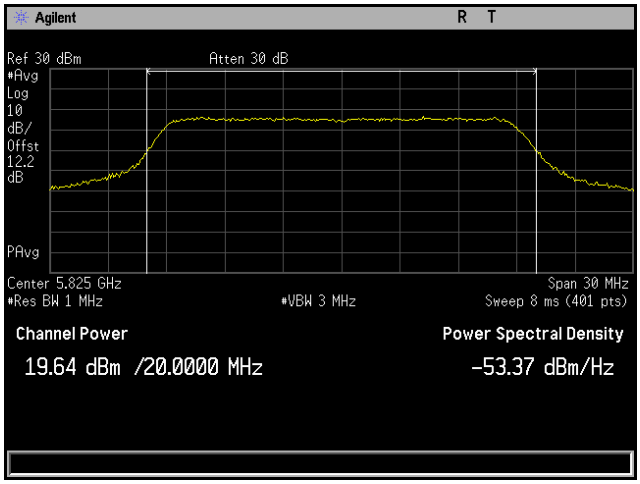

Plot 144. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11n 20 MHz, 6x8, CH4

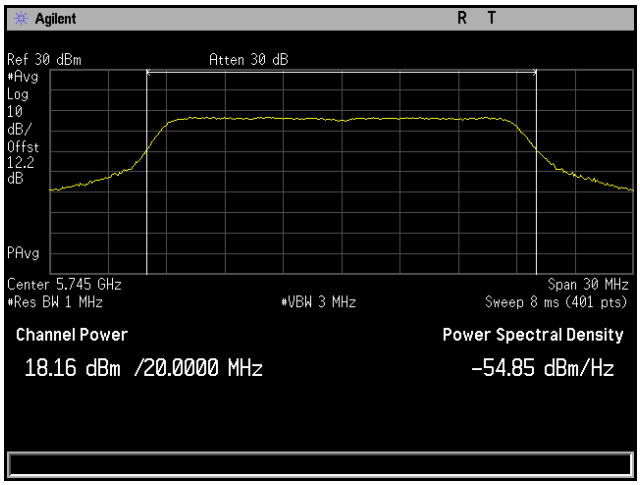

Plot 145. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH4

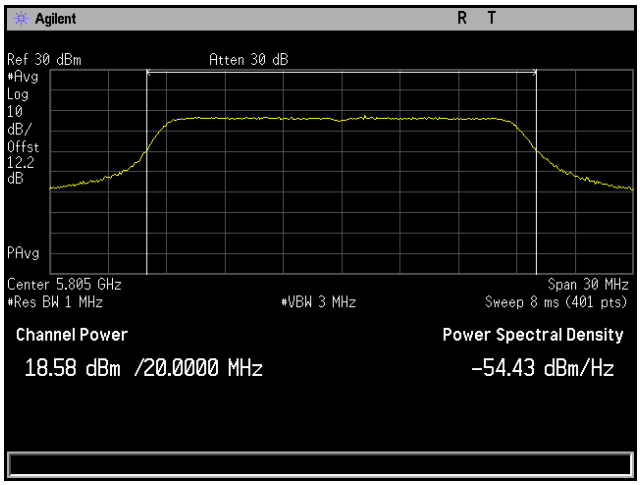

Plot 146. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH4

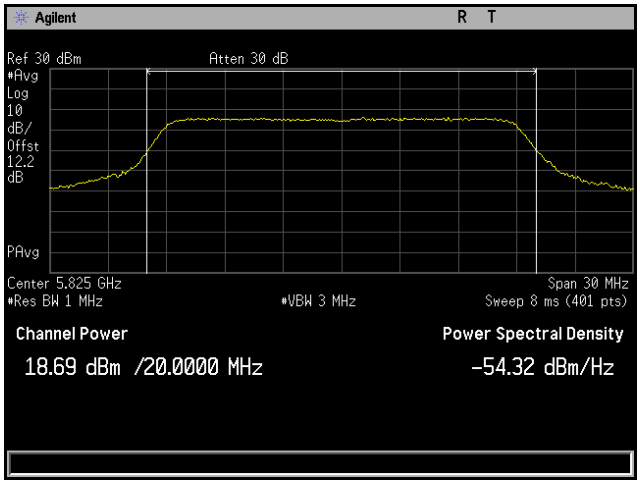

Plot 147. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11n 20 MHz, 6x8, CH5

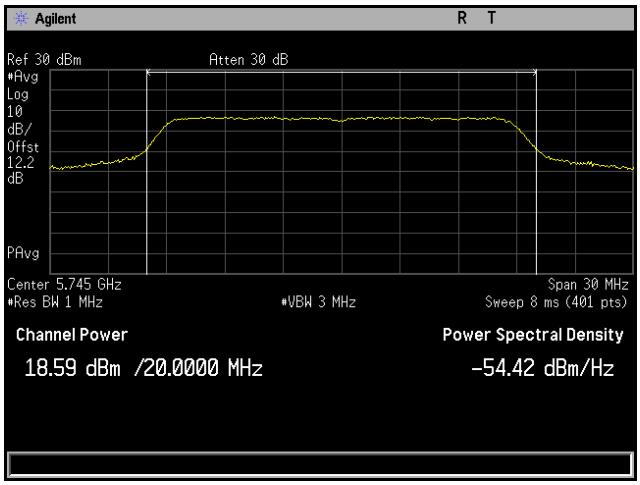

Plot 148. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH5

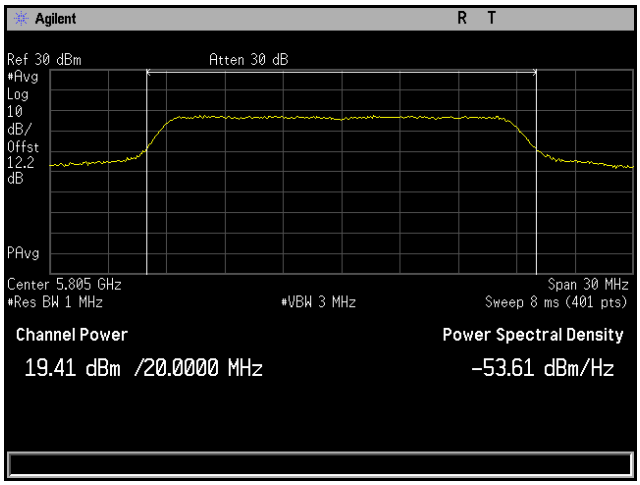

Plot 149. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH5

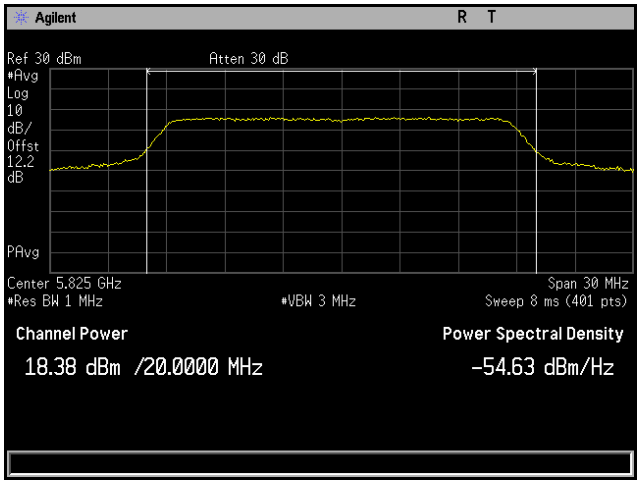

Plot 150. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11n 20 MHz, 6x8, CH6

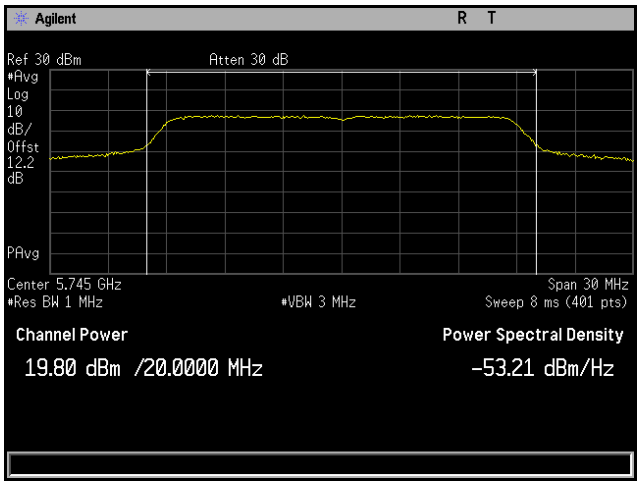

Plot 151. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH6

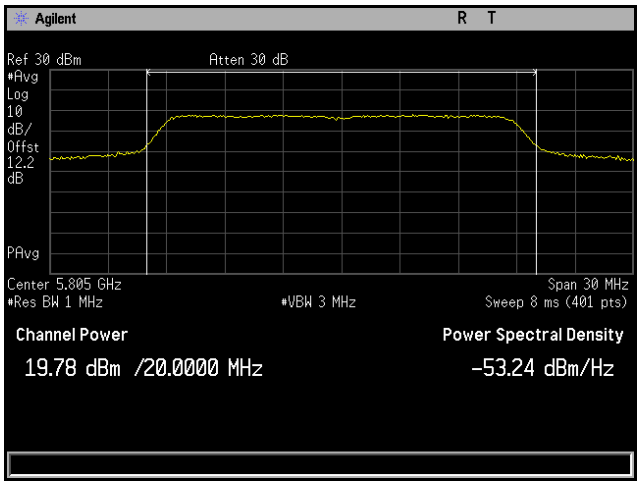

Plot 152. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH6

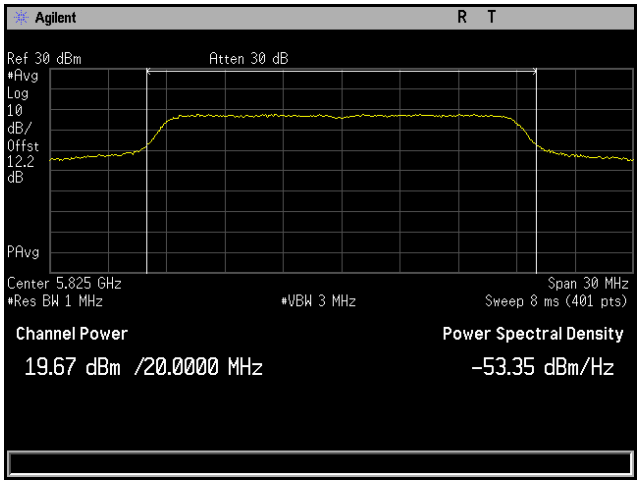

Plot 153. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11n 20 MHz, 6x8, CH7

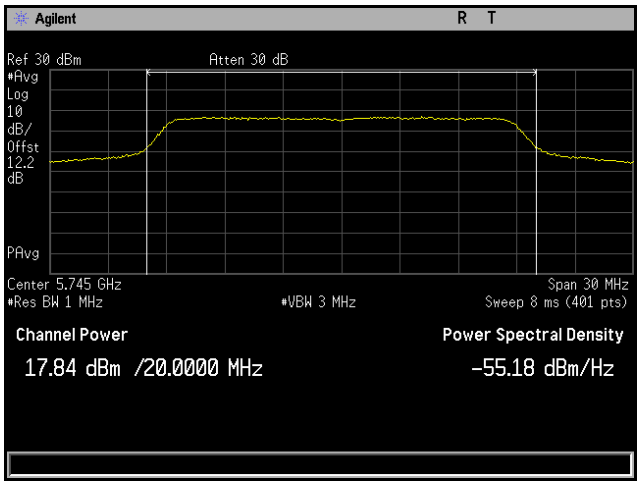

Plot 154. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH7

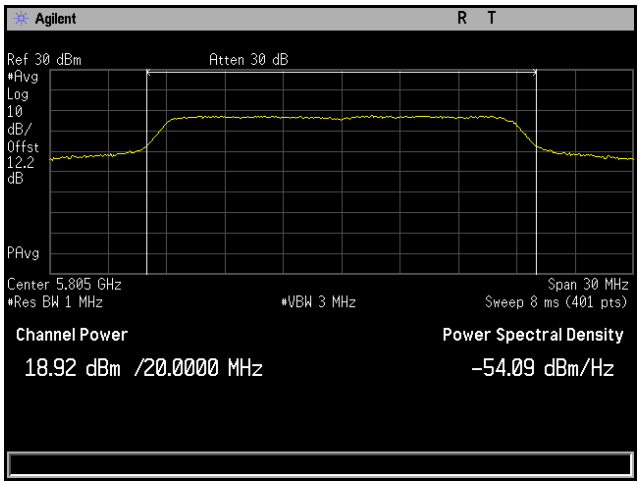

Plot 155. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH7

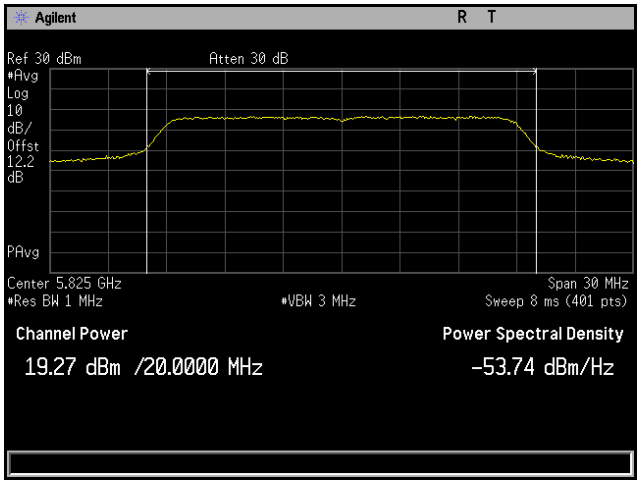

Plot 156. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH7

Conducted Output Power, 802.11n 40 MHz, 6x8, CH2

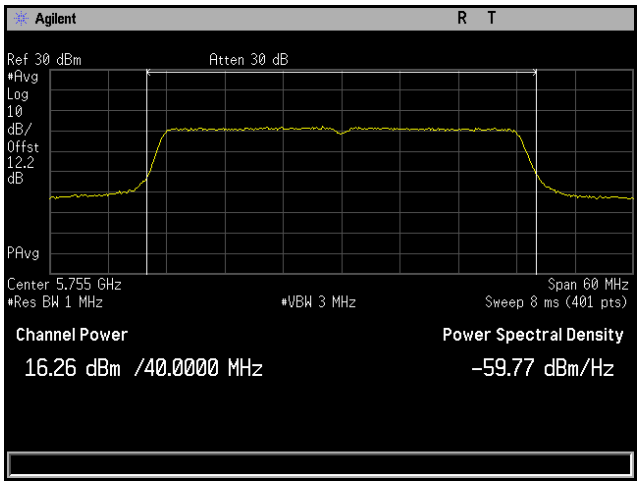

Plot 157. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH2

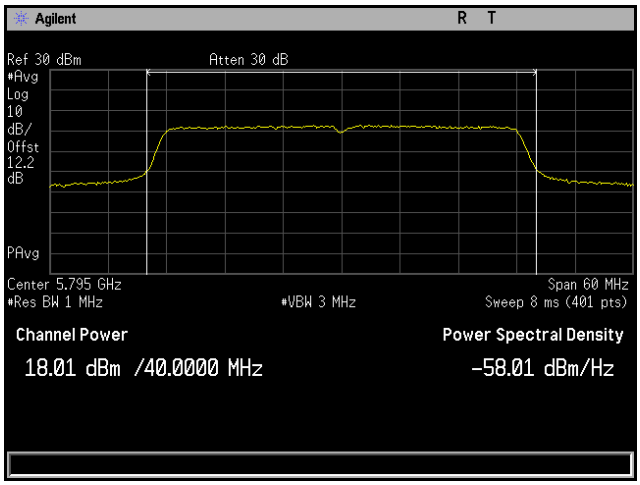

Plot 158. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH2

Conducted Output Power, 802.11n 40 MHz, 6x8, CH3

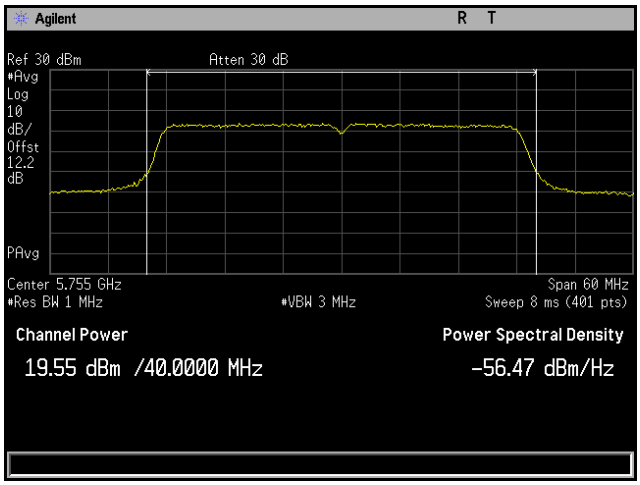

Plot 159. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH3

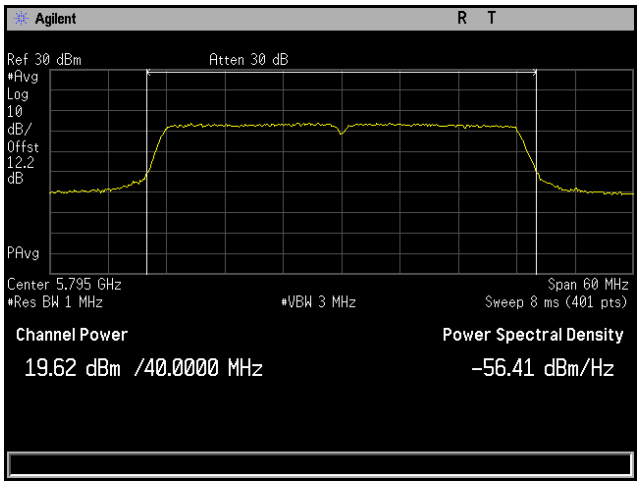

Plot 160. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH3

Conducted Output Power, 802.11n, 6x8, CH4

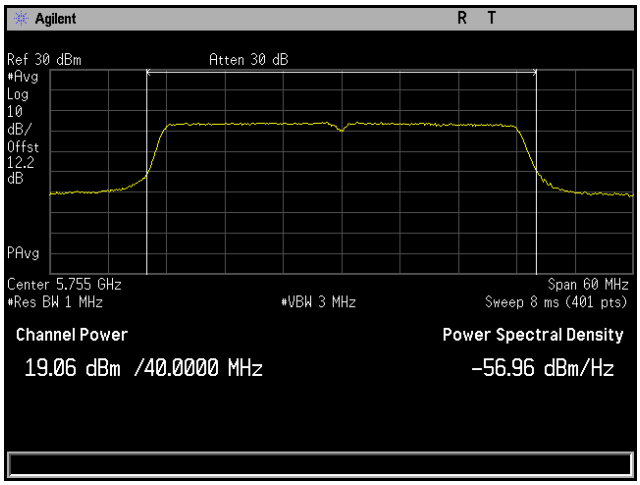

Plot 161. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH4

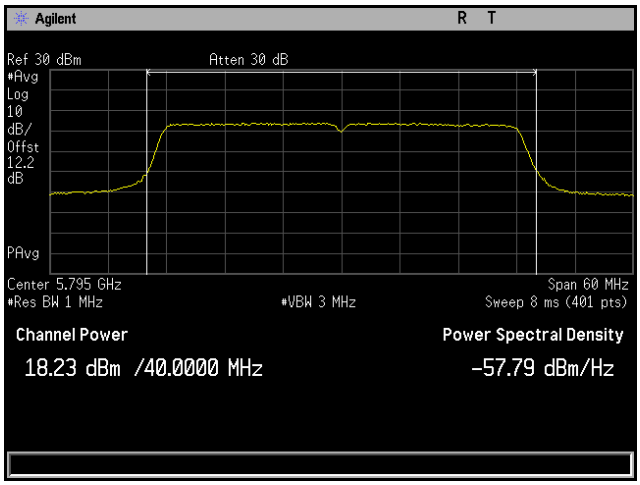

Plot 162. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH4

Conducted Output Power, 802.11n, 6x8, CH5

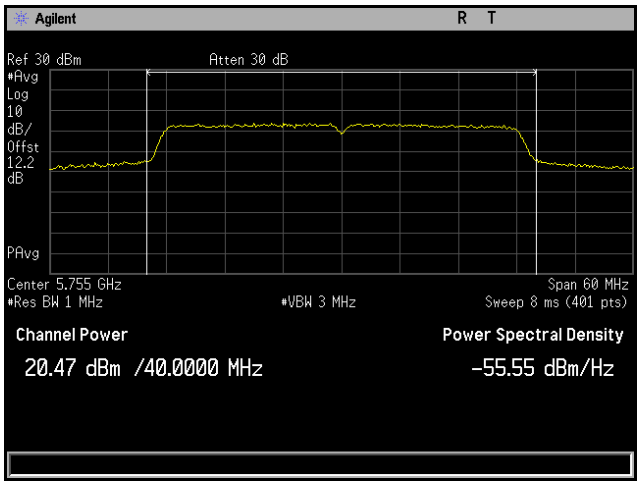

Plot 163. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH5

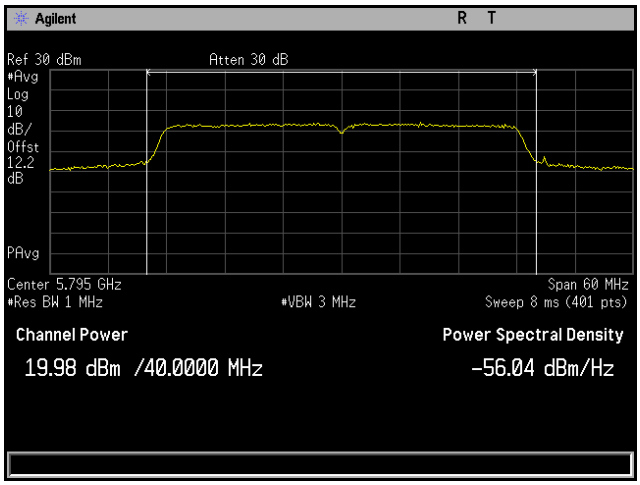

Plot 164. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH5

Conducted Output Power, 802.11n, 6x8, CH6

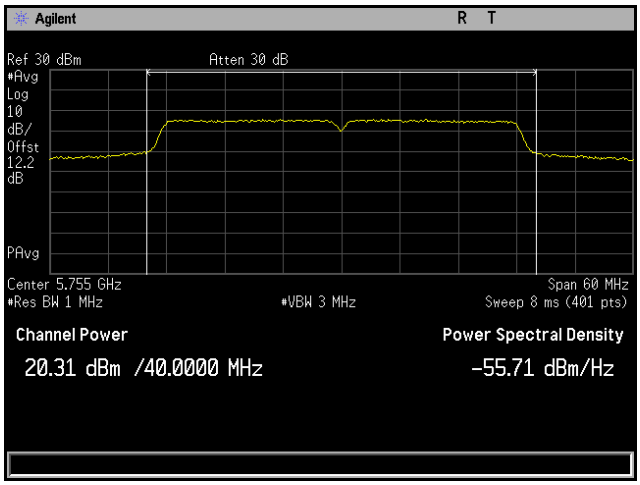

Plot 165. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH6

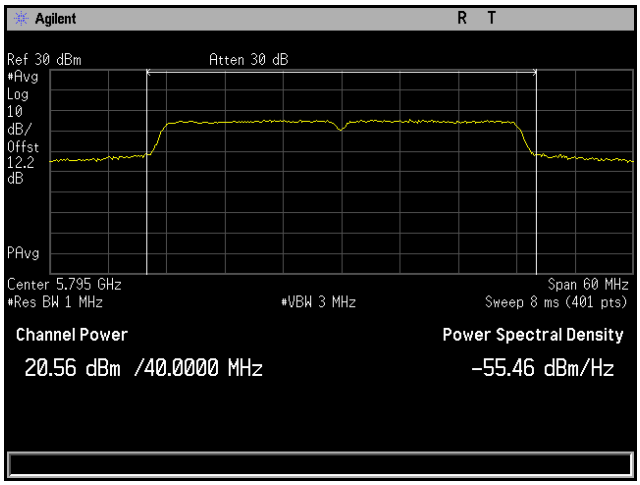

Plot 166. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH6

Conducted Output Power, 802.11n, 6x8, CH7

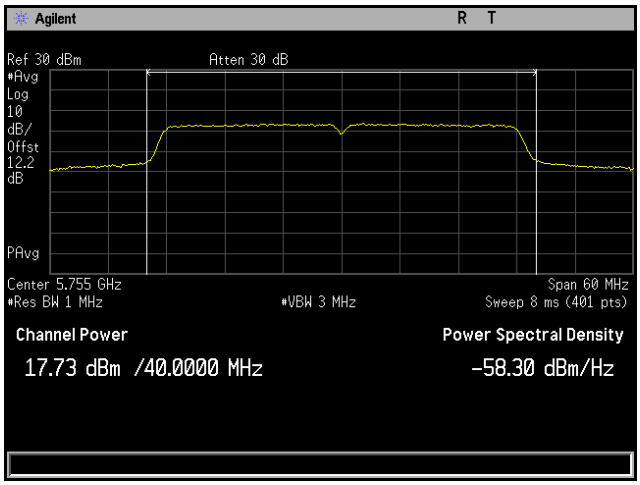

Plot 167. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH7

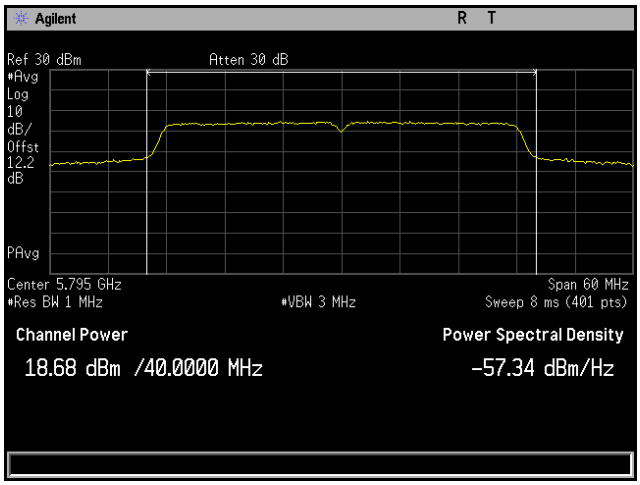

Plot 168. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH7

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(3) Maximum Power Spectral Density

Test Requirements: **§15.407(a)(3):** In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.
If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

Test Procedure: The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v01. A 1 MHz RBW was used during testing, as this provides a worst-case scenario.

The unit was placed in MIMO configuration.
The directional gain presented in the measured composite gain of all antennas.
A modified sample, having coaxial pigtails in place of the antenna, was used for testing.

Test Results: The EUT as tested is compliant with the requirements of this section.

Test Engineer(s): Hadid Jones

Test Date(s): 08/21/16



4x8											
Center Frequency	**Bandwidth**	**Mode**	**Port 3 (dBm)**	**Port 4 (dBm)**	**Port 5 (dBm)**	**Port 6 (dBm)**	**Sum of Ports**	**Limit (dBm)**	**Antenna Gain (dBi)**	**Final limit (dBm)**	**Margin dB**
Ch 5745M	BW 20M	a mode	5.92	7.25	8.08	8.86	13.69	30	6.1	29.9	-16.21
Ch 5745M	BW 20M	ac mode	8.38	6.5	6.43	8.17	13.49	30	6.1	29.9	-16.41
Ch 5745M	BW 20M	n mode	6.59	6.16	7	7.74	12.94	30	6.1	29.9	-16.96
Ch 5805M	BW 20M	a mode	8.18	6.56	8.32	7.31	13.67	30	6.1	29.9	-16.23
Ch 5805M	BW 20M	ac mode	8.72	6.36	5.87	7.18	13.2	30	6.1	29.9	-16.7
Ch 5805M	BW 20M	n mode	6.84	7.2	5.91	7.16	12.83	30	6.1	29.9	-17.07
Ch 5825M	BW 20M	a mode	7.38	6.33	5.78	7.53	12.84	30	6.1	29.9	-17.06
Ch 5825M	BW 20M	ac mode	6.54	7.16	6.05	7.38	12.84	30	6.1	29.9	-17.06
Ch 5825M	BW 20M	n mode	6.45	6.16	6.91	7.6	12.84	30	6.1	29.9	-17.06
Ch 5755M	BW 40M	ac mode	4.827	4.32	4.64	5.51	10.87	30	6.1	29.9	-19.03
Ch 5755M	BW 40M	n mode	3.98	3.1	4.4	4.99	10.2	30	6.1	29.9	-19.7
Ch 5795M	BW 40M	ac mode	5.17	4.36	4.95	6.97	11.5	30	6.1	29.9	-18.4
Ch 5795M	BW 40M	n mode	4.71	3.27	4.74	5.94	10.79	30	6.1	29.9	-19.11
Ch 5775M	BW 80M	ac mode	1.64	0.68	-0.007	0.972	6.89	30	6.1	29.9	-23.01

Table 11. Power Spectral Density, Test Results, 4x8

6x8													
Center Frequency	**Bandwidth**	**Mode**	**Port 2 (dBm)**	**Port 3 (dBm)**	**Port 4 (dBm)**	**Port 5 (dBm)**	**Port 6 (dBm)**	**Port 7 (dBm)**	**Sum of Ports**	**Limit (dBm)**	**Antenna Gain (dBi)**	**Final limit**	**Margin dB**
Ch 5745M	BW 20M	a mode	5.06	6.68	6.68	8.57	7.33	8.22	15.02	30	6.8	29.2	-14.18
Ch 5745M	BW 20M	ac mode	3.46	5.23	6.32	4.33	5.11	4.49	12.7	30	6.8	29.2	-16.5
Ch 5745M	BW 20M	n mode	6.1	5.95	6.21	6.34	7.95	5.53	14.21	30	6.8	29.2	-14.99
Ch 5805M	BW 20M	a mode	3.091	6.29	5.55	5.74	5.79	7.1	13.54	30	6.8	29.2	-15.66
Ch 5805M	BW 20M	ac mode	3.91	6.82	5.91	6.61	6.6	5.94	13.85	30	6.8	29.2	-15.35
Ch 5805M	BW 20M	n mode	5.31	7.37	6.11	5.78	6.39	7.21	14.21	30	6.8	29.2	-14.99
Ch 5825M	BW 20M	a mode	4.59	6.63	6.11	5.42	5.26	8.32	14.02	30	6.8	29.2	-15.18
Ch 5825M	BW 20M	ac mode	5.76	7.09	7.19	3.94	6.48	8.07	14.39	30	6.8	29.2	-14.81
Ch 5825M	BW 20M	n mode	4.17	7.14	5.83	6.8	6.5	7.05	14.14	30	6.8	29.2	-15.06
Ch 5755M	BW 40M	ac mode	2.34	5.11	3.82	3.85	4.91	2.9	11.72	30	6.8	29.2	-17.48
Ch 5755M	BW 40M	n mode	2.57	5.37	3.99	4.89	5.65	3.37	12.23	30	6.8	29.2	-16.97
Ch 5795M	BW 40M	ac mode	2.43	2.23	2.58	4.67	4.56	3.69	11.26	30	6.8	29.2	-17.94
Ch 5795M	BW 40M	n mode	3.14	4.98	4.48	5.16	5.65	5.2	12.62	30	6.8	29.2	-16.58
Ch 5775M	BW 80M	ac mode	-2.5	-1.15	-0.9	-1.54	0.32	-0.63	6.8	30	6.8	29.2	-22.4

Table 12. Power Spectral Density, Test Results, 6x8

Power Spectral Density, 802.11a, 4x8, CH3

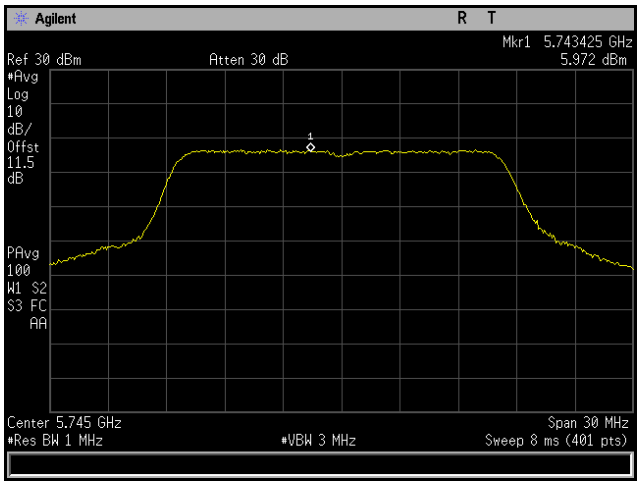

Plot 169. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH3

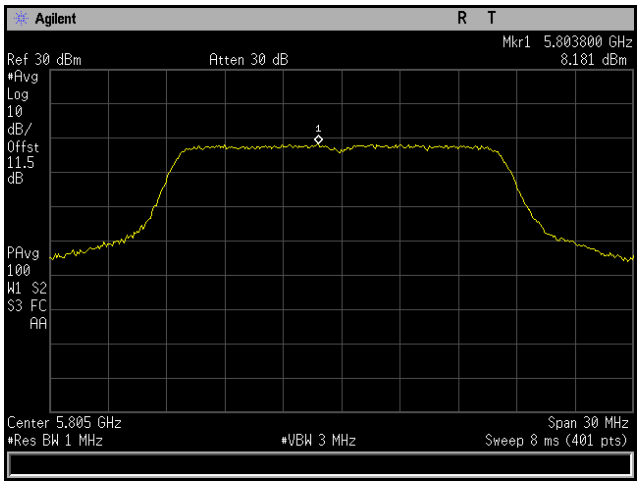

Plot 170. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH3

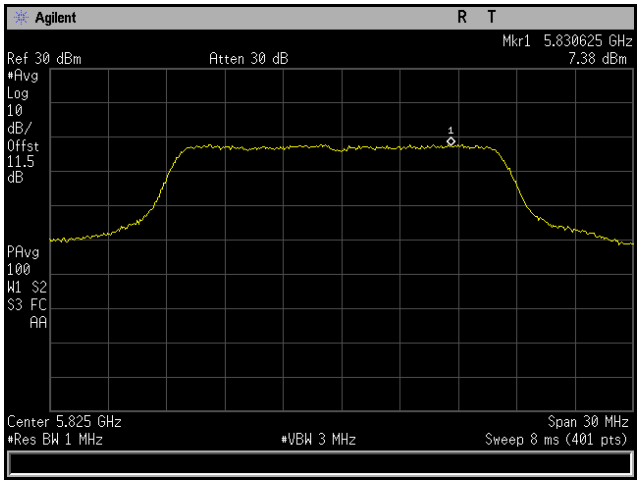

Plot 171. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH3

Power Spectral Density, 802.11a, 4x8, CH4

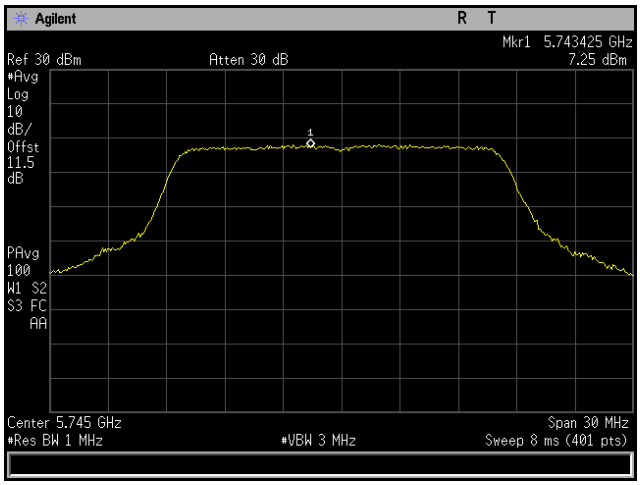

Plot 172. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH4

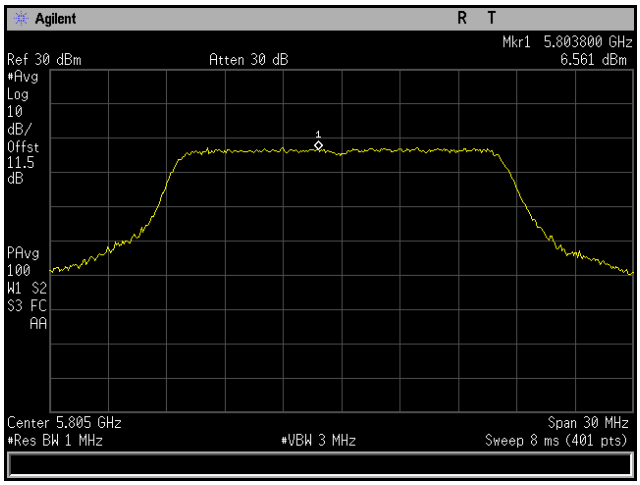

Plot 173. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH4

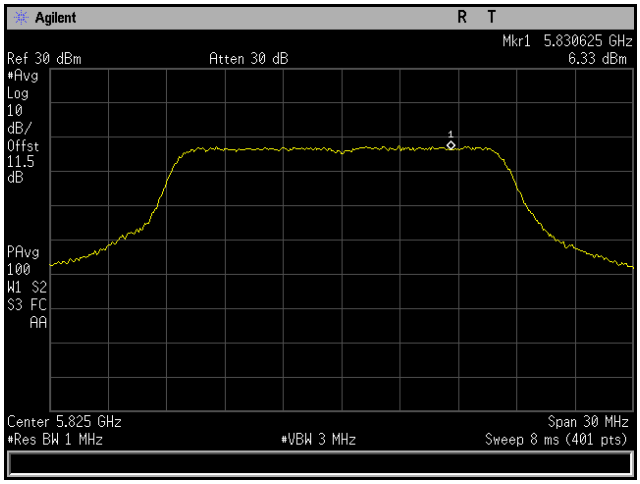

Plot 174. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH4

Power Spectral Density, 802.11a, 4x8, CH5

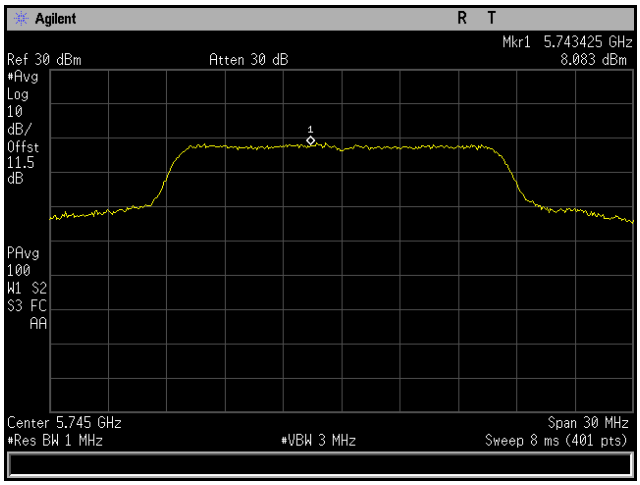

Plot 175. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH5

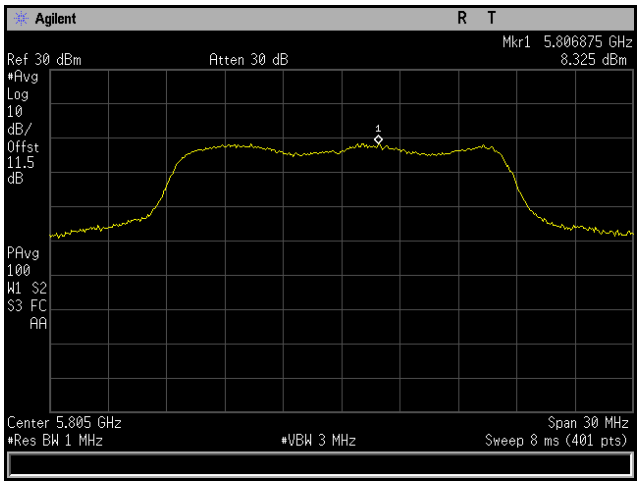

Plot 176. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH5

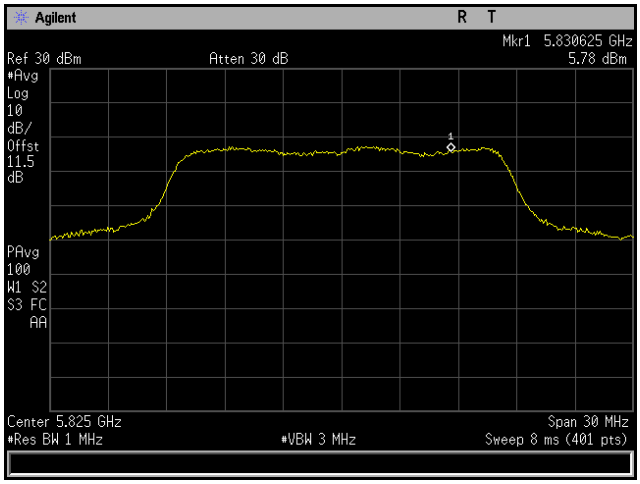

Plot 177. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH5

Power Spectral Density, 802.11a, 4x8, CH6

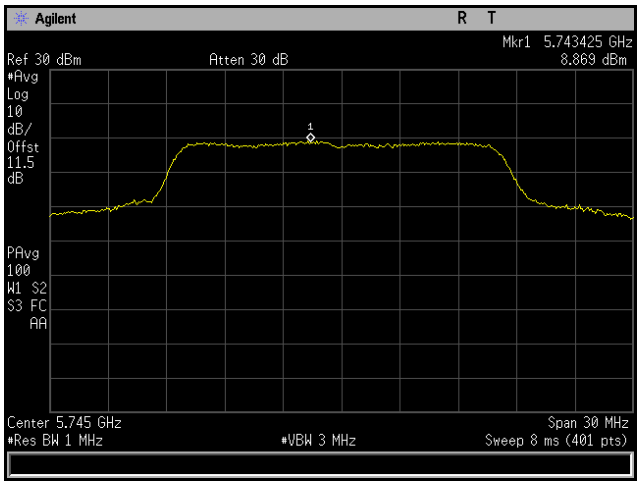

Plot 178. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH6

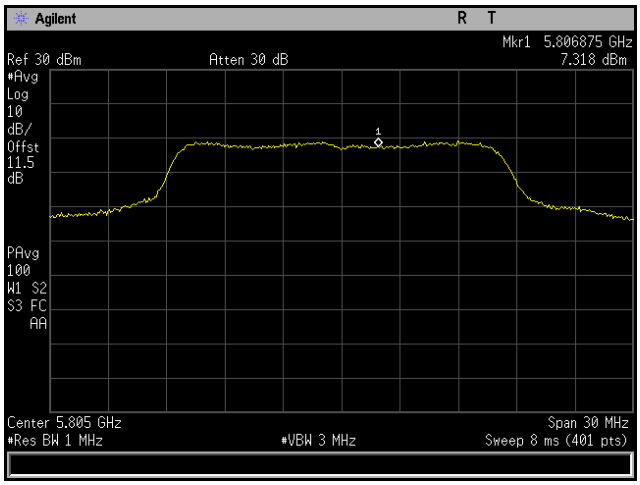

Plot 179. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH6

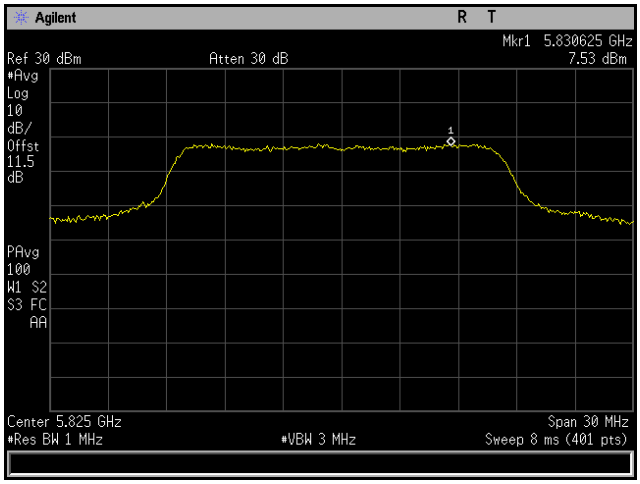

Plot 180. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH6

Power Spectral Density, 802.11ac 20 MHz, 4x8, CH3

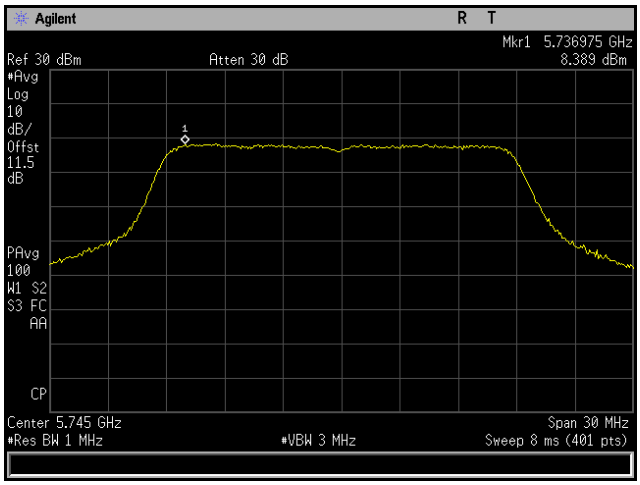

Plot 181. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3

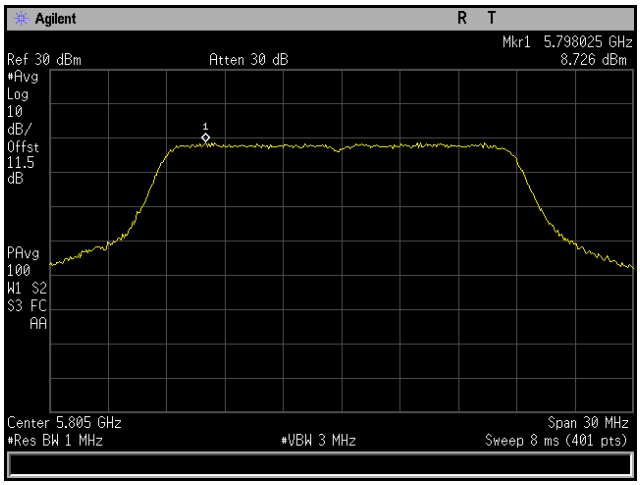

Plot 182. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3

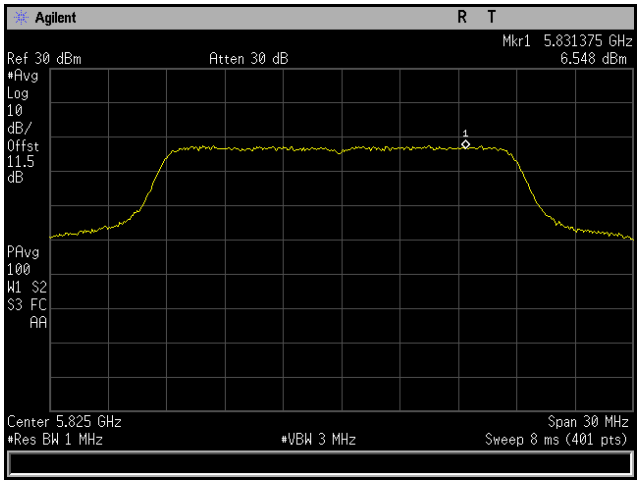

Plot 183. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11ac 20 MHz, 4x8, CH4

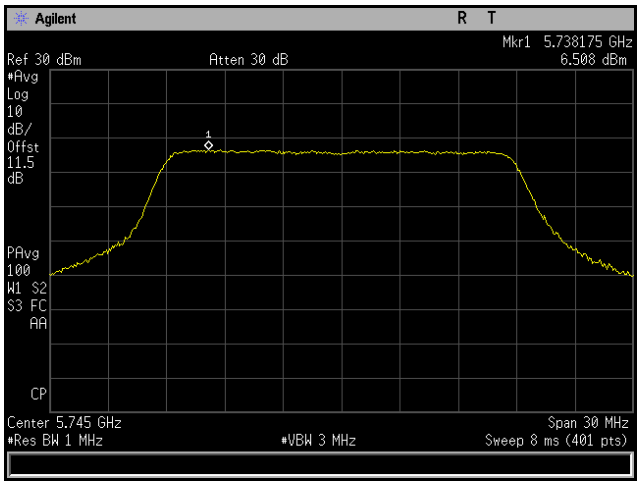

Plot 184. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH4

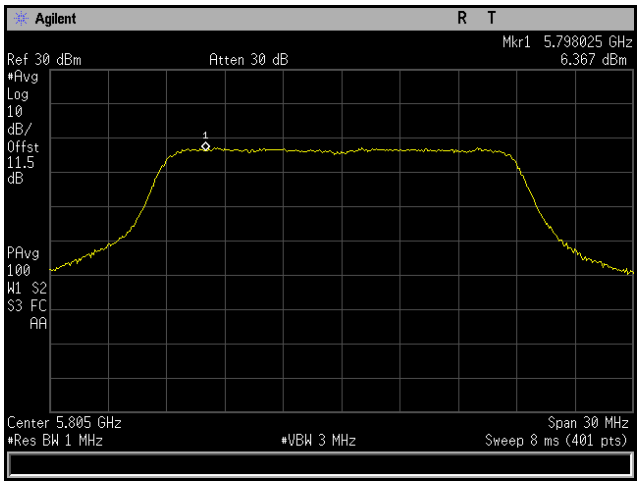

Plot 185. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH4

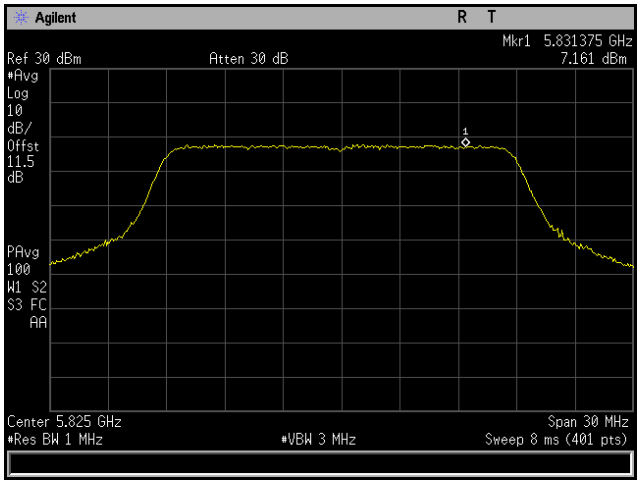

Plot 186. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11ac 20 MHz, 4x8, CH5

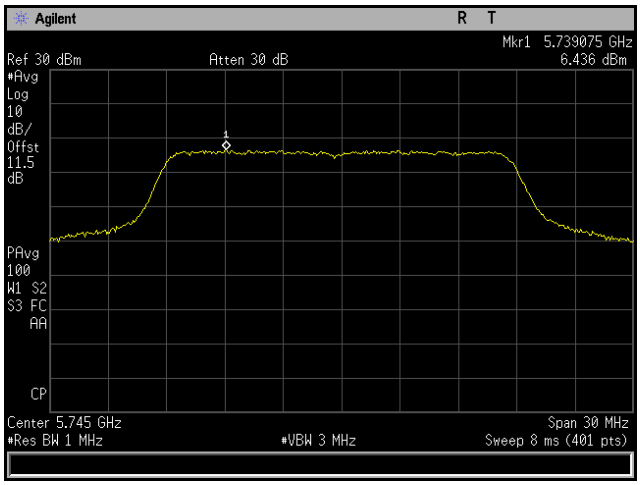

Plot 187. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH5

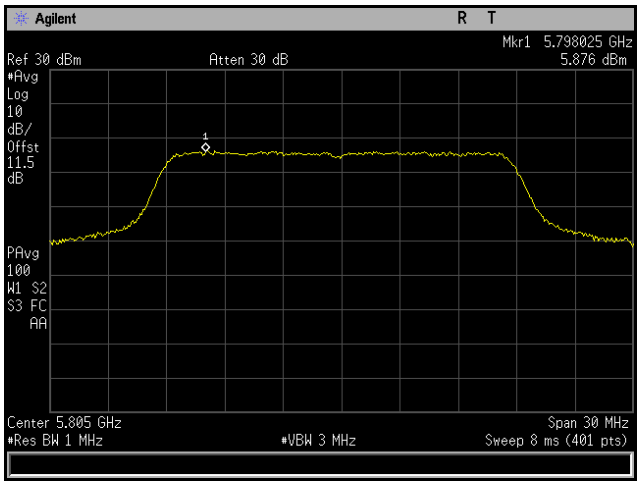

Plot 188. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH5

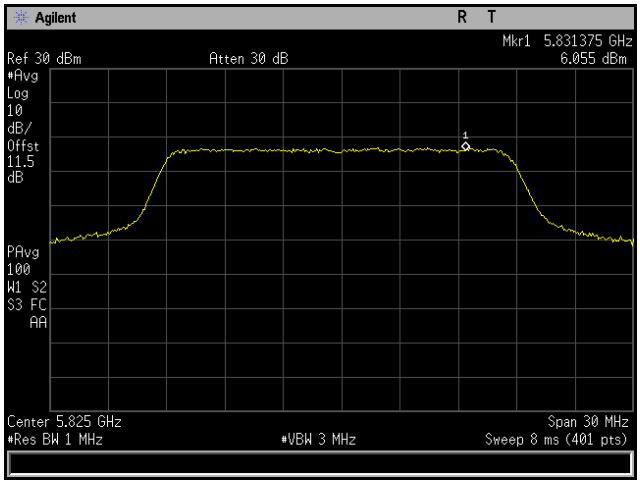

Plot 189. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11ac 20 MHz, 4x8, CH6

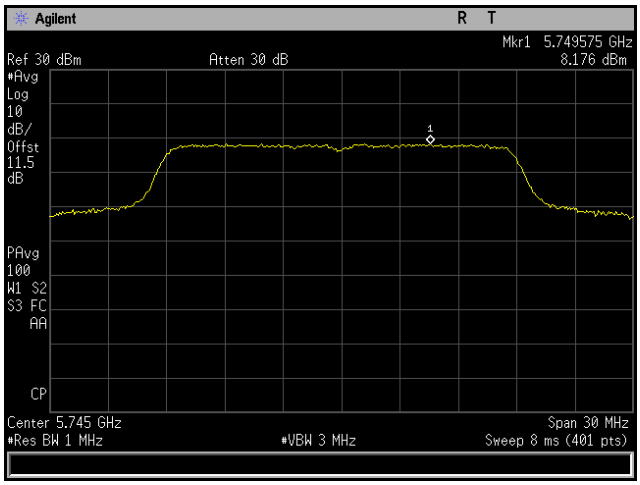

Plot 190. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH6

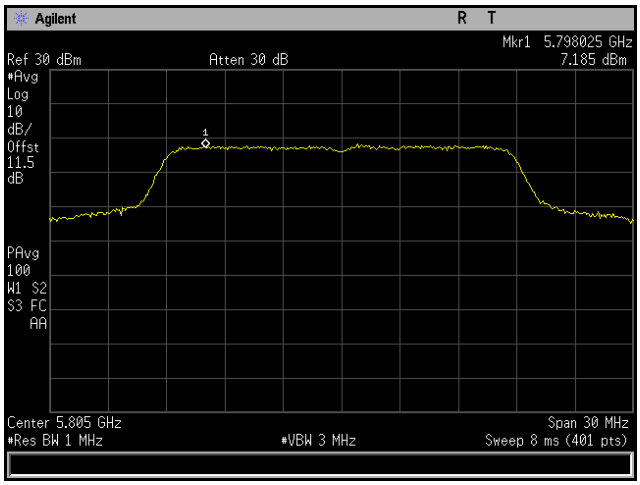

Plot 191. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH6

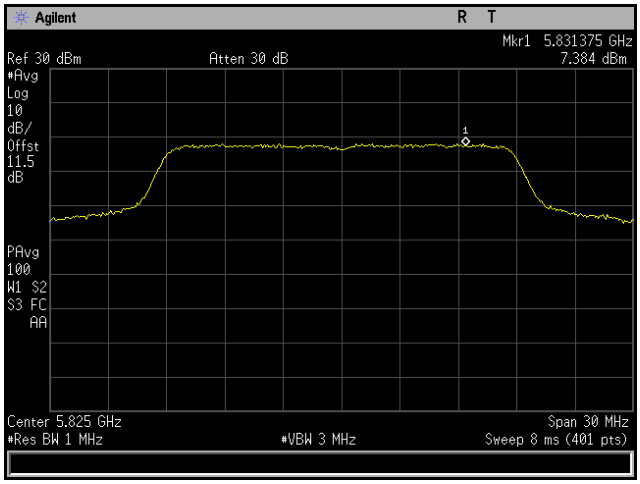

Plot 192. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11ac 40 MHz, 4x8, CH3

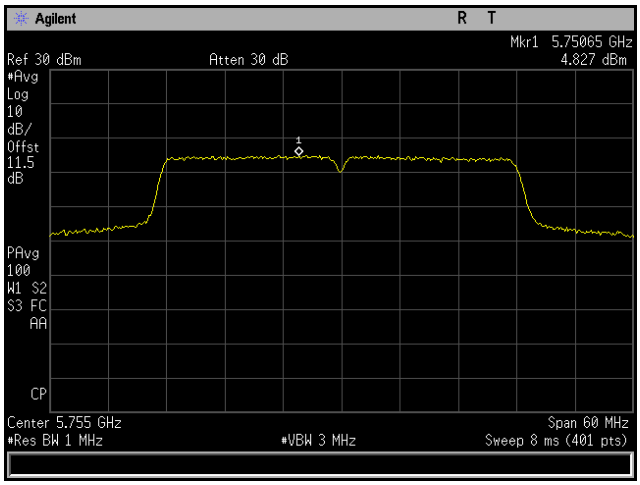

Plot 193. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3

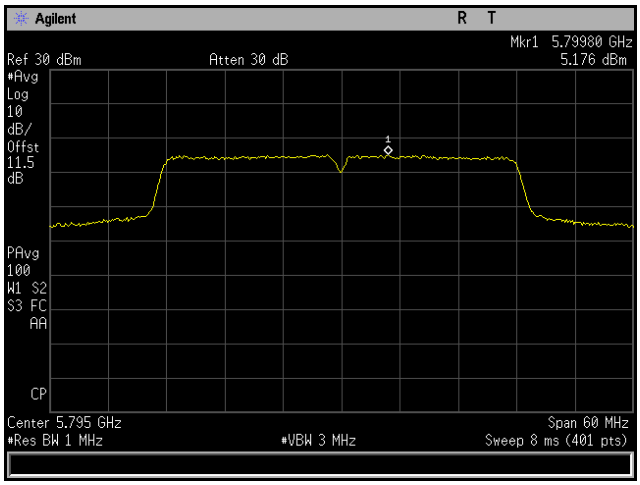

Plot 194. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11ac 40 MHz, 4x8, CH4

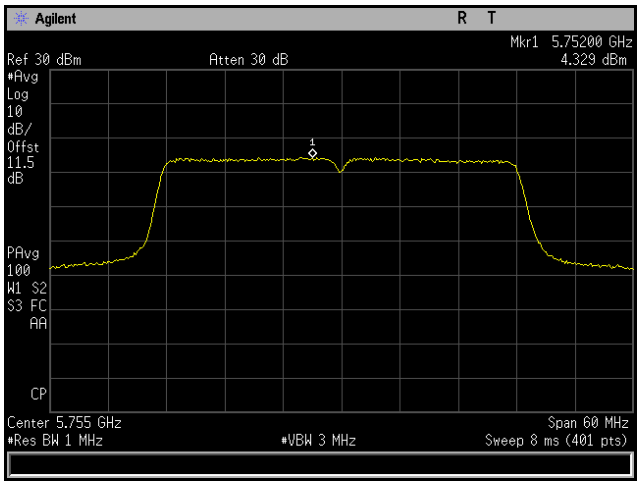

Plot 195. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH4

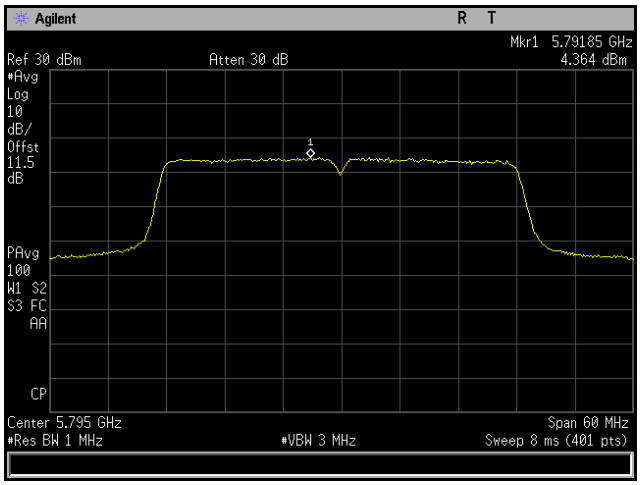

Plot 196. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11ac 40 MHz, 4x8, CH5

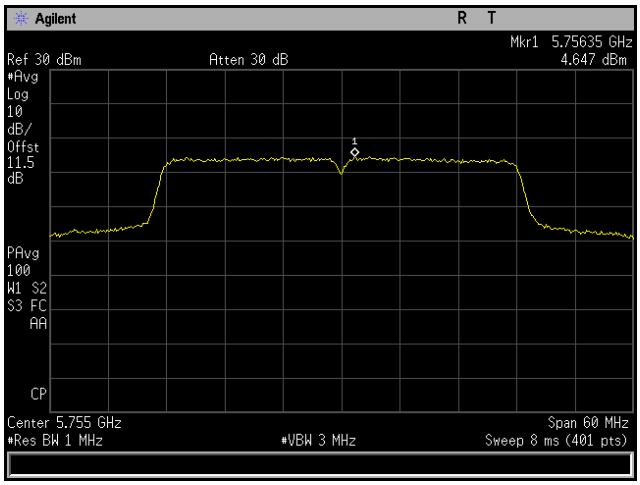

Plot 197. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH5

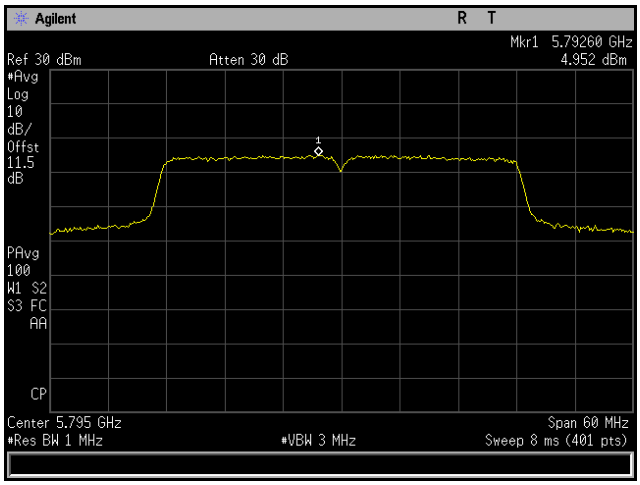

Plot 198. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11ac 40 MHz, 4x8, CH6

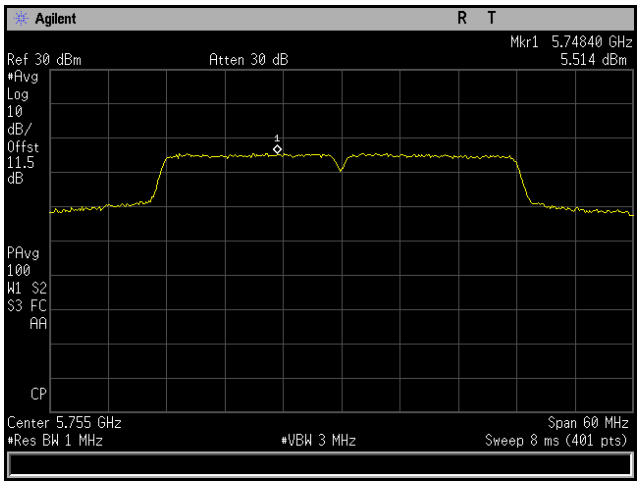

Plot 199. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH6

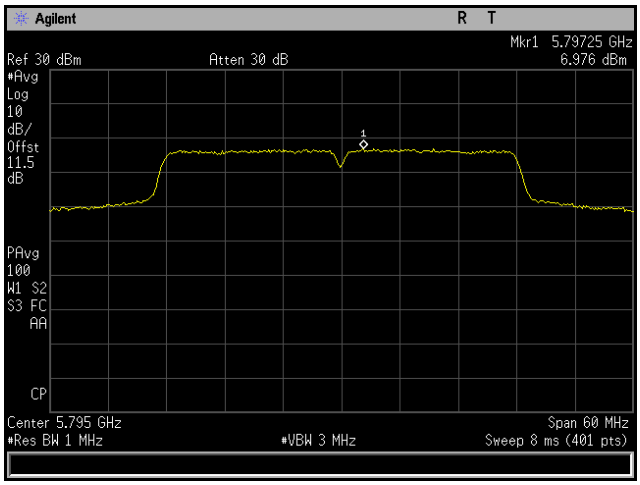

Plot 200. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11ac 80 MHz, 4x8, CH3

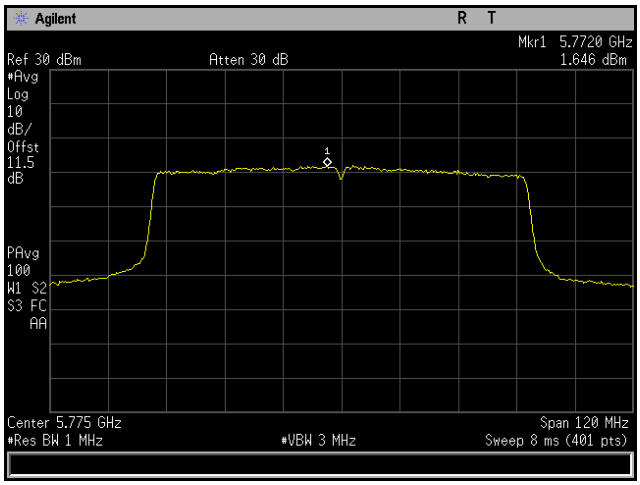

Plot 201. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11ac 80 MHz, 4x8, CH4

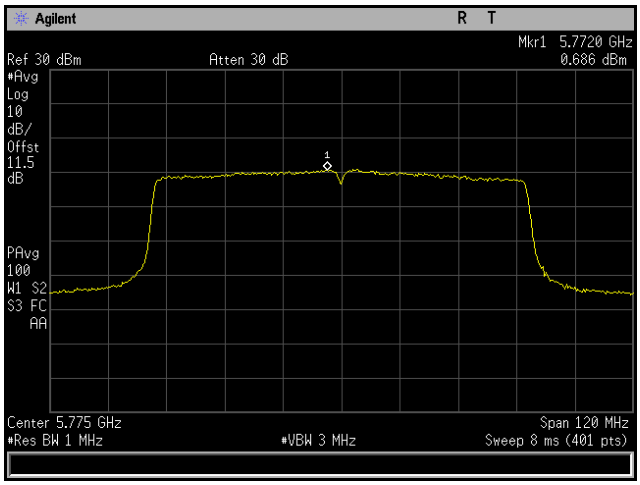

Plot 202. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11ac 80 MHz, 4x8, CH5

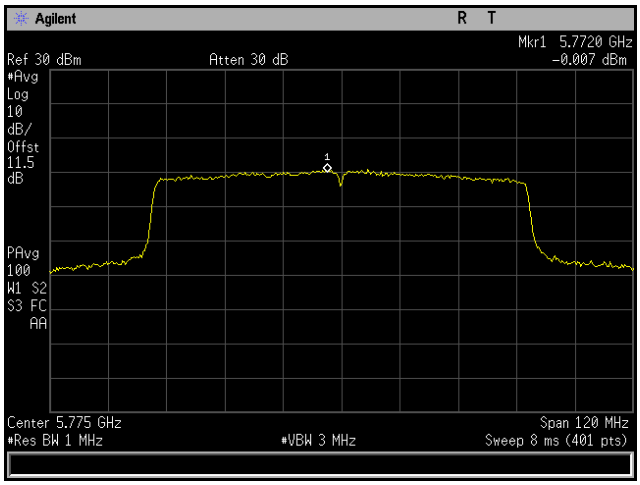

Plot 203. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11ac 80 MHz, 4x8, CH6

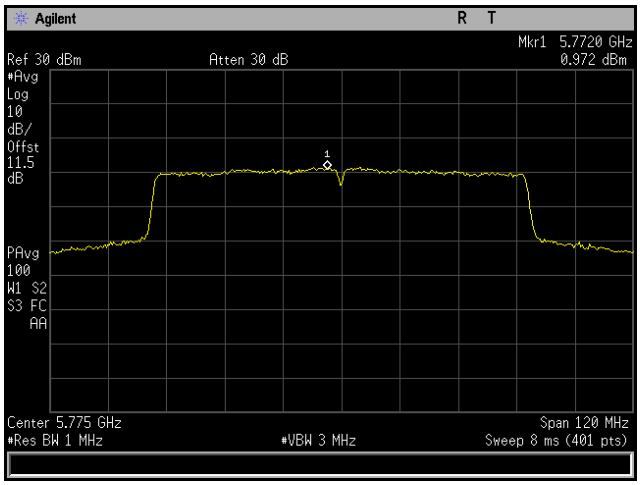

Plot 204. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11n 20 MHz, 4x8, CH3

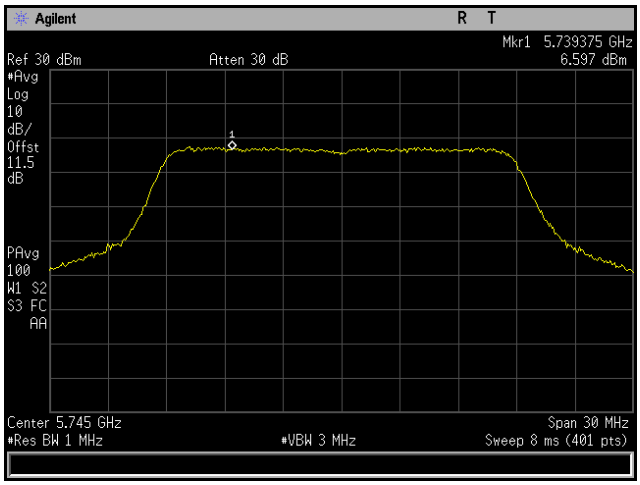

Plot 205. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3

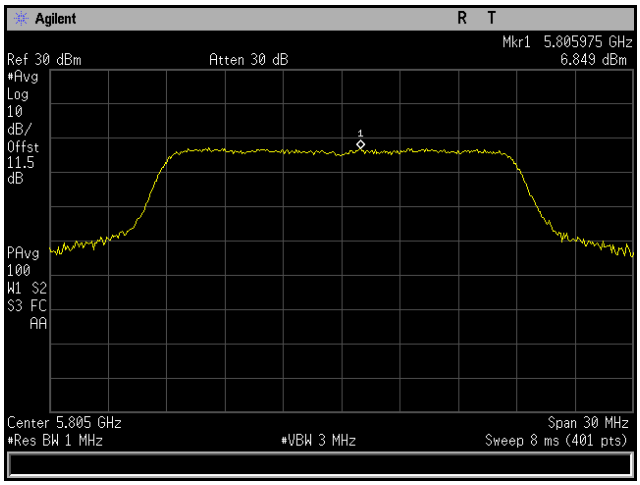

Plot 206. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3

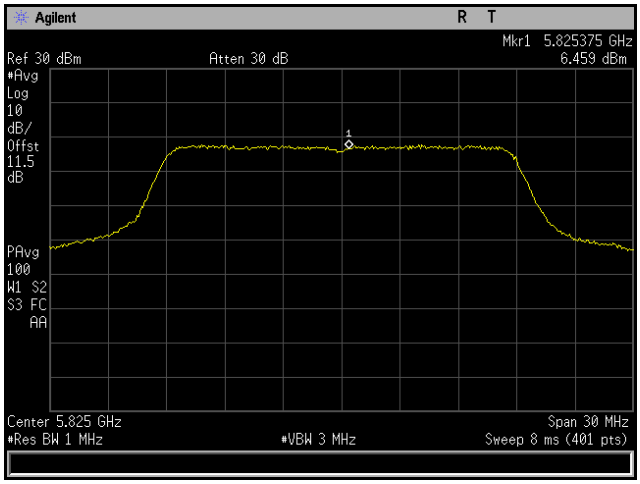

Plot 207. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11n 20 MHz, 4x8, CH4

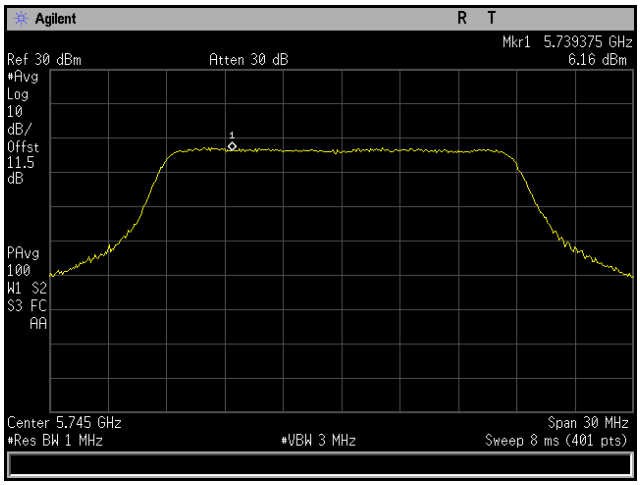

Plot 208. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH4

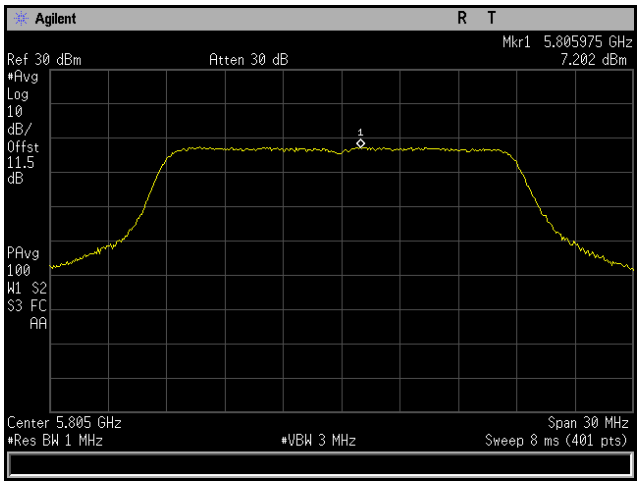

Plot 209. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH4

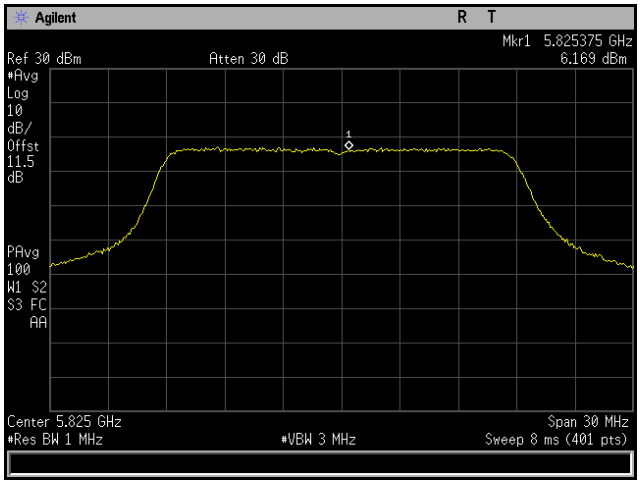

Plot 210. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11n 20 MHz, 4x8, CH5

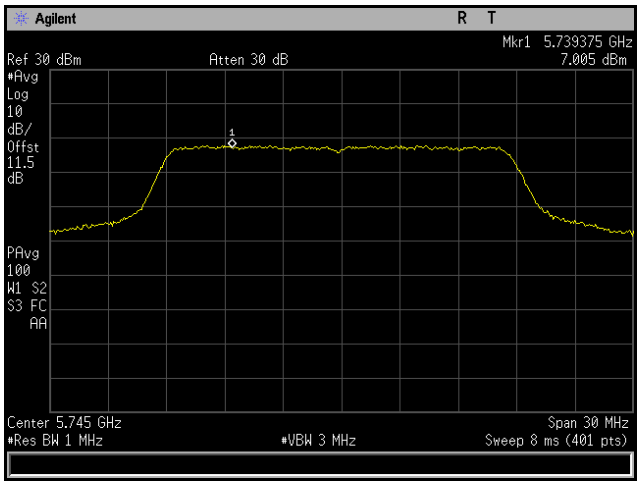

Plot 211. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH5

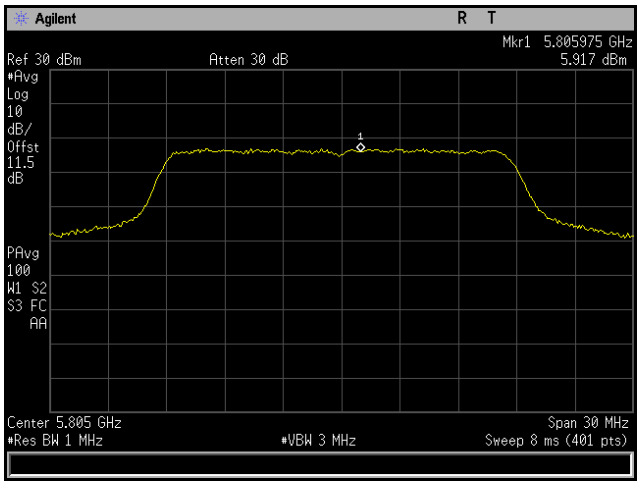

Plot 212. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH5

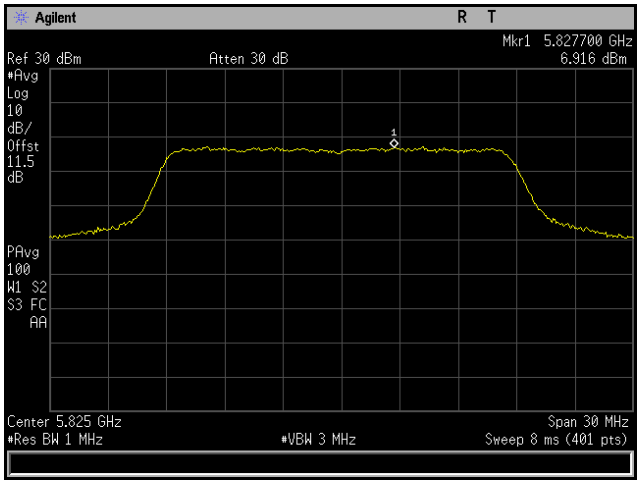

Plot 213. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11n 20 MHz, 4x8, CH6

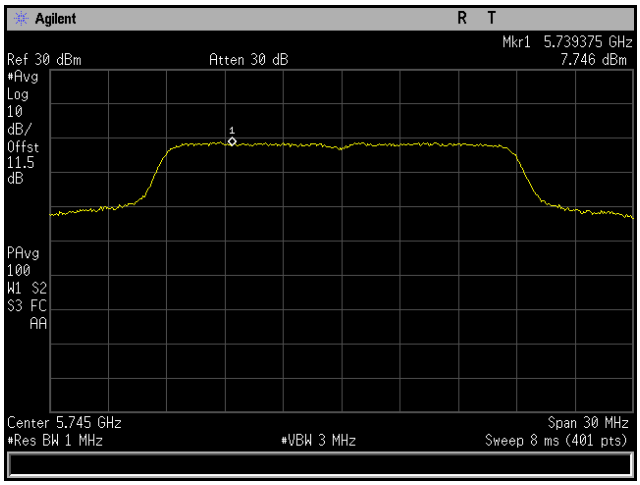

Plot 214. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH6

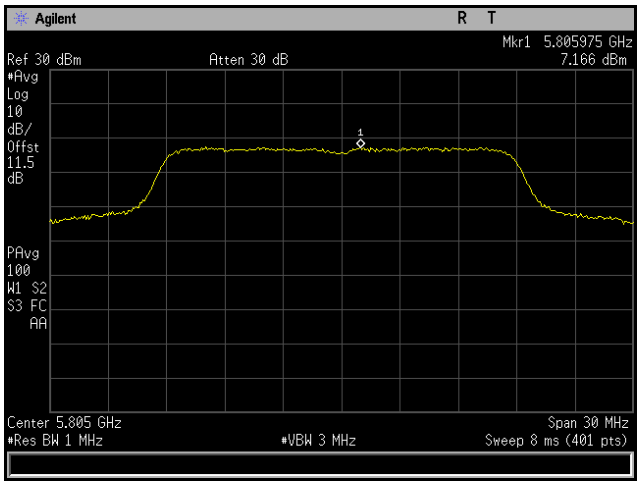

Plot 215. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH6

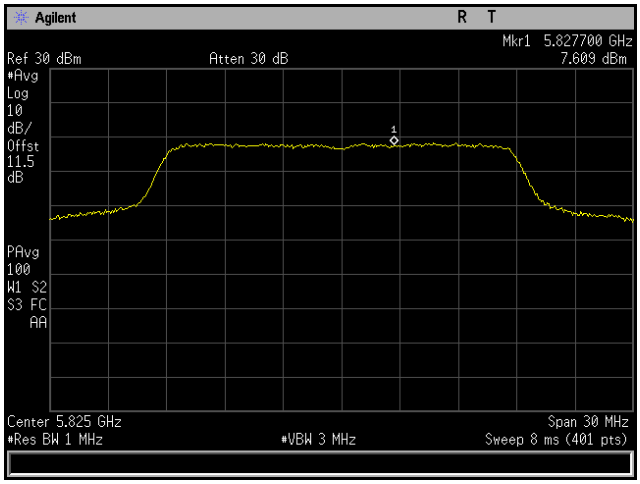

Plot 216. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11n 40 MHz, 4x8, CH3

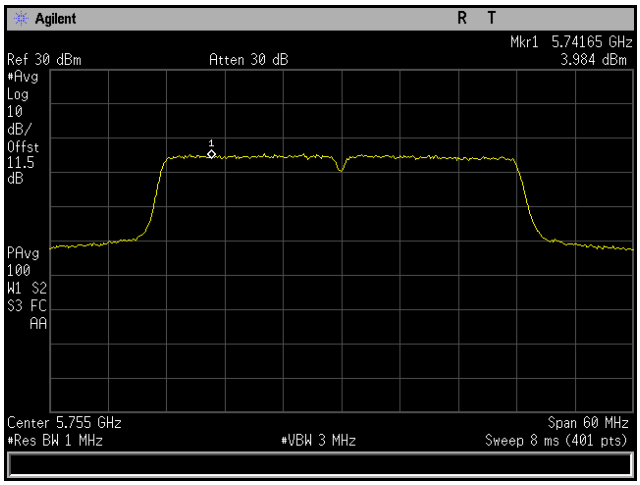

Plot 217. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3

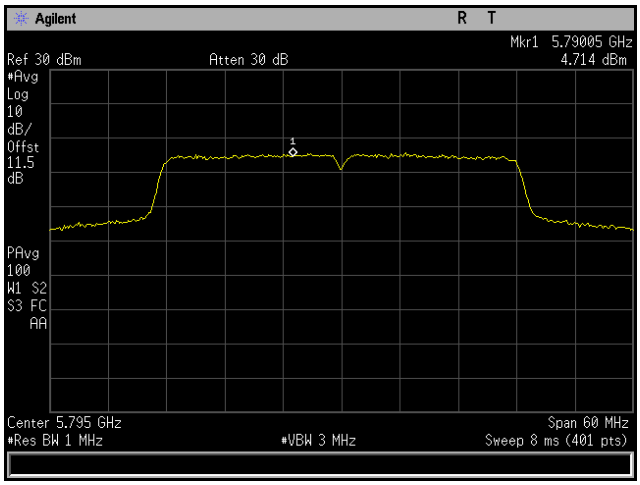

Plot 218. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11n, 4x8, CH4

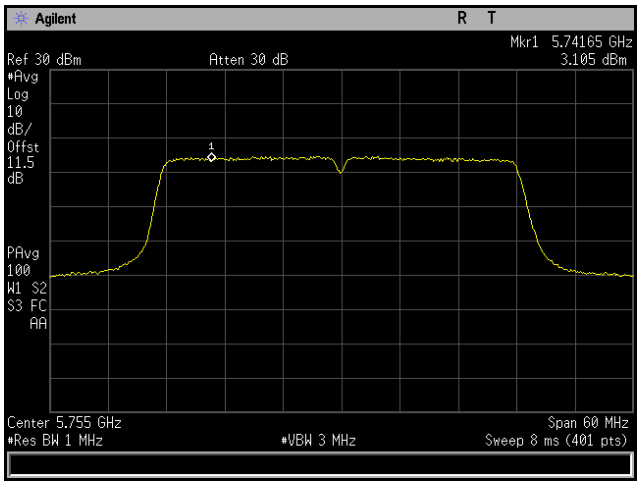

Plot 219. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH4

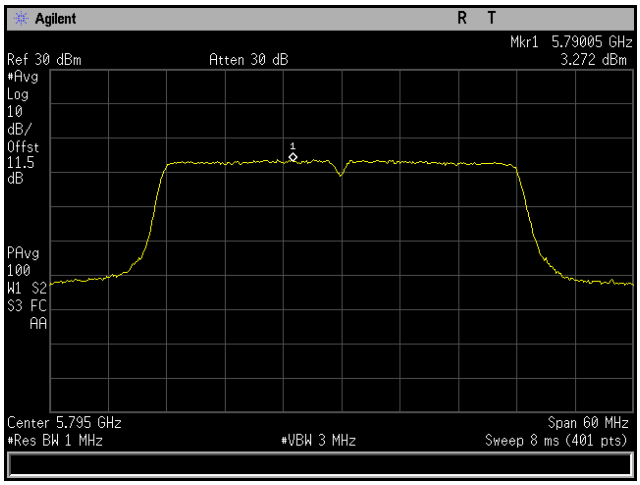

Plot 220. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11n, 4x8, CH5

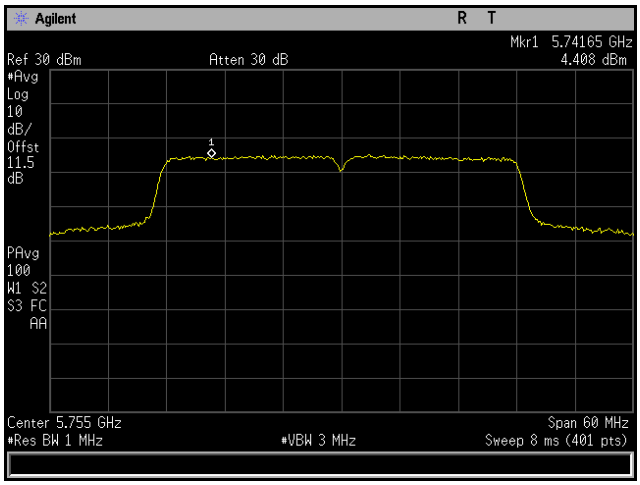

Plot 221. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH5

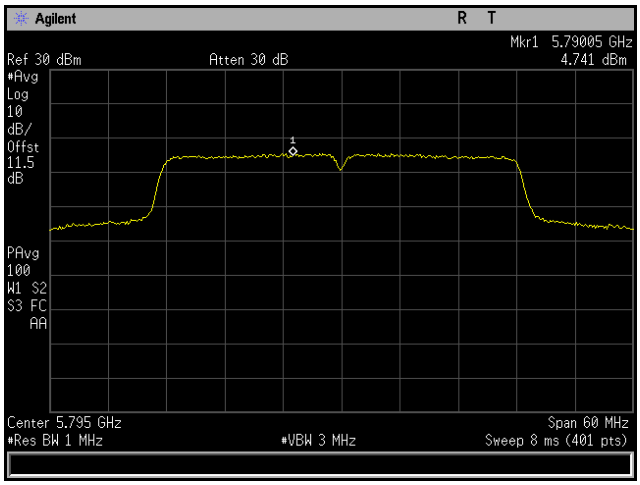

Plot 222. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11n, 4x8, CH6

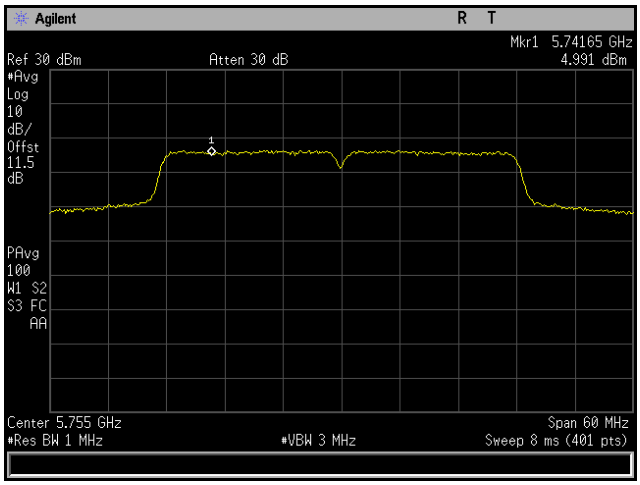

Plot 223. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH6

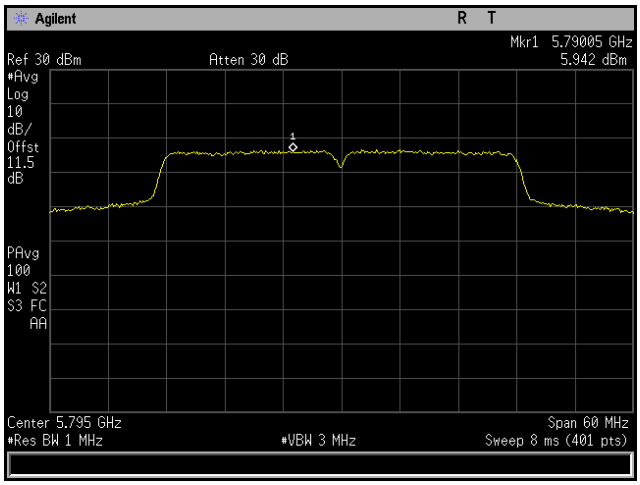

Plot 224. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11a, 6x8, CH2

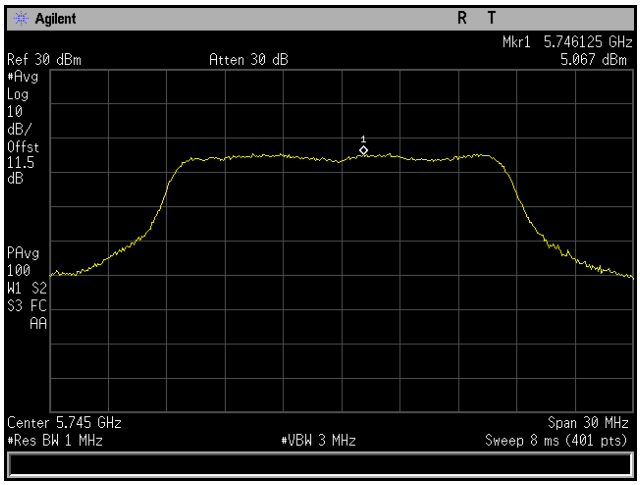

Plot 225. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH2

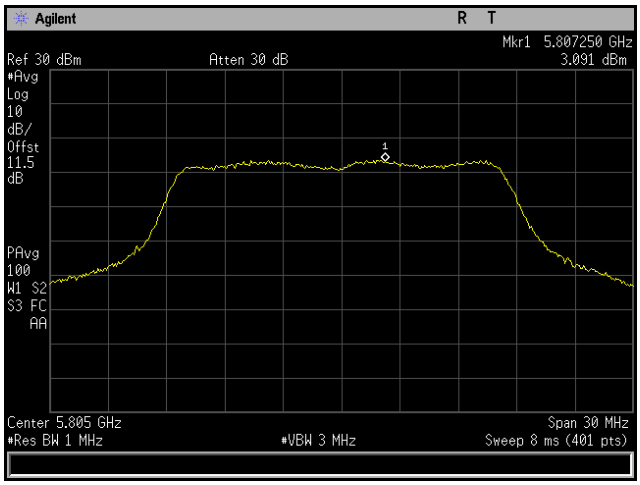

Plot 226. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH2

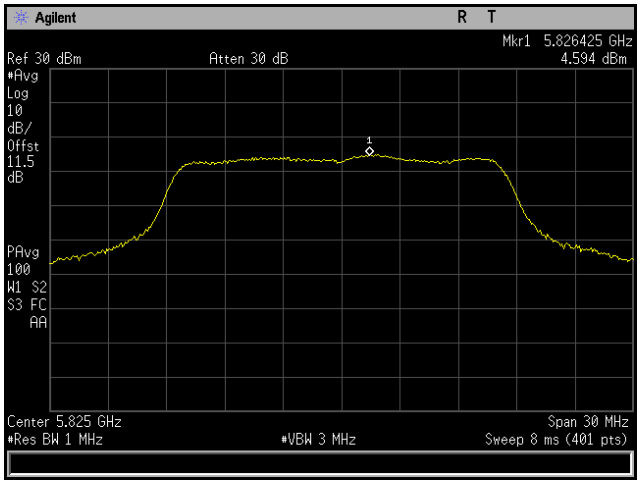

Plot 227. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH2

Power Spectral Density, 802.11a, 6x8, CH3

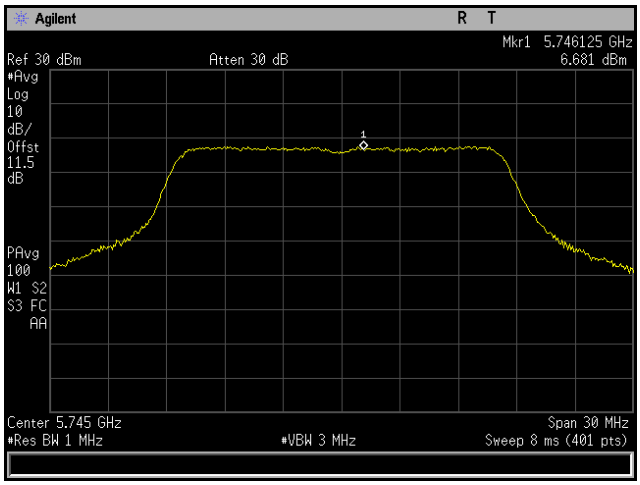

Plot 228. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH3

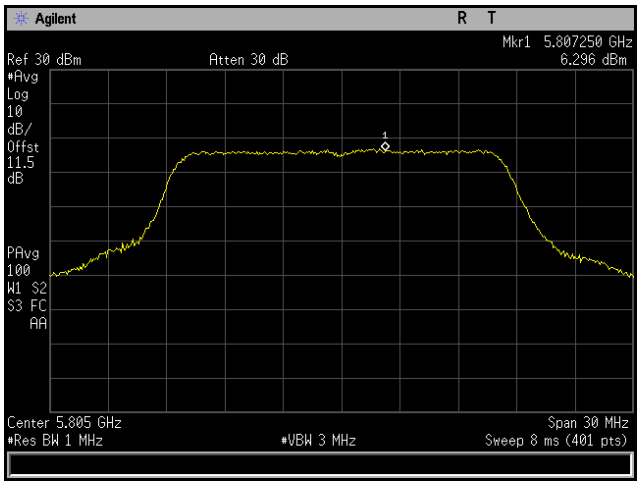

Plot 229. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH3

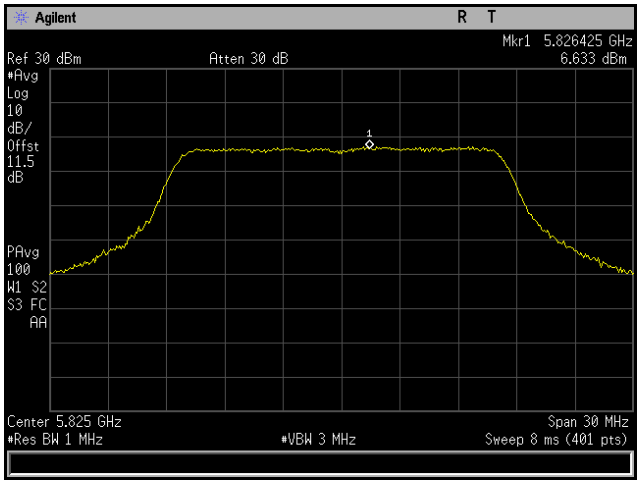

Plot 230. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH3

Power Spectral Density, 802.11a, 6x8, CH4

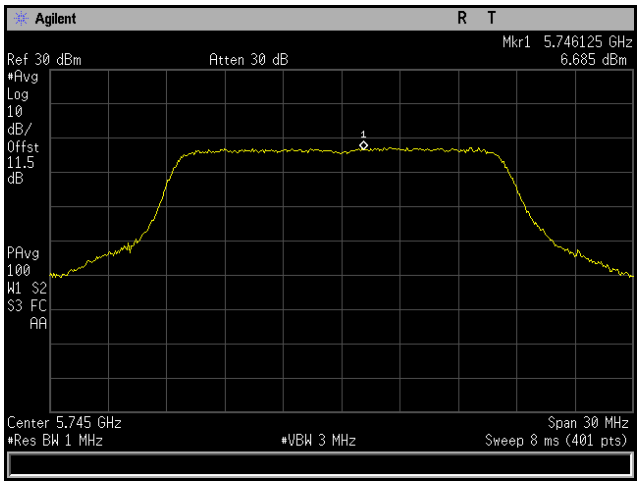

Plot 231. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH4

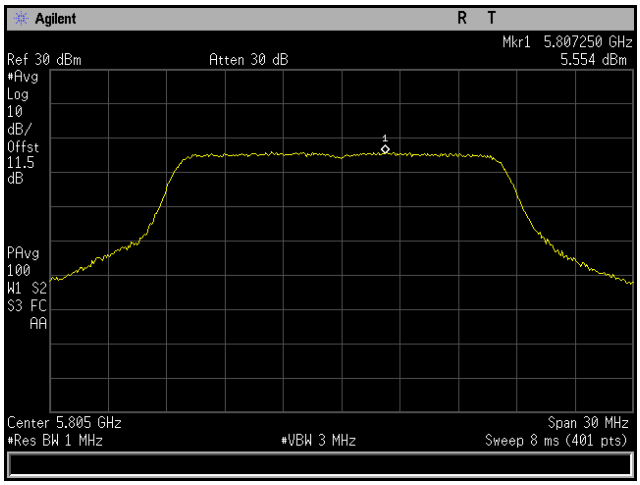

Plot 232. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH4

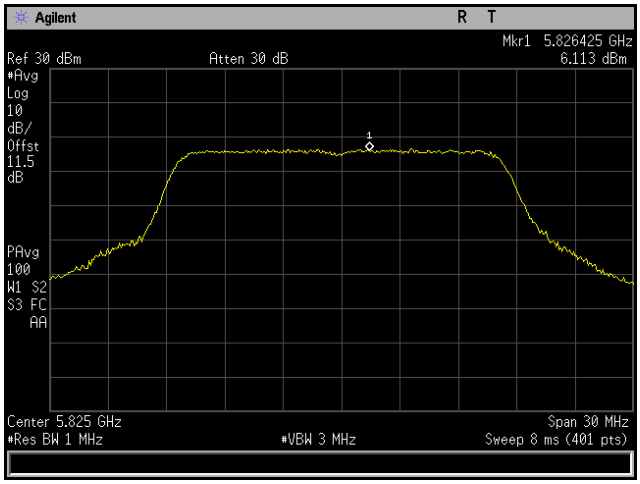

Plot 233. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH4

Power Spectral Density, 802.11a, 6x8, CH5

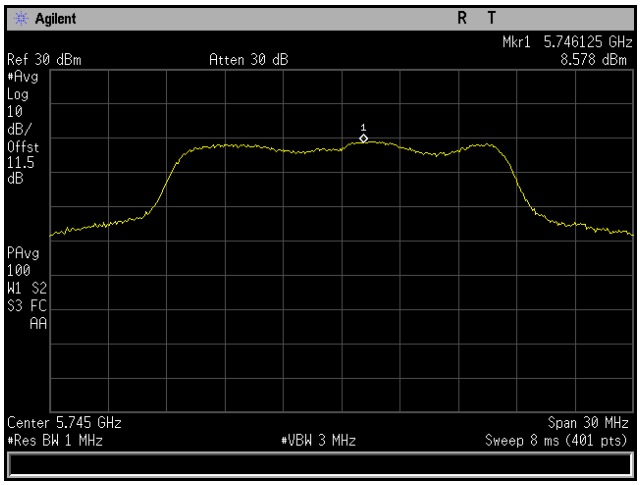

Plot 234. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH5

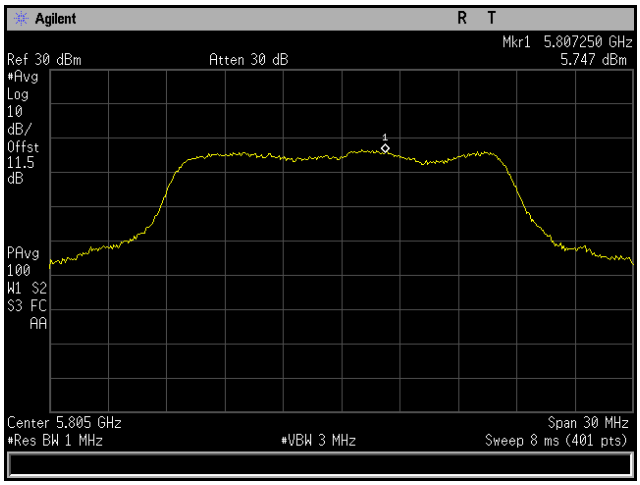

Plot 235. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH5

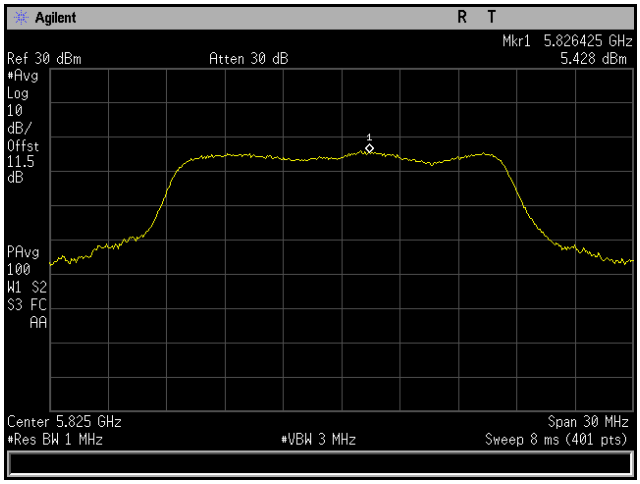

Plot 236. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH5

Power Spectral Density, 802.11a, 6x8, CH6

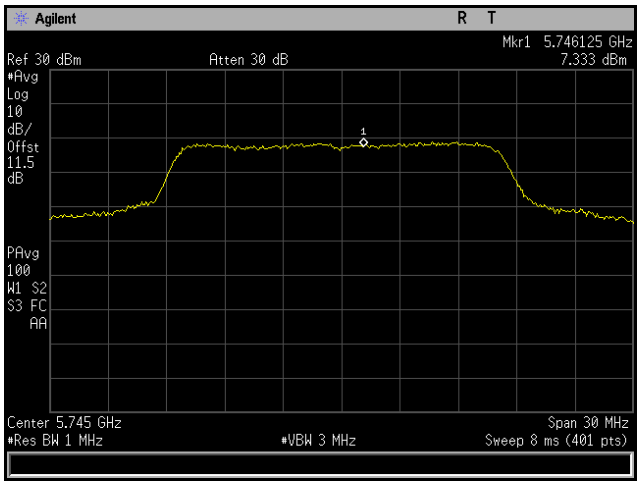

Plot 237. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH6

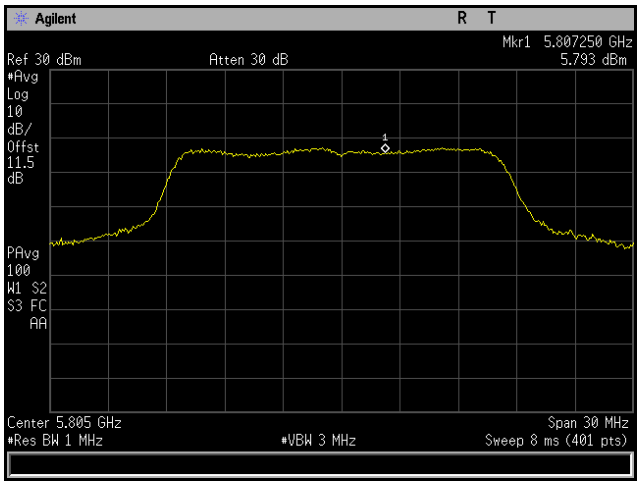

Plot 238. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH6

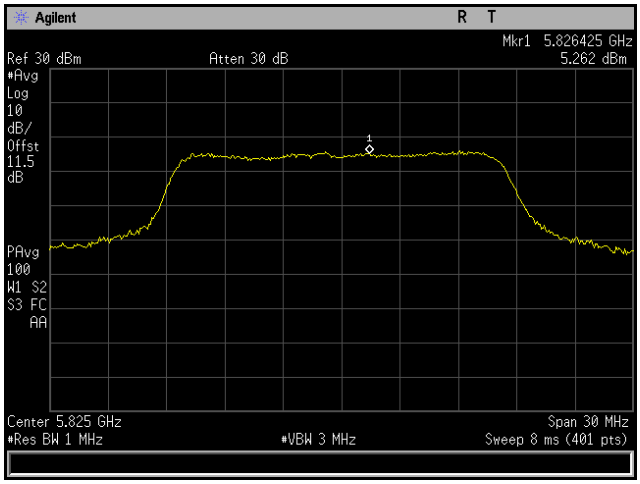

Plot 239. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH6

Power Spectral Density, 802.11a, 6x8, CH7

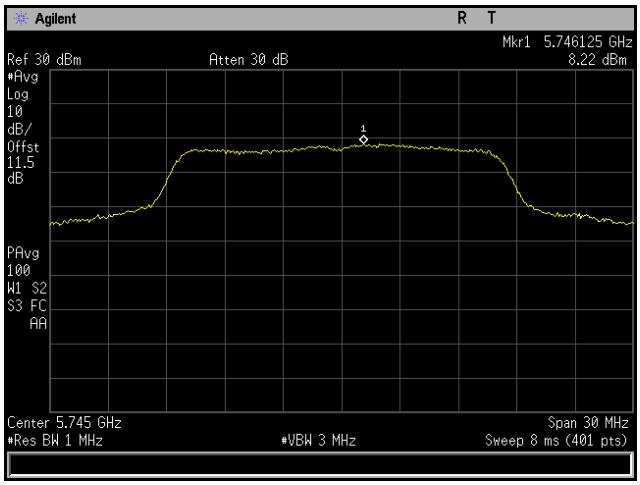

Plot 240. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, CH7

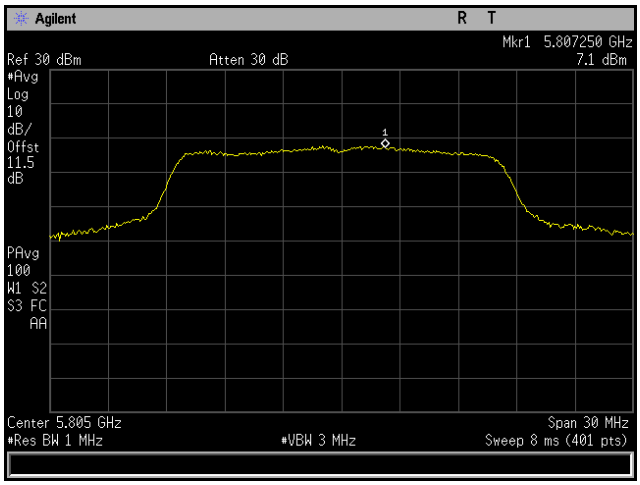

Plot 241. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M, CH7

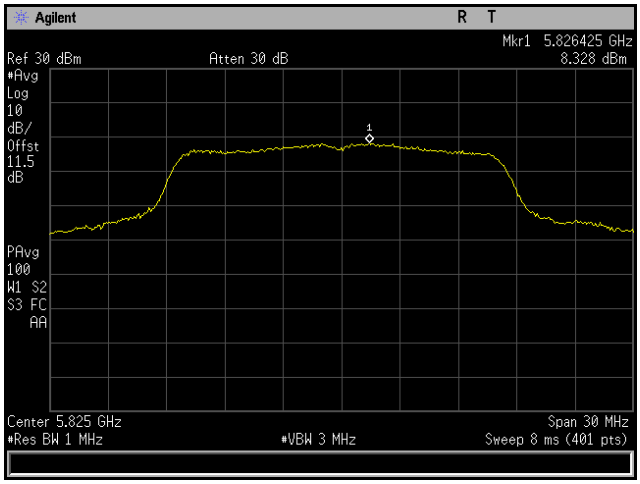

Plot 242. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, CH7

Power Spectral Density, 802.11ac 20 MHz, 6x8, CH2

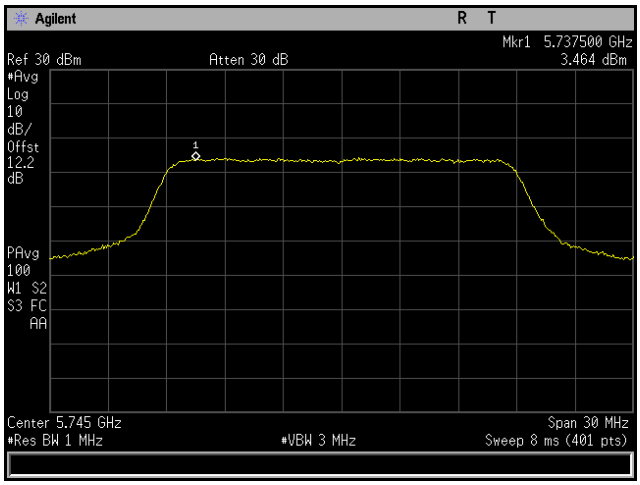

Plot 243. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH2

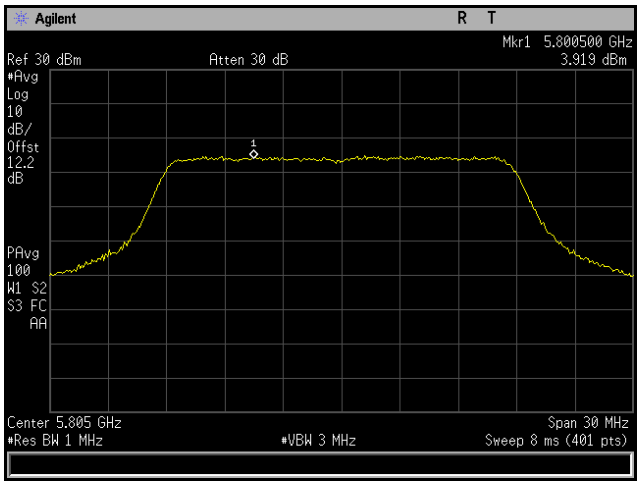

Plot 244. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH2

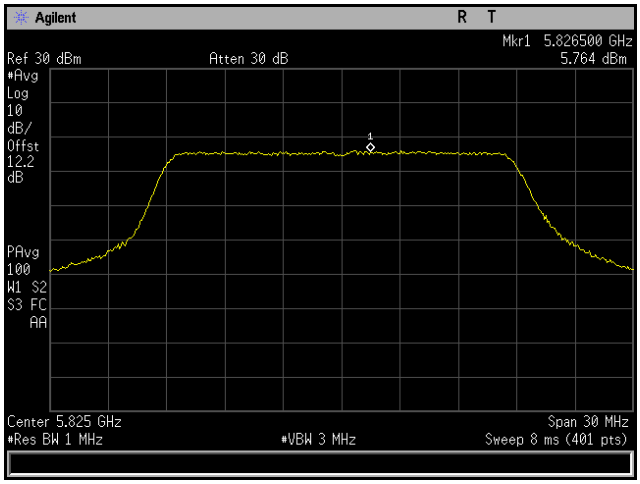

Plot 245. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH2

Power Spectral Density, 802.11ac 20 MHz, 6x8, CH3

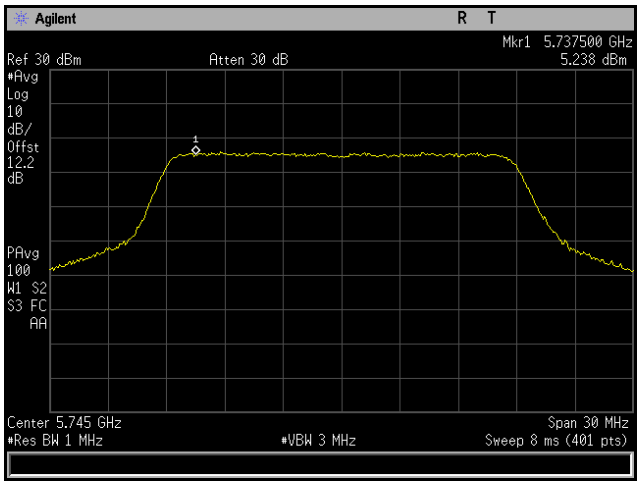

Plot 246. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH3

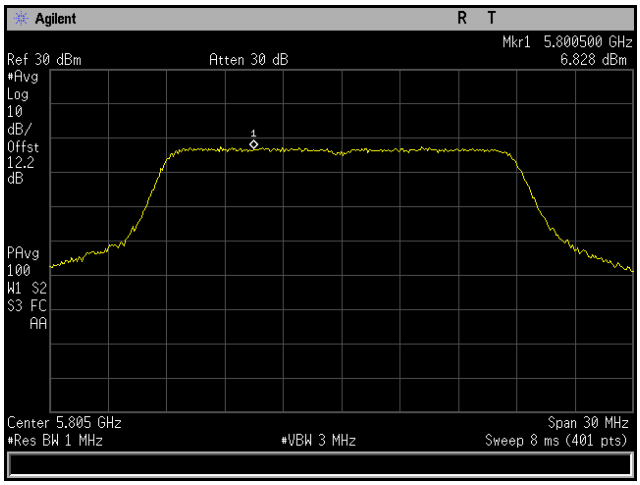

Plot 247. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH3

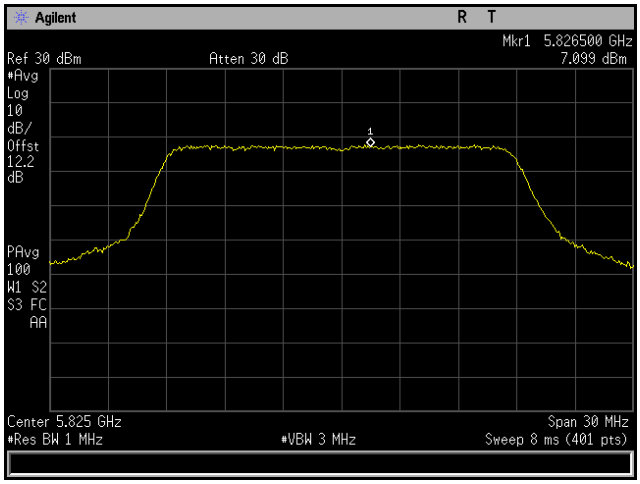

Plot 248. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11ac 20 MHz, 6x8, CH4

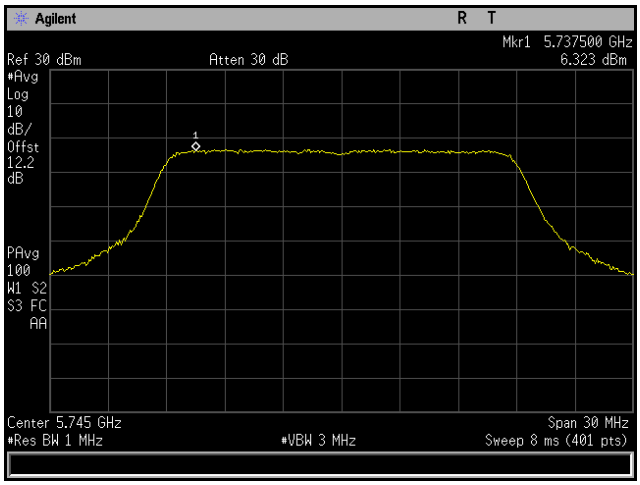

Plot 249. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH4

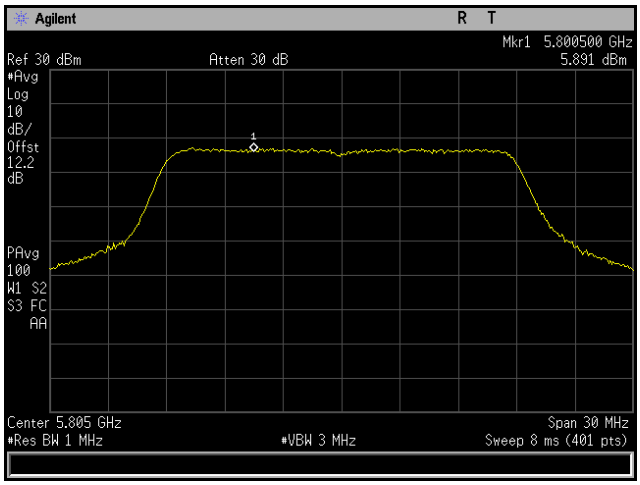

Plot 250. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH4

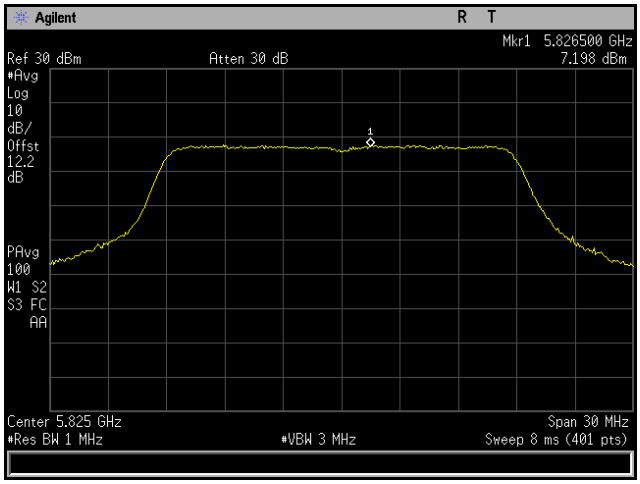

Plot 251. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11ac 20 MHz, 6x8, CH5

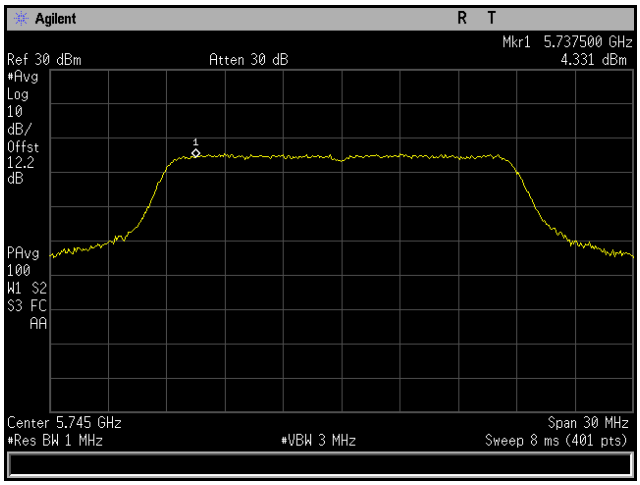

Plot 252. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH5

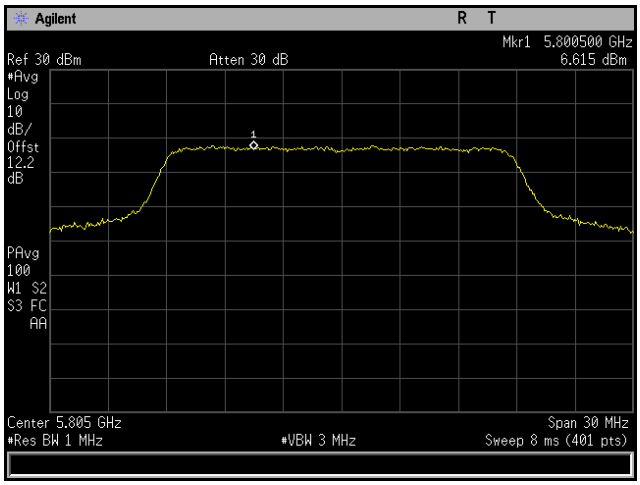

Plot 253. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH5

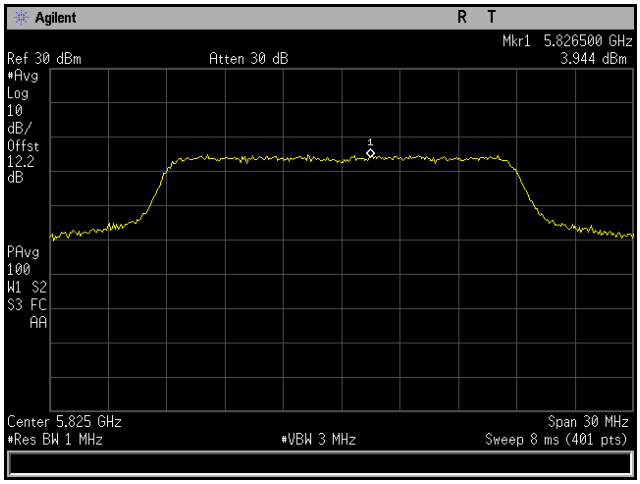

Plot 254. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11ac 20 MHz, 6x8, CH6

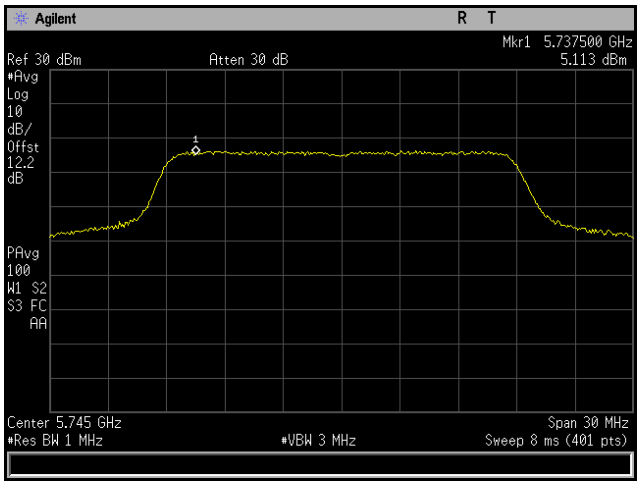

Plot 255. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH6

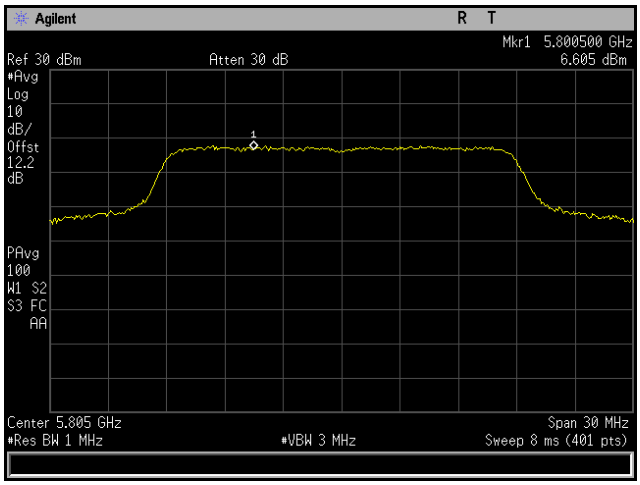

Plot 256. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH6

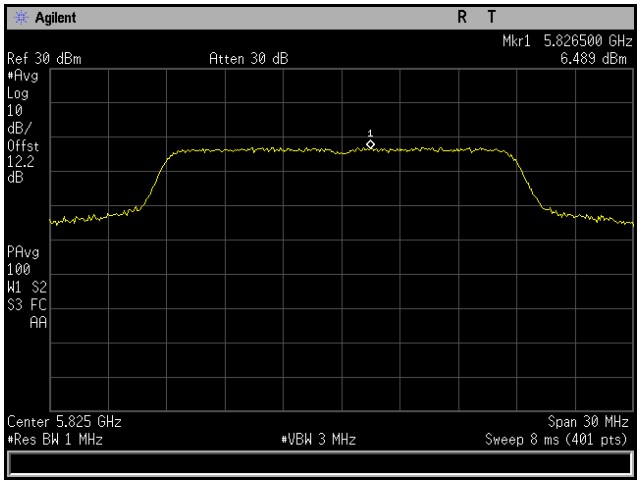

Plot 257. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11ac 20 MHz, 6x8, CH7

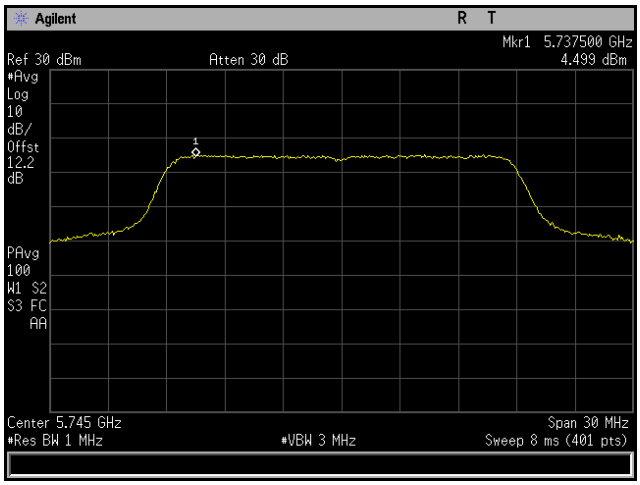

Plot 258. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH7

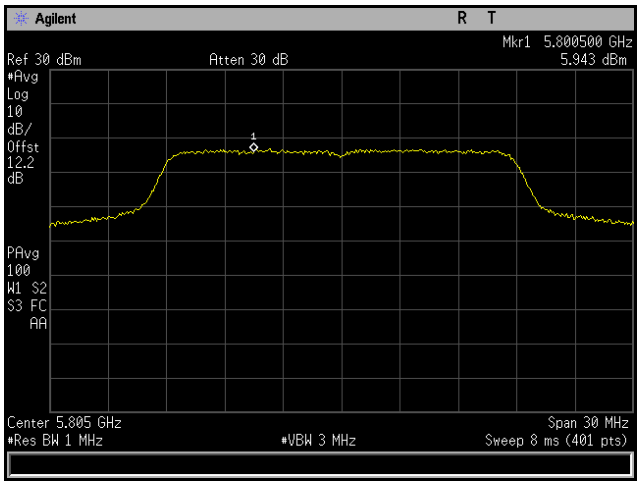

Plot 259. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH7

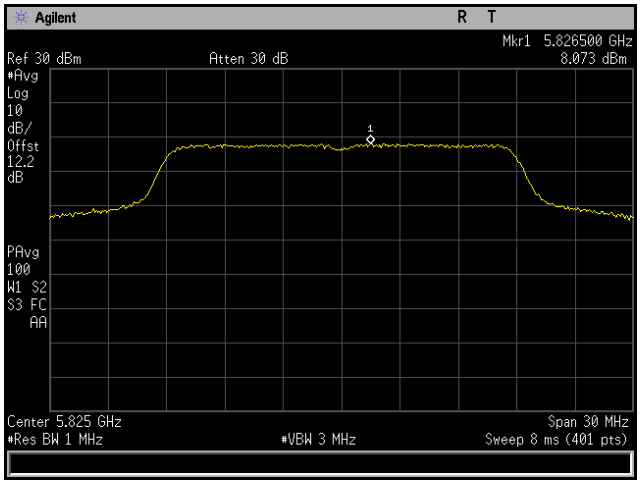

Plot 260. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH7

Power Spectral Density, 802.11ac 40 MHz, 6x8, CH2

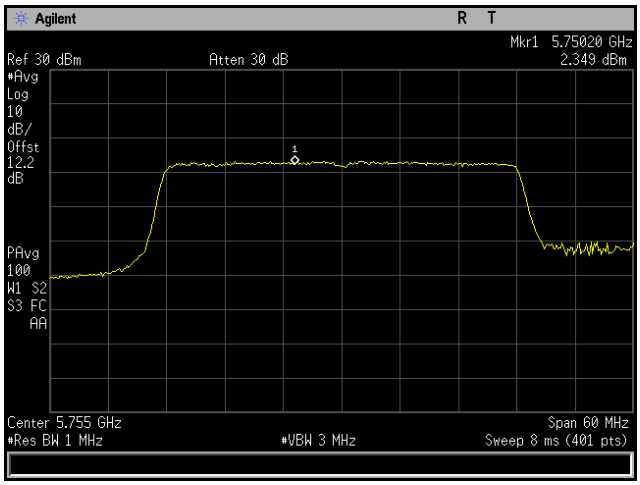

Plot 261. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH2

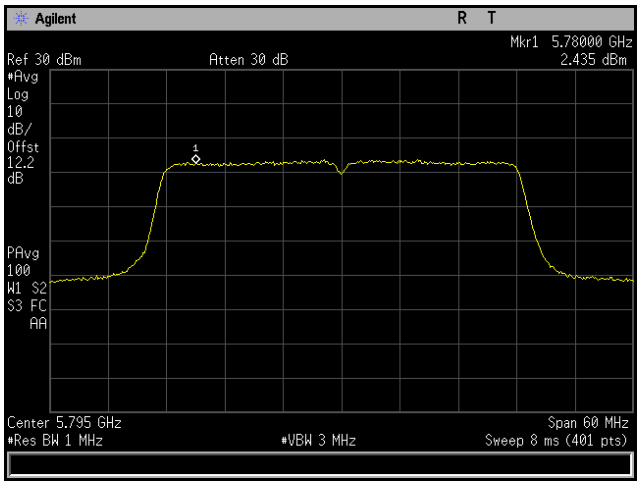

Plot 262. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH2

Power Spectral Density, 802.11ac 40 MHz, 6x8, CH3

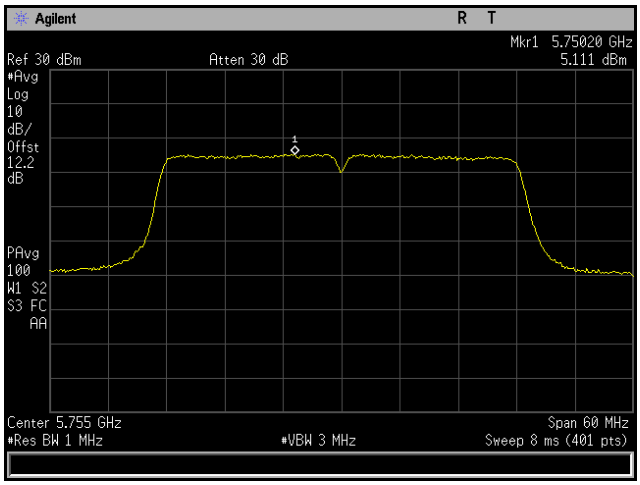

Plot 263. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH3

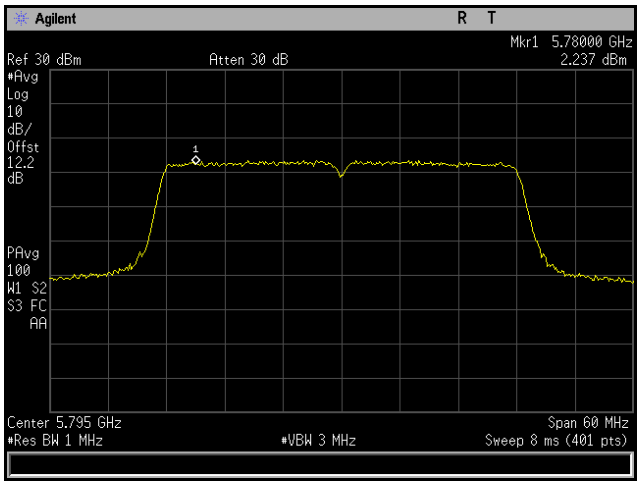

Plot 264. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11ac 40 MHz, 6x8, CH4

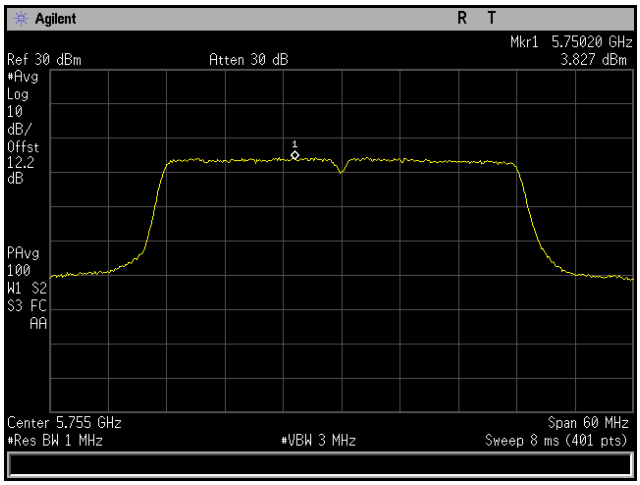

Plot 265. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH4

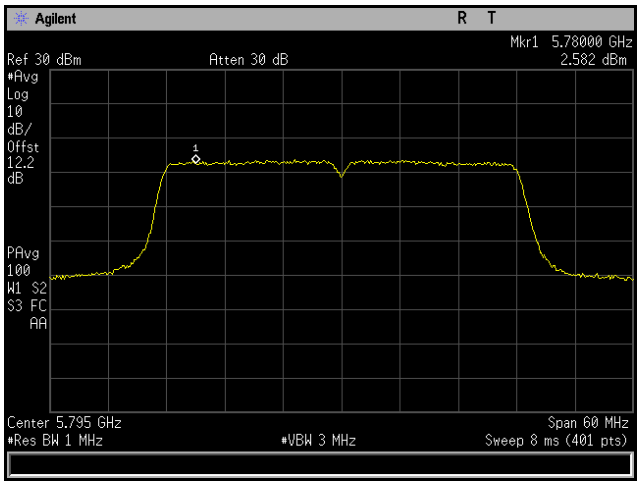

Plot 266. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11ac 40 MHz, 6x8, CH5

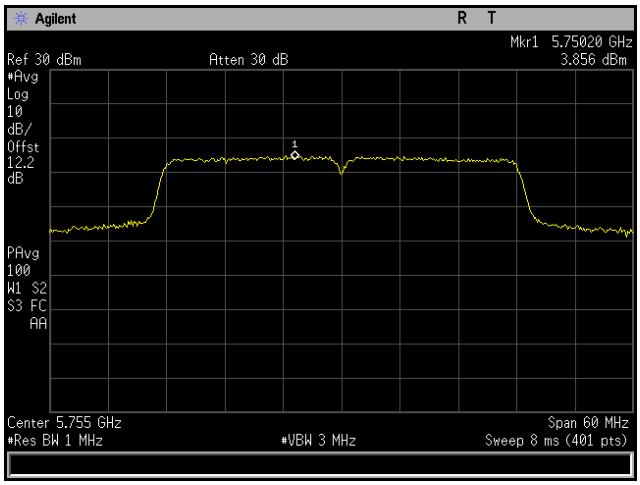

Plot 267. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH5

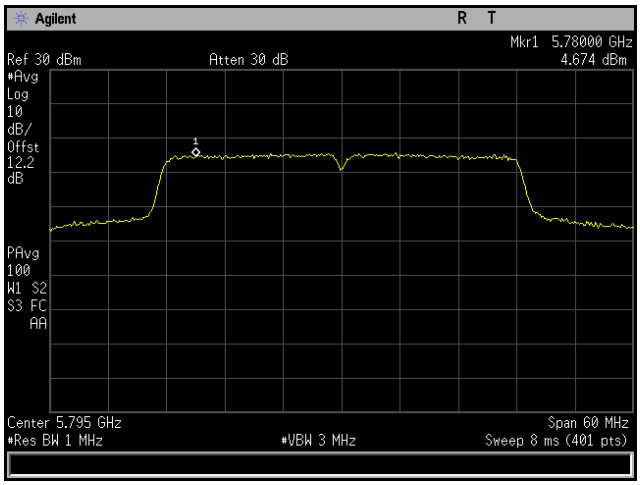

Plot 268. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11ac 40 MHz, 6x8, CH6

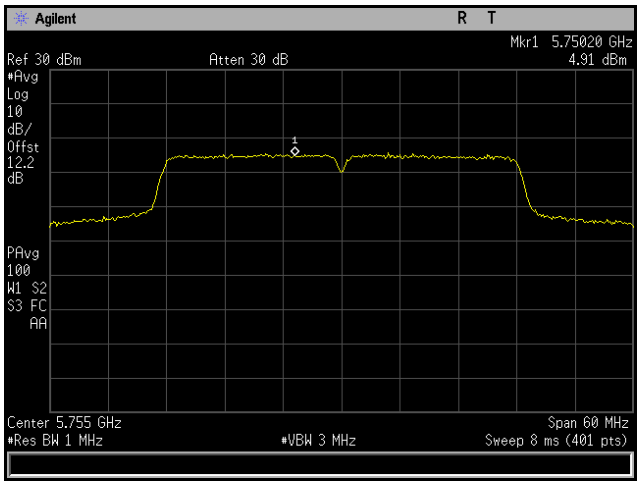

Plot 269. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH6

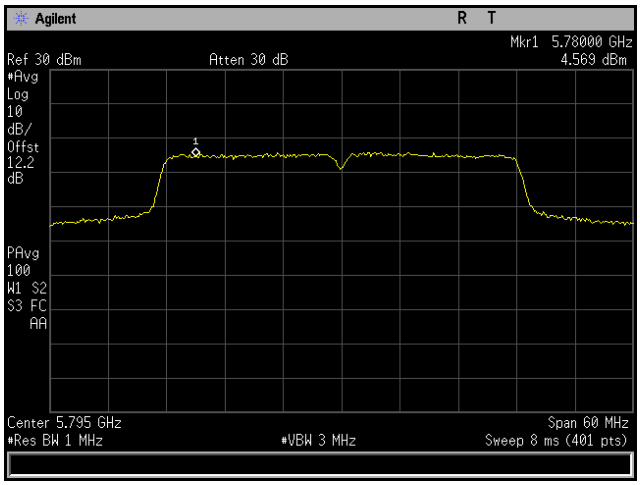

Plot 270. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11ac 40 MHz, 6x8, CH7

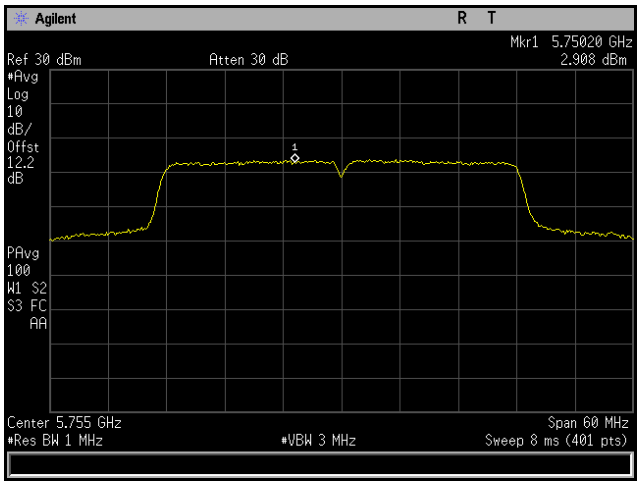

Plot 271. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH7

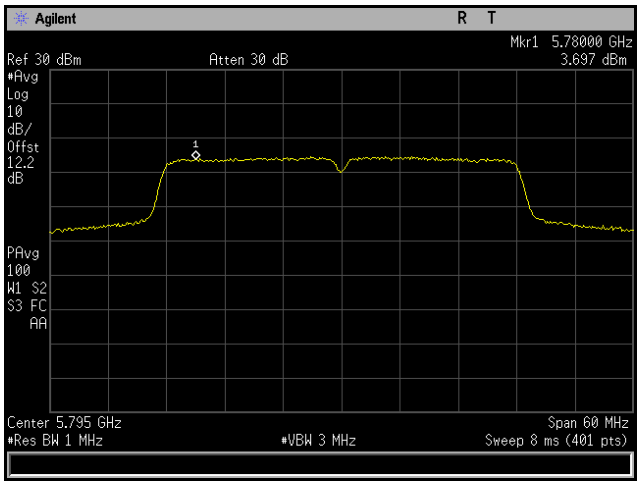

Plot 272. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH7

Power Spectral Density, 802.11ac 80 MHz, 6x8, CH2

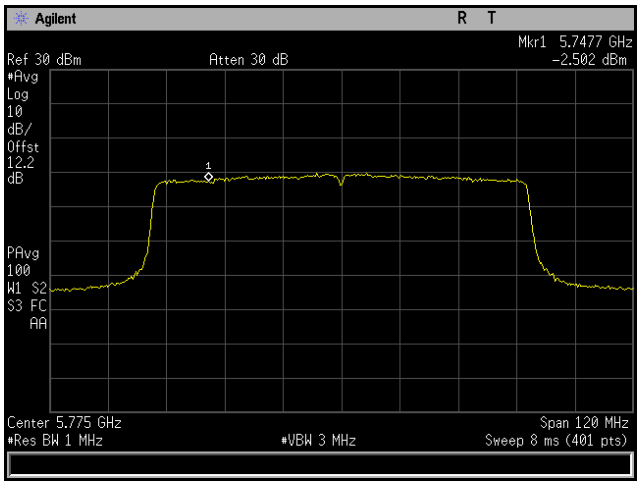

Plot 273. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH2

Power Spectral Density, 802.11ac 80 MHz, 6x8, CH3

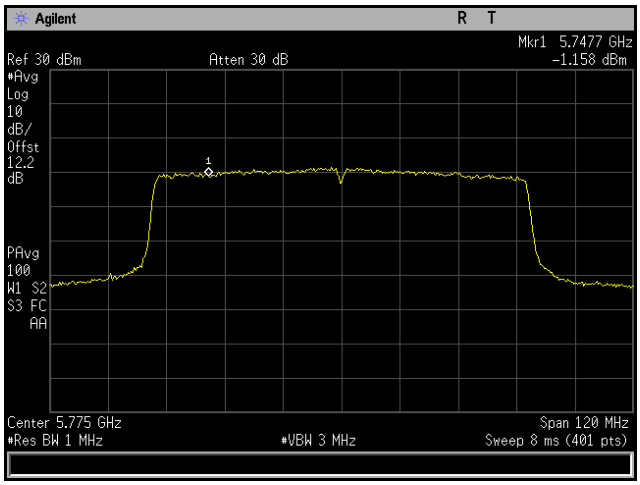

Plot 274. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11ac 80 MHz, 6x8, CH4

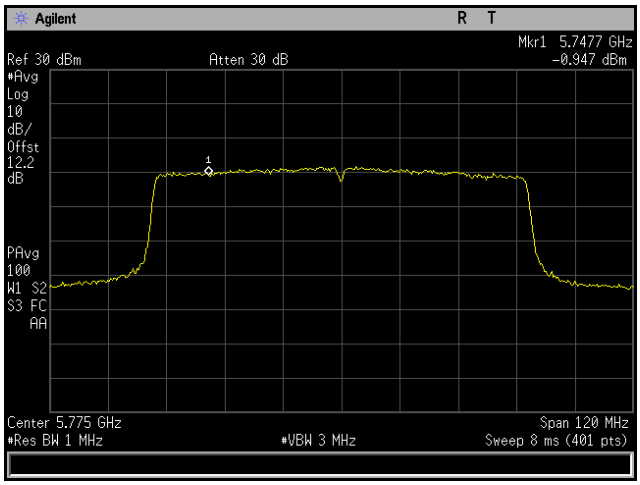

Plot 275. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11ac 80 MHz, 6x8, CH5

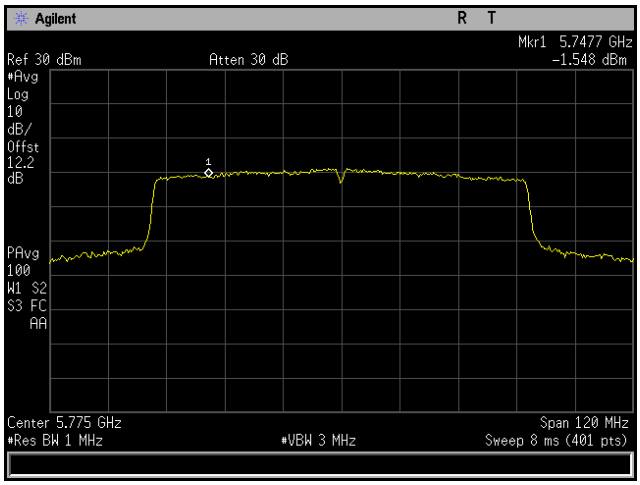

Plot 276. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11ac 80 MHz, 6x8, CH6

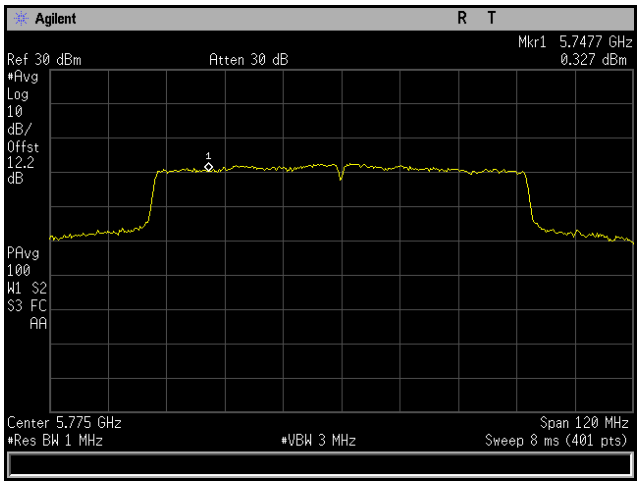

Plot 277. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11ac 80 MHz, 6x8, CH7

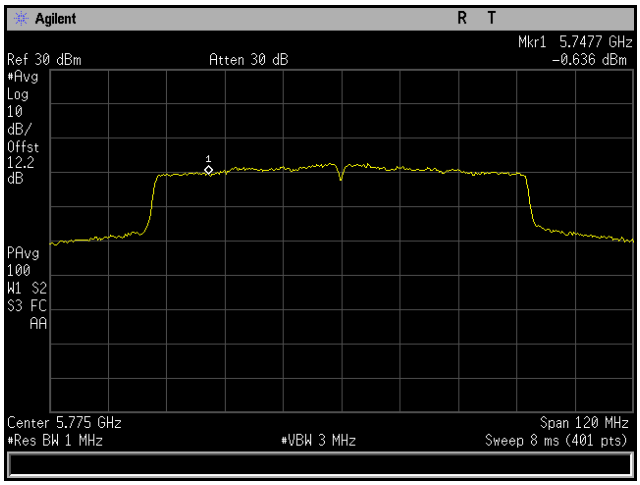

Plot 278. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, MCS0 NSS1, CH7

Power Spectral Density, 802.11n 20 MHz, 6x8, CH2

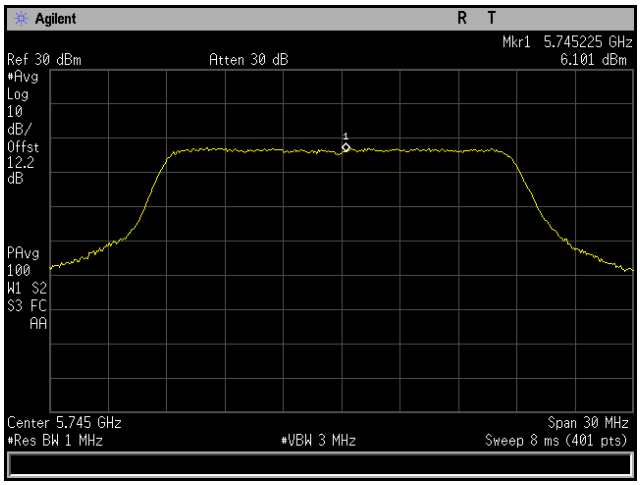

Plot 279. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH2

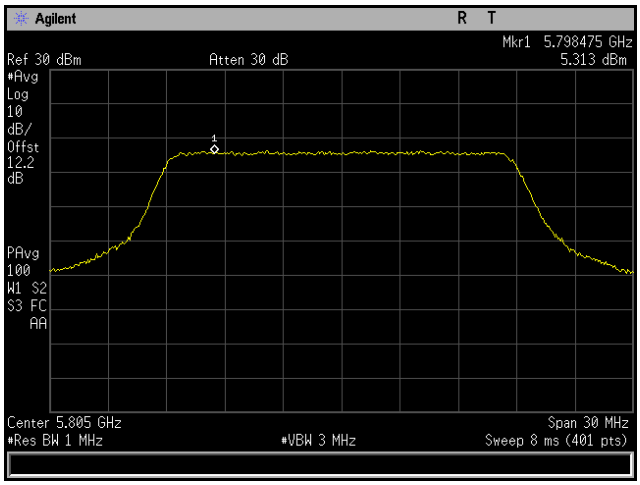

Plot 280. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH2

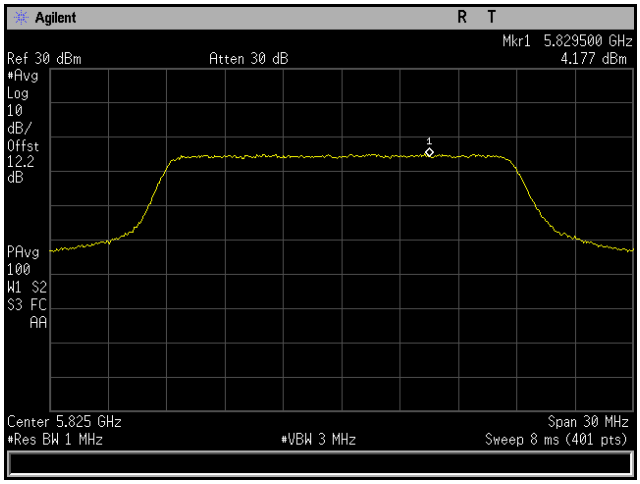

Plot 281. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH2

Power Spectral Density, 802.11n 20 MHz, 6x8, CH3

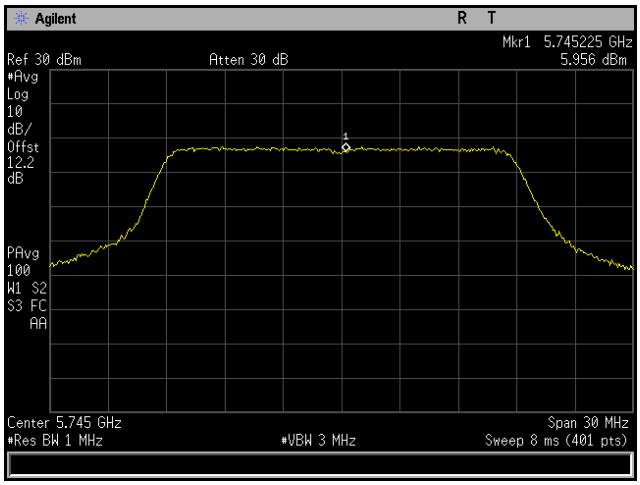

Plot 282. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH3

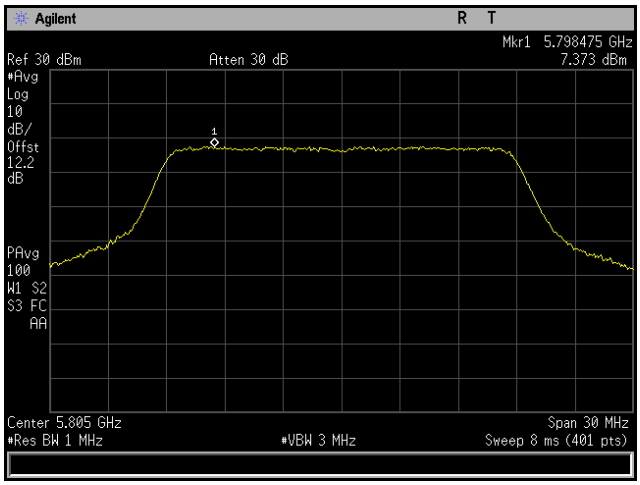

Plot 283. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH3

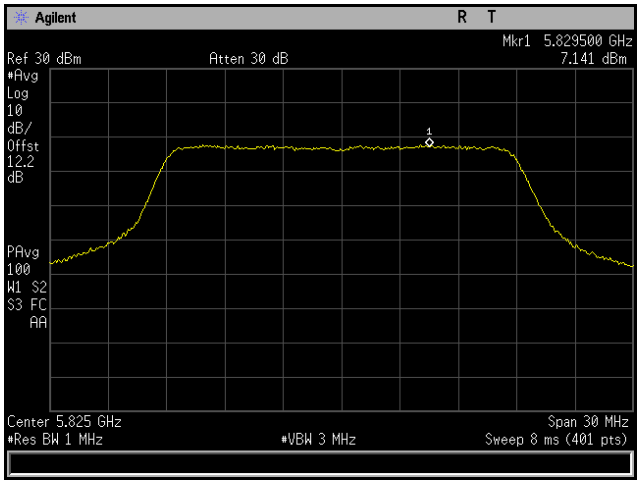

Plot 284. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11n 20 MHz, 6x8, CH4

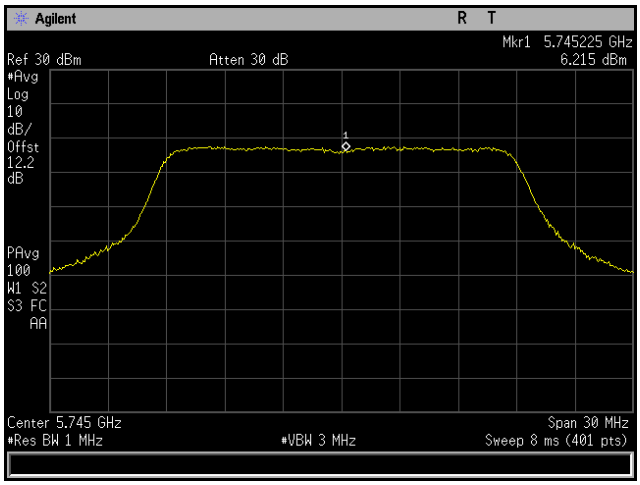

Plot 285. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH4

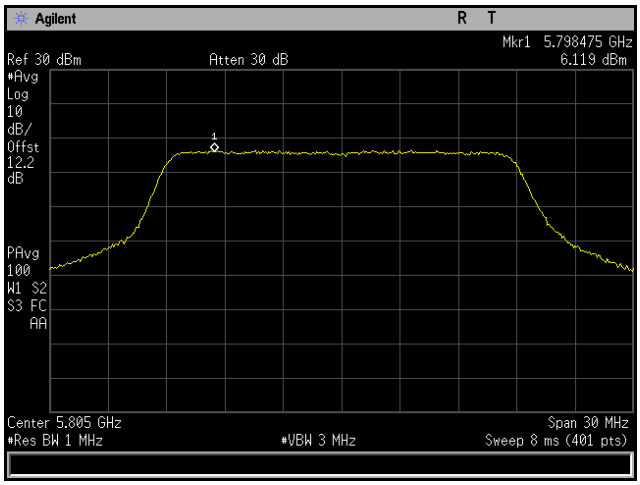

Plot 286. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH4

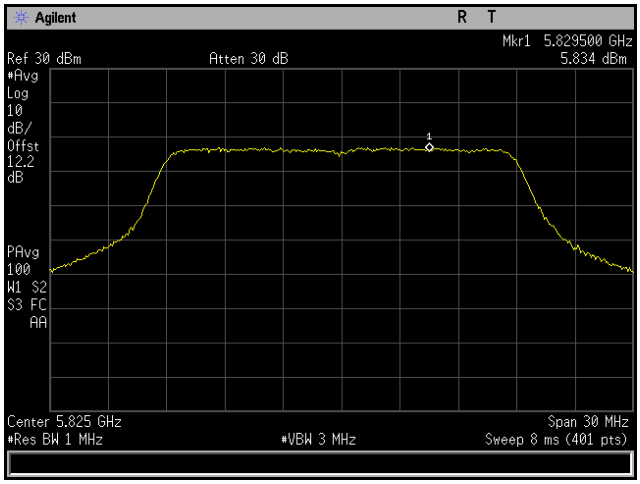

Plot 287. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11n 20 MHz, 6x8, CH5

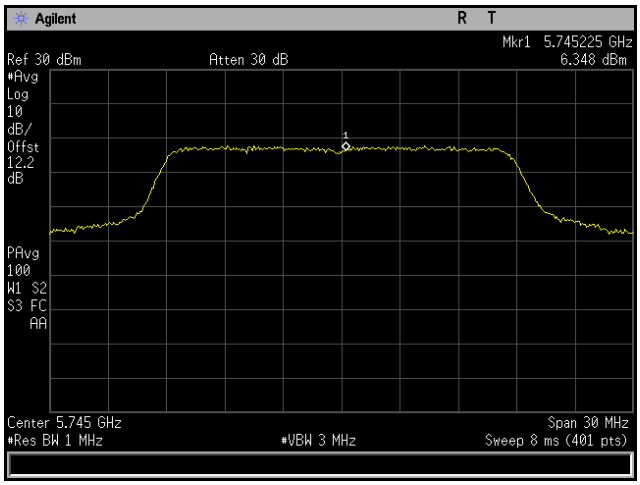

Plot 288. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH5

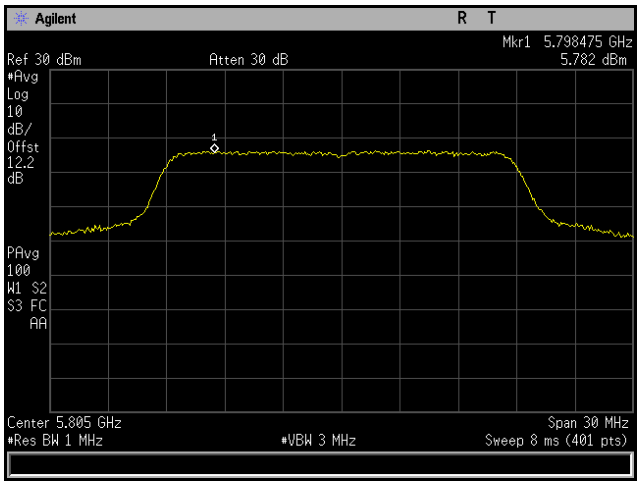

Plot 289. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH5

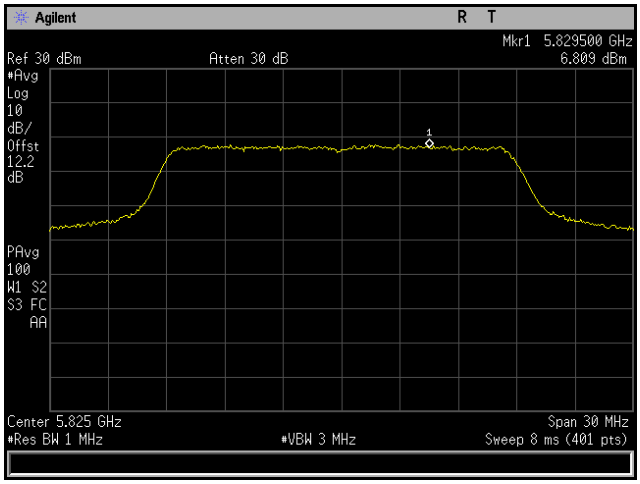

Plot 290. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11n 20 MHz, 6x8, CH6

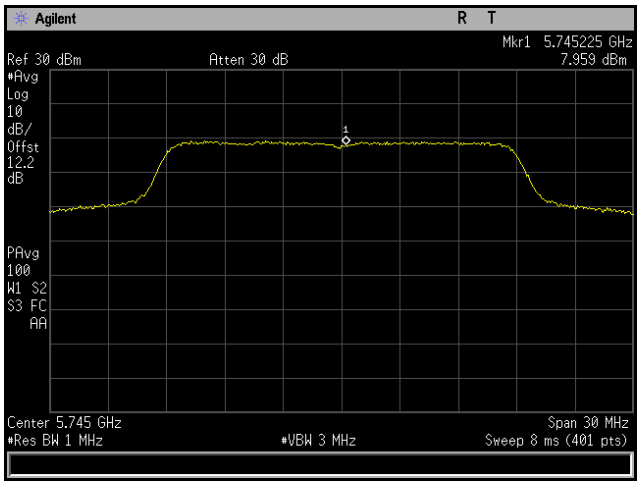

Plot 291. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH6

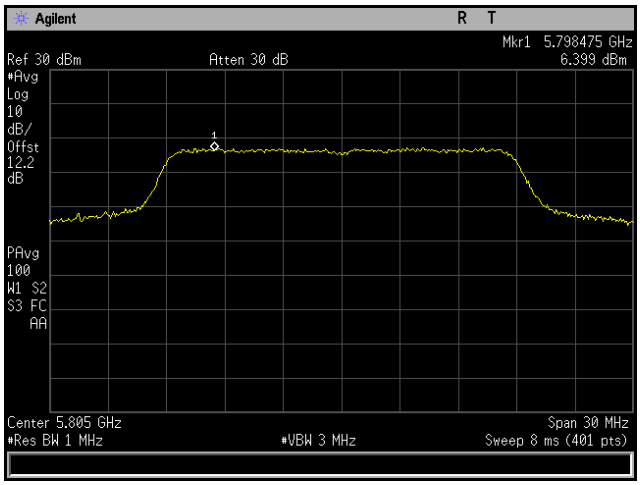

Plot 292. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH6

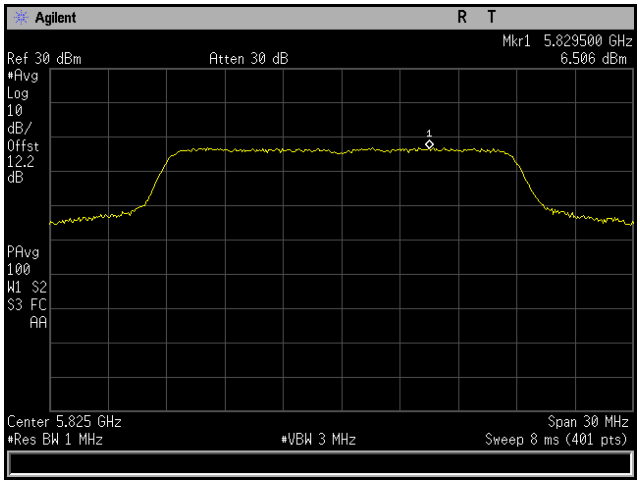

Plot 293. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11n 20 MHz, 6x8, CH7

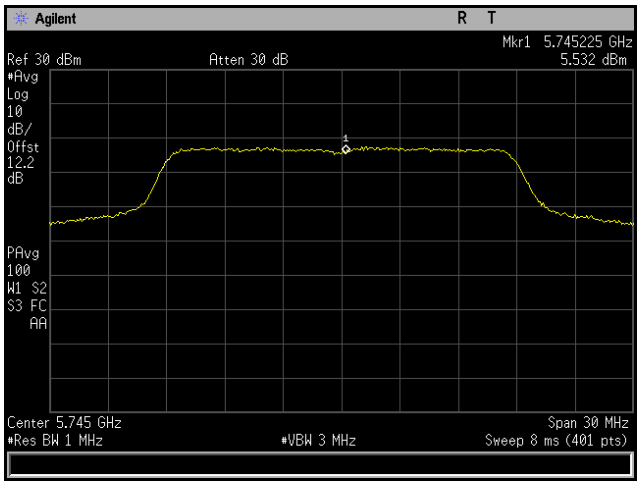

Plot 294. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0 NSS1, CH7

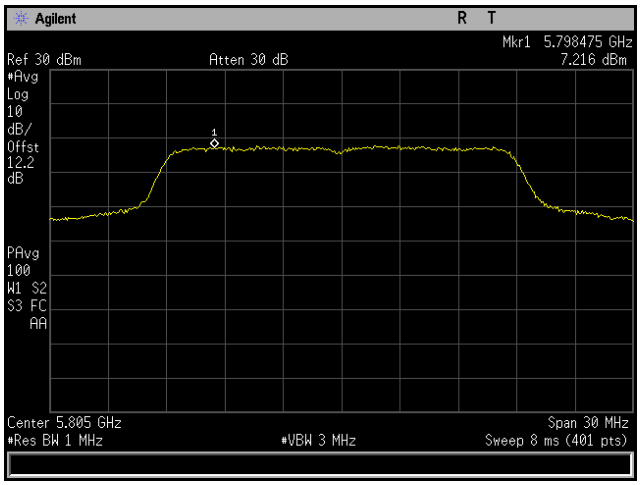

Plot 295. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0 NSS1, CH7

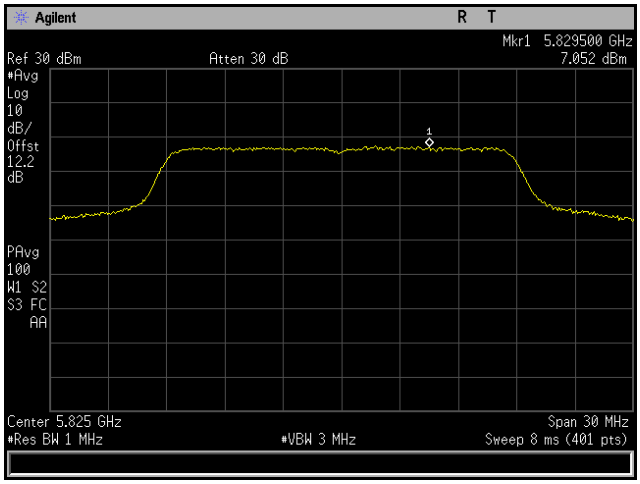

Plot 296. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0 NSS1, CH7

Power Spectral Density, 802.11n 40 MHz, 6x8, CH2

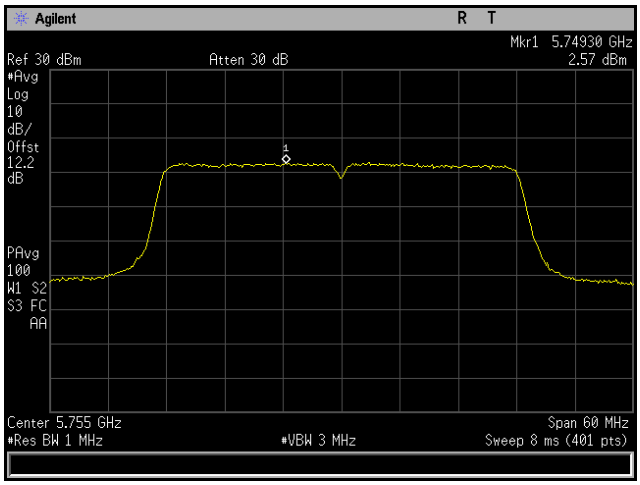

Plot 297. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH2

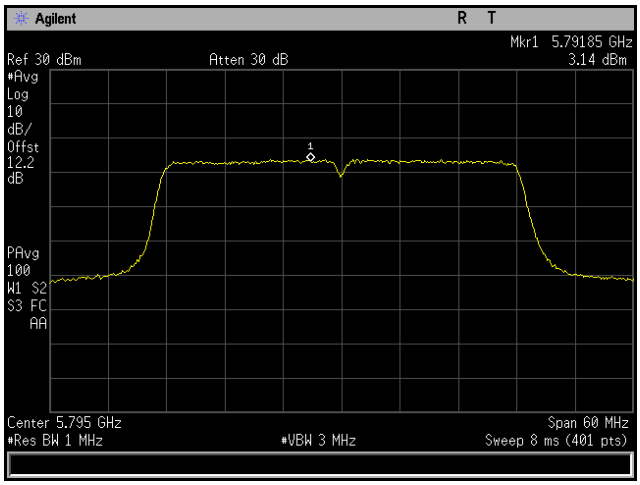

Plot 298. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH2

Power Spectral Density, 802.11n 40 MHz, 6x8, CH3

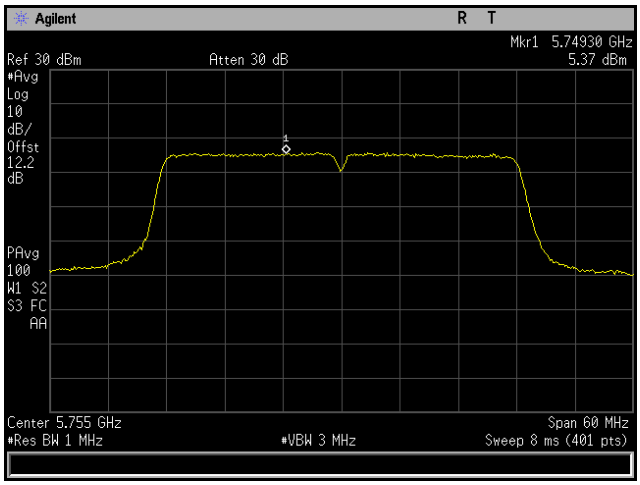

Plot 299. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH3

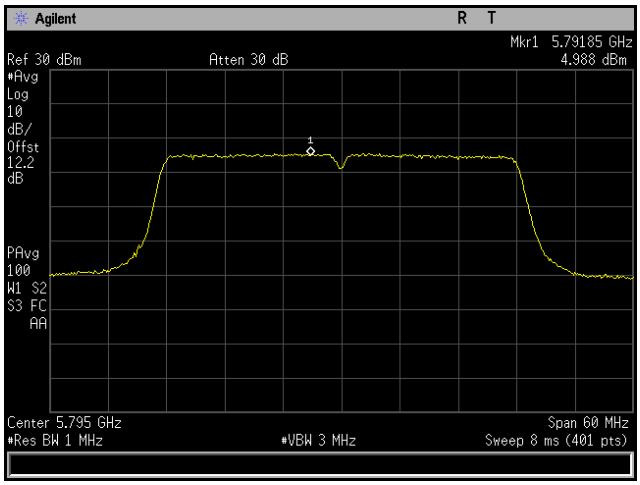

Plot 300. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH3

Power Spectral Density, 802.11n, 6x8, CH4

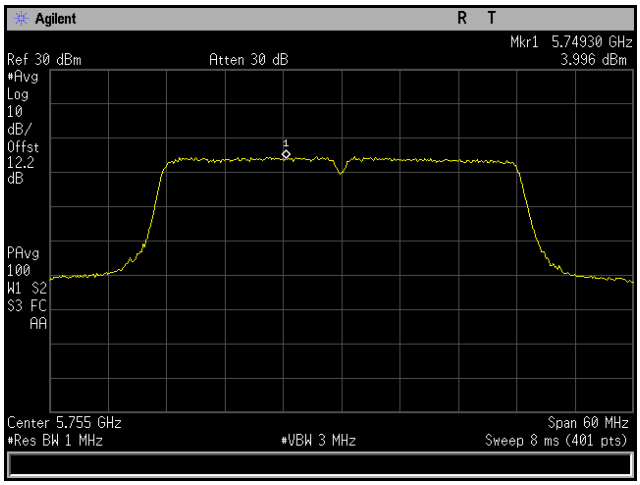

Plot 301. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH4

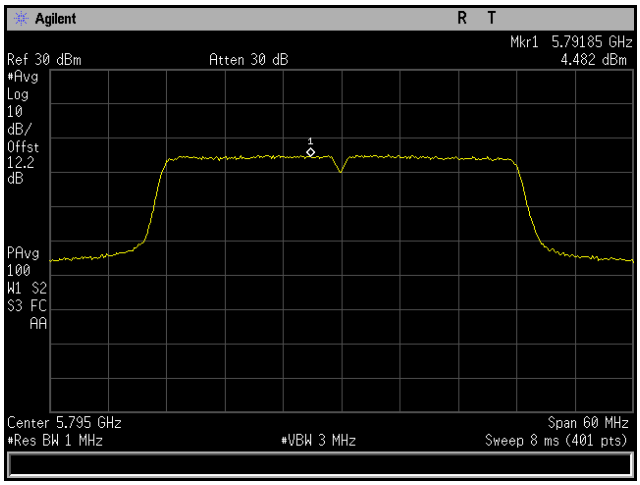

Plot 302. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH4

Power Spectral Density, 802.11n, 6x8, CH5

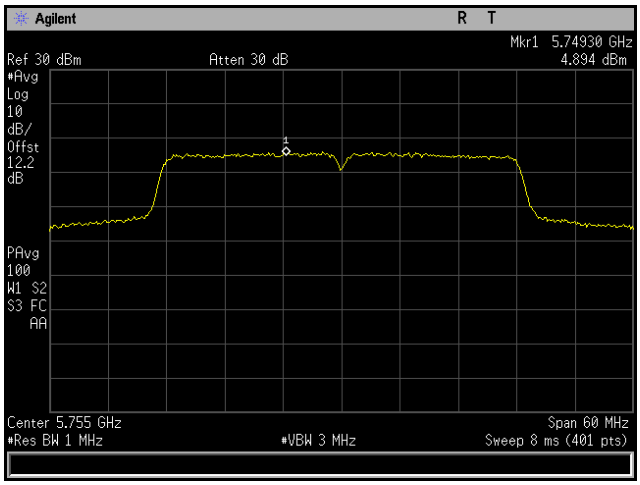

Plot 303. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH5

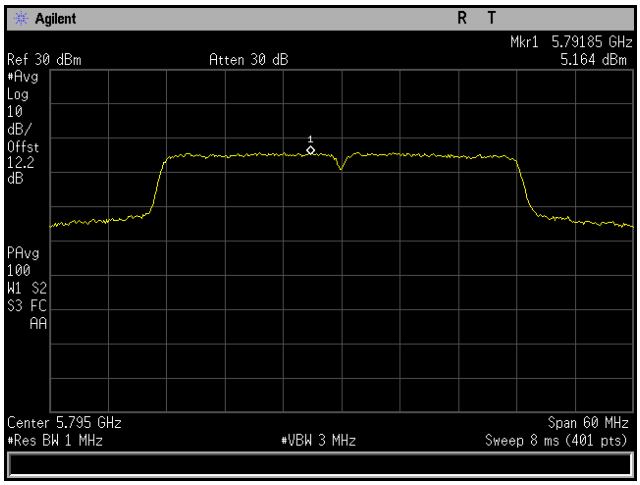

Plot 304. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH5

Power Spectral Density, 802.11n, 6x8, CH6

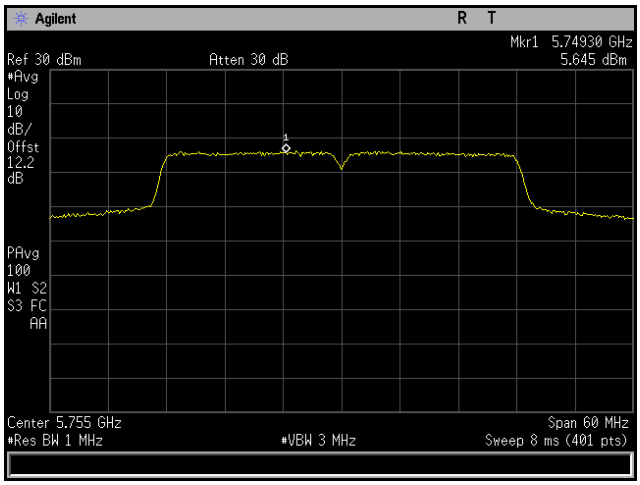

Plot 305. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH6

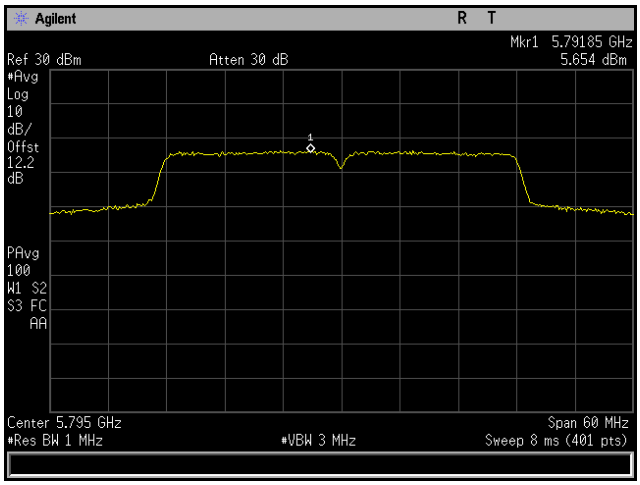

Plot 306. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH6

Power Spectral Density, 802.11n, 6x8, CH7

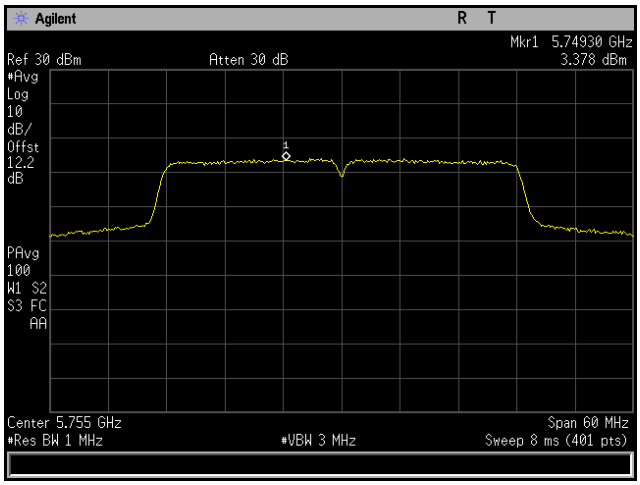

Plot 307. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0 NSS1, CH7

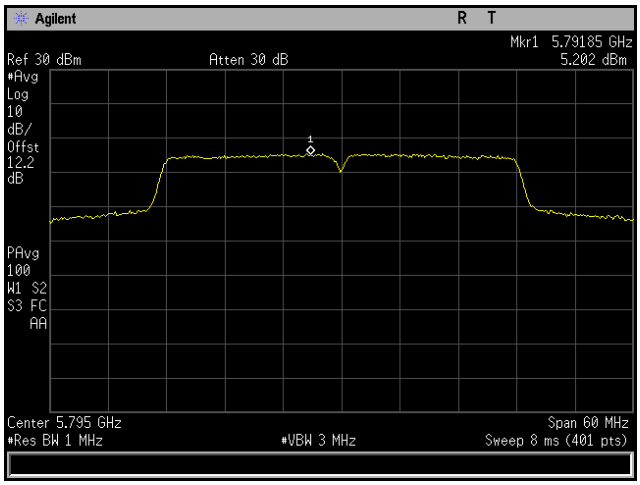

Plot 308. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0 NSS1, CH7

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(b)(4) & (6 – 7) Undesirable Emissions

Test Requirements:

§ 15.407(b)(4): For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of −17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of −27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure:

The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v01. The equation, **EIRP= E + 20 log D – 104.8** was used to convert field strength to EIRP (**E** = field strength (dBµV/m) and **D** = Reference measurement distance**).**

For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209.

As an alternative, according to FCC KDB 789033 D02 General UNII Test Procedure New Rules v01, all emissions above 1 GHz that comply with the peak and average limits of 15.209 satisfy the requirements of unwanted emissions in 15.407.

Test Results:

For below 1 GHz, the EUT was compliant the requirements of this section. The worst case was reported.

For above 1 GHz, the EUT was compliant with the requirements of this section.

Only the noise floor was observed above 18GHz

Test Engineer(s): Hadid Jones

Test Date(s): 08/12/16

Radiated Spurious Emissions

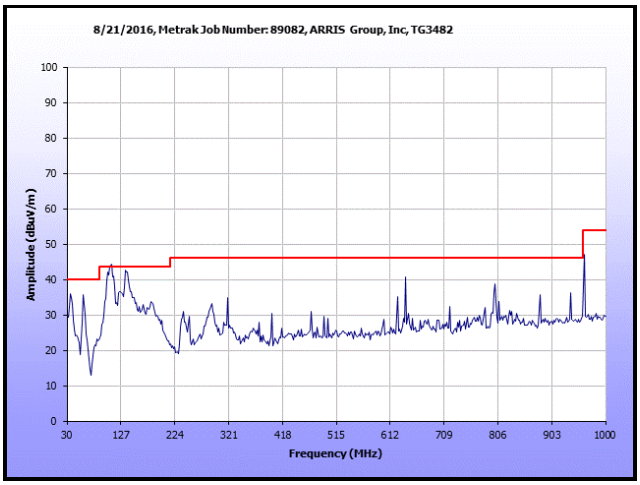

Plot 309. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio Off

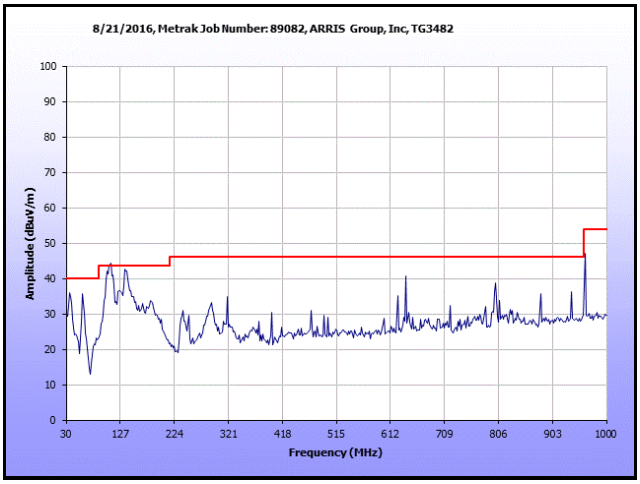

Plot 310. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio On

Radiated Spurious Emissions, Mask, 802.11a, 4x8

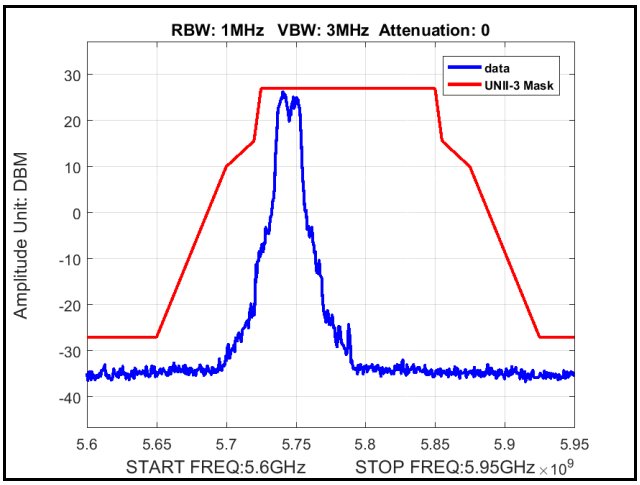

Plot 311. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M

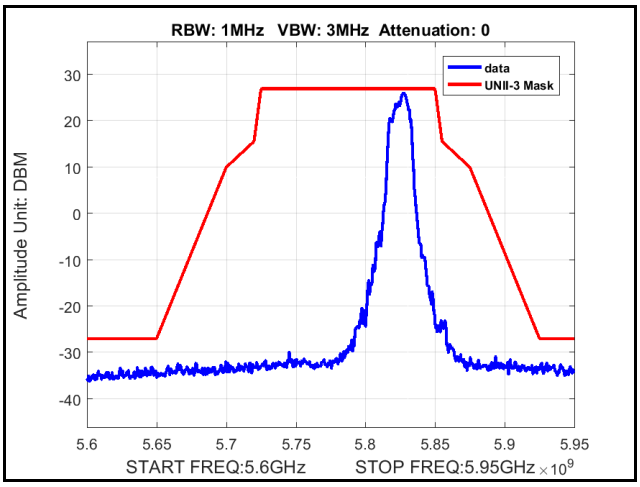

Plot 312. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M

Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, 4x8

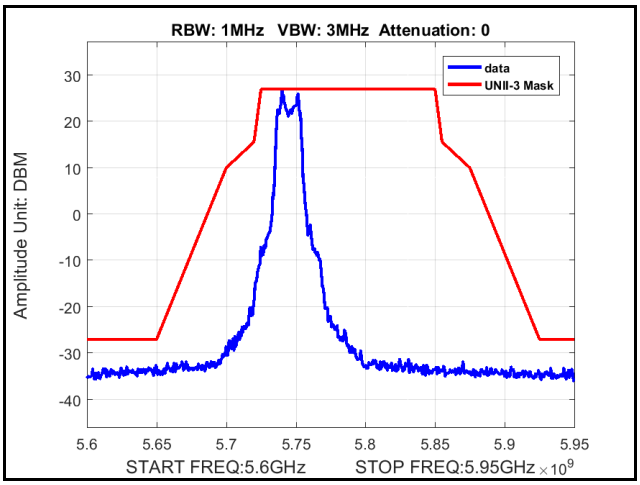

Plot 313. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0

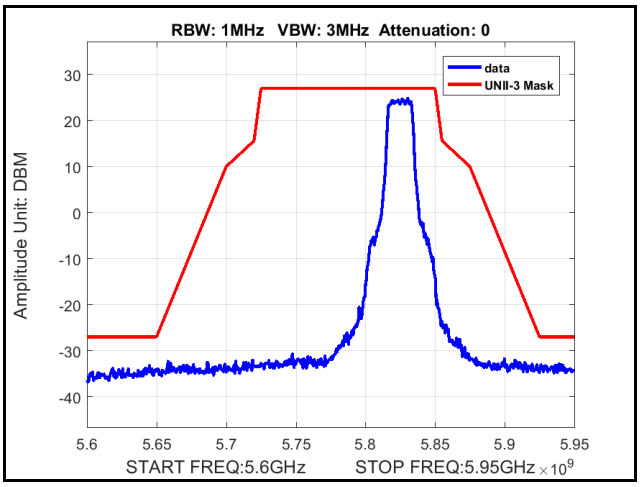

Plot 314. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0

Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, 4x8

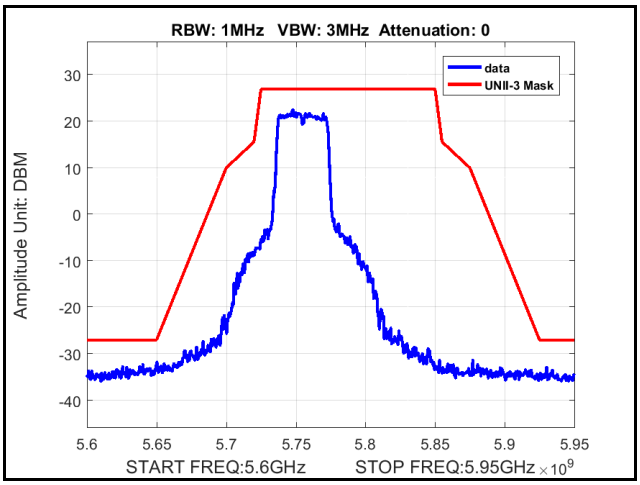

Plot 315. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0

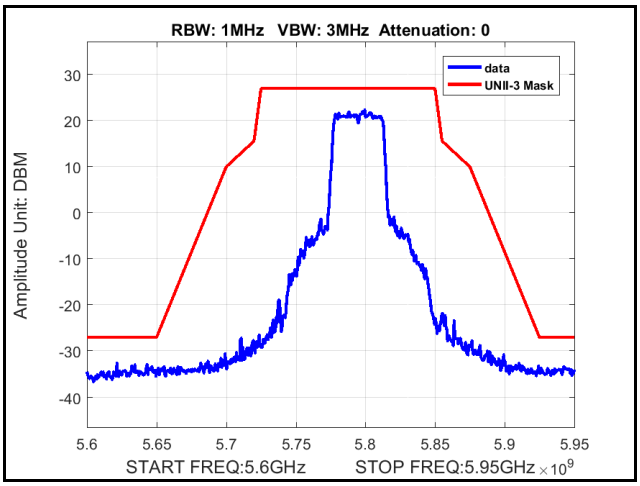

Plot 316. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0

Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, 4x8

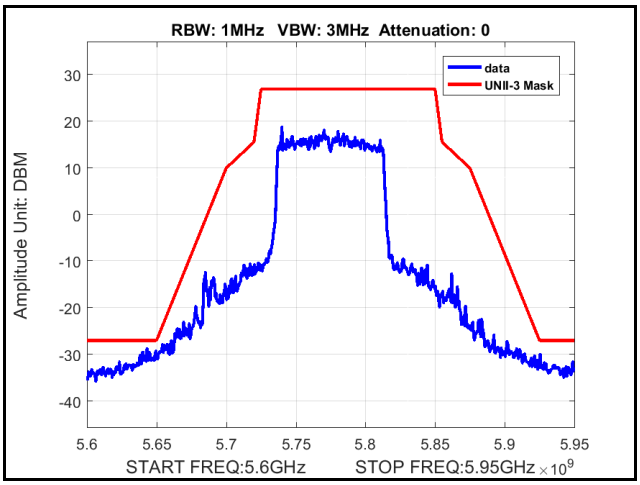

Plot 317. Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0

Radiated Spurious Emissions, Mask, 802.11n 20 MHz, 4x8

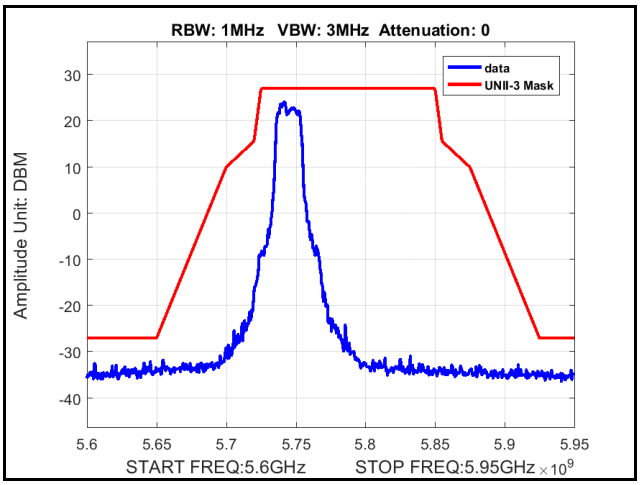

Plot 318. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0

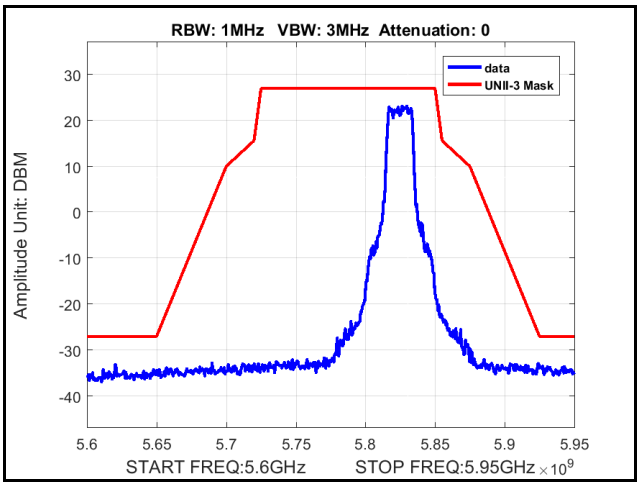

Plot 319. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0

Radiated Spurious Emissions, Mask, 802.11n 40 MHz, 4x8

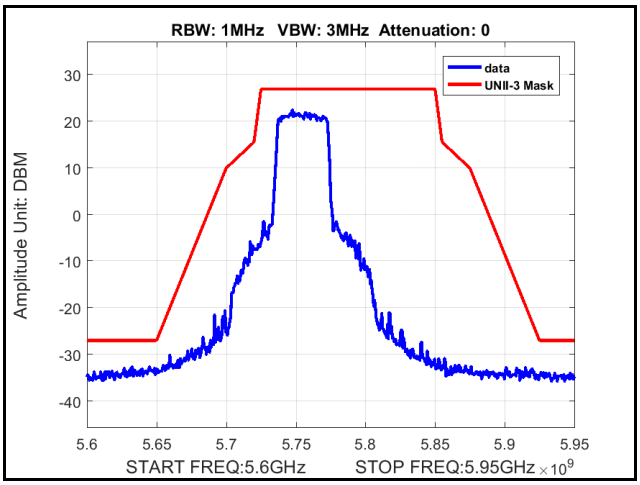

Plot 320. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0

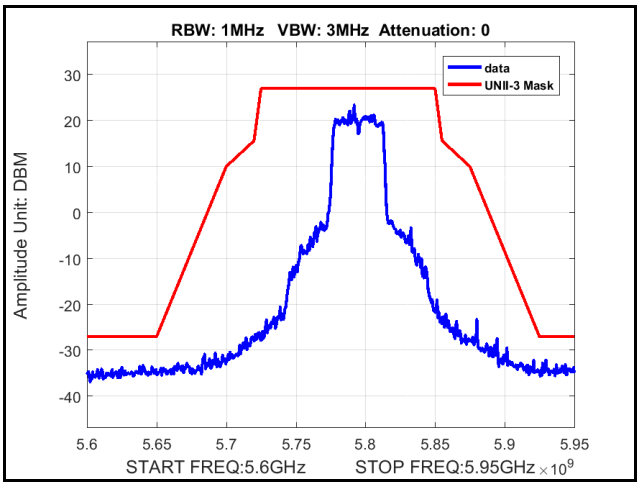

Plot 321. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0

Radiated Spurious Emissions, Mask, 802.11a, 6x8

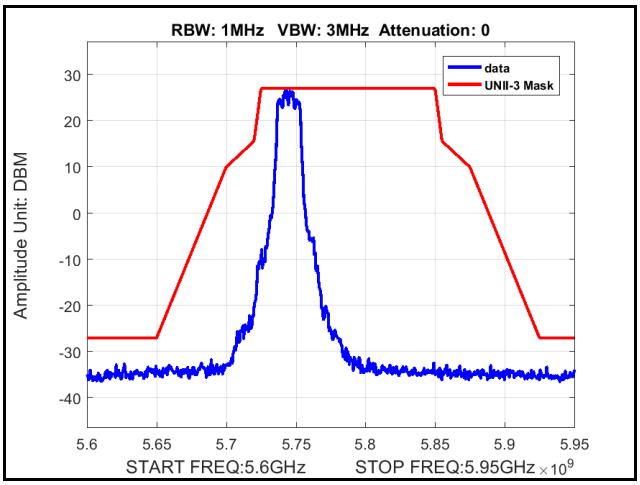

Plot 322. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M

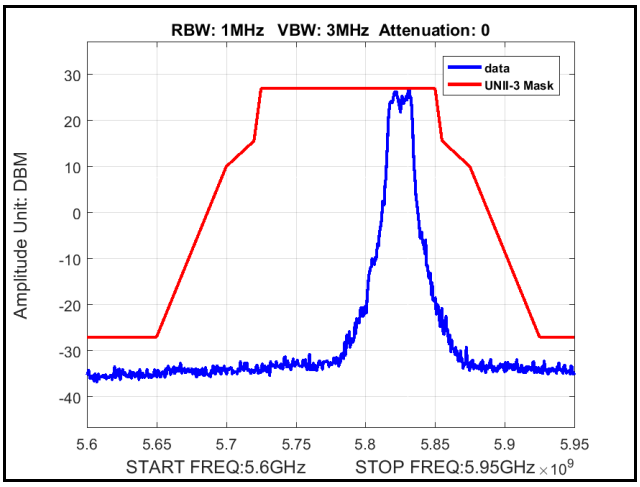

Plot 323. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M

Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, 6x8

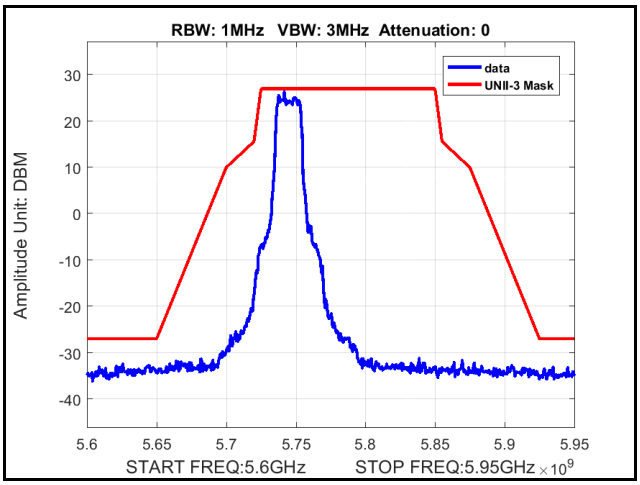

Plot 324. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, NSS1 MCS0

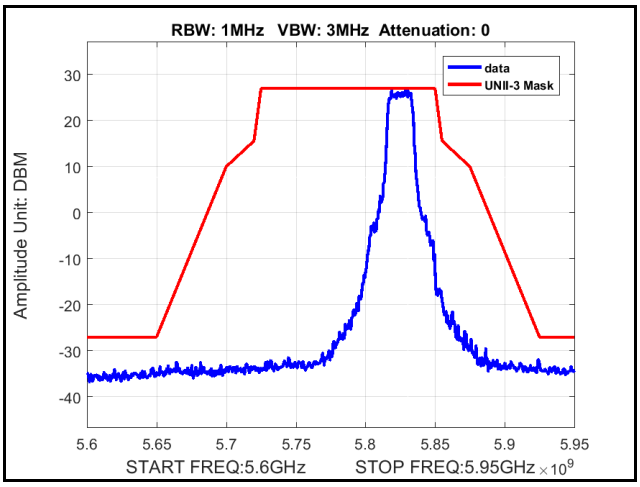

Plot 325. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, NSS1 MCS0

Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, 6x8

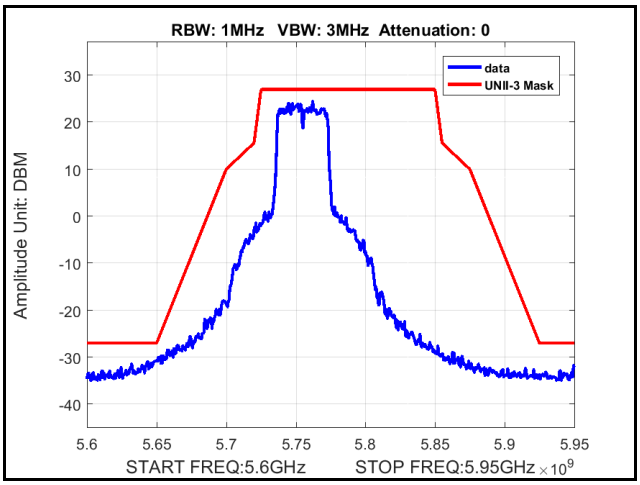

Plot 326. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, NSS1 MCS0

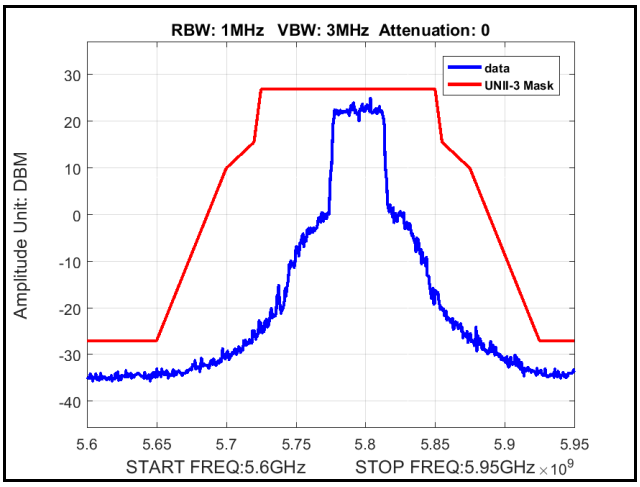

Plot 327. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, NSS1 MCS0

Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, 6x8

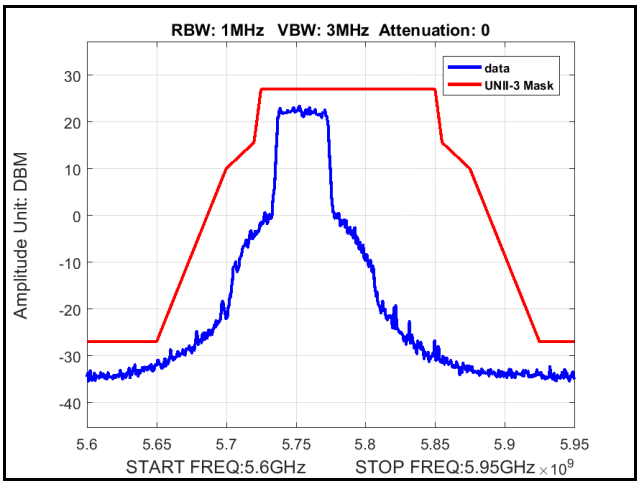

Plot 328. Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, NSS1 MCS0

Radiated Spurious Emissions, Mask, 802.11n 20 MHz, 6x8

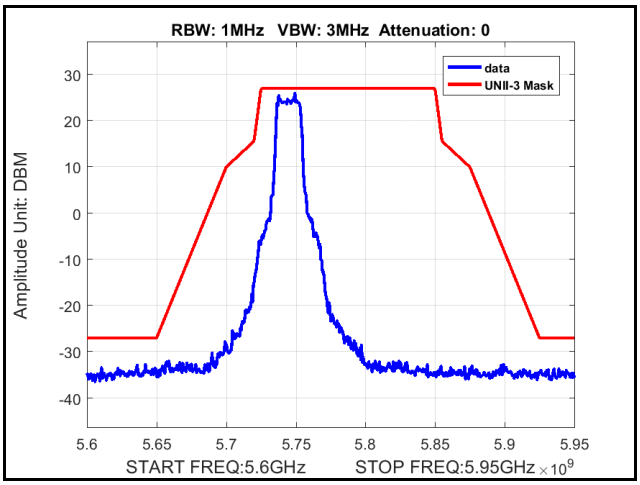

Plot 329. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0

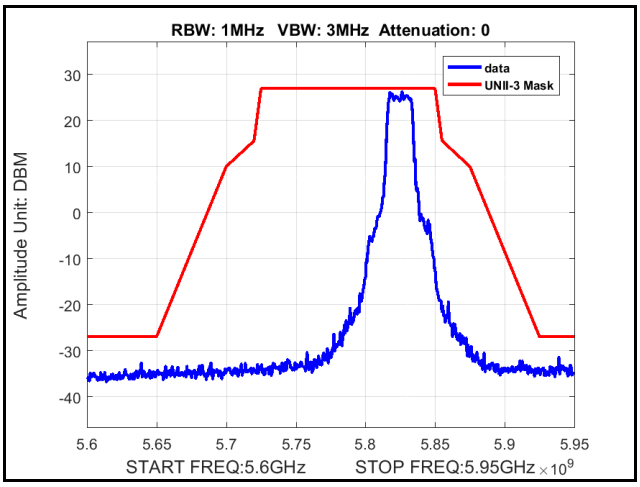

Plot 330. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0

Radiated Spurious Emissions, Mask, 802.11n 40 MHz, 6x8

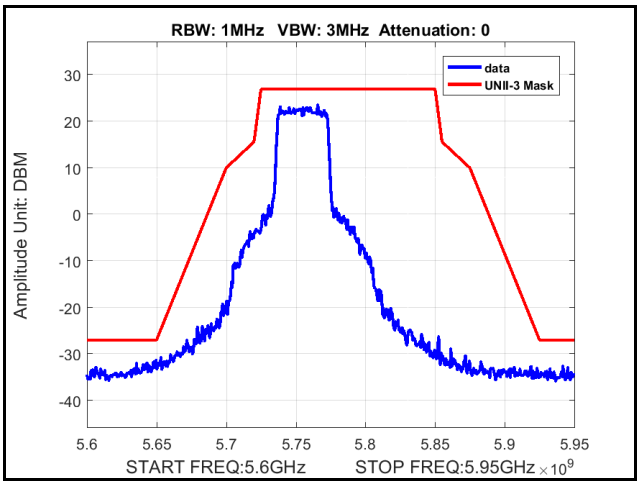

Plot 331. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0

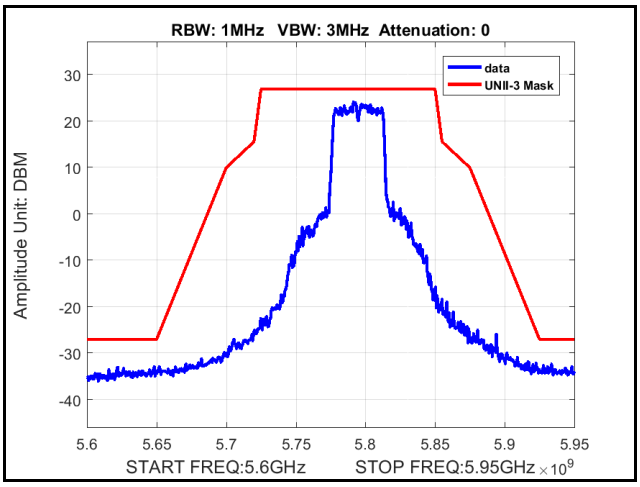

Plot 332. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0

Radiated Spurious Emissions, 802.11a, 4x8

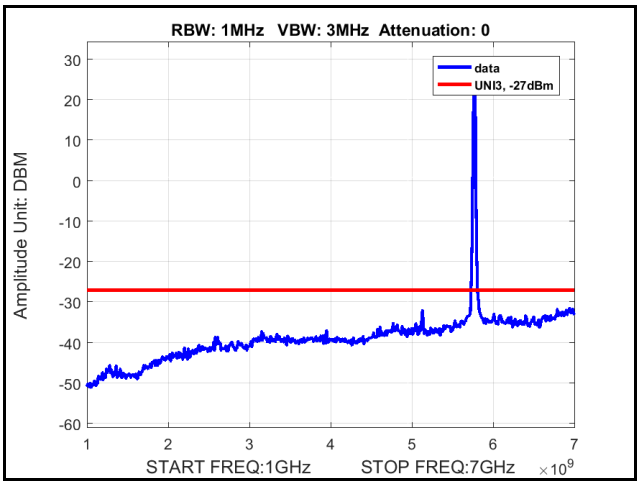

Plot 333. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, 1 GHz – 7 GHz

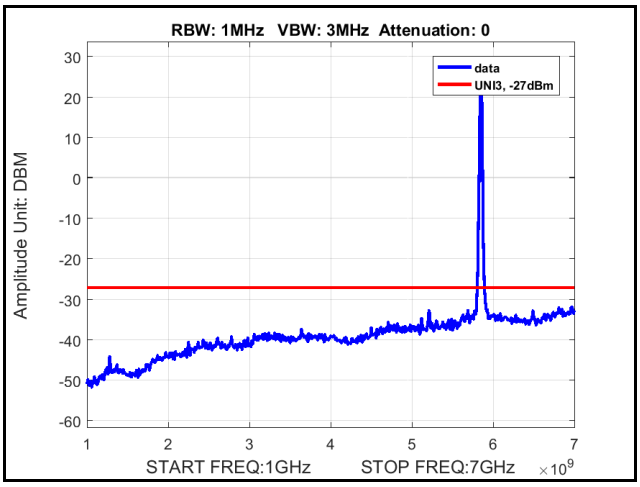

Plot 334. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11ac 20 MHz, 4x8

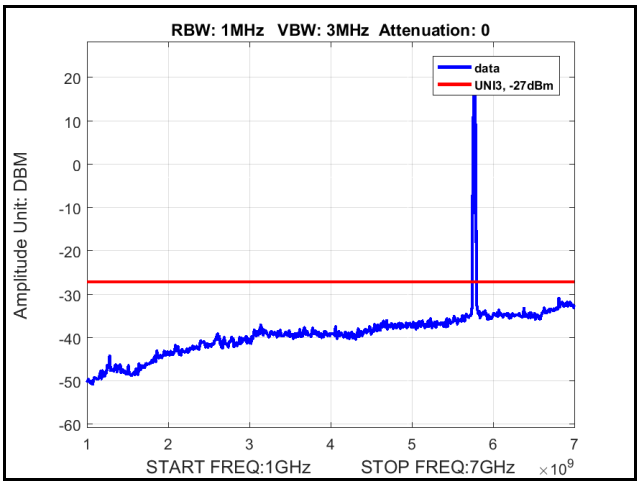

Plot 335. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz

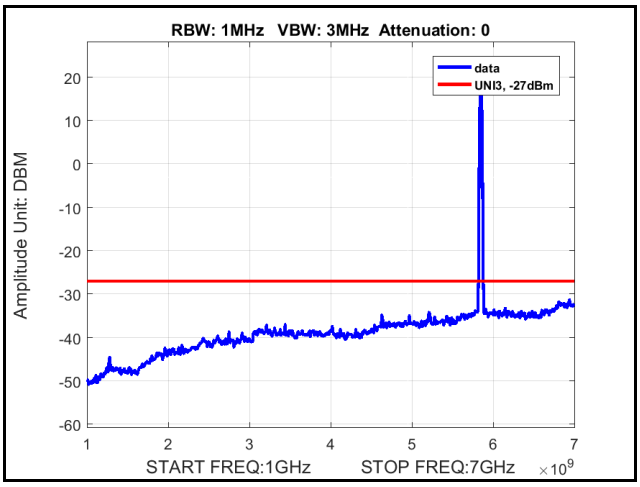

Plot 336. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11ac 40 MHz, 4x8

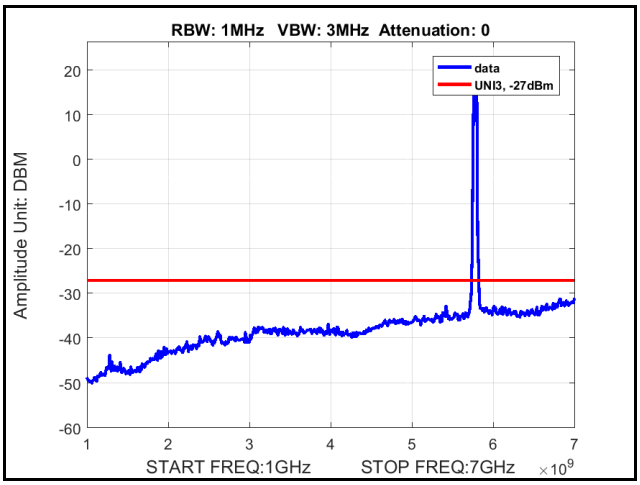

Plot 337. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz

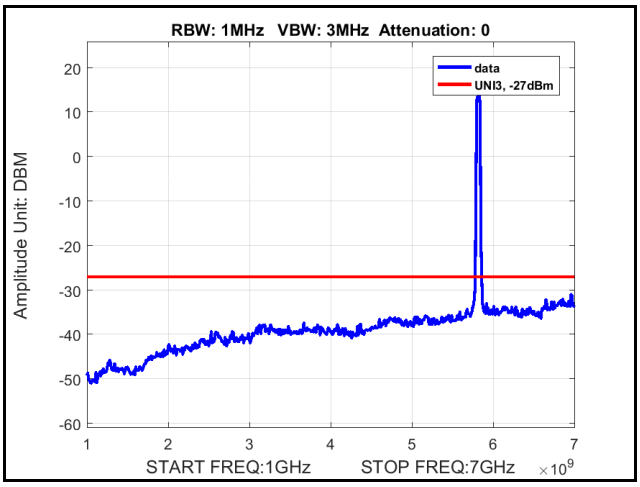

Plot 338. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11ac 80 MHz, 4x8

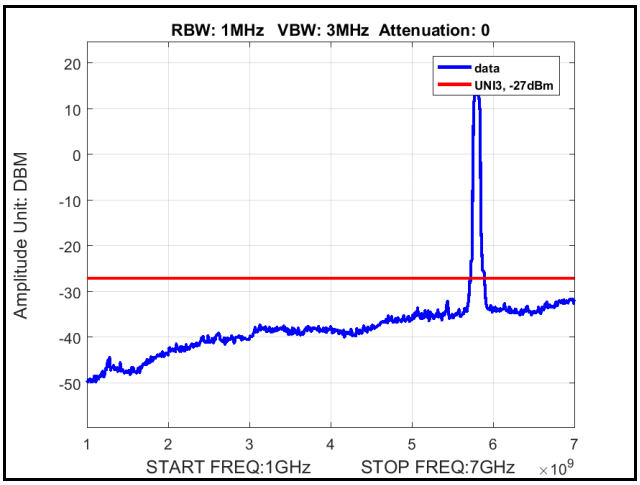

Plot 339. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11n 20 MHz, 4x8

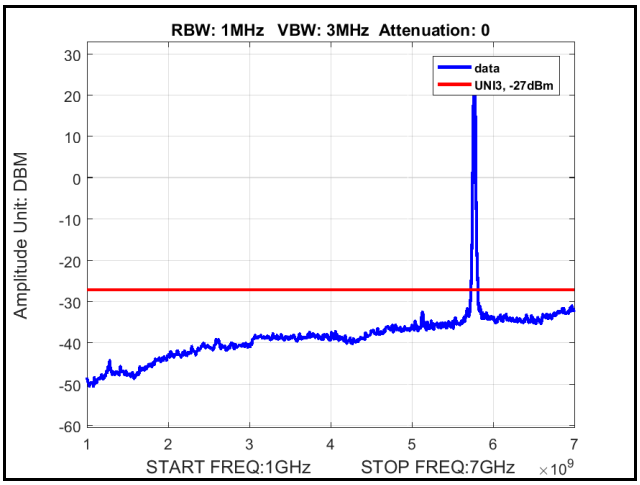

Plot 340. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0, 1 GHz – 7 GHz

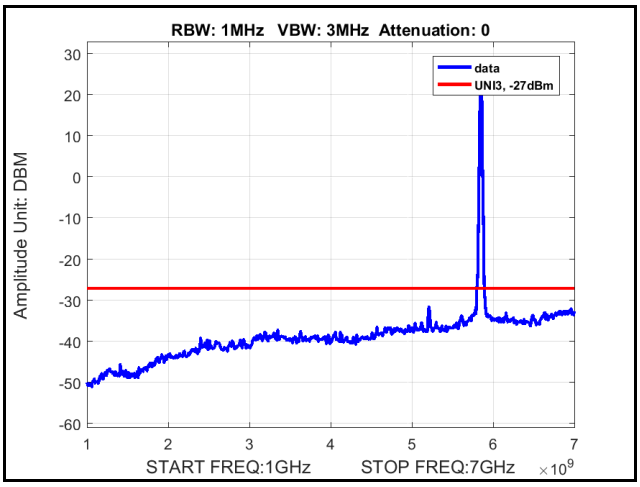

Plot 341. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11n 40 MHz, 4x8

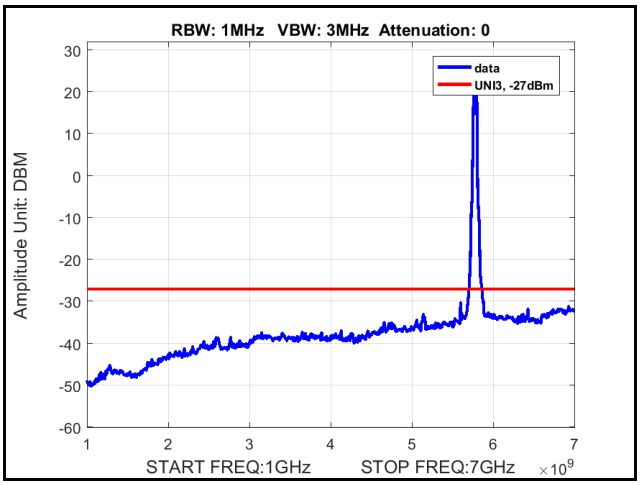

Plot 342. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0, 1 GHz – 7 GHz

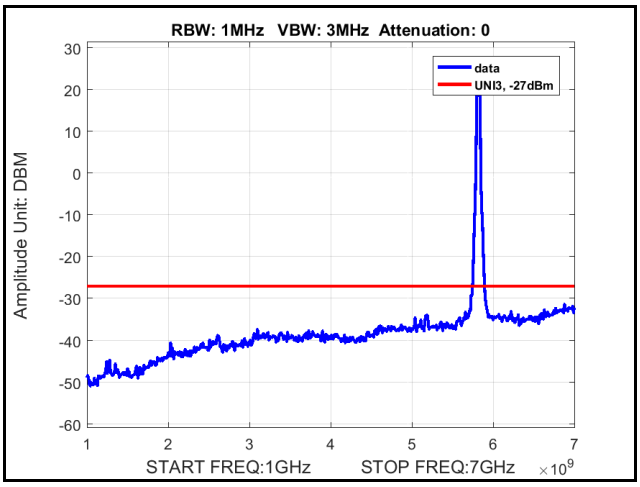

Plot 343. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11a, 6x8

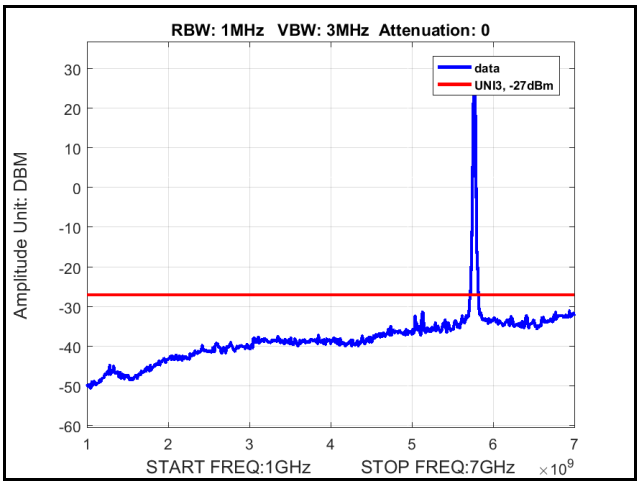

Plot 344. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M, 1 GHz – 7 GHz

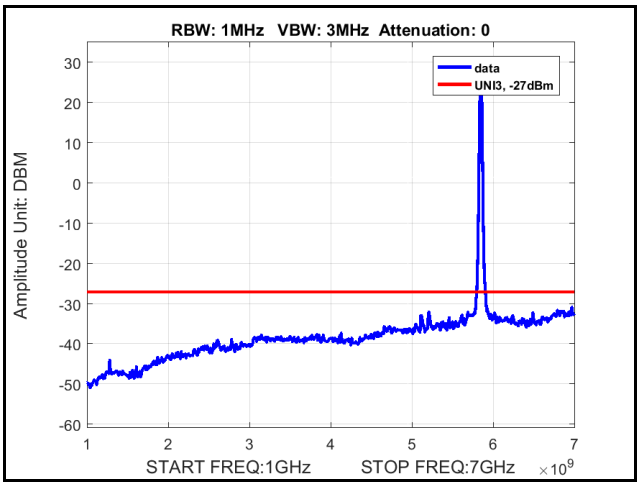

Plot 345. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11ac 20 MHz, 6x8

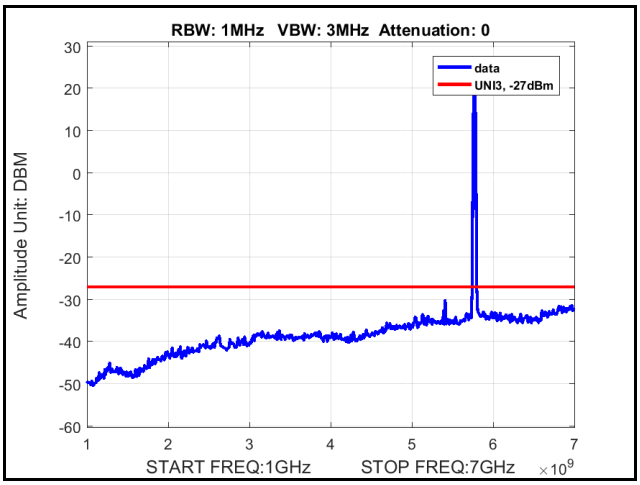

Plot 346. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, NSS1 MCS0, 1 GHz – 7 GHz

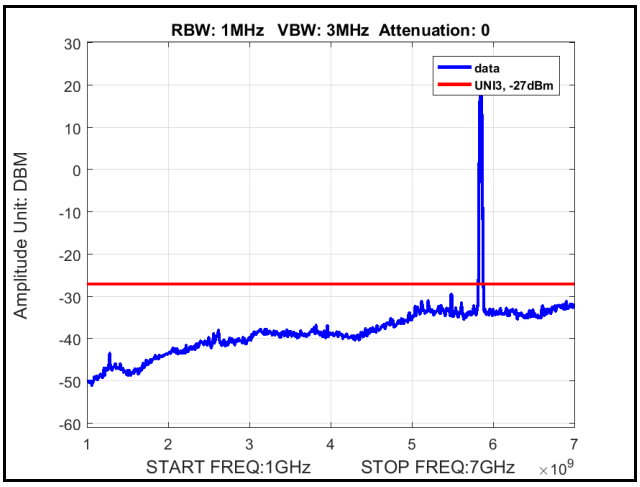

Plot 347. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, NSS1 MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11ac 40 MHz, 6x8

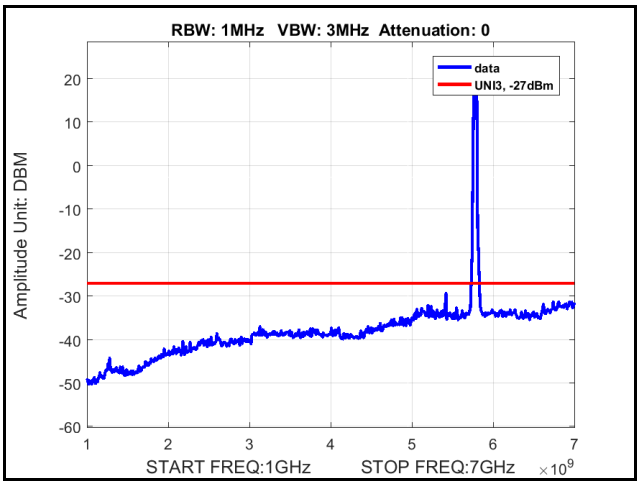

Plot 348. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, NSS1 MCS0, 1 GHz – 7 GHz

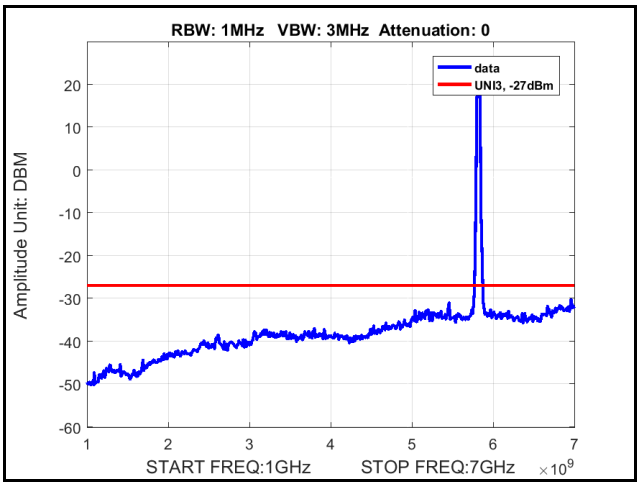

Plot 349. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, NSS1 MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11ac 80 MHz, 6x8

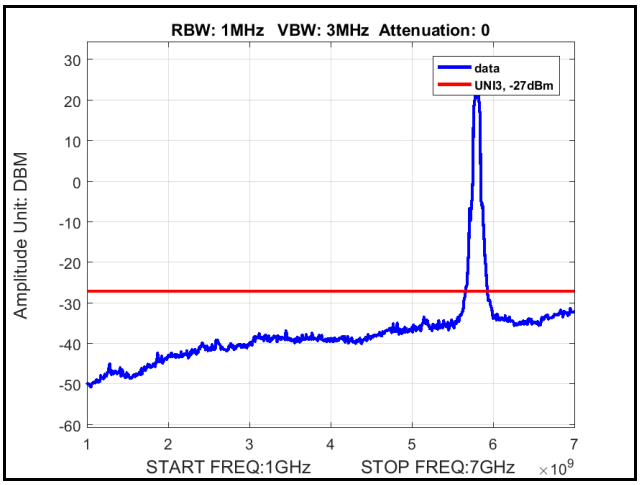

Plot 350. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, NSS1 MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11n 20 MHz, 6x8

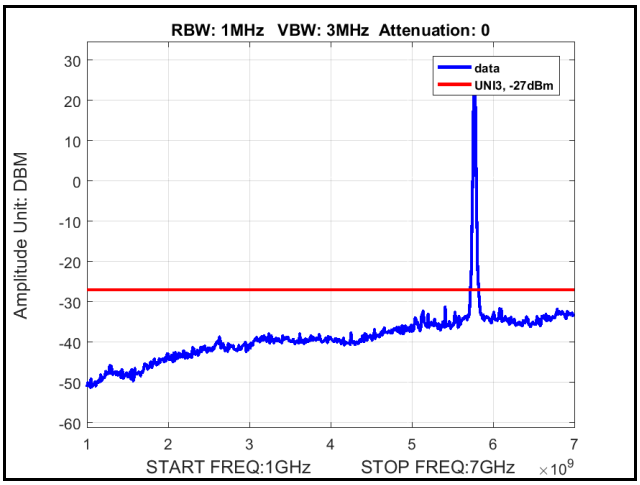

Plot 351. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0, 1 GHz – 7 GHz

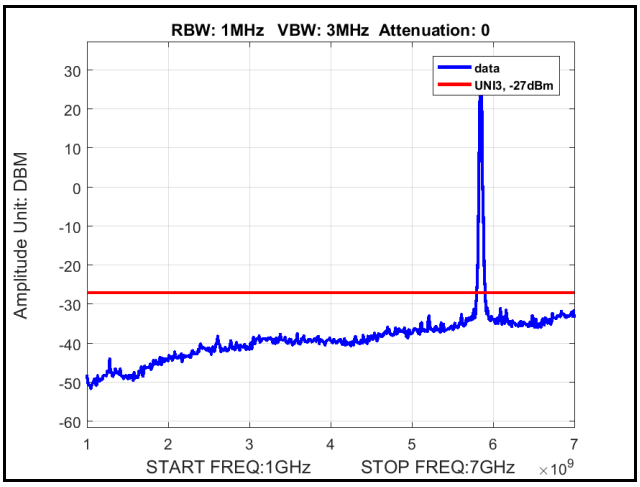

Plot 352. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0, 1 GHz – 7 GHz

Radiated Spurious Emissions, 802.11n 40 MHz, 6x8

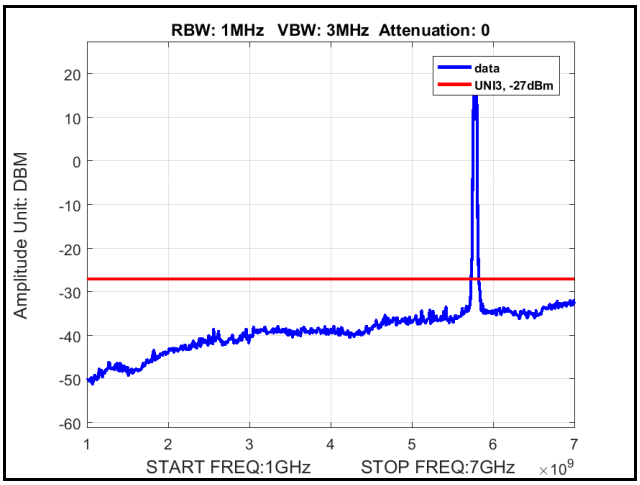

Plot 353. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0, 1 GHz – 7 GHz

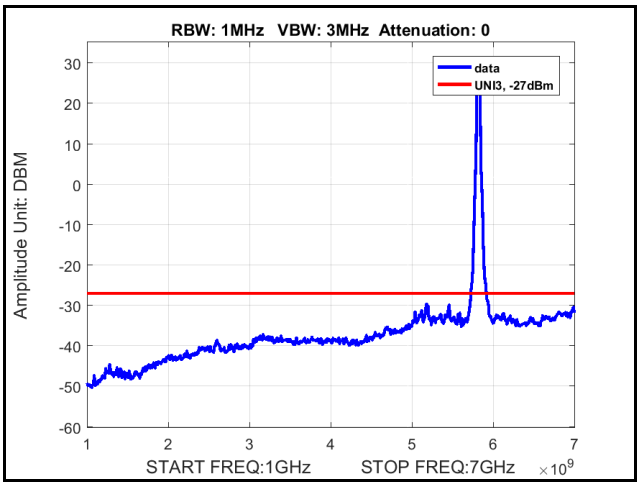

Plot 354. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0, 1 GHz – 7 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(6) Conducted Emissions

Test Requirement(s): **§ 15.407 (b)(6):** Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dBμV)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω/50 μH Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. Scans were performed with the transmitter on.

Test Results: The EUT was compliant with requirements of this section.

Test Engineer(s): Hadid Jones

Test Date(s): 08/21/16

15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBµV) QP	Cable Loss (dB)	Corrected Measurement (dBµV) QP	Limit (dBµV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBµV) Avg.	Cable Loss (dB)	Corrected Measurement (dBµV) AVG	Limit (dBµV) AVG	Margin (dB) AVG
0.155	58.48	0	58.48	65.73	-7.25	51.78	0	51.78	55.73	-3.95
2.53	49.96	0	49.96	56	-6.04	37.71	0	37.71	46	-8.29
6.79	48.6	0	48.6	60	-11.4	35.93	0	35.93	50	-14.07
20.18	51.66	0	51.66	60	-8.34	46.63	0	46.63	50	-3.37
24.5	40.2	0	40.2	60	-19.8	35.44	0	35.44	50	-14.56
26.88	40.32	0	40.32	60	-19.68	34.78	0	34.78	50	-15.22

Table 14. Conducted Emissions, 15.207(a), Phase Line, Test Results

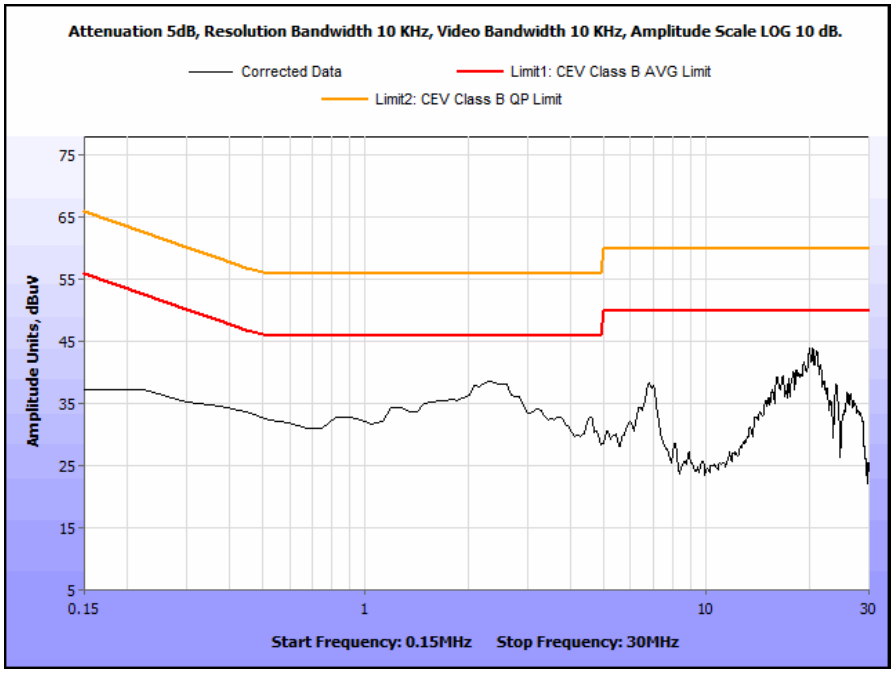

Plot 355. Conducted Emissions, 15.207(a), Phase Line

15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBµV) QP	Cable Loss (dB)	Corrected Measurement (dBµV) QP	Limit (dBµV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBµV) Avg.	Cable Loss (dB)	Corrected Measurement (dBµV) AVG	Limit (dBµV) AVG	Margin (dB) AVG
0.3	46.23	0	46.23	60.24	-14.01	29.56	0	29.56	50.24	-20.68
2.504	47.3	0	47.3	56	-8.7	35.11	0	35.11	46	-10.89
6.6	48.26	0	48.26	60	-11.74	37.59	0	37.59	50	-12.41
20.68	52.32	0	52.32	60	-7.68	46.24	0	46.24	50	-3.76
23.99	46.05	0	46.05	60	-13.95	39.54	0	39.54	50	-10.46
27.32	41.89	0	41.89	60	-18.11	36.44	0	36.44	50	-13.56

Table 15. Conducted Emissions, 15.207(a), Neutral Line, Test Results

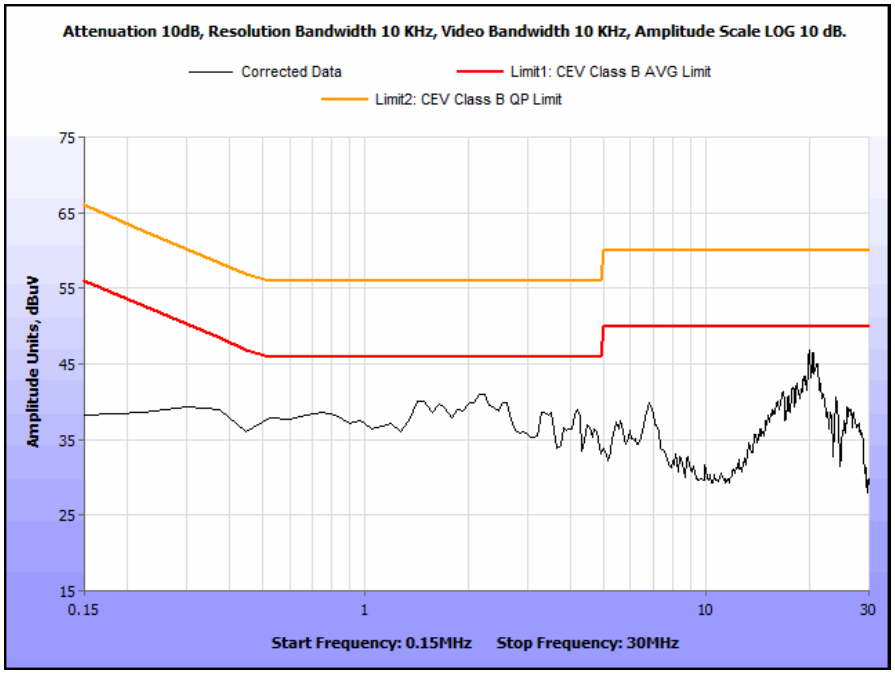

Plot 356. Conducted Emissions, 15.207(a), Neutral Line

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15. 407(e) 6 dB Bandwidth

Test Requirements: **§ 15.407(e):** Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded.

Test Results The 6 dB Bandwidth was compliant with the requirements of this section.

Test Engineer(s): Hadid Jones

Test Date(s): 08/23/16



4x8			
Frequency	**Bandwidth**	**Mode**	**6dB**
Ch 5745M	BW 20M	a mode	16.45
Ch 5745M	BW 20M	ac mode	17.84
Ch 5745M	BW 20M	n mode	17.7
Ch 5805M	BW 20M	a mode	16.53
Ch 5805M	BW 20M	ac mode	17.65
Ch 5805M	BW 20M	n mode	17.61
Ch 5825M	BW 20M	a mode	16.43
Ch 5825M	BW 20M	ac mode	17.7
Ch 5825M	BW 20M	n mode	17.65
Ch 5755M	BW 40M	ac mode	36.46
Ch 5755M	BW 40M	n mode	36.45
Ch 5795M	BW 40M	ac mode	36.35
Ch 5795M	BW 40M	n mode	36.39
Ch 5775M	BW 80M	ac mode	75.74

Table 16. 6 dB Occupied Bandwidth, Test Results, 4x8

6x8			
Frequency	**Bandwidth**	**Mode**	**6dB**
Ch 5745M	BW 20M	a mode	16.45
Ch 5745M	BW 20M	ac mode	17.73
Ch 5745M	BW 20M	n mode	17.62
Ch 5805M	BW 20M	a mode	16.42
Ch 5805M	BW 20M	ac mode	17.67
Ch 5805M	BW 20M	n mode	17.67
Ch 5825M	BW 20M	a mode	16.43
Ch 5825M	BW 20M	ac mode	17.63
Ch 5825M	BW 20M	n mode	17.64
Ch 5755M	BW 40M	ac mode	36.47
Ch 5755M	BW 40M	n mode	36.45
Ch 5795M	BW 40M	ac mode	36.52
Ch 5795M	BW 40M	n mode	36.37
Ch 5775M	BW 80M	ac mode	76.24

Table 17. 6 dB Occupied Bandwidth, Test Results, 6x8

6 dB Occupied Bandwidth, 802.11a, 4x8

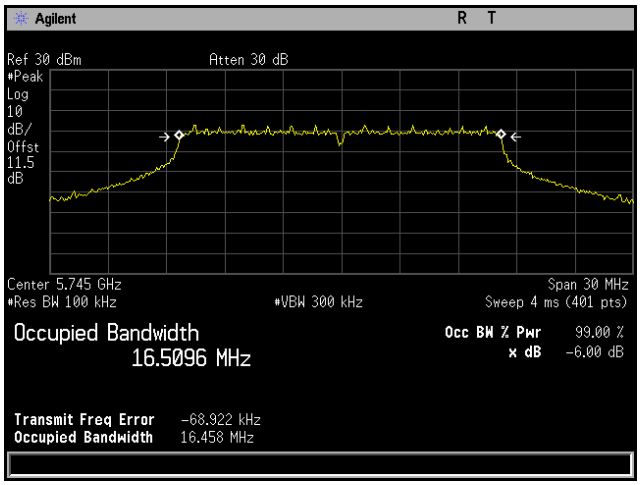

Plot 357. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M

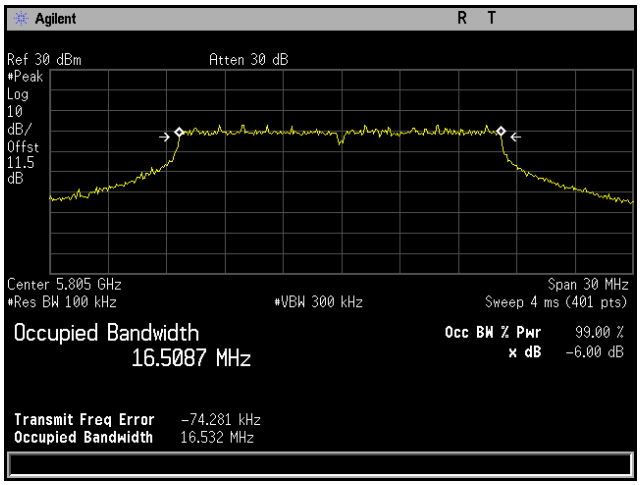

Plot 358. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M

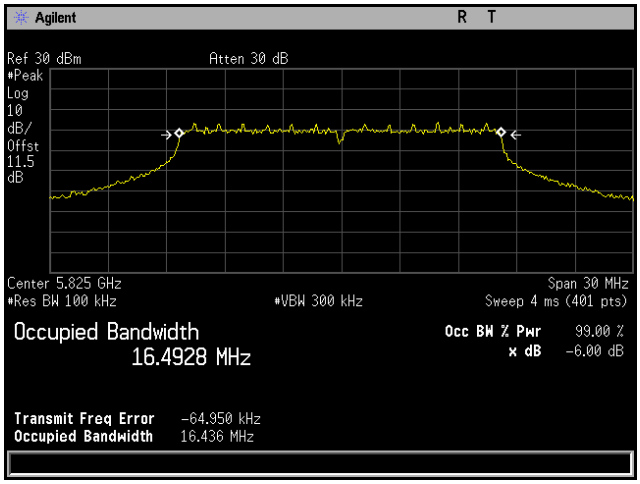

Plot 359. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M

6 dB Occupied Bandwidth, 802.11ac 20 MHz, 4x8

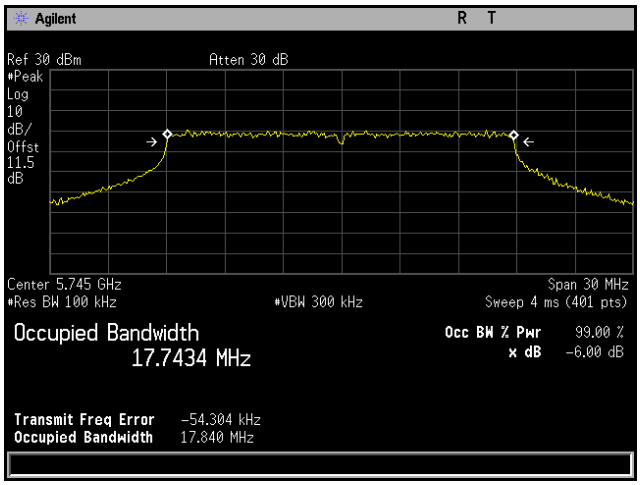

Plot 360. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0

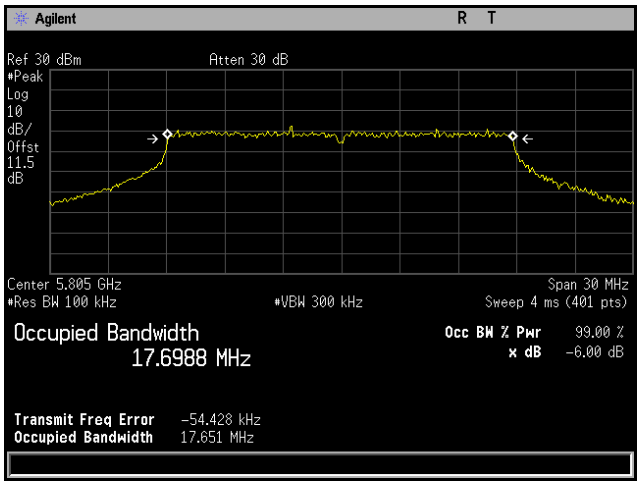

Plot 361. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, NSS1 MCS0

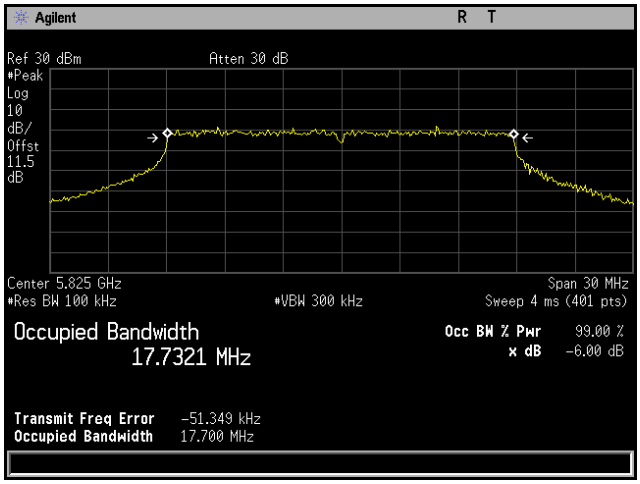

Plot 362. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0

6 dB Occupied Bandwidth, 802.11ac 40 MHz, 4x8

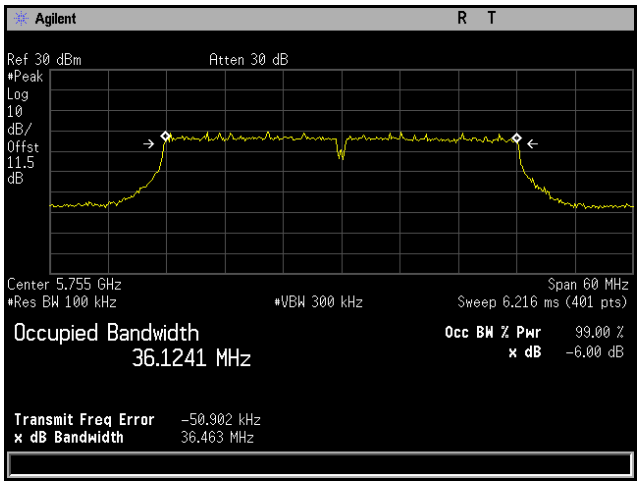

Plot 363. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0

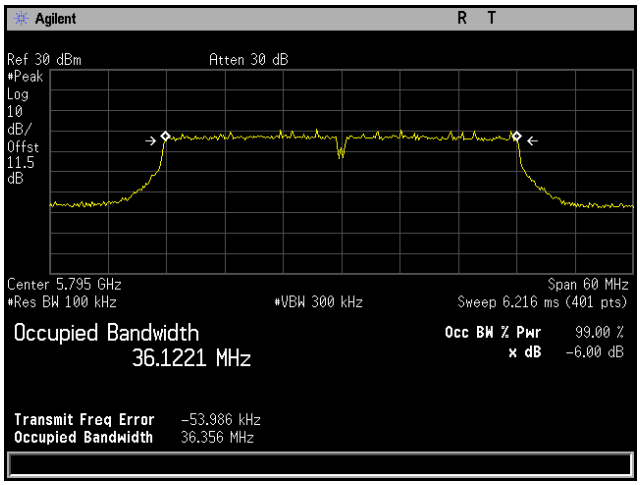

Plot 364. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0

6 dB Occupied Bandwidth, 802.11ac 80 MHz, 4x8

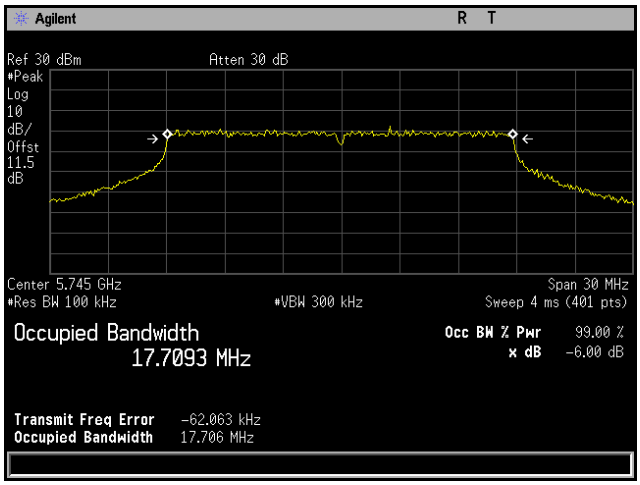

Plot 365. 6 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0

6 dB Occupied Bandwidth, 802.11n 20 MHz, 4x8

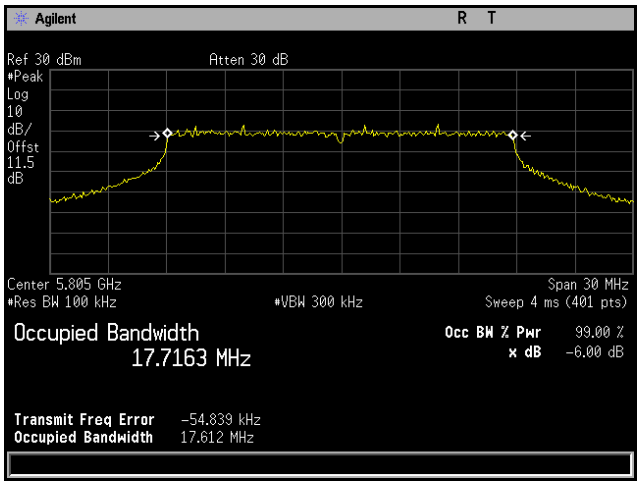

Plot 366. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0

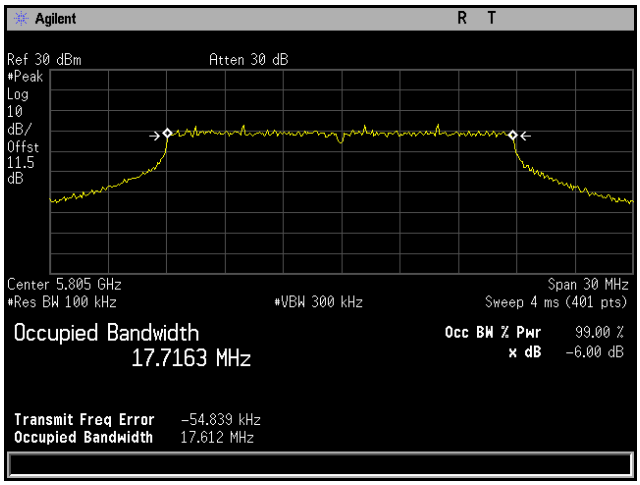

Plot 367. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0

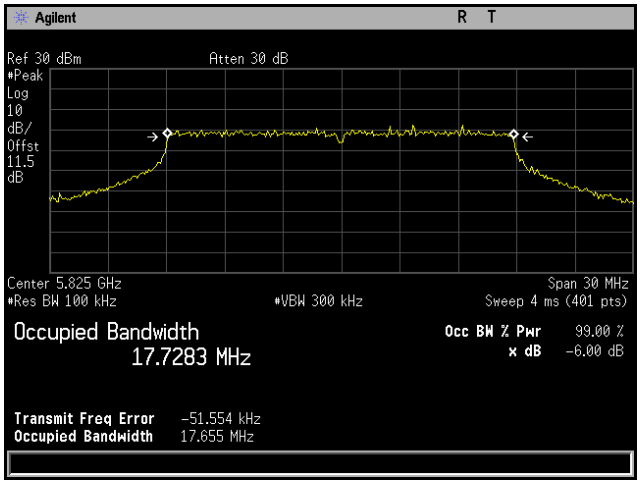

Plot 368. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0

6 dB Occupied Bandwidth, 802.11n 40 MHz, 4x8

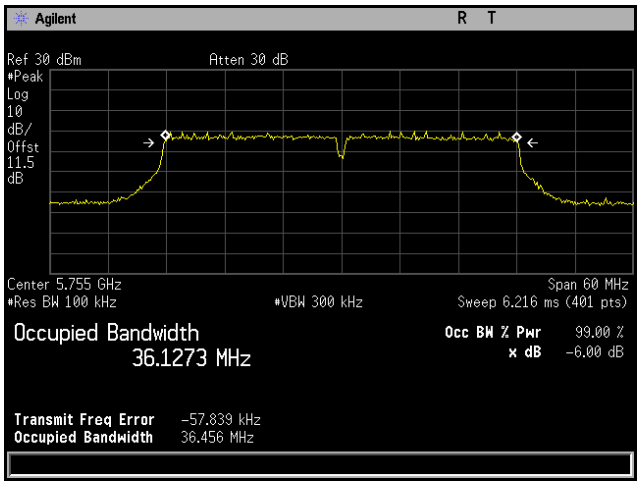

Plot 369. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0

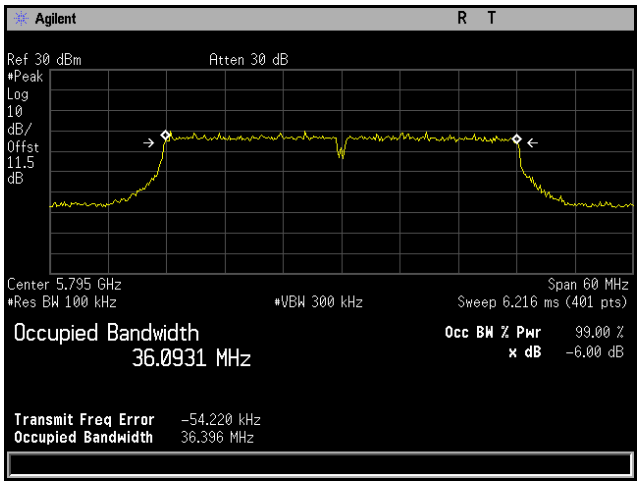

Plot 370. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0

6 dB Occupied Bandwidth, 802.11a, 6x8

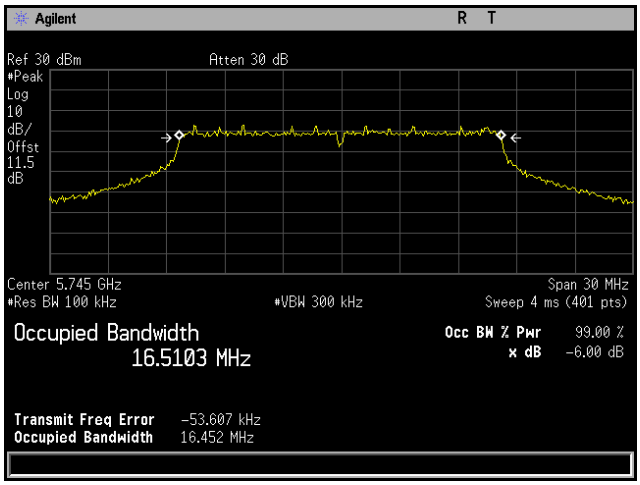

Plot 371. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 6x8, 6M

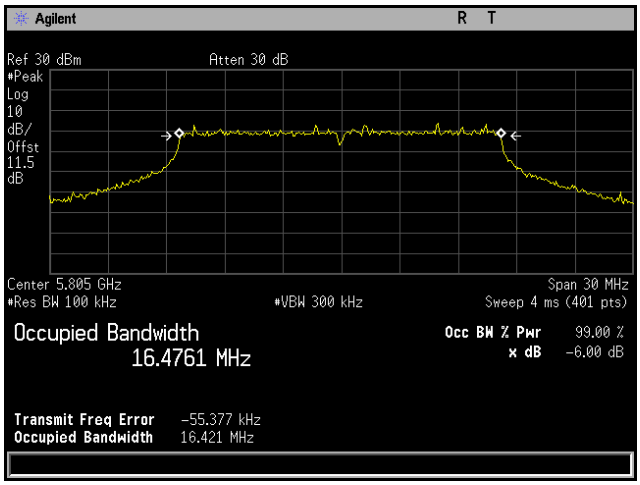

Plot 372. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5805 MHz, 6x8, 6M

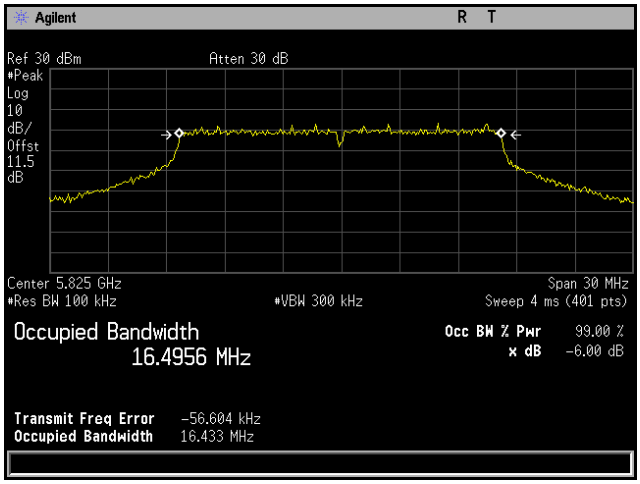

Plot 373. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 6x8, 6M

6 dB Occupied Bandwidth, 802.11ac 20 MHz, 6x8

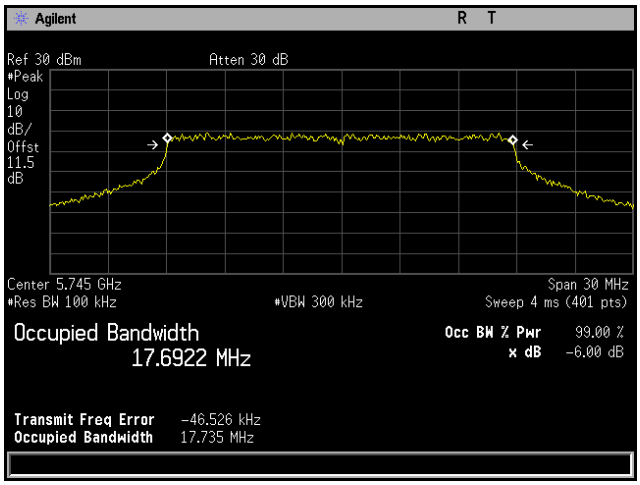

Plot 374. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5745 MHz, 6x8, NSS1 MCS0

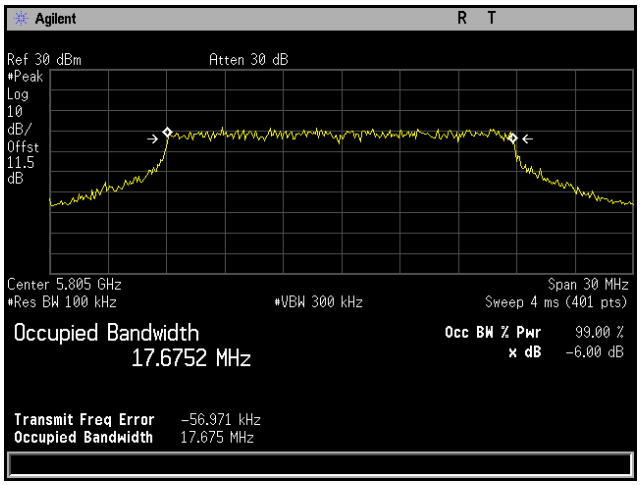

Plot 375. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, 6x8, NSS1 MCS0

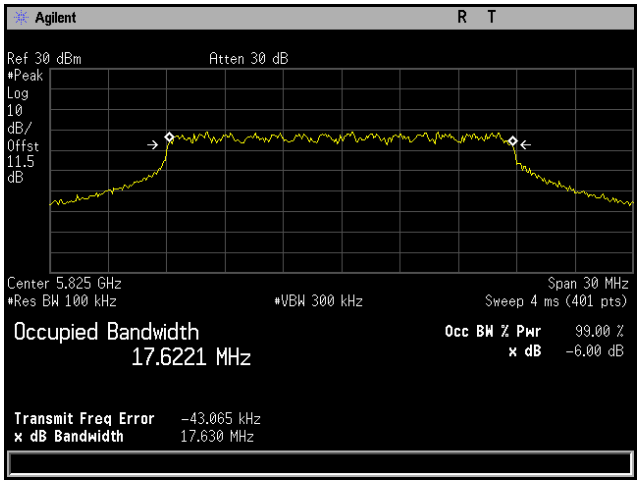

Plot 376. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, 6x8, NSS1 MCS0

6 dB Occupied Bandwidth, 802.11ac 40 MHz, 6x8

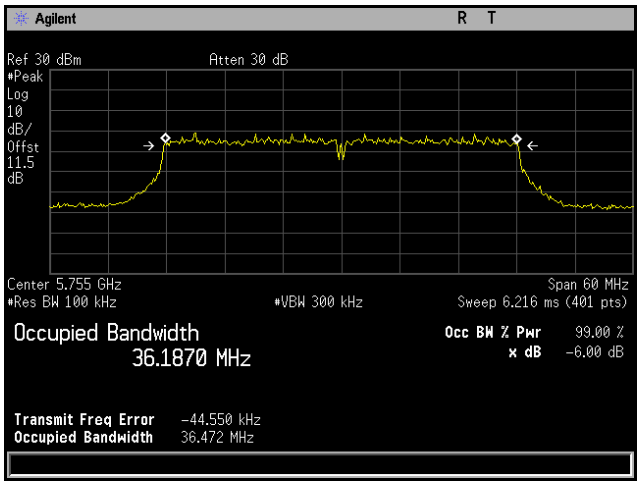

Plot 377. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, 6x8, NSS1 MCS0

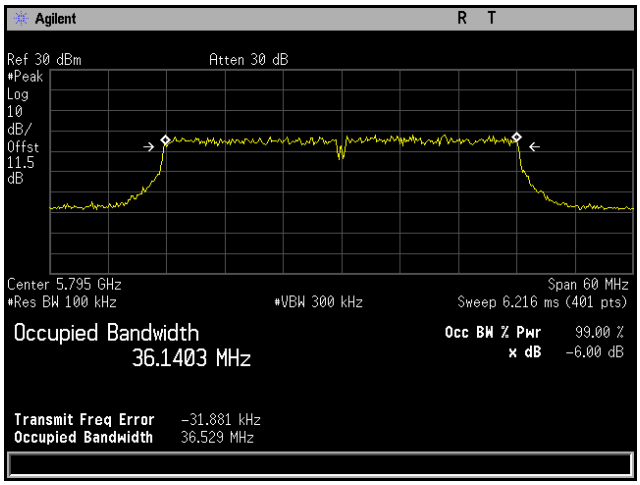

Plot 378. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, 6x8, NSS1 MCS0

6 dB Occupied Bandwidth, 802.11ac 80 MHz, 6x8

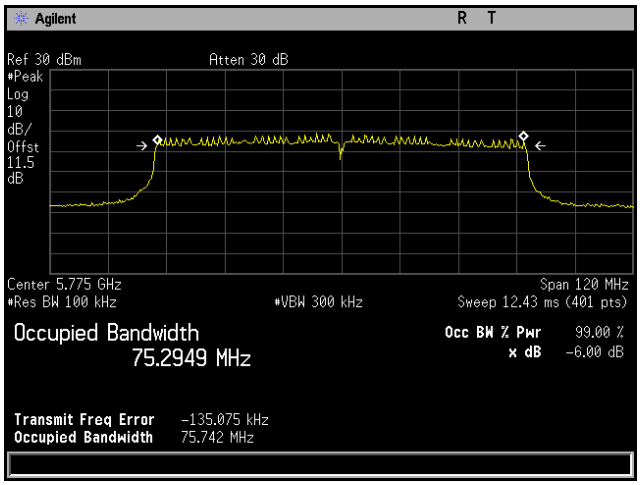

Plot 379. 6 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, 6x8, NSS1 MCS0

6 dB Occupied Bandwidth, 802.11n 20 MHz, 6x8

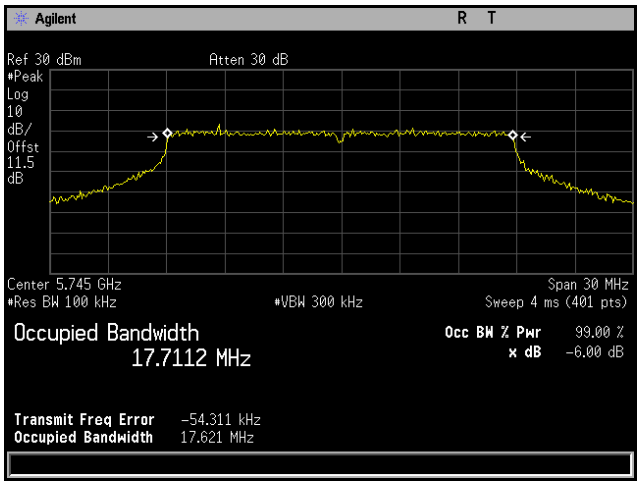

Plot 380. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, 6x8, MCS0

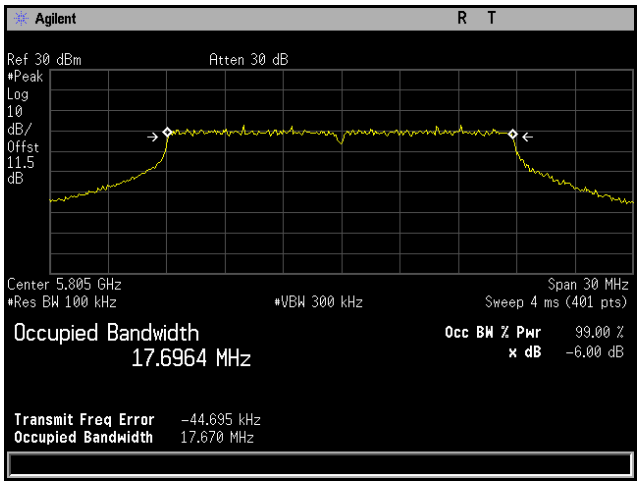

Plot 381. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, 6x8, MCS0

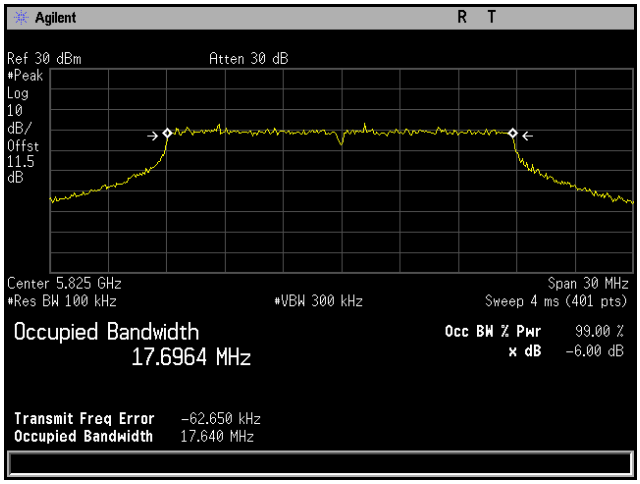

Plot 382. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, 6x8, MCS0

6 dB Occupied Bandwidth, 802.11n 40 MHz, 6x8

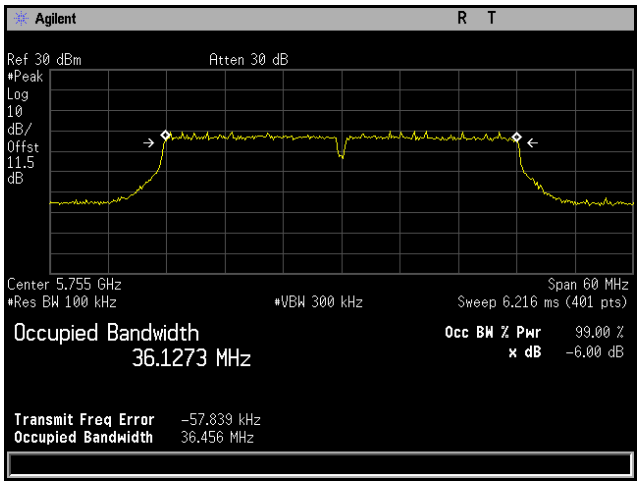

Plot 383. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, 6x8, MCS0

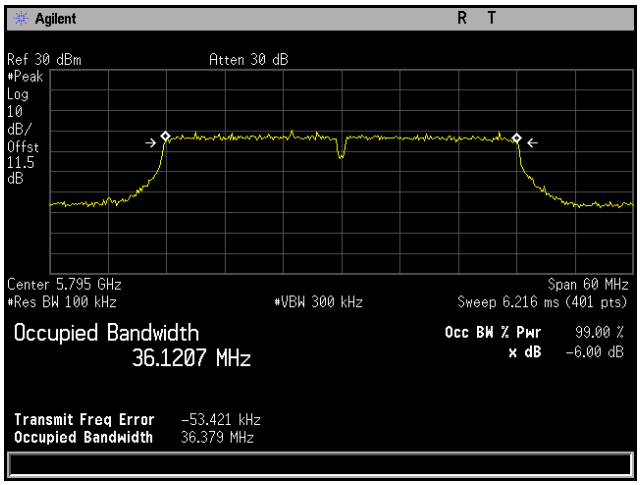

Plot 384. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, 6x8, MCS0

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) Maximum Permissible Exposure

Test Requirement(s): **§15.407(f):** U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment.

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT's operating frequencies @ 5725 - 5850 MHz; **Limit for Uncontrolled exposure: 1 mW/cm^2 or 10 W/m^2**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{(PG / 4\pi S)}$$

where, S = Power Density (mW/cm^2)
P = Power Input to antenna (mW)
G = Antenna Gain (numeric value)
R = Distance (cm)

Test Results:

FCC									
Frequency (MHz)	**Con. Pwr. (dBm)**	**Con. Pwr. (mW)**	**Ant. Gain (dBi)**	**Ant. Gain numeric**	**Pwr. Density (mW/cm^2)**	**Limit (mW/cm^2)**	**Margin**	**Distance (cm)**	**Result**
5795	27.07	509.331	6.8	4.786	0.48499	1	0.51501	20	Pass

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	2/26/2016	8/26/2017
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	10/29/2014	10/29/2016
1T4818	COMB GENERATOR	COM-POWER	CGO-520	SEE NOTE	
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	10/8/2015	4/8/2017
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T6658	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	12/9/2015	12/9/2016
1T4745	ANTENNA, HORN	ETS-LINDGREN	3116	6/27/2015	12/27/2016
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P	SEE NOTE	
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	1/31/2014	01/31/2017
1T4504	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	NOT REQUIRED	
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS COMPANY	9322-50-R-10-BNC	8/27/2015	2/27/2017

Table 18. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

K. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

(a) The various types of radio communication transmitting devices described throughout this chapter.

(b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.

(c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.

(d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

(a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:

(1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or

(2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.

(d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

(i) Compliance testing;

(ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;

(iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;

(iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or

(v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

(a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.[1] *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.

(b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

(a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.

(b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

[1] In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

– Reorient or relocate the receiving antenna.

– Increase the separation between the equipment and receiver.

– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

– Consult the dealer or an experienced radio/TV technician for help.

End of Report

