



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

January 31, 2017

ARRIS Group, Inc.  
3871 Lakefield Drive Suite 300  
Suwanee, GA 30024

Dear Tony Figueiredo,

Enclosed is the EMC Wireless test report for compliance testing of the ARRIS Group, Inc., TG3482 (ER3) as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 3).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\ARRIS Group, Inc.\) EMC89082B-FCC407 UNII 3 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

---

### **Electromagnetic Compatibility Criteria Test Report**

for the

**ARRIS Group, Inc.  
Model TG3482 (ER3)**

**Tested under**  
The FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E

**MET Report: EMC89082B-FCC407 UNII 3 Rev. 1**

January 31, 2017

#### **Prepared For:**

**ARRIS Group, Inc.  
3871 Lakefield Drive Suite 300  
Suwanee, GA 30024**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 W. Patapsco Ave.  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the


**ARRIS Group, Inc.**  
**Model TG3482 (ER3)**

**Tested under**

The FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E



Hadid Jones, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 11, 2016	Initial Issue.
1	January 31, 2017	Editorial correction.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample .....	5
	E. Equipment Configuration.....	6
	F. Support Equipment .....	6
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	7
	I. Method of Monitoring EUT Operation.....	7
	J. Modifications .....	7
	a) Modifications to EUT .....	7
	b) Modifications to Test Standard .....	7
	K. Disposition of EUT .....	7
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>8</b>
	§ 15.203 Antenna Requirement .....	9
	§ 15.403(i) 26 dB Bandwidth .....	10
	§ 15.407(a)(3) Maximum Conducted Output Power .....	18
	§ 15.407(a)(3) Maximum Power Spectral Density .....	33
	§ 15.407(b)(4) & (6 - 7) Undesirable Emissions .....	48
	§ 15.407(b)(6) Conducted Emissions .....	84
	§ 15.407(e) 6 dB Bandwidth.....	87
	§ 15.247(i) Maximum Permissible Exposure .....	95
<b>IV.</b>	<b>Test Equipment .....</b>	<b>96</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>98</b>
	A. Certification Information .....	99
	B. Label and User's Manual Information .....	103

## List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing .....	2
Table 2. EUT Summary.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	6
Table 5. Support Equipment.....	6
Table 6. Ports and Cabling Information .....	7
Table 7. Occupied Bandwidth, Test Results.....	11
Table 8. Conducted Output Power, Test Results, 4x8 .....	19
Table 9. Conducted Output Power, Test Results, 8x8 .....	20
Table 10. Power Spectral Density, Test Results, 4x8.....	34
Table 11. Power Spectral Density, Test Results, 8x8.....	35
Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	84
Table 13. Conducted Emissions, 15.207(a), Neutral Line, Test Results .....	85
Table 14. Conducted Emissions, 15.207(a), Phase Line, Test Results .....	86
Table 15. 6 dB Occupied Bandwidth, Test Results .....	88
Table 16. MPE, 8x8.....	95
Table 17. Test Equipment List .....	97

## List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
--	---

## List of Plots

Plot 1. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 6M.....	12
Plot 2. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 6M.....	12
Plot 3. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, NSS1 MCS0.....	13
Plot 4. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, NSS1 MCS0.....	13
Plot 5. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, NSS1 MCS0.....	14
Plot 6. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, NSS1 MCS0.....	14
Plot 7. 26 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, NSS1 MCS0.....	15
Plot 8. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, MCS0 .....	16
Plot 9. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, MCS0 .....	16
Plot 10. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, MCS0.....	16
Plot 11. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, MCS0.....	17
Plot 12. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, MCS0.....	17
Plot 13. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH3 .....	21
Plot 14. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH3 .....	21
Plot 15. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH3 .....	21
Plot 16. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3 .....	22
Plot 17. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3 .....	22
Plot 18. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3 .....	22
Plot 19. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3 .....	23
Plot 20. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3 .....	23
Plot 21. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH3 .....	24
Plot 22. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3 .....	25
Plot 23. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3 .....	25
Plot 24. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3 .....	25
Plot 25. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3 .....	26
Plot 26. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3 .....	26
Plot 27. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, CH1 .....	27

Plot 28. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 8x8, 6M, CH1 .....	27
Plot 29. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, CH1 .....	27
Plot 30. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1 .....	28
Plot 31. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1 .....	28
Plot 32. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1 .....	28
Plot 33. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1 .....	29
Plot 34. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1 .....	29
Plot 35. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, MCS0 NSS1, CH1 .....	30
Plot 36. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1 .....	31
Plot 37. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1 .....	31
Plot 38. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1 .....	31
Plot 39. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1 .....	32
Plot 40. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1 .....	32
Plot 41. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH3 .....	36
Plot 42. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH3 .....	36
Plot 43. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH3 .....	36
Plot 44. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3 .....	37
Plot 45. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3 .....	37
Plot 46. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3 .....	37
Plot 47. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3 .....	38
Plot 48. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3 .....	38
Plot 49. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH3 .....	39
Plot 50. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3 .....	40
Plot 51. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3 .....	40
Plot 52. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3 .....	40
Plot 53. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3 .....	41
Plot 54. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3 .....	41
Plot 55. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, CH1 .....	42
Plot 56. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 8x8, 6M, CH1 .....	42
Plot 57. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, CH1 .....	42
Plot 58. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1 .....	43
Plot 59. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1 .....	43
Plot 60. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1 .....	43
Plot 61. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1 .....	44
Plot 62. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1 .....	44
Plot 63. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, MCS0 NSS1, CH1 .....	45
Plot 64. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1 .....	46
Plot 65. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1 .....	46
Plot 66. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1 .....	46
Plot 67. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1 .....	47
Plot 68. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1 .....	47
Plot 69. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio Off .....	49
Plot 70. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio On .....	49
Plot 71. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M .....	50
Plot 72. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M .....	50
Plot 73. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0 .....	51
Plot 74. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0 .....	51
Plot 75. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0 .....	52
Plot 76. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0 .....	52
Plot 77. Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0 .....	53
Plot 78. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 .....	54
Plot 79. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 .....	54
Plot 80. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 .....	55
Plot 81. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 .....	55
Plot 82. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M .....	56
Plot 83. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M .....	56

Plot 84. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, NSS1 MCS0 .....	57
Plot 85. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, NSS1 MCS0 .....	57
Plot 86. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, NSS1 MCS0 .....	58
Plot 87. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, NSS1 MCS0 .....	58
Plot 88. Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, NSS1 MCS0 .....	59
Plot 89. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0 .....	60
Plot 90. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0 .....	60
Plot 91. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0 .....	61
Plot 92. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0 .....	61
Plot 93. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average .....	62
Plot 94. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak .....	62
Plot 95. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average .....	63
Plot 96. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak .....	63
Plot 97. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	64
Plot 98. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak	64
Plot 99. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	65
Plot 100. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak 65	
Plot 101. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	66
Plot 102. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak 66	
Plot 103. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	67
Plot 104. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak 67	
Plot 105. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	68
Plot 106. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak 68	
Plot 107. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average .....	69
Plot 108. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak .....	69
Plot 109. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average .....	70
Plot 110. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak .....	70
Plot 111. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average .....	71
Plot 112. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak .....	71
Plot 113. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average .....	72
Plot 114. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak .....	72
Plot 115. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, 1 GHz – 7 GHz, Average .....	73
Plot 116. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, 1 GHz – 7 GHz, Peak .....	73
Plot 117. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, 1 GHz – 7 GHz, Average .....	74
Plot 118. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, 1 GHz – 7 GHz, Peak .....	74
Plot 119. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	75
Plot 120. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak 75	
Plot 121. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	76
Plot 122. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak 76	
Plot 123. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	77
Plot 124. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak 77	

Plot 125. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	78
Plot 126. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak .....	78
Plot 127. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average .....	79
Plot 128. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak .....	79
Plot 129. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average .....	80
Plot 130. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak .....	80
Plot 131. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average .....	81
Plot 132. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak .....	81
Plot 133. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average .....	82
Plot 134. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak .....	82
Plot 135. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average .....	83
Plot 136. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak .....	83
Plot 137. Conducted Emissions, Neutral Line .....	85
Plot 138. Conducted Emissions, Phase Line .....	86
Plot 139. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 6M .....	89
Plot 140. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5805 MHz, 6M .....	89
Plot 141. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 6M .....	89
Plot 142. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5745 MHz, NSS1 MCS0 .....	90
Plot 143. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, NSS1 MCS0 .....	90
Plot 144. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, NSS1 MCS0 .....	90
Plot 145. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, NSS1 MCS0 .....	91
Plot 146. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, NSS1 MCS0 .....	91
Plot 147. 6 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, NSS1 MCS0 .....	92
Plot 148. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, MCS0 .....	93
Plot 149. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, MCS0 .....	93
Plot 150. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, MCS0 .....	93
Plot 151. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, MCS0 .....	94
Plot 152. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, MCS0 .....	94

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	Kilohertz
<b>kPa</b>	Kilopascal
<b>kV</b>	Kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	Microhenry
<b>μ</b>	Microfarad
<b>μs</b>	Microseconds
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the ARRIS Group, Inc. TG3482 (ER3), with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TG3482 (ER3). ARRIS Group, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TG3482 (ER3), has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with ARRIS Group, Inc., purchase order number AR1079104. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26 dB Bandwidth	Compliant
§15.407 (a)(3)	Maximum Conducted Output Power	Compliant
§15.407 (a)(3)	Maximum Power Spectral Density	Compliant
§15.407 (b)(4)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Compliant
§15.407(e)	6 dB Bandwidth	Compliant
§15.407(f)	RF Exposure	Compliant

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by ARRIS Group, Inc. to perform testing on the TG3482 (ER3), under ARRIS Group, Inc.'s purchase order number AR1079104.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the ARRIS Group, Inc. TG3482 (ER3).

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	TG3482 (ER3)	
<b>Model(s) Covered:</b>	TG3482 (ER3)	
<b>EUT Specifications:</b>	Primary Power: 115 VAC, 60 Hz	
	FCC ID: UIDTG3482ER3	
	Type of Modulations:	OFDM
	Equipment Code:	NII
	Max. RF Output Power:	27.65dBm @ 5755MHz
	EUT Frequency Ranges:	5745MHz – 5825MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Type of Filing:</b>	Original	
<b>Evaluated by:</b>	Hadid Jones	
<b>Report Date(s):</b>	January 31, 2017	

**Table 2. EUT Summary**

## B. References

<b>CFR 47, Part 15, Subpart E</b>	Unlicensed National Information Infrastructure Devices (UNII)
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**


## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The ARRIS Group, Inc. TG3482 (ER3) Telephony Wireless Gateway supporting DOCSIS 3.1, Equipment Under Test (EUT), along with its 8x8 802.11ac Dual Band Wireless radios. The IoT subsystem is capable of supporting personal area networks based on ZigBee, Thread and BTLE.

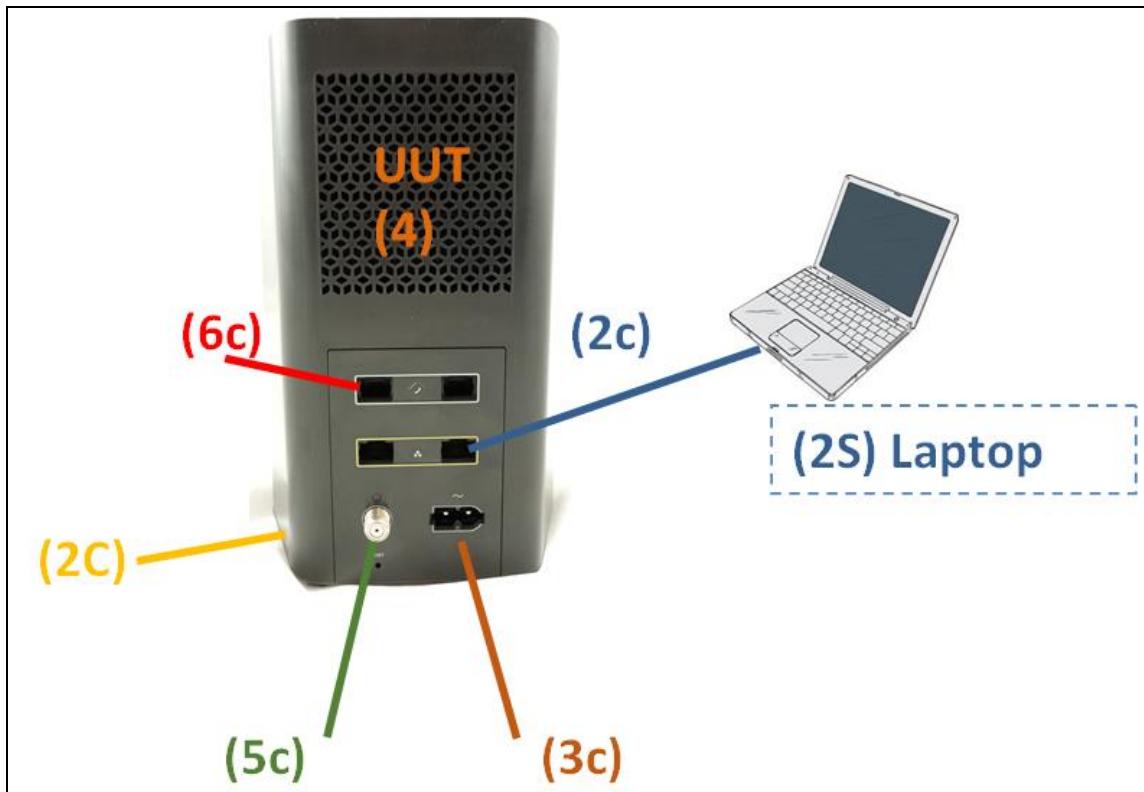

**Figure 1. Block Diagram of Test Configuration**

## E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Revision
--	TG3482 (ER3)	TG3482	--	--	--

**Table 4. Equipment Configuration**

## F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
2s	Laptop	Assorted	N/A

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
2C	USB	USB-to-Serial	1	1	No	--
3C	AC Input	2 conductor, 18 AWG	1	2	No	(115v/60hz)
4C	Ethernet	5e Modular 8 pin only one Ethernet cord needed for WiFi testing	Up to 4	1	No	--
5C	Coax	Coax. Not used for WiFi testing	1	0	Yes	--
6C	Telephony	Not used for WiFi testing	Up to 2	0	No	--

**Table 6. Ports and Cabling Information**

## H. Mode of Operation

The provided instructions and software will configure the TG3482 (ER3) for operation at each required test mode.

## I. Method of Monitoring EUT Operation

The measured emission value is over the specified FCC limits.

## J. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to ARRIS Group, Inc. upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. The EUT has an integral antenna.

**Test Engineer(s):** Hadid Jones

**Test Date(s):** 11/03/16

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 403(i)      26 dB Bandwidth

**Test Requirements:** **§ 15.403(i):** For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

**Test Procedure:** The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 26 dB Bandwidth was measured and recorded.

**Test Results** The 26 dB Bandwidth was compliant with the requirements of this section.

**Test Engineer(s):** Hadid Jones

**Test Date(s):** 11/03/16




## 26 dB Occupied Bandwidth


Bandwidth		
Mode	26dB	99%
OBW_26dB_BW 20M_Ch 5745M_A_6M	27.361	17.35
OBW_26dB_BW 20M_Ch 5745M_N_MSC0	29.244	18.63
OBW_26dB_BW 20M_Ch 5805M_AC_NSS1_MSC0	28.718	18.6
OBW_26dB_BW 20M_Ch 5805M_N_MSC0	28.439	18.46
OBW_26dB_BW 20M_Ch 5825M_A_6M	25.372	17.17
OBW_26dB_BW 20M_Ch 5825M_AC_NSS1_MSC0	27.39	18.75
OBW_26dB_BW 20M_Ch 5825M_N_MSC0	28.909	18.5
OBW_26dB_BW 40M_Ch 5755M_AC_NSS1_MSC0	57.429	37.12
OBW_26dB_BW 40M_Ch 5755M_N_MSC0	48.382	36.61
OBW_26dB_BW 40M_Ch 5795M_AC_NSS1_MSC0	52.899	37.03
OBW_26dB_BW 40M_Ch 5795M_N_MSC0	49.89	37.15
OBW_26dB_BW 80M_Ch 5775M_AC_NSS1_MSC0	96.93	75.46

**Table 7. Occupied Bandwidth, Test Results**

## 26 dB Occupied Bandwidth, 802.11a 20 MHz

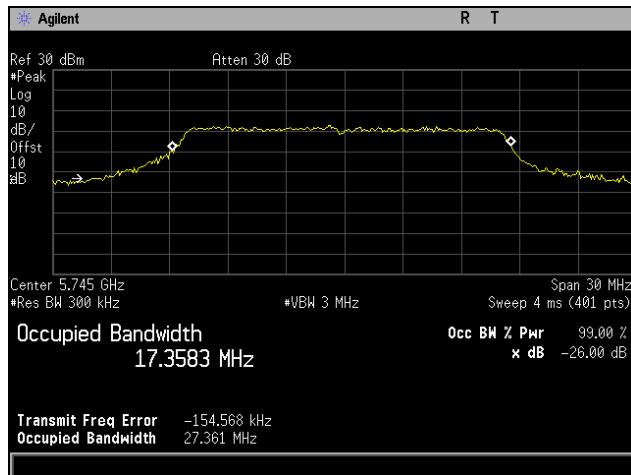


Plot 1. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 6M

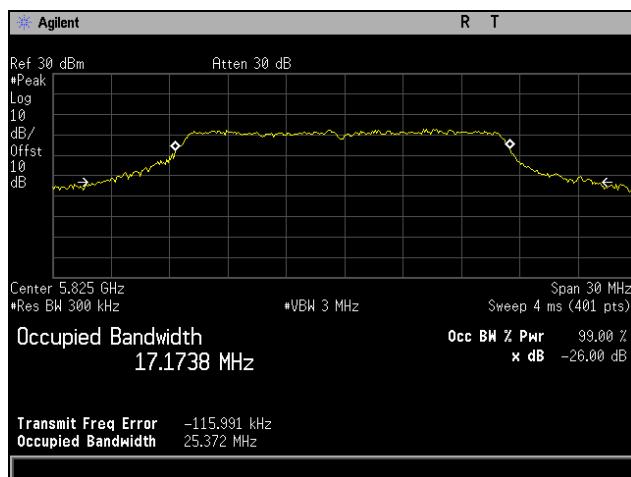


Plot 2. 26 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 6M

## 26 dB Occupied Bandwidth, 802.11ac 20 MHz

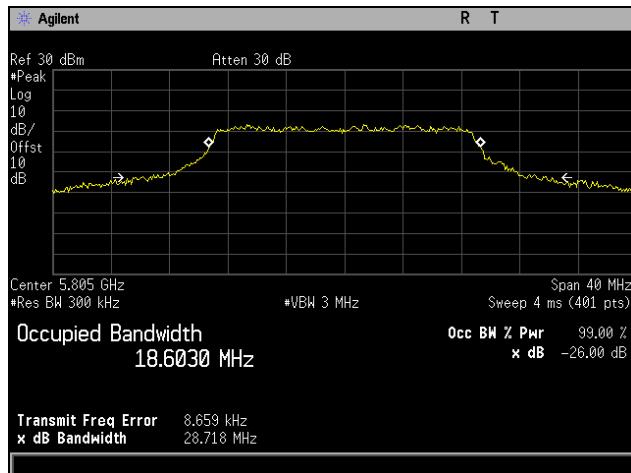


Plot 3. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, NSS1 MCS0

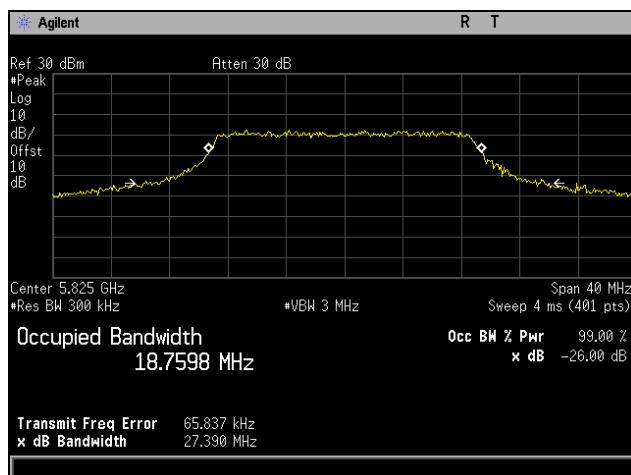


Plot 4. 26 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, NSS1 MCS0

## 26 dB Occupied Bandwidth, 802.11ac 40 MHz

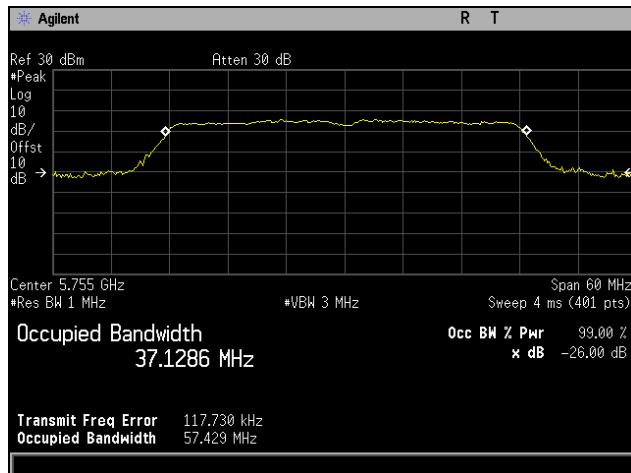


Plot 5. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, NSS1 MCS0

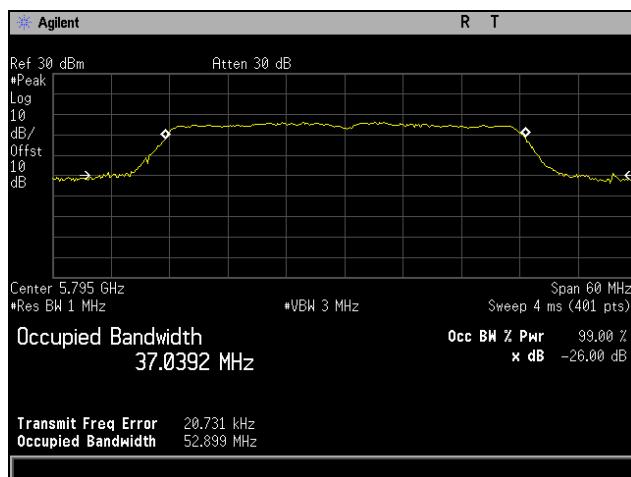


Plot 6. 26 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, NSS1 MCS0

## 26 dB Occupied Bandwidth, 802.11ac 80 MHz

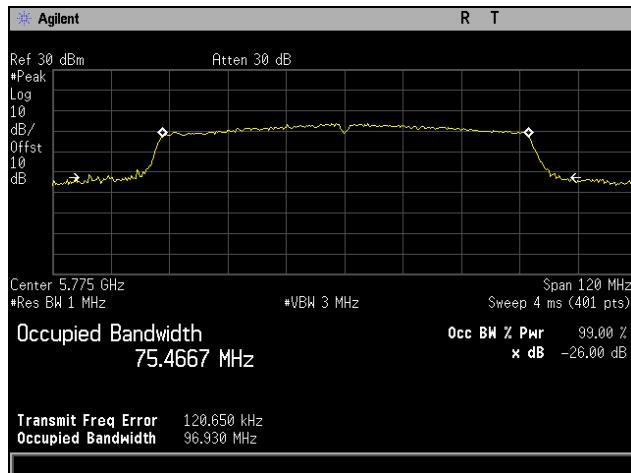


Plot 7. 26 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, NSS1 MCS0


## 26 dB Occupied Bandwidth, 802.11n 20 MHz

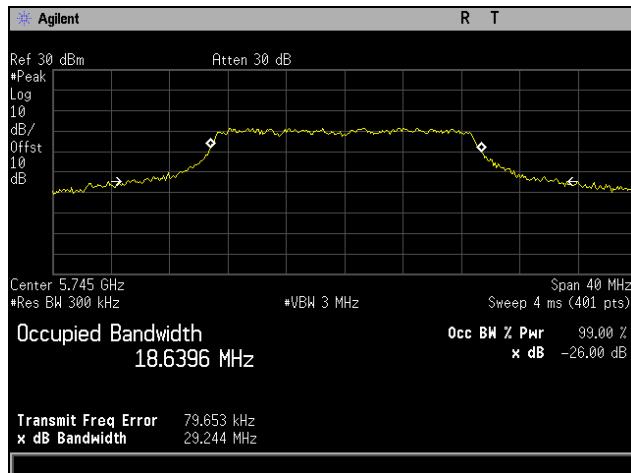

Plot 8. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, MCS0

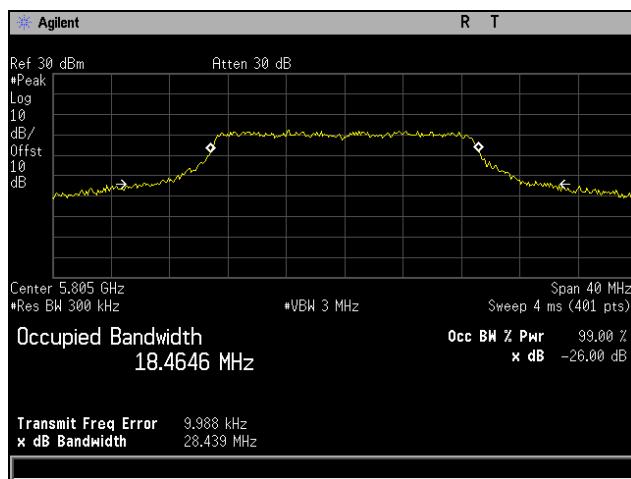


Plot 9. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, MCS0

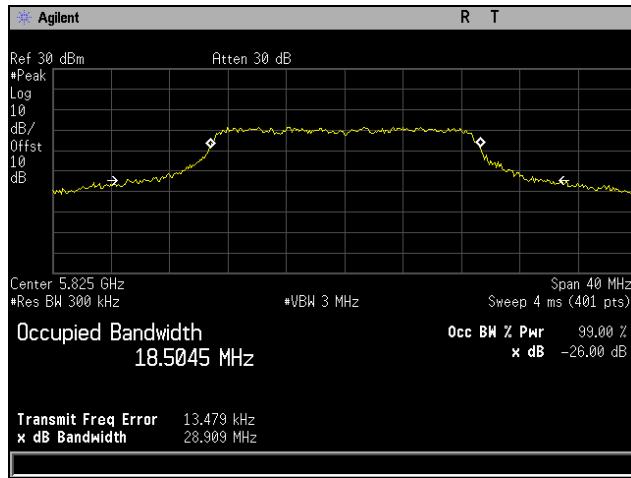


Plot 10. 26 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, MCS0

## 26 dB Occupied Bandwidth, 802.11n 40 MHz

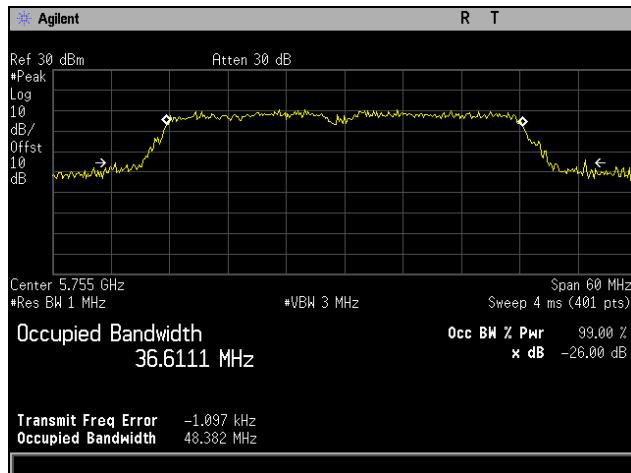

Plot 11. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, MCS0

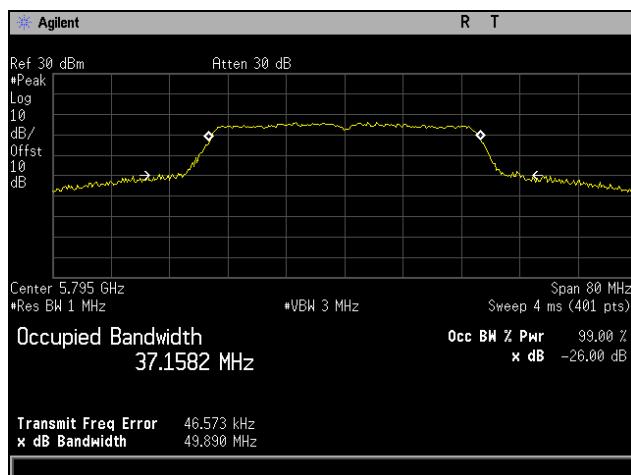

Plot 12. 26 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, MCS0

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(a)(3) Maximum Conducted Output Power

**Test Requirements:** **§15.407(a)(3):** For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.


If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01.

**Test Results:** The EUT as tested is compliant with the requirements of this section.

**Test Engineer(s):** Hadid Jones

**Test Date(s):** 11/03/16




4x8 MIMO Power										
Mode	Port 3 dBm	Port 4 dBm	Port 5 dBm	Port 6 dBm	$\Sigma$ Power dBm	Limit (dBm)	Antenna Gain	Final limit	Margin dB	
<b>BW 20M_Ch 5745M_4x8 A 6M</b>	18.65	20.05	20.92	19.45	<b>25.87</b>	30	6.1	29.9	<b>-4.03</b>	
<b>BW 20M_Ch 5745M_4x8 AC NSS1 MSC0</b>	18.36	19.3	20.67	20.27	<b>25.77</b>	30	6.1	29.9	<b>-4.13</b>	
<b>BW 20M_Ch 5745M_4x8 N MSC0</b>	18.37	19.85	20.86	20.15	<b>25.92</b>	30	6.1	29.9	<b>-3.98</b>	
<b>BW 20M_Ch 5805M_4x8 A 6M</b>	19	19.39	21.04	19.38	<b>25.8</b>	30	6.1	29.9	<b>-4.1</b>	
<b>BW 20M_Ch 5805M_4x8 AC NSS1 MSC0</b>	19.1	20.25	21	19.85	<b>26.13</b>	30	6.1	29.9	<b>-3.77</b>	
<b>BW 20M_Ch 5805M_4x8 N MSC0</b>	18.6	19.86	20.84	19.78	<b>25.87</b>	30	6.1	29.9	<b>-4.03</b>	
<b>BW 20M_Ch 5825M_4x8 A 6M</b>	18.3	20.04	21	19.71	<b>25.89</b>	30	6.1	29.9	<b>-4.01</b>	
<b>BW 20M_Ch 5825M_4x8 AC NSS1 MSC0</b>	19.03	20.1	20.9	20.03	<b>26.09</b>	30	6.1	29.9	<b>-3.81</b>	
<b>BW 20M_Ch 5825M_4x8 N MSC0</b>	18.87	20.18	21.09	20.12	<b>26.16</b>	30	6.1	29.9	<b>-3.74</b>	
<b>BW 40M_Ch 5755M_4x8 AC NSS1 MSC0</b>	19.79	20.09	21.23	20.4	<b>26.44</b>	30	6.1	29.9	<b>-3.46</b>	
<b>BW 40M_Ch 5755M_4x8 N MSC0</b>	18.27	20.48	20.83	19.84	<b>25.98</b>	30	6.1	29.9	<b>-3.92</b>	
<b>BW 40M_Ch 5795M_4x8 AC NSS1 MSC0</b>	18.37	20.31	21.22	19.5	<b>26</b>	30	6.1	29.9	<b>-3.9</b>	
<b>BW 40M_Ch 5795M_4x8 N MSC0</b>	19	20.05	21.45	19.78	<b>26.19</b>	30	6.1	29.9	<b>-3.71</b>	
<b>BW 80M_Ch 5775M_4x8 AC NSS1 MSC0</b>	19.03	19.97	21.02	19	<b>25.86</b>	30	6.1	29.9	<b>-4.04</b>	

**Table 8. Conducted Output Power, Test Results, 4x8**


8x8 MIMO Power													
Mode	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Port 5 (dBm)	Port 6 (dBm)	Port 7 (dBm)	Port 8 (dBm)	$\Sigma$ PWR (dBm)	Limit (dBm)	Gain (dBi)	Final limit	Margin dB
<b>BW 20M_Ch 5745M_8x8 A 6M</b>	14.95	16.09	13.07	16.72	15.55	15.1	15.06	13.83	<b>24.22</b>	30	8.5	27.5	<b>-3.28</b>
<b>BW 20M_Ch 5745M_8x8 AC NSS1 MSC0</b>	15.97	17.55	15.74	16.95	17.08	15.93	16.72	15.7	<b>25.54</b>	30	8.5	27.5	<b>-1.96</b>
<b>BW 20M_Ch 5745M_8x8 N MCS0</b>	15.97	16.26	14.62	14.71	16.29	14.89	15.88	13.05	<b>24.36</b>	30	8.5	27.5	<b>-3.14</b>
<b>BW 20M_Ch 5805M_8x8 A 6M</b>	15.24	16.09	15.24	16.72	15.74	14.76	15.55	14.25	<b>24.54</b>	30	8.5	27.5	<b>-2.96</b>
<b>BW 20M_Ch 5805M_8x8 AC NSS1 MSC0</b>	16.63	17.39	16.85	16.85	17.1	16.3	16.59	15.74	<b>25.74</b>	30	8.5	27.5	<b>-1.76</b>
<b>BW 20M_Ch 5805M_8x8 N MCS0</b>	15.4	15.7	15.16	16.28	16.36	14.49	15.98	14.59	<b>24.58</b>	30	8.5	27.5	<b>-2.92</b>
<b>BW 20M_Ch 5825M_8x8 A 6M</b>	15.87	16.3	14.85	16.88	15.58	14.52	16.23	14.47	<b>24.7</b>	30	8.5	27.5	<b>-2.8</b>
<b>BW 20M_Ch 5825M_8x8 AC NSS1 MSC0</b>	16.67	16.97	16.71	17.27	17.16	15.65	17.47	15.03	<b>25.72</b>	30	8.5	27.5	<b>-1.78</b>
<b>BW 20M_Ch 5825M_8x8 N MCS0</b>	15.45	17.08	15.77	16.22	16.09	14.41	15.78	14.29	<b>24.76</b>	30	8.5	27.5	<b>-2.74</b>
<b>BW 40M_Ch 5755M_8x8 AC NSS1 MSC0</b>	16.52	16.96	15.72	16.68	17.4	17.26	17.44	16.1	<b>25.83</b>	30	8.5	27.5	<b>-1.67</b>
<b>BW 40M_Ch 5755M_8x8 N MSC0</b>	18.42	19.59	17.69	18.7	19.52	18.05	18.56	17.96	<b>27.65</b>	30	8.5	27.5	<b>0.15</b>
<b>BW 40M_Ch 5795M_8x8 AC NSS1 MSC0</b>	17.71	17.46	17.45	18.25	18.68	17.07	18.52	17.08	<b>26.85</b>	30	8.5	27.5	<b>-0.65</b>
<b>BW 40M_Ch 5795M_8x8 N MSC0</b>	18.19	18.34	16.98	18.5	18.93	18.37	18.88	17.92	<b>27.34</b>	30	8.5	27.5	<b>-0.16</b>
<b>BW 80M_Ch 5775M_8x8 AC NSS1 MSC0</b>	16.49	17.53	16.04	17.72	20.6	19.48	18.03	18.75	<b>27.35</b>	30	8.5	27.5	<b>-0.15</b>

Table 9. Conducted Output Power, Test Results, 8x8


### Conducted Output Power, 802.11a, 4x8, CH3

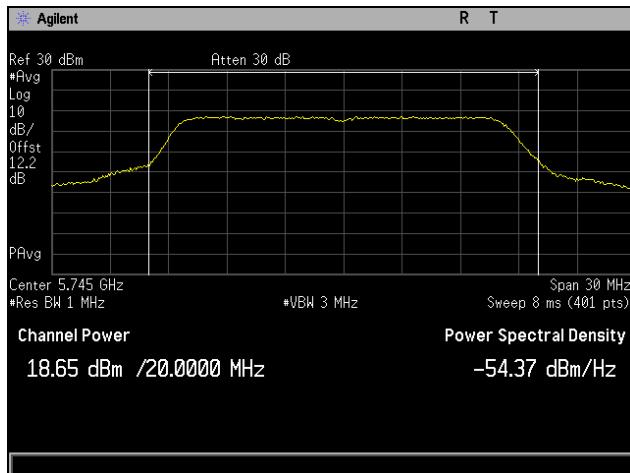

Plot 13. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH3

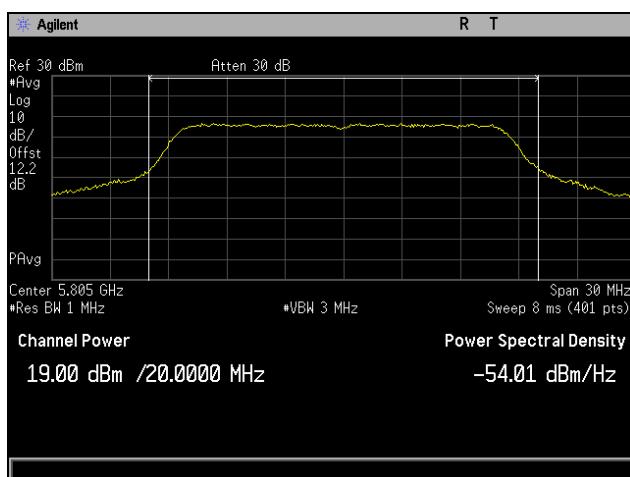


Plot 14. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH3

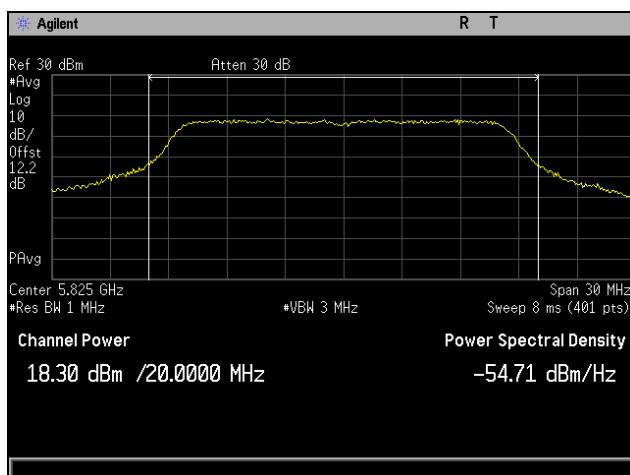


Plot 15. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH3


### Conducted Output Power, 802.11ac 20 MHz, 4x8, CH3

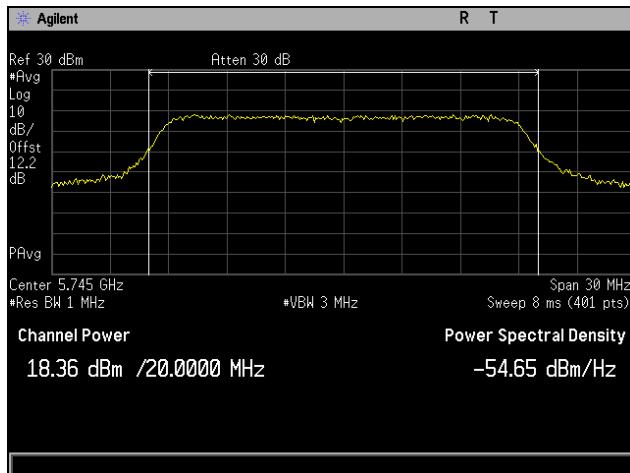

**Plot 16. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3**

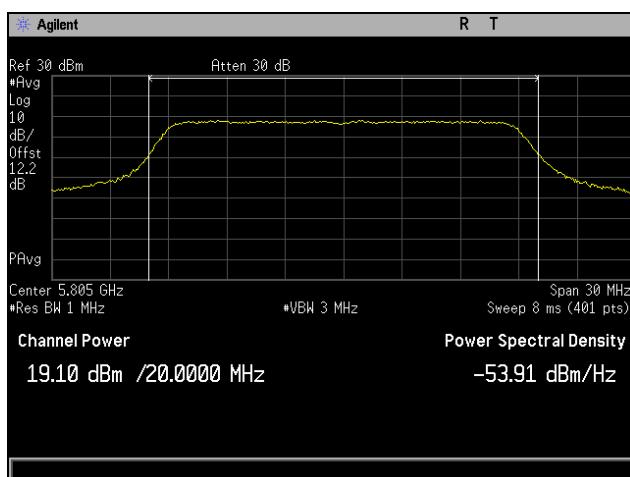


**Plot 17. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3**

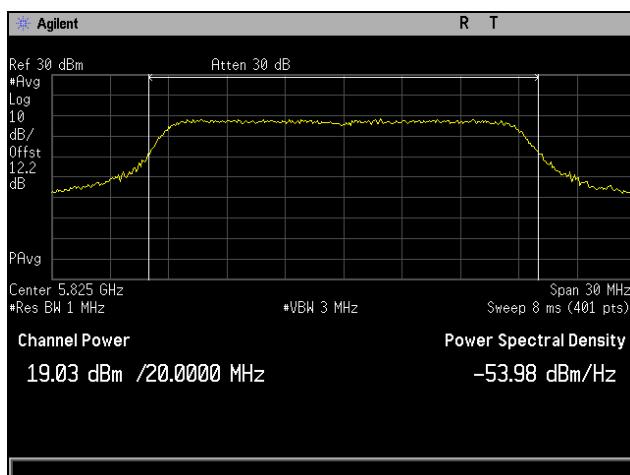


**Plot 18. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3**

### Conducted Output Power, 802.11ac 40 MHz, 4x8, CH3

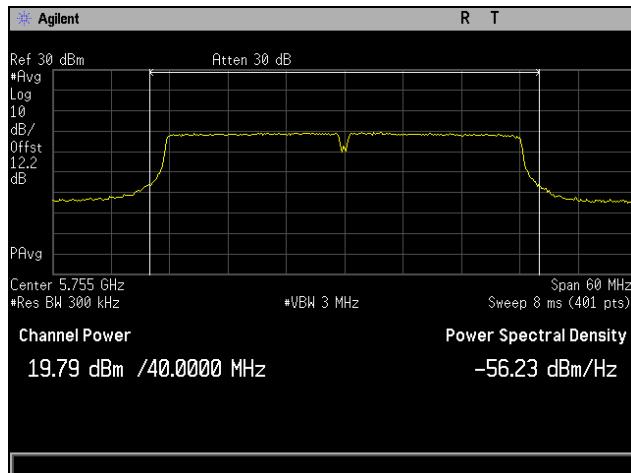


**Plot 19. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3**

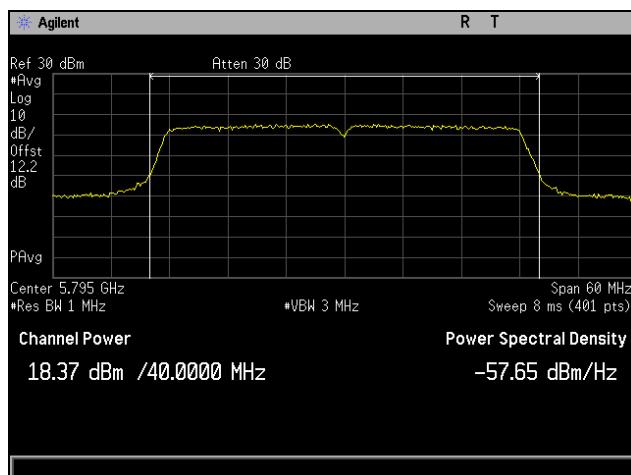


**Plot 20. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3**

## Conducted Output Power, 802.11ac 80 MHz, 4x8, CH3

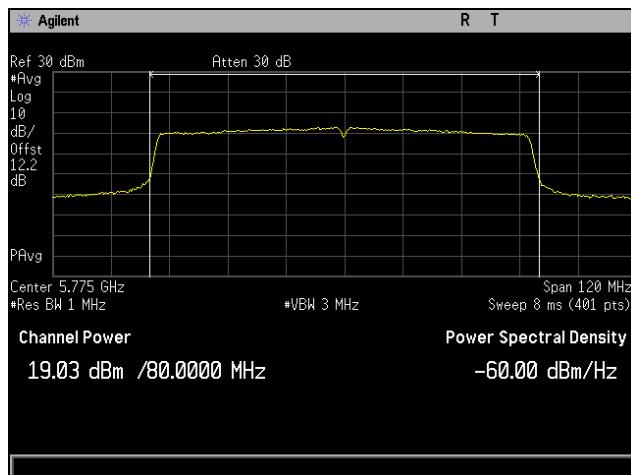


Plot 21. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH3


### Conducted Output Power, 802.11n 20 MHz, 4x8, CH3

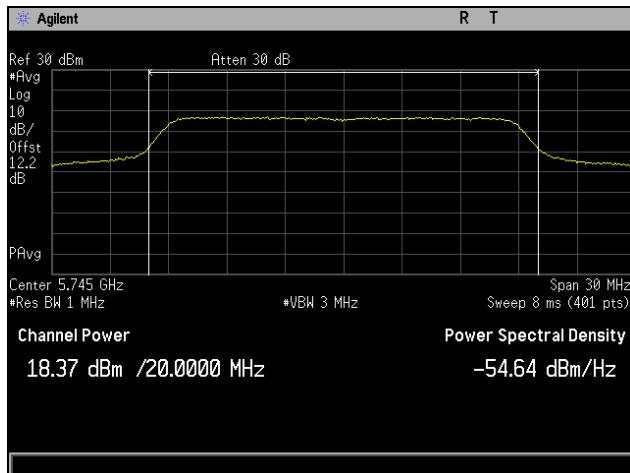

Plot 22. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3

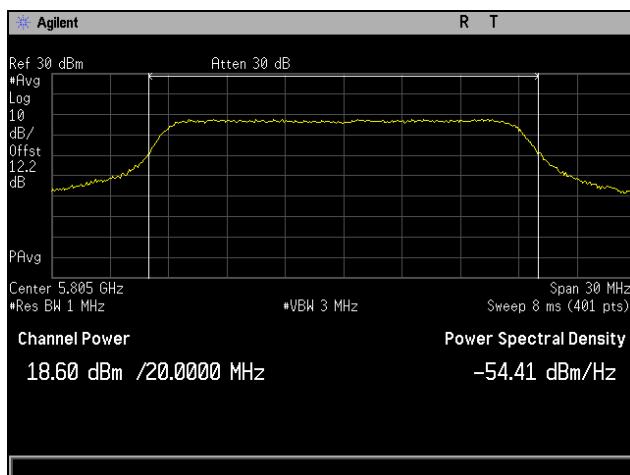


Plot 23. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3

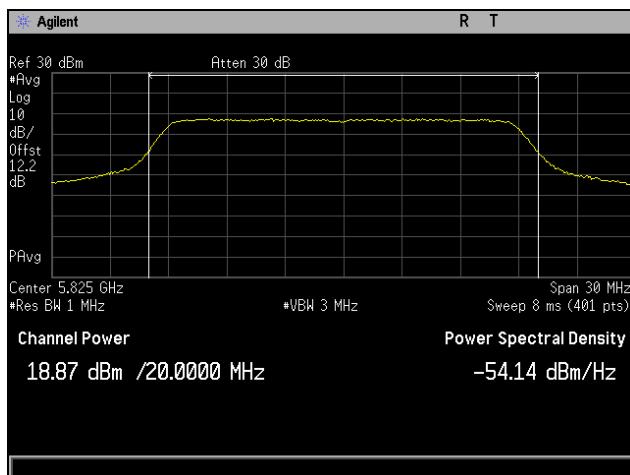


Plot 24. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3

### Conducted Output Power, 802.11n 40 MHz, 4x8, CH3

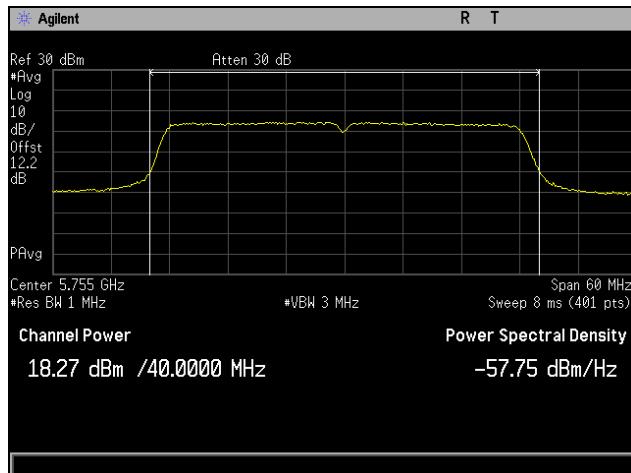


Plot 25. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3

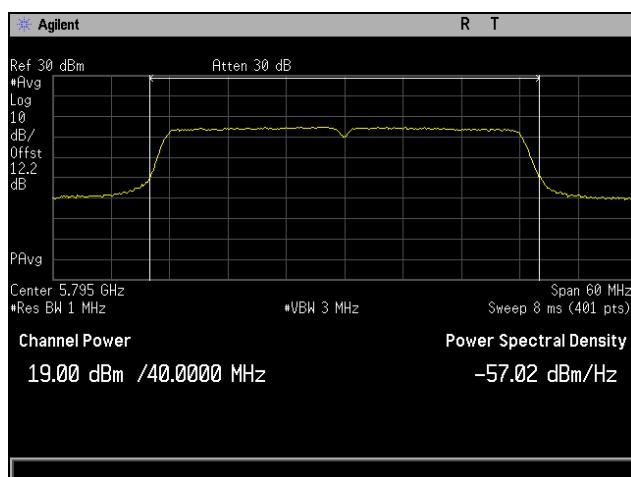


Plot 26. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3


## Conducted Output Power, 802.11a, 8x8, CH1

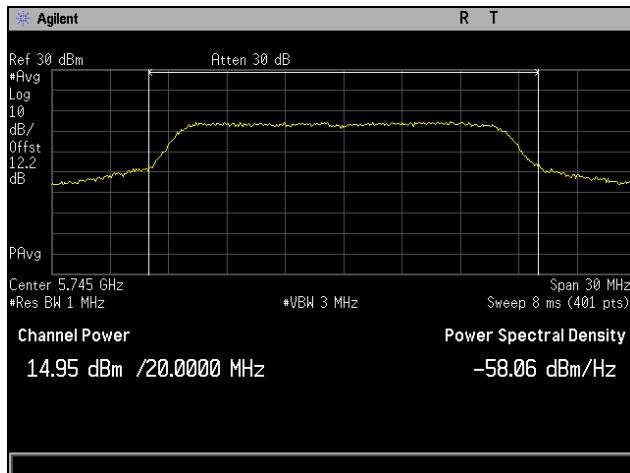

Plot 27. Conducted Output Power, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, CH1

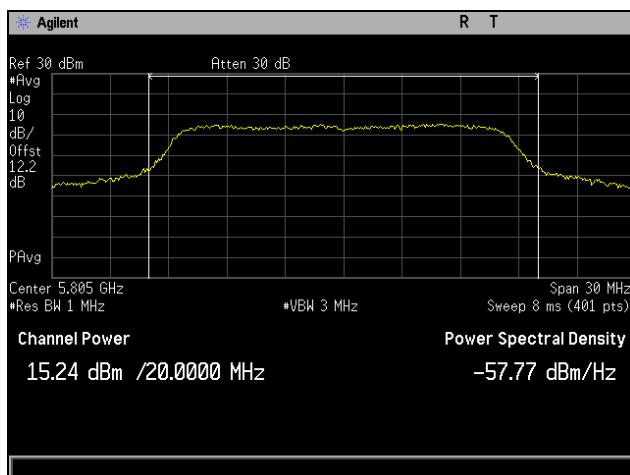


Plot 28. Conducted Output Power, 802.11a 20 MHz, Channel 5805 MHz, 8x8, 6M, CH1

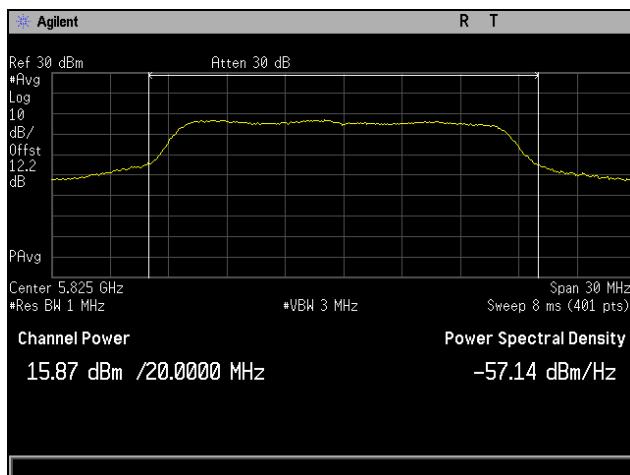


Plot 29. Conducted Output Power, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, CH1


## Conducted Output Power, 802.11ac 20 MHz, 8x8, CH1

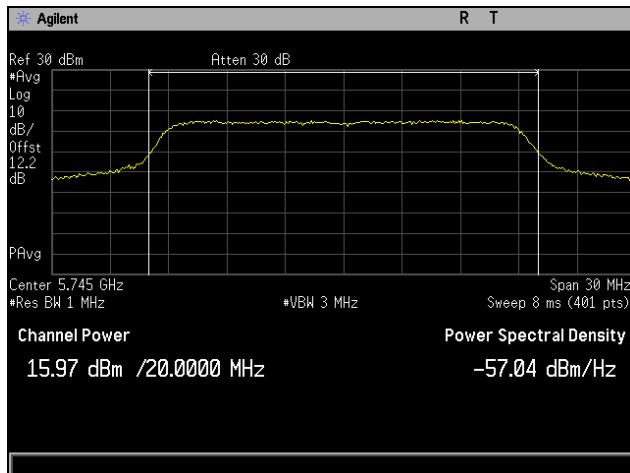

Plot 30. Conducted Output Power, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1

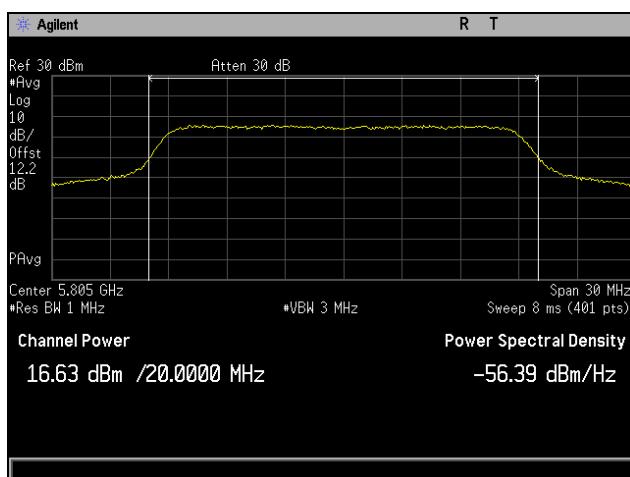


Plot 31. Conducted Output Power, 802.11ac 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1

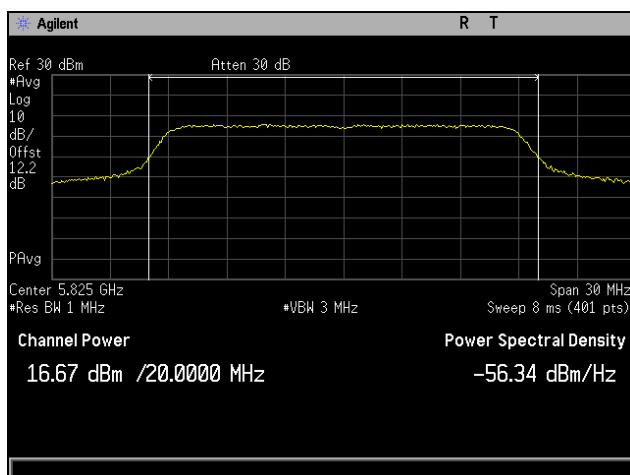


Plot 32. Conducted Output Power, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1

## Conducted Output Power, 802.11ac 40 MHz, 8x8, CH1

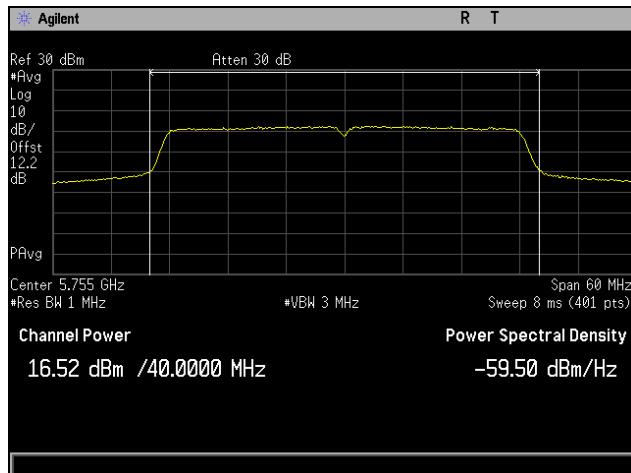


Plot 33. Conducted Output Power, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1

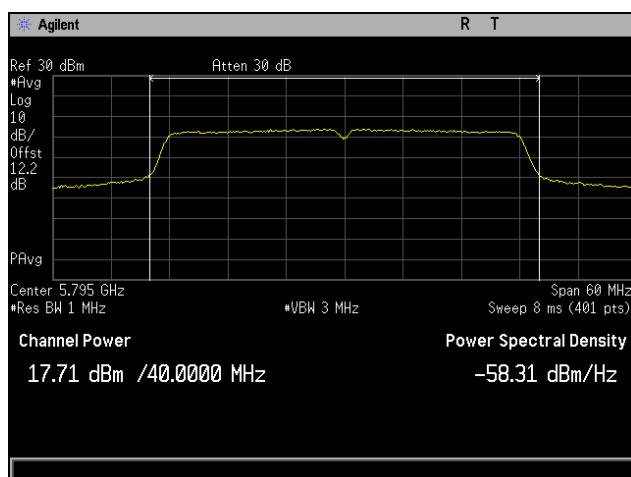


Plot 34. Conducted Output Power, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1

## Conducted Output Power, 802.11ac 80 MHz, 8x8, CH1

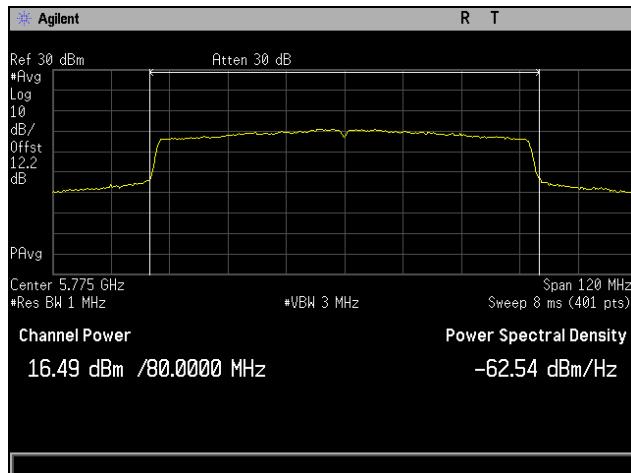


Plot 35. Conducted Output Power, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, MCS0 NSS1, CH1


## Conducted Output Power, 802.11n 20 MHz, 8x8, CH1

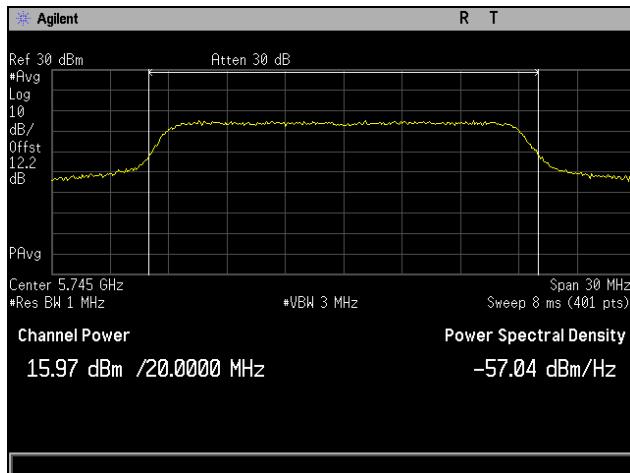

Plot 36. Conducted Output Power, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1

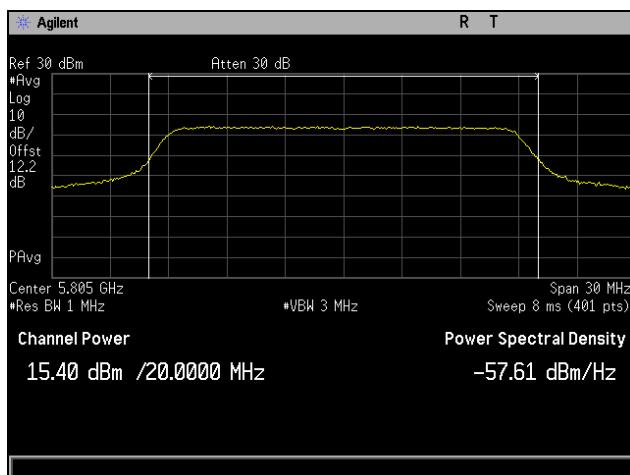


Plot 37. Conducted Output Power, 802.11n 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1

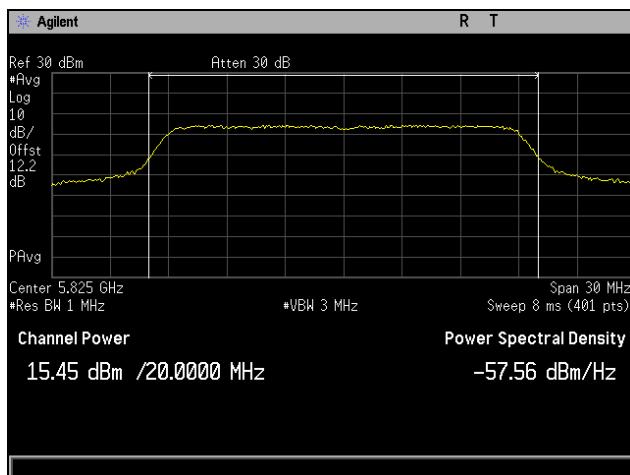


Plot 38. Conducted Output Power, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1

### Conducted Output Power, 802.11n 40 MHz, 8x8, CH1

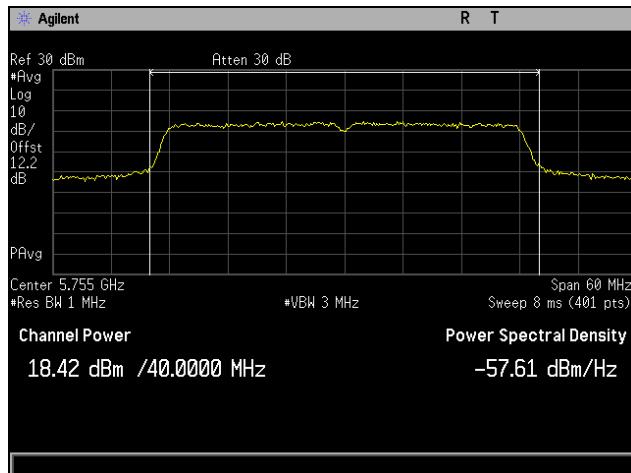

Plot 39. Conducted Output Power, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1

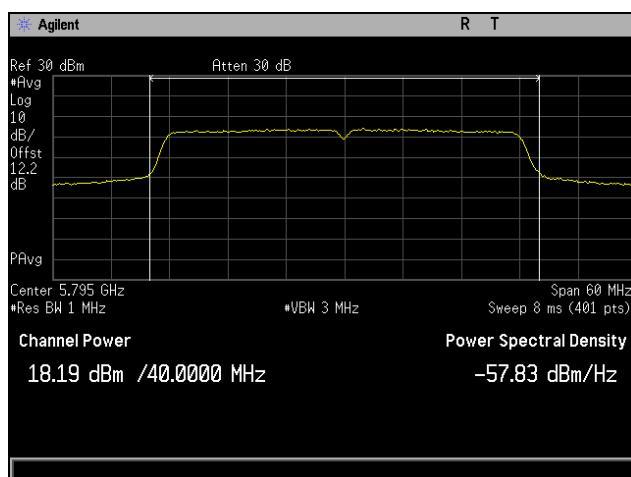

Plot 40. Conducted Output Power, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(a)(3) Maximum Power Spectral Density

**Test Requirements:** §15.407(a)(3): In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v01. A 1 MHz RBW was used during testing, as this provides a worst-case scenario.

**Test Results:** The EUT as tested is compliant with the requirements of this section.

**Test Engineer(s):** Hadid Jones

**Test Date(s):** 11/03/16




4x8 MIMO PSD									
Center Frequency	Port 3 (dBm)	Port 4 (dBm)	Port 5 (dBm)	Port 6 (dBm)	$\Sigma$ PSD (dBm)	Limit (dBm)	Gain (dBi)	Final limit (dBm)	Margin dB
<b>BW 20M_Ch 5745M_4x8 A 6M</b>	7.84	9.663	9.564	8.382	<b>14.96</b>	30	6.1	29.9	<b>-14.94</b>
<b>BW 20M_Ch 5745M_4x8 AC NSS1 MSC0</b>	7.055	7.984	9.528	8.721	<b>14.44</b>	30	6.1	29.9	<b>-15.46</b>
<b>BW 20M_Ch 5745M_4x8 N MSC0</b>	7.36	7.636	7.346	8.341	<b>13.72</b>	30	6.1	29.9	<b>-16.18</b>
<b>BW 20M_Ch 5805M_4x8 A 6M</b>	7.759	8.801	7.466	7.912	<b>14.04</b>	30	6.1	29.9	<b>-15.86</b>
<b>BW 20M_Ch 5805M_4x8 AC NSS1 MSC0</b>	6.74	7.69	9.899	8.676	<b>14.44</b>	30	6.1	29.9	<b>-15.46</b>
<b>BW 20M_Ch 5805M_4x8 N MSC0</b>	6.197	7.683	9.808	7.648	<b>14.06</b>	30	6.1	29.9	<b>-15.84</b>
<b>BW 20M_Ch 5825M_4x8 A 6M</b>	7.374	8.951	10.61	8.079	<b>14.95</b>	30	6.1	29.9	<b>-14.95</b>
<b>BW 20M_Ch 5825M_4x8 AC NSS1 MSC0</b>	5.873	7.736	9.997	9.027	<b>14.44</b>	30	6.1	29.9	<b>-15.46</b>
<b>BW 20M_Ch 5825M_4x8 N MSC0</b>	7.722	8.823	9.541	7.538	<b>14.51</b>	30	6.1	29.9	<b>-15.39</b>
<b>BW 40M_Ch 5755M_4x8 AC NSS1 MSC0</b>	4.708	6.21	5.401	5.862	<b>11.61</b>	30	6.1	29.9	<b>-18.29</b>
<b>BW 40M_Ch 5755M_4x8 N MSC0</b>	4.356	6.089	6.317	4.273	<b>11.39</b>	30	6.1	29.9	<b>-18.51</b>
<b>BW 40M_Ch 5795M_4x8 AC NSS1 MSC0</b>	4.367	5.244	7.469	5.635	<b>11.86</b>	30	6.1	29.9	<b>-18.04</b>
<b>BW 40M_Ch 5795M_4x8 N MSC0</b>	4.715	5.432	7.215	5.348	<b>11.81</b>	30	6.1	29.9	<b>-18.09</b>
<b>BW 80M_Ch 5775M_4x8 AC NSS1 MSC0</b>	2.22	4.284	2.546	2.74	<b>9.05</b>	30	6.1	29.9	<b>-20.85</b>

Table 10. Power Spectral Density, Test Results, 4x8


8x8 MIMO PSD													
Mode	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Port 5 (dBm)	Port 6 (dBm)	Port 7 (dBm)	Port 8 (dBm)	$\Sigma$ PSD (dBm)	Limit (dBm)	Antenna Gain	Final limit	Margin dB
<b>BW 20M_Ch 5745M_8x8 A 6M</b>	4.298	5.535	2.678	5.271	5.094	4.493	4.267	3.843	<b>13.55</b>	30	8.5	27.5	<b>-13.95</b>
<b>BW 20M_Ch 5745M_8x8 AC NSS1 MSC0</b>	4.82	6.438	4.126	5.681	5.414	5.14	4.841	4.293	<b>14.19</b>	30	8.5	27.5	<b>-13.31</b>
<b>BW 20M_Ch 5745M_8x8 N MCS0</b>	4.623	4.928	3.443	3.359	5.036	3.887	4.521	1.923	<b>13.1</b>	30	8.5	27.5	<b>-14.4</b>
<b>BW 20M_Ch 5805M_8x8 A 6M</b>	4.67	4.971	5.287	5.287	5.291	4.06	4.827	4.147	<b>13.88</b>	30	8.5	27.5	<b>-13.62</b>
<b>BW 20M_Ch 5805M_8x8 AC NSS1 MSC0</b>	3.816	6.579	4.451	5.794	5.649	4.925	5.056	4.612	<b>14.22</b>	30	8.5	27.5	<b>-13.28</b>
<b>BW 20M_Ch 5805M_8x8 N MCS0</b>	4.517	4.718	4.635	4.37	4.829	3.35	4.35	3.59	<b>13.36</b>	30	8.5	27.5	<b>-14.14</b>
<b>BW 20M_Ch 5825M_8x8 A 6M</b>	5.041	4.954	3.762	5.479	5.287	4.277	5.367	4.336	<b>13.89</b>	30	8.5	27.5	<b>-13.61</b>
<b>BW 20M_Ch 5825M_8x8 AC NSS1 MSC0</b>	3.548	5.975	5.527	6.423	6.206	4.612	5.54	3.441	<b>14.32</b>	30	8.5	27.5	<b>-13.18</b>
<b>BW 20M_Ch 5825M_8x8 N MCS0</b>	3.694	5.497	4.204	5.327	4.432	4.059	4.36	3.45	<b>13.47</b>	30	8.5	27.5	<b>-14.03</b>
<b>BW 40M_Ch 5755M_8x8 AC NSS1 MSC0</b>	2.486	1.842	1.624	2.724	3.516	2.03	3.304	1.42	<b>11.47</b>	30	8.5	27.5	<b>-16.03</b>
<b>BW 40M_Ch 5755M_8x8 N MSC0</b>	3.547	5.454	3.489	4.709	5.557	3.609	4.993	3.074	<b>13.44</b>	30	8.5	27.5	<b>-14.06</b>
<b>BW 40M_Ch 5795M_8x8 AC NSS1 MSC0</b>	4.102	3.47	3.558	3.981	4.682	3.256	4.409	3.036	<b>12.88</b>	30	8.5	27.5	<b>-14.62</b>
<b>BW 40M_Ch 5795M_8x8 N MSC0</b>	4.043	4.102	2.887	3.986	4.522	3.884	5.078	3.898	<b>13.12</b>	30	8.5	27.5	<b>-14.38</b>
<b>BW 80M_Ch 5775M_8x8 AC NSS1 MSC0</b>	0.46	-0.417	-0.11	1.078	3.416	3.008	1.733	3.473	<b>10.86</b>	30	8.5	27.5	<b>-16.64</b>

Table 11. Power Spectral Density, Test Results, 8x8


### Power Spectral Density, 802.11a, 4x8, CH3

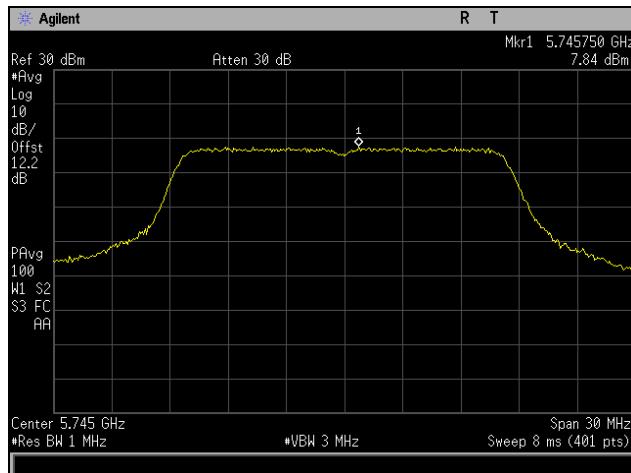

Plot 41. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, CH3

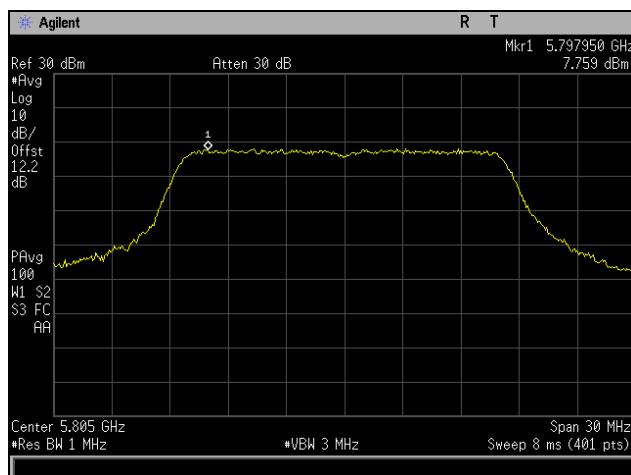


Plot 42. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 4x8, 6M, CH3

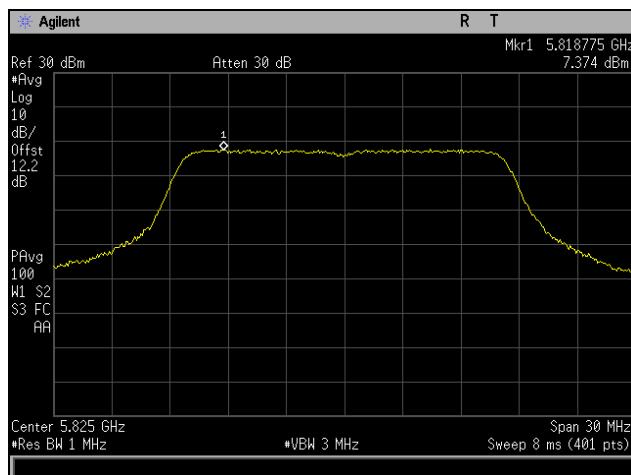


Plot 43. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, CH3


## Power Spectral Density, 802.11ac 20 MHz, 4x8, CH3

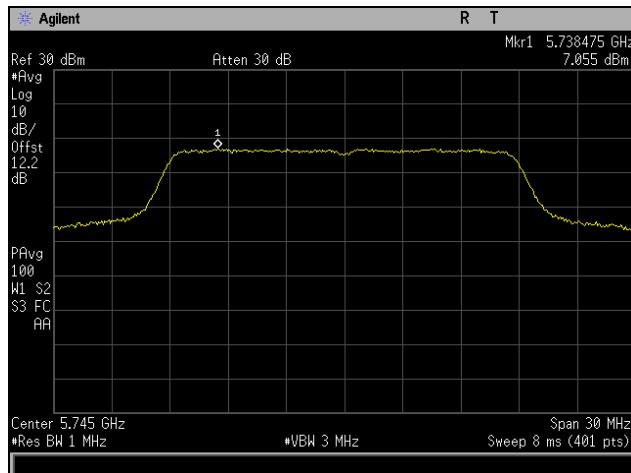

Plot 44. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3

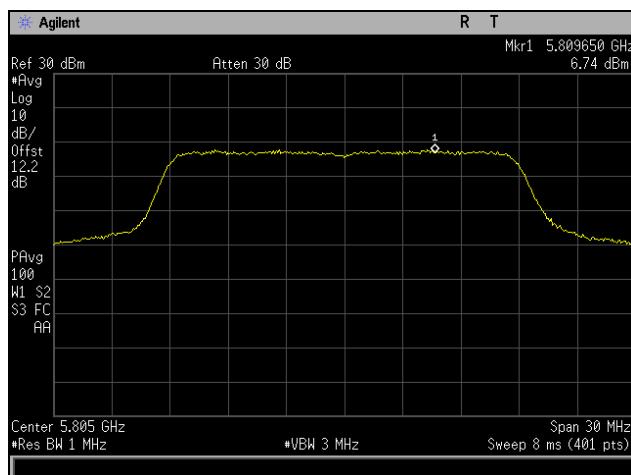


Plot 45. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3

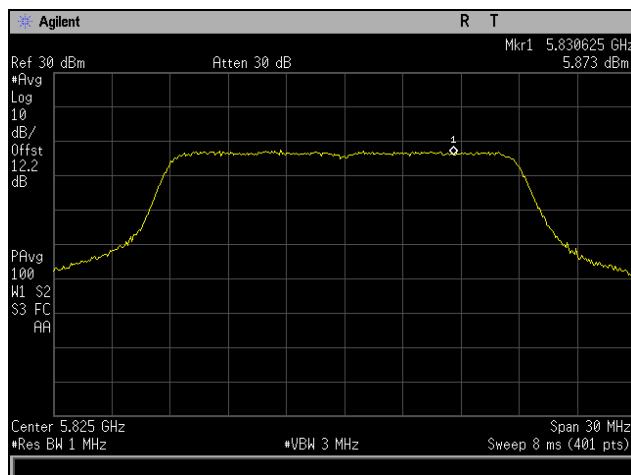


Plot 46. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3

## Power Spectral Density, 802.11ac 40 MHz, 4x8, CH3

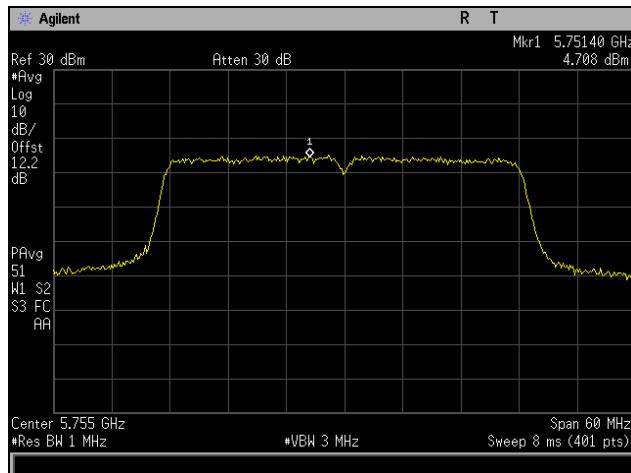


Plot 47. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3

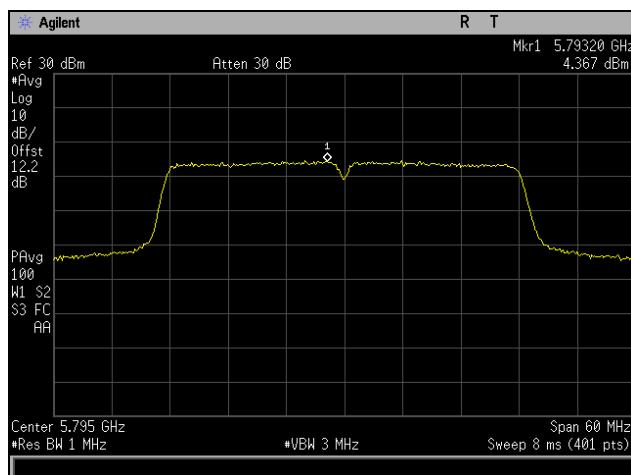


Plot 48. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3

## Power Spectral Density, 802.11ac 80 MHz, 4x8, CH3

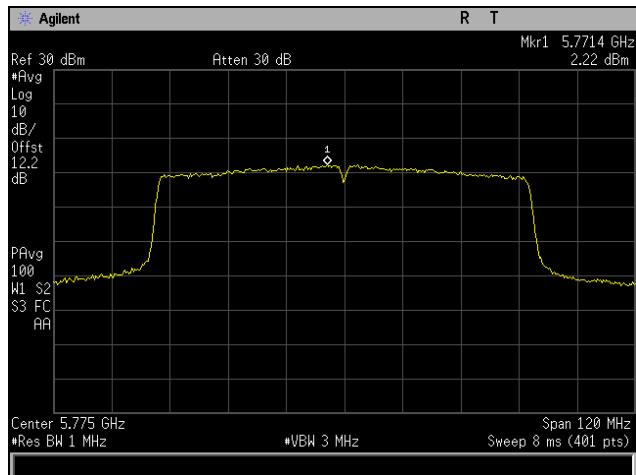


**Plot 49. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, MCS0 NSS1, CH3**


## Power Spectral Density, 802.11n 20 MHz, 4x8, CH3

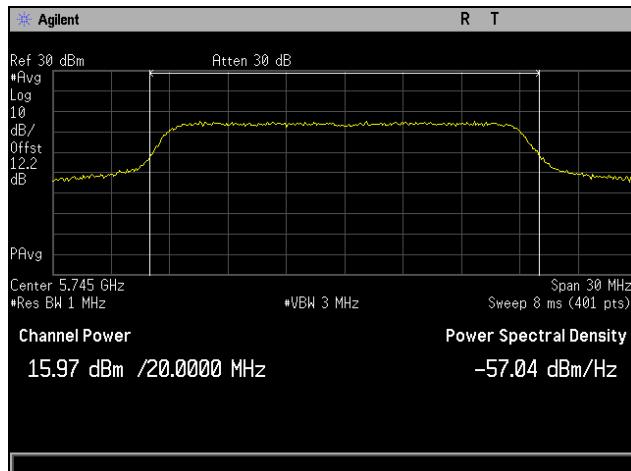

**Plot 50. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0 NSS1, CH3**

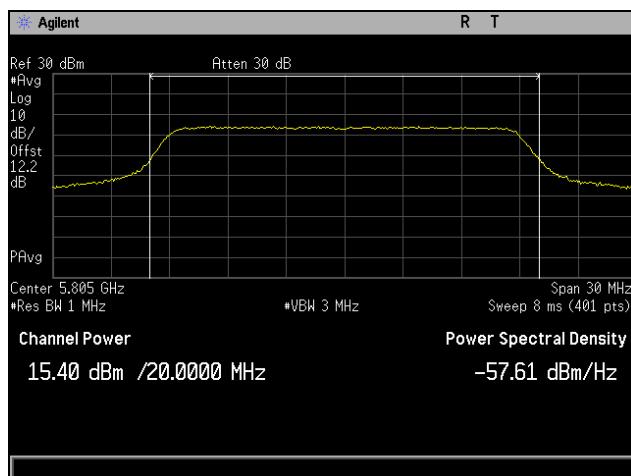


**Plot 51. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 4x8, MCS0 NSS1, CH3**

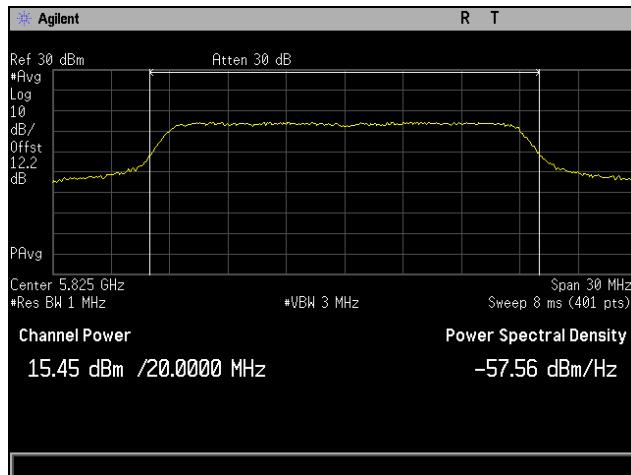


**Plot 52. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0 NSS1, CH3**

## Power Spectral Density, 802.11n 40 MHz, 4x8, CH3

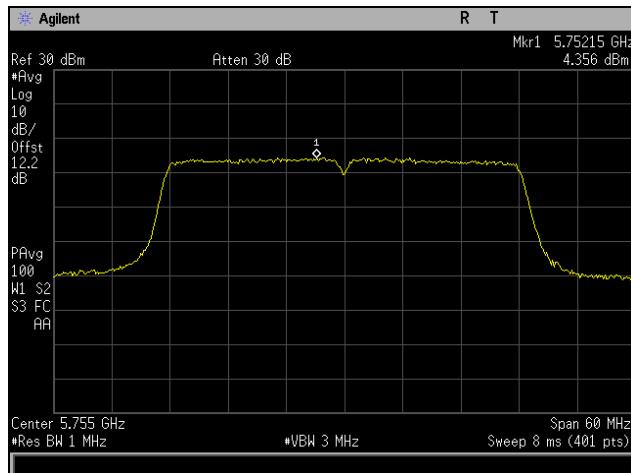


**Plot 53. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0 NSS1, CH3**

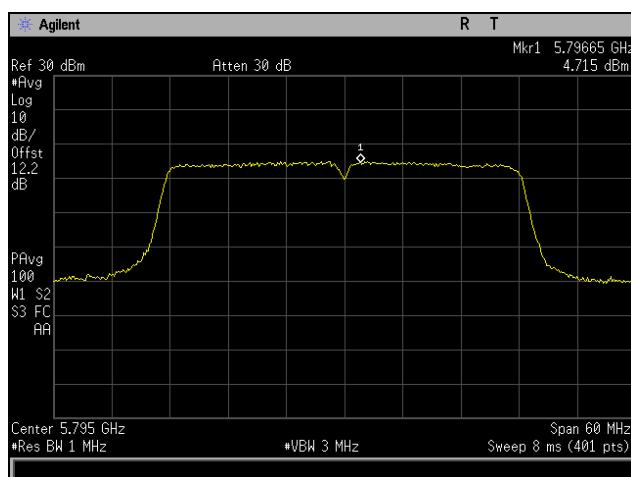


**Plot 54. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0 NSS1, CH3**


## Power Spectral Density, 802.11a, 8x8, CH1

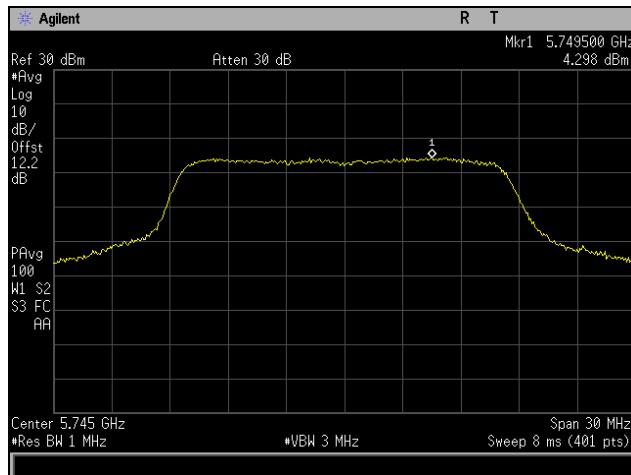

Plot 55. Power Spectral Density, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, CH1

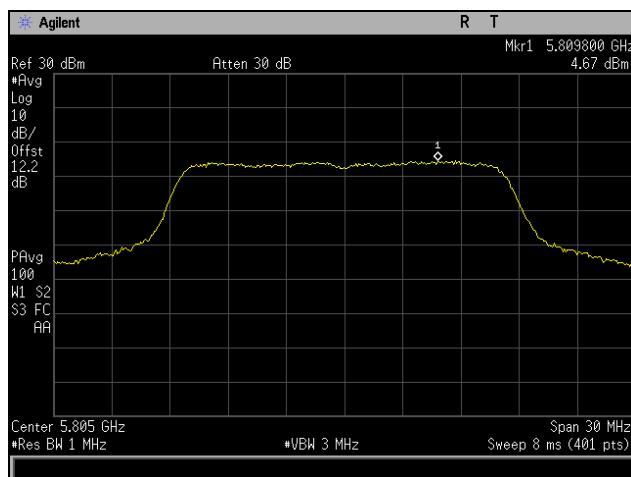


Plot 56. Power Spectral Density, 802.11a 20 MHz, Channel 5805 MHz, 8x8, 6M, CH1

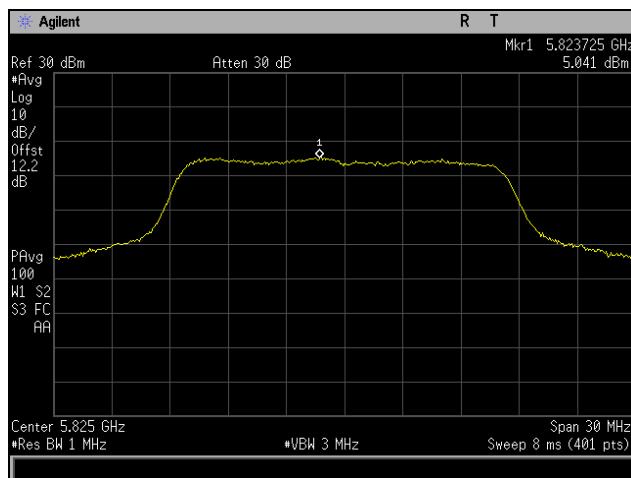


Plot 57. Power Spectral Density, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, CH1


## Power Spectral Density, 802.11ac 20 MHz, 8x8, CH1

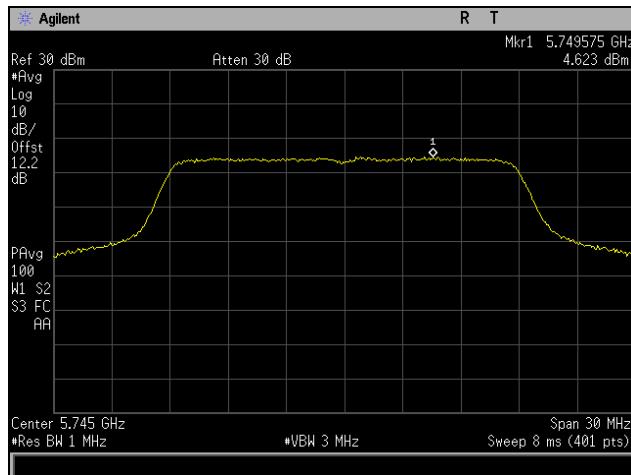

Plot 58. Power Spectral Density, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1

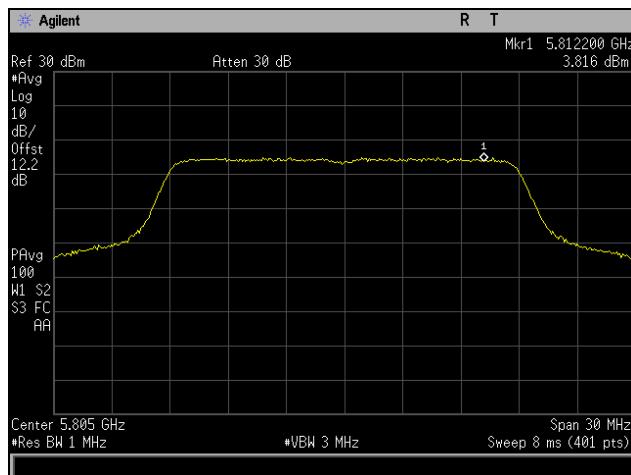


Plot 59. Power Spectral Density, 802.11ac 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1

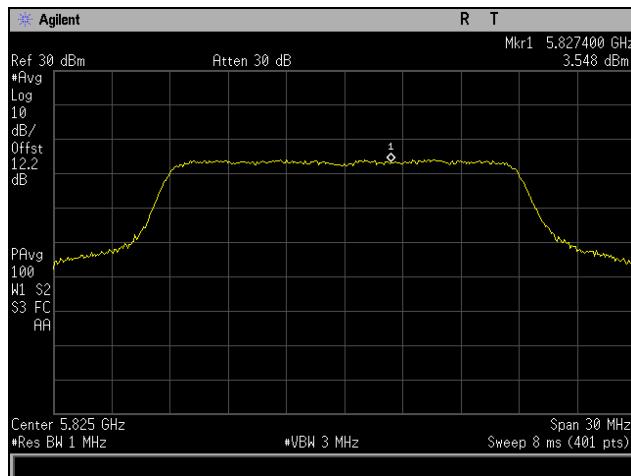


Plot 60. Power Spectral Density, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1

## Power Spectral Density, 802.11ac 40 MHz, 8x8, CH1

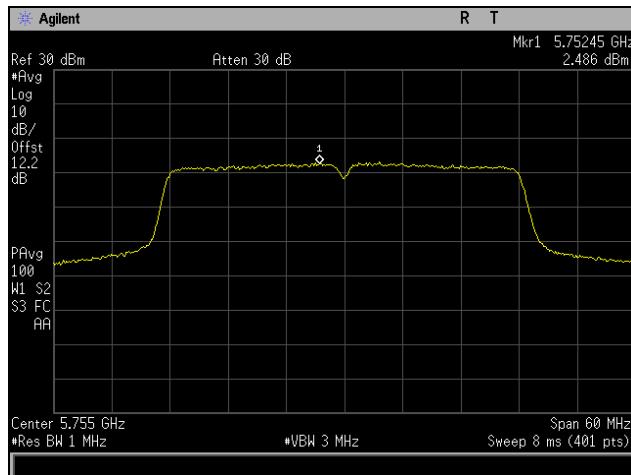


Plot 61. Power Spectral Density, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1

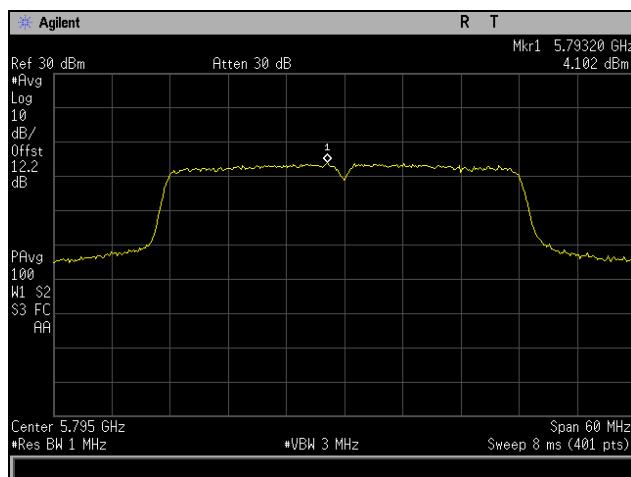


Plot 62. Power Spectral Density, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1

## Power Spectral Density, 802.11ac 80 MHz, 8x8, CH1

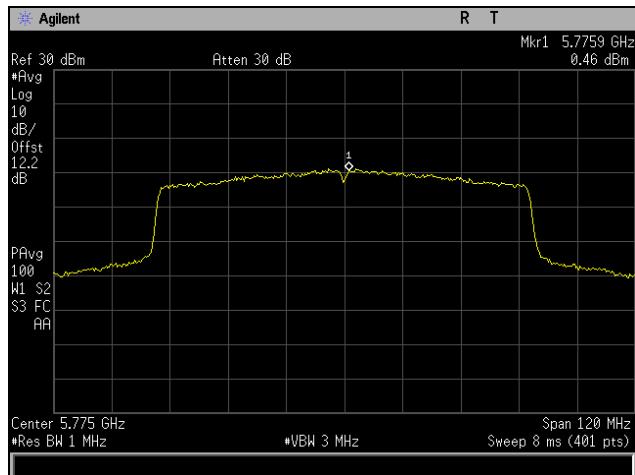


Plot 63. Power Spectral Density, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, MCS0 NSS1, CH1


## Power Spectral Density, 802.11n 20 MHz, 8x8, CH1

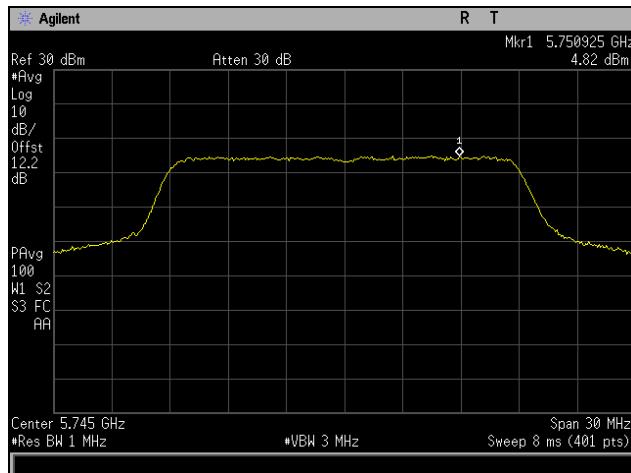

Plot 64. Power Spectral Density, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0 NSS1, CH1

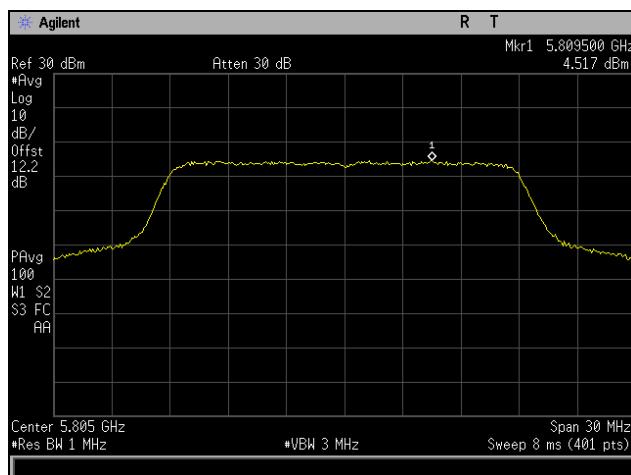


Plot 65. Power Spectral Density, 802.11n 20 MHz, Channel 5805 MHz, 8x8, MCS0 NSS1, CH1

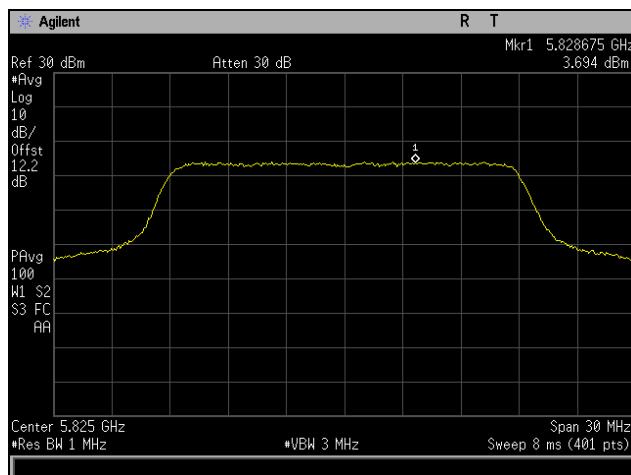


Plot 66. Power Spectral Density, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0 NSS1, CH1

## Power Spectral Density, 802.11n 40 MHz, 8x8, CH1

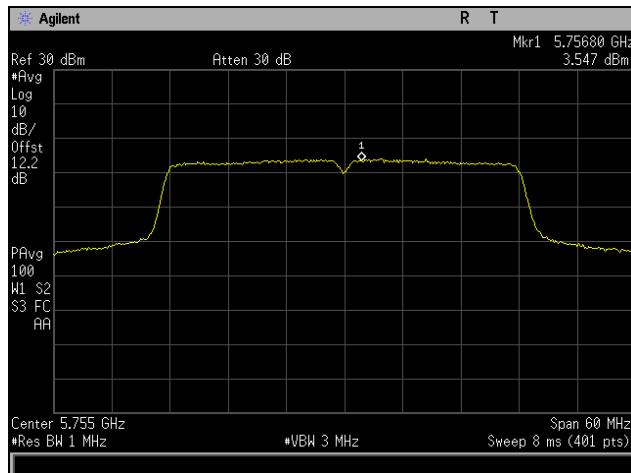

**Plot 67. Power Spectral Density, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0 NSS1, CH1**

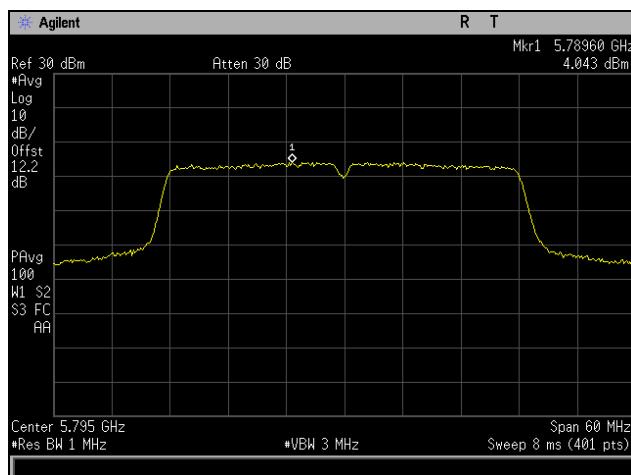

**Plot 68. Power Spectral Density, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0 NSS1, CH1**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(b)(4) & (6 – 7) Undesirable Emissions

**Test Requirements:** **§ 15.407(b)(4):** For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17 \text{ dBm/MHz}$ ; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27 \text{ dBm/MHz}$ .

**§ 15.407(b)(6):** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

**§ 15.407(b)(7):** The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v01. The equation, **EIRP = E + 20 log D - 104.8** was used to convert field strength to EIRP (**E** = field strength ( $\text{dB}\mu\text{V/m}$ ) and **D** = Reference measurement distance).

For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209.

As an alternative, according to FCC KDB 789033 D02 General UNII Test Procedure New Rules v01, all emissions above 1 GHz that comply with the peak and average limits of 15.209 satisfy the requirements of unwanted emissions in 15.407.

**Test Results:** For below 1 GHz, the EUT was compliant the requirements of this section. The worst case was reported.

For above 1 GHz, the EUT was compliant with the requirements of this section.


Only the noise floor was observed above 18GHz

Note: all y-axis units are  $\text{dB}\mu\text{V/m}$


**Test Engineer(s):** Hadid Jones

**Test Date(s):** 11/03/16

## Radiated Spurious Emissions

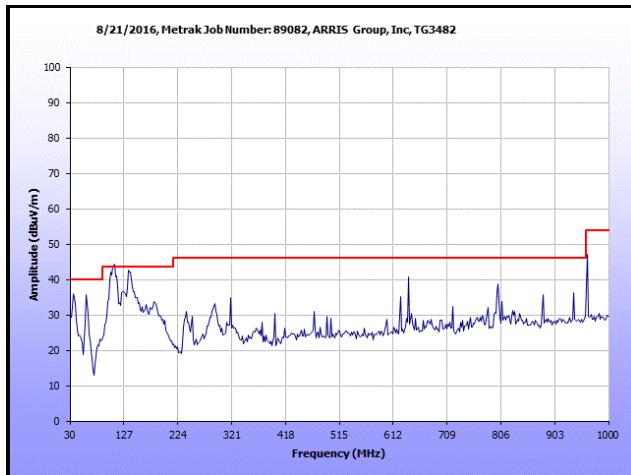


**Plot 69. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio Off**

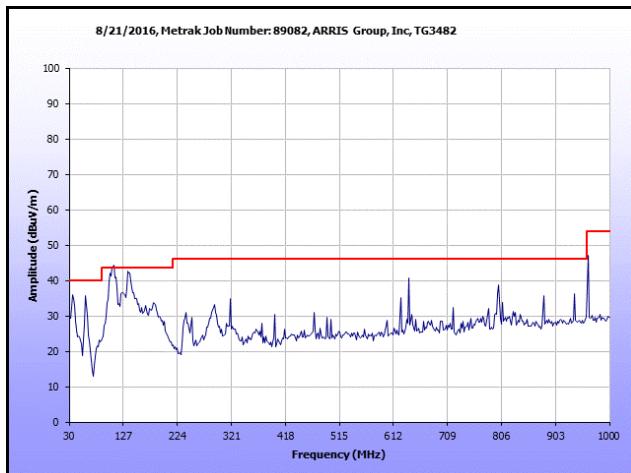


**Plot 70. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio On**

### Radiated Spurious Emissions, Mask, 802.11a, 4x8

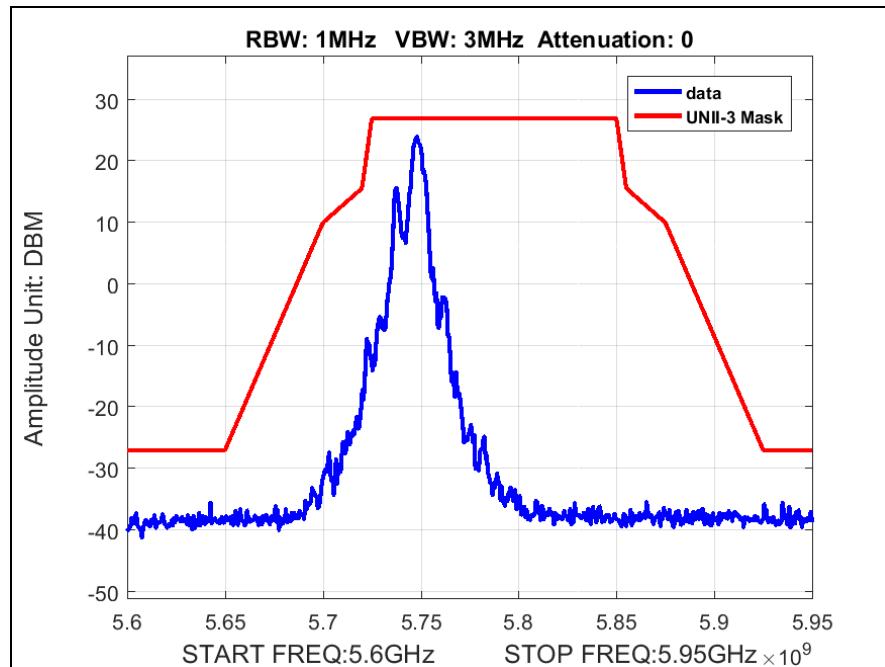


Plot 71. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M

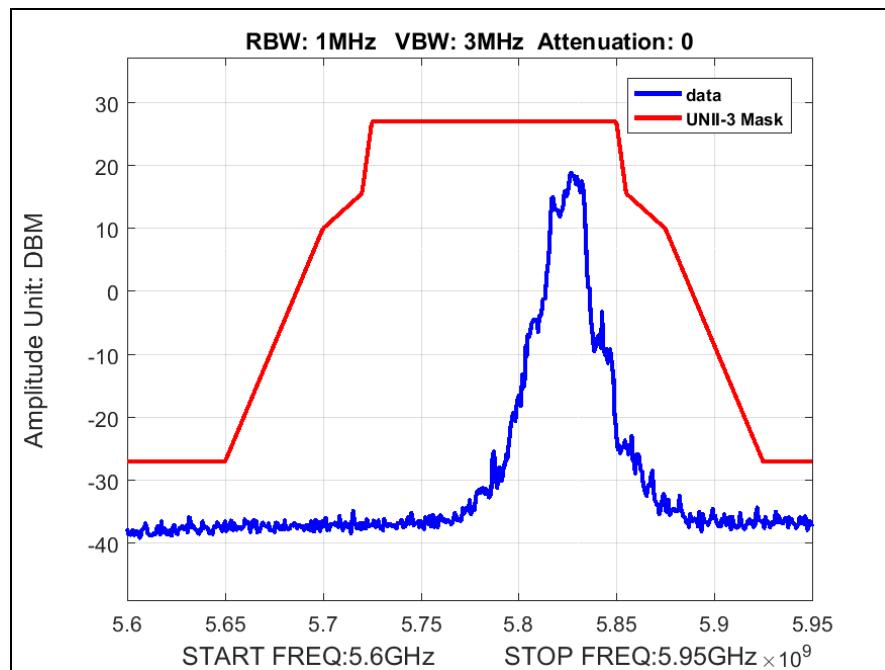


Plot 72. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M

### Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, 4x8

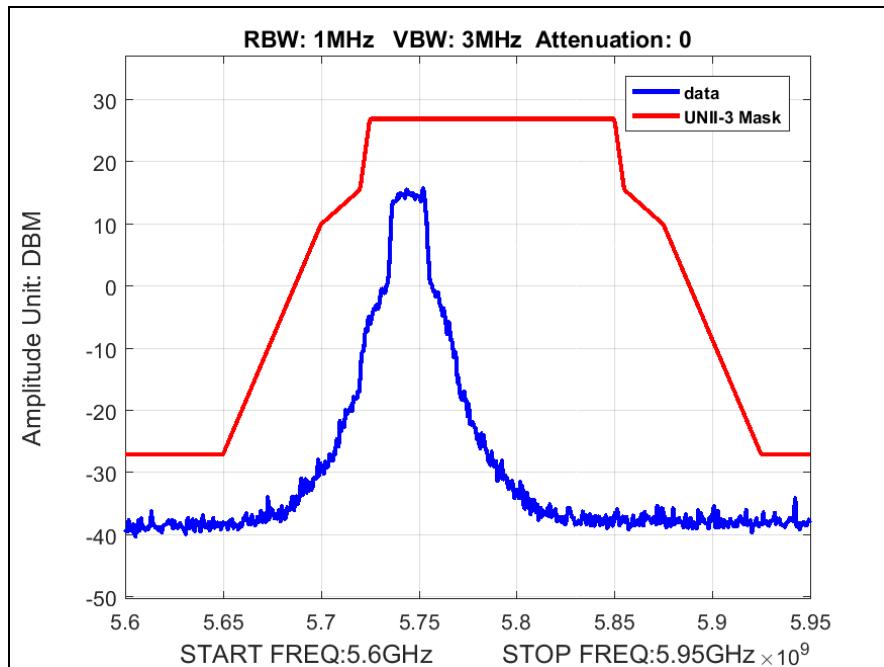


Plot 73. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0

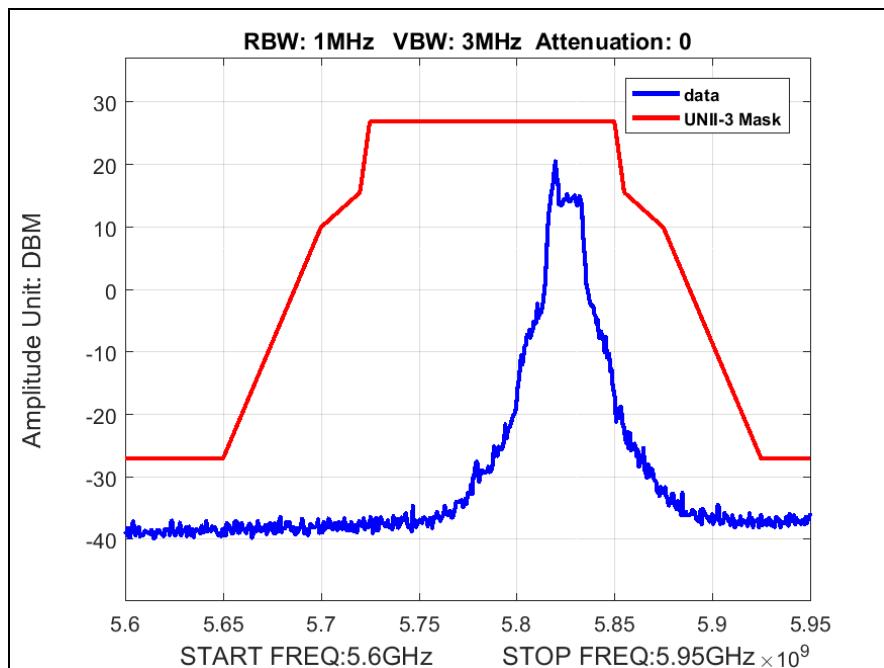


Plot 74. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0

### Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, 4x8

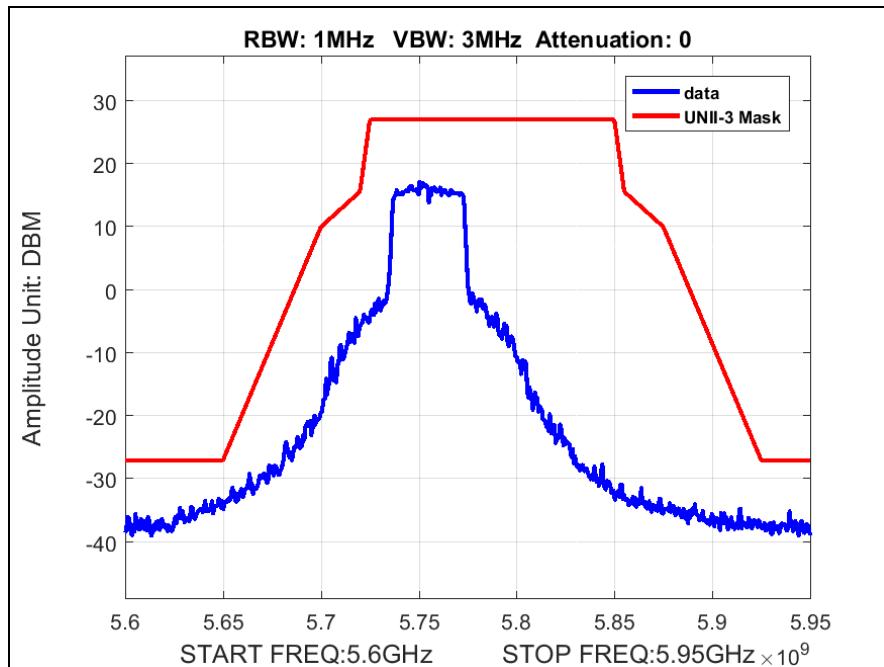


Plot 75. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0

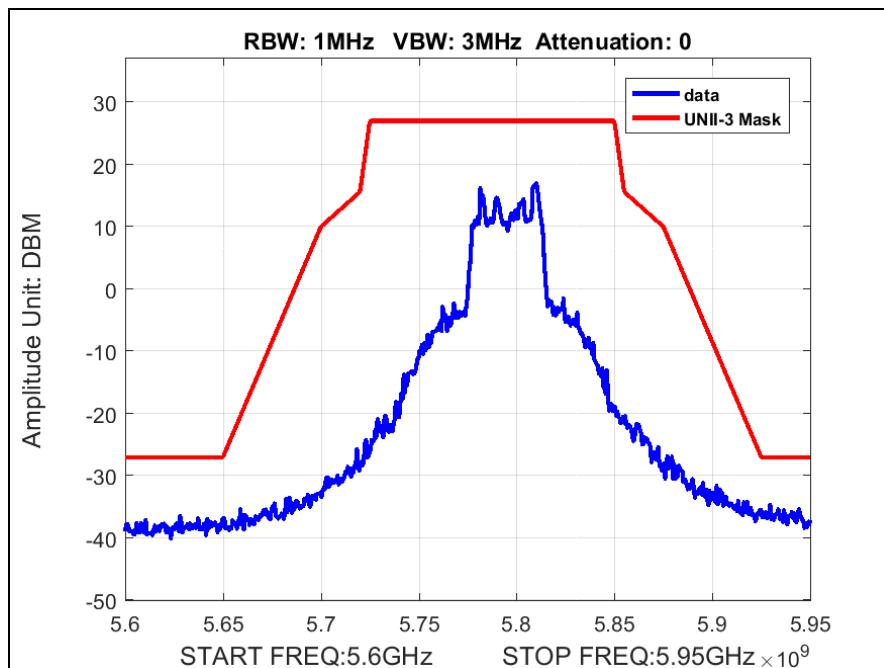


Plot 76. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0

### Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, 4x8

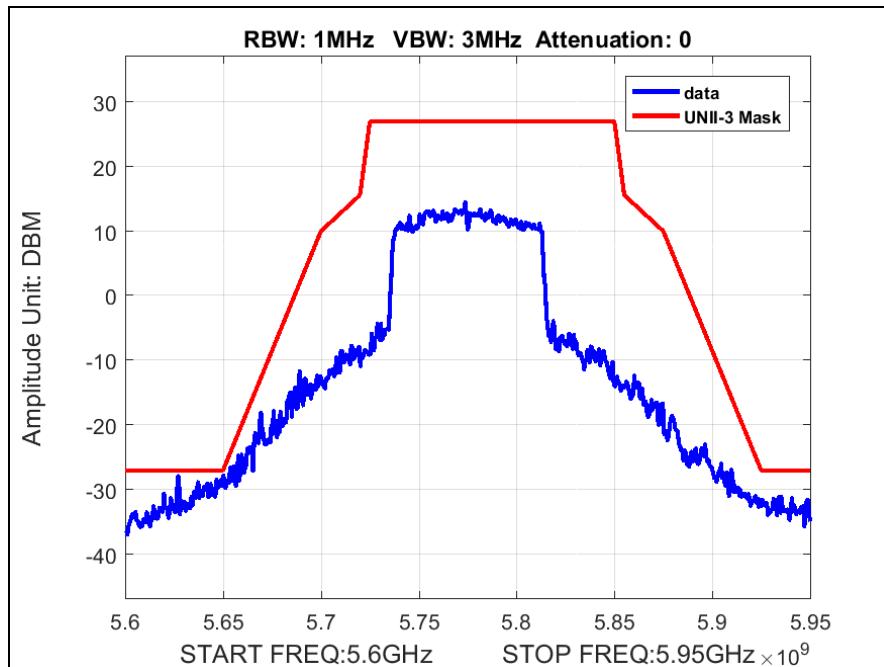


Plot 77. Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0

### Radiated Spurious Emissions, Mask, 802.11n 20 MHz, 4x8

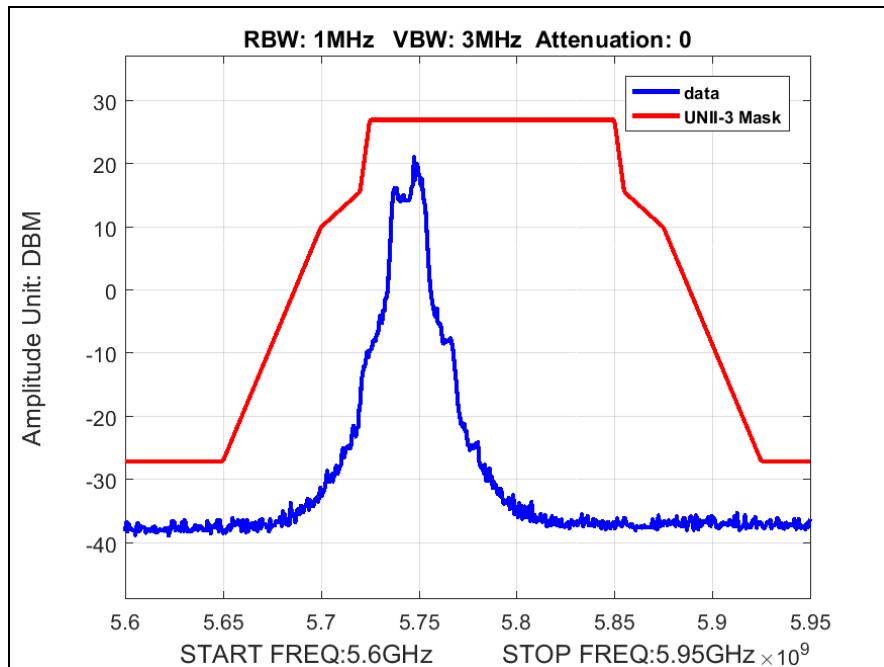


Plot 78. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0

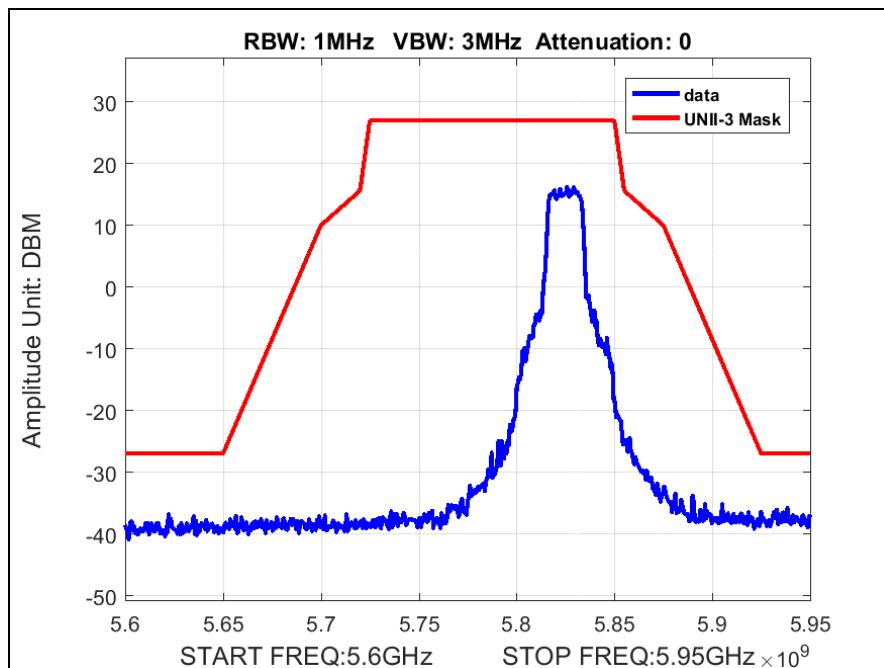


Plot 79. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0

### Radiated Spurious Emissions, Mask, 802.11n 40 MHz, 4x8

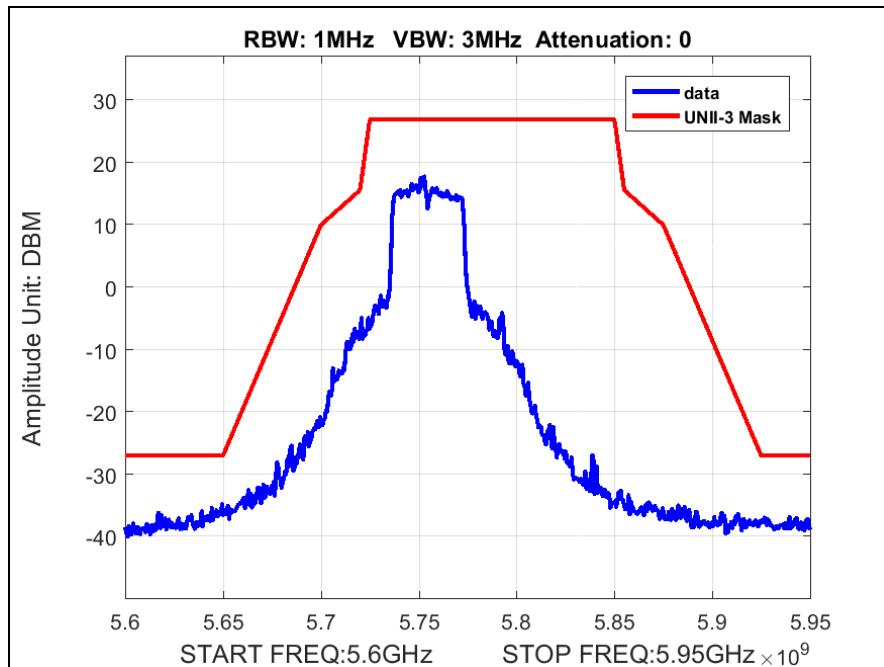


Plot 80. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0

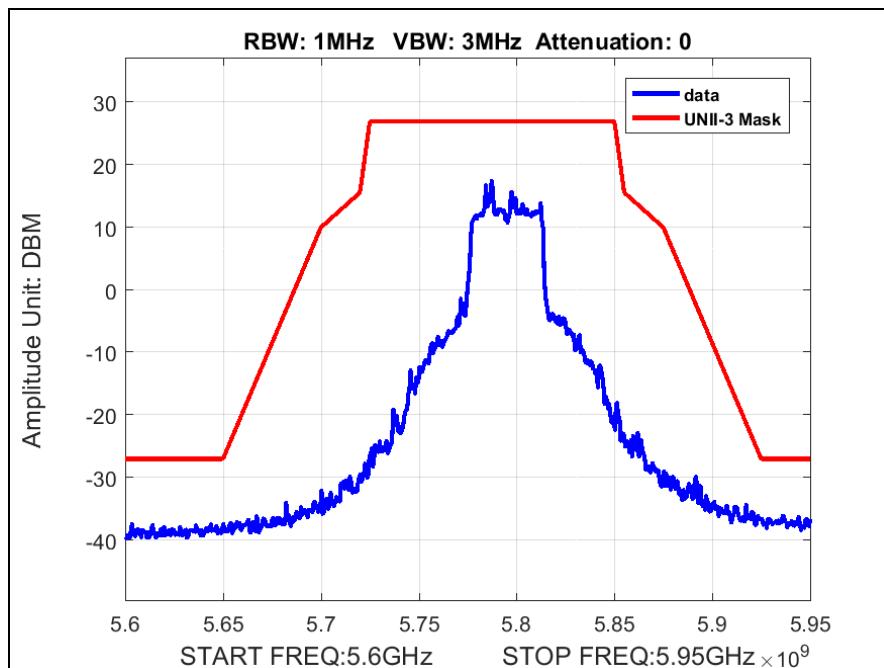


Plot 81. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0

### Radiated Spurious Emissions, Mask, 802.11a, 8x8

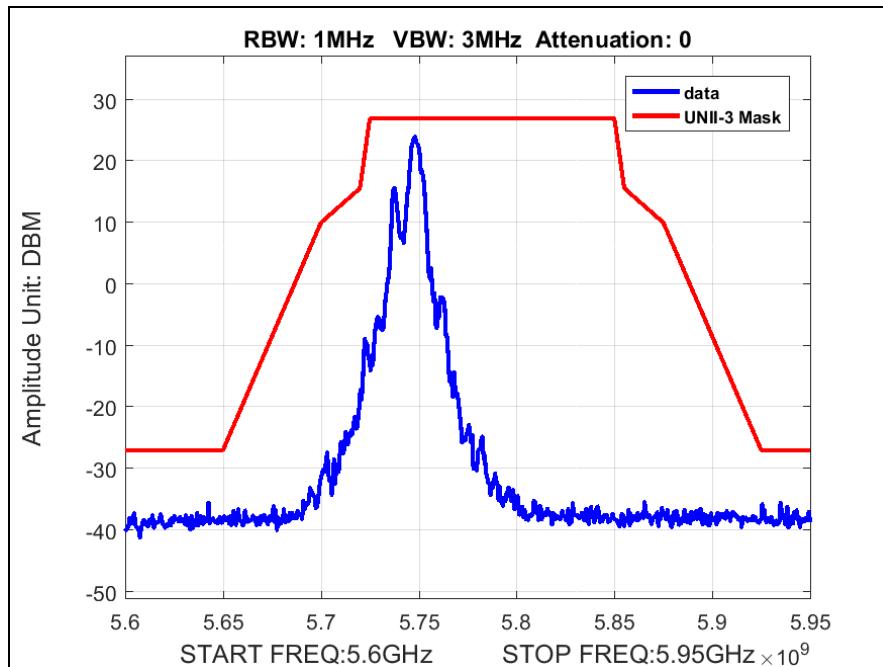


Plot 82. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M

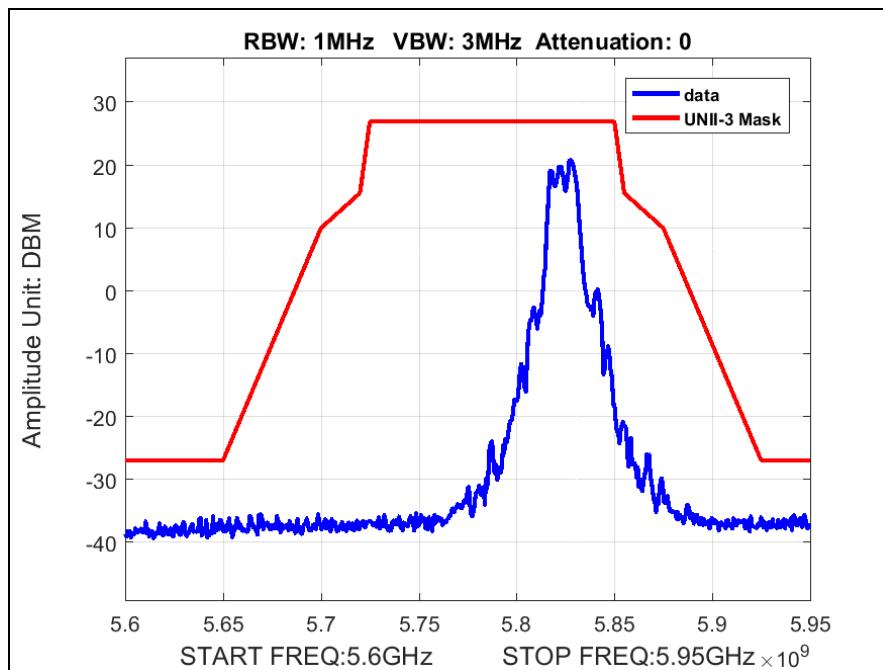


Plot 83. Radiated Spurious Emissions, Mask, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M

### Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, 8x8

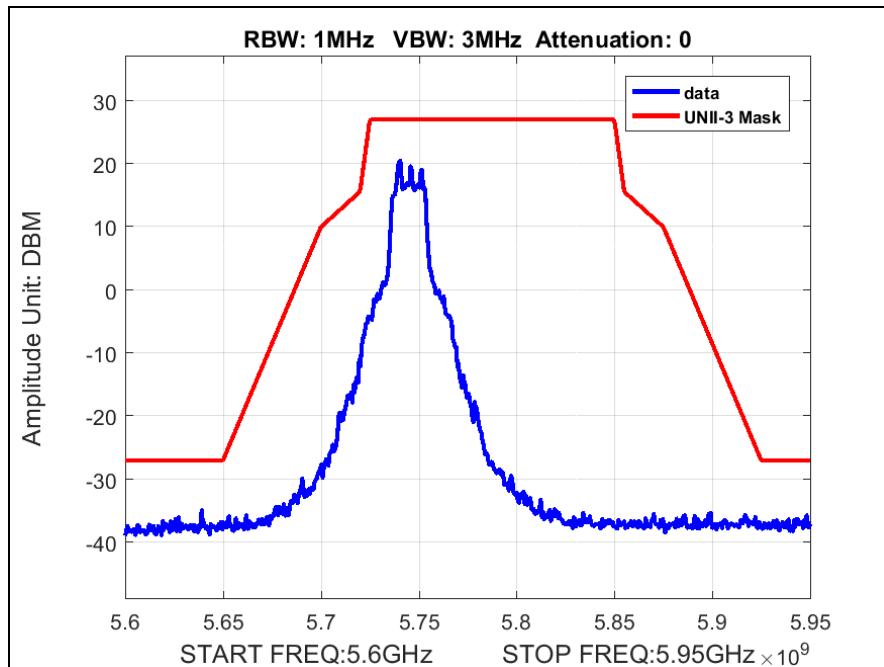


Plot 84. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, NSS1 MCS0

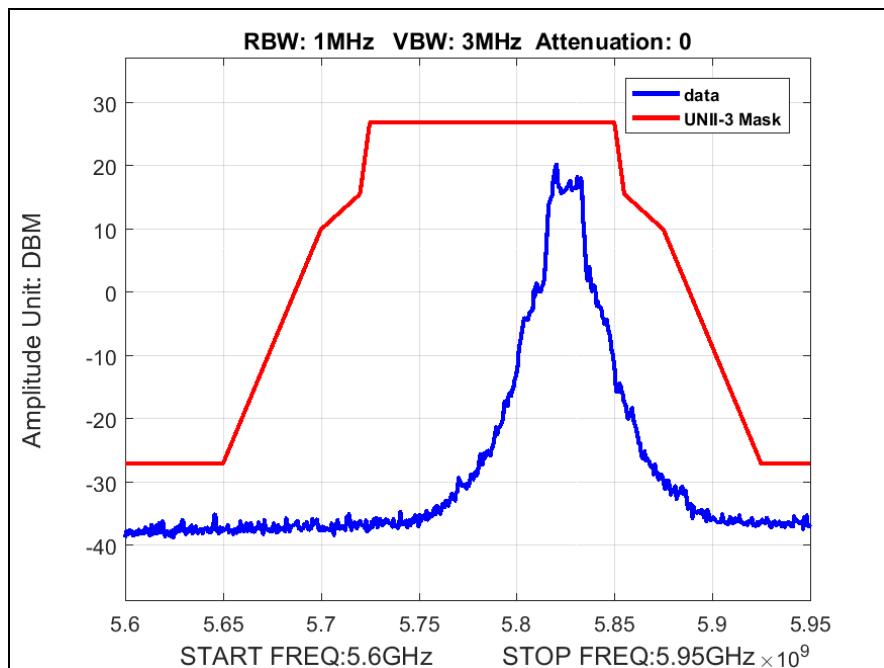


Plot 85. Radiated Spurious Emissions, Mask, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, NSS1 MCS0

### Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, 8x8

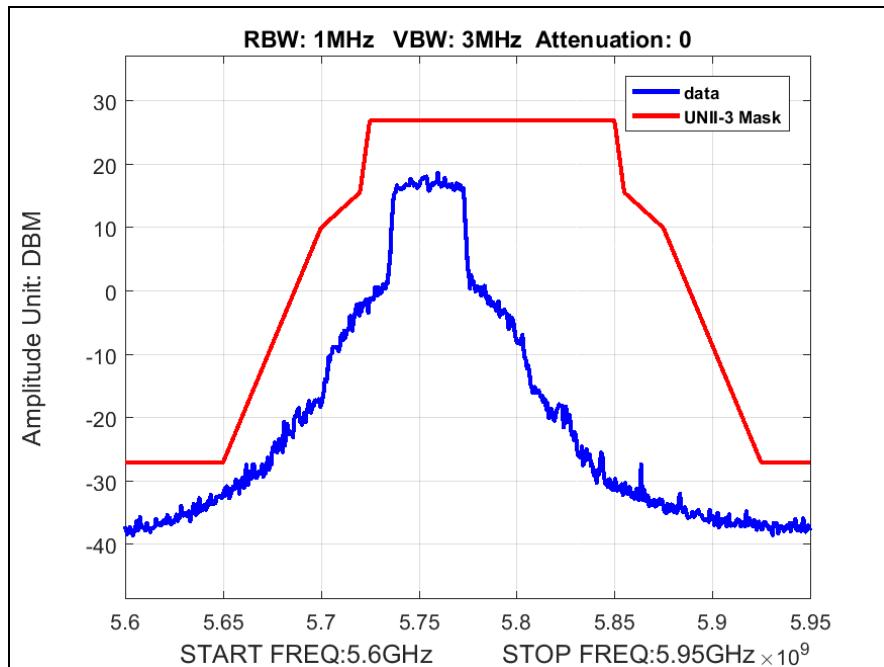


Plot 86. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, NSS1 MCS0

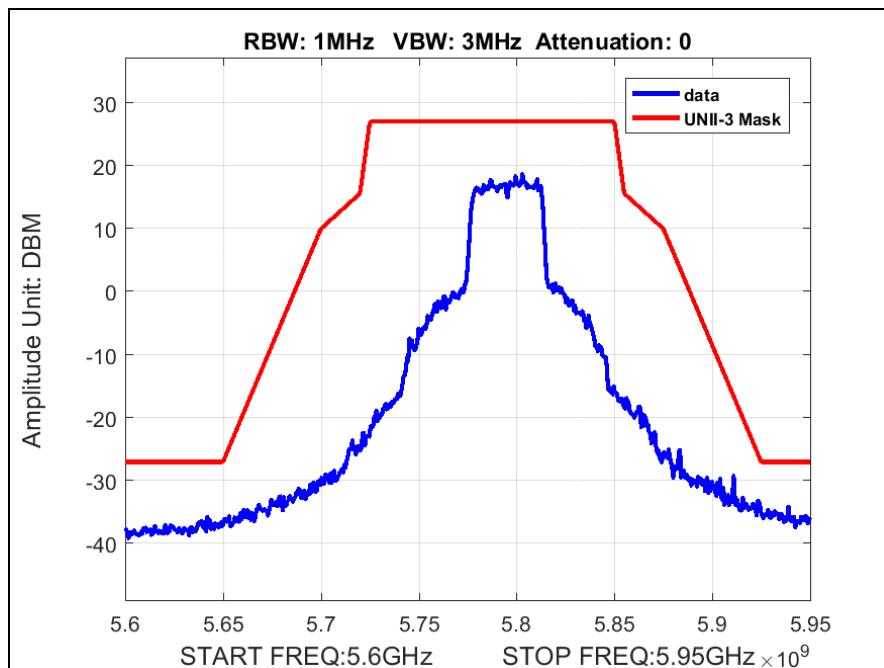


Plot 87. Radiated Spurious Emissions, Mask, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, NSS1 MCS0

### Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, 8x8

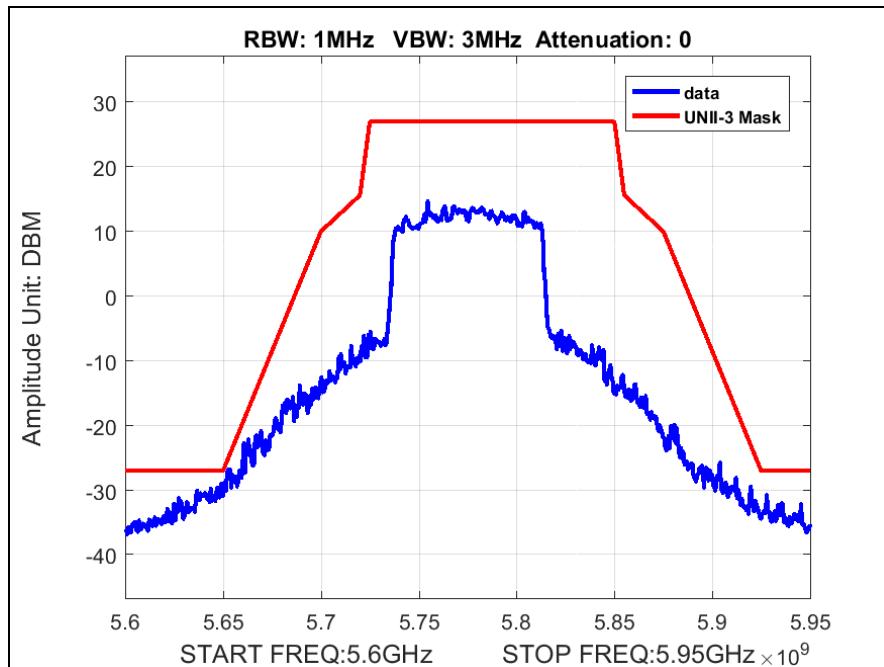


Plot 88. Radiated Spurious Emissions, Mask, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, NSS1 MCS0

### Radiated Spurious Emissions, Mask, 802.11n 20 MHz, 8x8

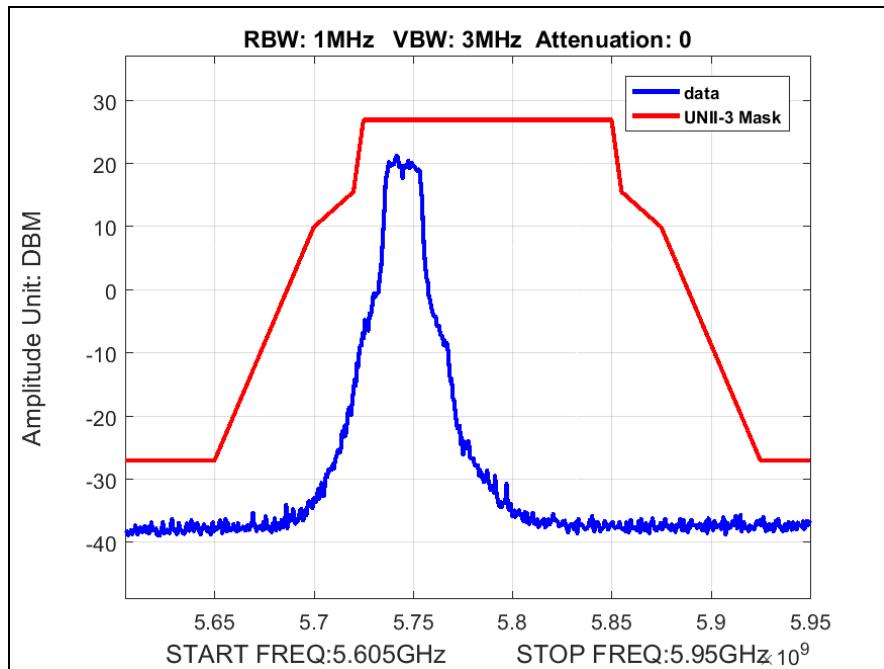


Plot 89. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0

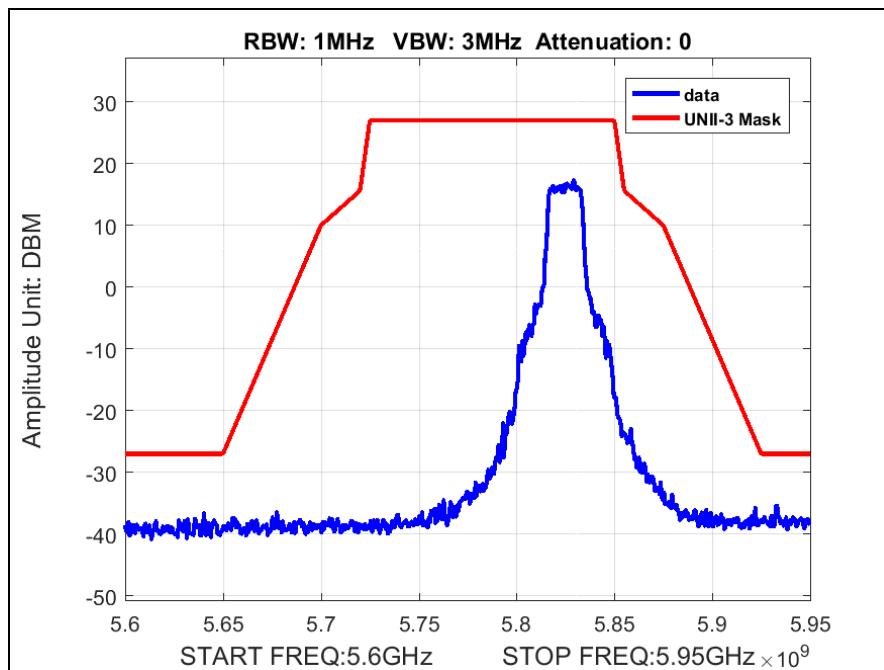


Plot 90. Radiated Spurious Emissions, Mask, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0

### Radiated Spurious Emissions, Mask, 802.11n 40 MHz, 8x8

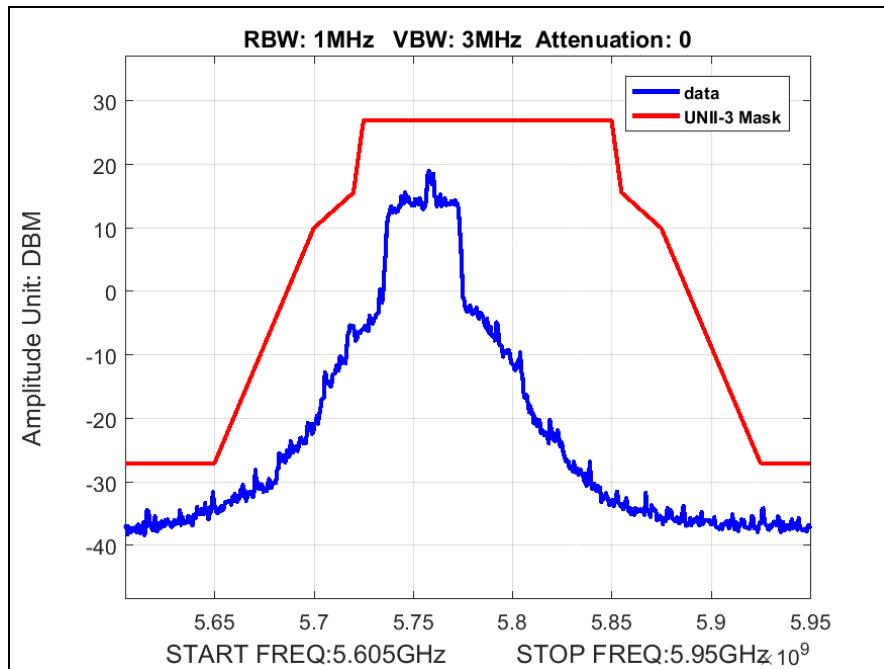


Plot 91. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0

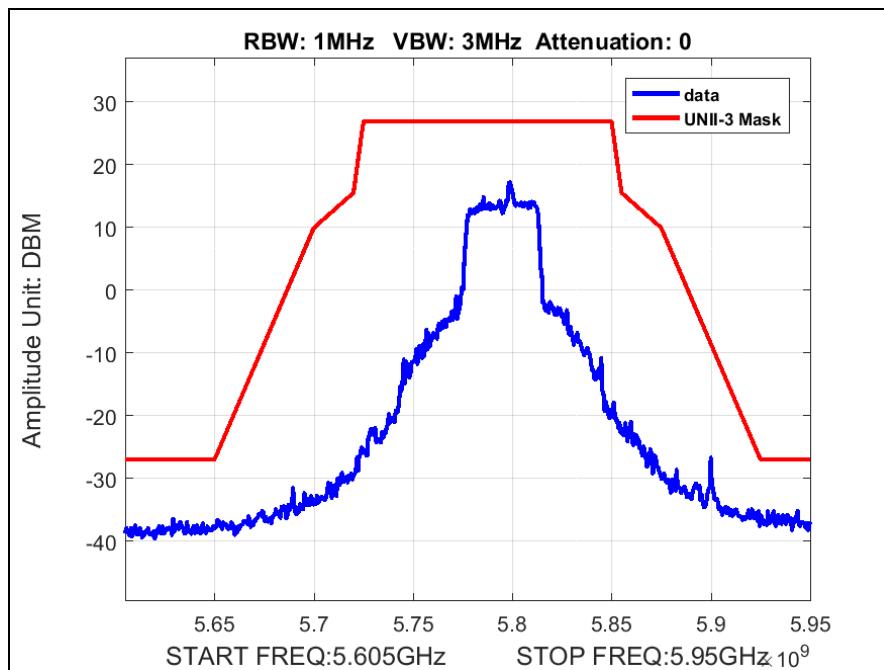


Plot 92. Radiated Spurious Emissions, Mask, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0


## Radiated Spurious Emissions, 802.11a, 4x8

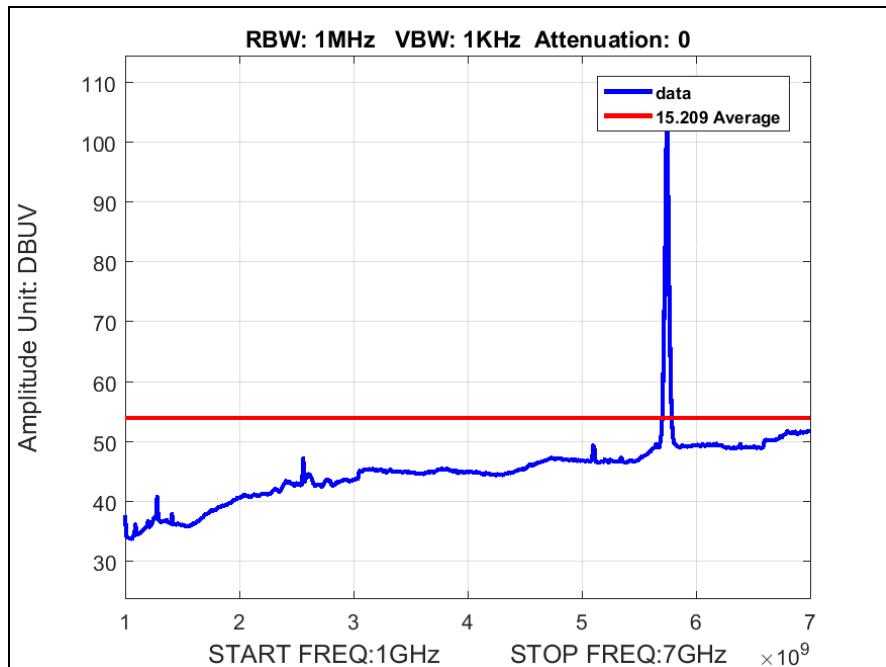


Plot 93. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average

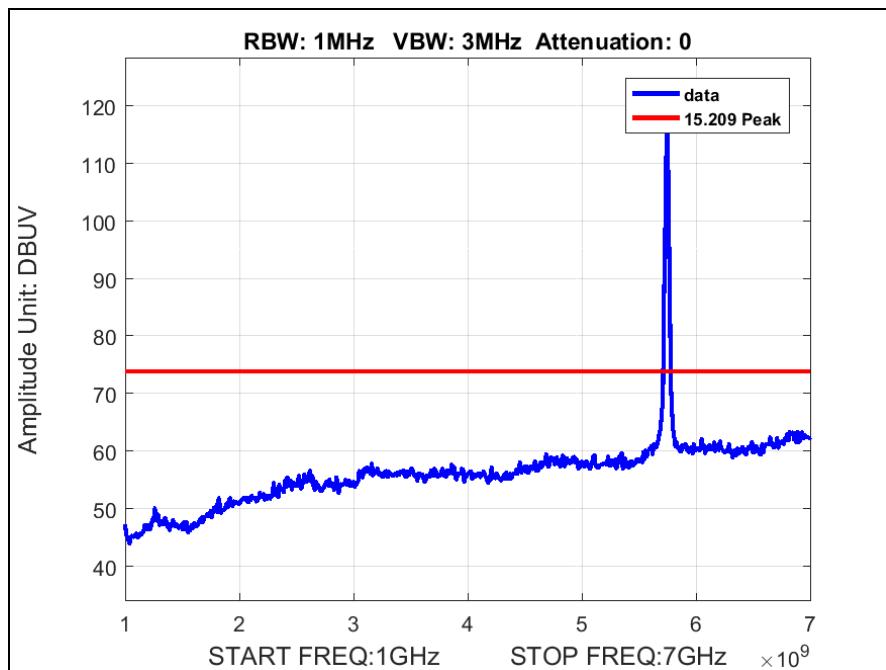

Plot 94. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak

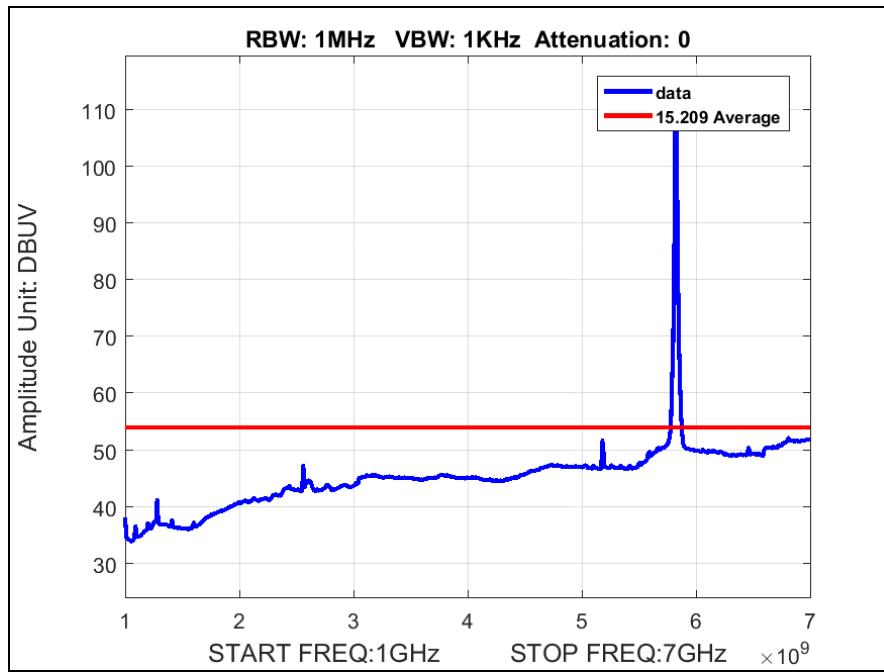


Plot 95. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average

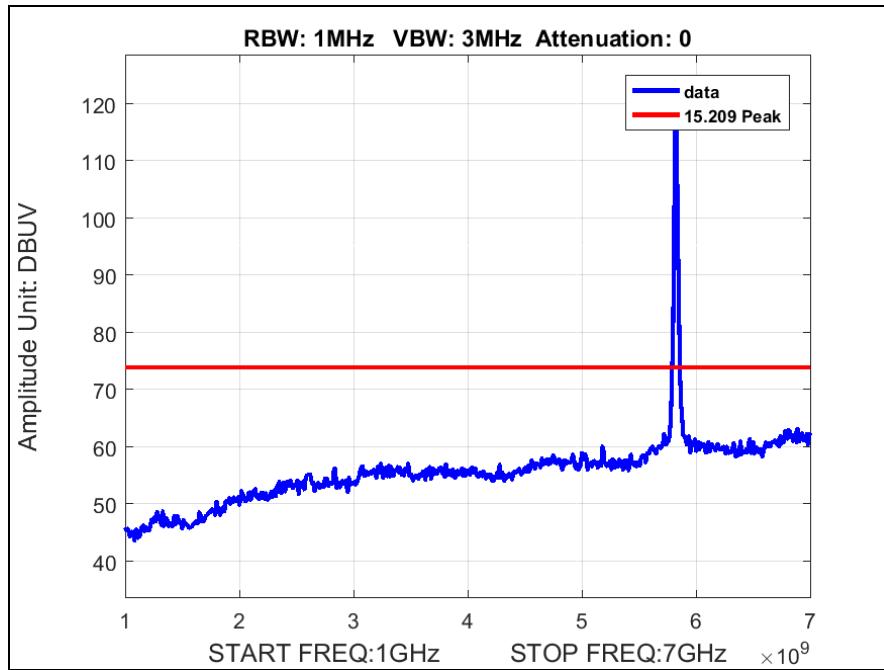


Plot 96. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak


### Radiated Spurious Emissions, 802.11ac 20 MHz, 4x8

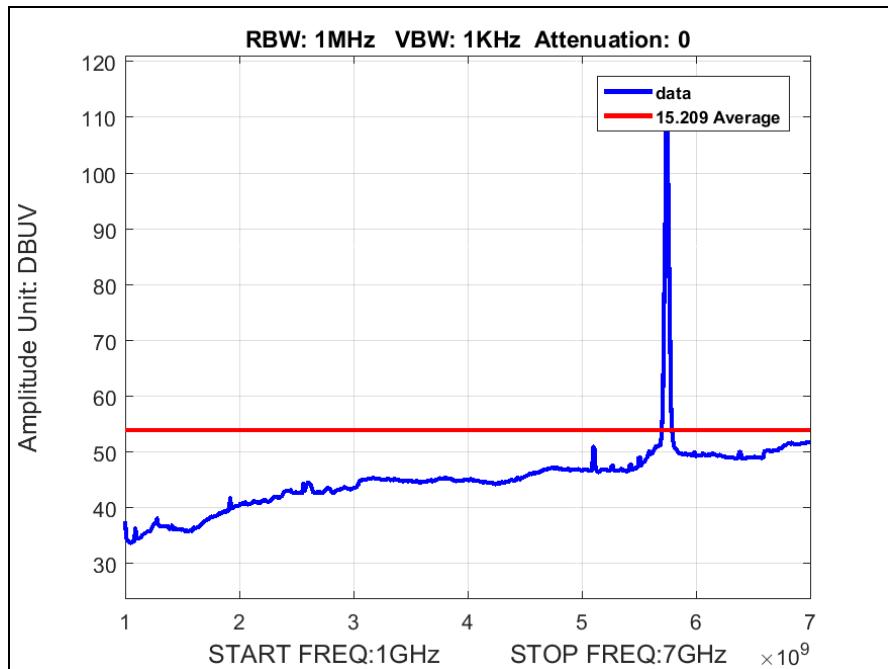


Plot 97. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average

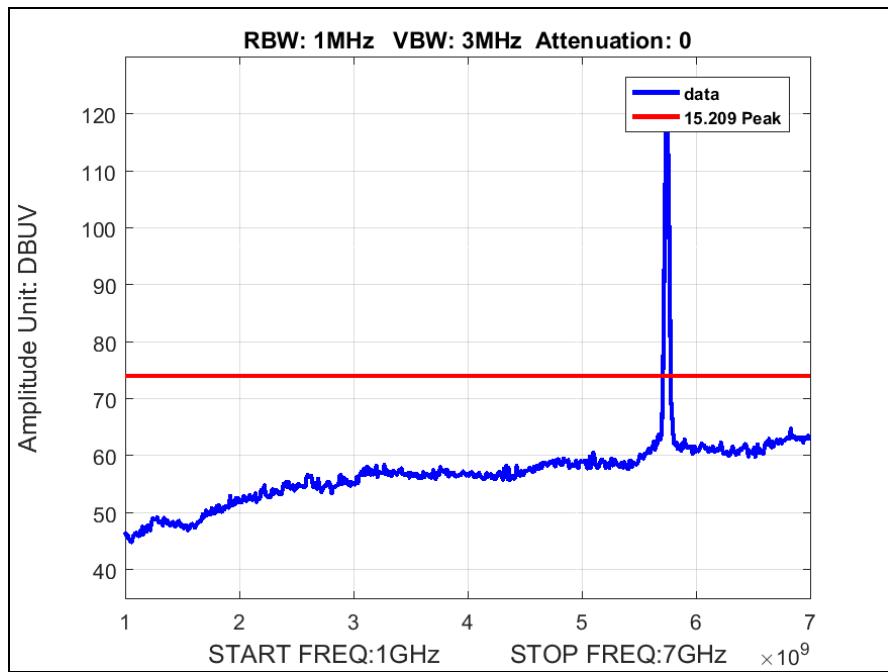

Plot 98. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak

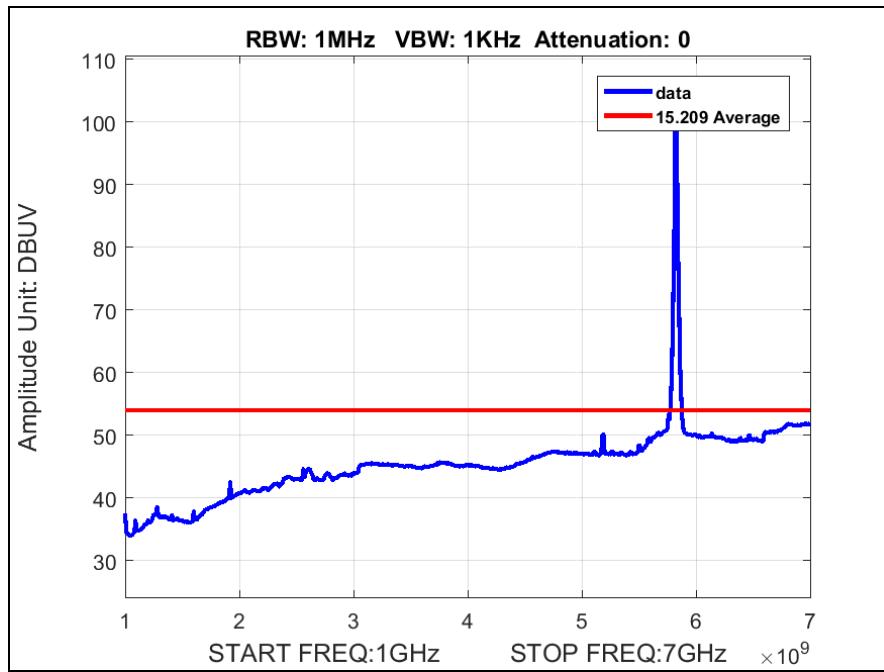


**Plot 99. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average**

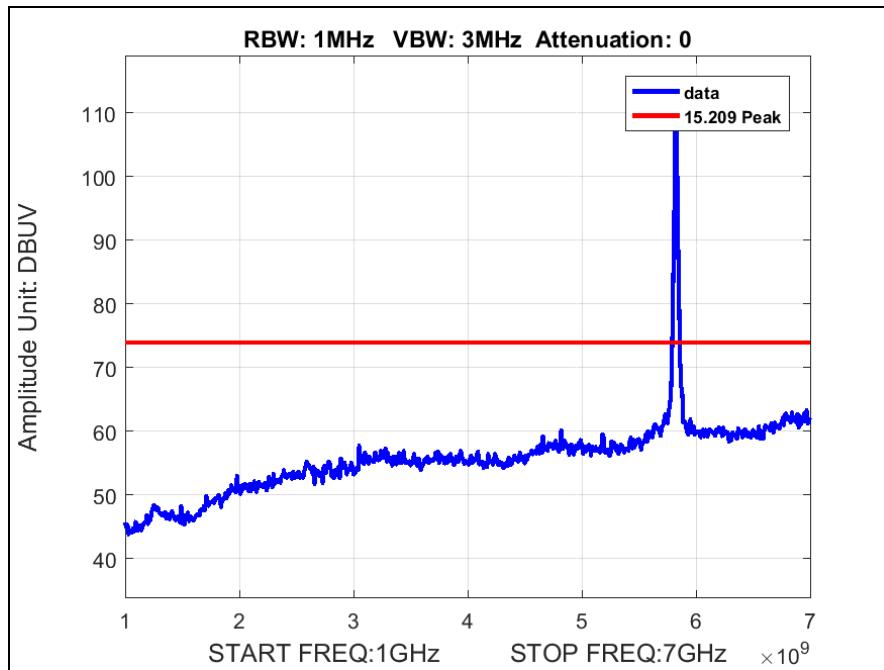


**Plot 100. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak**


## Radiated Spurious Emissions, 802.11ac 40 MHz, 4x8

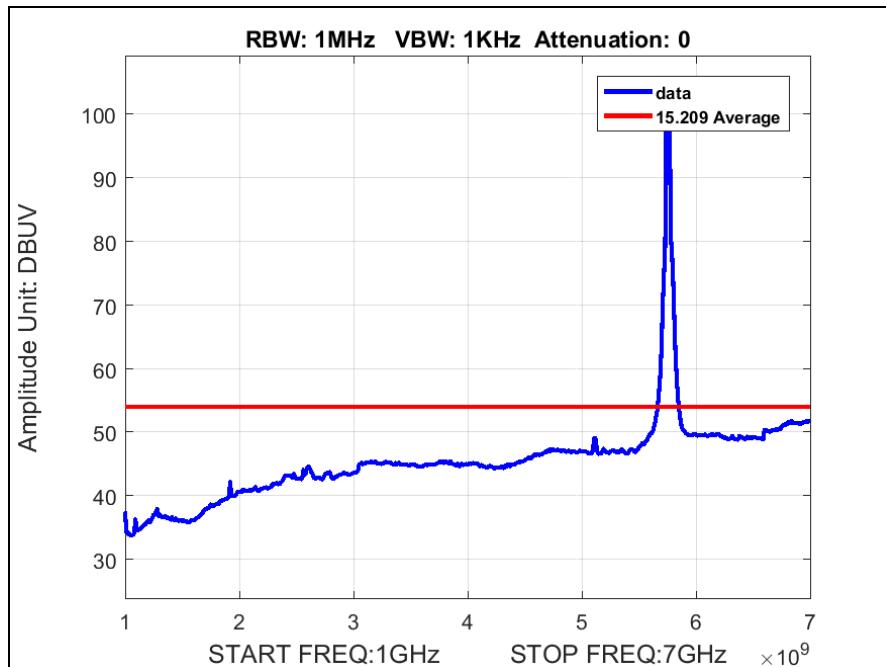


**Plot 101. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average**

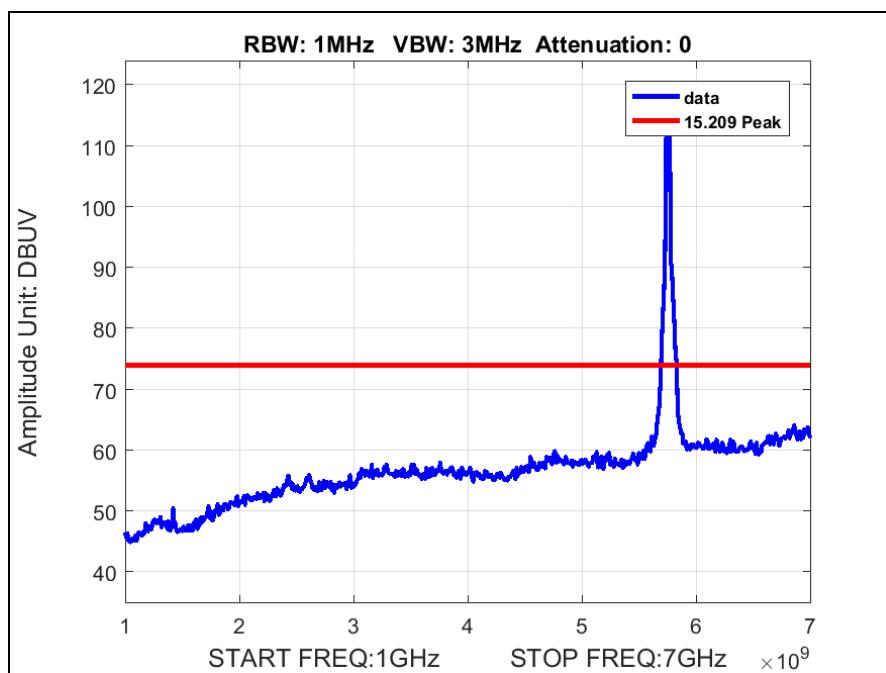

**Plot 102. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak**

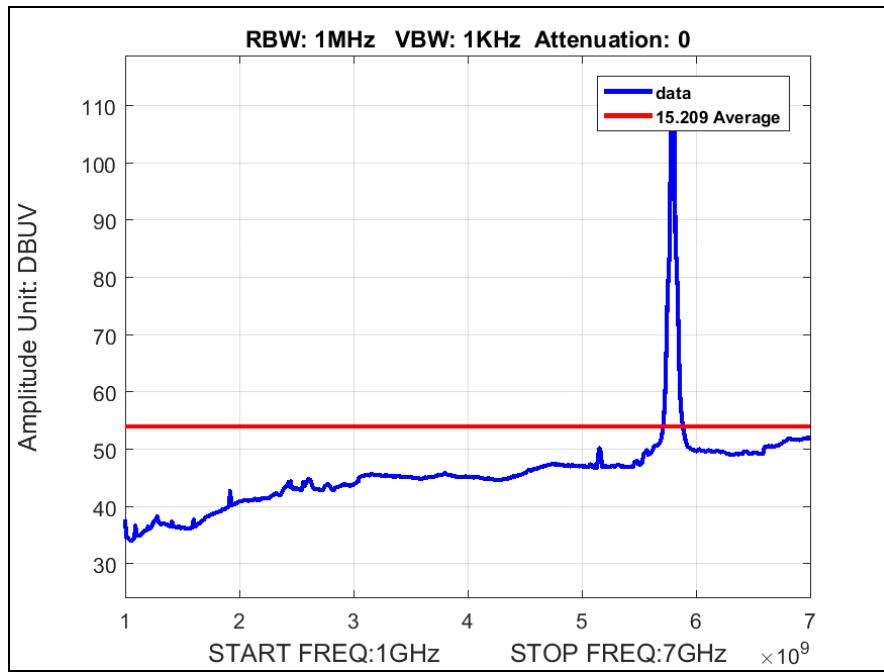


**Plot 103. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average**

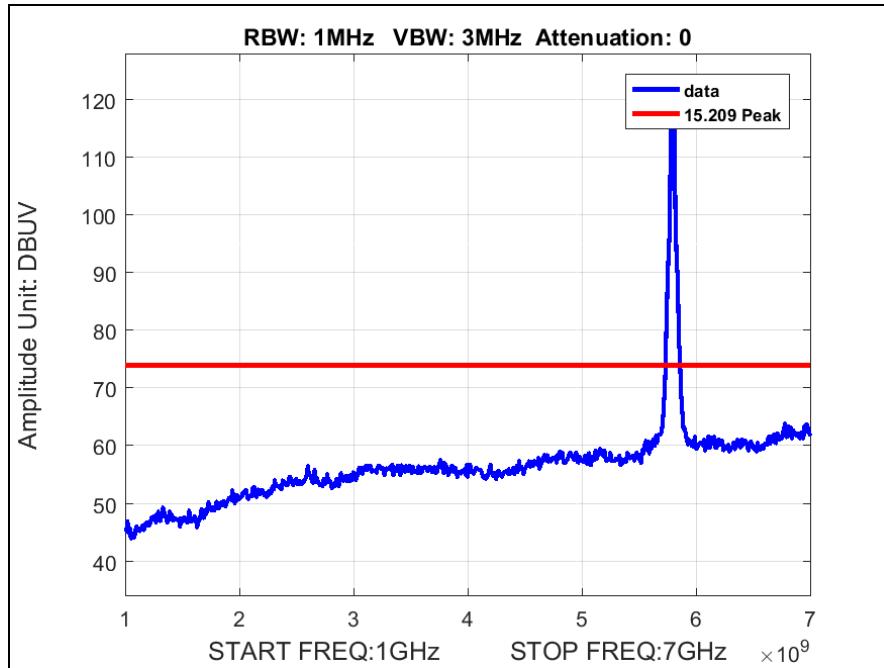


**Plot 104. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak**

### Radiated Spurious Emissions, 802.11ac 80 MHz, 4x8

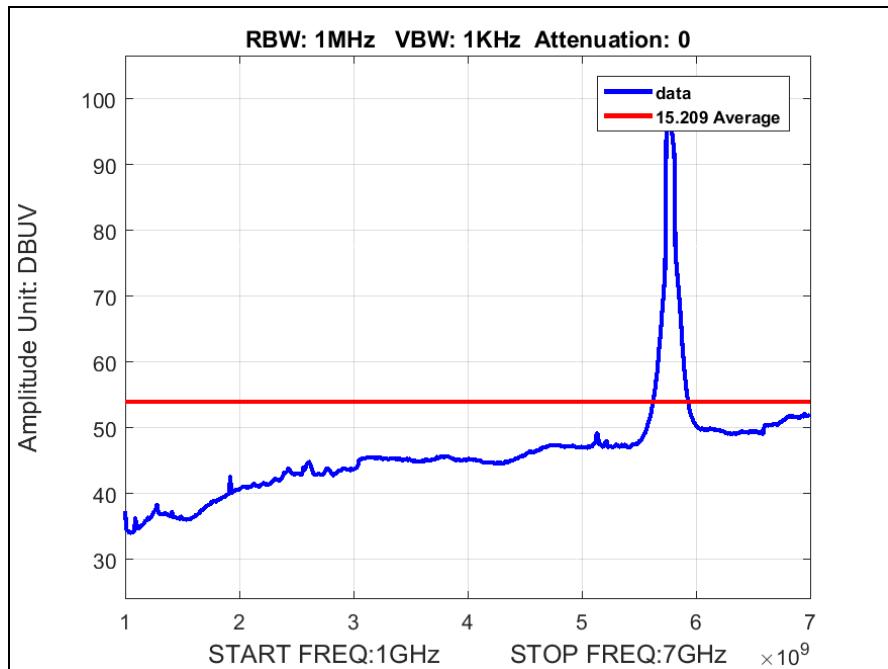


**Plot 105. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Average**

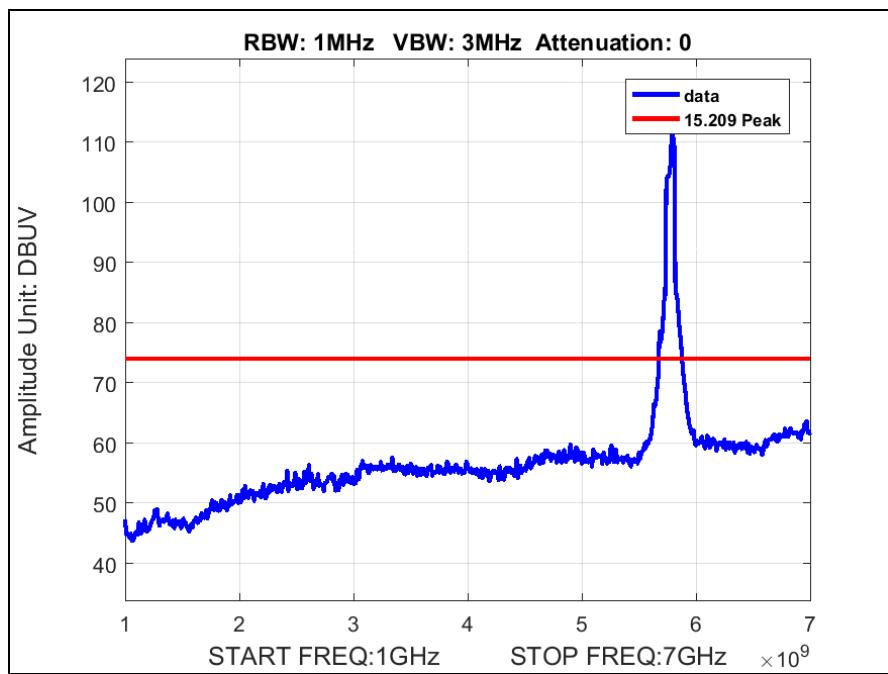


**Plot 106. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 4x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak**


## Radiated Spurious Emissions, 802.11n 20 MHz, 4x8

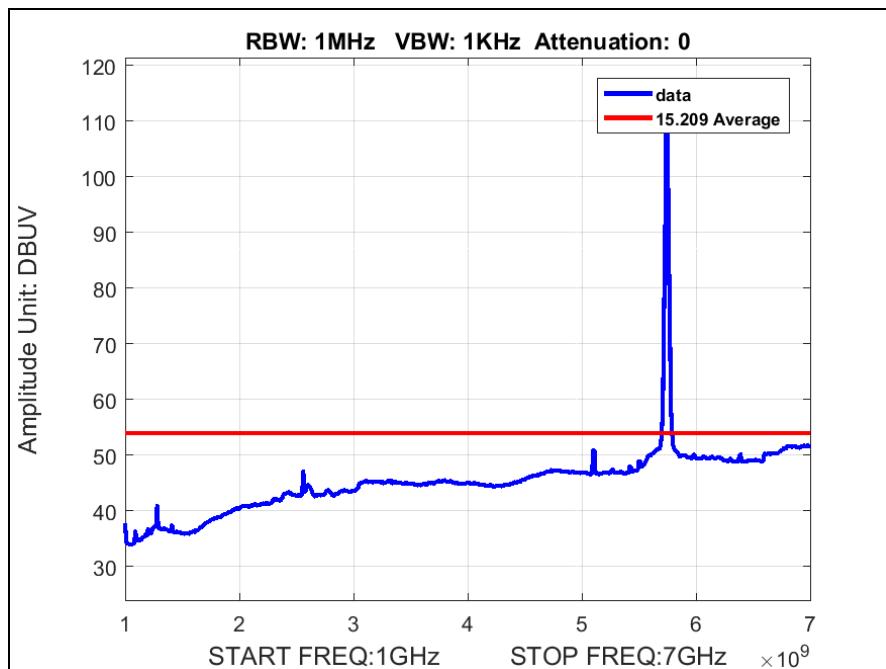


Plot 107. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average

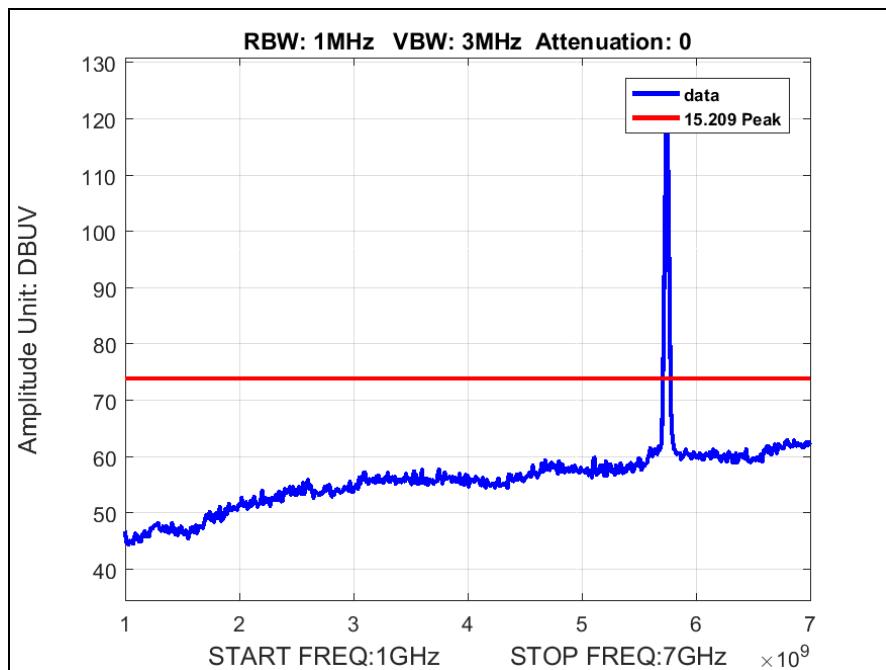

Plot 108. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak

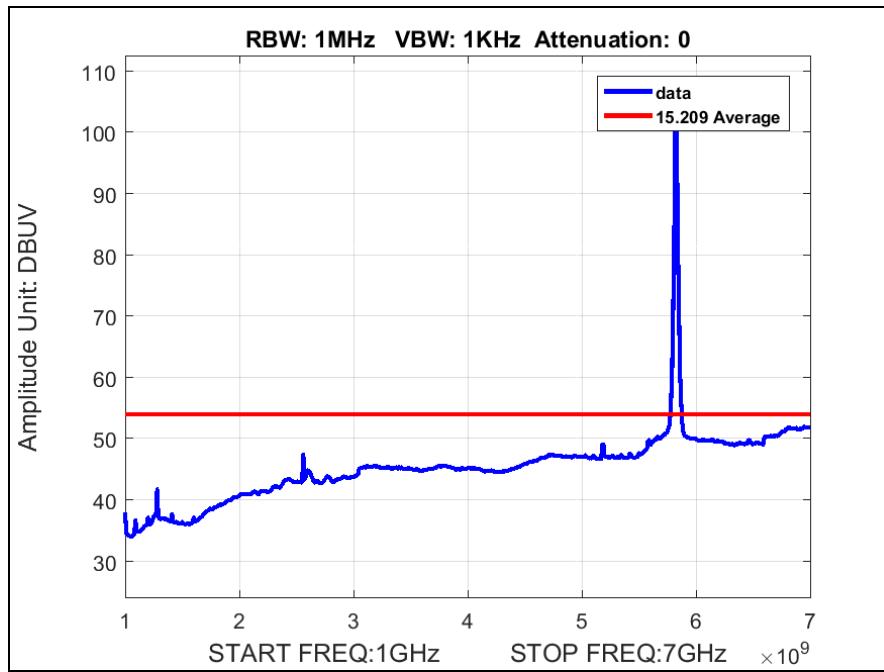


Plot 109. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average

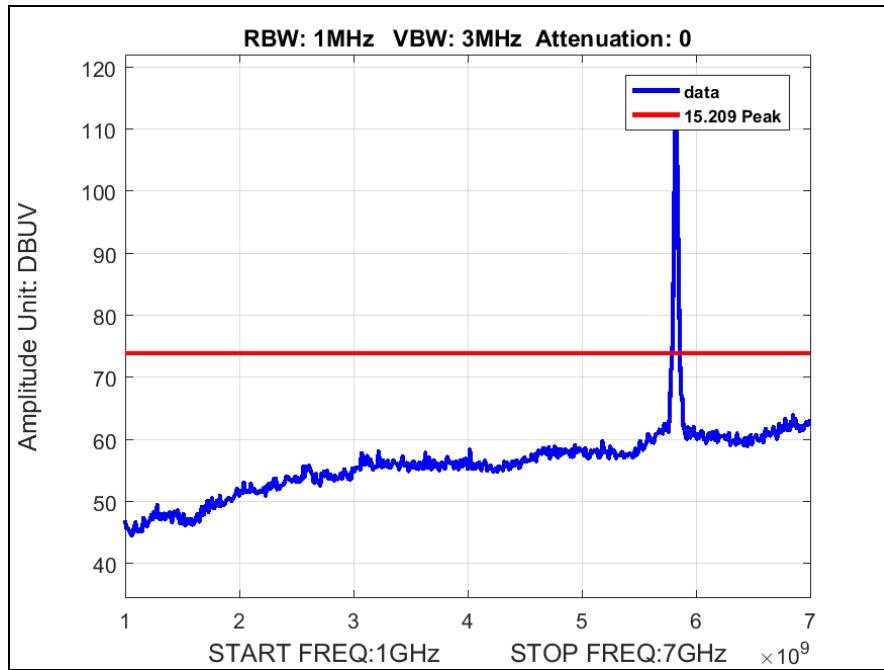


Plot 110. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak


## Radiated Spurious Emissions, 802.11n 40 MHz, 4x8

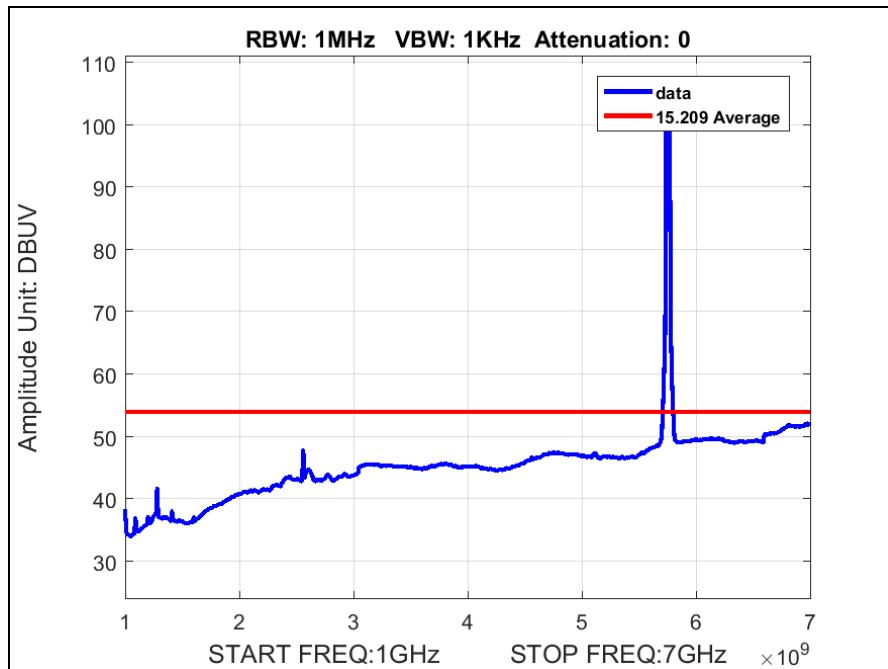


Plot 111. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average

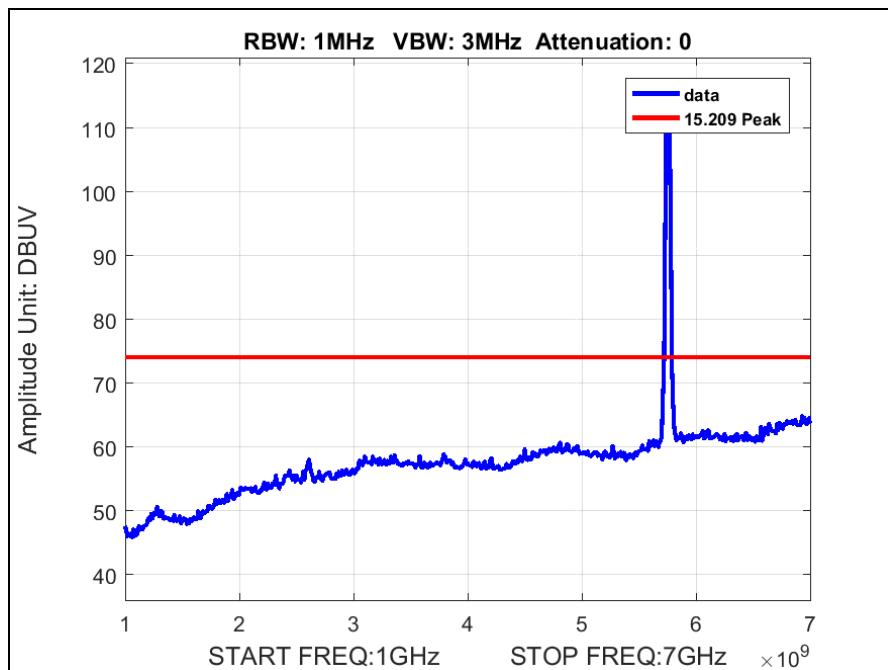

Plot 112. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak

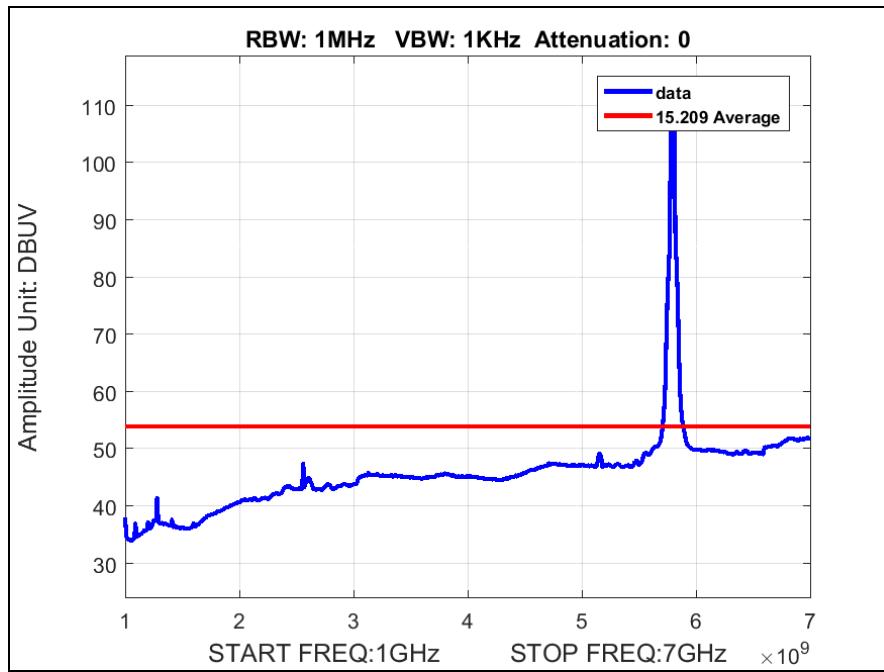


Plot 113. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average

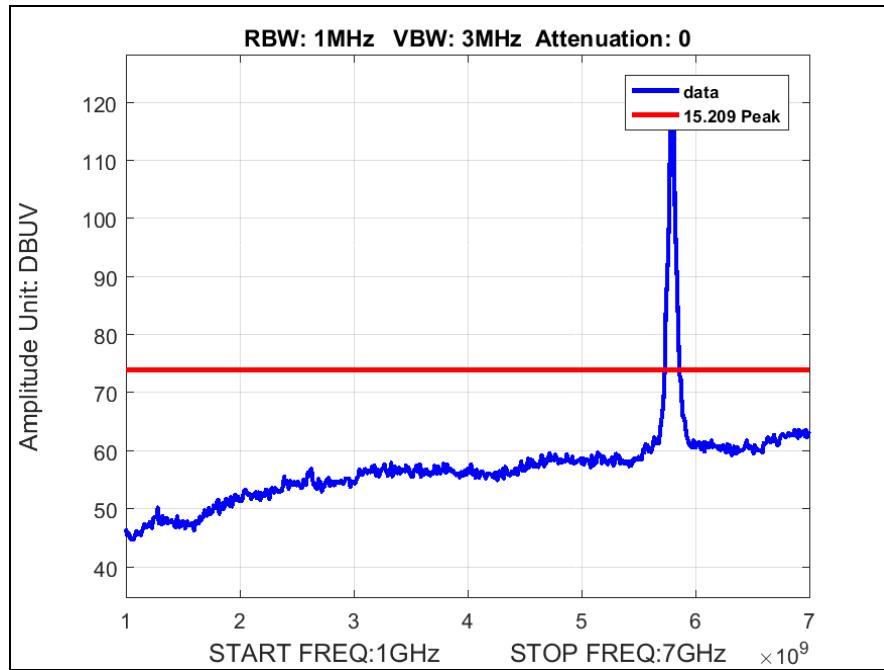


Plot 114. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak


## Radiated Spurious Emissions, 802.11a, 8x8

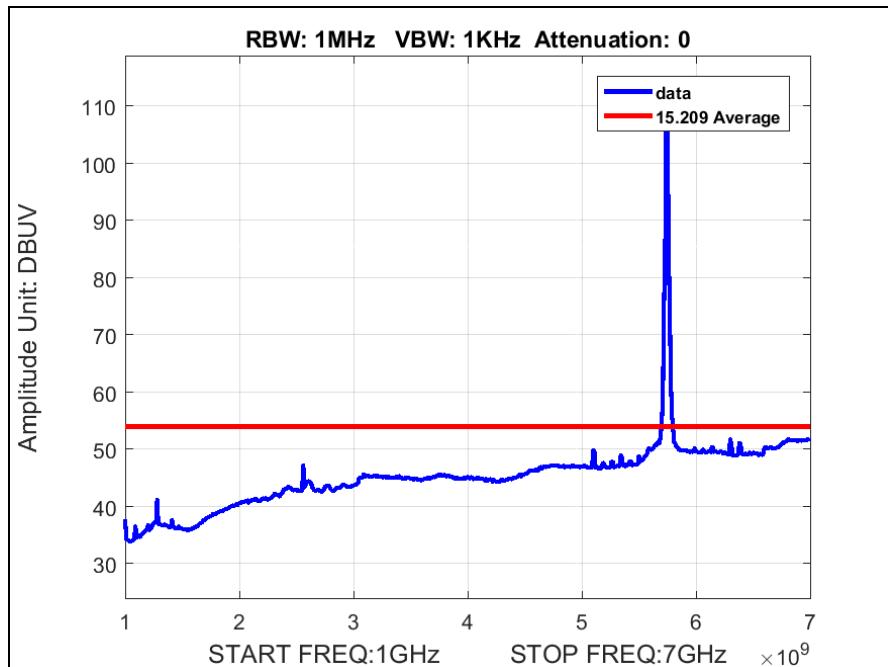


Plot 115. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, 1 GHz – 7 GHz, Average

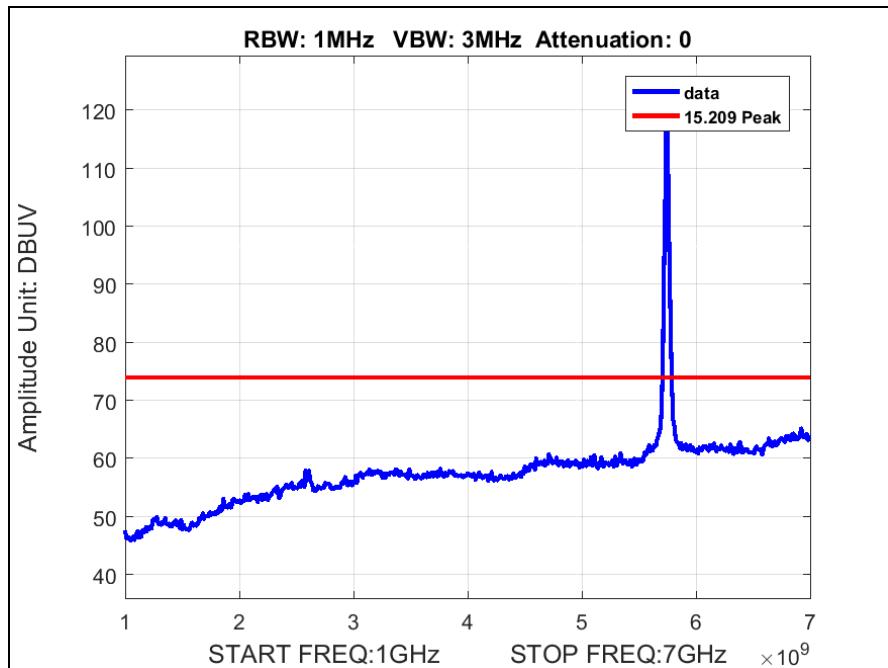

Plot 116. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5745 MHz, 8x8, 6M, 1 GHz – 7 GHz, Peak

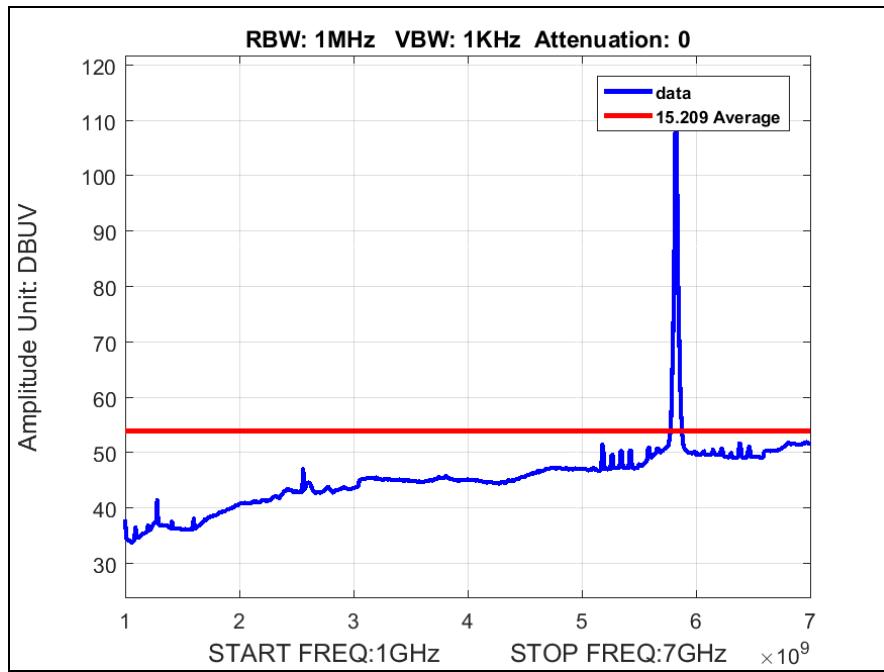


Plot 117. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, 1 GHz – 7 GHz, Average

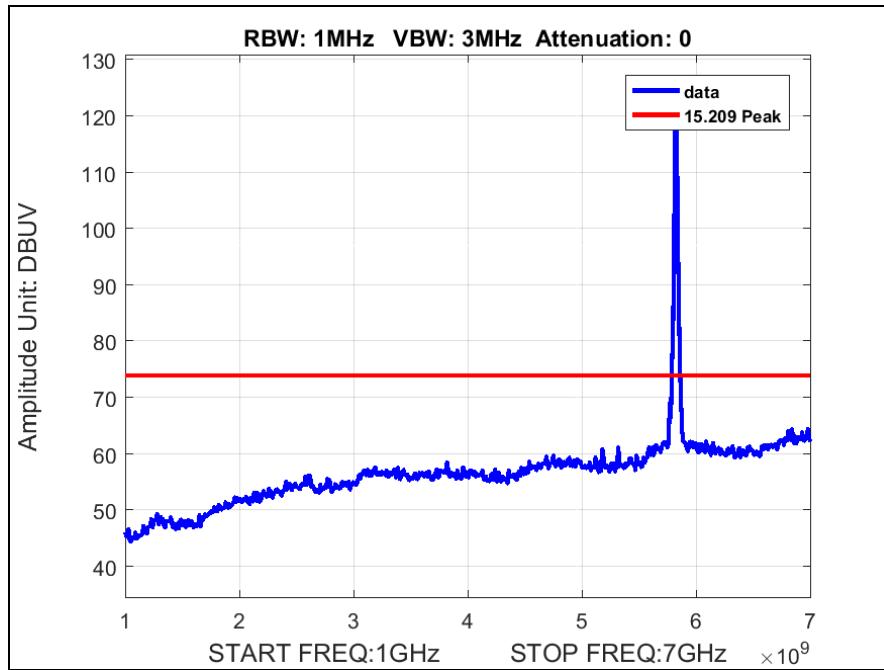


Plot 118. Radiated Spurious Emissions, 802.11a 20 MHz, Channel 5825 MHz, 8x8, 6M, 1 GHz – 7 GHz, Peak


## Radiated Spurious Emissions, 802.11ac 20 MHz, 8x8

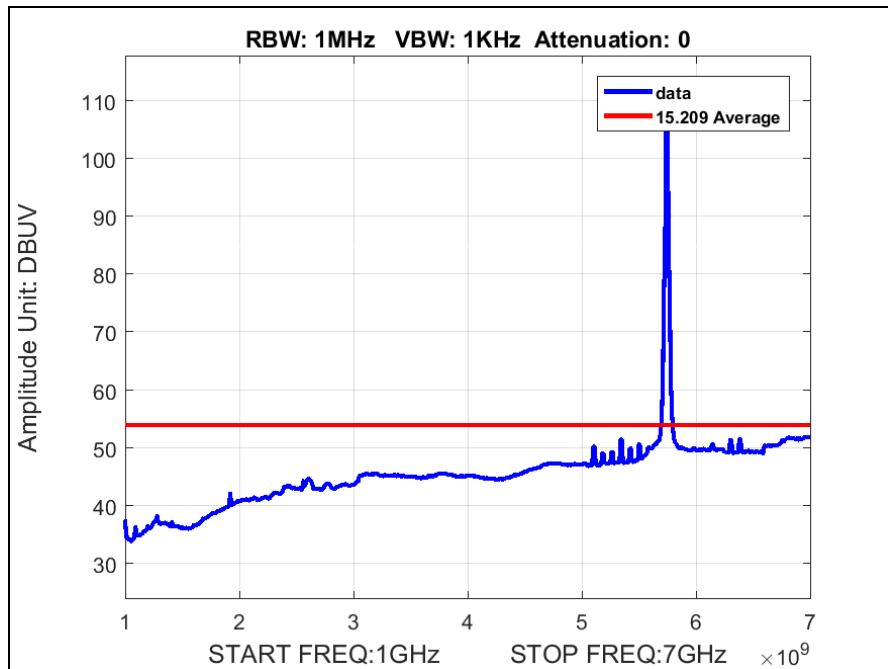


Plot 119. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average

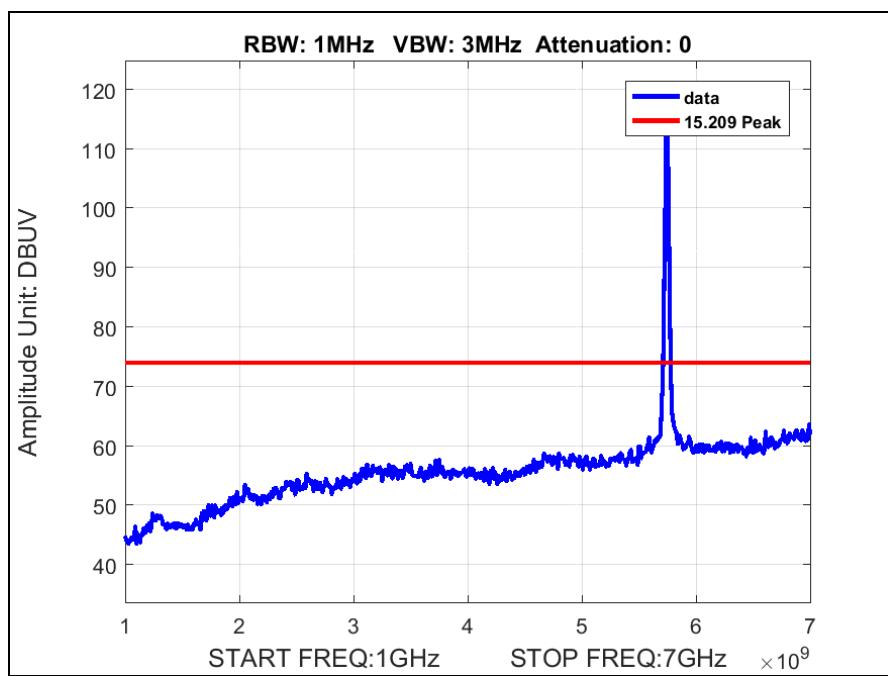

Plot 120. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5745 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak

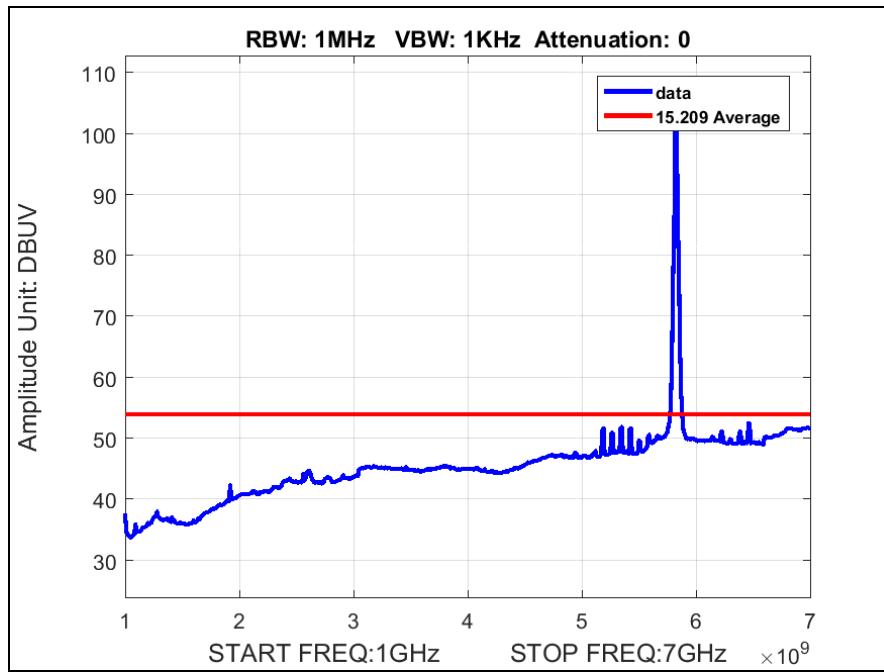


**Plot 121. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average**

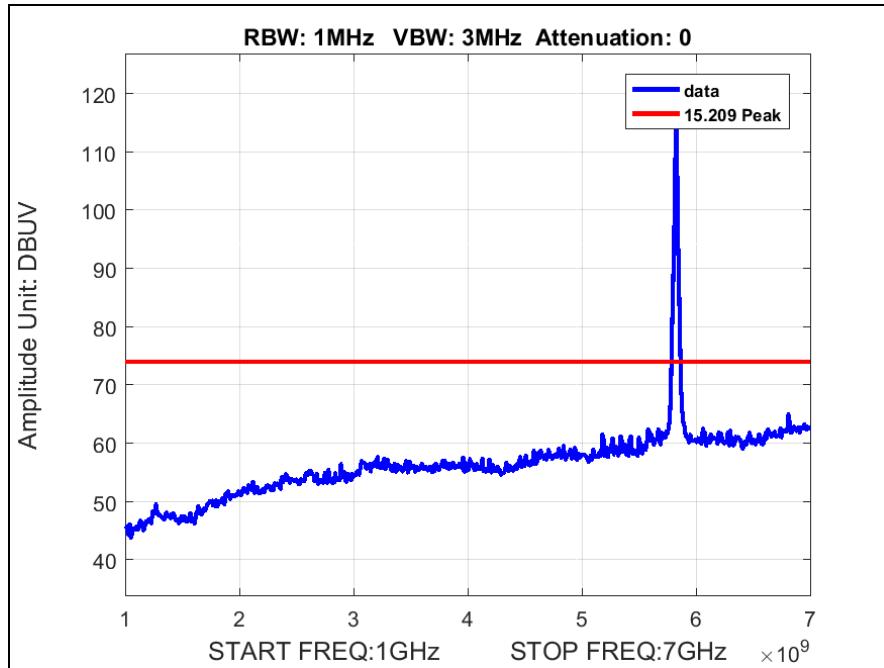


**Plot 122. Radiated Spurious Emissions, 802.11ac 20 MHz, Channel 5825 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak**


## Radiated Spurious Emissions, 802.11ac 40 MHz, 8x8

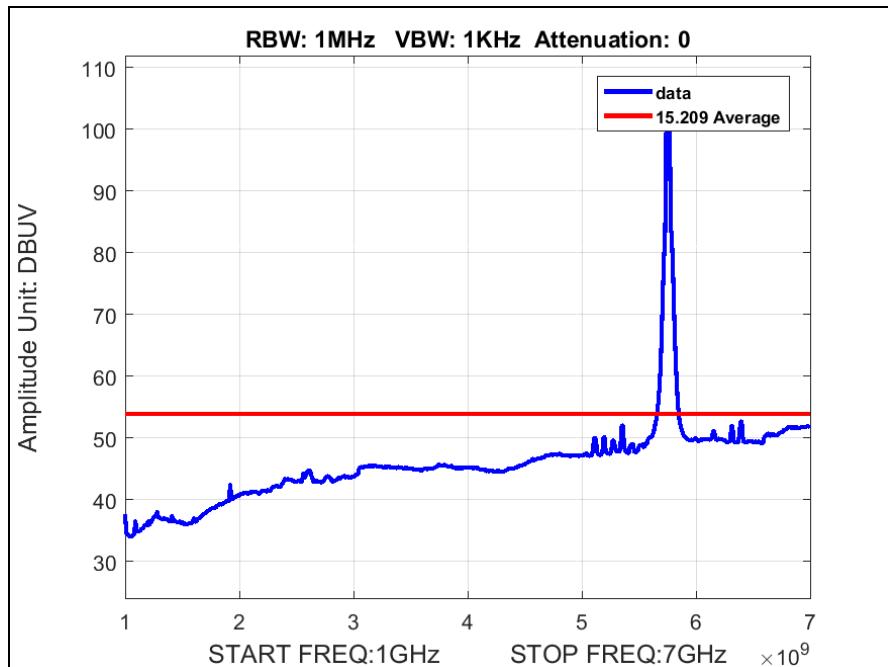


**Plot 123. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average**

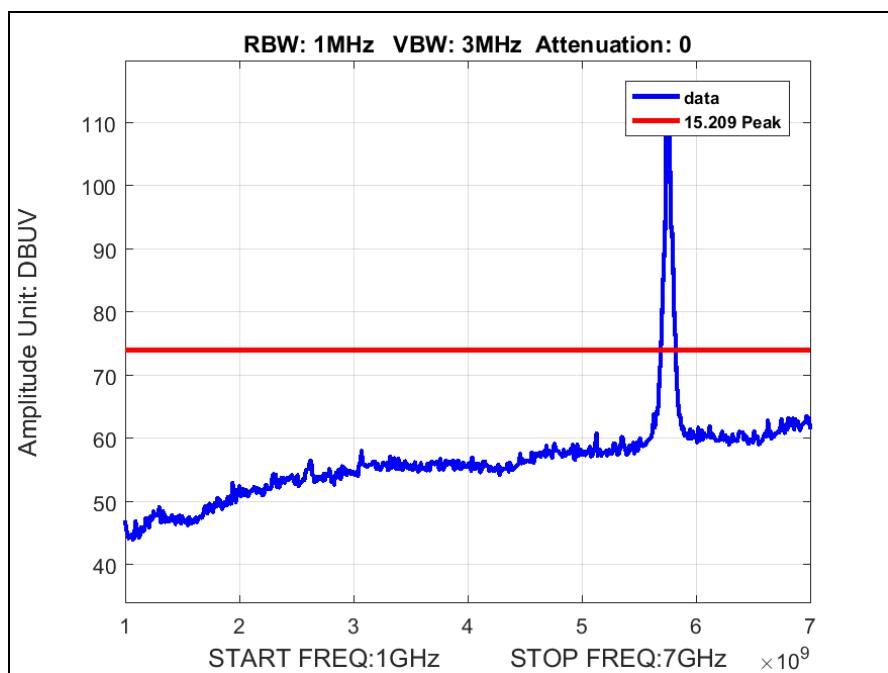

**Plot 124. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5755 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak**

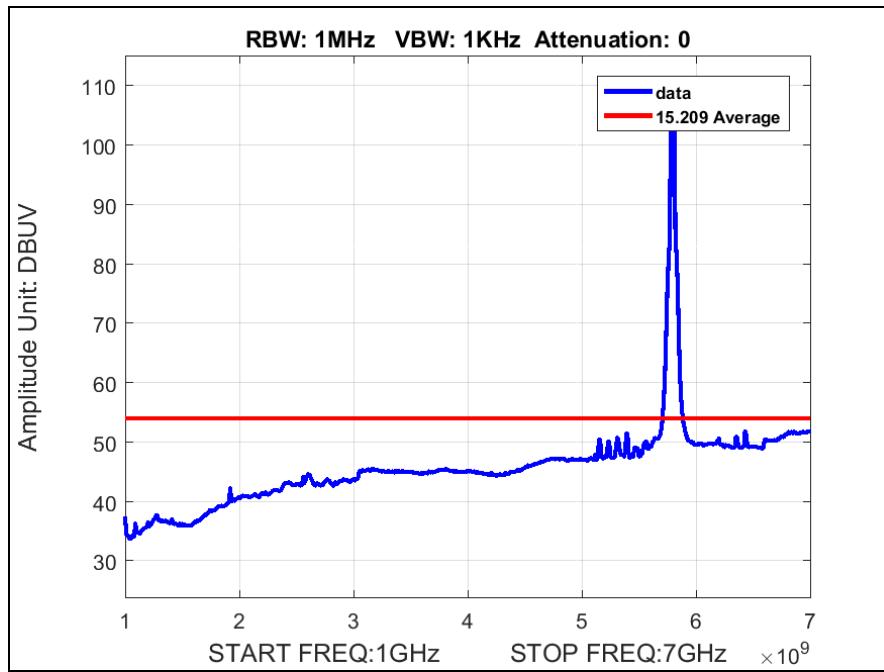


**Plot 125. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average**

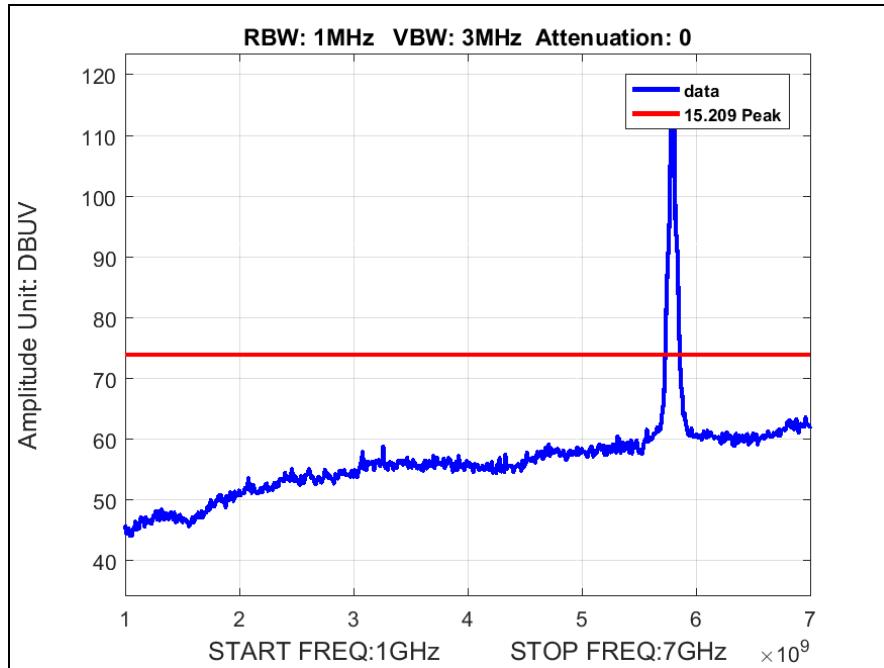


**Plot 126. Radiated Spurious Emissions, 802.11ac 40 MHz, Channel 5795 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak**

### Radiated Spurious Emissions, 802.11ac 80 MHz, 8x8

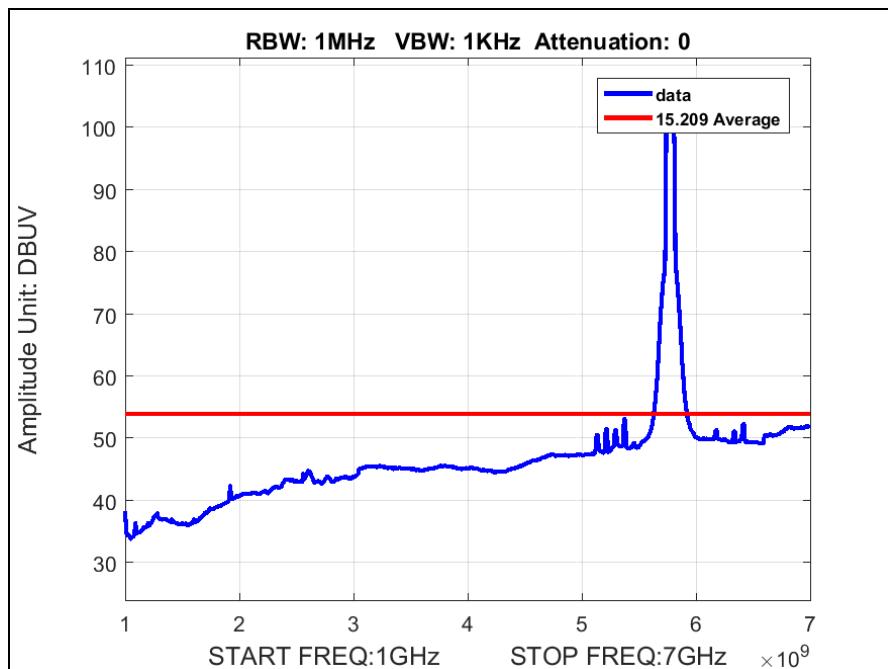


Plot 127. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Average

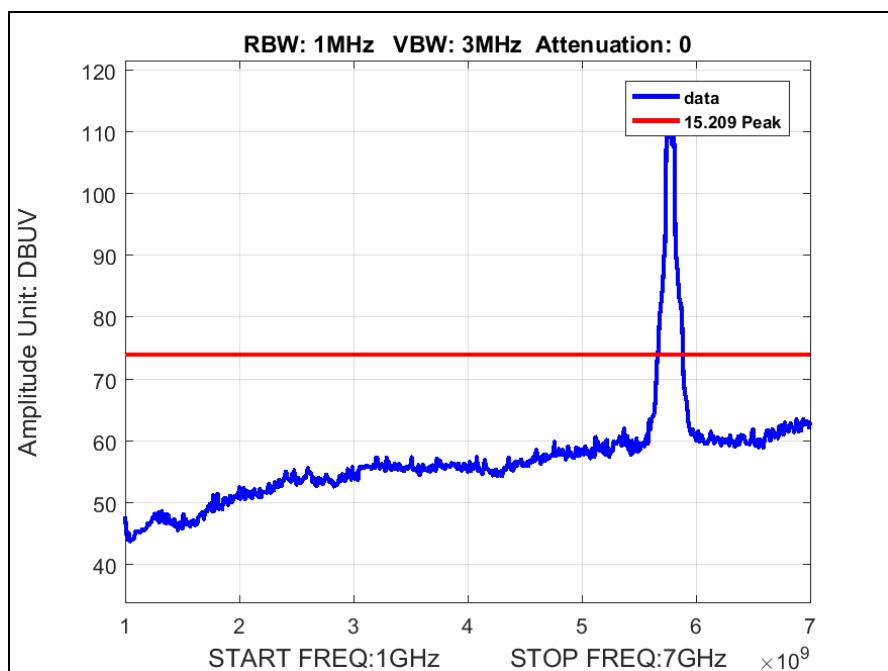


Plot 128. Radiated Spurious Emissions, 802.11ac 80 MHz, Channel 5775 MHz, 8x8, NSS1 MCS0, 1 GHz – 7 GHz, Peak


## Radiated Spurious Emissions, 802.11n 20 MHz, 8x8

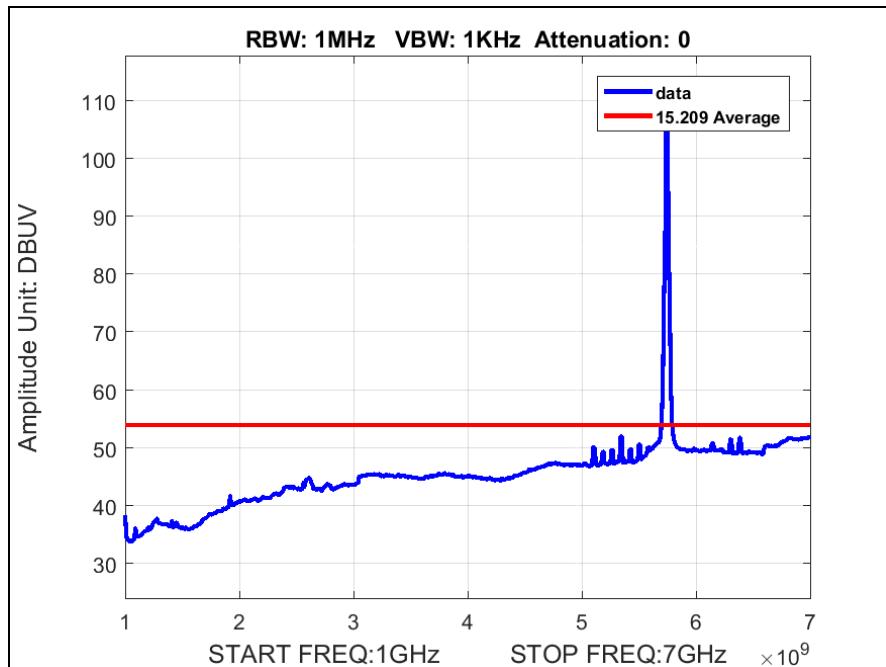


Plot 129. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

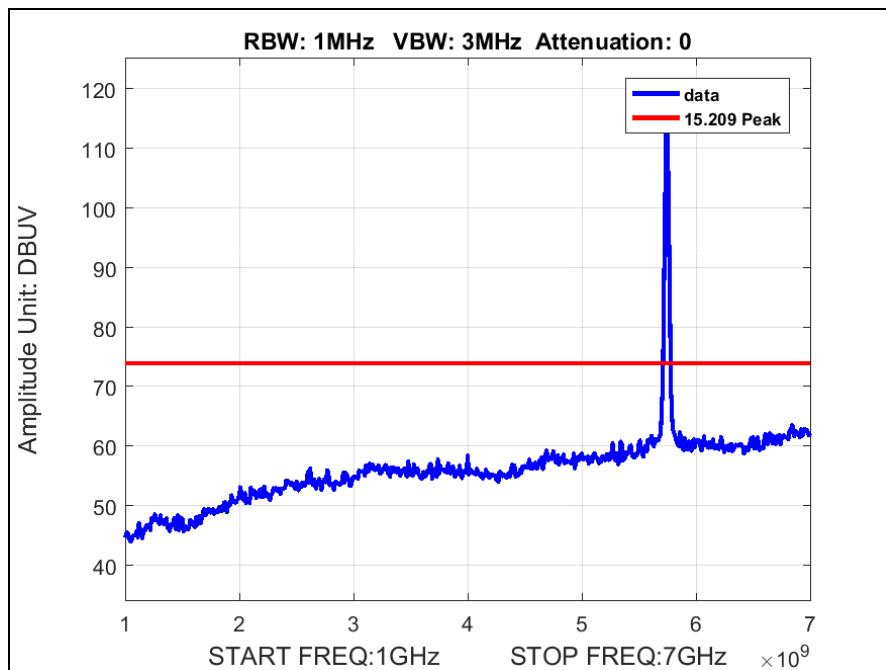

Plot 130. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5745 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak

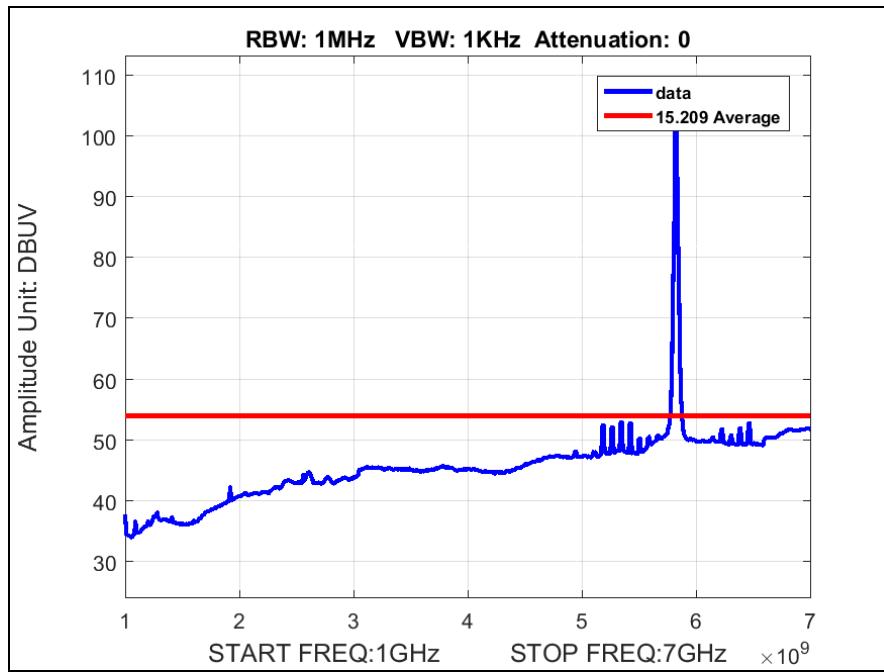


Plot 131. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

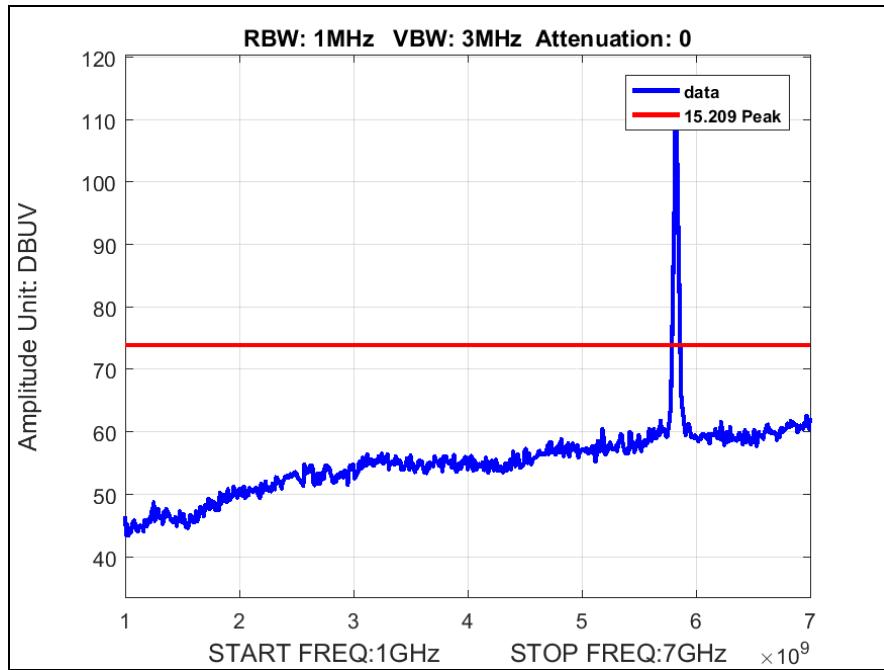


Plot 132. Radiated Spurious Emissions, 802.11n 20 MHz, Channel 5825 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak


## Radiated Spurious Emissions, 802.11n 40 MHz, 8x8

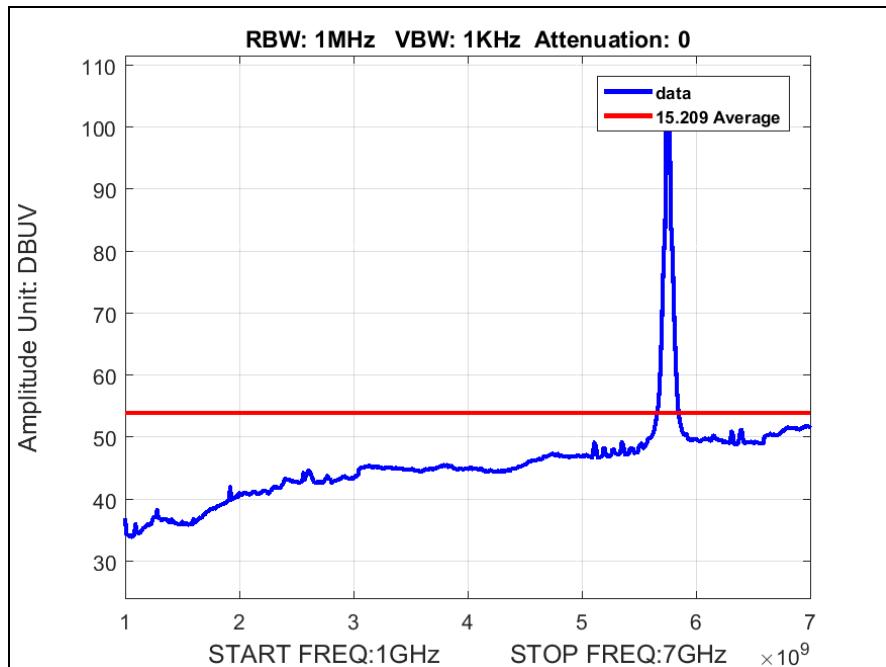


Plot 133. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

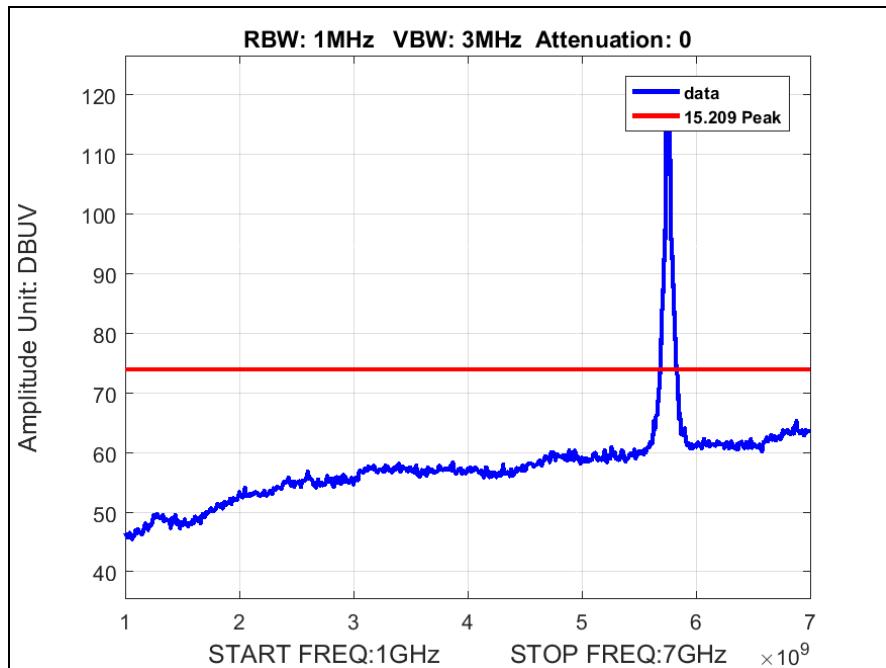

Plot 134. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5755 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak

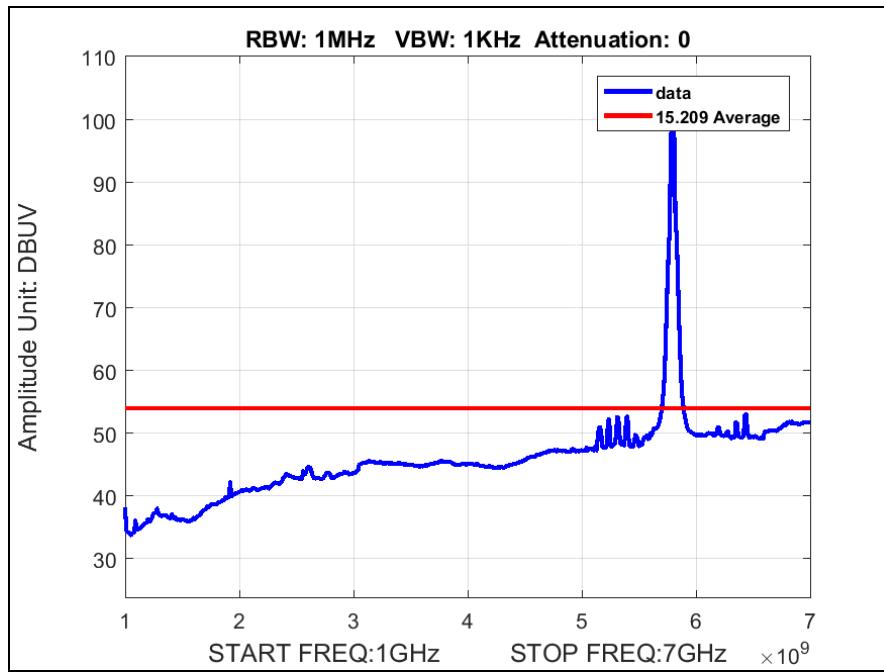

Plot 135. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

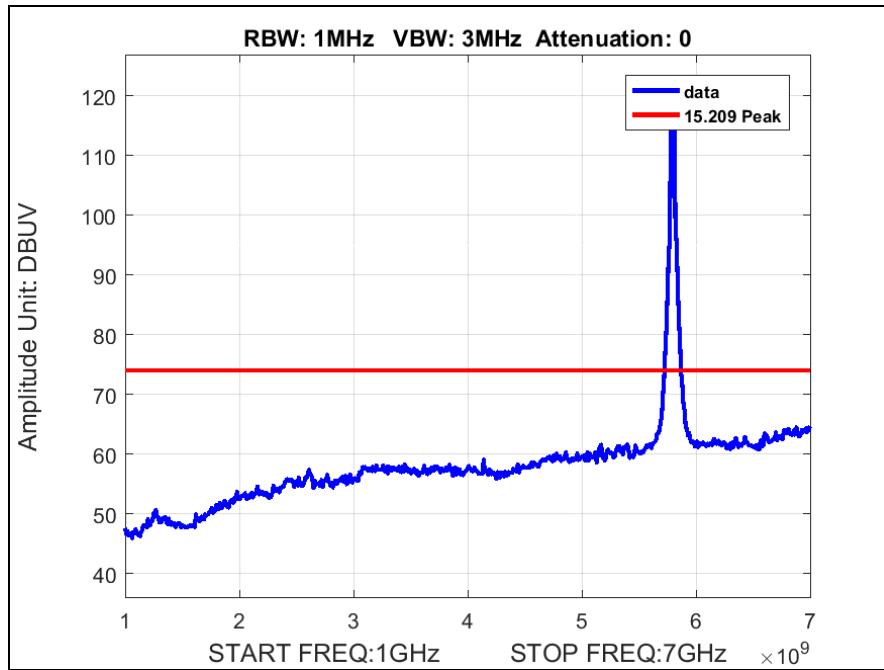

Plot 136. Radiated Spurious Emissions, 802.11n 40 MHz, Channel 5795 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(6)      Conducted Emissions

**Test Requirement(s):**    **§ 15.407 (b)(6):** Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

**§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Sigma$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. Scans were performed with the transmitter on.

**Test Results:**

The EUT was compliant with requirements of this section.

**Test Engineer(s):**

Hadid Jones


**Test Date(s):**

08/21/16

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dB $\mu$ V) QP	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) QP	Limit (dB $\mu$ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB $\mu$ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) AVG	Limit (dB $\mu$ V) AVG	Margin (dB) AVG
0.3	46.23	0	46.23	60.24	-14.01	29.56	0	29.56	50.24	-20.68
2.504	47.3	0	47.3	56	-8.7	35.11	0	35.11	46	-10.89
6.6	48.26	0	48.26	60	-11.74	37.59	0	37.59	50	-12.41
20.68	52.32	0	52.32	60	-7.68	46.24	0	46.24	50	-3.76
23.99	46.05	0	46.05	60	-13.95	39.54	0	39.54	50	-10.46
27.32	41.89	0	41.89	60	-18.11	36.44	0	36.44	50	-13.56


Table 13. Conducted Emissions, 15.207(a), Neutral Line, Test Results

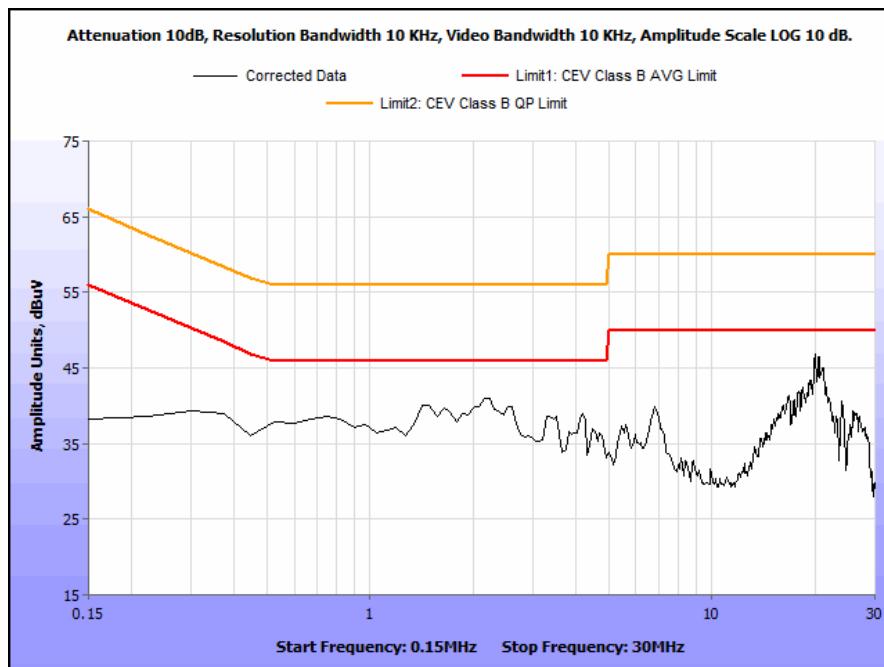

Plot 137. Conducted Emissions, Neutral Line

Frequency (MHz)	Uncorrected Meter Reading (dB $\mu$ V) QP	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) QP	Limit (dB $\mu$ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB $\mu$ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) AVG	Limit (dB $\mu$ V) AVG	Margin (dB) AVG
0.155	58.48	0	58.48	65.73	-7.25	51.78	0	51.78	55.73	-3.95
2.53	49.96	0	49.96	56	-6.04	37.71	0	37.71	46	-8.29
6.79	48.6	0	48.6	60	-11.4	35.93	0	35.93	50	-14.07
20.18	51.66	0	51.66	60	-8.34	46.63	0	46.63	50	-3.37
24.5	40.2	0	40.2	60	-19.8	35.44	0	35.44	50	-14.56
26.88	40.32	0	40.32	60	-19.68	34.78	0	34.78	50	-15.22

Table 14. Conducted Emissions, 15.207(a), Phase Line, Test Results

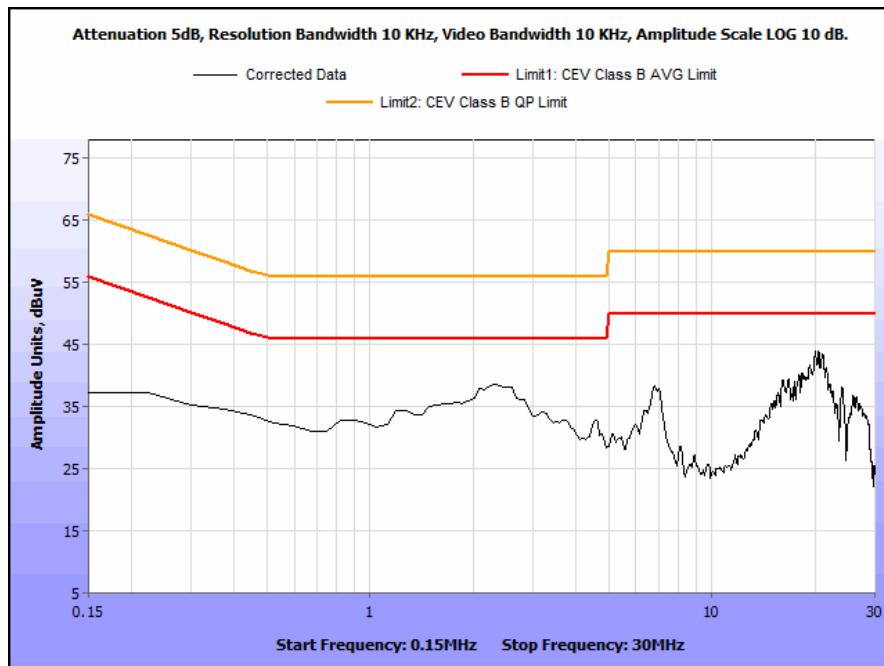

Plot 138. Conducted Emissions, Phase Line

## Electromagnetic Compatibility Criteria for Intentional Radiators

## § 15.407(e) 6 dB Bandwidth


**Test Requirements:** § 15.407(e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

**Test Procedure:** The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 6 dB Bandwidth was measured and recorded.

**Test Results** The 6 dB Bandwidth was compliant with the requirements of this section.

**Test Engineer(s):** Hadid Jones


**Test Date(s):** 11/03/16




6dB Bandwidth	
File Name	Measurement
6dB_BW 20M_Ch 5745M_A Mode_6M	<b>17.721</b>
6dB_BW 20M_Ch 5745M_AC Mode_NSS1_MCS0	<b>17.583</b>
6dB_BW 20M_Ch 5745M_N Mode_MCS0	<b>17.703</b>
6dB_BW 20M_Ch 5805M_A Mode_6M	<b>17.575</b>
6dB_BW 20M_Ch 5805M_AC Mode_NSS1_MCS0	<b>17.655</b>
6dB_BW 20M_Ch 5805M_N Mode_MCS0	<b>17.571</b>
6dB_BW 20M_Ch 5825M_A Mode_6M	<b>17.586</b>
6dB_BW 20M_Ch 5825M_AC Mode_NSS1_MCS0	<b>17.671</b>
6dB_BW 20M_Ch 5825M_N Mode_MCS0	<b>17.571</b>
6dB_BW 40M_Ch 5755M_A Mode_6M	<b>35.862</b>
6dB_BW 40M_Ch 5755M_AC Mode_NSS1_MCS0	<b>23.928</b>
6dB_BW 40M_Ch 5755M_N Mode_MCS0	<b>35.559</b>
6dB_BW 40M_Ch 5795M_A Mode_6M	<b>35.517</b>
6dB_BW 40M_Ch 5795M_N Mode_MCS0	<b>35.296</b>
6dB_BW 80M_Ch 5775M_AC Mode_NSS1_MCS0	<b>63.024</b>

**Table 15. 6 dB Occupied Bandwidth, Test Results**


## 6 dB Occupied Bandwidth, 802.11a

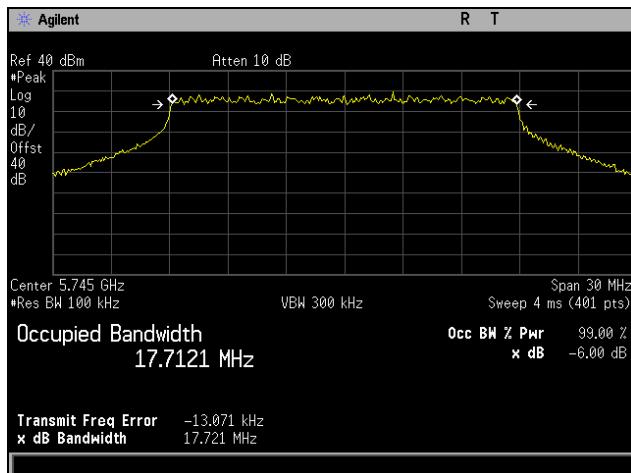

Plot 139. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5745 MHz, 6M

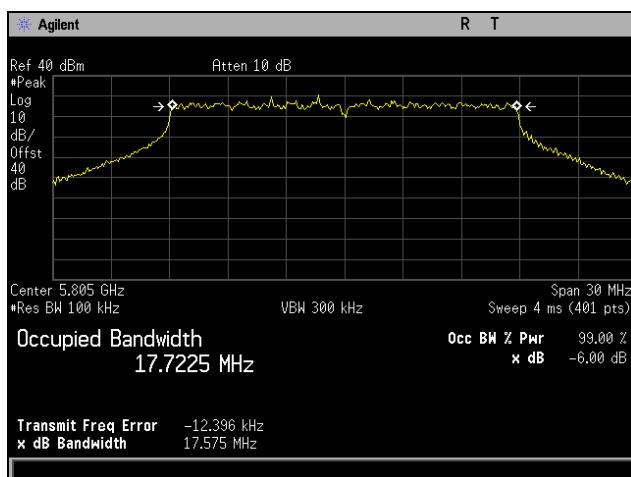


Plot 140. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5805 MHz, 6M

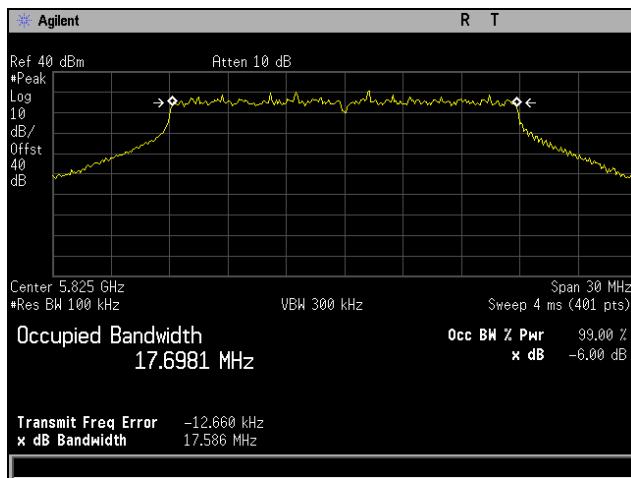


Plot 141. 6 dB Occupied Bandwidth, 802.11a 20 MHz, Channel 5825 MHz, 6M


## 6 dB Occupied Bandwidth, 802.11ac 20 MHz

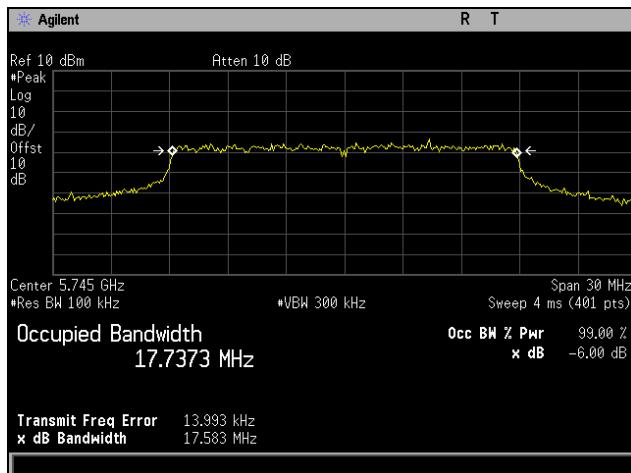

Plot 142. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5745 MHz, NSS1 MCS0

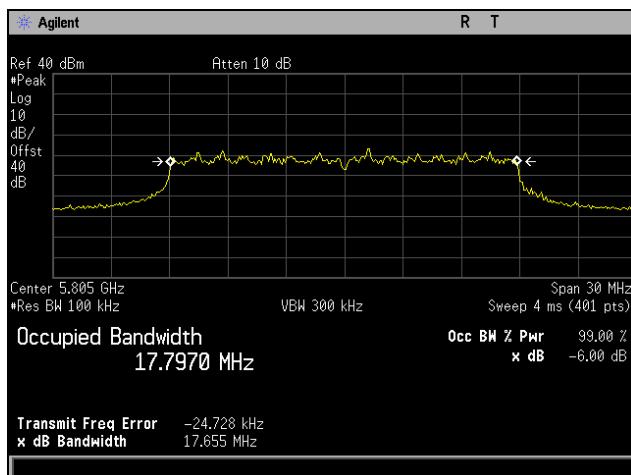


Plot 143. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5805 MHz, NSS1 MCS0

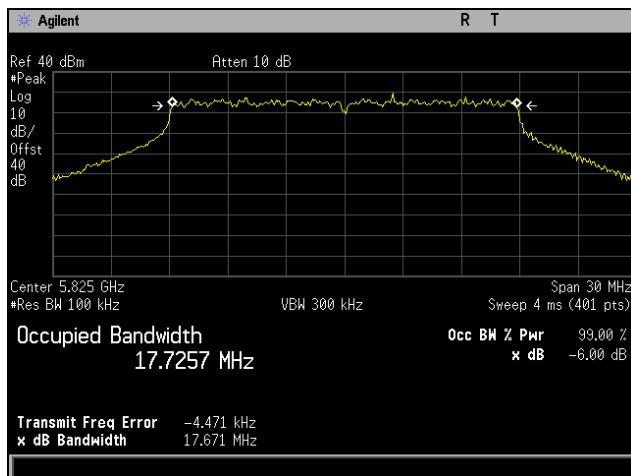


Plot 144. 6 dB Occupied Bandwidth, 802.11ac 20 MHz, Channel 5825 MHz, NSS1 MCS0

## 6 dB Occupied Bandwidth, 802.11ac 40 MHz

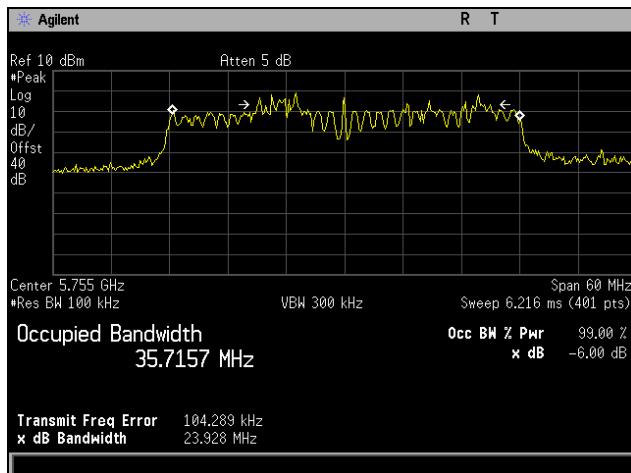


Plot 145. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5755 MHz, NSS1 MCS0

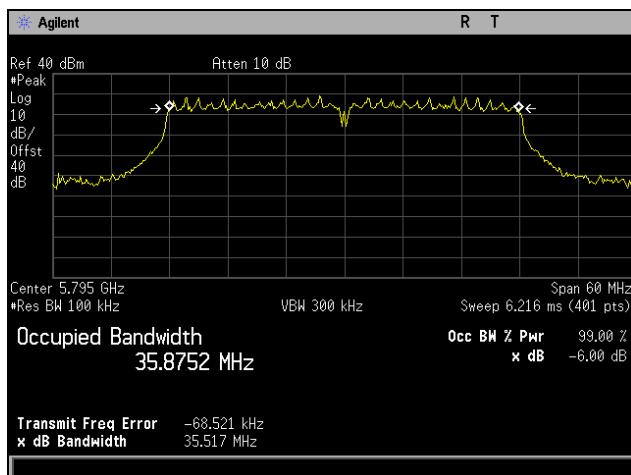


Plot 146. 6 dB Occupied Bandwidth, 802.11ac 40 MHz, Channel 5795 MHz, NSS1 MCS0

## 6 dB Occupied Bandwidth, 802.11ac 80 MHz

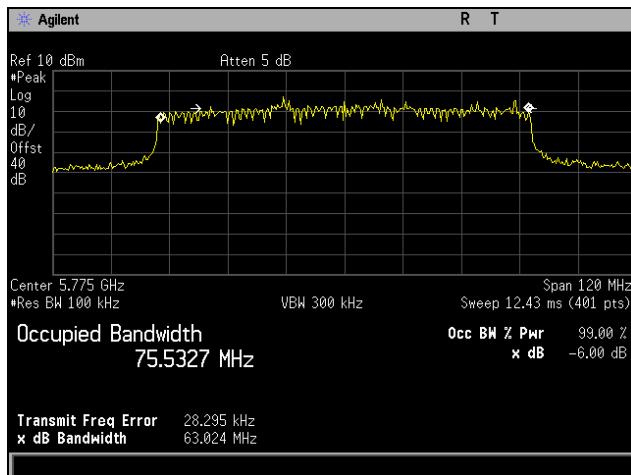


Plot 147. 6 dB Occupied Bandwidth, 802.11ac 80 MHz, Channel 5775 MHz, NSS1 MCS0


## 6 dB Occupied Bandwidth, 802.11n 20 MHz

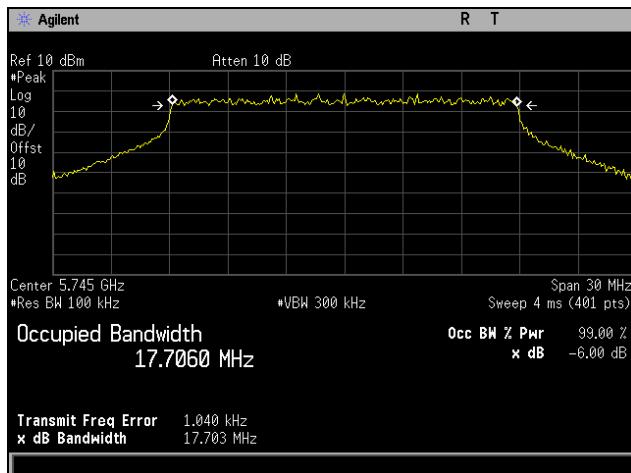

Plot 148. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5745 MHz, MCS0

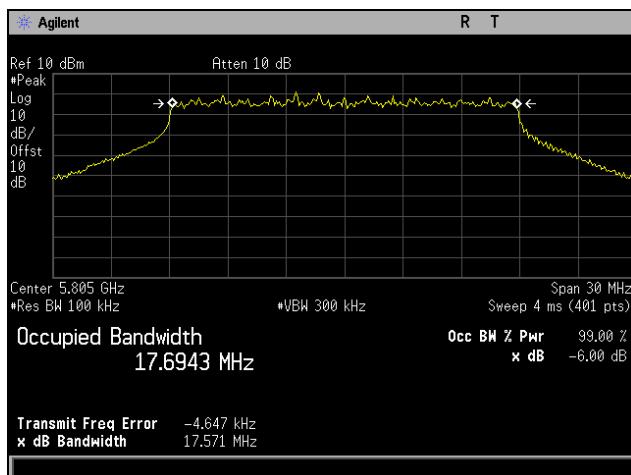


Plot 149. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5805 MHz, MCS0

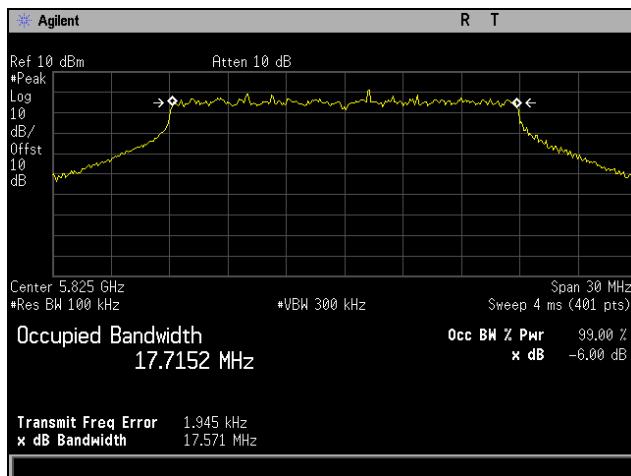


Plot 150. 6 dB Occupied Bandwidth, 802.11n 20 MHz, Channel 5825 MHz, MCS0

## 6 dB Occupied Bandwidth, 802.11n 40 MHz

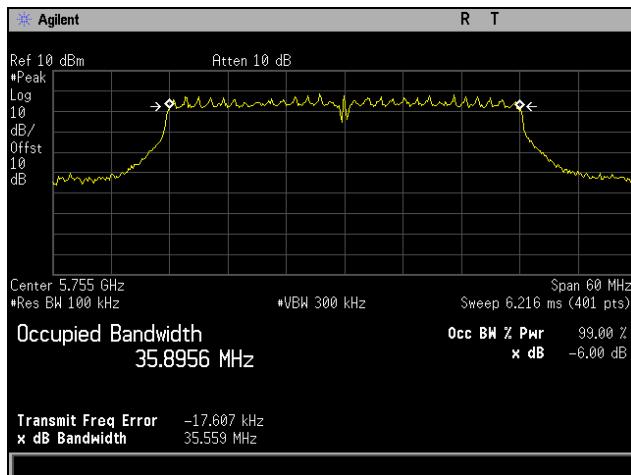

**Plot 151. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5755 MHz, MCS0**

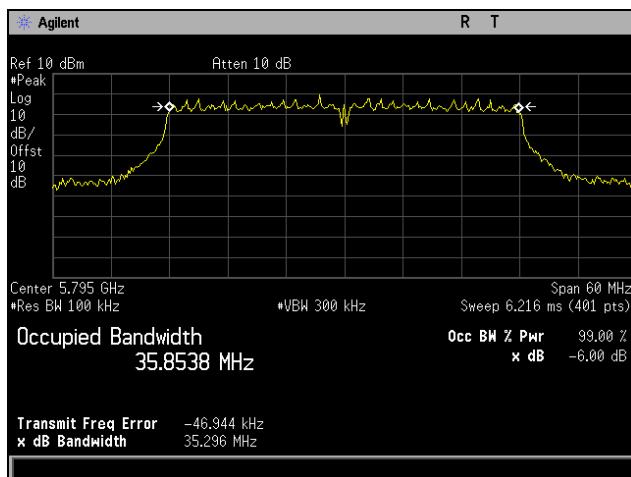

**Plot 152. 6 dB Occupied Bandwidth, 802.11n 40 MHz, Channel 5795 MHz, MCS0**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(f) Maximum Permissible Exposure

**Test Requirement(s):**

**§15.407(f):** U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

**RF Exposure Requirements:**

**§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

**RF Radiation Exposure Limit:**

**§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT’s operating frequencies @ 5725 - 5850 MHz; **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where,   
 S = Power Density (mW/cm<sup>2</sup>)  
 P = Power Input to antenna (mW)  
 G = Antenna Gain (numeric value)  
 R = Distance (cm)

**Test Results:**

FCC									
Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (mW)	Ant. Gain (dBi)	Ant. Gain numeric	Pwr. Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Margin	Distance (cm)	Result
5755	27.65	582.103	8.5	7.079	0.81984	1	0.18016	20	Pass

**Table 16. MPE, 8x8**

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date	
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	2/26/2016	8/26/2017	
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	10/29/2014	10/29/2016	
1T4818	COMB GENERATOR	COM-POWER	CGO-520	SEE NOTE		
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	10/8/2015	4/8/2017	
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE		
1T6658	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	12/9/2015	12/9/2016	
1T4745	ANTENNA, HORN	ETS-LINDGREN	3116	6/27/2015	12/27/2016	
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P	SEE NOTE		
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	1/31/2014	01/31/2017	
1T4504	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	NOT REQUIRED		
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS COMPANY	9322-50-R-10-BNC	8/27/2015	2/27/2017	

**Table 17. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## V. Certification & User's Manual Information

## Certification & User's Manual Information

### L. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# End of Report