

FCC Test Report

Report No.: RFBAOZ-WTW-P20070419

FCC ID: UIDWC4T

Test Model: WC4T

Received Date: July 18, 2020

Test Date: July 22 to Aug. 23, 2020

Issued Date: Sep. 22, 2020

Applicant: ARRIS

Address: 3871 LAKEFIELD DRIVE SUWANEE GA 30024-1292 UNITED STATES

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards and references	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures	20
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup	21
4.1.6 EUT Operating Conditions	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures	38
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup	38
4.2.6 EUT Operating Conditions	38
4.2.7 Test Results	39
4.3 6dB Bandwidth Measurement	41
4.3.1 Limits of 6dB Bandwidth Measurement	41
4.3.2 Test Setup	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions	41
4.3.7 Test Result	42
4.4 Conducted Output Power Measurement	44
4.4.1 Limits of Conducted Output Power Measurement	44
4.4.2 Test Setup	44
4.4.3 Test Instruments	44
4.4.4 Test Procedures	44
4.4.5 Deviation from Test Standard	44
4.4.6 EUT Operating Conditions	44
4.4.7 Test Results	45
4.5 Power Spectral Density Measurement	47
4.5.1 Limits of Power Spectral Density Measurement	47
4.5.2 Test Setup	47
4.5.3 Test Instruments	47
4.5.4 Test Procedure	47
4.5.5 Deviation from Test Standard	47
4.5.6 EUT Operating Condition	47

4.5.7 Test Results	48
4.6 Conducted Out of Band Emission Measurement.....	51
4.6.1 Limits of Conducted Out of Band Emission Measurement	51
4.6.2 Test Setup.....	51
4.6.3 Test Instruments	51
4.6.4 Test Procedure	51
4.6.5 Deviation from Test Standard	51
4.6.6 EUT Operating Condition	51
4.6.7 Test Results	51
5 Pictures of Test Arrangements.....	68
Annex A - Band-Edge Measurement.....	69
Appendix – Information of the Testing Laboratories	73

Release Control Record

Issue No.	Description	Date Issued
RFBAOZ-WTW-P20070419	Original release.	Sep. 22, 2020

1 Certificate of Conformity

Product: SURFboard Wi-Fi Router
Brand: ARRIS
Test Model: WC4T
Sample Status: Engineering Sample
Applicant: ARRIS
Test Date: July 22 to Aug. 23, 2020
Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** Sep. 22, 2020
Vivian Huang / Specialist

Approved by : Clark Lin , **Date:** Sep. 22, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.76 dB at 0.15000 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1 dB at 7386.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted Emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	SURFboard Wi-Fi Router
Brand	ARRIS
Test Model	WC4T
Status of EUT	Engineering Sample
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz band
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 1733.3 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462 GHz 5GHz: 5.18 ~ 5.24 GHz, 5.745 ~ 5.825 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 613.378 mW 5.18 ~ 5.24 GHz: 488.826 mW 5.745 ~ 5.825 GHz: 989.696 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 515.311 mW 5.18 ~ 5.24 GHz: 434.765 mW 5.745 ~ 5.825 GHz: 619.855 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	RJ-45 Cable x1 (Unshielded, 1.5 m)

Note:

1. The EUT has two radios as following table:

Radio 1	Radio 2
WLAN 2.4GHz + WLAN 5GHz (low band)	WLAN 5GHz (high band)

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz (low band)	WLAN 5GHz (high band)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied power adapter as following table:

Brand	Model No.	Spec.
APD	WA-30P12FU	Input: 100-240 Vac, 0.9 A, 50-60 Hz Output: 12 Vdc, 2.5 A DC Output cable: Unshielded, 1.5 m

4. The antennas information, please refer to the following table:

Device have two antenna configuration modes as below (set 1 & 2), the antenna set 1 were the highest antenna gain configuration, therefore antenna set 1 were chosen for final test.

Antenna Set 1			
Antenna No.	Frequency Range (MHz)	Antenna Type	Connector Type
Antenna 1	5470-5850	PCB	IPEX
Antenna 2	5470-5850	PCB	IPEX
Antenna 3	5470-5850	PCB	IPEX
Antenna 4	5470-5850	PCB	IPEX
Antenna 5	2400-2483.5 / 5150-5350	MTA	IPEX
Antenna 6	2400-2483.5 / 5150-5350	MTA	IPEX
Antenna 7	2400-2483.5 / 5150-5350	PCB	IPEX
Antenna 8	2400-2483.5 / 5150-5350	PCB	IPEX
Antenna Set 2			
Antenna No.	Frequency Range (MHz)	Antenna Type	Connector Type
Antenna 9	5470-5850	PCB	IPEX
Antenna 10	5470-5850	PCB	IPEX
Antenna 11	5470-5850	PCB	IPEX
Antenna 12	5470-5850	PCB	IPEX
Antenna 5	2400-2483.5 / 5150-5350	MTA	IPEX
Antenna 6	2400-2483.5 / 5150-5350	MTA	IPEX
Antenna 7	2400-2483.5 / 5150-5350	PCB	IPEX
Antenna 8	2400-2483.5 / 5150-5350	PCB	IPEX

Note: Antenna gain values for each antennas please refer to Operation Description exhibit.

5. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	4TX Directional Antenna Gain (dBi) (Worst configuration)	3TX Directional Antenna Gain (dBi) (Worst configuration)
2.4~2.4835	7.37 (Antenna 5 / 6 / 7 / 8)	-
5.15 ~ 5.25	-	6.87 (Antenna 5 / 6 / 8)
5.25 ~ 5.35	-	6.94 (Antenna 5 / 7 / 8)
5.47 ~ 5.725	7.93 (Antenna 1 / 2 / 3 / 4)	-
5.725 ~ 5.85	7.92 (Antenna 1 / 2 / 3 / 4)	-

Note:

The directional gain is being calculated by individual antenna gains and per KDB 662911 formula.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

More detailed information, please refer to Operation Description exhibit.

6. The EUT incorporates a MIMO function:

The EOT incorporates a MIMO function.

Radio 1 - 2.4GHz Band				
MODULATION MODE	TX & RX CONFIGURATION			
802.11b	4TX		4RX	
802.11g	4TX		4RX	
802.11n (HT20)	4TX		4RX	
802.11n (HT40)	4TX		4RX	
VHT20	4TX		4RX	
VHT40	4TX		4RX	
5GHz Band				
MODULATION MODE	Radio 1 - 5GHz Band (low band)		Radio 2 - 5GHz Band (high band)	
	TX & RX CONFIGURATION		TX & RX CONFIGURATION	
802.11a	3TX	3RX	4TX	4RX
802.11n (HT20)	3TX	3RX	4TX	4RX
802.11n (HT40)	3TX	3RX	4TX	4RX
802.11ac (VHT20)	3TX	3RX	4TX	4RX
802.11ac (VHT40)	3TX	3RX	4TX	4RX
802.11ac (VHT80)	3TX	3RX	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and VHT mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n mode is the same as the VHT or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

8. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	24deg. C, 67%RH	120Vac, 60Hz	Tom Yang
RE<1G	23deg. C, 67%RH	120Vac, 60Hz	Tom Yang
PLC	25deg. C, 75%RH	120Vac, 60Hz	Sampon Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Kevin Ko

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.
If duty cycle of test signal is $< 98\%$, duty factor shall be considered.


802.11b: Duty cycle = $1.247/1.303 = 0.957$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.19 \text{ dB}$

802.11g: Duty cycle = $3.027/3.095 = 0.978$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.10 \text{ dB}$


VHT20: Duty cycle = $3.03/3.091 = 0.98$

VHT40: Duty cycle = $7.14/7.202 = 0.991$


802.11b

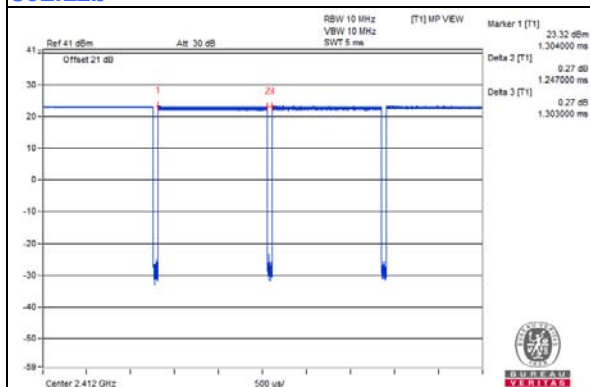


802.11g

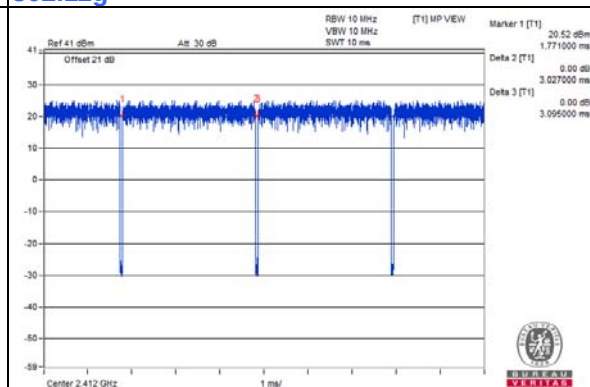

VHT20

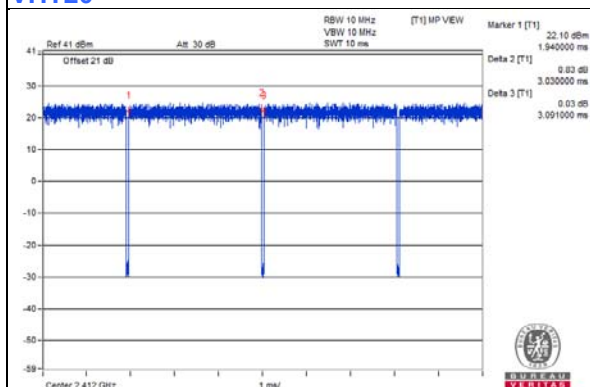

VHT40

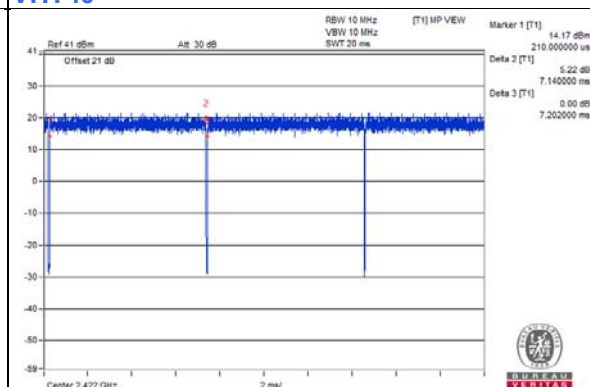

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	DC Cable	1	1.5	No	0	Supplied by client

3.4.1 Configuration of System under Test

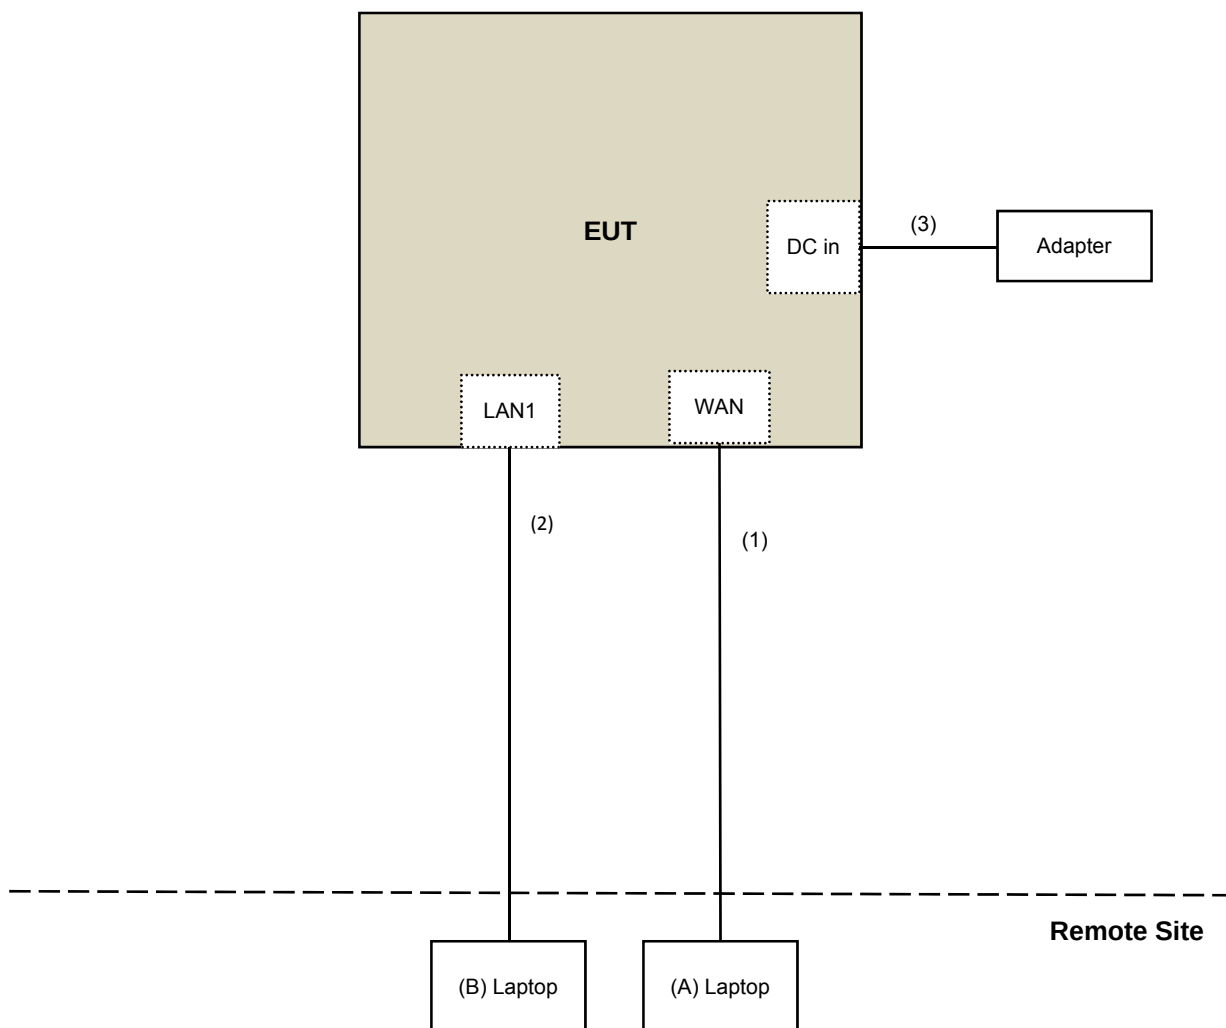

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance :

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated Emission & Bandedge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: July 22 to 25, 2020

For other test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	Sep. 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	Sep. 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Aug. 23, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

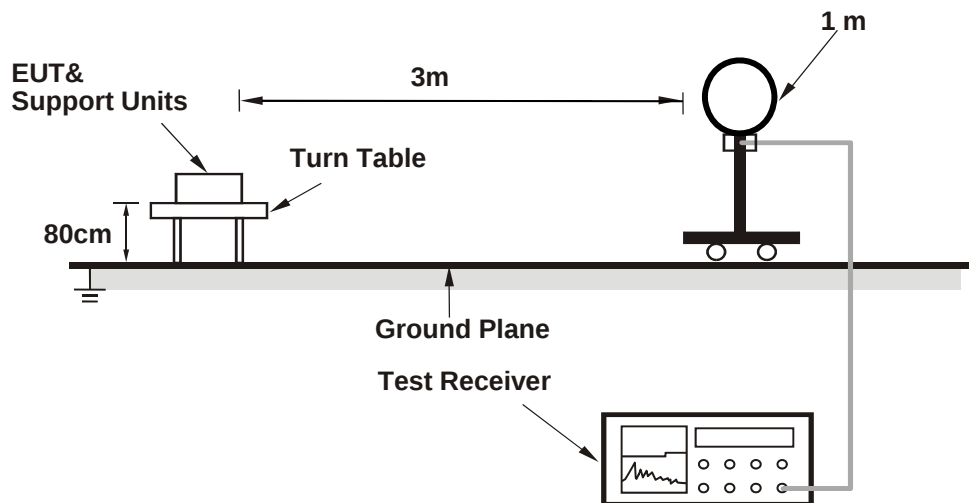

For Radiated emission 30MHz to 1GHz

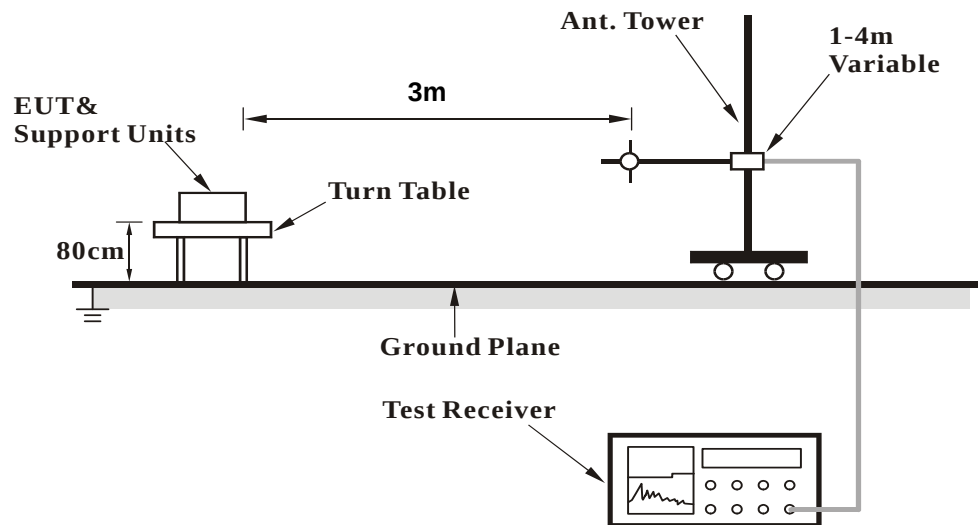

For Radiated emission above 1GHz

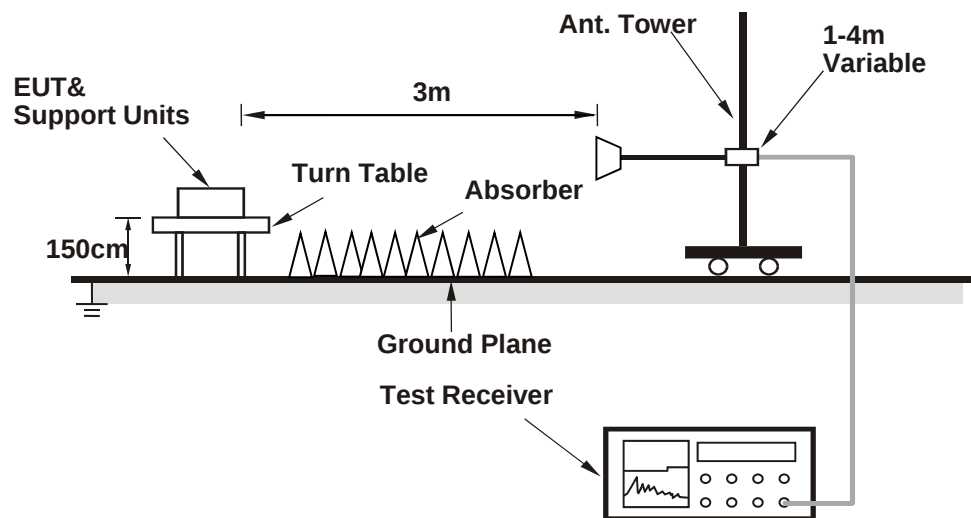

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QAtool 0.0.2.0) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11b

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.60	55.8 PK	74.0	-18.2	1.97 H	55	57.7	-1.9
2	2386.60	46.5 AV	54.0	-7.5	1.97 H	55	48.4	-1.9
3	*2412.00	110.3 PK			1.97 H	55	112.2	-1.9
4	*2412.00	107.8 AV			1.97 H	55	109.7	-1.9
5	4824.00	54.9 PK	74.0	-19.1	1.47 H	43	52.0	2.9
6	4824.00	53.7 AV	54.0	-0.3	1.47 H	43	50.8	2.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.17	57.9 PK	74.0	-16.1	1.00 V	17	59.8	-1.9
2	2386.17	50.3 AV	54.0	-3.7	1.00 V	17	52.2	-1.9
3	*2412.00	114.3 PK			1.00 V	17	116.2	-1.9
4	*2412.00	112.2 AV			1.00 V	17	114.1	-1.9
5	4824.00	53.6 PK	74.0	-20.4	1.90 V	316	50.7	2.9
6	4824.00	52.5 AV	54.0	-1.5	1.90 V	316	49.6	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.4 PK	74.0	-21.6	1.97 H	66	54.3	-1.9
2	2390.00	40.0 AV	54.0	-14.0	1.97 H	66	41.9	-1.9
3	*2437.00	109.6 PK			1.97 H	66	111.6	-2.0
4	*2437.00	107.4 AV			1.97 H	66	109.4	-2.0
5	2483.50	55.2 PK	74.0	-18.8	1.97 H	66	57.1	-1.9
6	2483.50	41.2 AV	54.0	-12.8	1.97 H	66	43.1	-1.9
7	4874.00	54.9 PK	74.0	-19.1	1.55 H	50	52.1	2.8
8	4874.00	53.6 AV	54.0	-0.4	1.55 H	50	50.8	2.8
9	7311.00	56.6 PK	74.0	-17.4	2.28 H	310	47.7	8.9
10	7311.00	53.4 AV	54.0	-0.6	2.28 H	310	44.5	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	1.04 V	357	56.8	-1.9
2	2390.00	43.5 AV	54.0	-10.5	1.04 V	357	45.4	-1.9
3	*2437.00	114.8 PK			1.04 V	357	116.8	-2.0
4	*2437.00	112.6 AV			1.04 V	357	114.6	-2.0
5	2483.50	55.8 PK	74.0	-18.2	1.04 V	357	57.7	-1.9
6	2483.50	44.9 AV	54.0	-9.1	1.04 V	357	46.8	-1.9
7	4874.00	52.4 PK	74.0	-21.6	1.86 V	313	49.6	2.8
8	4874.00	51.2 AV	54.0	-2.8	1.86 V	313	48.4	2.8
9	7311.00	53.2 PK	74.0	-20.8	1.58 V	348	44.3	8.9
10	7311.00	49.2 AV	54.0	-4.8	1.58 V	348	40.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.7 PK			1.71 H	57	114.6	-1.9
2	*2462.00	110.3 AV			1.71 H	57	112.2	-1.9
3	2486.25	57.9 PK	74.0	-16.1	1.71 H	57	59.8	-1.9
4	2486.25	49.5 AV	54.0	-4.5	1.71 H	57	51.4	-1.9
5	4924.00	53.6 PK	74.0	-20.4	1.62 H	46	50.9	2.7
6	4924.00	52.3 AV	54.0	-1.7	1.62 H	46	49.6	2.7
7	7386.00	57.1 PK	74.0	-16.9	1.50 H	343	48.1	9.0
8	7386.00	53.9 AV	54.0	-0.1	1.50 H	343	44.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.6 PK			1.07 V	5	116.5	-1.9
2	*2462.00	111.9 AV			1.07 V	5	113.8	-1.9
3	2487.73	60.4 PK	74.0	-13.6	1.07 V	5	62.3	-1.9
4	2487.73	53.5 AV	54.0	-0.5	1.07 V	5	55.4	-1.9
5	4924.00	48.3 PK	74.0	-25.7	1.62 V	311	45.6	2.7
6	4924.00	46.9 AV	54.0	-7.1	1.62 V	311	44.2	2.7
7	7386.00	56.8 PK	74.0	-17.2	2.45 V	357	47.8	9.0
8	7386.00	53.6 AV	54.0	-0.4	2.45 V	357	44.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	1.17 H	45	70.4	-1.9
2	2390.00	50.6 AV	54.0	-3.4	1.17 H	45	52.5	-1.9
3	*2412.00	112.6 PK			1.17 H	45	114.5	-1.9
4	*2412.00	102.1 AV			1.17 H	45	104.0	-1.9
5	4824.00	44.7 PK	74.0	-29.3	1.55 H	40	41.8	2.9
6	4824.00	32.5 AV	54.0	-21.5	1.55 H	40	29.6	2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.6 PK	74.0	-0.4	1.50 V	352	75.5	-1.9
2	2390.00	50.1 AV	54.0	-3.9	1.50 V	352	52.0	-1.9
3	*2412.00	115.7 PK			1.50 V	352	117.6	-1.9
4	*2412.00	101.5 AV			1.50 V	352	103.4	-1.9
5	4824.00	43.0 PK	74.0	-31.0	1.52 V	301	40.1	2.9
6	4824.00	30.7 AV	54.0	-23.3	1.52 V	301	27.8	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.7 PK	74.0	-19.3	1.38 H	50	56.6	-1.9
2	2390.00	42.1 AV	54.0	-11.9	1.38 H	50	44.0	-1.9
3	*2437.00	114.8 PK			1.38 H	50	116.8	-2.0
4	*2437.00	103.7 AV			1.38 H	50	105.7	-2.0
5	2483.50	56.9 PK	74.0	-17.1	1.38 H	50	58.8	-1.9
6	2483.50	43.1 AV	54.0	-10.9	1.38 H	50	45.0	-1.9
7	4874.00	47.2 PK	74.0	-26.8	1.56 H	52	44.4	2.8
8	4874.00	34.7 AV	54.0	-19.3	1.56 H	52	31.9	2.8
9	7311.00	61.7 PK	74.0	-12.3	2.23 H	321	52.8	8.9
10	7311.00	48.9 AV	54.0	-5.1	2.23 H	321	40.0	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.53 V	10	59.6	-1.9
2	2390.00	45.0 AV	54.0	-9.0	1.53 V	10	46.9	-1.9
3	*2437.00	119.6 PK			1.53 V	10	121.6	-2.0
4	*2437.00	109.3 AV			1.53 V	10	111.3	-2.0
5	2483.50	57.3 PK	74.0	-16.7	1.53 V	10	59.2	-1.9
6	2483.50	44.8 AV	54.0	-9.2	1.53 V	10	46.7	-1.9
7	4874.00	44.8 PK	74.0	-29.2	1.46 V	312	42.0	2.8
8	4874.00	32.8 AV	54.0	-21.2	1.46 V	312	30.0	2.8
9	7311.00	61.3 PK	74.0	-12.7	2.52 V	338	52.4	8.9
10	7311.00	48.5 AV	54.0	-5.5	2.52 V	338	39.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.7 PK			1.68 H	44	111.6	-1.9
2	*2462.00	99.0 AV			1.68 H	44	100.9	-1.9
3	2483.50	64.4 PK	74.0	-9.6	1.68 H	44	66.3	-1.9
4	2483.50	44.4 AV	54.0	-9.6	1.68 H	44	46.3	-1.9
5	4924.00	44.7 PK	74.0	-29.3	1.53 H	63	42.0	2.7
6	4924.00	32.5 AV	54.0	-21.5	1.53 H	63	29.8	2.7
7	7386.00	56.1 PK	74.0	-17.9	2.29 H	335	47.1	9.0
8	7386.00	45.5 AV	54.0	-8.5	2.29 H	335	36.5	9.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.00 V	353	114.8	-1.9
2	*2462.00	102.3 AV			1.00 V	353	104.2	-1.9
3	2483.50	73.5 PK	74.0	-0.5	1.00 V	353	75.4	-1.9
4	2483.50	48.4 AV	54.0	-5.6	1.00 V	353	50.3	-1.9
5	4924.00	42.8 PK	74.0	-31.2	1.49 V	307	40.1	2.7
6	4924.00	30.7 AV	54.0	-23.3	1.49 V	307	28.0	2.7
7	7386.00	55.8 PK	74.0	-18.2	2.50 V	342	46.8	9.0
8	7386.00	43.7 AV	54.0	-10.3	2.50 V	342	34.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

VHT20

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.00 H	33	74.3	-1.9
2	2390.00	47.7 AV	54.0	-6.3	1.00 H	33	49.6	-1.9
3	*2412.00	110.2 PK			1.00 H	33	112.1	-1.9
4	*2412.00	99.3 AV			1.00 H	33	101.2	-1.9
5	4824.00	44.1 PK	74.0	-29.9	1.52 H	36	41.2	2.9
6	4824.00	32.1 AV	54.0	-21.9	1.52 H	36	29.2	2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.8 PK	74.0	-0.2	1.50 V	354	75.7	-1.9
2	2390.00	51.1 AV	54.0	-2.9	1.50 V	354	53.0	-1.9
3	*2412.00	113.6 PK			1.50 V	354	115.5	-1.9
4	*2412.00	101.8 AV			1.50 V	354	103.7	-1.9
5	4824.00	42.5 PK	74.0	-31.5	1.50 V	308	39.6	2.9
6	4824.00	30.4 AV	54.0	-23.6	1.50 V	308	27.5	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.6 PK	74.0	-19.4	1.43 H	36	56.5	-1.9
2	2390.00	41.8 AV	54.0	-12.2	1.43 H	36	43.7	-1.9
3	*2437.00	115.4 PK			1.43 H	36	117.4	-2.0
4	*2437.00	104.0 AV			1.43 H	36	106.0	-2.0
5	2483.50	56.9 PK	74.0	-17.1	1.43 H	36	58.8	-1.9
6	2483.50	42.8 AV	54.0	-11.2	1.43 H	36	44.7	-1.9
7	4874.00	46.9 PK	74.0	-27.1	1.54 H	40	44.1	2.8
8	4874.00	34.4 AV	54.0	-19.6	1.54 H	40	31.6	2.8
9	7311.00	61.8 PK	74.0	-12.2	2.28 H	312	52.9	8.9
10	7311.00	49.1 AV	54.0	-4.9	2.28 H	312	40.2	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.47 V	10	59.1	-1.9
2	2390.00	44.8 AV	54.0	-9.2	1.47 V	10	46.7	-1.9
3	*2437.00	119.3 PK			1.47 V	10	121.3	-2.0
4	*2437.00	109.0 AV			1.47 V	10	111.0	-2.0
5	2483.50	57.1 PK	74.0	-16.9	1.47 V	10	59.0	-1.9
6	2483.50	44.7 AV	54.0	-9.3	1.47 V	10	46.6	-1.9
7	4874.00	45.2 PK	74.0	-28.8	1.45 V	298	42.4	2.8
8	4874.00	33.0 AV	54.0	-21.0	1.45 V	298	30.2	2.8
9	7311.00	60.8 PK	74.0	-13.2	2.50 V	342	51.9	8.9
10	7311.00	48.3 AV	54.0	-5.7	2.50 V	342	39.4	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.3 PK			1.13 H	31	111.2	-1.9
2	*2462.00	98.6 AV			1.13 H	31	100.5	-1.9
3	2484.36	70.3 PK	74.0	-3.7	1.13 H	31	72.2	-1.9
4	2484.36	48.0 AV	54.0	-6.0	1.13 H	31	49.9	-1.9
5	2485.11	71.1 PK	74.0	-2.9	1.13 H	31	73.0	-1.9
6	2485.11	46.3 AV	54.0	-7.7	1.13 H	31	48.2	-1.9
7	4924.00	44.3 PK	74.0	-29.7	1.49 H	57	41.6	2.7
8	4924.00	32.1 AV	54.0	-21.9	1.49 H	57	29.4	2.7
9	7386.00	56.1 PK	74.0	-17.9	2.28 H	335	47.1	9.0
10	7386.00	45.2 AV	54.0	-8.8	2.28 H	335	36.2	9.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.1 PK			1.00 V	357	116.0	-1.9
2	*2462.00	101.6 AV			1.00 V	357	103.5	-1.9
3	2483.50	71.7 PK	74.0	-2.3	1.00 V	357	73.6	-1.9
4	2483.50	51.4 AV	54.0	-2.6	1.00 V	357	53.3	-1.9
5	2487.98	73.6 PK	74.0	-0.4	1.00 V	357	75.5	-1.9
6	2487.98	48.1 AV	54.0	-5.9	1.00 V	357	50.0	-1.9
7	4924.00	42.8 PK	74.0	-31.2	1.46 V	296	40.1	2.7
8	4924.00	30.5 AV	54.0	-23.5	1.46 V	296	27.8	2.7
9	7386.00	55.6 PK	74.0	-18.4	2.45 V	340	46.6	9.0
10	7386.00	43.6 AV	54.0	-10.4	2.45 V	340	34.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

VHT40

Channel	TX Channel 3	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.50	70.0 PK	74.0	-4.0	1.03 H	35	71.9	-1.9
2	2388.50	51.3 AV	54.0	-2.7	1.03 H	35	53.2	-1.9
3	*2422.00	105.3 PK			1.03 H	35	107.2	-1.9
4	*2422.00	96.0 AV			1.03 H	35	97.9	-1.9
5	4844.00	45.2 PK	74.0	-28.8	1.52 H	73	42.3	2.9
6	4844.00	32.9 AV	54.0	-21.1	1.52 H	73	30.0	2.9
7	7266.00	55.6 PK	74.0	-18.4	2.34 H	332	46.8	8.8
8	7266.00	45.2 AV	54.0	-8.8	2.34 H	332	36.4	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.32	71.5 PK	74.0	-2.5	1.50 V	12	73.4	-1.9
2	2388.32	53.8 AV	54.0	-0.2	1.50 V	12	55.7	-1.9
3	*2422.00	111.4 PK			1.50 V	12	113.3	-1.9
4	*2422.00	101.5 AV			1.50 V	12	103.4	-1.9
5	4844.00	42.5 PK	74.0	-31.5	1.43 V	295	39.6	2.9
6	4844.00	30.2 AV	54.0	-23.8	1.43 V	295	27.3	2.9
7	7266.00	55.8 PK	74.0	-18.2	2.46 V	345	47.0	8.8
8	7266.00	43.9 AV	54.0	-10.1	2.46 V	345	35.1	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.8 PK	74.0	-11.2	1.22 H	41	64.7	-1.9
2	2390.00	46.5 AV	54.0	-7.5	1.22 H	41	48.4	-1.9
3	*2437.00	105.0 PK			1.22 H	41	107.0	-2.0
4	*2437.00	96.1 AV			1.22 H	41	98.1	-2.0
5	2483.50	68.1 PK	74.0	-5.9	1.22 H	41	70.0	-1.9
6	2483.50	48.6 AV	54.0	-5.4	1.22 H	41	50.5	-1.9
7	4874.00	45.6 PK	74.0	-28.4	1.43 H	54	42.8	2.8
8	4874.00	33.0 AV	54.0	-21.0	1.43 H	54	30.2	2.8
9	7311.00	56.1 PK	74.0	-17.9	2.25 H	346	47.2	8.9
10	7311.00	45.7 AV	54.0	-8.3	2.25 H	346	36.8	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.03 V	10	70.8	-1.9
2	2390.00	51.7 AV	54.0	-2.3	1.03 V	10	53.6	-1.9
3	*2437.00	111.9 PK			1.03 V	10	113.9	-2.0
4	*2437.00	103.1 AV			1.03 V	10	105.1	-2.0
5	2483.50	73.5 PK	74.0	-0.5	1.03 V	10	75.4	-1.9
6	2483.50	53.5 AV	54.0	-0.5	1.03 V	10	55.4	-1.9
7	4874.00	42.0 PK	74.0	-32.0	1.45 V	303	39.2	2.8
8	4874.00	29.7 AV	54.0	-24.3	1.45 V	303	26.9	2.8
9	7311.00	56.1 PK	74.0	-17.9	2.42 V	350	47.2	8.9
10	7311.00	44.2 AV	54.0	-9.8	2.42 V	350	35.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 9	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.0 PK			1.02 H	33	104.9	-1.9
2	*2452.00	92.5 AV			1.02 H	33	94.4	-1.9
3	2483.50	58.8 PK	74.0	-15.2	1.02 H	33	60.7	-1.9
4	2483.50	46.3 AV	54.0	-7.7	1.02 H	33	48.2	-1.9
5	2487.67	61.8 PK	74.0	-12.2	1.02 H	33	63.7	-1.9
6	2487.67	46.0 AV	54.0	-8.0	1.02 H	33	47.9	-1.9
7	4904.00	44.6 PK	74.0	-29.4	1.56 H	79	41.9	2.7
8	4904.00	32.6 AV	54.0	-21.4	1.56 H	79	29.9	2.7
9	7356.00	55.6 PK	74.0	-18.4	2.34 H	332	46.7	8.9
10	7356.00	45.3 AV	54.0	-8.7	2.34 H	332	36.4	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.4 PK			1.44 V	9	110.3	-1.9
2	*2452.00	98.5 AV			1.44 V	9	100.4	-1.9
3	2487.53	68.1 PK	74.0	-5.9	1.44 V	9	70.0	-1.9
4	2487.53	53.5 AV	54.0	-0.5	1.44 V	9	55.4	-1.9
5	4904.00	42.4 PK	74.0	-31.6	1.52 V	292	39.7	2.7
6	4904.00	30.2 AV	54.0	-23.8	1.52 V	292	27.5	2.7
7	7356.00	55.3 PK	74.0	-18.7	2.48 V	331	46.4	8.9
8	7356.00	43.3 AV	54.0	-10.7	2.48 V	331	34.4	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.50	31.5 QP	40.0	-8.5	1.00 H	87	40.3	-8.8
2	114.07	31.1 QP	43.5	-12.4	3.00 H	313	40.8	-9.7
3	160.56	36.9 QP	43.5	-6.6	2.00 H	287	43.8	-6.9
4	225.48	38.9 QP	46.0	-7.1	1.50 H	134	48.5	-9.6
5	260.74	37.0 QP	46.0	-9.0	1.00 H	80	44.6	-7.6
6	380.44	35.5 QP	46.0	-10.5	1.00 H	136	39.1	-3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

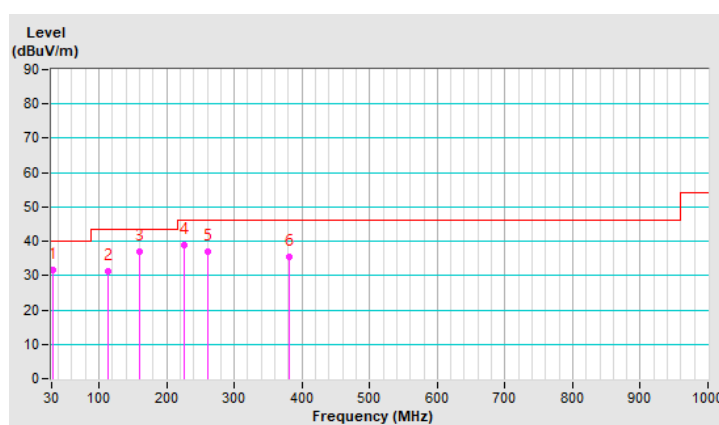


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.40	36.2 QP	40.0	-3.8	1.00 V	196	44.6	-8.4
2	71.10	32.4 QP	40.0	-7.6	1.00 V	352	42.6	-10.2
3	129.40	31.8 QP	43.5	-11.7	1.00 V	244	40.0	-8.2
4	224.22	34.4 QP	46.0	-11.6	1.00 V	18	44.1	-9.7
5	266.90	34.0 QP	46.0	-12.0	1.00 V	249	41.2	-7.2
6	363.58	30.3 QP	46.0	-15.7	1.50 V	348	34.2	-3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

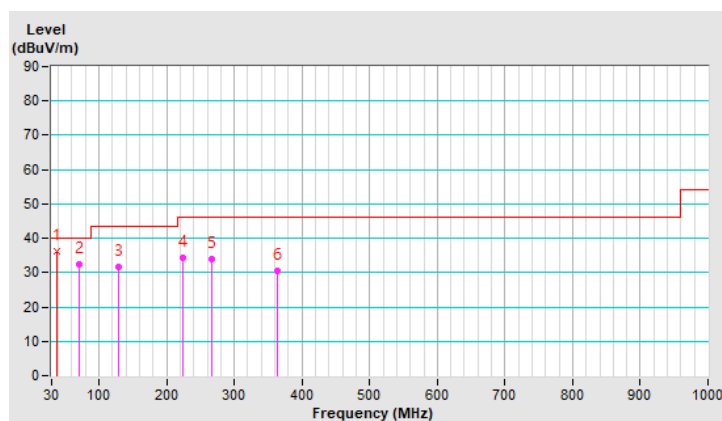

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: July 22, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

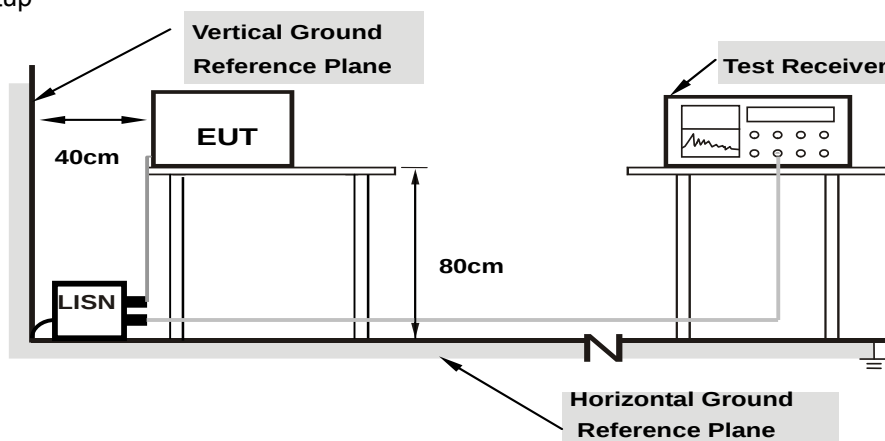

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.98	40.56	25.02	50.54	35.00	65.79	55.79	-15.25	-20.79
2	0.16562	9.98	38.83	24.37	48.81	34.35	65.18	55.18	-16.37	-20.83
3	0.18516	9.99	34.30	20.65	44.29	30.64	64.25	54.25	-19.96	-23.61
4	0.22031	9.99	32.92	17.23	42.91	27.22	62.81	52.81	-19.90	-25.59
5	0.27109	10.00	25.09	9.38	35.09	19.38	61.08	51.08	-25.99	-31.70
6	19.13672	11.33	29.01	21.52	40.34	32.85	60.00	50.00	-19.66	-17.15

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

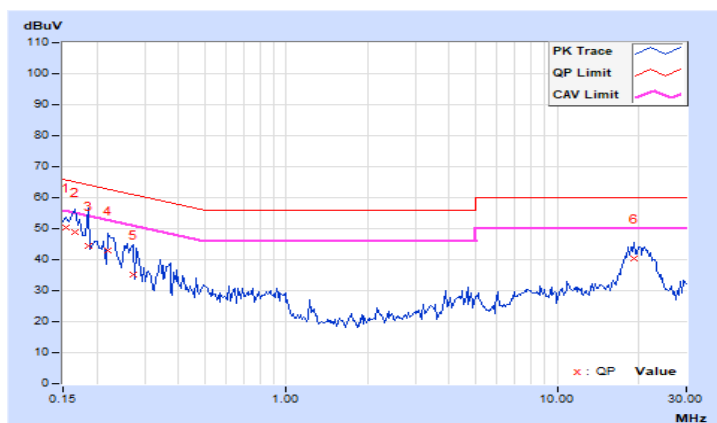


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.99	41.25	26.33	51.24	36.32	66.00	56.00	-14.76	-19.68
2	0.16172	9.99	39.69	25.65	49.68	35.64	65.38	55.38	-15.70	-19.74
3	0.18906	10.00	34.44	21.65	44.44	31.65	64.08	54.08	-19.64	-22.43
4	0.22031	10.00	34.53	22.17	44.53	32.17	62.81	52.81	-18.28	-20.64
5	18.73828	11.06	29.69	22.44	40.75	33.50	60.00	50.00	-19.25	-16.50
6	21.08203	11.16	28.19	21.00	39.35	32.16	60.00	50.00	-20.65	-17.84

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

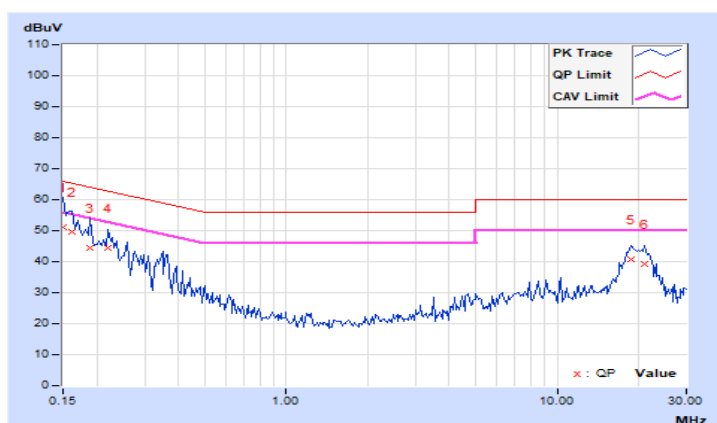


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	9.14	9.11	9.15	9.61	0.5	Pass
6	2437	9.15	9.13	9.18	9.14	0.5	Pass
11	2462	9.16	9.12	9.13	9.14	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.15	15.13	15.15	15.16	0.5	Pass
6	2437	15.16	15.18	15.17	15.19	0.5	Pass
11	2462	15.17	15.18	15.16	15.76	0.5	Pass

VHT20


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.12	15.74	15.16	16.33	0.5	Pass
6	2437	15.11	15.09	15.11	15.08	0.5	Pass
11	2462	15.16	15.73	15.14	16.35	0.5	Pass

VHT40


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	33.9	33.28	33.85	33.98	0.5	Pass
6	2437	35.19	33.39	35.13	33.9	0.5	Pass
9	2452	33.8	34.5	32.69	27.64	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH1

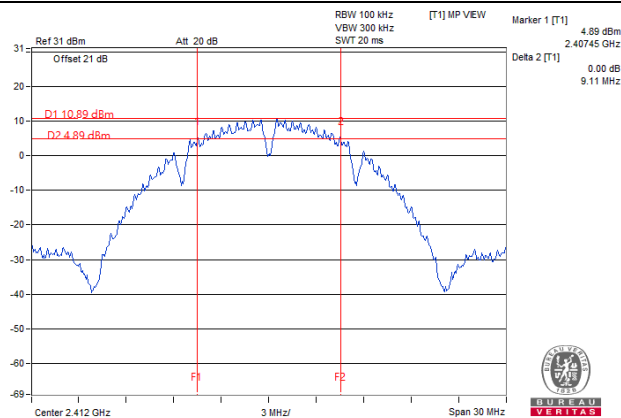


802.11g / Chain 1 : CH1

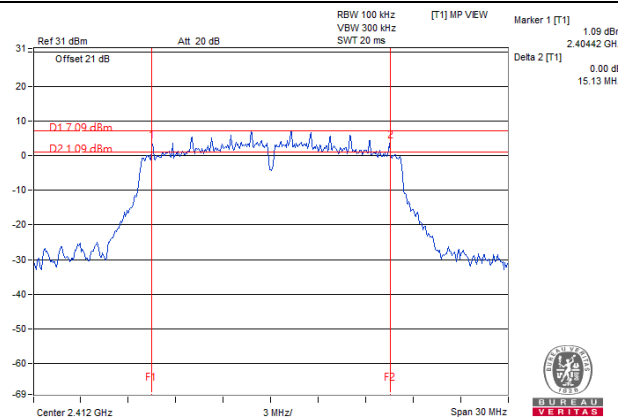

VHT20 / Chain 3 : CH6

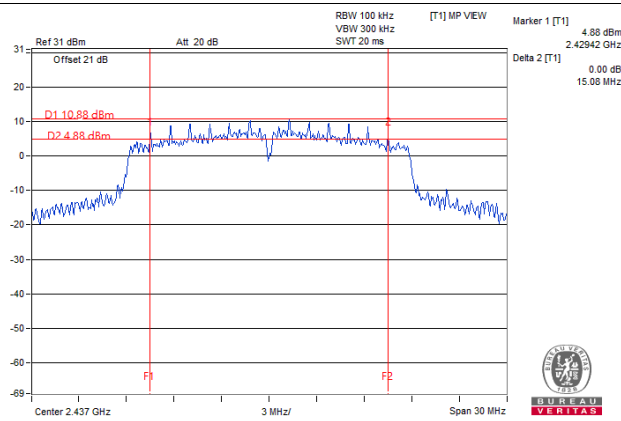

VHT40 / Chain 3 : CH9

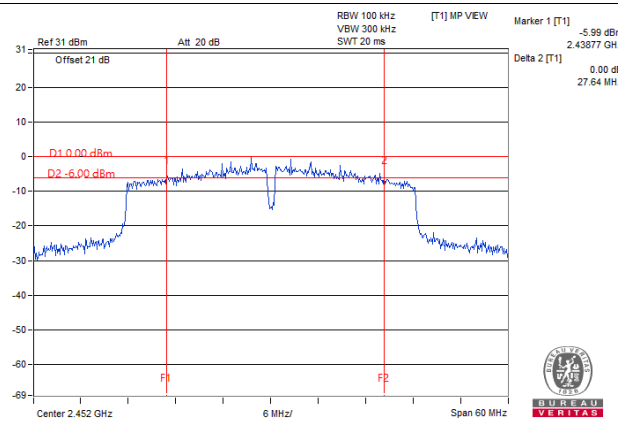

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.84	20.02	20.23	19.85	398.888	26.01	30.00	Pass
6	2437	20.36	20.47	20.61	20.01	435.383	26.39	30.00	Pass
11	2462	20.82	20.19	21.48	20.47	477.288	26.79	30.00	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.33	17.65	17.31	17.71	239.134	23.79	30.00	Pass
6	2437	23.03	20.84	20.65	22.43	613.378	27.88	30.00	Pass
11	2462	15.73	15.46	15.28	15.66	143.109	21.56	30.00	Pass

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	16.41	16.17	15.97	16.01	164.591	22.16	30.00	Pass
6	2437	21.68	20.76	20.45	21.40	515.311	27.12	30.00	Pass
11	2462	15.93	15.89	15.56	15.98	153.592	21.86	30.00	Pass

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	15.97	15.58	15.23	15.61	145.412	21.63	30.00	Pass
6	2437	18.09	17.62	17.44	17.39	232.517	23.66	30.00	Pass
9	2452	13.58	13.47	13.13	13.68	88.93	19.49	30.00	Pass

Beamforming Mode

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	16.41	16.17	15.97	16.01	164.591	22.16	28.63	Pass
6	2437	21.68	20.76	20.45	21.40	515.311	27.12	28.63	Pass
11	2462	15.93	15.89	15.56	15.98	153.592	21.86	28.63	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 7.37\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.37 - 6) = 28.63\text{dBm}$.

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	15.97	15.58	15.23	15.61	145.412	21.63	28.63	Pass
6	2437	18.09	17.62	17.44	17.39	232.517	23.66	28.63	Pass
9	2452	13.58	13.47	13.13	13.68	88.93	19.49	28.63	Pass


Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 7.37\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.37 - 6) = 28.63\text{dBm}$.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For 802.11b, 802.11g:

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

For VHT20, VHT40:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3				
1	2412	-11.49	-9.73	-9.88	-9.90	0.19	-3.98	6.63	Pass
6	2437	-11.16	-9.94	-7.64	-10.47	0.19	-3.38	6.63	Pass
11	2462	-9.49	-9.28	-8.62	-9.78	0.19	-3.06	6.63	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 7.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.37-6) = 6.63\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3				
1	2412	-12.54	-14.15	-14.98	-12.89	0.10	-7.41	6.63	Pass
6	2437	-9.91	-11.24	-11.67	-9.73	0.10	-4.44	6.63	Pass
11	2462	-15.59	-16.80	-16.02	-15.23	0.10	-9.75	6.63	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 7.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.37-6) = 6.63\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

VHT20

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3			
1	2412	-14.97	-15.73	-16.91	-18.53	-10.32	6.63	Pass
6	2437	-9.96	-11.57	-11.16	-10.59	-4.76	6.63	Pass
11	2462	-15.99	-15.64	-15.12	-14.33	-9.20	6.63	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 7.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.37-6) = 6.63\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.


VHT40

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3			
3	2422	-18.42	-19.42	-19.19	-23.21	-13.70	6.63	Pass
6	2437	-16.10	-17.54	-17.39	-16.35	-10.78	6.63	Pass
9	2452	-21.71	-20.41	-21.15	-21.96	-15.25	6.63	Pass


- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 7.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.37-6) = 6.63\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 2 : CH6

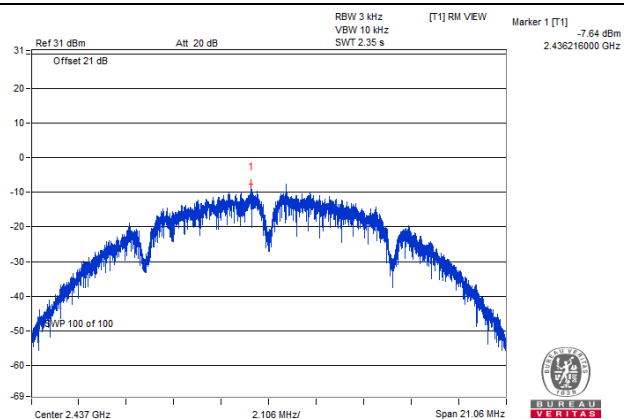


802.11g / Chain 3 : CH6

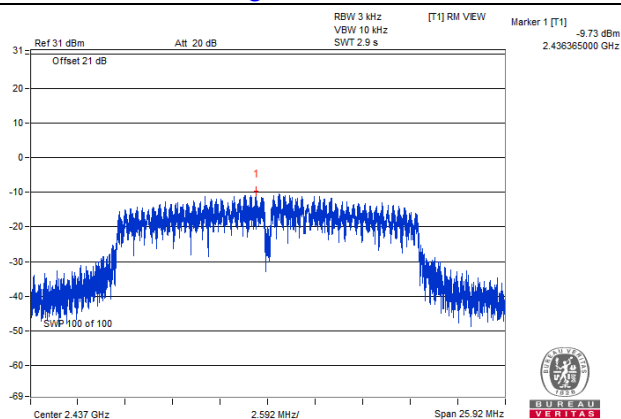

VHT20 / Chain 0 : CH6

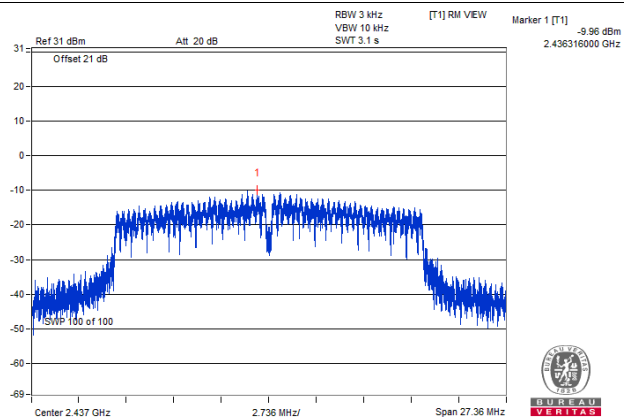

VHT40 / Chain 0 : CH6

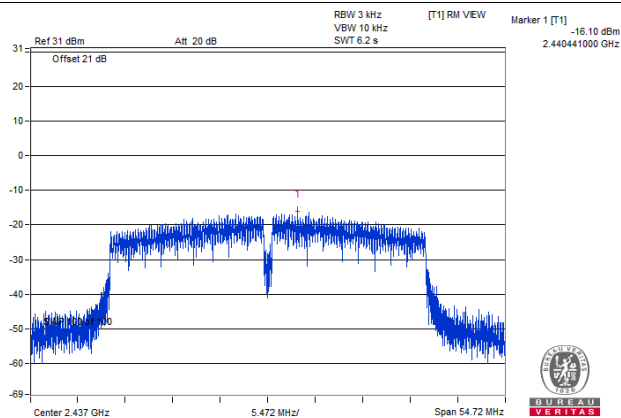


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

Maximum REF

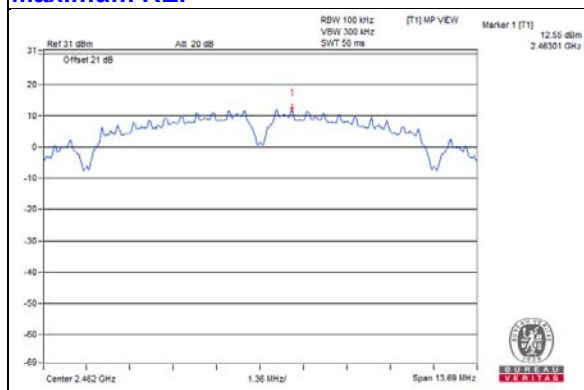


Chain 0


CH 1

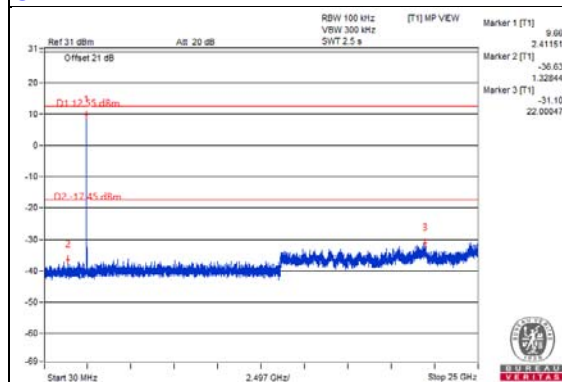


CH 6

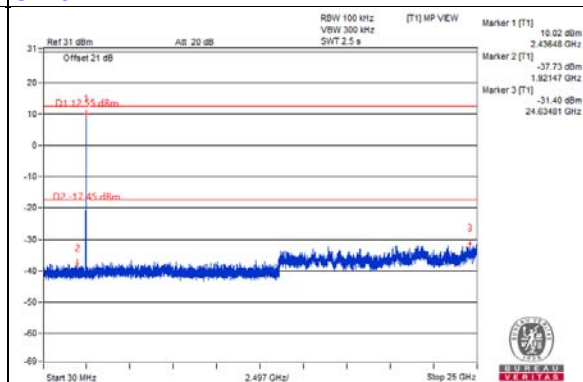


CH 11

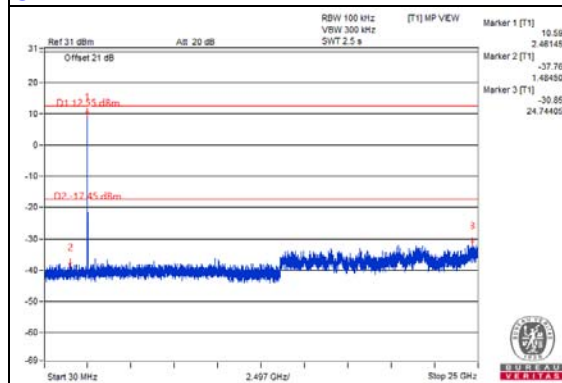


CH 11 Band edge



CH 1 Band edge

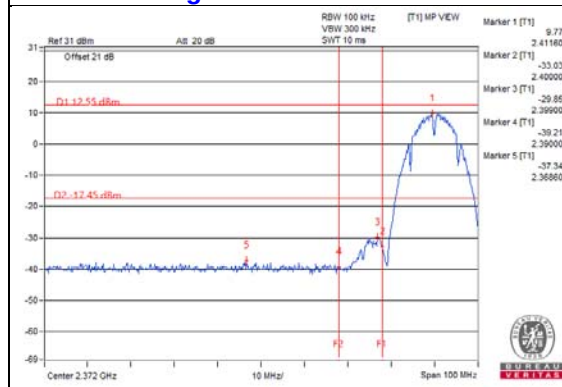


CH 11 Band edge

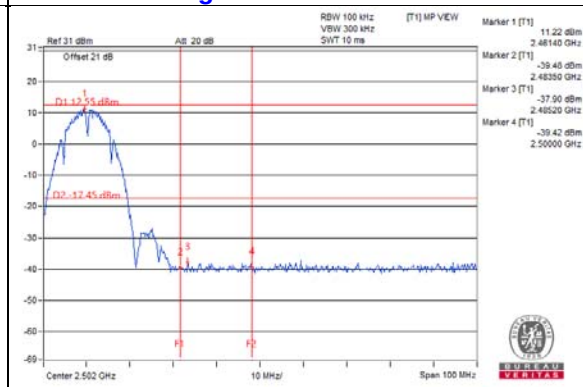


Chain 1


CH 1

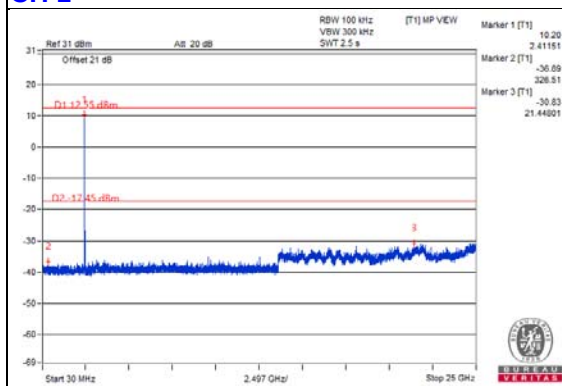


CH 6

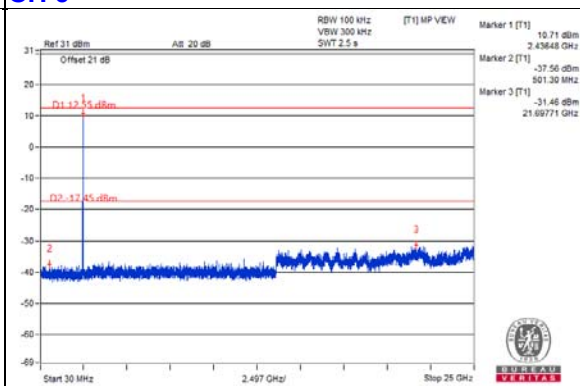


CH 11

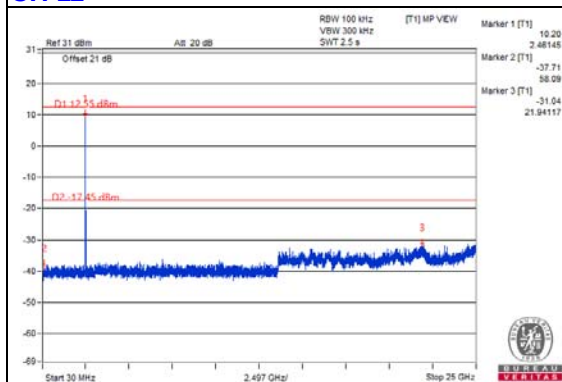

CH 1 Band edge

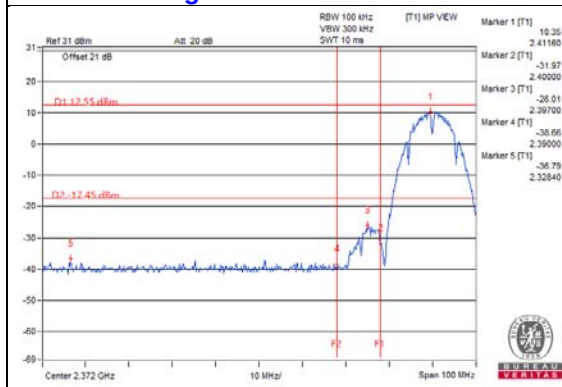


CH 11 Band edge

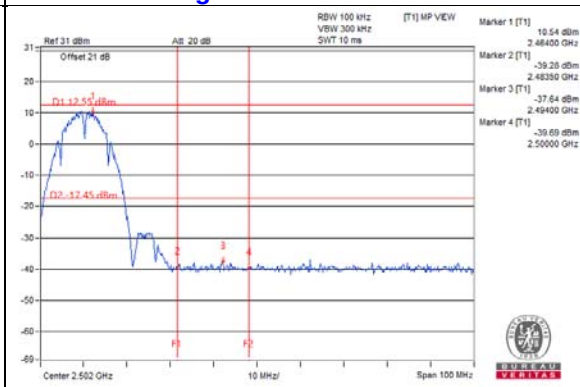


Chain 2



CH 1

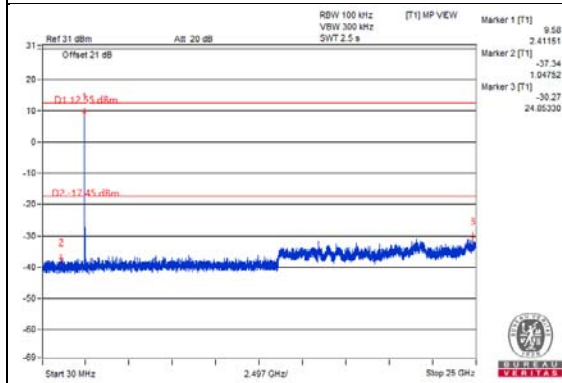


CH 6

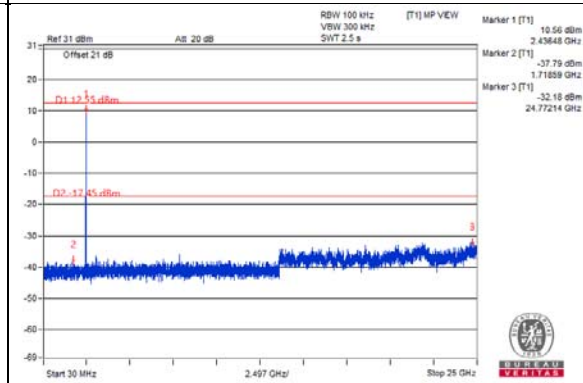


CH 11

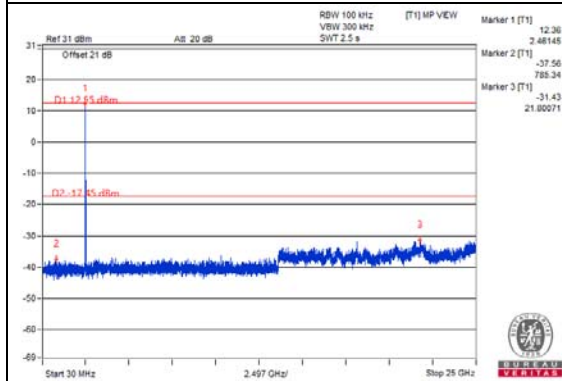

CH 1 Band edge

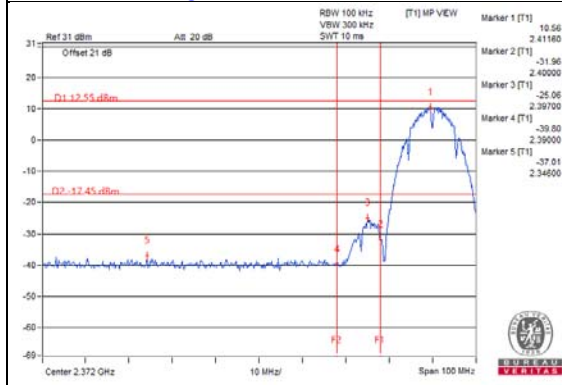


CH 11 Band edge

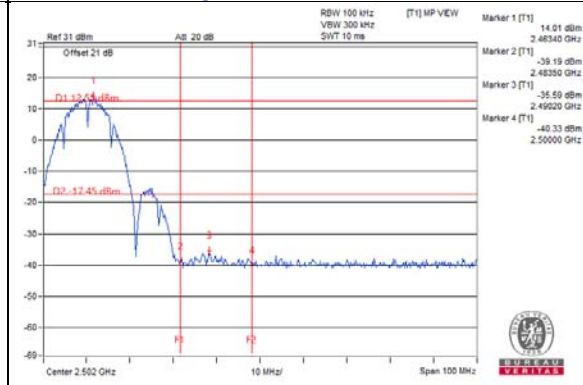


Chain 3


CH 1

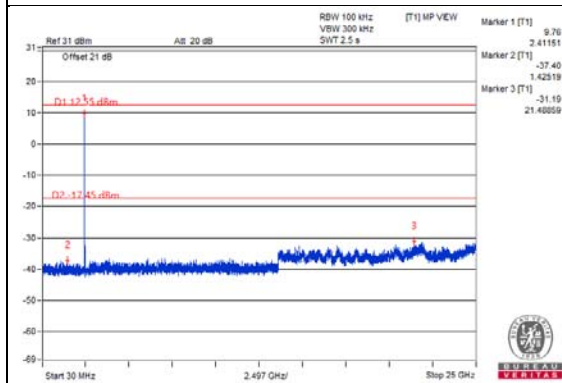


CH 6

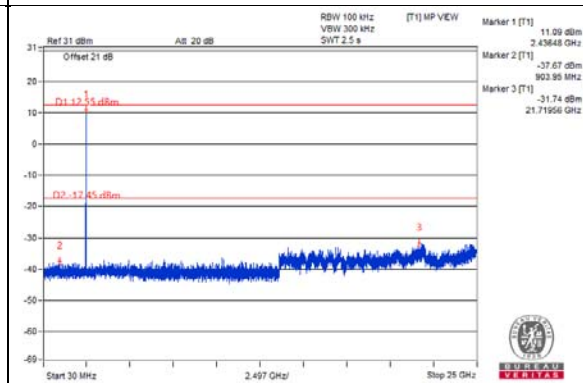


CH 11

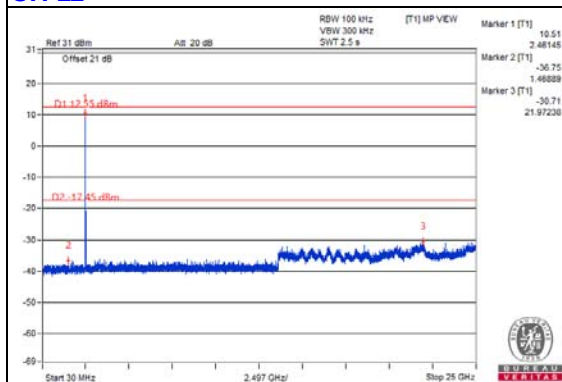

CH 1 Band edge

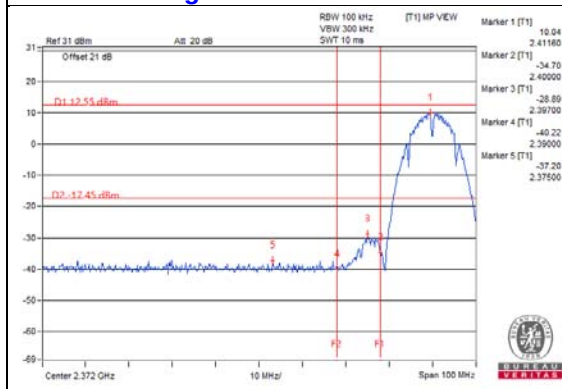


CH 11 Band edge

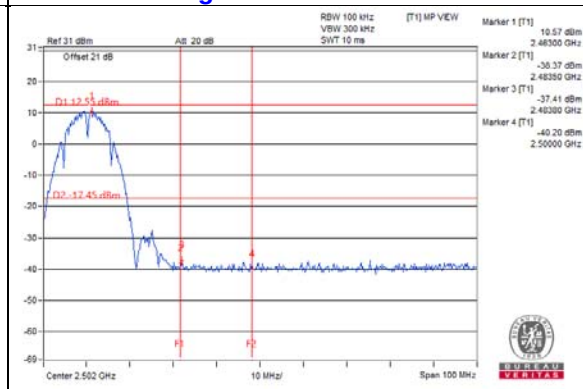


802.11g

Maximum REF

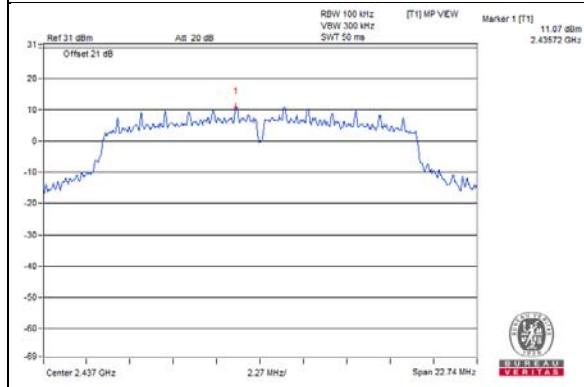


Chain 0


CH 1

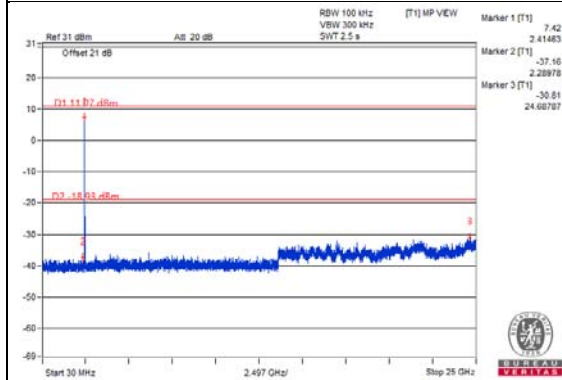


CH 6

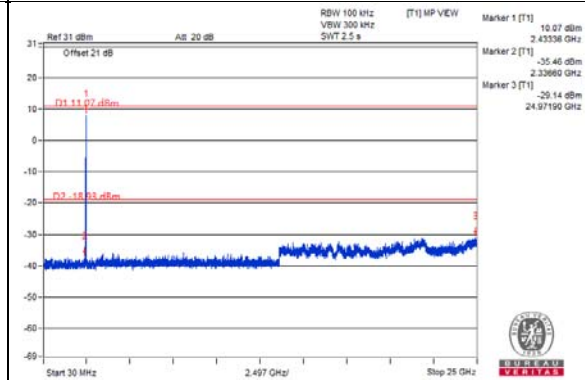


CH 11

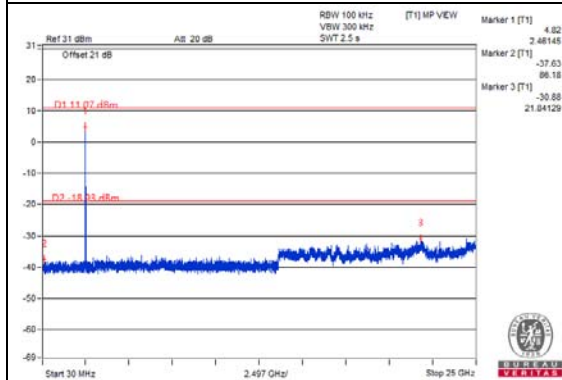

CH 1 Band edge

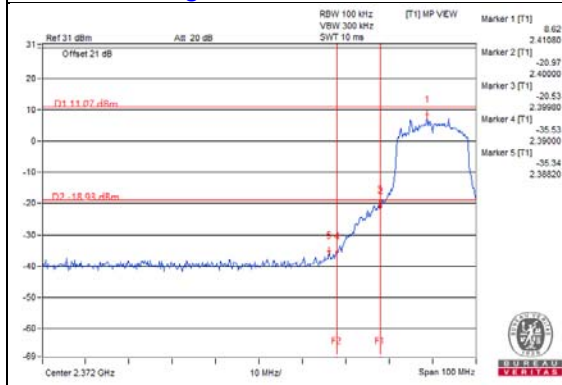


CH 11 Band edge

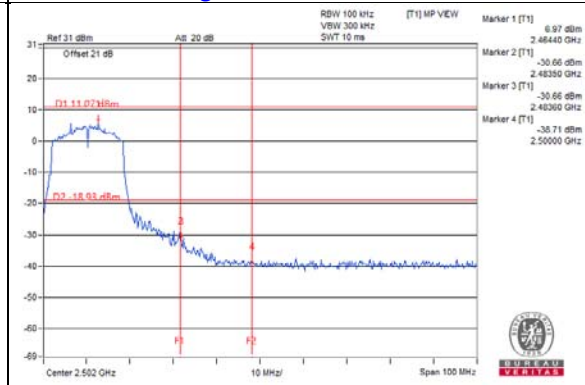


Chain 1


CH 1

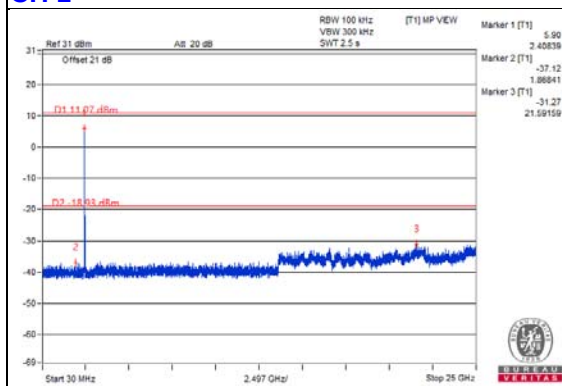


CH 6

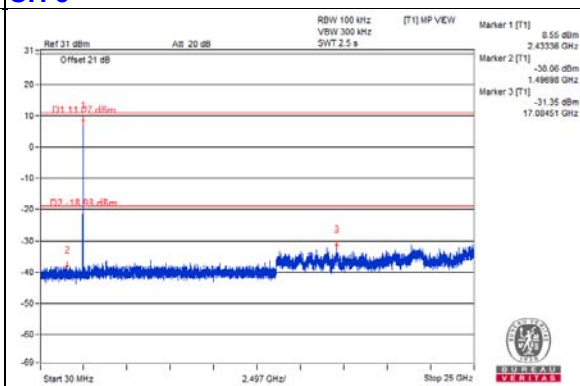


CH 11

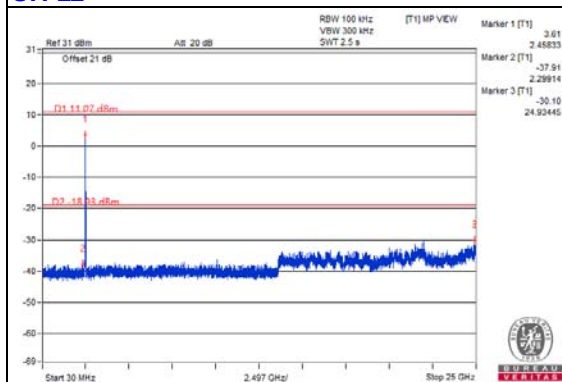

CH 1 Band edge

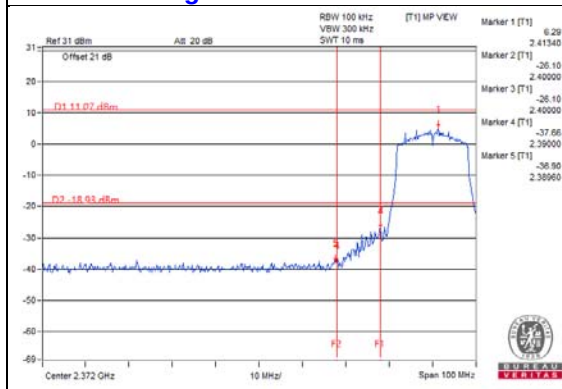


CH 11 Band edge

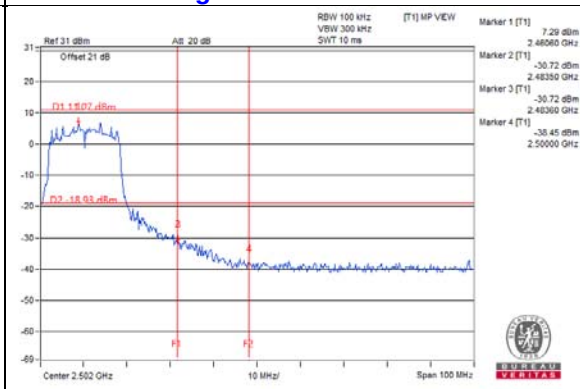


Chain 2


CH 1

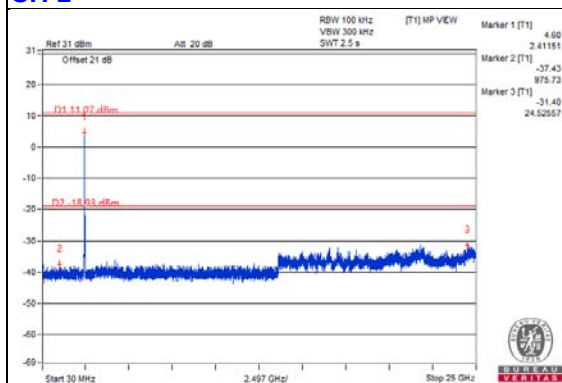


CH 6

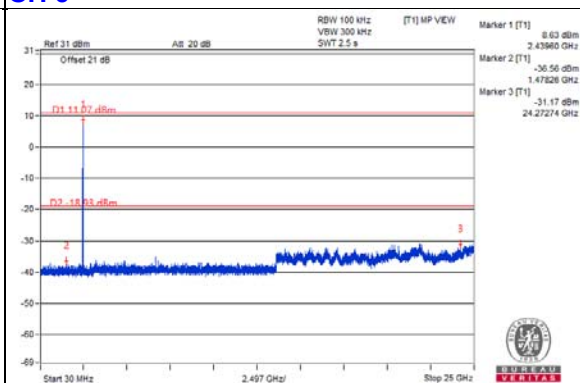


CH 11

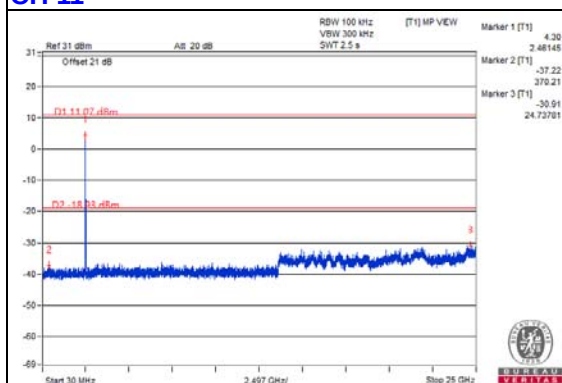

CH 1 Band edge

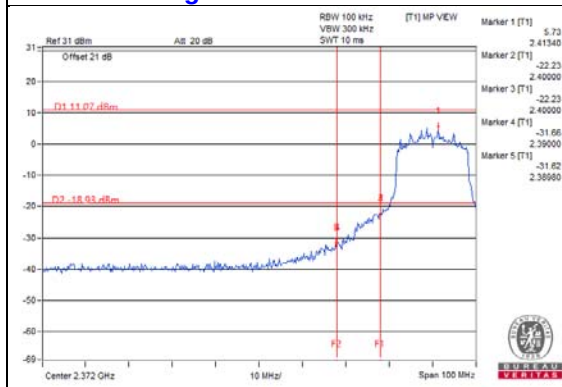


CH 11 Band edge

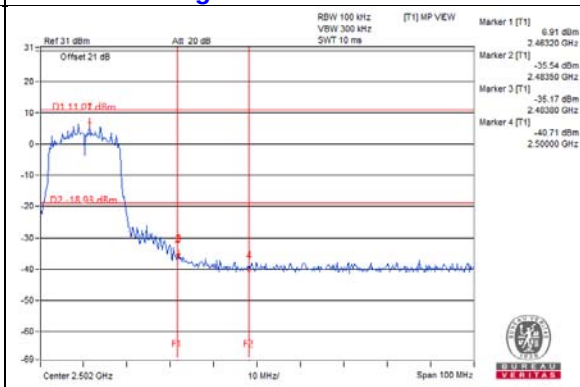


Chain 3


CH 1

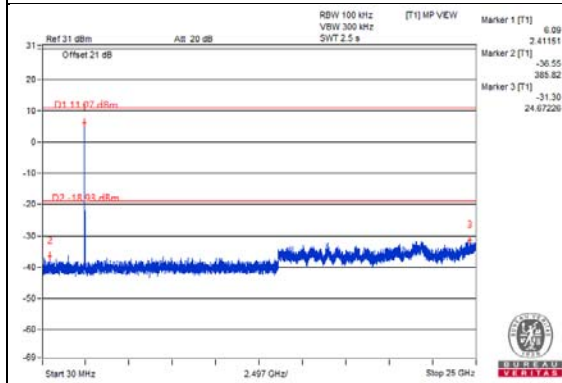


CH 6

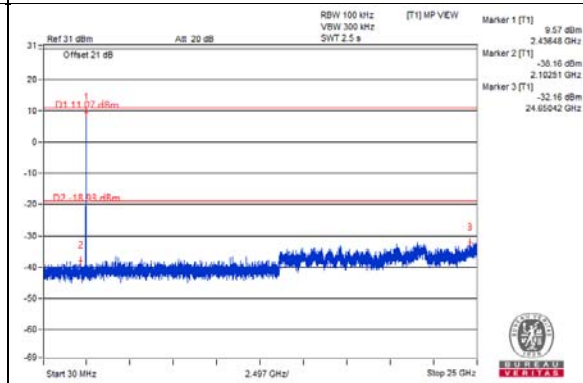


CH 11

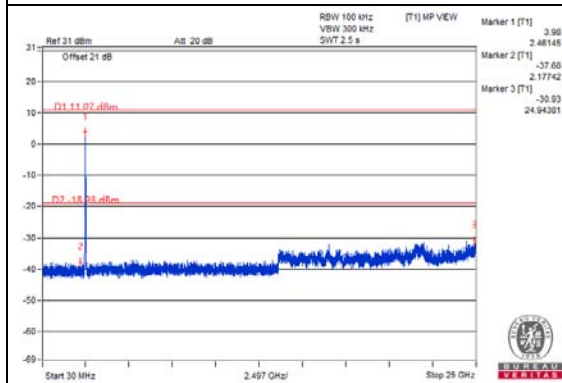

CH 1 Band edge

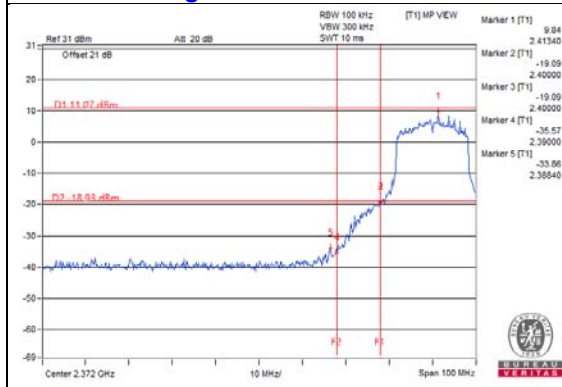


CH 11 Band edge

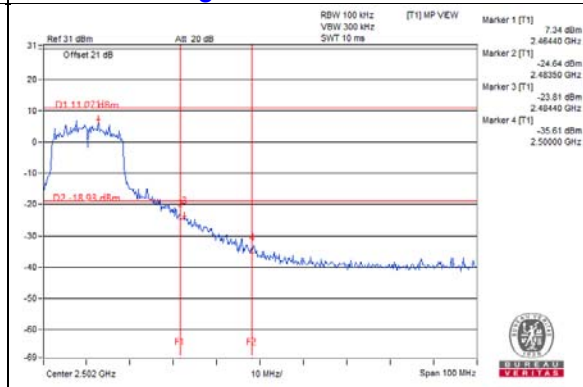


VHT20

Maximum REF

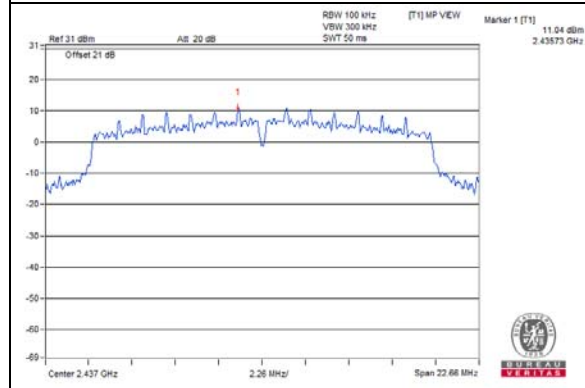


Chain 0


CH 1

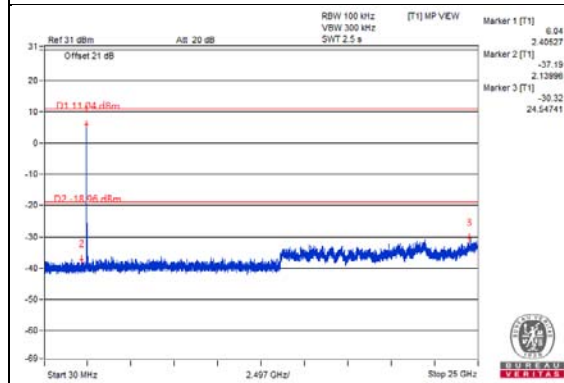


CH 6

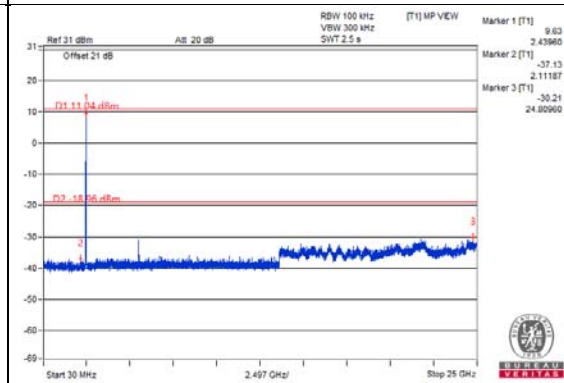


CH 11

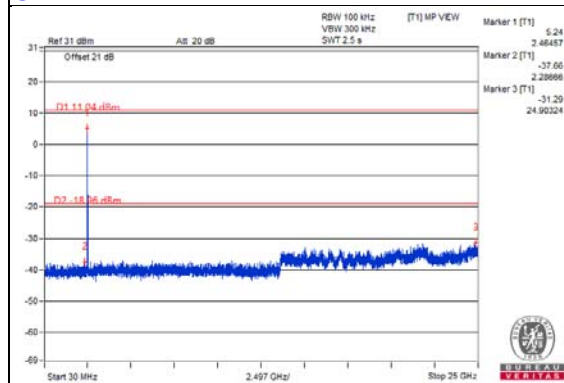

CH 1 Band edge

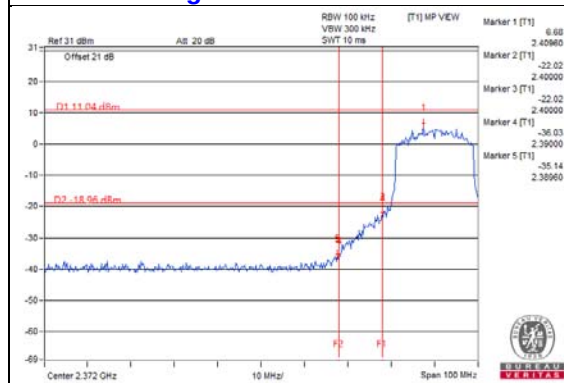


CH 11 Band edge

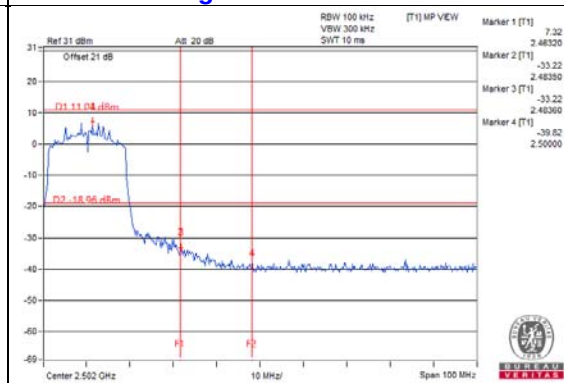


Chain 1


CH 1

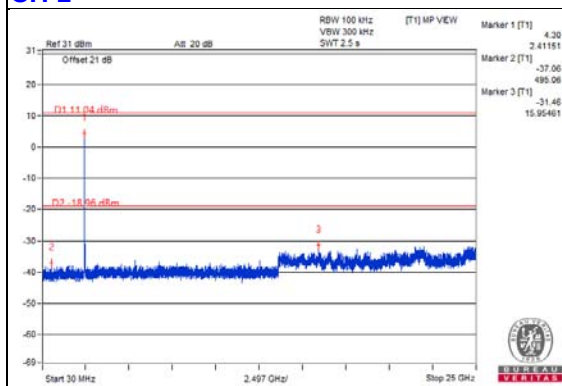


CH 6

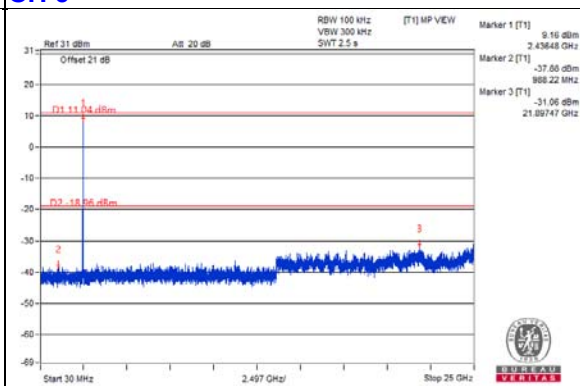


CH 11

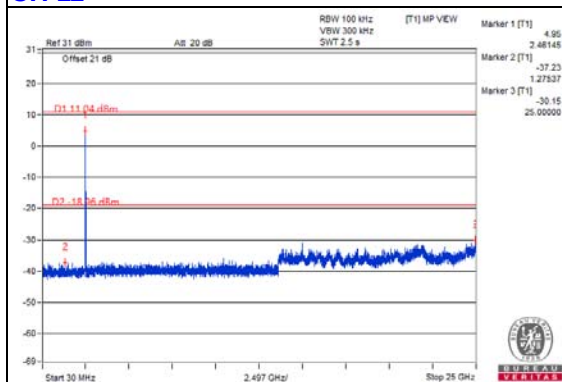

CH 1 Band edge

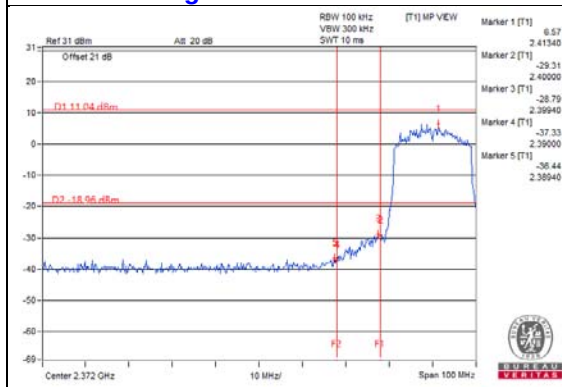


CH 11 Band edge

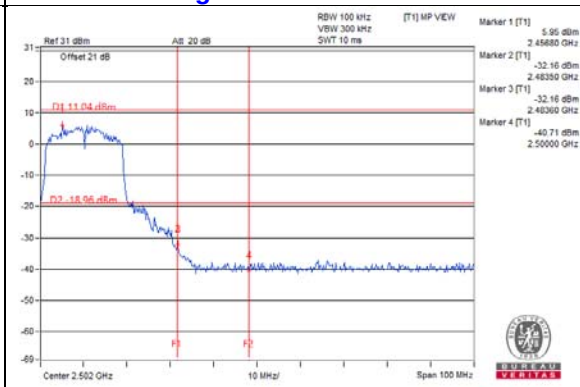


Chain 2


CH 1

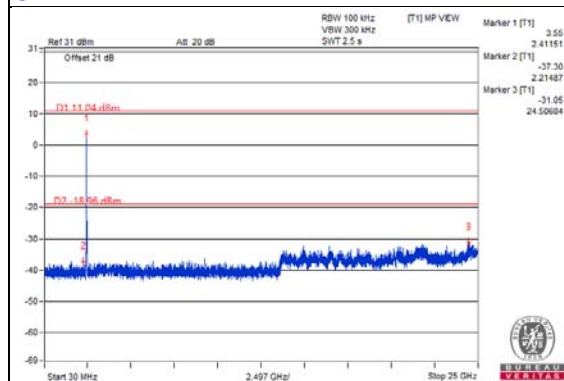


CH 6

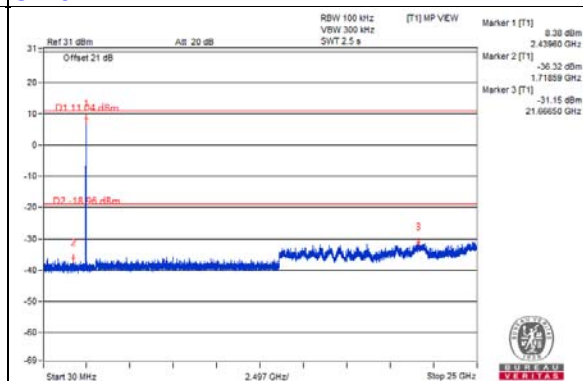


CH 11

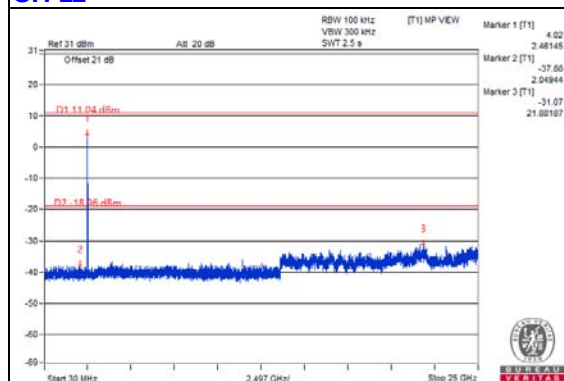

CH 1 Band edge

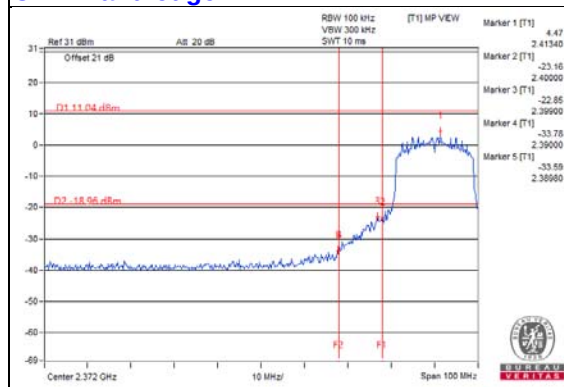


CH 11 Band edge

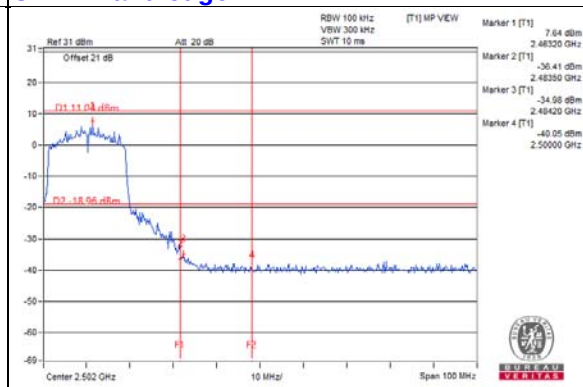


Chain 3


CH 1

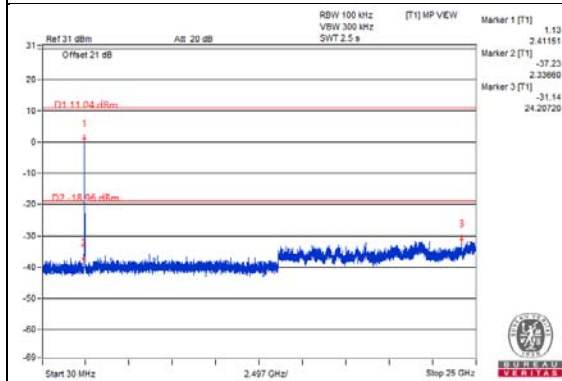


CH 6

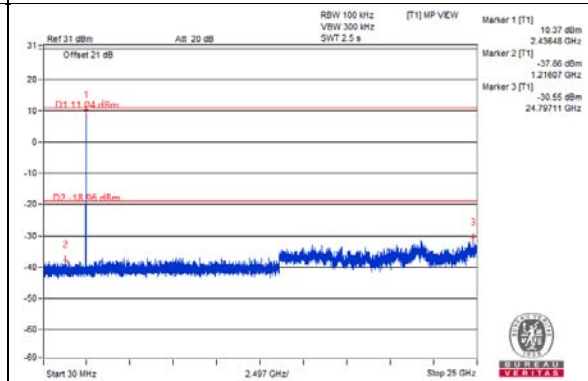


CH 11

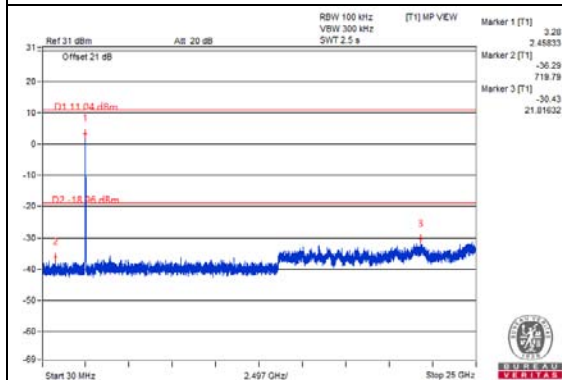

CH 1 Band edge

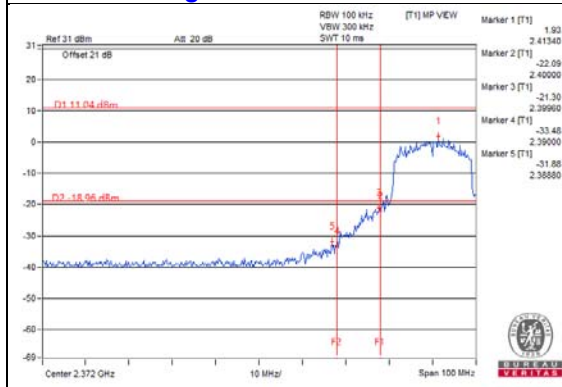


CH 11 Band edge

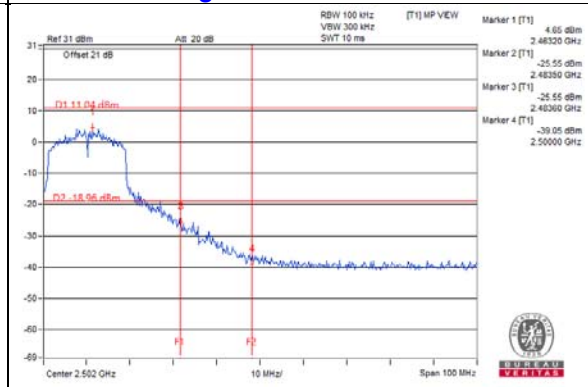


VHT40

Maximum REF

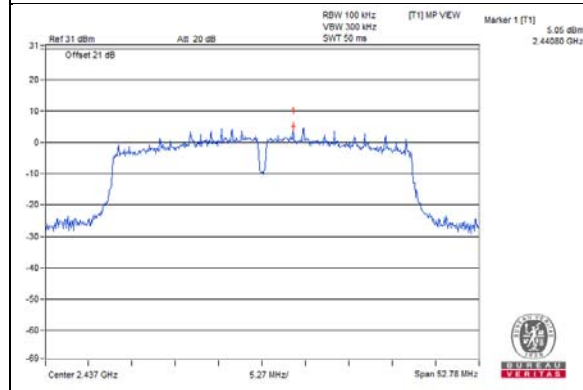


Chain 0


CH 3

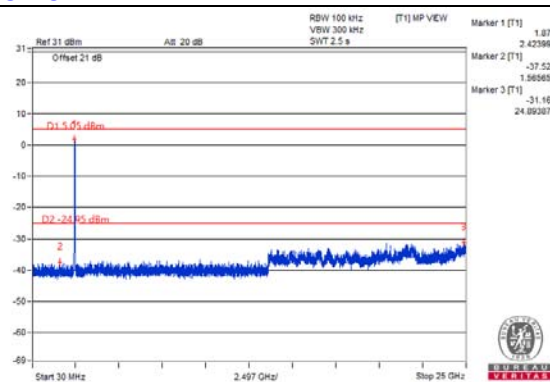


CH 6

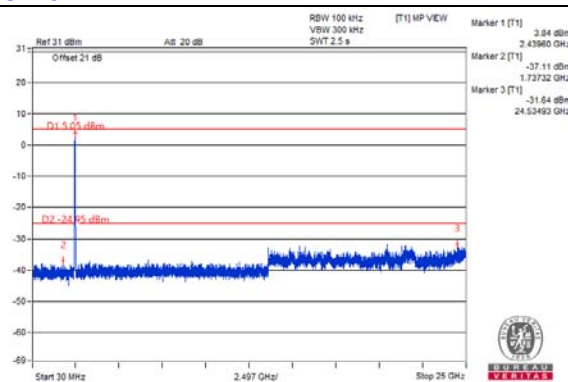


CH 9

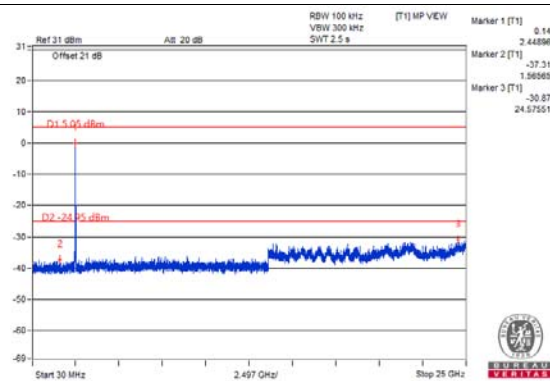

CH 3 Band edge

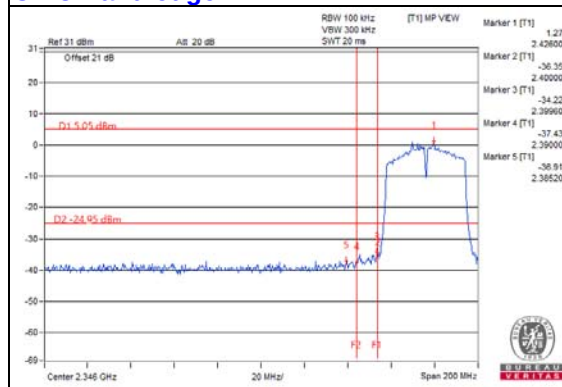


CH 9 Band edge

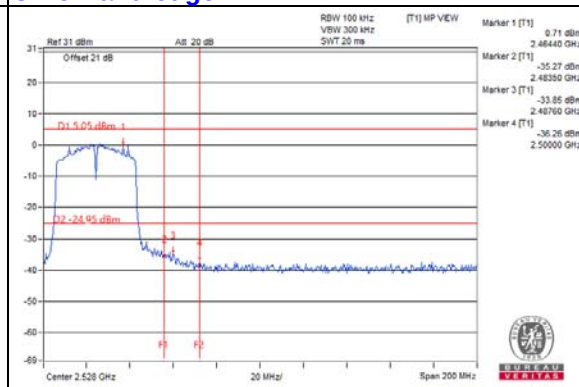


Chain 1


CH 3

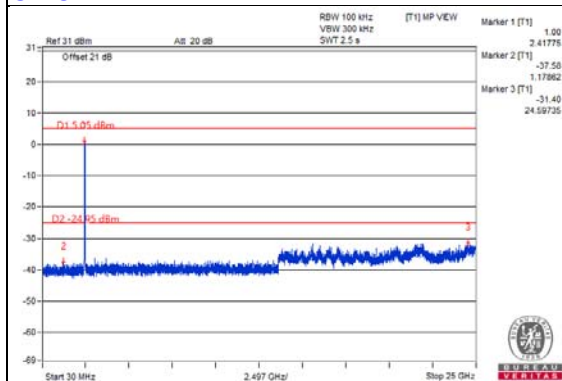

CH 6

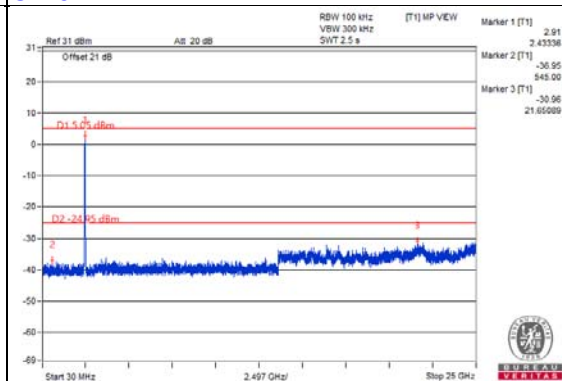


CH 9

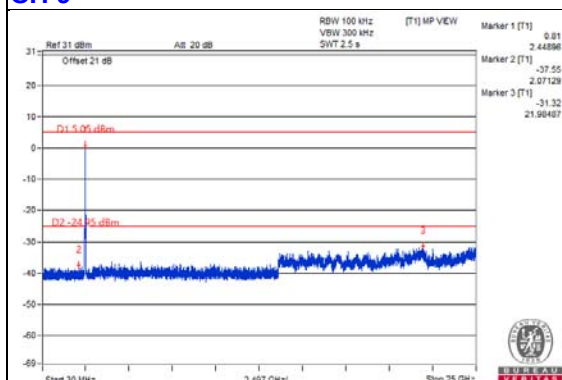


CH 9 Band edge



CH 3 Band edge

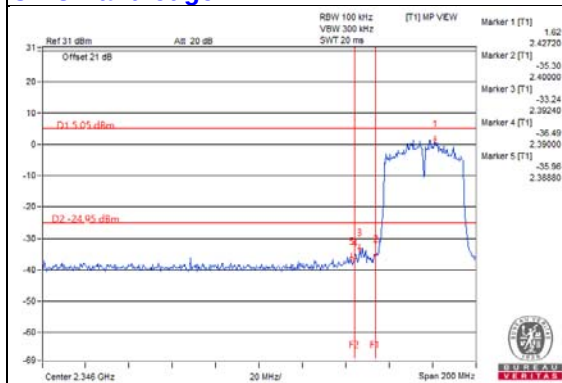


CH 9 Band edge

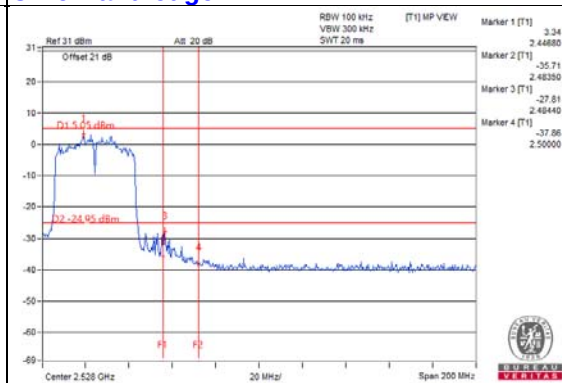


Chain 2


CH 3

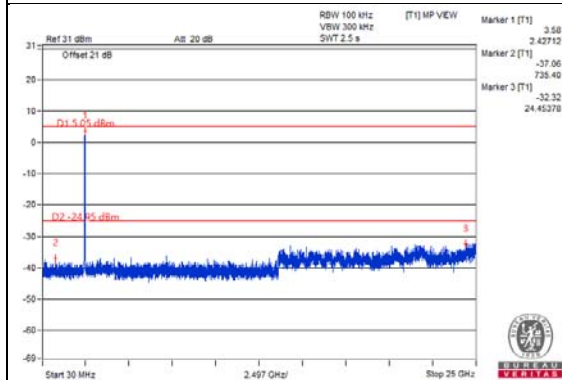

CH 6

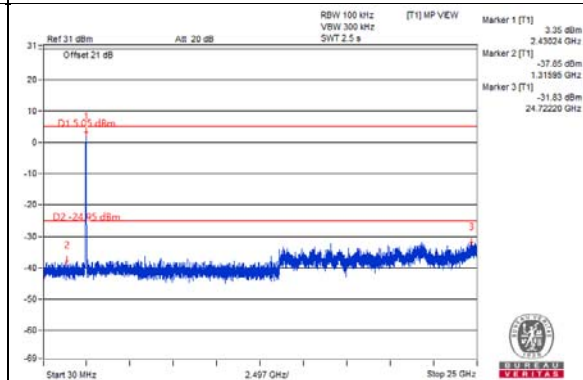


CH 9

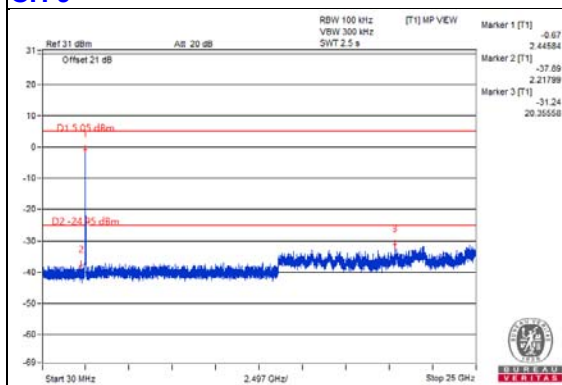


CH 9



CH 3 Band edge

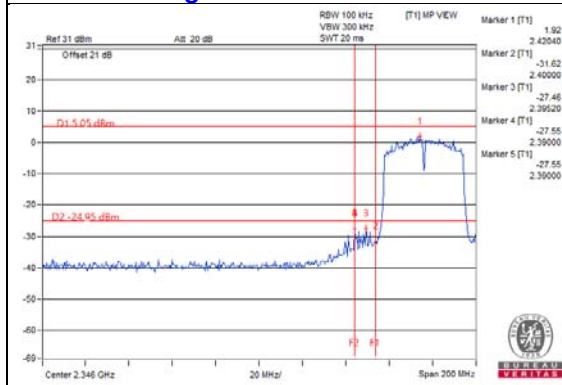


CH 9 Band edge

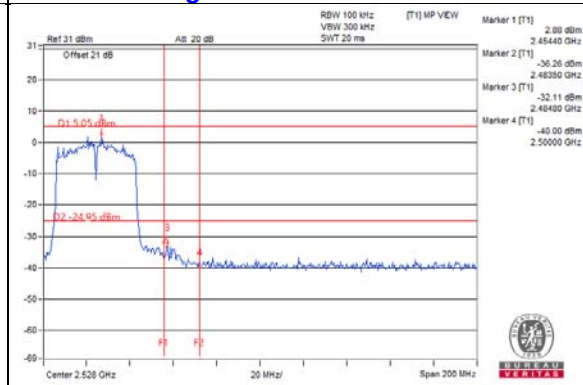


Chain 3



CH 3

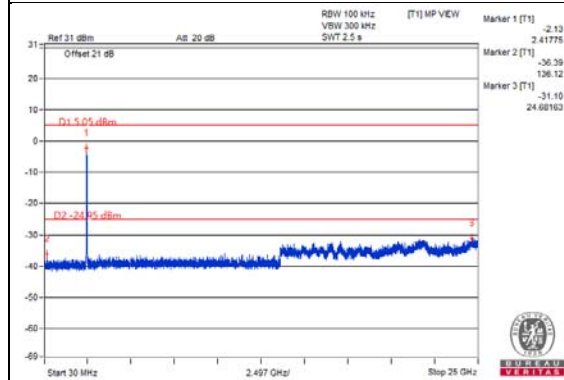


CH 6

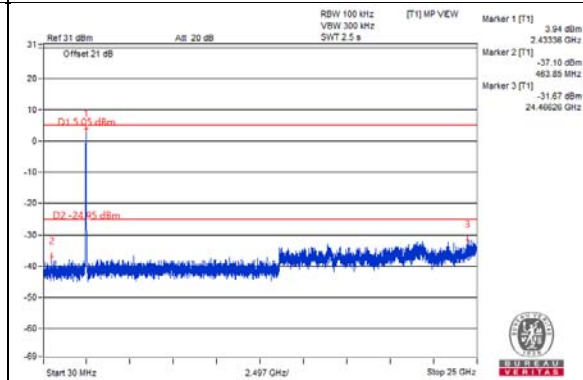


CH 9

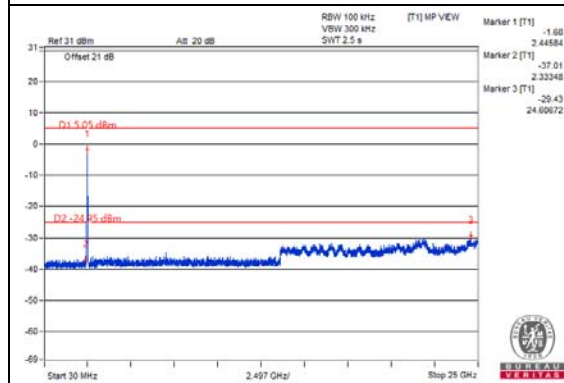

CH 3 Band edge

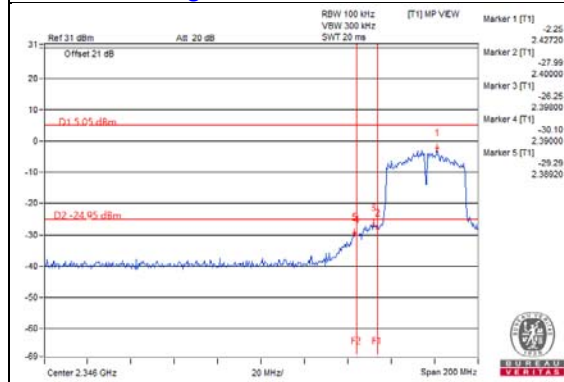

CH 9 Band edge

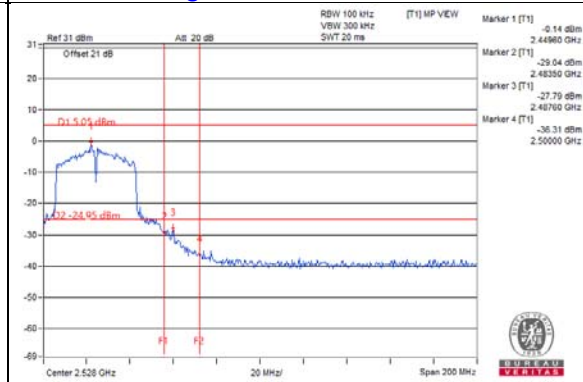


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement


802.11b

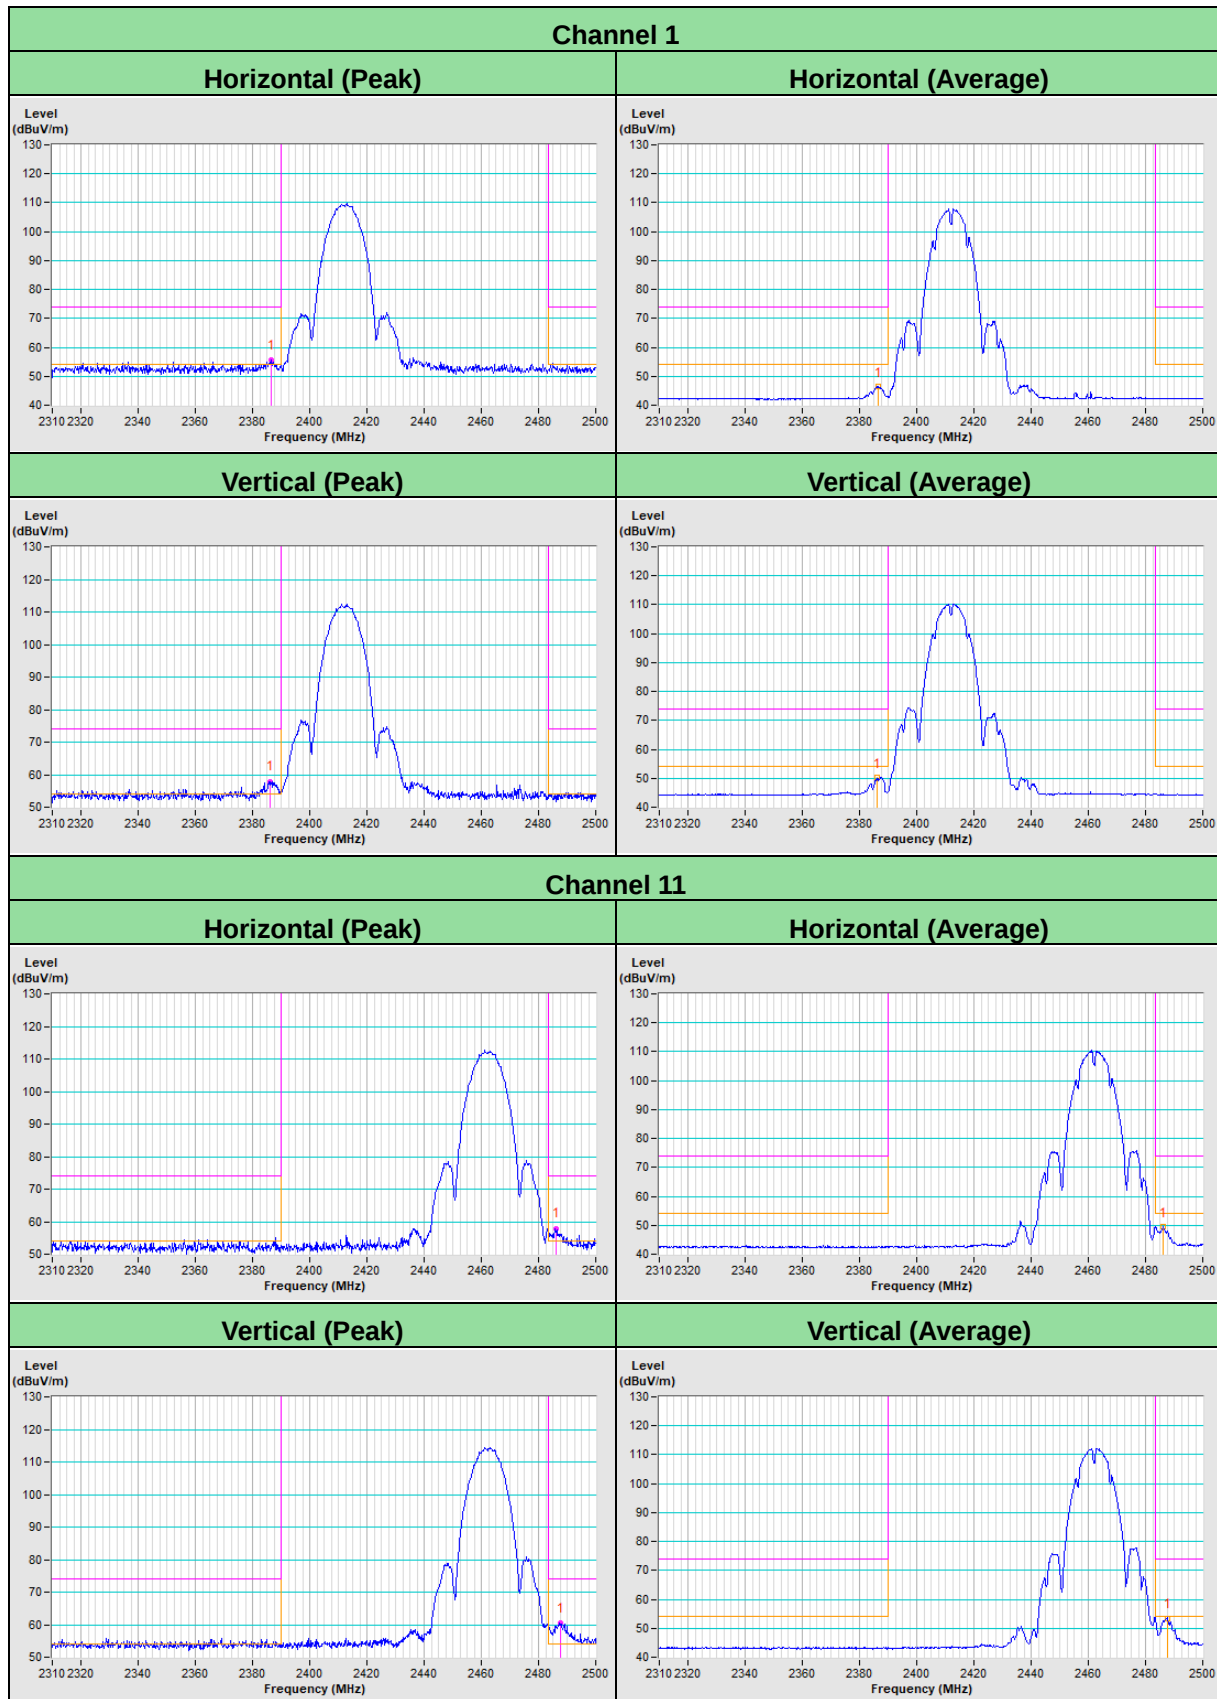


802.11g

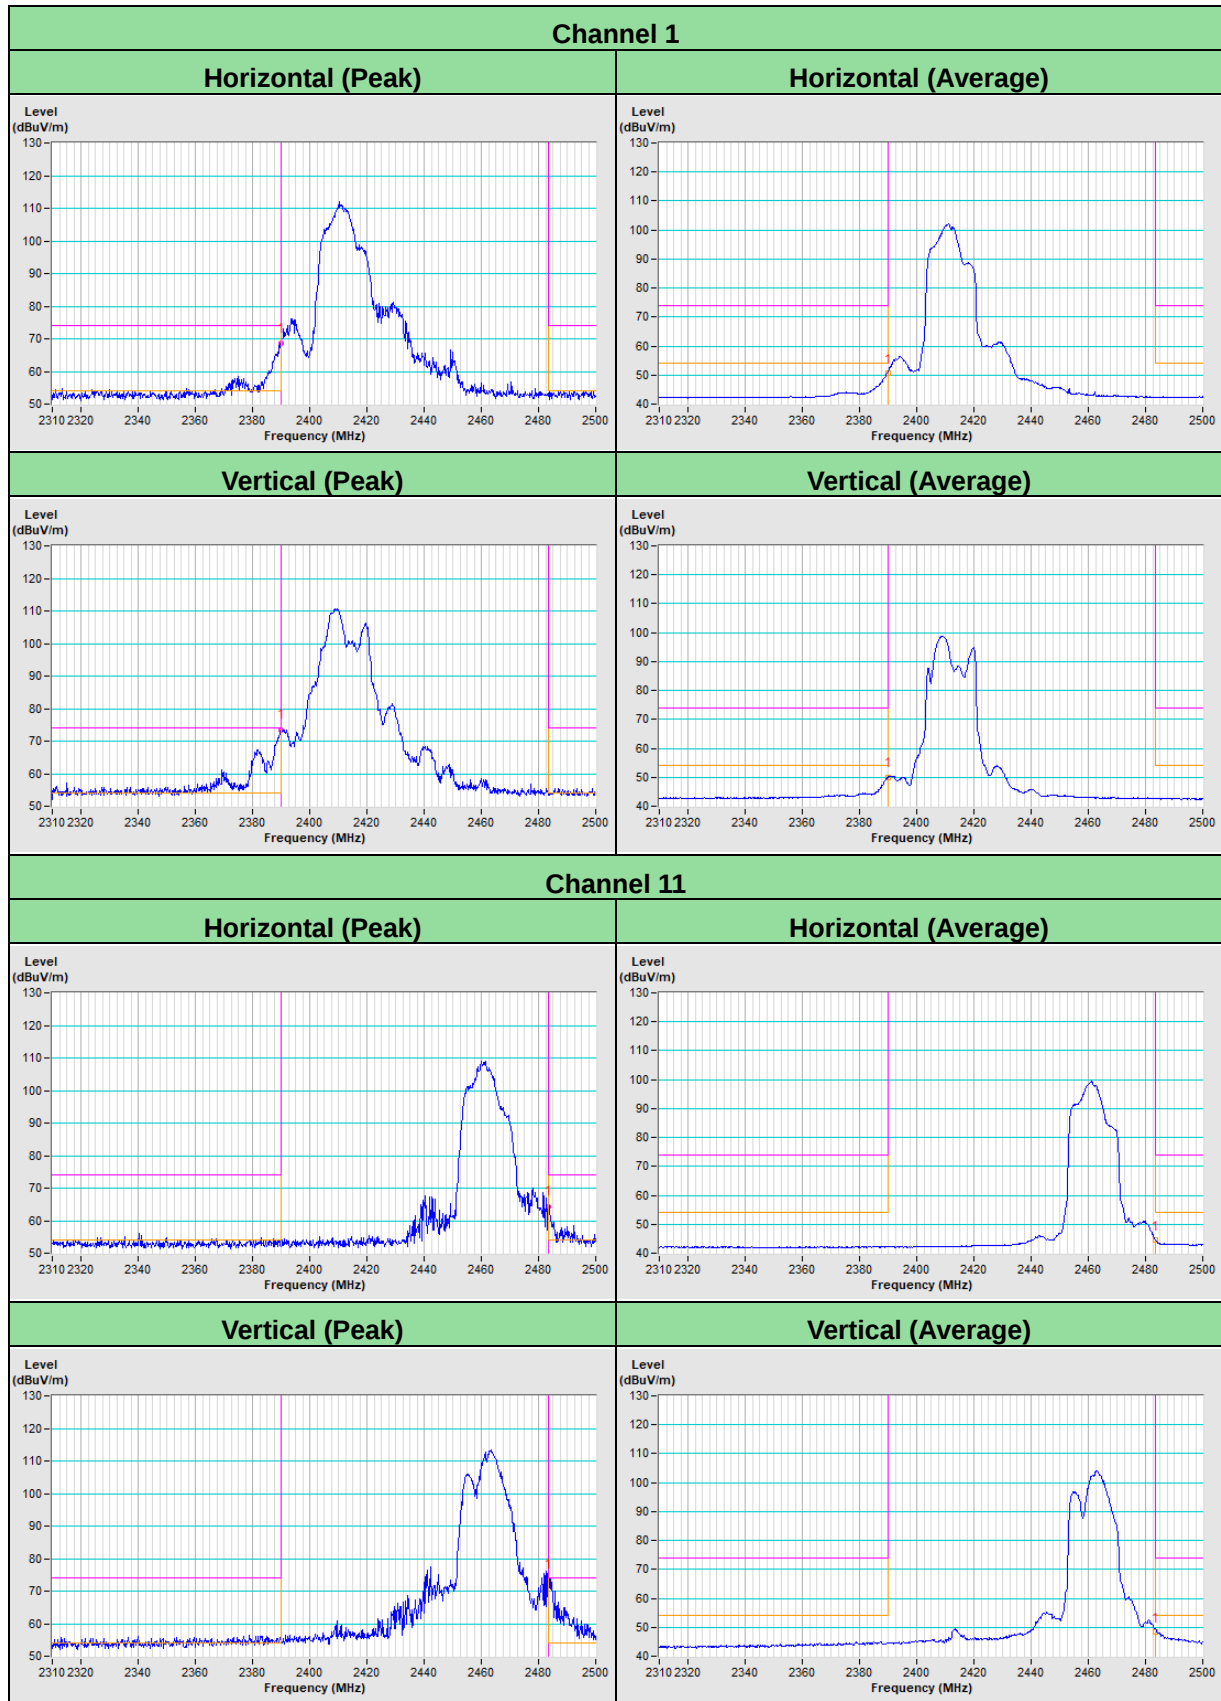

VHT20

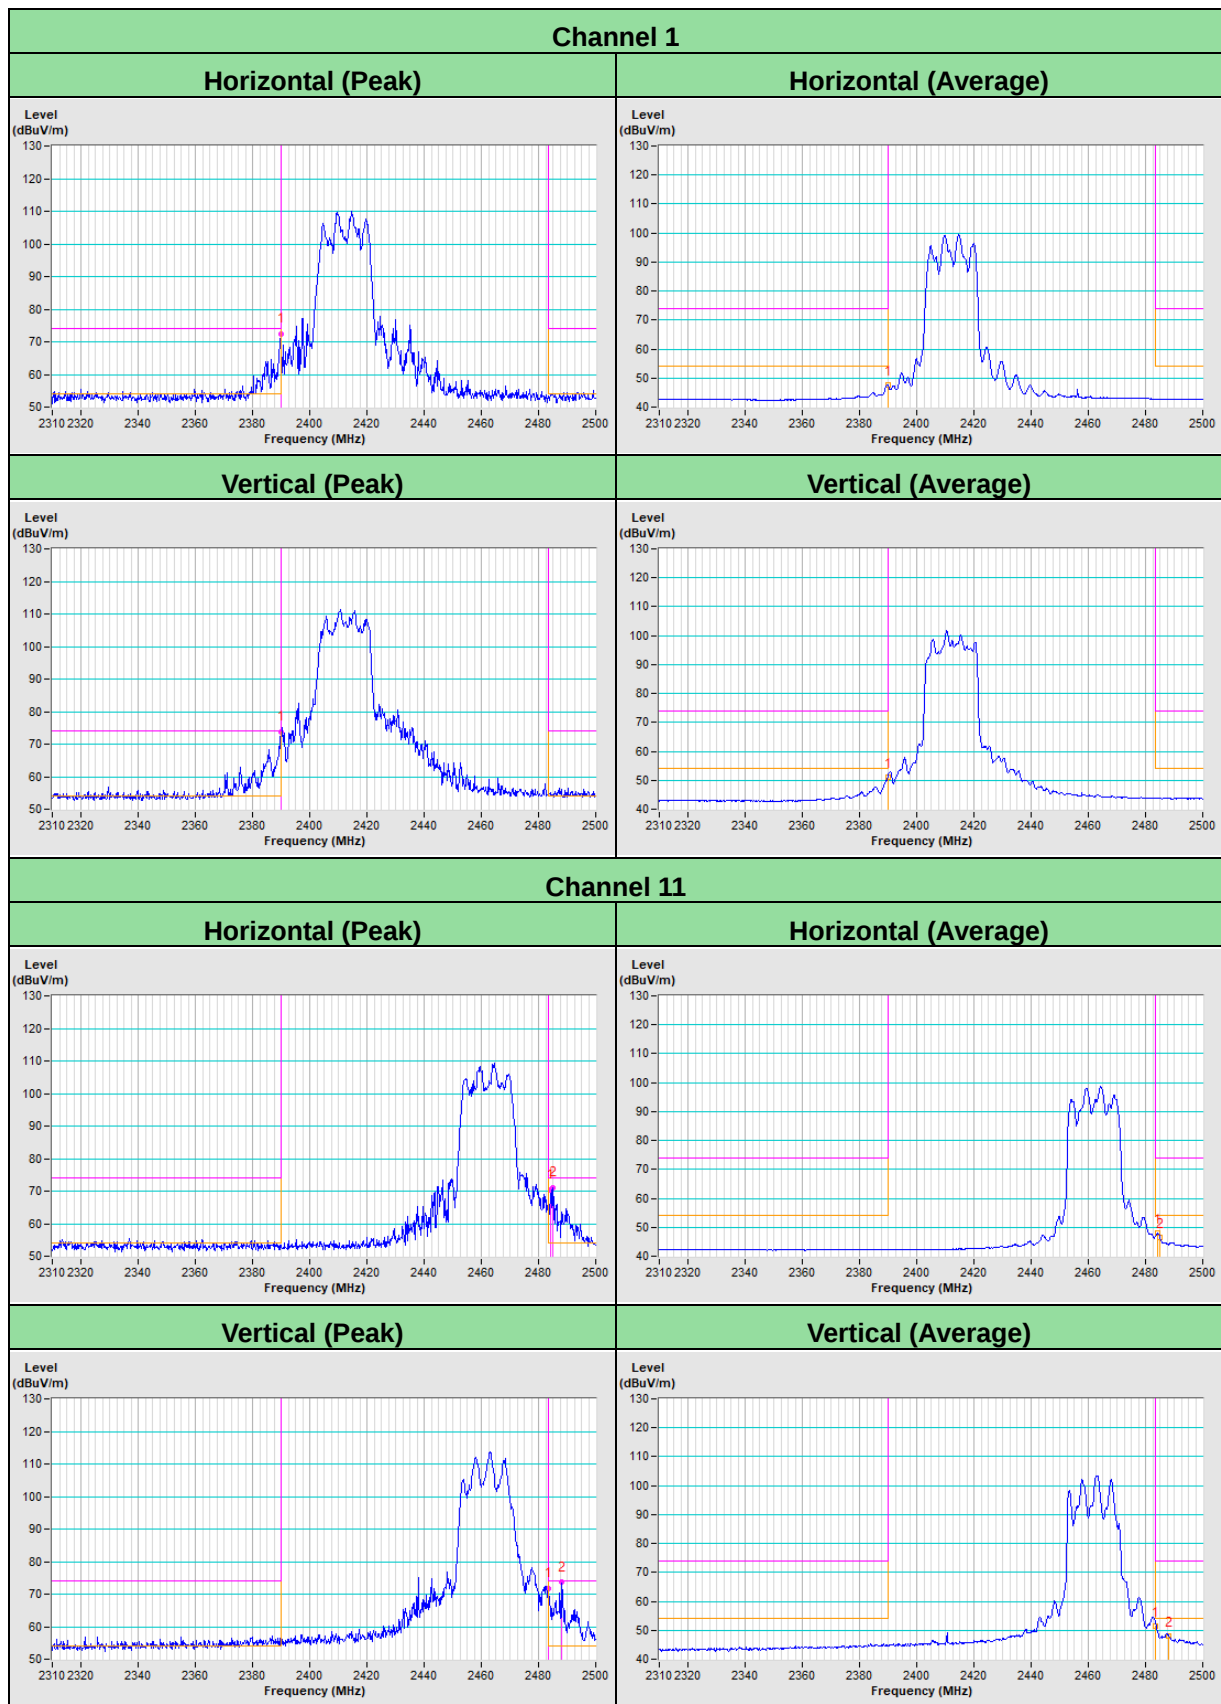

VHT40

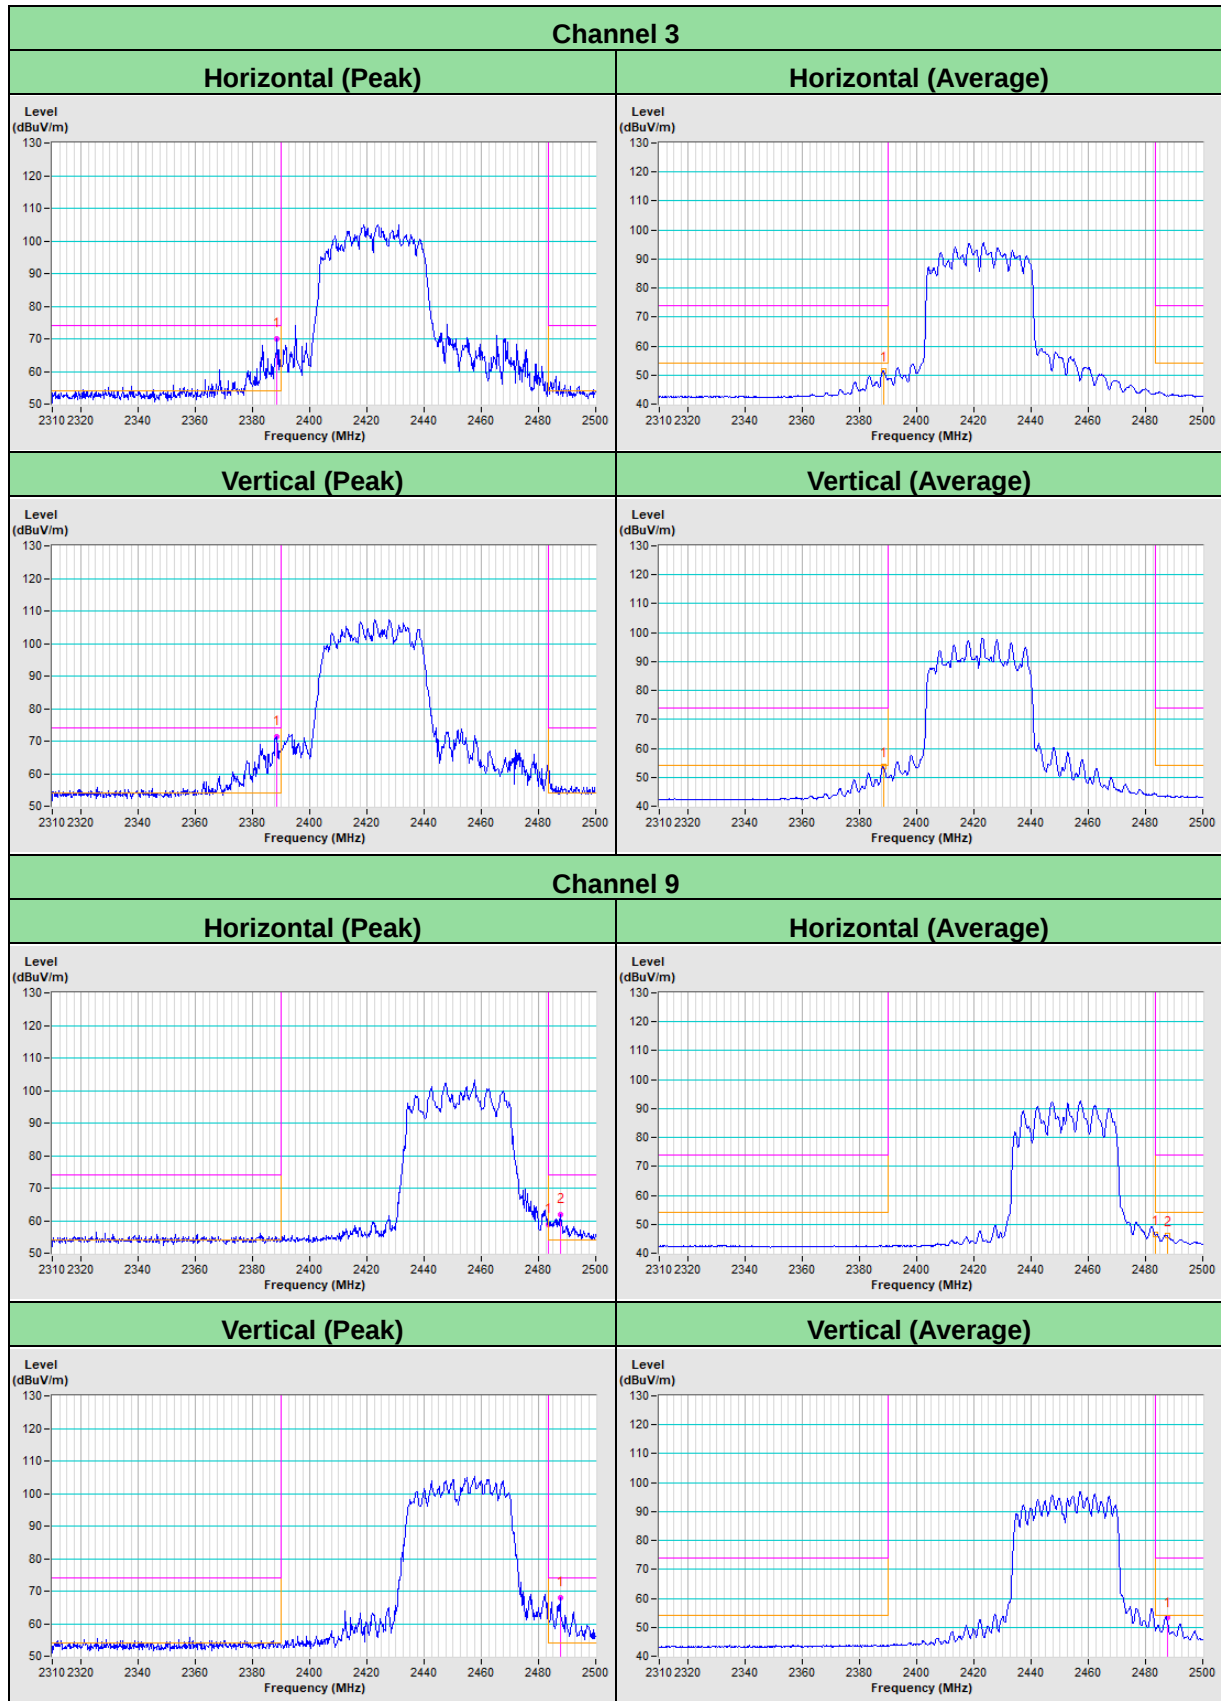

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---