



Test Report Serial Number:

45461999 r1.0

Test Report Date:

24 February 2025

Project Number:

1675

## EMC Test Report - C2PC

Applicant:



4RF Limited  
PO Box 13-506  
Wellington 6440  
New Zealand

FCC ID:

UIPSQ928M141

Product Model Number / HVIN

SQ928M141

Product Name / PMN

Aprisa SR+ 928

In Accordance With:

**FCC 47 CFR Part 101, Subpart C**  
Fixed Microwave Services

Approved By:

---

Ben Hewson, President  
Celltech Labs Inc.  
21-364 Lougheed Rd.  
Kelowna, BC, V1X 7R8  
Canada



Test Lab Certificate: 2470.01



Industry  
Canada

IC Registration 3874A



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

© 2025 Celltech Labs Inc.

**Table of Contents**

<i>1.0 REVISION HISTORY</i> .....	5
<i>2.0 CLIENT AND DUT INFORMATION</i> .....	6
<i>3.0 SCOPE</i> .....	7
<i>4.0 TEST RESULT SUMMARY</i> .....	8
<i>5.0 NORMATIVE REFERENCES</i> .....	9
<i>6.0 FACILITIES AND ACCREDITATIONS</i> .....	10
<i>7.0 CONDUCTED OUTPUT POWER</i> .....	11
<i>8.0 OCCUPIED BANDWIDTH</i> .....	19
<i>9.0 CONDUCTED SPURIOUS EMISSIONS – EMISSIONS MASK</i> .....	33
<i>10.0 CONDUCTED SPURIOUS EMISSIONS TO 10<sup>TH</sup> HARMONIC</i> .....	47
<i>11.0 RADIATED TX SPURIOUS EMISSIONS</i> .....	56
<i>12.0 RADIATED RX SPURIOUS EMISSIONS</i> .....	76
<i>APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT</i> .....	92
<i>APPENDIX B – EQUIPMENT LIST AND CALIBRATION</i> .....	95
<i>APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY</i> .....	96
<i>END OF REPORT</i> .....	96

**Table of Plots**

<i>Plot 7.1 – Conducted Power – 928.5MHz</i> .....	12
<i>Plot 7.2 – Conducted Power – 931.25MHz</i> .....	13
<i>Plot 7.3 – Conducted Power – 941.5MHz</i> .....	14
<i>Plot 7.4 – Conducted Power – 956.5MHz</i> .....	15
<i>Plot 8.1 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, QPSK</i> .....	20
<i>Plot 8.2 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, 16QAM</i> .....	21
<i>Plot 8.3 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, 64QAM</i> .....	22
<i>Plot 8.4 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, 256QAM</i> .....	23
<i>Plot 8.5 – Occupied Bandwidth – 928.5MHz, 25Hz BW, QPSK</i> .....	24
<i>Plot 8.6 – Occupied Bandwidth – 928.5MHz, 25Hz BW, 16QAM</i> .....	25
<i>Plot 8.7 – Occupied Bandwidth – 928.5MHz, 25Hz BW, 64QAM</i> .....	26
<i>Plot 8.8 – Occupied Bandwidth – 928.5MHz, 25Hz BW, 256QAM</i> .....	27
<i>Plot 8.9 – Occupied Bandwidth – 928.5MHz, 50Hz BW, QPSK</i> .....	28
<i>Plot 8.10 – Occupied Bandwidth – 928.5MHz, 50Hz BW, 16QAM</i> .....	29
<i>Plot 8.11 – Occupied Bandwidth – 928.5MHz, 50Hz BW, 64QAM</i> .....	30
<i>Plot 8.12 – Occupied Bandwidth – 928.5MHz, 50Hz BW, 256QAM</i> .....	31
<i>Plot 9.1 – Emissions Mask – 942.75MHz, 12.5kHz BW, QPSK</i> .....	34
<i>Plot 9.2 – Emissions Mask – 942.75MHz, 12.5kHz BW, 16QAM</i> .....	35
<i>Plot 9.3 – Emissions Mask – 942.75MHz, 12.5kHz BW, 64QAM</i> .....	36
<i>Plot 9.4 – Emissions Mask – 942.75MHz, 12.5kHz BW, 256QAM</i> .....	37
<i>Plot 9.5 – Emissions Mask – 942.75MHz, 25kHz BW, QPSK</i> .....	38
<i>Plot 9.6 – Emissions Mask – 942.75MHz, 25kHz BW, 16QAM</i> .....	39
<i>Plot 9.7 – Emissions Mask – 942.75MHz, 25kHz BW, 64QAM</i> .....	40
<i>Plot 9.8 – Emissions Mask – 942.75MHz, 25kHz BW, 256QAM</i> .....	41
<i>Plot 9.9 – Emissions Mask – 942.75MHz, 50kHz BW, QPSK</i> .....	42
<i>Plot 9.10 – Emissions Mask – 942.75MHz, 50kHz BW, 16QAM</i> .....	43
<i>Plot 9.11 – Emissions Mask – 942.75MHz, 50kHz BW, 64QAM</i> .....	44
<i>Plot 9.12 – Emissions Mask – 942.75MHz, 50kHz BW, 256QAM</i> .....	45
<i>Plot 10.1 – Conducted Spurious Emissions 942.75MHz, 30-200MHz</i> .....	48
<i>Plot 10.2 – Conducted Spurious Emissions 942.75MHz, 200-400MHz</i> .....	49
<i>Plot 10.3 – Conducted Spurious Emissions 942.75MHz, 400-600MHz</i> .....	50
<i>Plot 10.4 – Conducted Spurious Emissions 942.75MHz, 600-800MHz</i> .....	51
<i>Plot 10.4 – Conducted Spurious Emissions 942.75MHz, 800-1000MHz</i> .....	52
<i>Plot 10.5 – Conducted Spurious Emissions 942.75MHz, 1 – 3GHz</i> .....	53
<i>Plot 10.6 – Conducted Spurious Emissions 942.75MHz, 3 – 10GHz</i> .....	54
<i>Plot 11.1 – Radiated Tx Emissions, 929.5MHz, Horizontal, 30-200MHz</i> .....	57
<i>Plot 11.2 – Radiated Tx Emissions, 929.5MHz, Horizontal, 200-400MHz</i> .....	58
<i>Plot 11.3 – Radiated Tx Emissions, 929.5MHz, Horizontal, 400-600MHz</i> .....	59
<i>Plot 11.4 – Radiated Tx Emissions, 929.5MHz, Horizontal, 600-800MHz</i> .....	60
<i>Plot 11.5 – Radiated Tx Emissions, 929.5MHz, Horizontal, 800-1000MHz</i> .....	61
<i>Plot 11.6 – Radiated Tx Emissions, 929.5MHz, Horizontal, 1-3GHz</i> .....	62
<i>Plot 11.7 – Radiated Tx Emissions, 929.5MHz, Horizontal, 3-10GHz</i> .....	63
<i>Plot 11.8 – Radiated Tx Emissions, 929.5MHz, Horizontal, 2<sup>nd</sup> Harmonic</i> .....	64
<i>Plot 11.9 – Radiated Tx Emissions, 929.5MHz, Horizontal, 3<sup>rd</sup> Harmonic</i> .....	65
<i>Plot 11.10 – Radiated Tx Emissions, 929.5MHz, Vertical, 30-200MHz</i> .....	66
<i>Plot 11.11 – Radiated Tx Emissions, 929.5MHz, Vertical, 200-400MHz</i> .....	67
<i>Plot 11.12 – Radiated Tx Emissions, 929.5MHz, Vertical, 400-600MHz</i> .....	68
<i>Plot 11.13 – Radiated Tx Emissions, 929.5MHz, Vertical, 600-800MHz</i> .....	69
<i>Plot 11.14 – Radiated Tx Emissions, 929.5MHz, Vertical, 800-1000MHz</i> .....	70
<i>Plot 11.15 – Radiated Tx Emissions, 929.5MHz, Vertical, 1-3GHz</i> .....	71
<i>Plot 11.16 – Radiated Tx Emissions, 929.5MHz, Vertical, 3-10GHz</i> .....	72
<i>Plot 11.17 – Radiated Tx Emissions, 929.5MHz, Vertical, 2<sup>nd</sup> Harmonic</i> .....	73
<i>Plot 11.18 – Radiated Tx Emissions, 929.5MHz, Vertical, 3<sup>rd</sup> Harmonic</i> .....	74

<i>Plot 12.1 – Radiated Rx Emissions, Horizontal, 30-200MHz.....</i>	<i>77</i>
<i>Plot 12.2 – Radiated Rx Emissions, Horizontal, 200-400MHz.....</i>	<i>78</i>
<i>Plot 12.3 – Radiated Rx Emissions, Horizontal, 400-600MHz.....</i>	<i>79</i>
<i>Plot 12.4 – Radiated Rx Emissions, Horizontal, 600-800MHz.....</i>	<i>80</i>
<i>Plot 12.5 – Radiated Rx Emissions, Horizontal, 800-1000MHz.....</i>	<i>81</i>
<i>Plot 12.6 – Radiated Rx Emissions, Horizontal, 1-3GHz.....</i>	<i>82</i>
<i>Plot 12.7 – Radiated Rx Emissions, Horizontal, 3-10GHz.....</i>	<i>83</i>
<i>Plot 12.8 – Radiated Rx Emissions, Vertical, 30-200MHz.....</i>	<i>84</i>
<i>Plot 12.9 – Radiated Rx Emissions, Vertical, 200-400MHz.....</i>	<i>85</i>
<i>Plot 12.10 – Radiated Rx Emissions, Vertical, 400-600MHz.....</i>	<i>86</i>
<i>Plot 12.11 – Radiated Rx Emissions, Vertical, 600-800MHz.....</i>	<i>87</i>
<i>Plot 12.12 – Radiated Rx Emissions, Vertical, 800-1000MHz.....</i>	<i>88</i>
<i>Plot 12.13 – Radiated Rx Emissions, Vertical, 1-3GHz .....</i>	<i>89</i>
<i>Plot 12.14 – Radiated Rx Emissions, Vertical, 3-10GHz .....</i>	<i>90</i>

## Table of Tables

<i>Table 7.1 - Summary of Conduct Power Measurements.....</i>	<i>16</i>
<i>Table 7.2 – Maximum Permissible Antenna Gain at Maximum Output Power.....</i>	<i>17</i>
<i>Table 7.3 – Maximum Permissible Output Power at Maximum Antenna Gain.....</i>	<i>18</i>
<i>Table 8.1 - Summary of Occupied Bandwidth Measurements .....</i>	<i>32</i>
<i>Table 9.1 - Summary of Emissions Mask Measurements .....</i>	<i>46</i>
<i>Table 10 - Summary of Conducted Spurious Emissions Measurements .....</i>	<i>55</i>
<i>Table 11.1 – Summary of Radiated Tx Emissions Measurements.....</i>	<i>75</i>
<i>Table 12.1 – Summary of Radiated Rx Emissions Measurements .....</i>	<i>91</i>
<i>Table A.1 – Setup - Conducted Measurements Equipment .....</i>	<i>92</i>
<i>Table A.2 – Setup - Radiated Emissions Equipment.....</i>	<i>93</i>

## Table of Figures

<i>Figure A.1 – Test Setup Conducted Measurements.....</i>	<i>92</i>
<i>Figure A.2 – Test Setup Radiated Measurements 30MHz – 1GHz.....</i>	<i>93</i>
<i>Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution.....</i>	<i>94</i>
<i>Figure A.4 – Test Setup Radiated Measurements 1 – 18GHz, .....</i>	<i>94</i>

**1.0 REVISION HISTORY**

Revision History				
Samples Tested By:		Art Voss, P.Eng.	Date(s) of Evaluation:	
Report Prepared By:		Art Voss, P.Eng.	Report Reviewed By:	
Report Revision	Description of Revision		Revised Section	Revised By
0.1	Draft		n/a	Art Voss
1.0	Initial Release		n/a	Art Voss
				24 February 2025

**2.0 CLIENT AND DUT INFORMATION**

Client Information	
<b>Applicant Name (FCC)</b>	4RF Limited
<b>Applicant Address (FCC)</b>	PO Box 13-506 Wellington 6440, New Zealand
DUT Information	
<b>Device Identifier(s):</b>	<b>FCC ID:</b> <b>UIPSQ928M141</b>
<b>Device Type:</b>	Digital Transceiver
<b>Device Model(s) / HVIN:</b>	SQ928M141
<b>Device Marketing Name / PMN:</b>	Aprisa SR+ 928
<b>Test Sample Serial No.:</b>	R5310007031
<b>Equipment Class (FCC):</b>	TNB - Licensed Non-Broadcast Station Transmitter
<b>Transmit Frequency Range:</b>	Part 24: 901-902MHz, 930-931MHz, 940-941MHz Part 90: 896-901MHz, 929-930MHz, 935-940MHz Part 101: 928-929MHz, 932-932.5MHz, 932.5-940MHz Part 101: 941-941.5MHz, 941.5-944MHz, 952-960MHz
<b>Test Channels:</b>	Programmable
<b>Manuf. Max. Rated Output Power:</b>	10dBm (10mW) to 37dBm (5W), Field-Programmable
<b>Manuf. Max. Rated BW:</b>	Part 24. 12.5kHz, 25kHz, 50kHz, 100kHz Part 90. 12.5kHz, 25kHz Part 101. 12.5kHz, 25kHz, 50kHz
<b>Antenna Type and Gain:</b>	Max: 28dBi (25.85dBd)
<b>Modulation:</b>	QPSK, 16QAM, 64QAM, 256QAM
<b>Mode:</b>	Half Duplex
<b>DUT Power Source:</b>	10 - 30VDC
<b>DUT Dimensions [HxWxD] (mm)</b>	H x W x D: 40mm x 140mm x 210mm.
<b>Deviation(s) from standard/procedure:</b>	None
<b>Modification of DUT:</b>	None

**\*\*\* NOTE \*\*\***

The Aprisa SR+ must be professionally installed by trained and qualified installers. The installer must ensure regulatory compliance to the requirements and standards cited herein and to the local requirements in place at the time of installation. When the maximum permissible Effective Radiated Power (ERP) or Equivalent Isotropic Radiated Power (EIPR) is regulated, knowledge of the regulation, antenna gain and feeder cable loss must be known by the installer prior to adjusting the Maximum Transmit Output Power of the Aprisa SR+.

### 3.0 SCOPE

**Preface:**

This Certification Report was prepared on behalf of:

**4RF Limited**

(the 'Applicant'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the 'Rules'). The scope of this investigation was limited to only the equipment, devices and accessories (the 'Equipment') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

**Device:**

The Aprisa SR+ 928, FCC ID: UIPSQ928M141, is a digital Land Mobile and PCS transceiver. The transceiver synthesizers are being replaced and are not pin-to-pin compatible. All other aspects of the transmitter with regards to output power, bands of operation, bandwidths and modulations have not been changed from those in the previous filings.

**Requirement:**

As per FCC KDB 388624 D02v18r07, a C2PC (C2PCPX) using the procedures of FCC KDB 178919 (Notificationb 202109-001) is being sought.

**Application:**

This is an application for a C2PC.

**Scope:**

The scope of this investigation is limited to the evaluation and reporting of the wanted and spurious emissions in accordance with the rule parts cited in Normative References section of this report.

#### 4.0 TEST RESULT SUMMARY

TEST SUMMARY					
Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Test Date	Result
<b>7.0</b>	Conducted Power (Fundamental)	ANSI C63.26-2015	§101.113	3 Dec 2024	Pass
<b>8.0</b>	Occupied Bandwidth	ANSI C63.26-2015	§101.109	6 Dec 2024	Pass
<b>9.0</b>	Emissions Mask	ANSI C63.26-2015	§101.111	7,8 Dec 2024 6 Feb 2025	Pass
<b>10.0</b>	Antenna Port Conducted Spurious	ANSI C63.26-2015	§101.111	11 Dec 2024	Pass
<b>11.0</b>	Radiated Tx Spurious Emissions	ANSI C63.26-2015	§101.111	29 Jan 2025	Pass
<b>12.0</b>	Radiated Rx Spurious Emissions	ANSI C63.4-2014	§15B	29 Jan 2025	Pass

Test Station Day Log					
Date	Ambient Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)	Test Station	Tests Performed Section(s)
3 Dec 2024	23.0	23	103.4	EMC	7
4 Dec 2024	23.6	25	103.3	EMC	8
5 Dec 2024	21.6	27	103.2	EMC	8
6 Dec 2024	22.5	25	103.2	EMC	9
7 Dec 2024	22.8	26	103.3	EMC	9
8 Dec 2024	22.1	26	103.1	EMC	9
11 Dec 2024	22.8	26	102.8	EMC	10
29 Jan 2025	-3.0	68	102.3	OATS	11, 12
6 Feb 2025	22.1	18	102.2	EMC	9

**EMC** - EMC Test Bench

**SAC** - Semi-Anechoic Chamber

**OATS** - Open Area Test Site

**TC** - Temperature Chamber


**LISN** - LISN Test Area

**ESD** - ESD Test Bench

**IMM** - Immunity Test Area

**RI** - Radiated Immunity Chamber

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.  
Technical Manager  
Celltech Labs Inc.

28 January 2025

Date



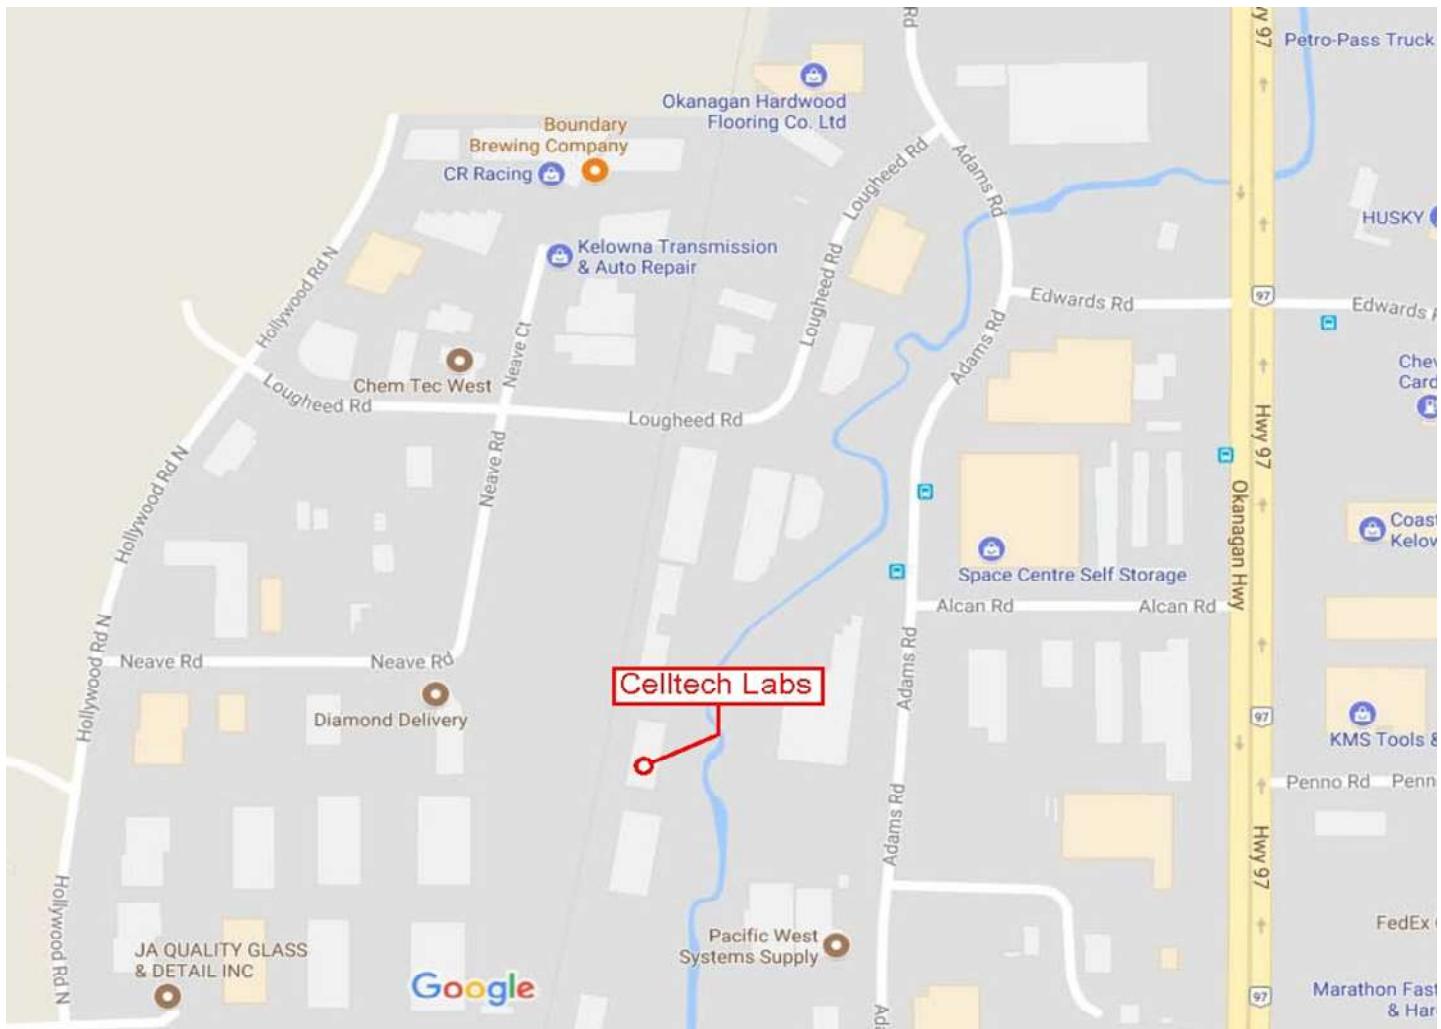
## 5.0 NORMATIVE REFERENCES

<b>Normative References</b>	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
ANSI C63.4-2014	American National Standard of Procedures for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electric and Electronic Equipment in the Range of 9kHz to 40GHz
ANSI C63.4A-2017	American National Standard of Procedures for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electric and Electronic Equipment in the Range of 9kHz to 40GHz Amendment 1: Test Site Validation
ANSI C63.26-2015	American National Standard of Procedures for Compliance Testing of Transmitters Used in Licensed Radio Services
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
CFR	Code of Federal Regulations Title 47: Telecommunication Part 101: Fixed Microwave Services Subpart C: Technical Standards

## 6.0 FACILITIES AND ACCREDITATIONS

### Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874 and Industry Canada under Test Site File Number IC 3874A. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.



## 7.0 CONDUCTED OUTPUT POWER

### Test Procedure

Normative References	FCC 47 CFR §101.113
	ANSI C63.26

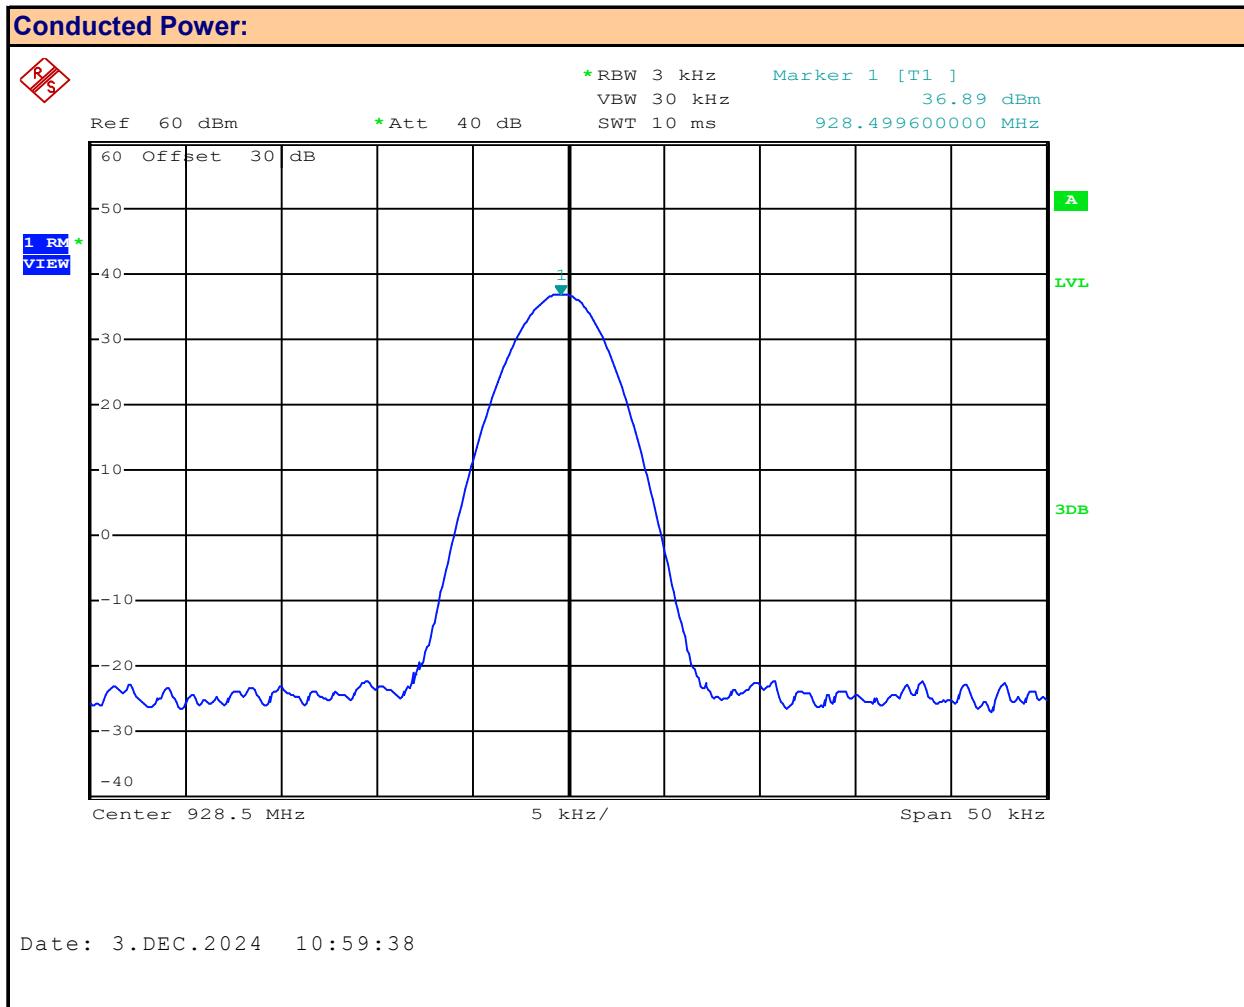
### Requirement / Limits

47 CFR §101.113	<b>§101.113 Transmitter Power Limitations</b>
	a) In no event shall the average equivalent isotropically radiated power (EIRP), as referenced to an isotropic radiator, exceed the values specified below.
	<b>Maximum Allowable EIRP (dBW)</b>
	902-929MHz: +17
	932-932.5MHz :+17
	932.5-935MHz: +40
	941-941.5MHz :+30

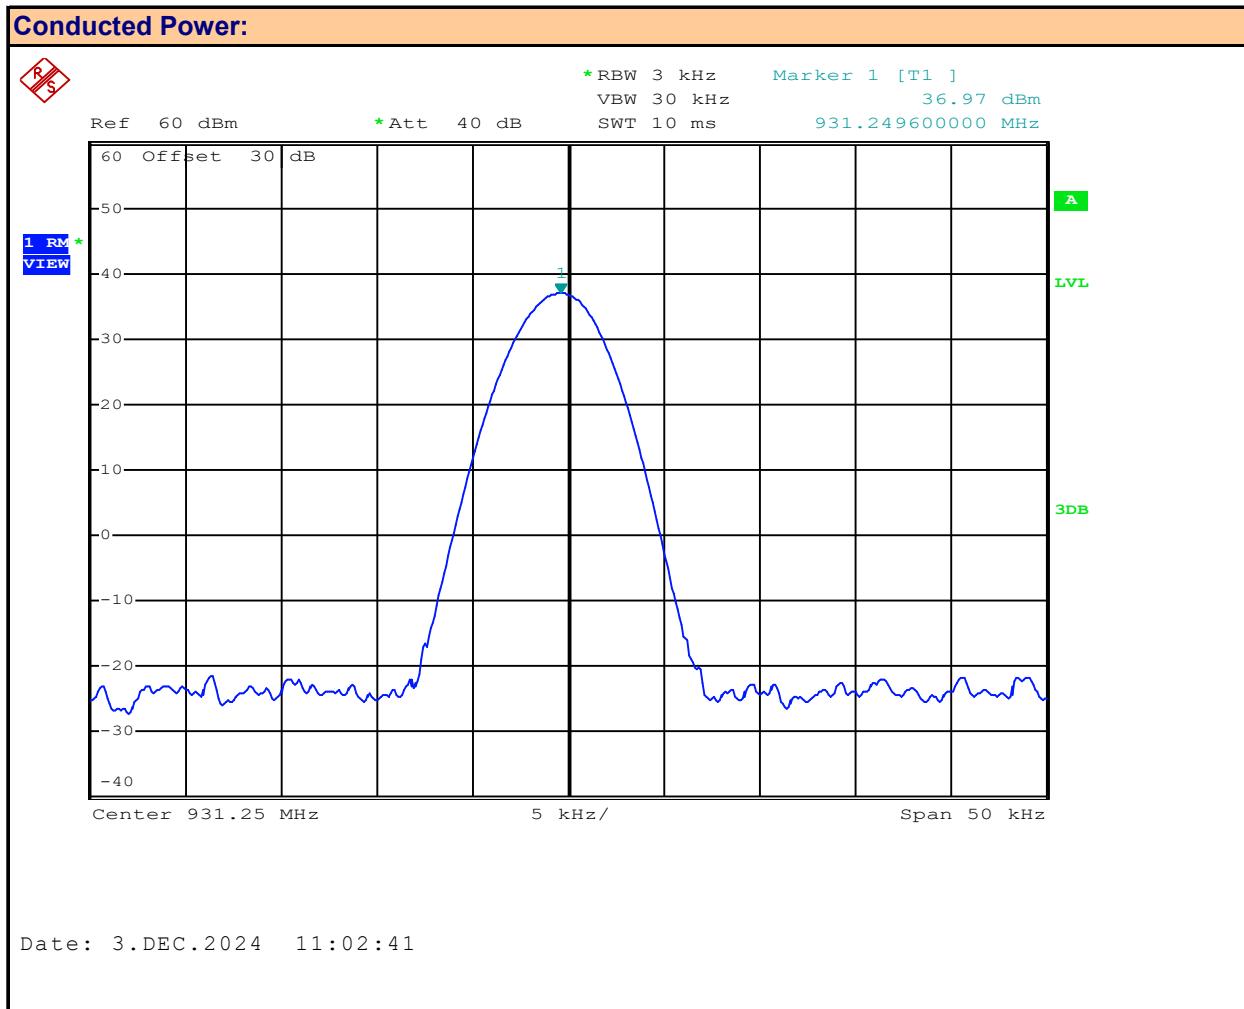
Test Setup	Appendix A - Figure A.1
------------	-------------------------

### Measurement Procedure

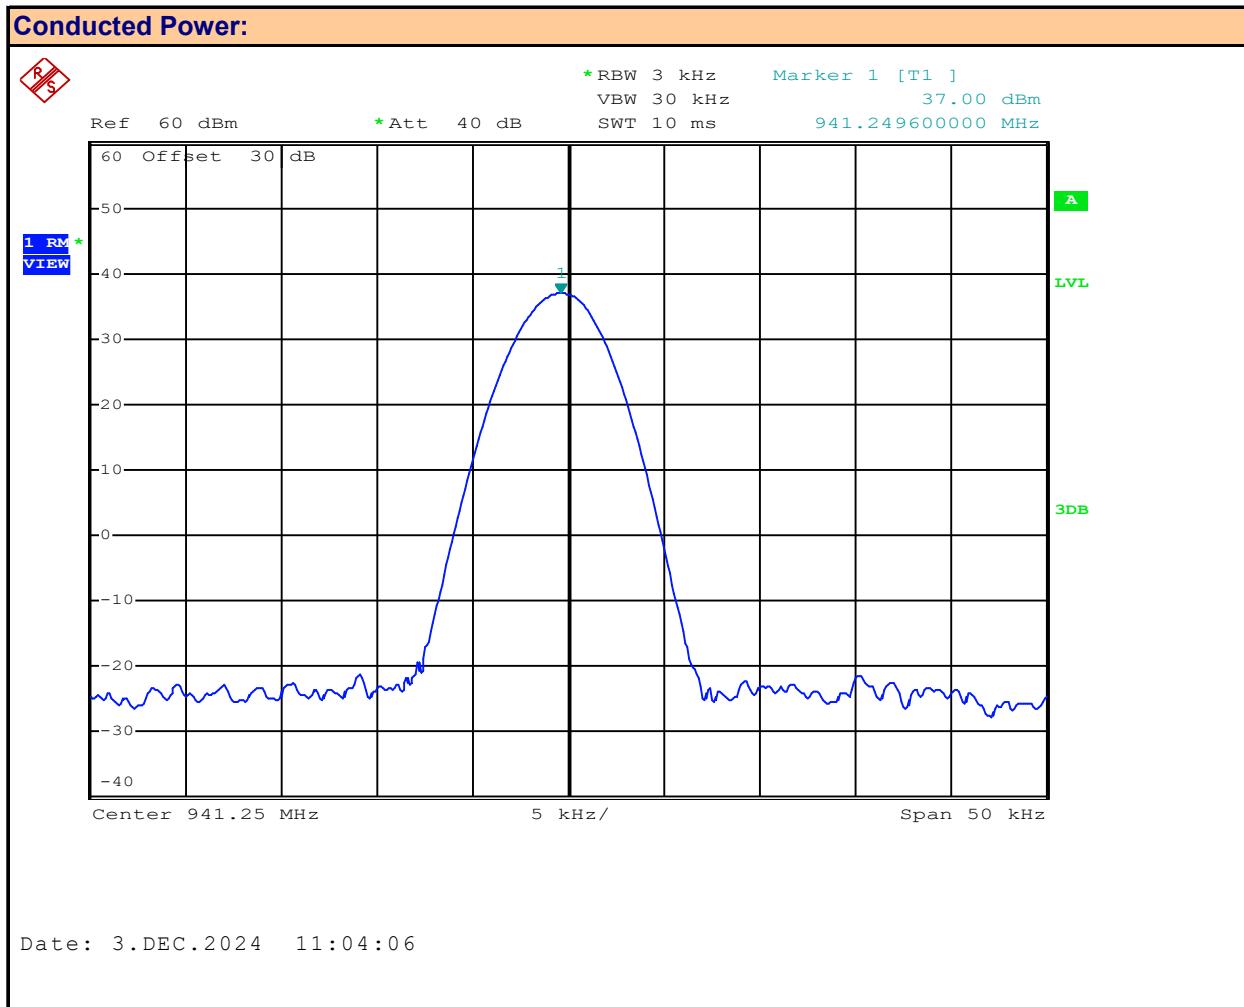
The DUT was connected to the SA as specified above via a 30dB attenuator. The DUT was configured to transmit unmodulated at its highest output power. The Conducted Power was measured using the instrument's Marker Peak function and recorded.

**Plot 7.1 – Conducted Power – 928.5MHz**


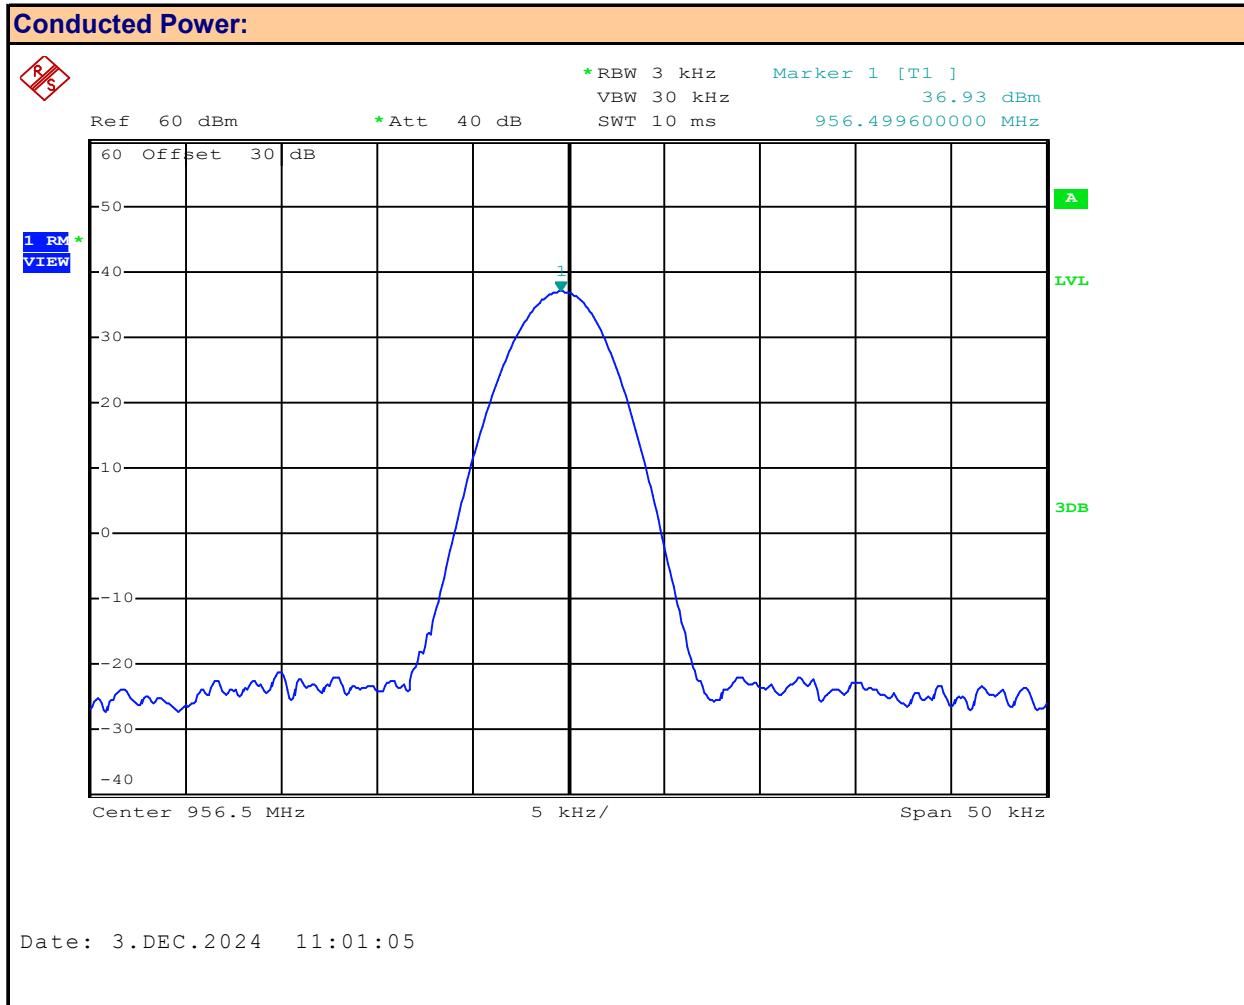
Channel Frequency: **928.5** MHz  
 Modulation: **CW**  
 Measured Channel Power: **36.89** dBm

**Plot 7.2 – Conducted Power – 931.25MHz**


Channel Frequency: **931.25** MHz  
 Modulation: **CW**  
 Measured Channel Power: **36.97** dBm

**Plot 7.3 – Conducted Power – 941.5MHz**


Channel Frequency: **941.5** MHz  
 Modulation: **CW**  
 Measured Channel Power: **37** dBm

**Plot 7.4 – Conducted Power – 956.5MHz**


Channel Frequency: **956.5** MHz  
 Modulation: **CW**  
 Measured Channel Power: **36.93** dBm

**Table 7.1 - Summary of Conduct Power Measurements**

<b>Conducted Power Measurement Results: FCC Part 101</b>							
Channel Frequency (MHz)	Channel Bandwidth (kHz)	Modulation	Measured Power [P <sub>meas</sub> ] (dBm)	Antenna Gain [G] (dBi)	EIRP Power [P <sub>eirp</sub> ] (dBm)	EIRP Limit [P <sub>lim</sub> ] (dBm)	Margin (dB)
928.5	n/a	CW	36.89	3.00	39.89	47	7.1
931.3	n/a	CW	36.97		39.97	47	7.0
941.5	n/a	CW	37.00		40.00	60	20.0
956.5	n/a	CW	36.93		39.93	70	30.1
						<b>Result:</b>	<b>Complies</b>

$$\text{EIRP } P_{\text{eirp}} = P_{\text{meas}} + G(\text{dBi})$$

$$\text{Conversion dBW to dBm} = \text{dBW} + 30$$

$$\text{Conversion dBd to dBi} = \text{dBd} + 2.15$$

$$\text{Conducted Margin} = P_{\text{lim}} - P_{\text{eirp}}$$

<b>Conducted Power Measurement Results: ISED RSS-119</b>							
Channel Frequency (MHz)	Channel Bandwidth (kHz)	Modulation	Measured Power [P <sub>Meas</sub> ] (dBm)	Antenna Gain [G] (dBd)	ERP Power [P <sub>erp</sub> ] (dBm)	Limit [P <sub>Lim</sub> ] (dBm)	Margin (dB)
928.5	n/a	CW	36.89	0.85	39.89	50.4	10.5
931.3	n/a	CW	36.97		39.97	50.4	10.4
941.5	n/a	CW	37.00		40.00	50.4	10.4
956.5	n/a	CW	36.93		39.93	50.4	10.5
						<b>Result:</b>	<b>Complies</b>

$$\text{ERP } P_{\text{erp}} = P_{\text{meas}} + G(\text{dBd})$$

$$\text{Conducted Margin} = P_{\text{lim}} - P_{\text{erp}}$$

**\*\*\* NOTE \*\*\***

The Aprisa SR+ must be professionally installed by trained and qualified installers. The installer must ensure regulatory compliance to the requirements and standards cited herein and to the local requirements in place at the time of installation. When the maximum permissible Effective Radiated Power (ERP) or Equivalent Isotropic Radiated Power (EIPR) is regulated, knowledge of the regulation, antenna gain and feeder cable loss must be known by the installer prior to adjusting the Maximum Transmit Output Power of the Aprisa SR+.

**Table 7.2 – Maximum Permissible Antenna Gain at Maximum Output Power**

<b>FCC Part 101: Maximum Permissible Antenna Gain at Maximum Output Power</b>							
Channel Frequency (MHz)	Channel Bandwidth (kHz)	Modulation	Max Power [P <sub>meas</sub> ] (dBm)	Max Gain [G] (dBi)	EIRP Power [P <sub>eirp</sub> ] (dBm)	EIRP Limit [P <sub>lim</sub> ] (dBm)	Margin (dB)
928.5	n/a	CW	36.89	10.11	47.00	47	0.0
931.3	n/a	CW	36.97	10.03	47.00	47	0.0
941.5	n/a	CW	37.00	23.00	60.00	60	0.0
956.5	n/a	CW	36.93	33.07	70.00	70	0.0
							<b>Result: Complies</b>

$$\text{EIRP } P_{\text{eirp}} = P_{\text{meas}} + G(\text{dBi})$$

$$\text{Conversion dBW to dBm} = \text{dBW} + 30$$

$$\text{Conversion dBd to dBi} = \text{dBd} + 2.15$$

$$\text{Conducted Margin} = P_{\text{lim}} - P_{\text{erp}}$$

<b>ISED RSS-119: Maximum Permissible Antenna Gain at Maximum Output Power</b>							
Channel Frequency (MHz)	Channel Bandwidth (kHz)	Modulation	Max Power [P <sub>Meas</sub> ] (dBm)	Max Gain [G] (dBi)	ERP Power [P <sub>erp</sub> ] (dBm)	Limit [P <sub>Lim</sub> ] (dBm)	Margin (dB)
928.5	n/a	CW	36.89	13.51	50.40	50.4	0.0
931.3	n/a	CW	36.97	13.43	50.40	50.4	0.0
941.5	n/a	CW	37.00	13.40	50.40	50.4	0.0
956.5	n/a	CW	36.93	13.47	50.40	50.4	0.0
							<b>Result: Complies</b>

$$\text{ERP } P_{\text{erp}} = P_{\text{meas}} + G(\text{dBi})$$

$$\text{Conducted Margin} = P_{\text{lim}} - P_{\text{erp}}$$

**Table 7.3 – Maximum Permissible Output Power at Maximum Antenna Gain**

<b>FCC Part 101: Maximum Permissible Output Power at Maximum Antenna Gain</b>							
Channel Frequency (MHz)	Channel Bandwidth (kHz)	Modulation	Max Power [P <sub>meas</sub> ] (dBm)	Max Gain [G] (dBi)	EIRP Power [P <sub>eirp</sub> ] (dBm)	EIRP Limit [P <sub>lim</sub> ] (dBm)	Margin (dB)
928.5	n/a	CW	19.00	28.00	47.00	47	0.0
931.3	n/a	CW	19.00	28.00	47.00	47	0.0
941.5	n/a	CW	32.00	28.00	60.00	60	0.0
956.5	n/a	CW	42.00	28.00	70.00	70	0.0
							<b>Result: Complies</b>

$$\text{EIRP } P_{\text{eirp}} = P_{\text{meas}} + G(\text{dBi})$$

$$\text{Conversion dBW to dBm} = \text{dBW} + 30$$

$$\text{Conversion dBd to dBi} = \text{dBd} + 2.15$$

$$\text{Conducted Margin} = P_{\text{lim}} - P_{\text{erp}}$$

<b>ISED RSS-119: Maximum Permissible Output Power at Maximum Antenna Gain</b>							
Channel Frequency (MHz)	Channel Bandwidth (kHz)	Modulation	Max Power [P <sub>Meas</sub> ] (dBm)	Max Gain [G] (dBd)	ERP Power [P <sub>erp</sub> ] (dBm)	Limit [P <sub>Lim</sub> ] (dBm)	Margin (dB)
928.5	n/a	CW	24.55	25.85	50.40	50.4	0.0
931.3	n/a	CW	24.55	25.85	50.40	50.4	0.0
941.5	n/a	CW	24.55	25.85	50.40	50.4	0.0
956.5	n/a	CW	24.55	25.85	50.40	50.4	0.0
							<b>Result: Complies</b>

$$\text{ERP } P_{\text{erp}} = P_{\text{meas}} + G(\text{dBd})$$

$$\text{Conducted Margin} = P_{\text{lim}} - P_{\text{erp}}$$

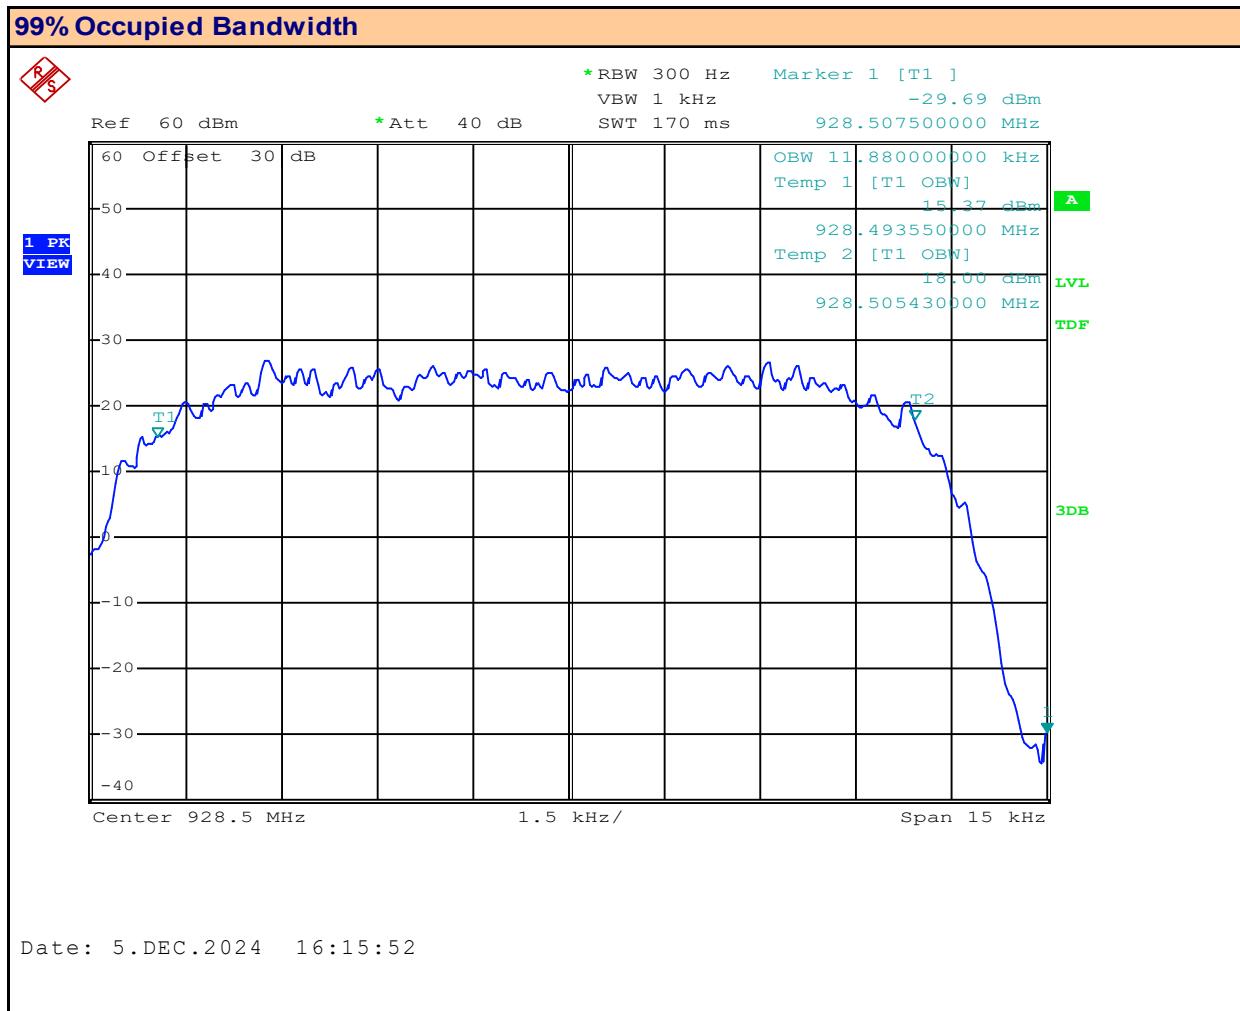
Note: The manufacturer's maximum specified antenna gain = 28dBi

$$\text{Antenna Gain (dBd)} = \text{Antenna Gain (dBi)} - 2.15 = 28\text{dBi} - 2.15 = 25.85\text{dBd}$$

Note: Maximum Output Power is field-programable.

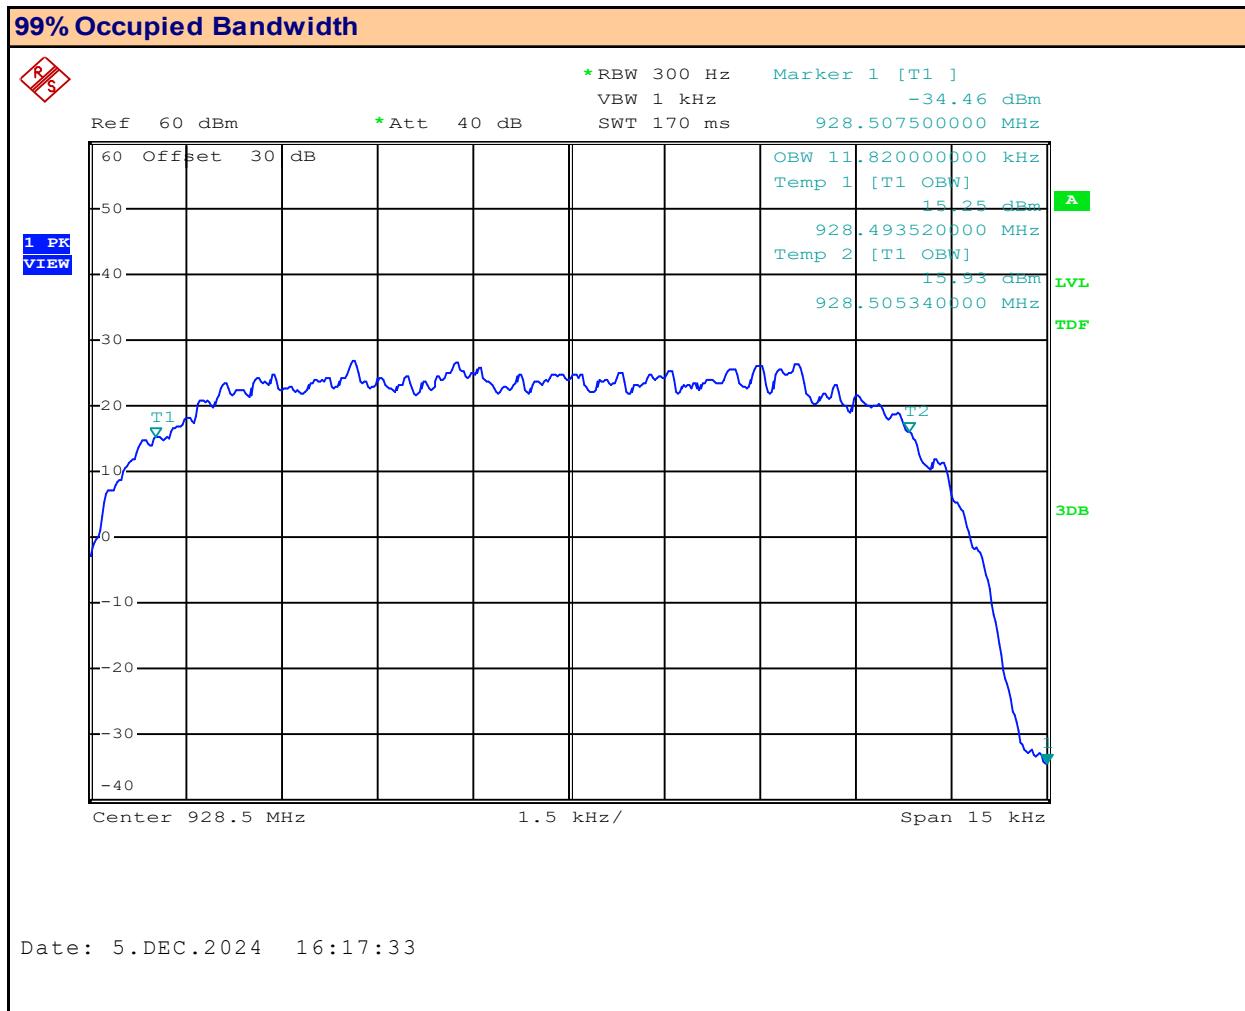
## 8.0 OCCUPIED BANDWIDTH

Test Procedure					
Normative	FCC 47 CFR §101.109(c)				
References	ANSI C63.26				
Requirement / Limits					
47 CFR §101.109(c)	<p><b>§101.109(c) Bandwidth</b>            (c) The maximum bandwidth which will be authorized per frequency assigned is set out in the table that follows. Regardless of the maximum authorized bandwidth specified for each frequency band, the Commission reserves the right to issue a license for less than the maximum bandwidth if it appears that a lesser bandwidth would be sufficient to support an applicant's intended communications.</p> <p><b>Maximum Authorized Bandwidth</b></p> <table border="1"> <tr> <td>928-929MHz: 25kHz</td></tr> <tr> <td>932-932.5, 941-941.5MHz: 12.5kHz</td></tr> <tr> <td>932.5-935, 941.5-944MHz: 200kHz</td></tr> <tr> <td>952-960MHz: 200kHz</td></tr> </table>	928-929MHz: 25kHz	932-932.5, 941-941.5MHz: 12.5kHz	932.5-935, 941.5-944MHz: 200kHz	952-960MHz: 200kHz
928-929MHz: 25kHz					
932-932.5, 941-941.5MHz: 12.5kHz					
932.5-935, 941.5-944MHz: 200kHz					
952-960MHz: 200kHz					
Test Setup	Appendix A - Figure A.1				
Measurement Procedure					
The DUT was connected to a Spectrum Analyzer via a 30dB attenuator. The DUT was configured to transmit modulated at its highest output power. The Occupied Bandwidth was measured using the instrument's 99% Bandwidth function and recorded for each applicable bandwidth and modulation.					

**Plot 8.1 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, QPSK**

**Channel Frequency:**  MHz

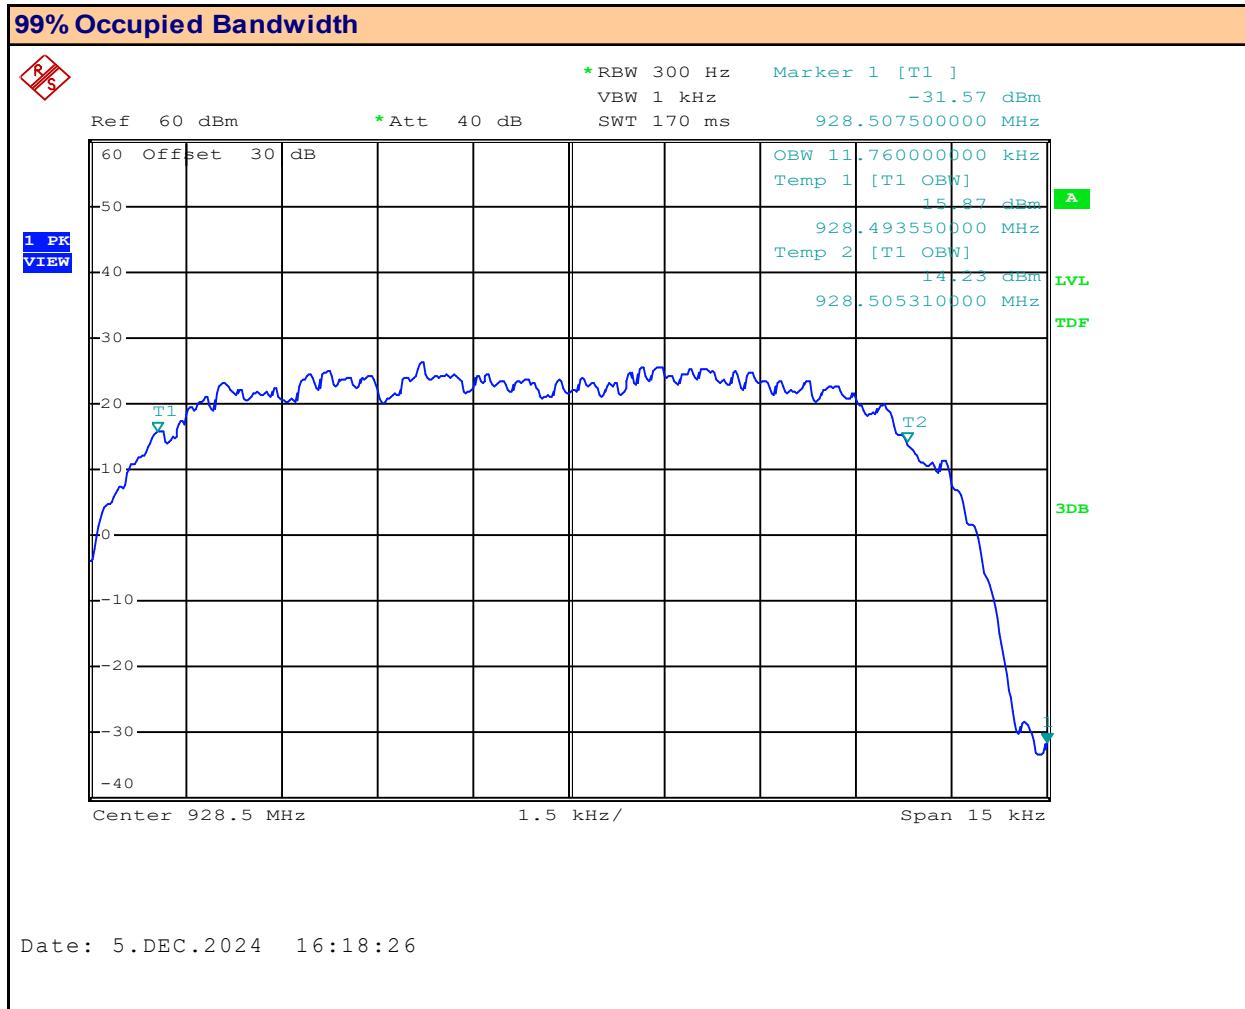
**Channel Bandwidth:**  kHz

**Designator:** 
**Modulation:** 
**Measured Occupied Bandwidth:**  kHz

**Plot 8.2 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, 16QAM**

**Channel Frequency:**  MHz

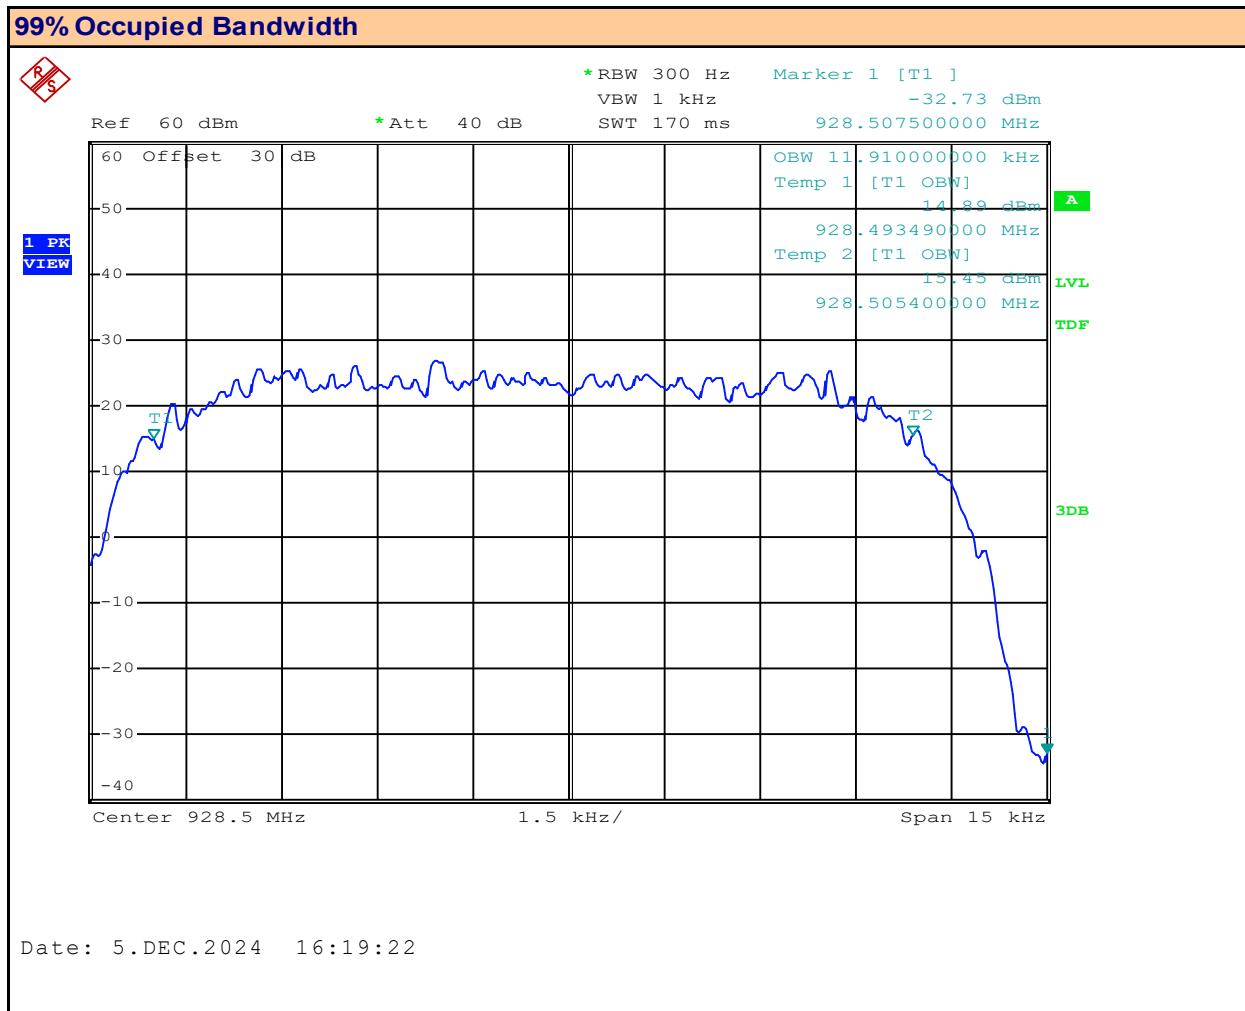
**Channel Bandwidth:**  kHz

**Designator:** 
**Modulation:** 
**Measured Occupied Bandwidth:**  kHz

**Plot 8.3 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, 64QAM**

**Channel Frequency:**  MHz

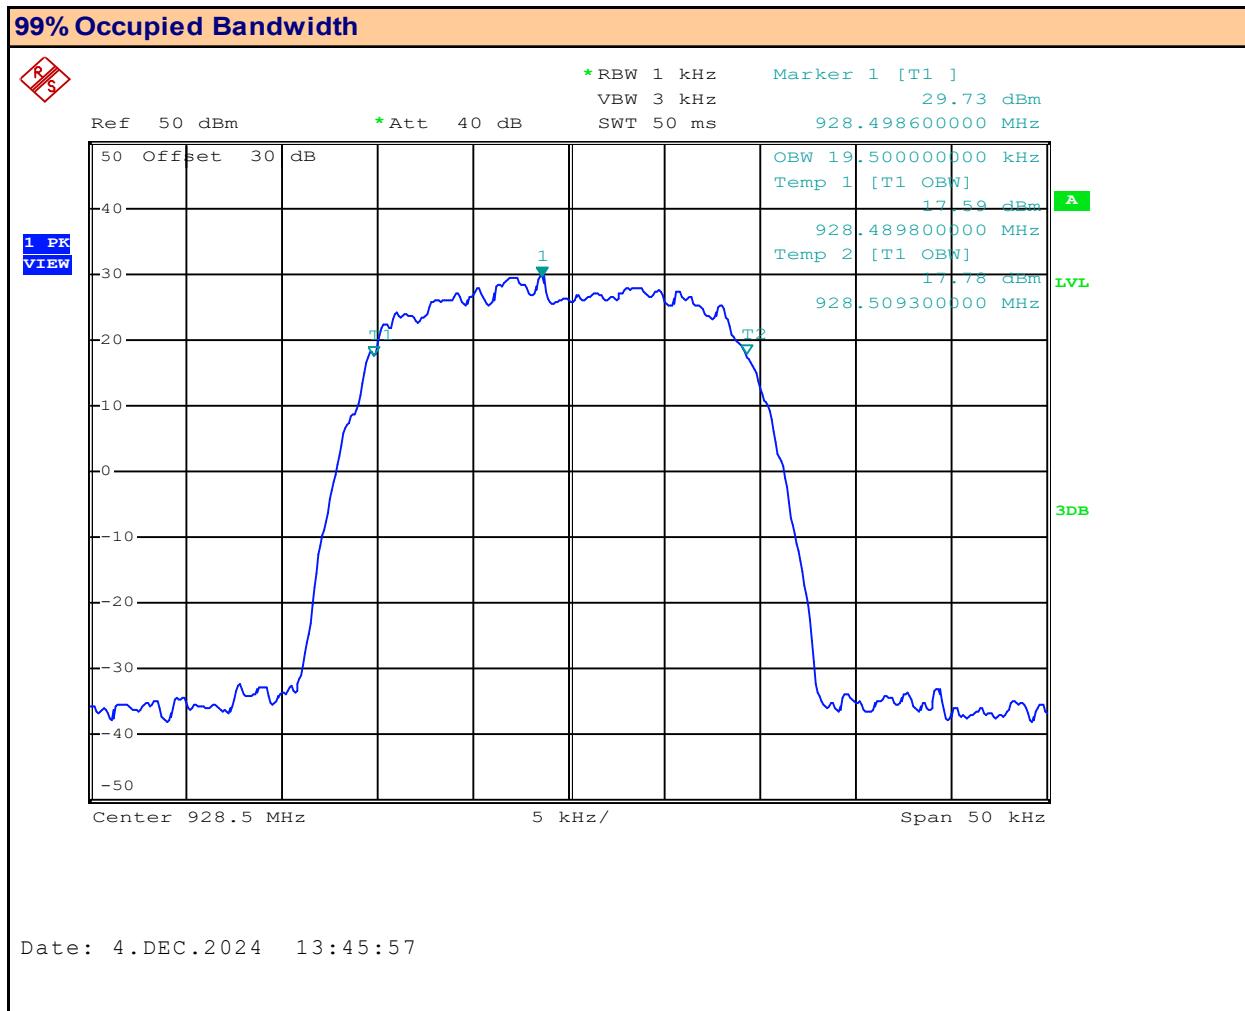
**Channel Bandwidth:**  kHz

**Designator:** 
**Modulation:** 
**Measured Occupied Bandwidth:**  kHz

**Plot 8.4 – Occupied Bandwidth – 928.5MHz, 12.5kHz BW, 256QAM**

**Channel Frequency:**  MHz

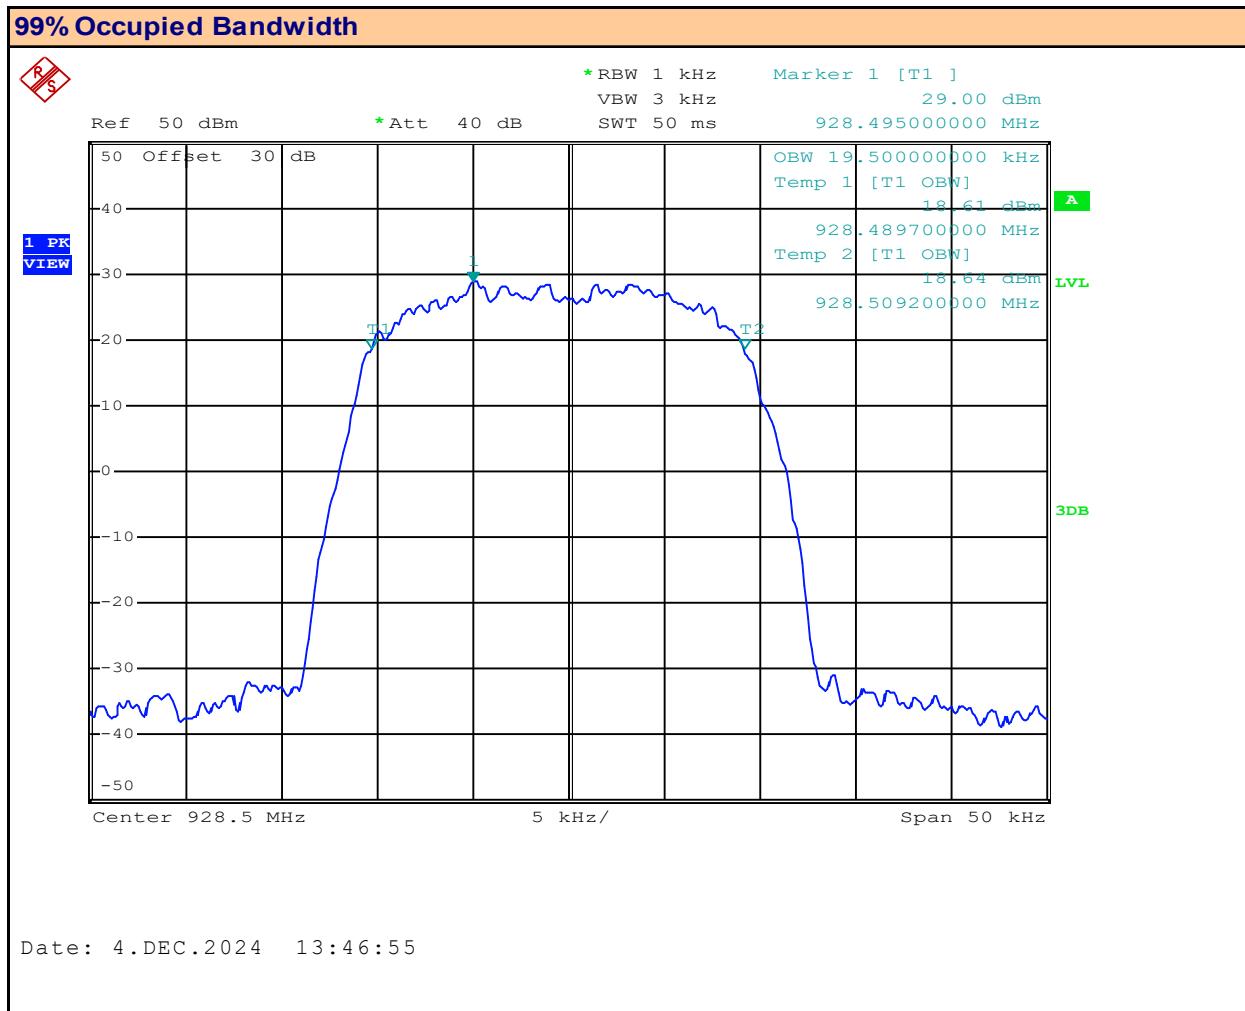
**Channel Bandwidth:**  kHz

**Designator:** 
**Modulation:** 
**Measured Occupied Bandwidth:**  kHz

**Plot 8.5 – Occupied Bandwidth – 928.5MHz, 25Hz BW, QPSK**

**Channel Frequency:**  MHz

**Channel Bandwidth:**  kHz

**Designator:** 
**Modulation:** 
**Measured Occupied Bandwidth:**  kHz

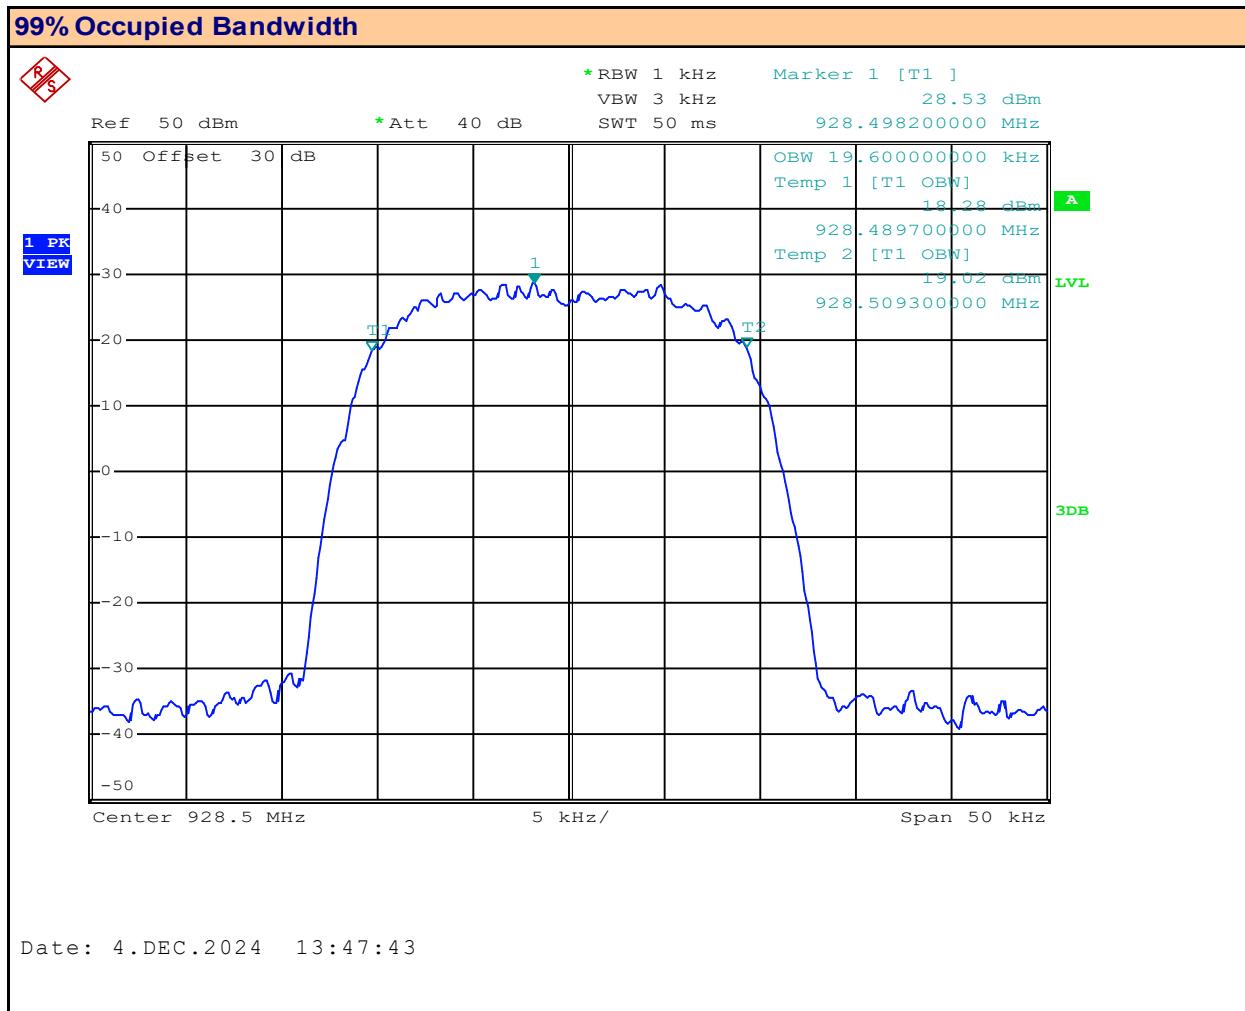
**Plot 8.6 – Occupied Bandwidth – 928.5MHz, 25Hz BW, 16QAM**

 Channel Frequency: **928.5** MHz

 Channel Bandwidth: **25** kHz

 Designator: **D1D**

 Modulation: **16QAM**

 Measured Occupied Bandwidth: **19.5** kHz

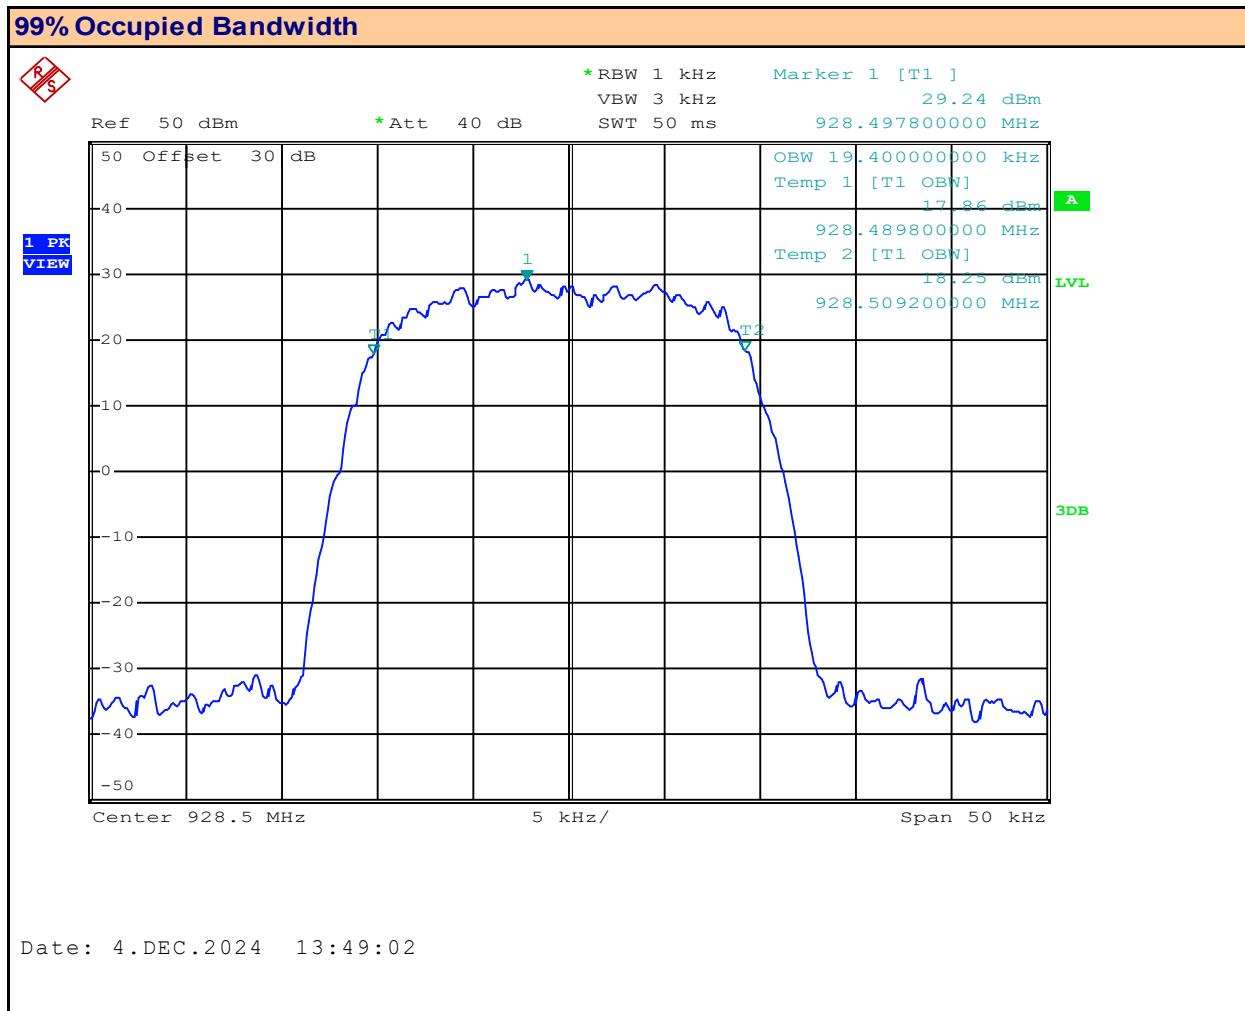
**Plot 8.7 – Occupied Bandwidth – 928.5MHz, 25Hz BW, 64QAM**

 Channel Frequency: **928.5** MHz

 Channel Bandwidth: **25** kHz

 Designator: **D1D**

 Modulation: **64QAM**

 Measured Occupied Bandwidth: **19.6** kHz

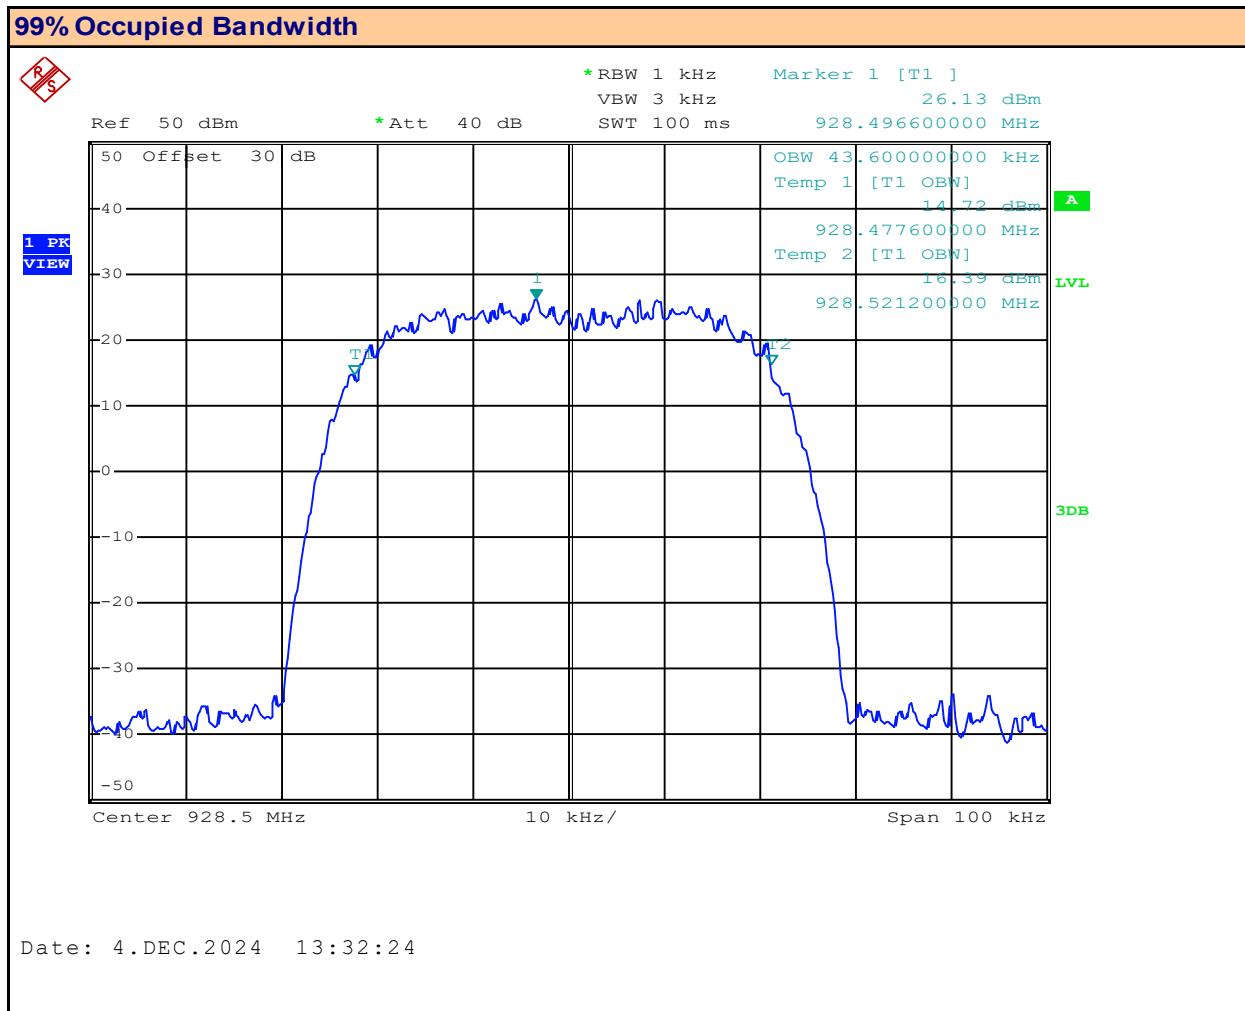
**Plot 8.8 – Occupied Bandwidth – 928.5MHz, 25Hz BW, 256QAM**

 Channel Frequency: **928.5** MHz

 Channel Bandwidth: **25** kHz

 Designator: **D1D**

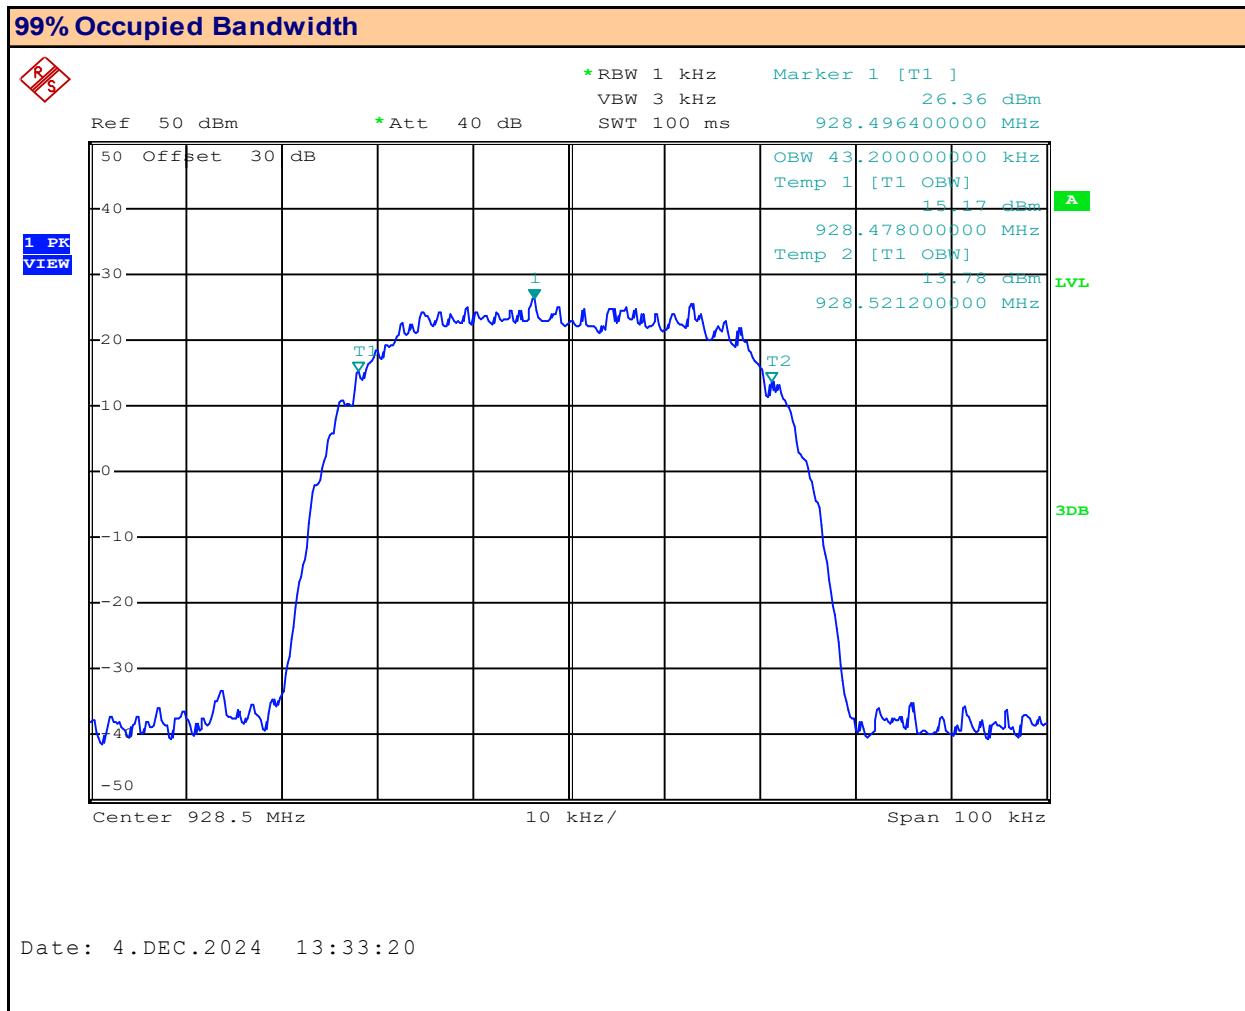
 Modulation: **256QAM**

 Measured Occupied Bandwidth: **19.4** kHz

**Plot 8.9 – Occupied Bandwidth – 928.5MHz, 50Hz BW, QPSK**

**Channel Frequency:**  MHz

**Channel Bandwidth:**  kHz

**Designator:** 
**Modulation:** 
**Measured Occupied Bandwidth:**  kHz

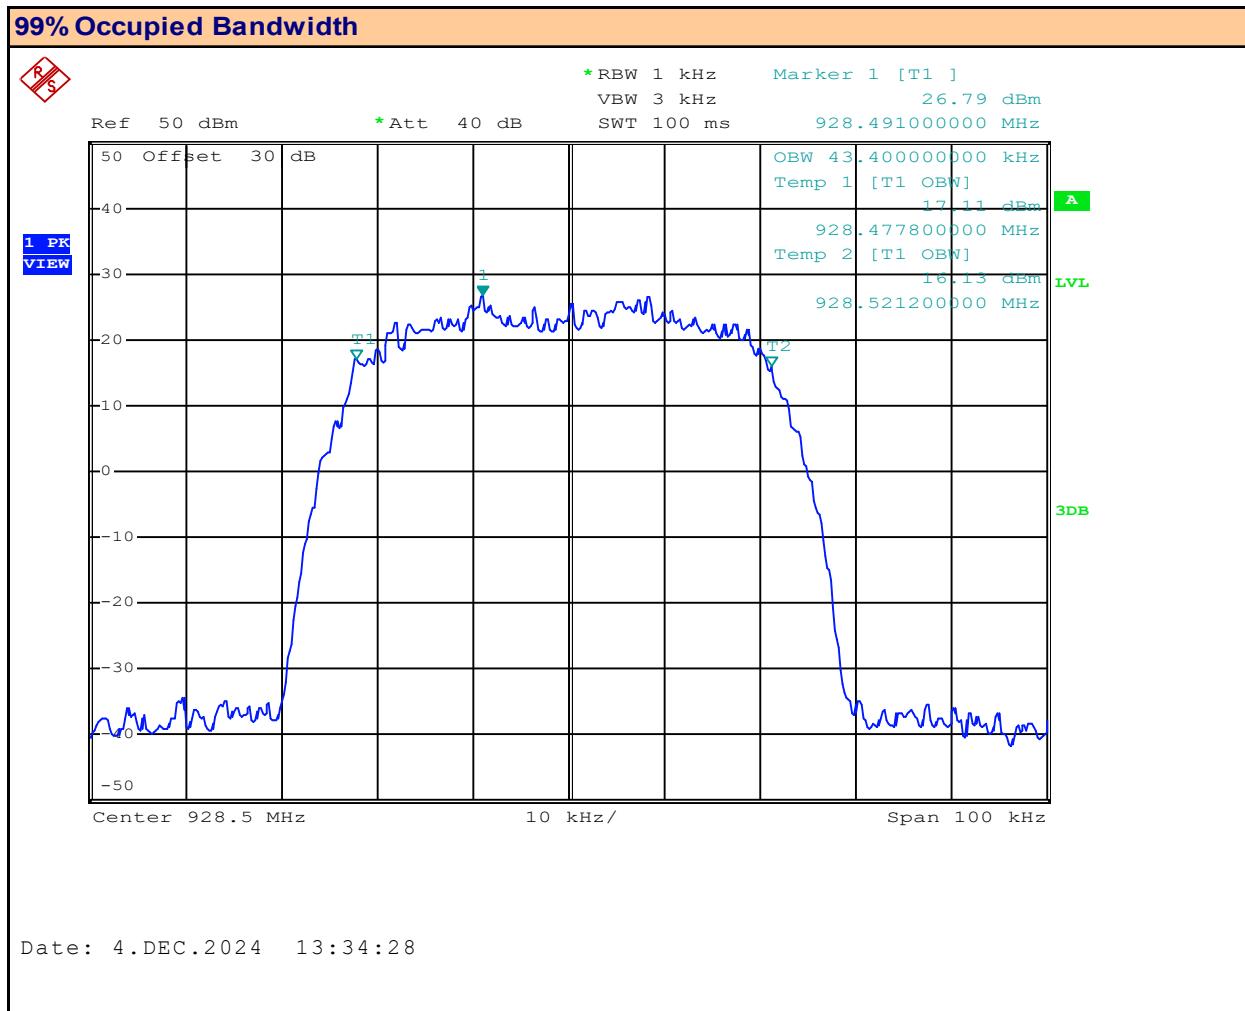
**Plot 8.10 – Occupied Bandwidth – 928.5MHz, 50Hz BW, 16QAM**

 Channel Frequency: **928.5** MHz

 Channel Bandwidth: **50** kHz

 Designator: **D1D**

 Modulation: **16QAM**

 Measured Occupied Bandwidth: **43.2** kHz

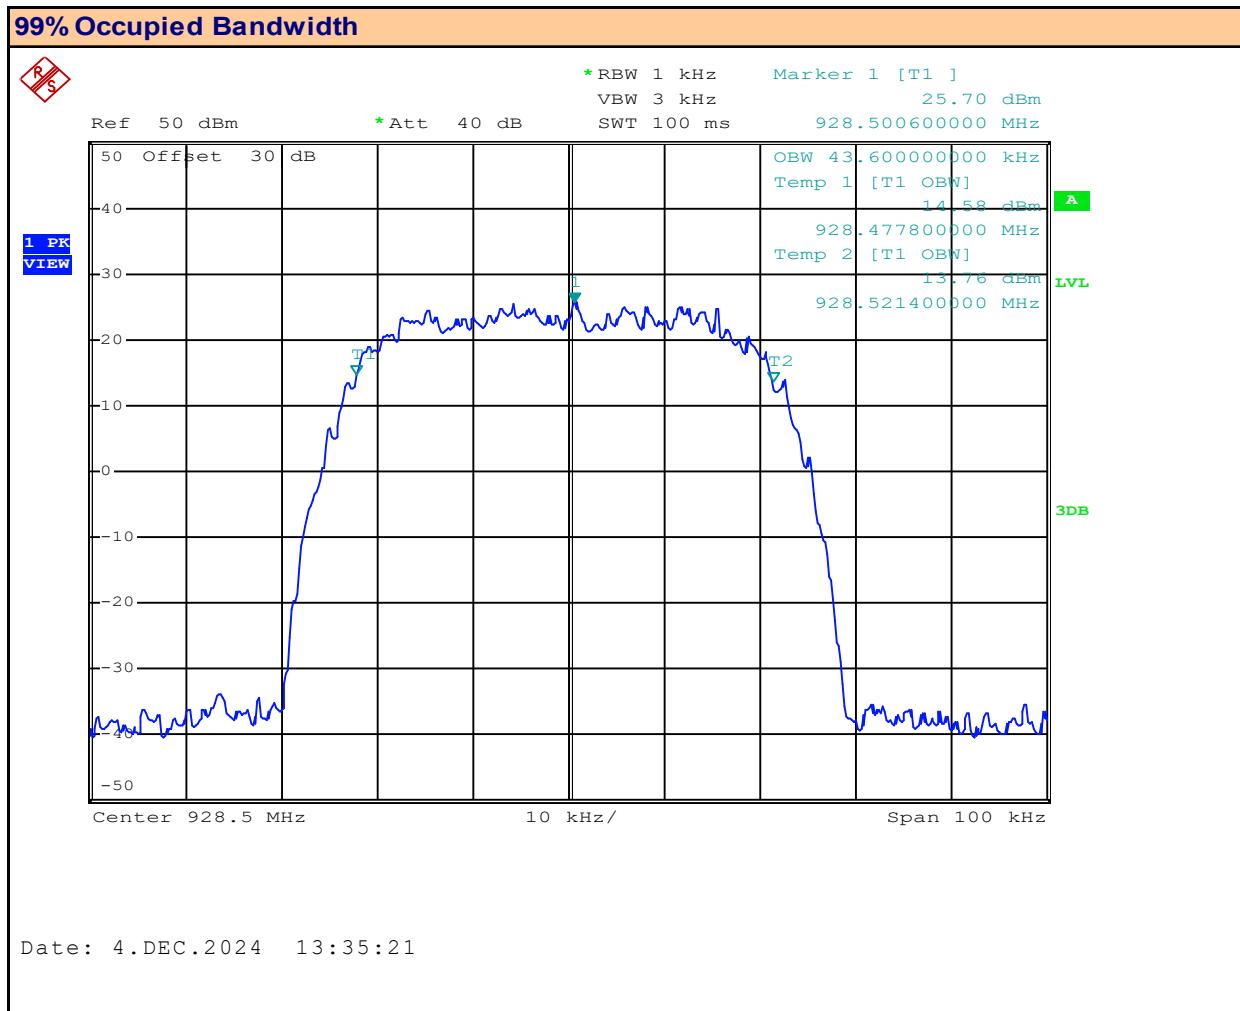
**Plot 8.11 – Occupied Bandwidth – 928.5MHz, 50Hz BW, 64QAM**

 Channel Frequency: **928.5** MHz

 Channel Bandwidth: **50** kHz

 Designator: **D1D**

 Modulation: **64QAM**

 Measured Occupied Bandwidth: **43.4** kHz

**Plot 8.12 – Occupied Bandwidth – 928.5MHz, 50Hz BW, 256QAM**

**Channel Frequency:**  MHz

**Channel Bandwidth:**  kHz

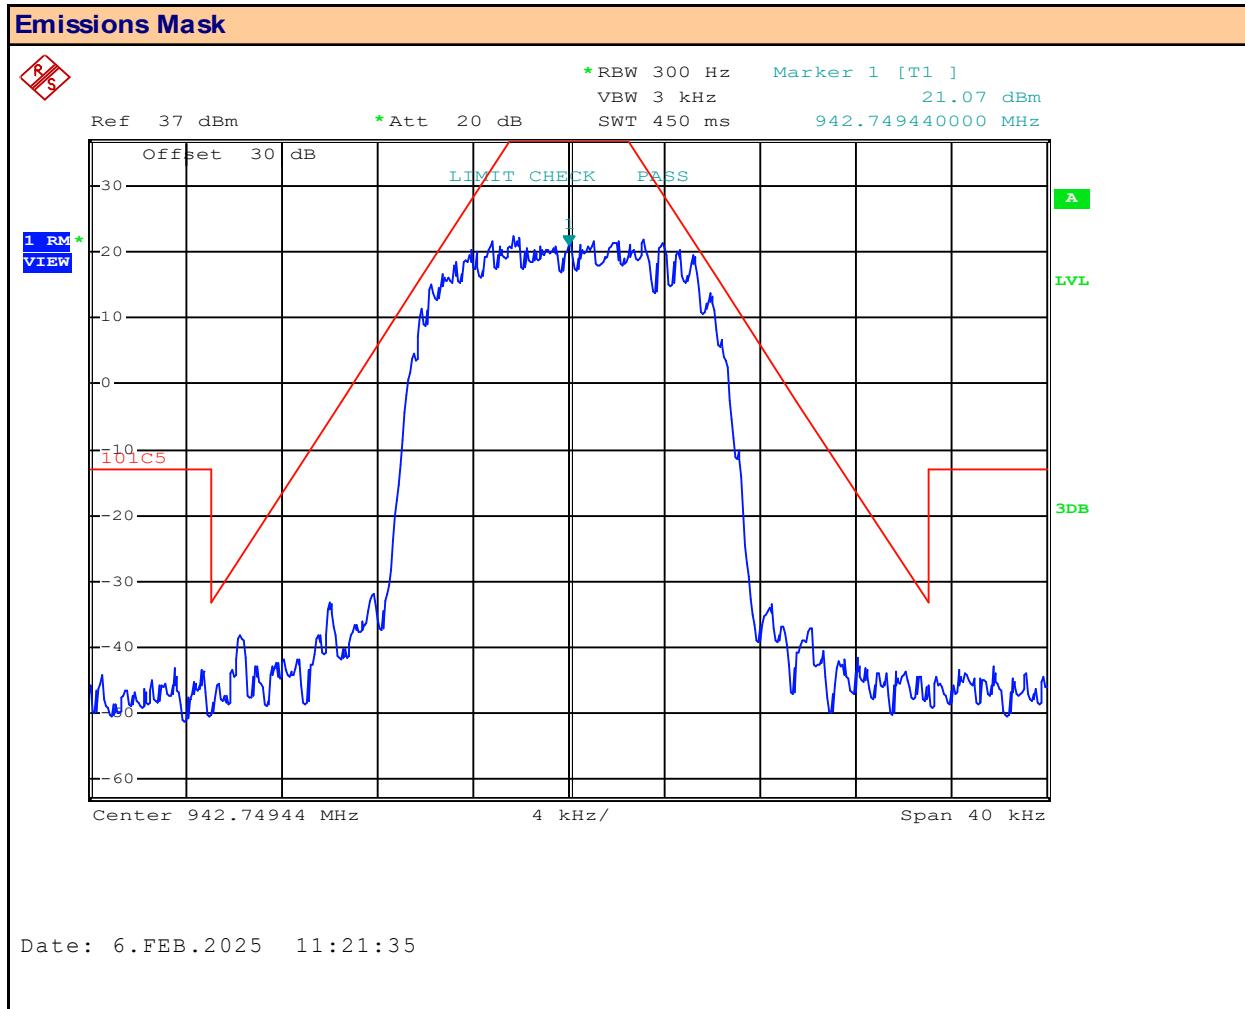
**Designator:** 
**Modulation:** 
**Measured Occupied Bandwidth:**  kHz

**Table 8.1 - Summary of Occupied Bandwidth Measurements**

<b>99% Occupied Bandwidth Results:</b>				
<b>Channel Frequency (MHz)</b>	<b>Channel Bandwidth (kHz)</b>	<b>Modulation</b>	<b>Measured Occupied Bandwidth (kHz)</b>	<b>Emission Designator</b>
928.5	12.5	QPSK	11.9	11K9G1D
		16QAM	11.8	11K8D1D
		64QAM	11.8	11K8D1D
		256QAM	11.9	11K9D1D
	25.0	QPSK	19.5	19K5G1D
		16QAM	19.5	19K5D1D
		64QAM	19.6	19K6D1D
		256QAM	19.4	19K4D1D
	50.0	QPSK	41.6	41K6G1D
		16QAM	43.2	43K2D1D
		64QAM	43.4	43K4D1D
		256QAM	43.6	43K6D1D
<b>Result:</b>				<b>Complies</b>

## 9.0 CONDUCTED SPURIOUS EMISSIONS – EMISSIONS MASK

Test Procedure	
Normative References	FCC 47 CFR §101.111
	ANSI C63.26
Requirement / Limits	
47 CFR §101.111	<p><b>§101.111 Emission Mask</b></p> <p>(a) The mean power of emissions must be attenuated below the mean output power of the transmitter in accordance with the following schedule:</p> <p>5) When using transmissions employing digital modulation techniques on the 900 MHz multiple address frequencies with a 12.5 KHz bandwidth, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) in accordance with the following schedule:</p> <p>(i) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 2.5 KHz up to and including 6.25 KHz: At least <math>53 \log_{10} (fd/2.5)</math> decibels;</p> <p>(ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 6.25 KHz up to and including 9.5 KHz: At least <math>103 \log_{10} (fd/3.9)</math> decibels;</p> <p>(iii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 9.5 KHz up to and including 15 KHz: At least <math>157 \log_{10} (fd/5.3)</math> decibels; and</p> <p>(iv) On any frequency removed from the center of the authorized bandwidth by a displacement frequency greater than 15 KHz: At least 50 plus <math>10 \log_{10}(P)</math> or 70 decibels, whichever is the lesser attenuation.</p> <p>(6) When using transmissions employing digital modulation techniques on the 900 MHz multiple address frequencies with a bandwidth greater than 12.5 KHz, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) in accordance with the following schedule:</p> <p>(i) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 5 KHz up to and including 10 KHz: At least <math>83 \log_{10} (fd/5)</math> decibels;</p> <p>(ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 10 KHz up to and including 250 percent of the authorized bandwidth: At least <math>116 \log_{10} (fd/6.1)</math> decibels or 50 plus <math>10 \log_{10} (P)</math> or 70 decibels, whichever is the lesser attenuation; and</p>
Test Setup	Appendix A - Figure A.1
Measurement Procedure	
<p>The DUT was connected to a Spectrum Analyzer via a 30dB attenuator. The DUT was configured to transmit modulated at its highest output power. The emissions mask was created in the SA and the SA Reference Level was set to the DUT's maximum rated power. The SA's Limit Check (Pass/Fail) was enabled and the results recorded for each applicable bandwidth and modulation.</p>	

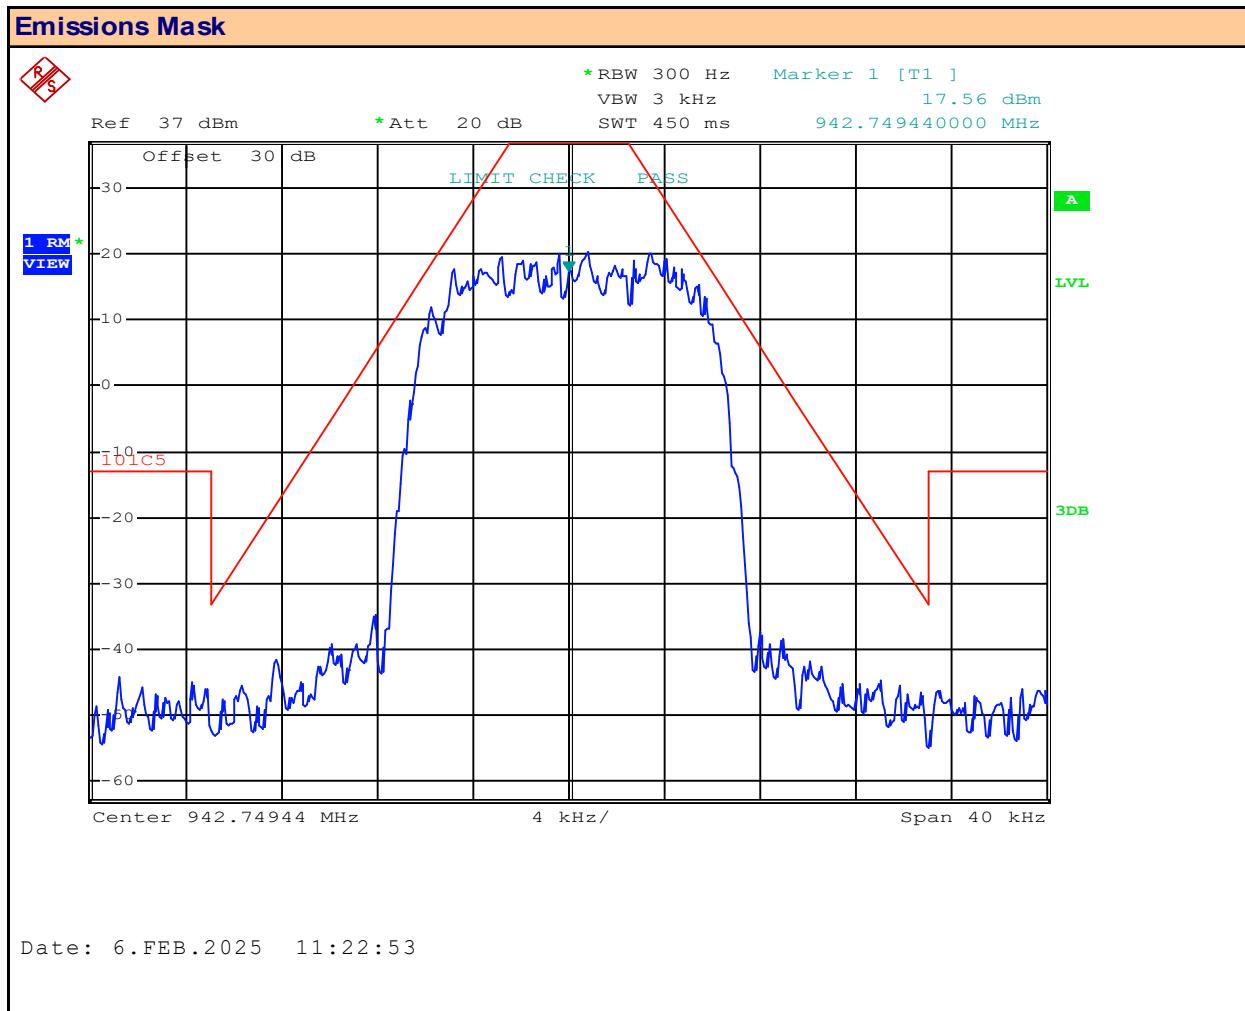
**Plot 9.1 – Emissions Mask – 942.75MHz, 12.5kHz BW, QPSK**

 Channel Frequency: **942.75** MHz

 Channel Bandwidth: **12.5** kHz

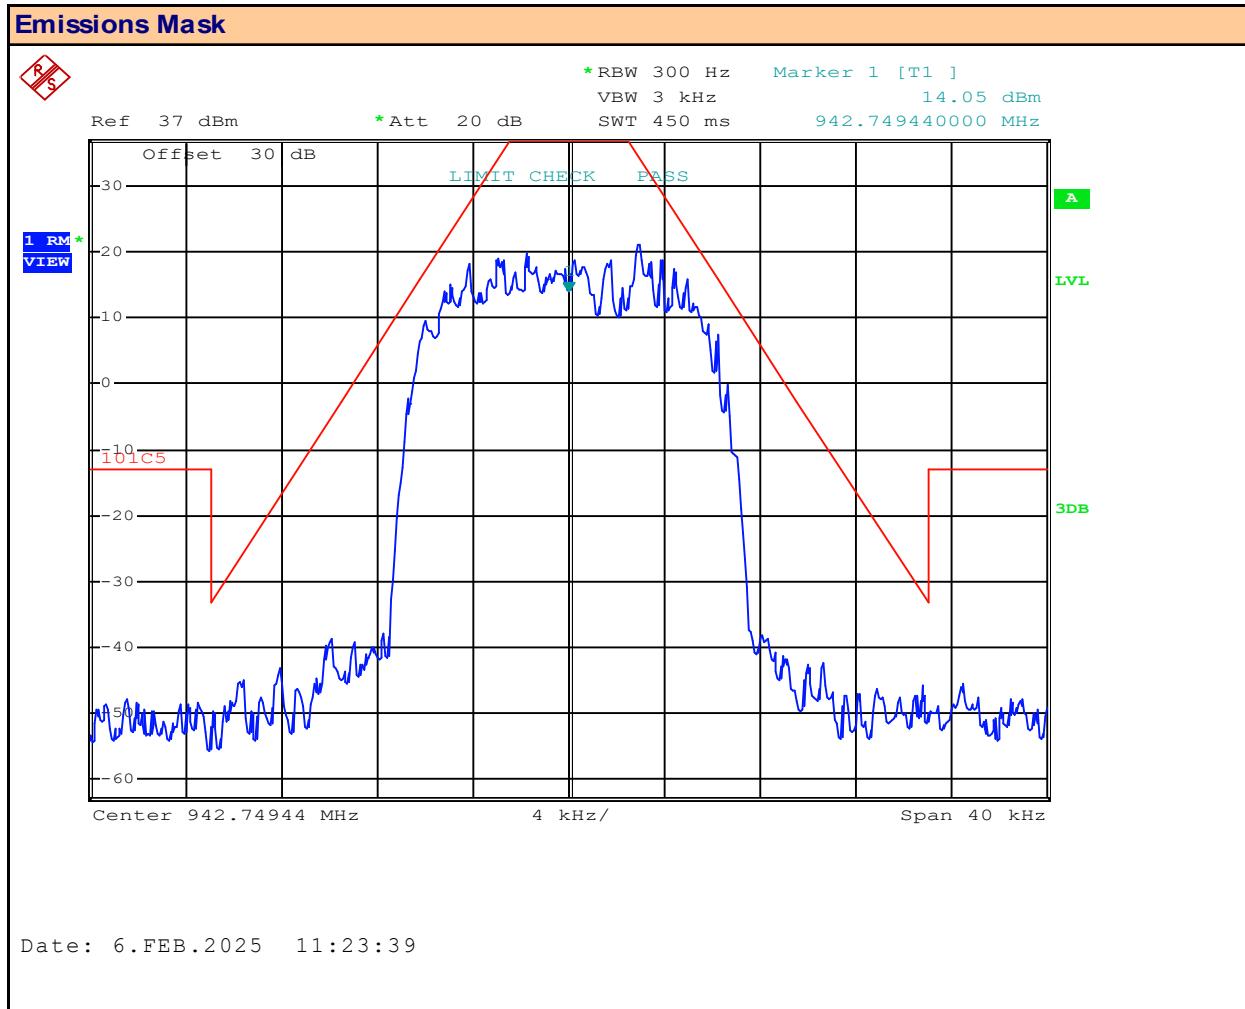
 Mask ID: **5**

 Modulation: **QPSK**

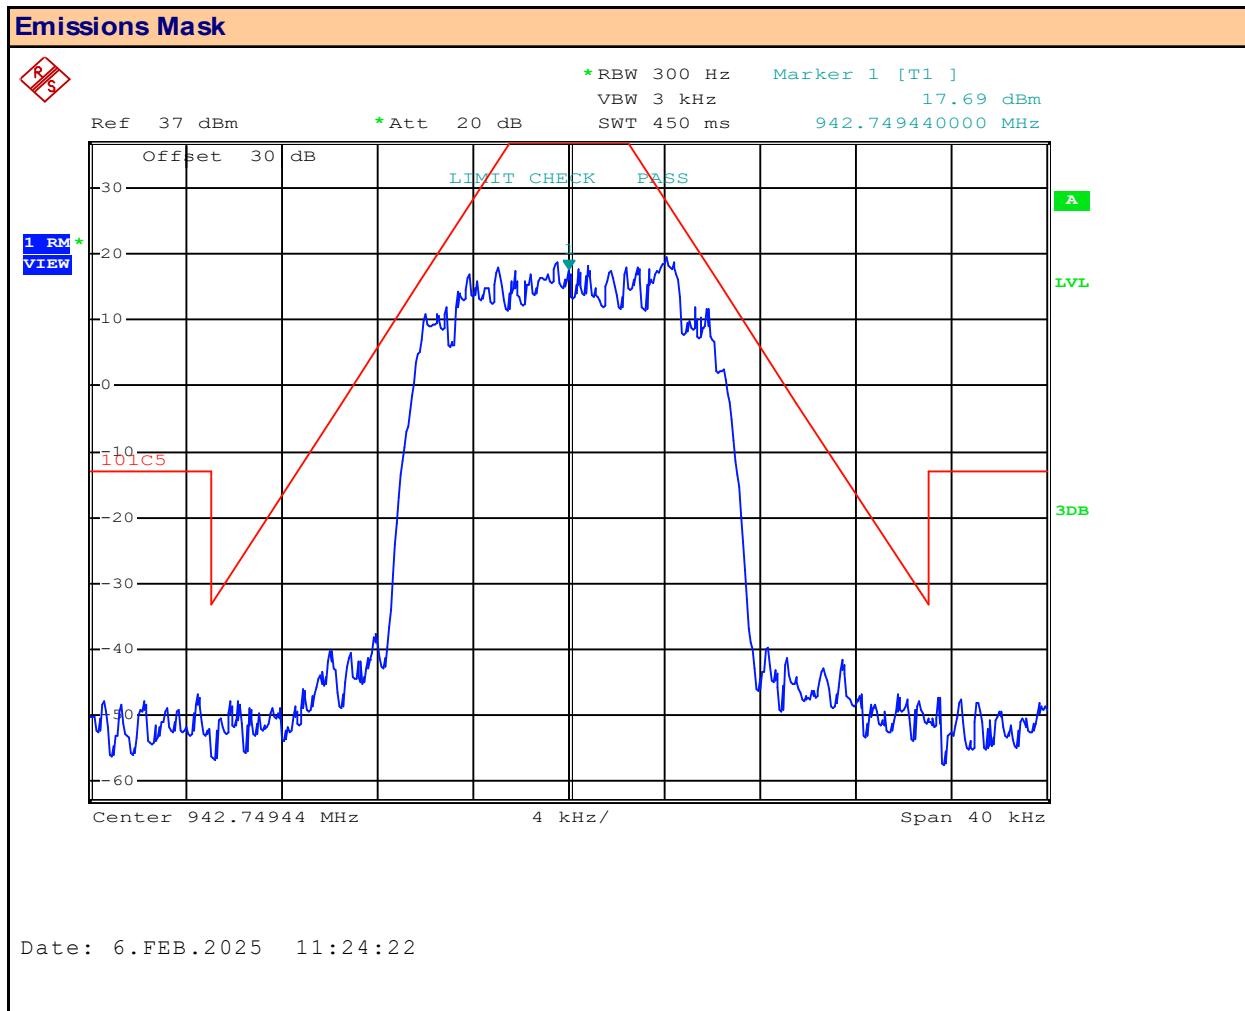
 Mask Results: **PASS**

**Plot 9.2 – Emissions Mask – 942.75MHz, 12.5kHz BW, 16QAM**


Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>12.5</b> kHz
Mask ID:	<b>5</b>	Modulation:	<b>16QAM</b>
		Mask Results:	<b>PASS</b>

**Plot 9.3 – Emissions Mask – 942.75MHz, 12.5kHz BW, 64QAM**


Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>12.5</b> kHz
Mask ID:	<b>5</b>	Modulation:	<b>64QAM</b>
		Mask Results:	<b>PASS</b>

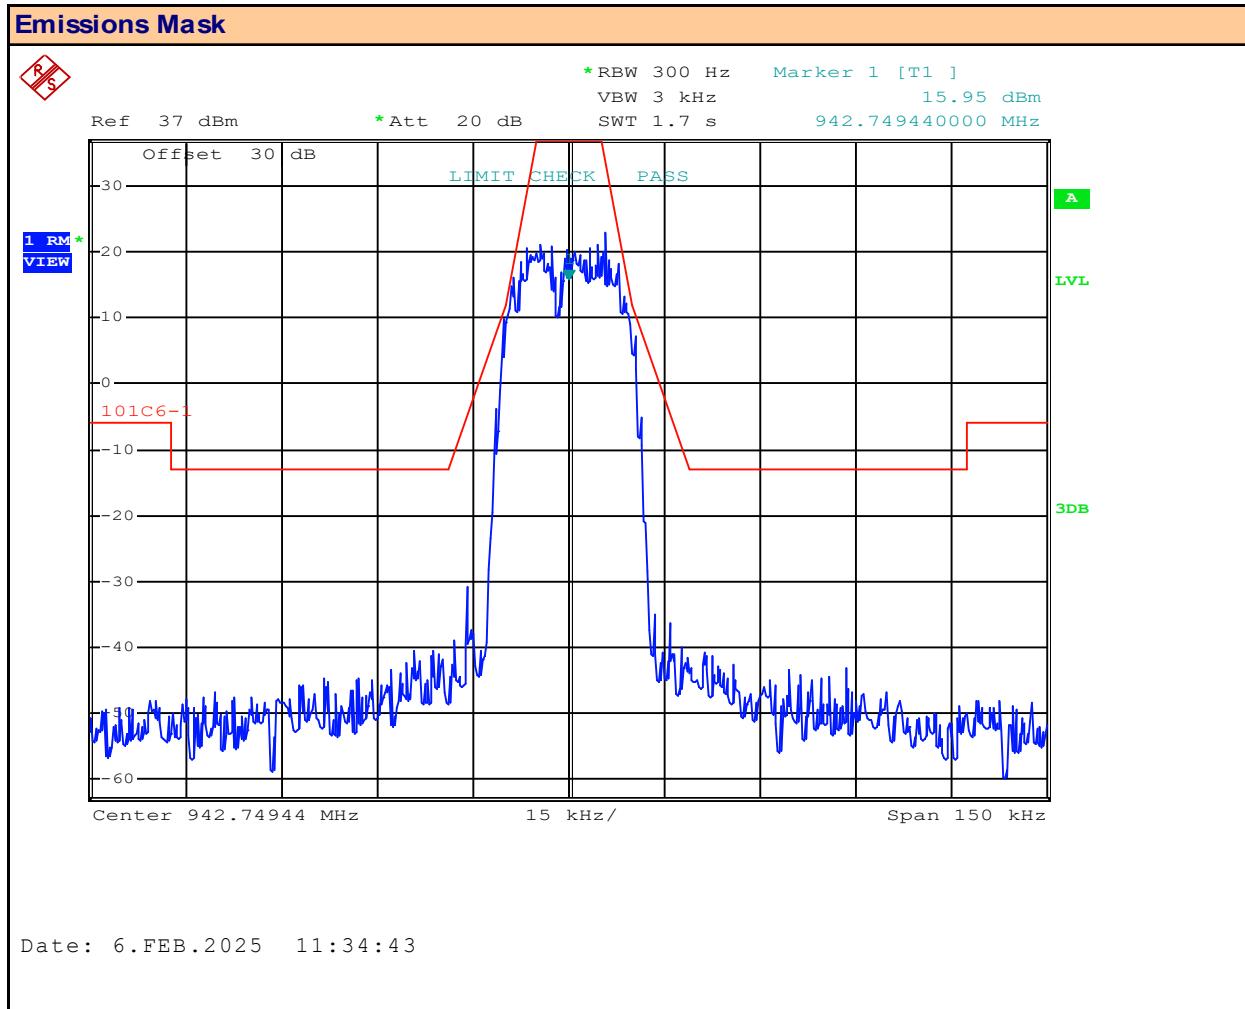
**Plot 9.4 – Emissions Mask – 942.75MHz, 12.5kHz BW, 256QAM**

 Channel Frequency: **942.75** MHz

 Channel Bandwidth: **12.5** kHz

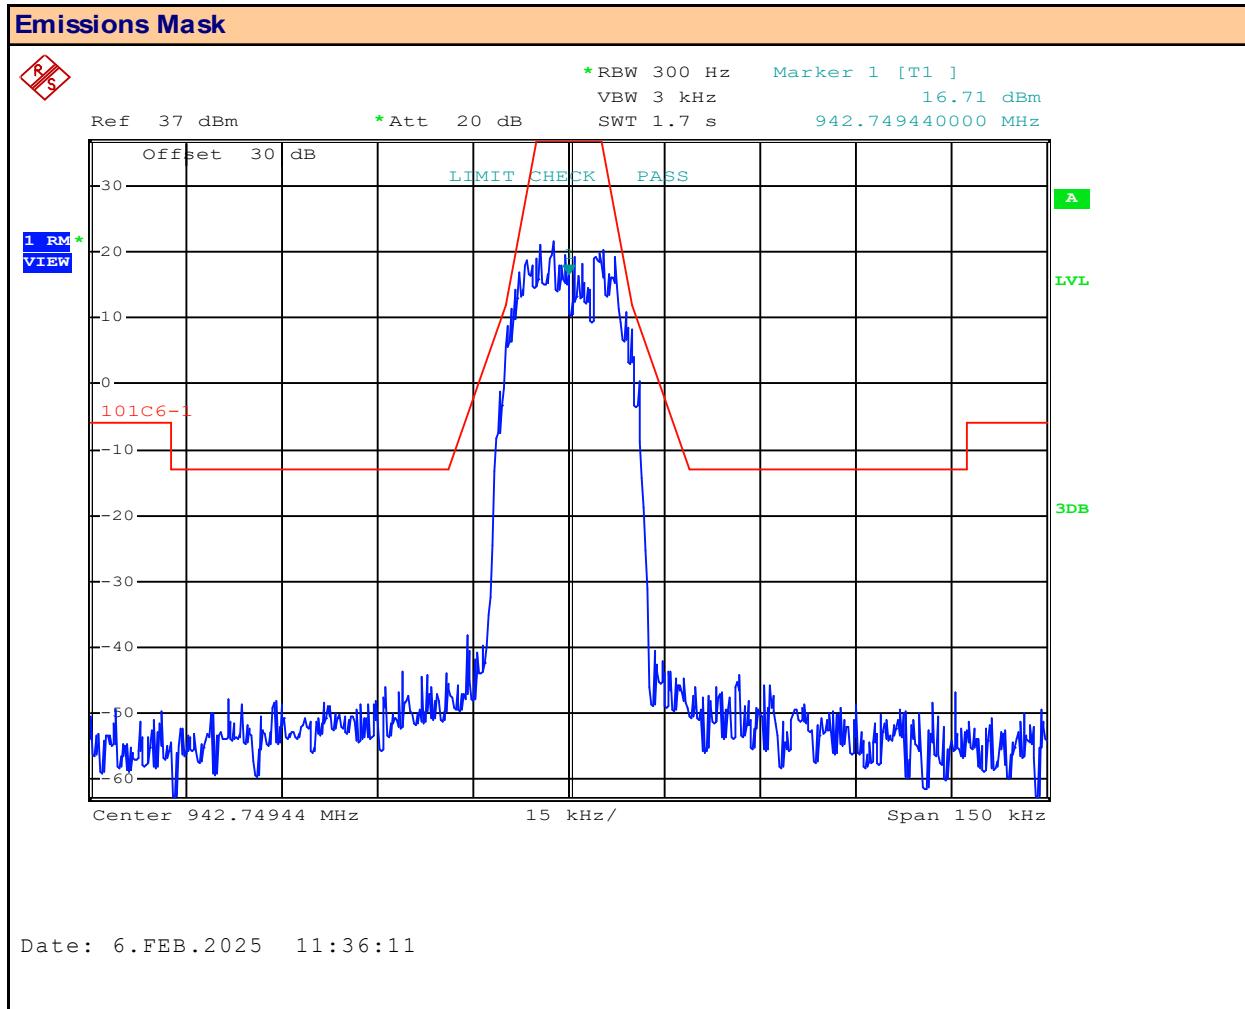
 Mask ID: **5**

 Modulation: **256QAM**

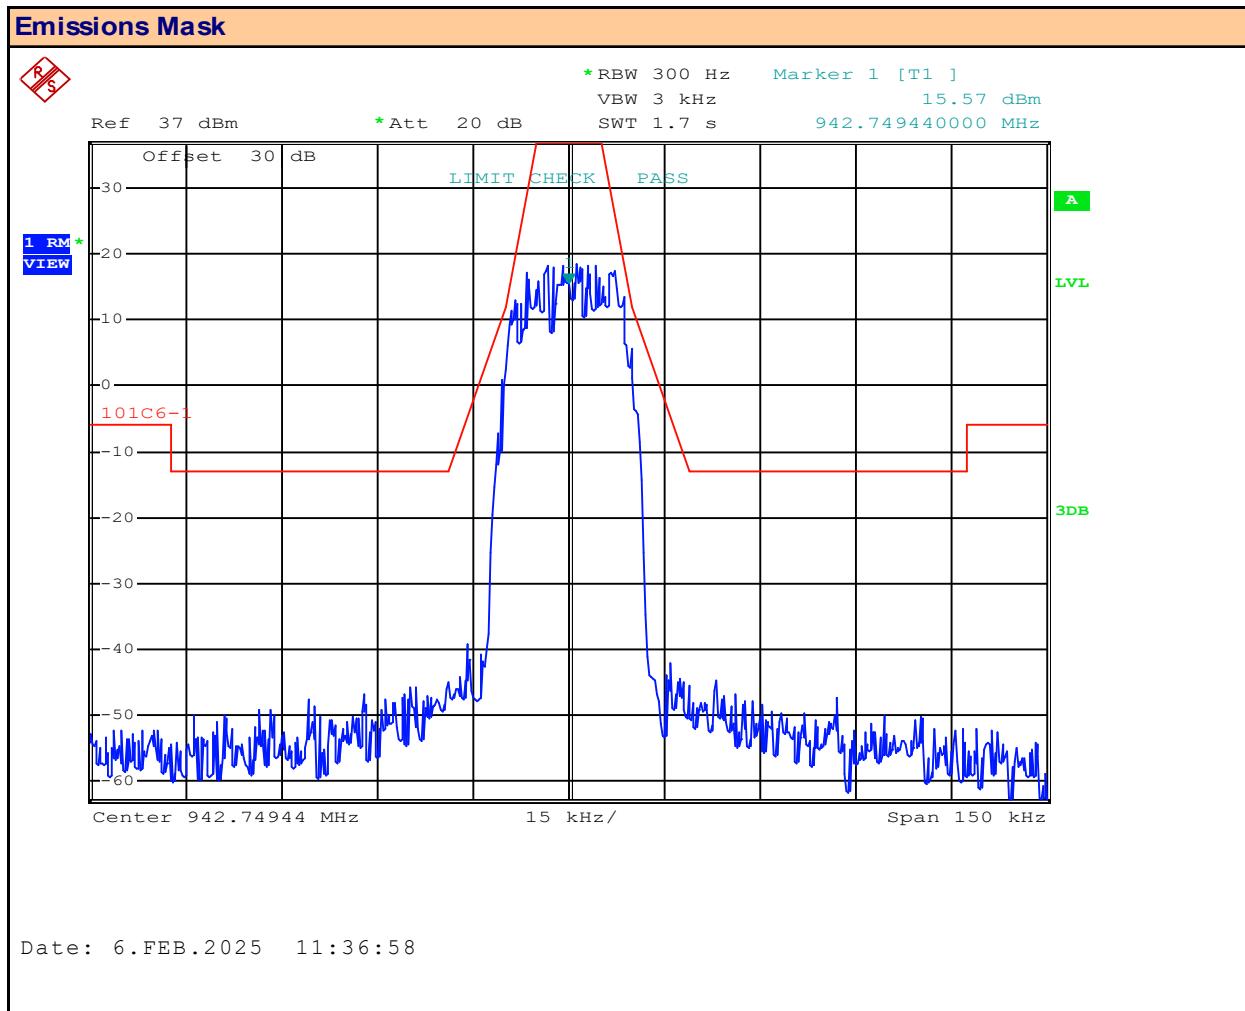
 Mask Results: **PASS**

**Plot 9.5 – Emissions Mask – 942.75MHz, 25kHz BW, QPSK**


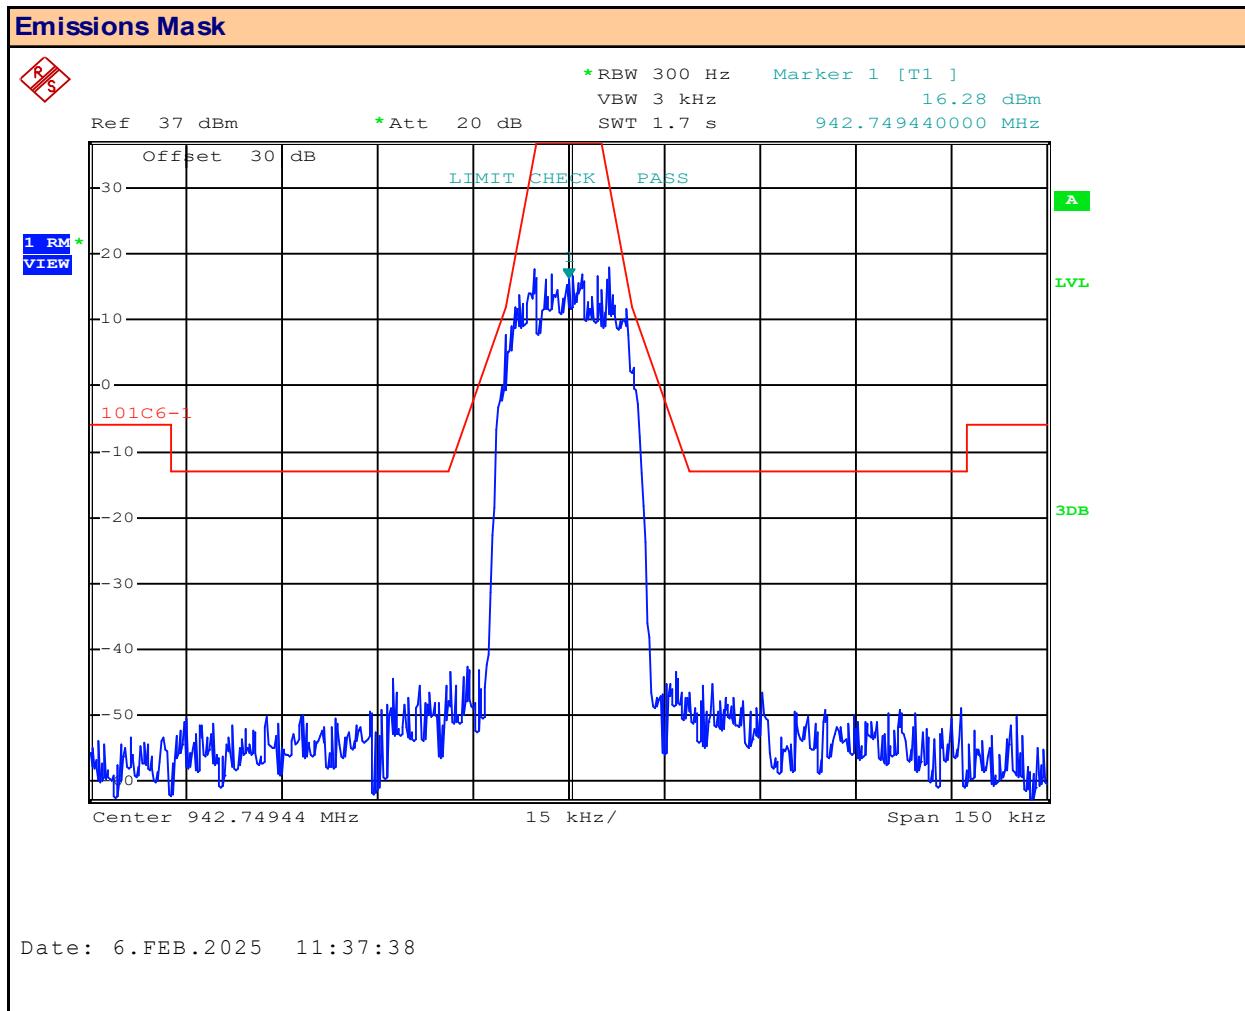
Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>25</b> kHz
Mask ID:	<b>6</b>	Modulation:	<b>QPSK</b>
		Mask Results:	<b>PASS</b>

**Plot 9.6 – Emissions Mask – 942.75MHz, 25kHz BW, 16QAM**


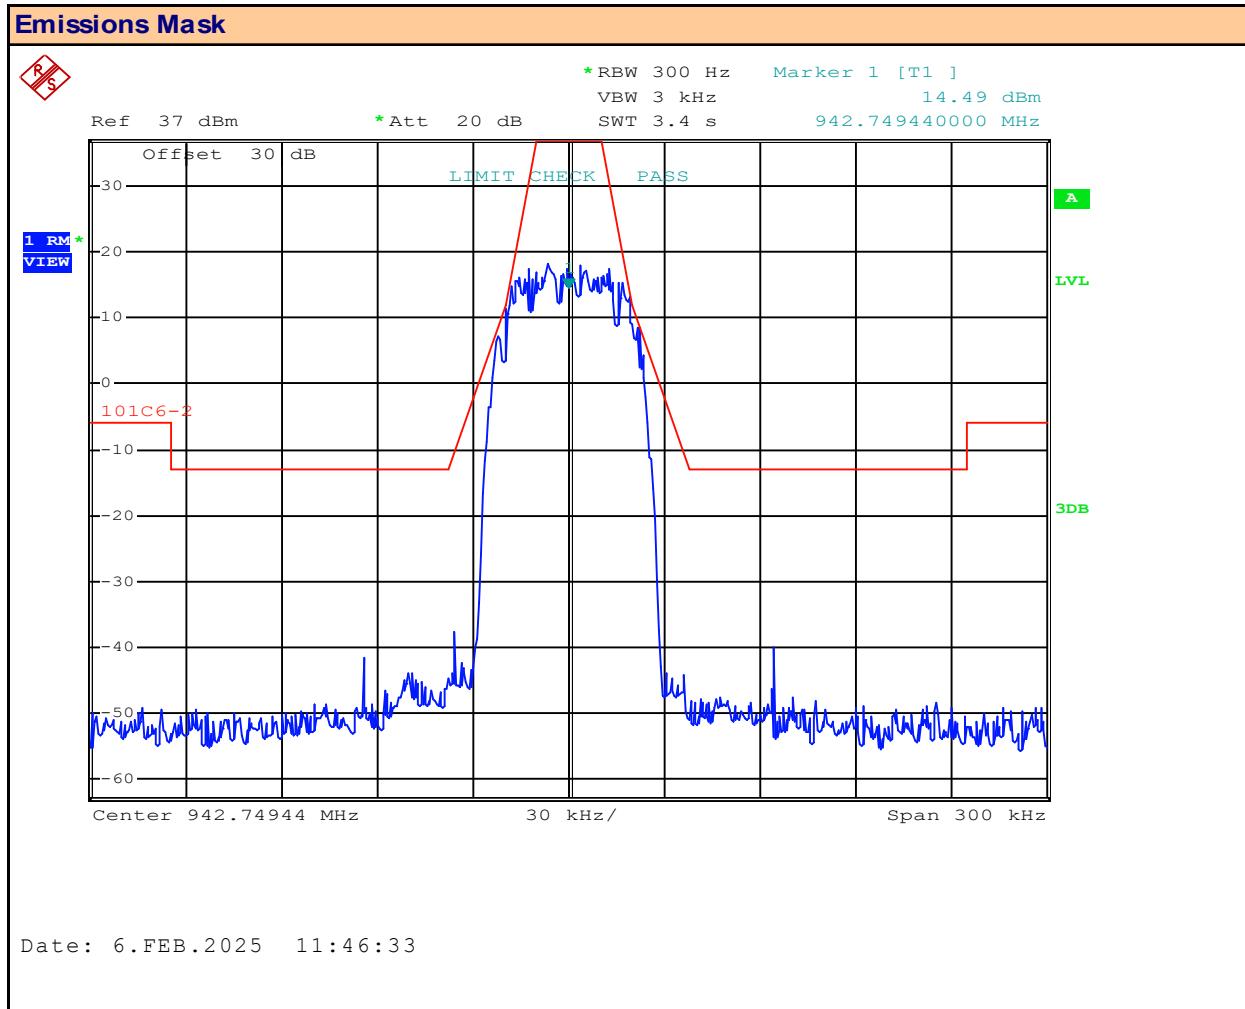
Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>25</b> kHz
Mask ID:	<b>6</b>	Modulation:	<b>16QAM</b>
		Mask Results:	<b>PASS</b>

**Plot 9.7 – Emissions Mask – 942.75MHz, 25kHz BW, 64QAM**


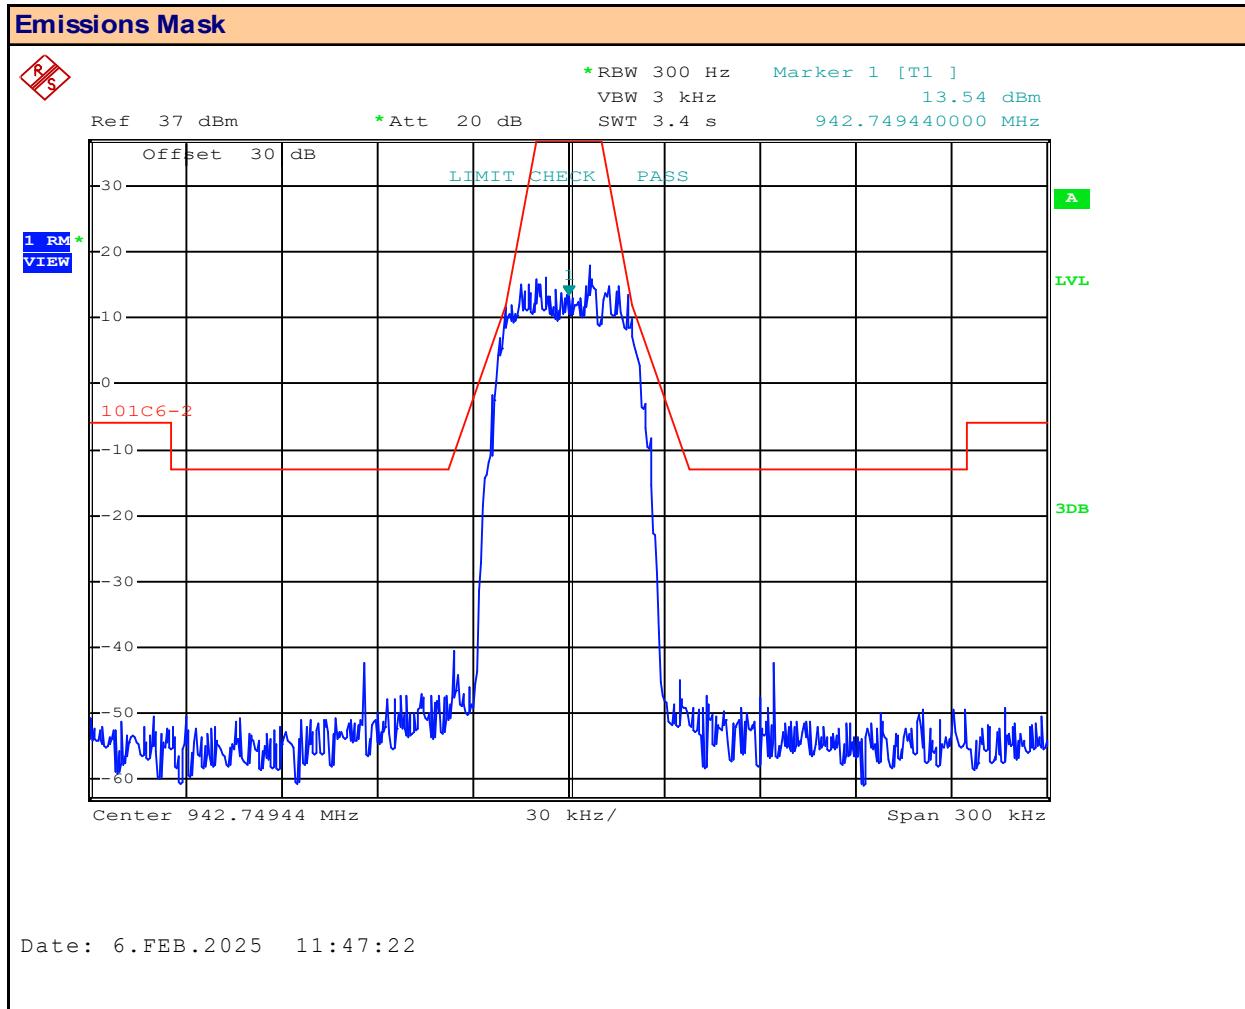
Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>25</b> kHz
Mask ID:	<b>6</b>	Modulation:	<b>64QAM</b>
Mask Results:	<b>PASS</b>		

**Plot 9.8 – Emissions Mask – 942.75MHz, 25kHz BW, 256QAM**


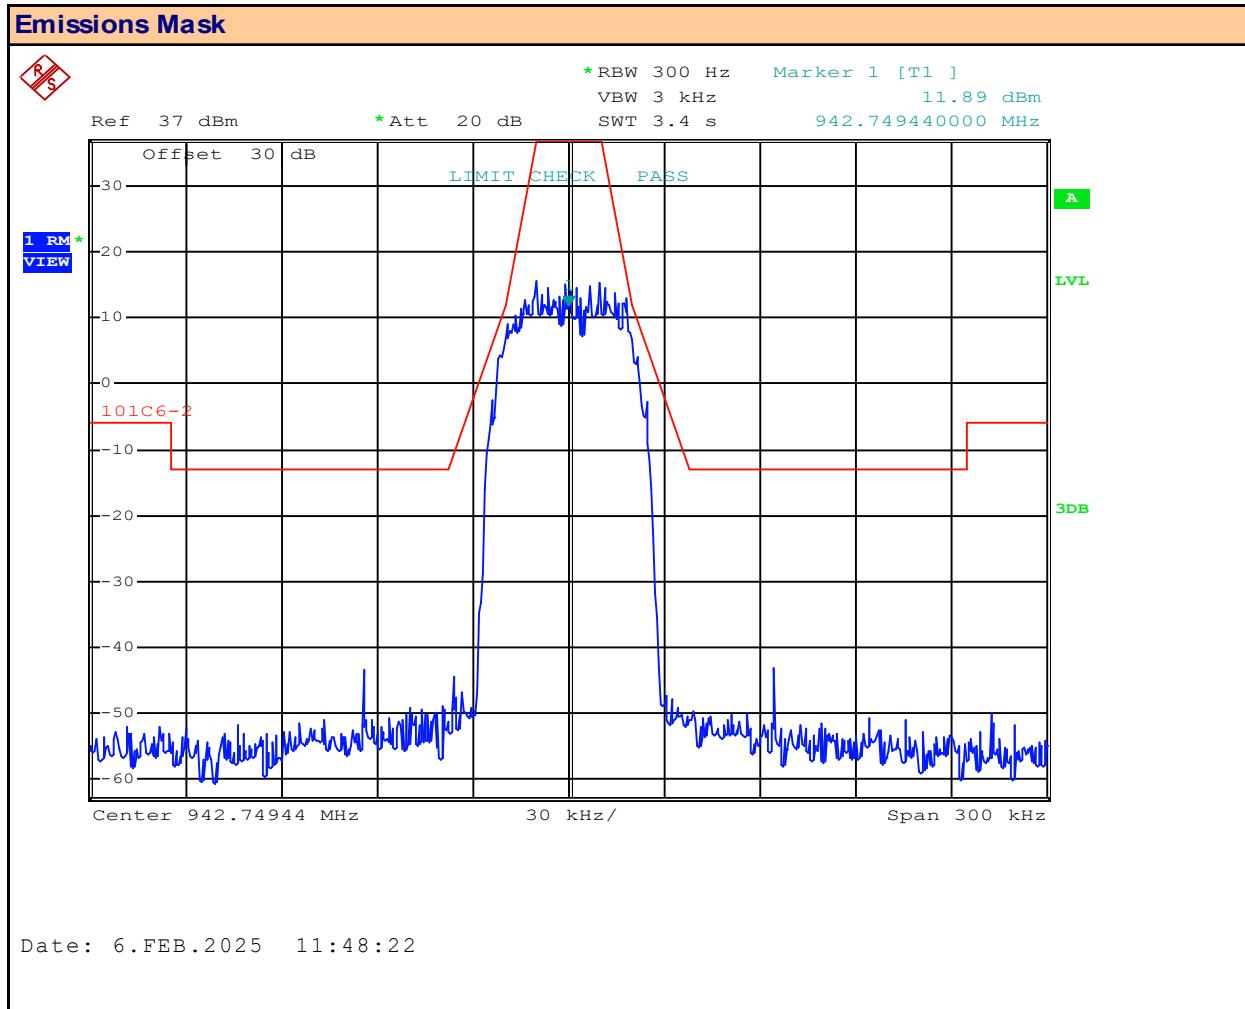
Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>25</b> kHz
Mask ID:	<b>6</b>	Modulation:	<b>256QAM</b>
		Mask Results:	<b>PASS</b>

**Plot 9.9 – Emissions Mask – 942.75MHz, 50kHz BW, QPSK**


Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>50</b> kHz
Mask ID:	<b>6</b>	Modulation:	<b>QPSK</b>
		Mask Results:	<b>PASS</b>

**Plot 9.10 – Emissions Mask – 942.75MHz, 50kHz BW, 16QAM**


Channel Frequency:	<b>942.75</b> MHz	Channel Bandwidth:	<b>50</b> kHz
Mask ID:	<b>6</b>	Modulation:	<b>16QAM</b>
		Mask Results:	<b>PASS</b>

**Plot 9.11 – Emissions Mask – 942.75MHz, 50kHz BW, 64QAM**

 Channel Frequency: **942.75** MHz

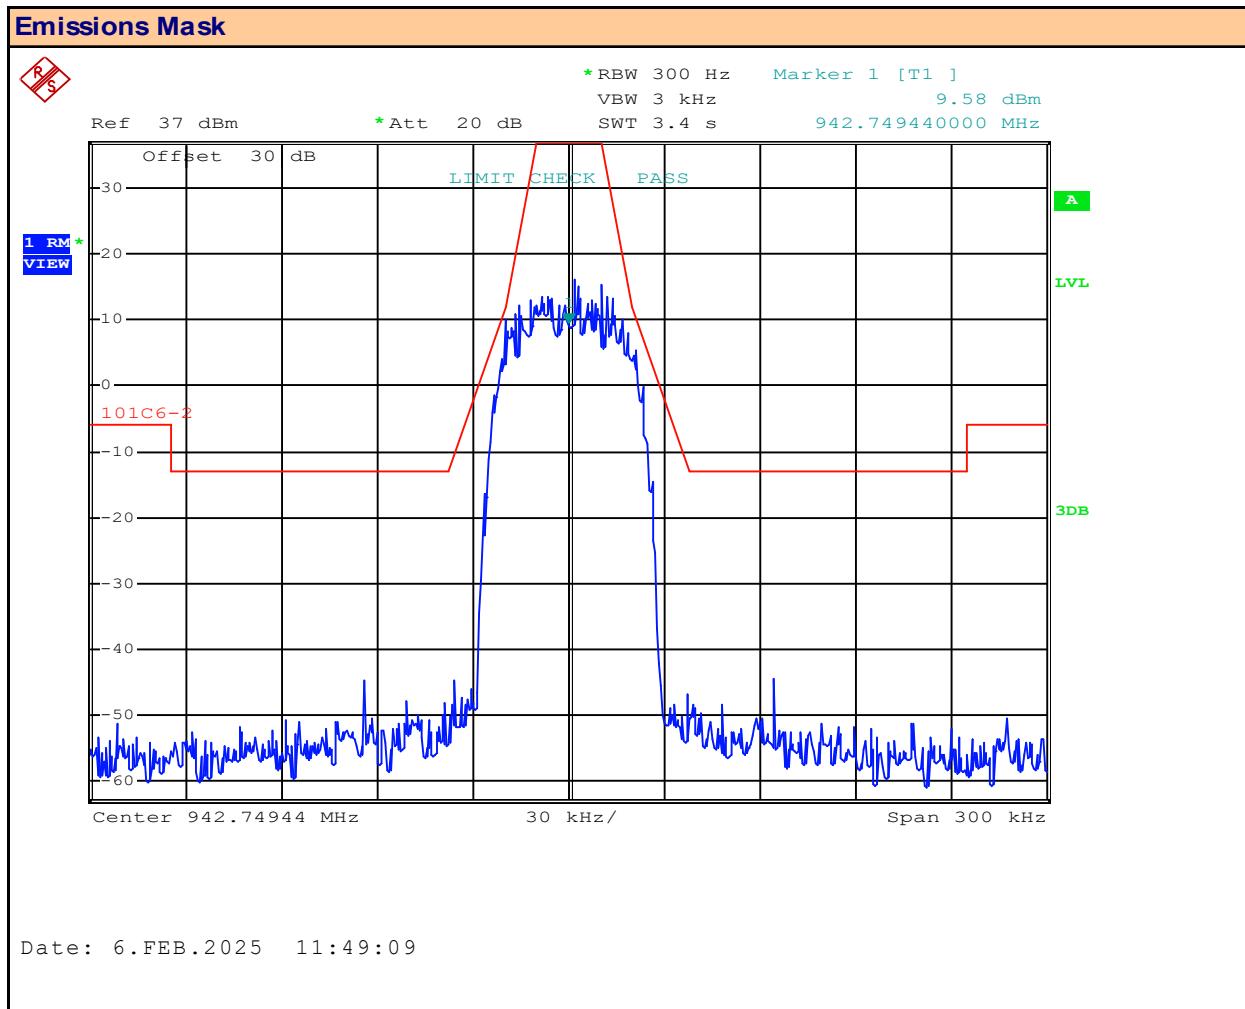
 Channel Bandwidth: **50** kHz

 Mask ID: **6**

 Modulation: **64QAM**

 Mask Results: **PASS**

#### Plot 9.12 – Emissions Mask – 942.75MHz, 50kHz BW, 256QAM



Date: 6.FEB.2025 11:49:09

Channel Frequency: **942.75** MHz

Channel Bandwidth:  kHz

Mask ID: 6

Modulation: 256QAM

Mask Results:   **PASS**

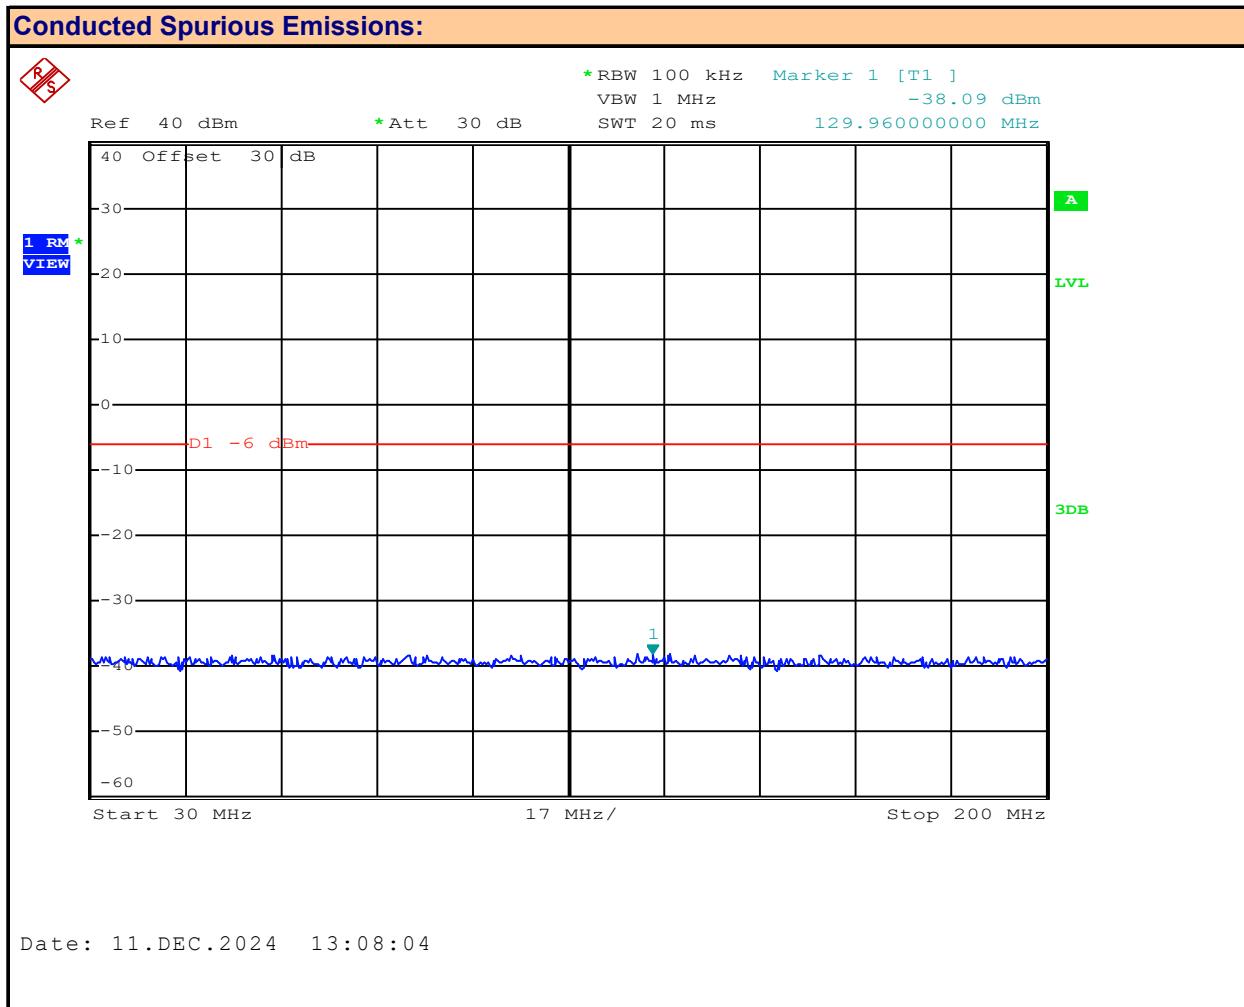
**Table 9.1 - Summary of Emissions Mask Measurements**

<b>Emissions Mask Results</b>					
<b>Channel Frequency (MHz)</b>	<b>Channel Bandwidth (kHz)</b>	<b>Modulation</b>	<b>Maks ID</b>	<b>Mask Results</b>	
942.75	12.5	QPSK	5	PASS	
		16QAM			
		64QAM			
		256QAM			
	25.0	QPSK	6		
		16QAM			
		64QAM			
		256QAM			
	50.0	QPSK	6		
		16QAM			
		64QAM			
		256QAM			
<b>Result:</b>			<b>Complies</b>		

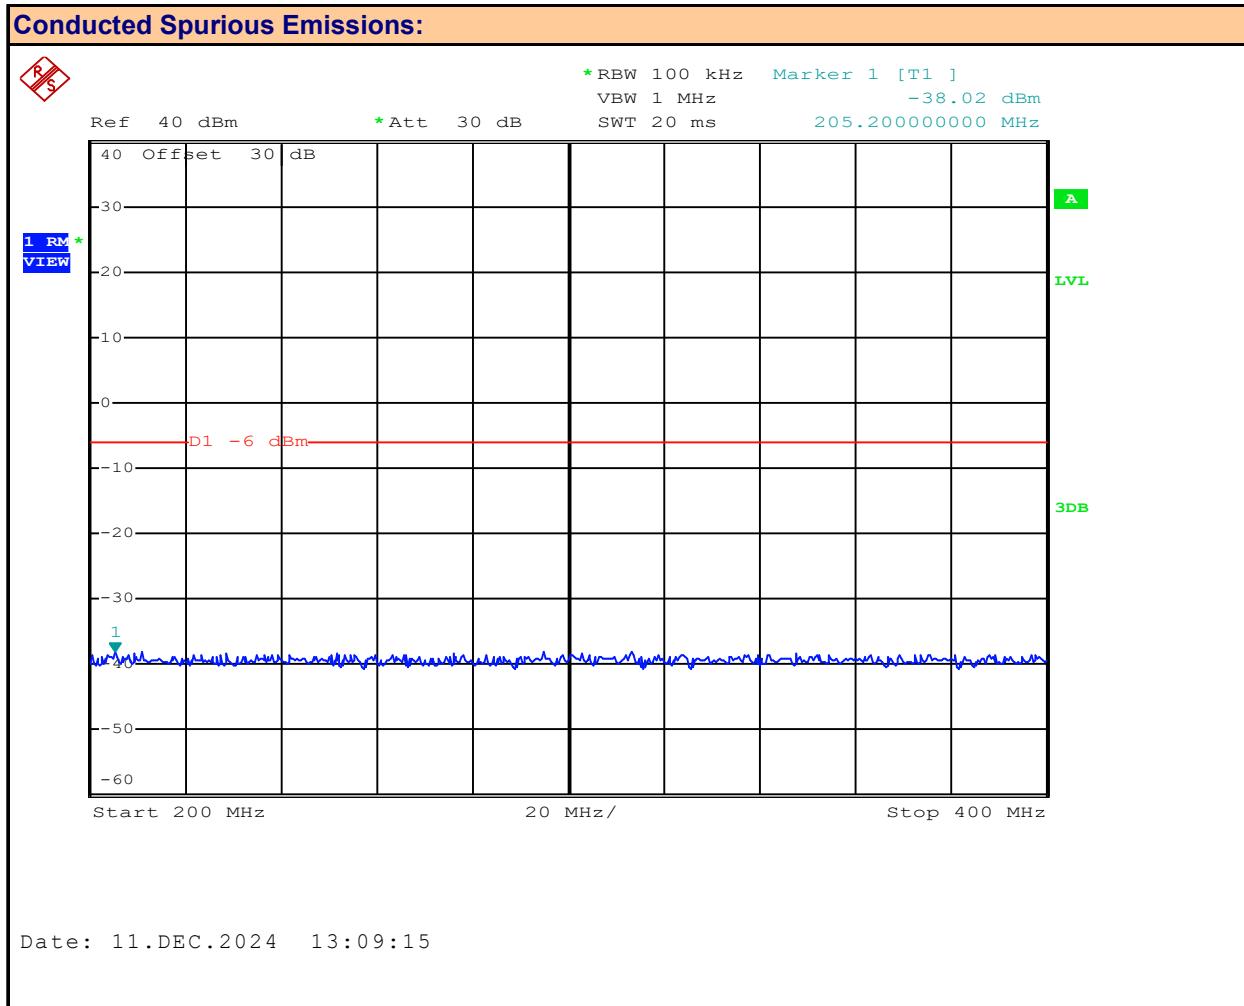
**10.0 CONDUCTED SPURIOUS EMISSIONS TO 10<sup>TH</sup> HARMONIC**

<b>Test Procedure</b>	
<b>Normative References</b>	<b>FCC 47 CFR §101.111</b>
	<b>ANSI C63.26</b>
<b>Requirement / Limits</b>	
47 CFR §101.111	<b>§101.111 Emission Mask</b>
	(a) The mean power of emissions must be attenuated below the mean output power of the transmitter in accordance with the following schedule:
	5) When using transmissions employing digital modulation techniques on the 900 MHz multiple address frequencies with a 12.5 KHz bandwidth, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) in accordance with the following schedule:
	(i) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 2.5 KHz up to and including 6.25 KHz: At least $53 \log_{10} (fd/2.5)$ decibels;
	(ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 6.25 KHz up to and including 9.5 KHz: At least $103 \log_{10} (fd/3.9)$ decibels;
	(iii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 9.5 KHz up to and including 15 KHz: At least $157 \log_{10} (fd/5.3)$ decibels; and
	(iv) On any frequency removed from the center of the authorized bandwidth by a displacement frequency greater than 15 KHz: At least 50 plus $10 \log_{10}(P)$ or 70 decibels, whichever is the lesser attenuation.
	(6) When using transmissions employing digital modulation techniques on the 900 MHz multiple address frequencies with a bandwidth greater than 12.5 KHz, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) in accordance with the following schedule:
	(i) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 5 KHz up to and including 10 KHz: At least $83 \log_{10} (fd/5)$ decibels;
	(ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 10 KHz up to and including 250 percent of the authorized bandwidth: At least $116 \log_{10} (fd/6.1)$ decibels or 50 plus $10 \log_{10} (P)$ or 70 decibels, whichever is the lesser attenuation; and
<b>Test Setup</b>	<b>Appendix A - Figure A.1</b>
<b>Measurement Procedure</b>	
<p>The DUT was connected to a Spectrum Analyzer via a 30dB attenuator. The DUT was configured to transmit modulated at its highest output power. The emissions mask was created in the SA and the SA Reference Level was set to the DUT's maximum rated power. The SA's Limit Check (Pass/Fail) was enabled and the results recorded for each applicable bandwidth and modulation.</p>	

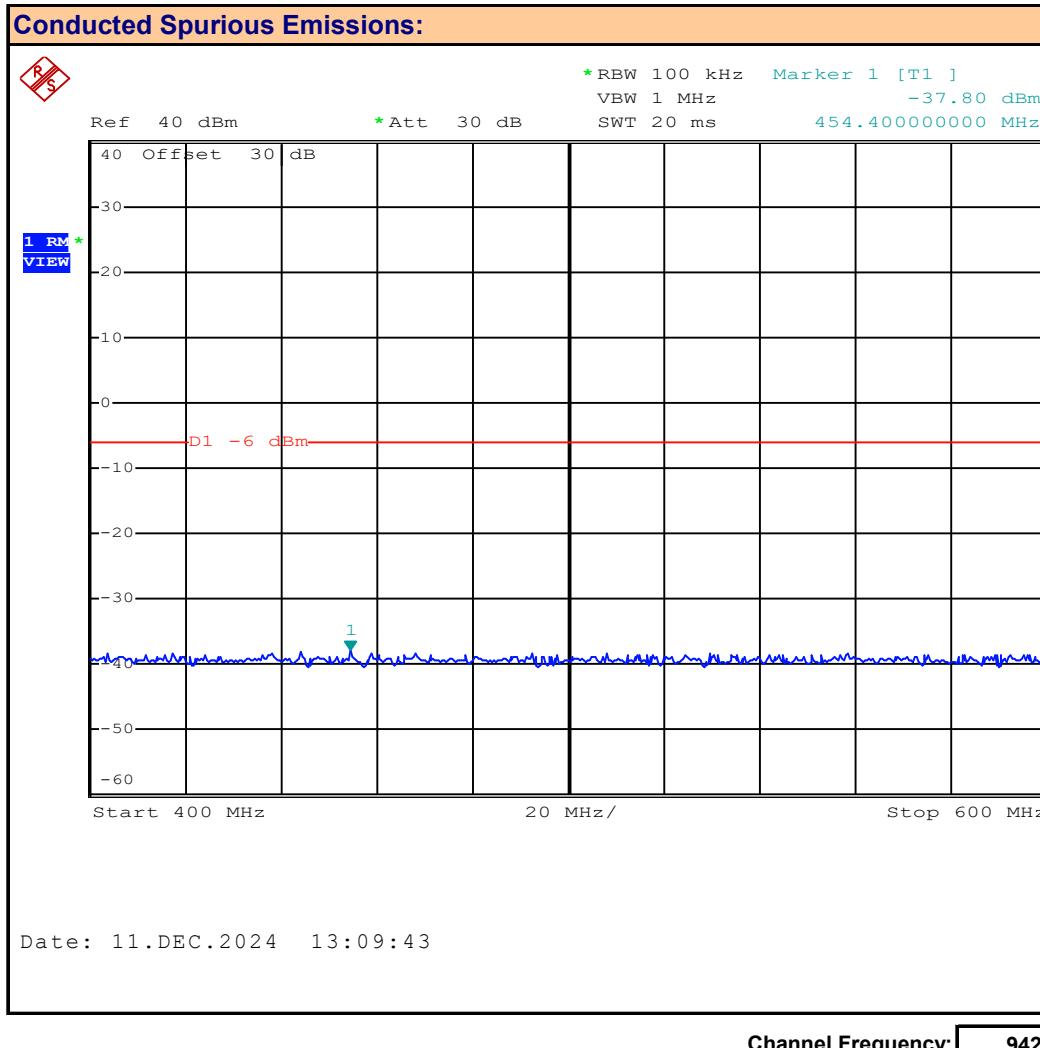
**Plot 10.1 – Conducted Spurious Emissions 942.75MHz, 30-200MHz**



Channel Frequency: **942.75** MHz  
 Modulation: **CW**  
 Emission Frequency: **ND** MHz      Measured Emission: **ND** dBm

**Plot 10.2 – Conducted Spurious Emissions 942.75MHz, 200-400MHz**


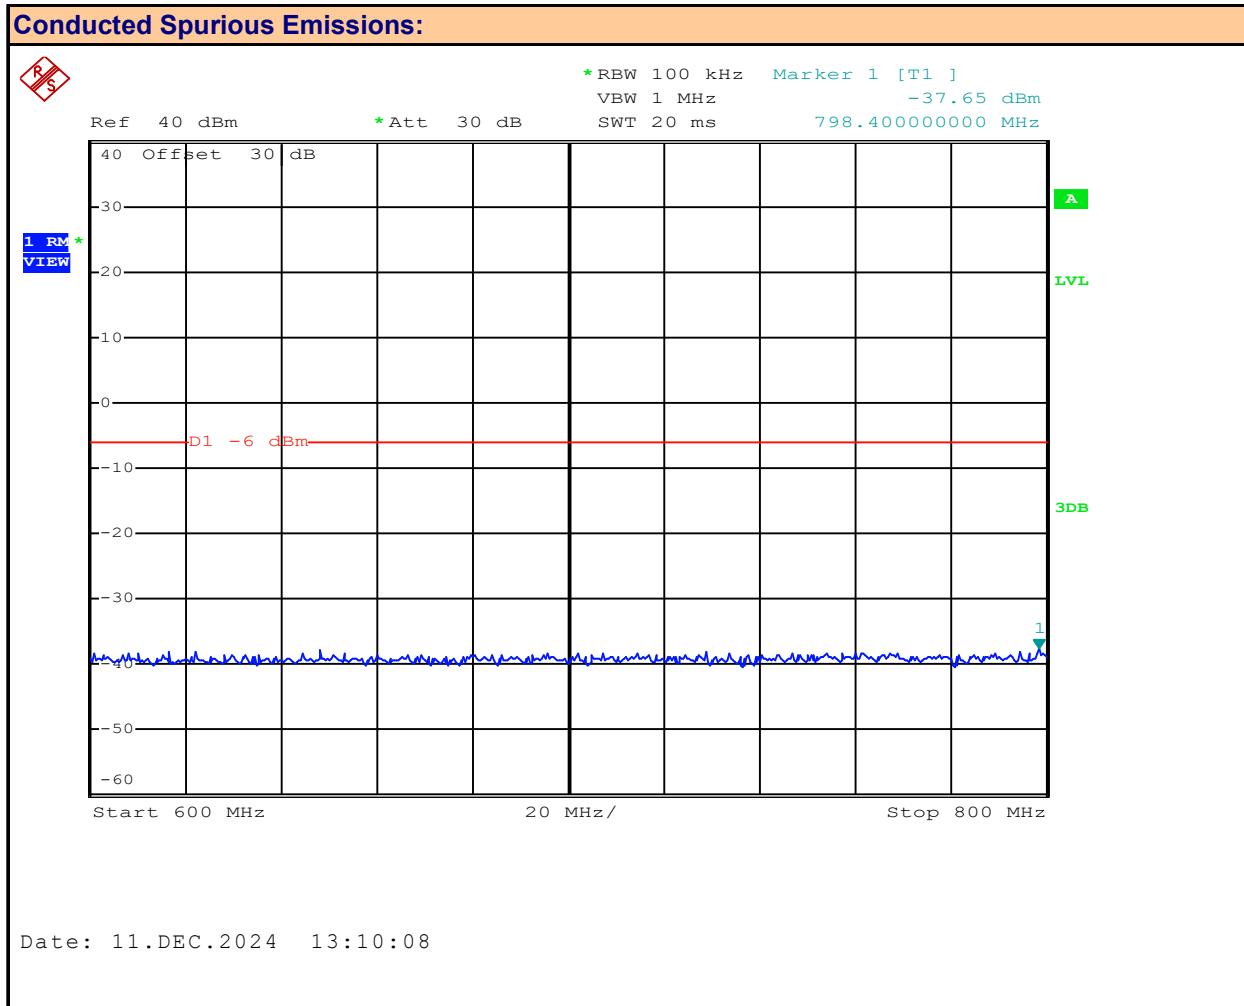
Channel Frequency: **942.75** MHz  
 Modulation: **CW**  
 Emission Frequency: **ND** MHz Measured Emission: **ND** dBm

**Plot 10.3 – Conducted Spurious Emissions 942.75MHz, 400-600MHz**

 Channel Frequency: **942.75** MHz

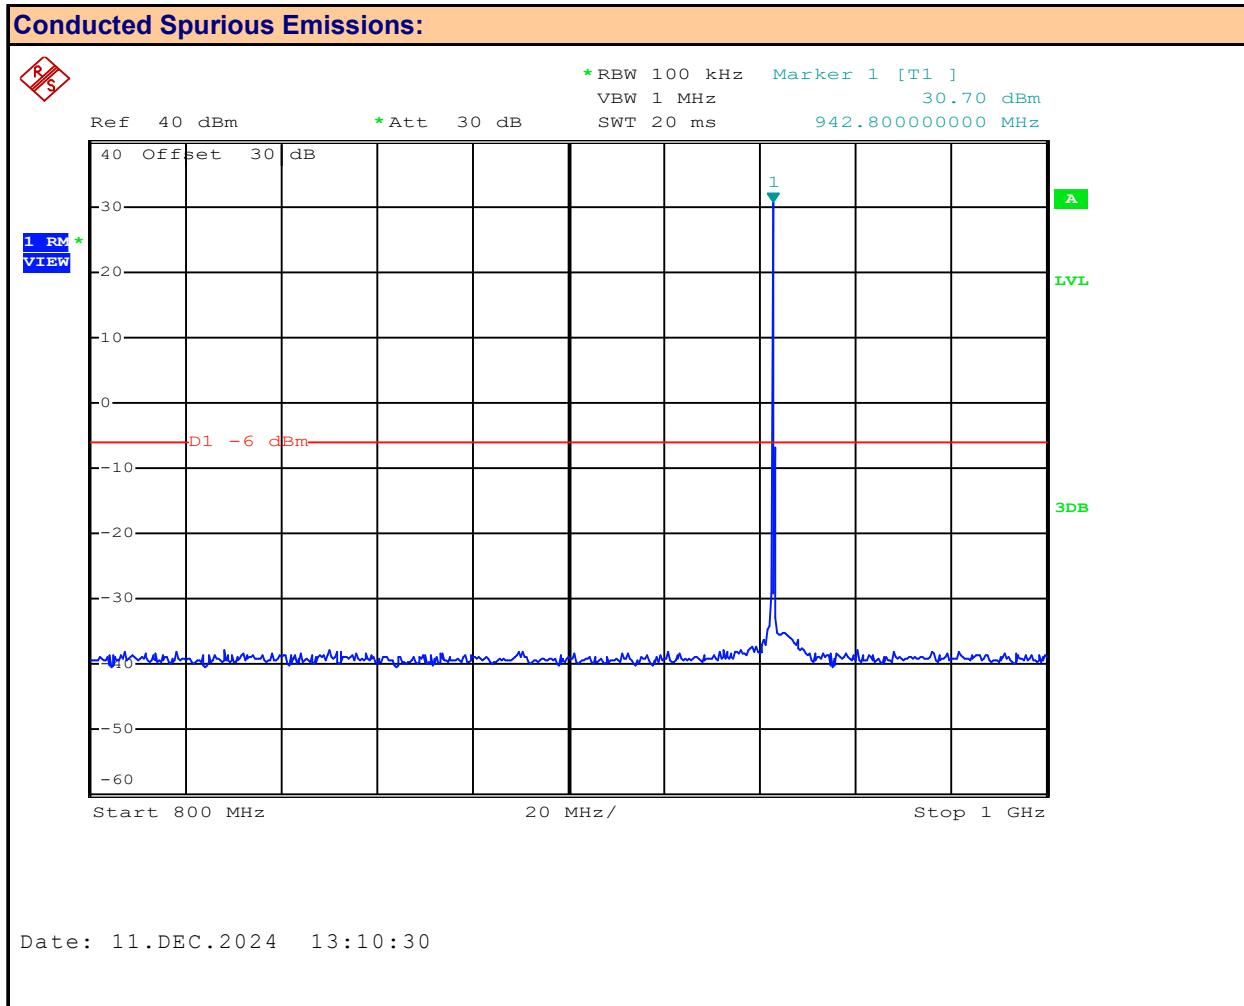
 Modulation: **CW**

 Emission Frequency: **ND** MHz

 Measured Emission: **ND** dBm

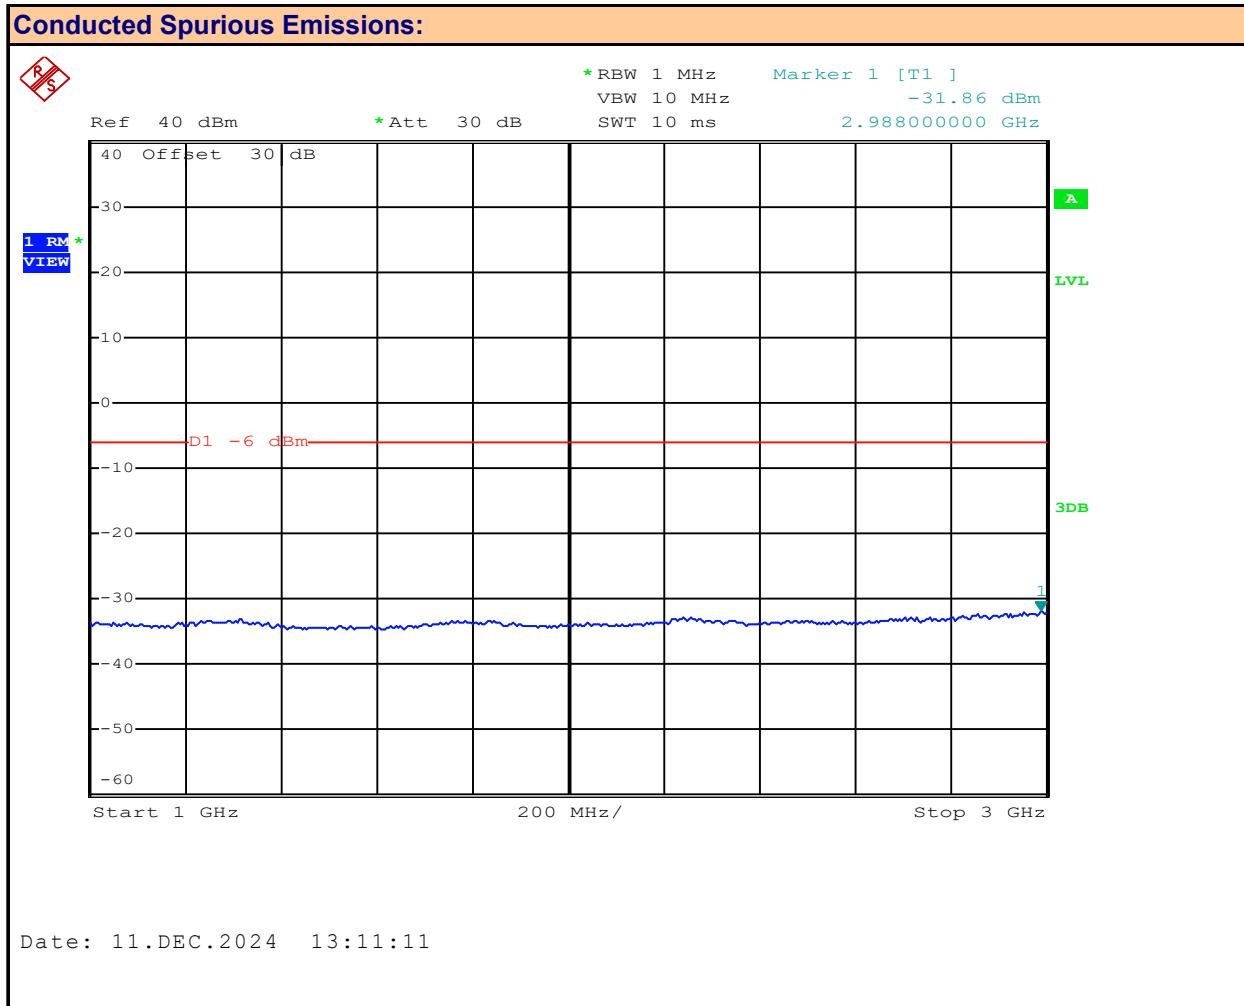
**Plot 10.4 – Conducted Spurious Emissions 942.75MHz, 600-800MHz**


Channel Frequency: **942.75** MHz  
 Modulation: **CW**  
 Emission Frequency: **ND** MHz Measured Emission: **ND** dBm

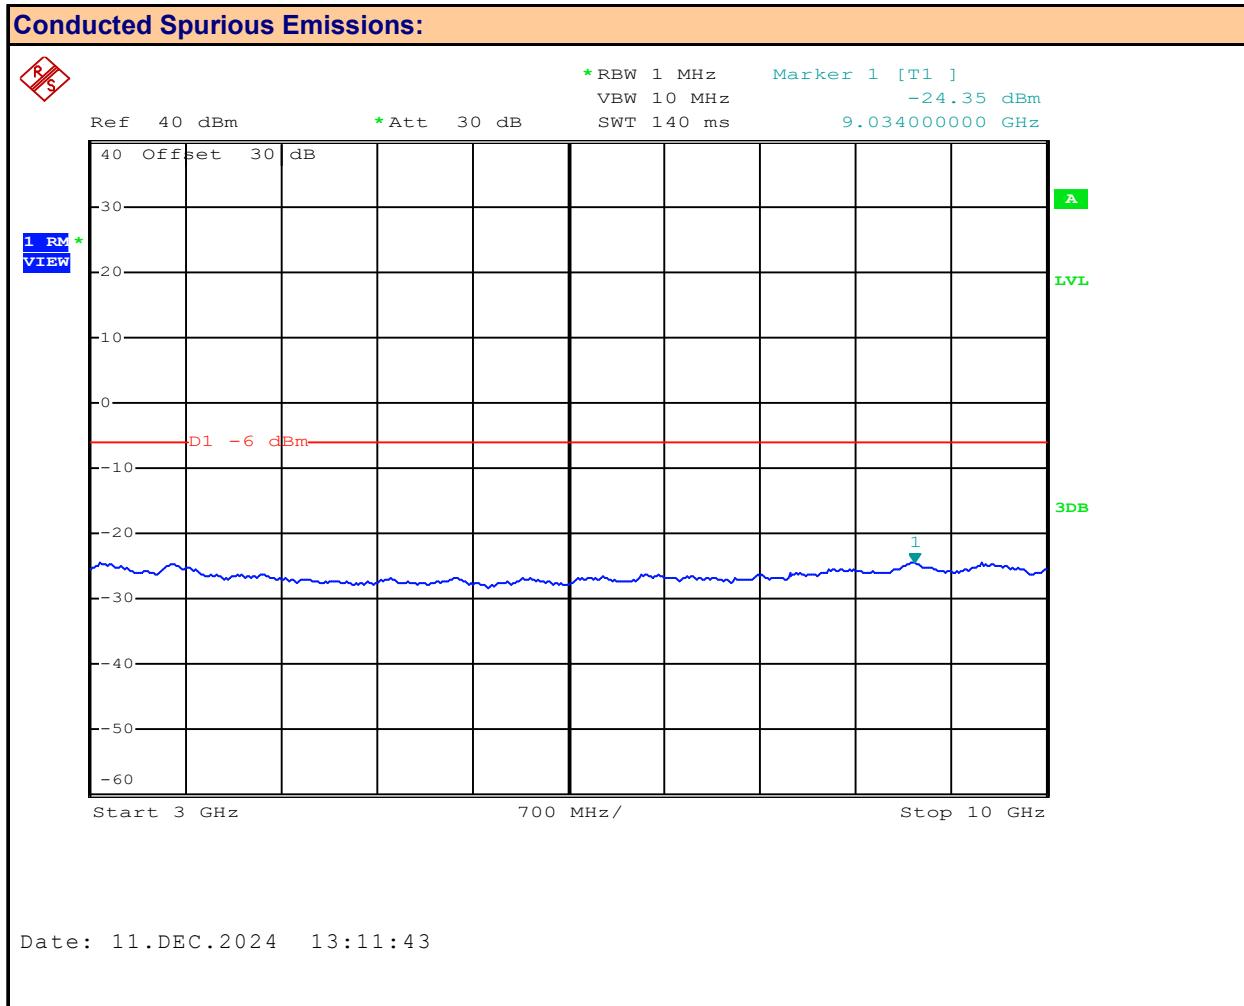
**Plot 10.4 – Conducted Spurious Emissions 942.75MHz, 800-1000MHz**

**Marker 1 = Fundamental**
**Channel Frequency:** **942.75** MHz

**Modulation:** **CW**
**Emission Frequency:** **ND** MHz

**Measured Emission:** **ND** dBm

**Plot 10.5 – Conducted Spurious Emissions 942.75MHz, 1 – 3GHz**


Channel Frequency: **942.75** MHz  
 Modulation: **CW**  
 Emission Frequency: **ND** MHz      Measured Emission: **ND** dBm

**Plot 10.6 – Conducted Spurious Emissions 942.75MHz, 3 – 10GHz**


Channel Frequency: **942.75** MHz  
 Modulation: **CW**  
 Emission Frequency: **ND** MHz Measured Emission: **ND** dBm

**Table 10 - Summary of Conducted Spurious Emissions Measurements**

Conducted Spurious Emissions Measurement Results:							
Frequency (MHz)	Modulation	Emission Power [P <sub>Em</sub> ] (dBm)	Emission Frequency (MHz)	Fundamental Measurment [P <sub>Fund</sub> ] (dBm)	Attenuation [Atten] (dB)	Limit (dB)	Margin (dB)
942.75	CW	ND	ND	37.00	n/a	43	n/a
Results:						<b>Complies</b>	

 Attenuation [Atten] = [P<sub>Fund</sub>] - [P<sub>Em</sub>]

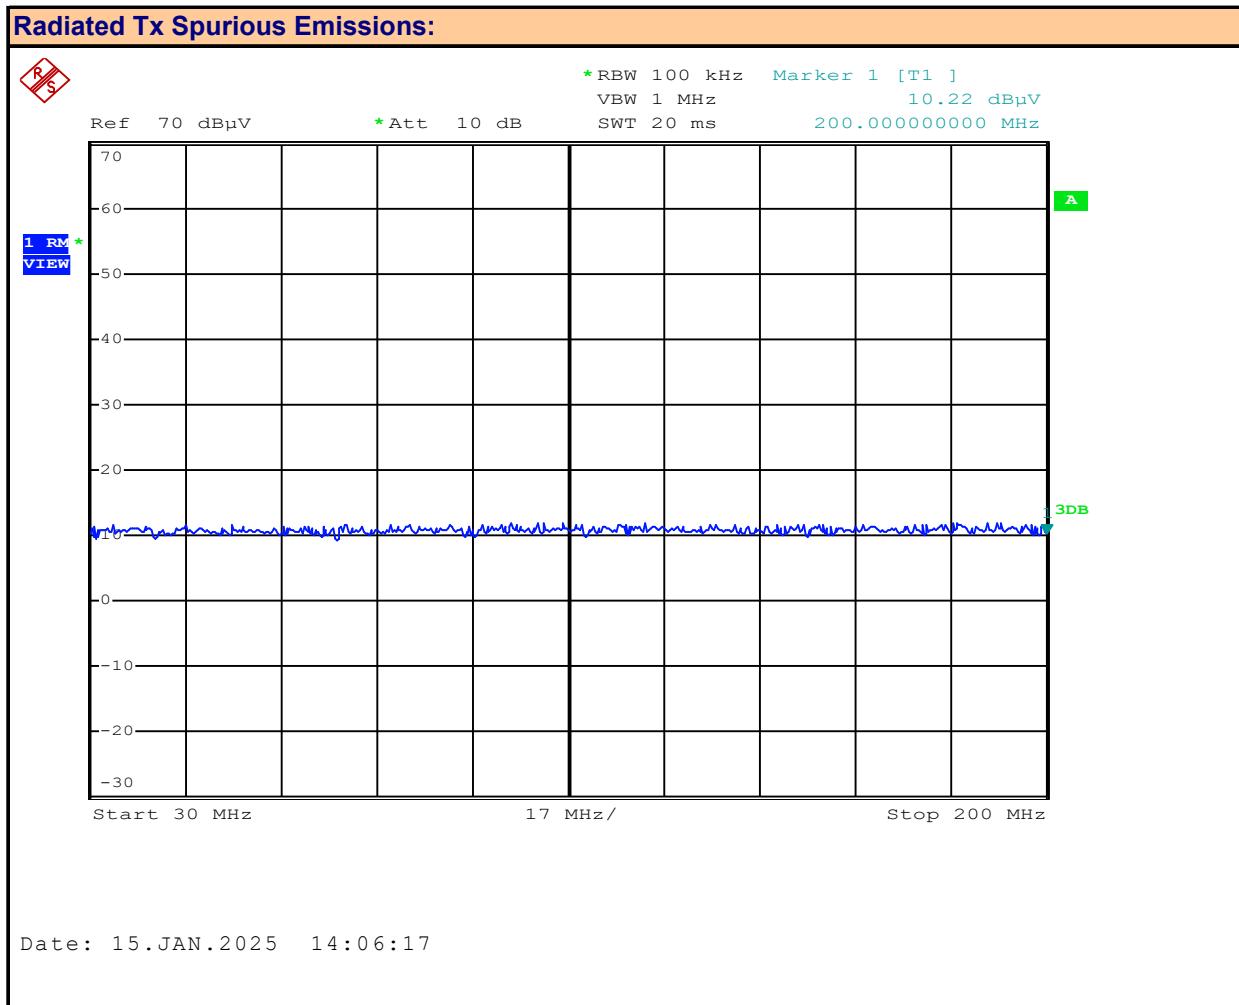
Margin = Attenuation - Limit

ND = None Detected

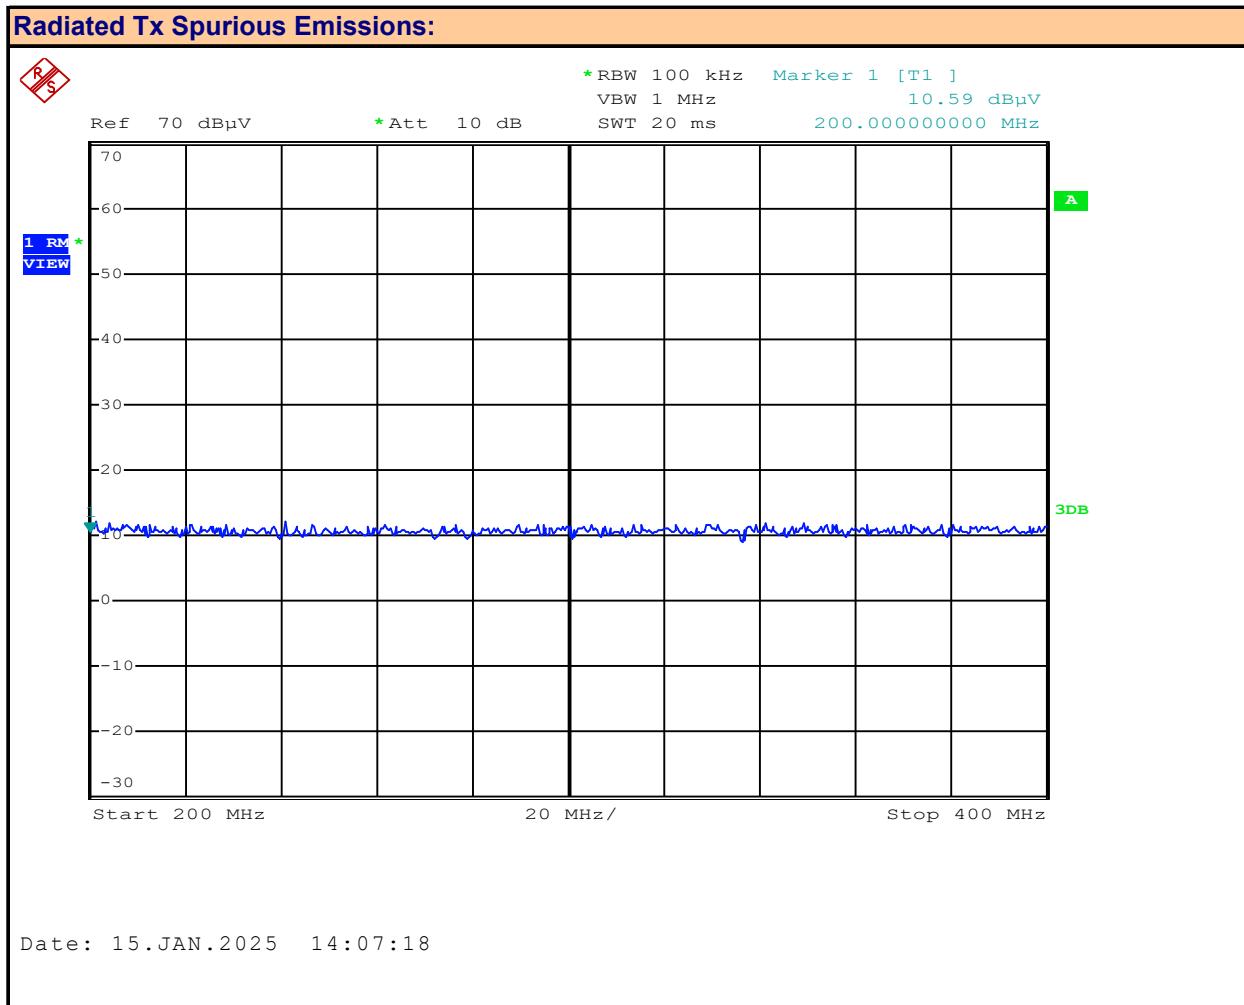
n/a = Not Applicable

## 11.0 RADIATED TX SPURIOUS EMISSIONS

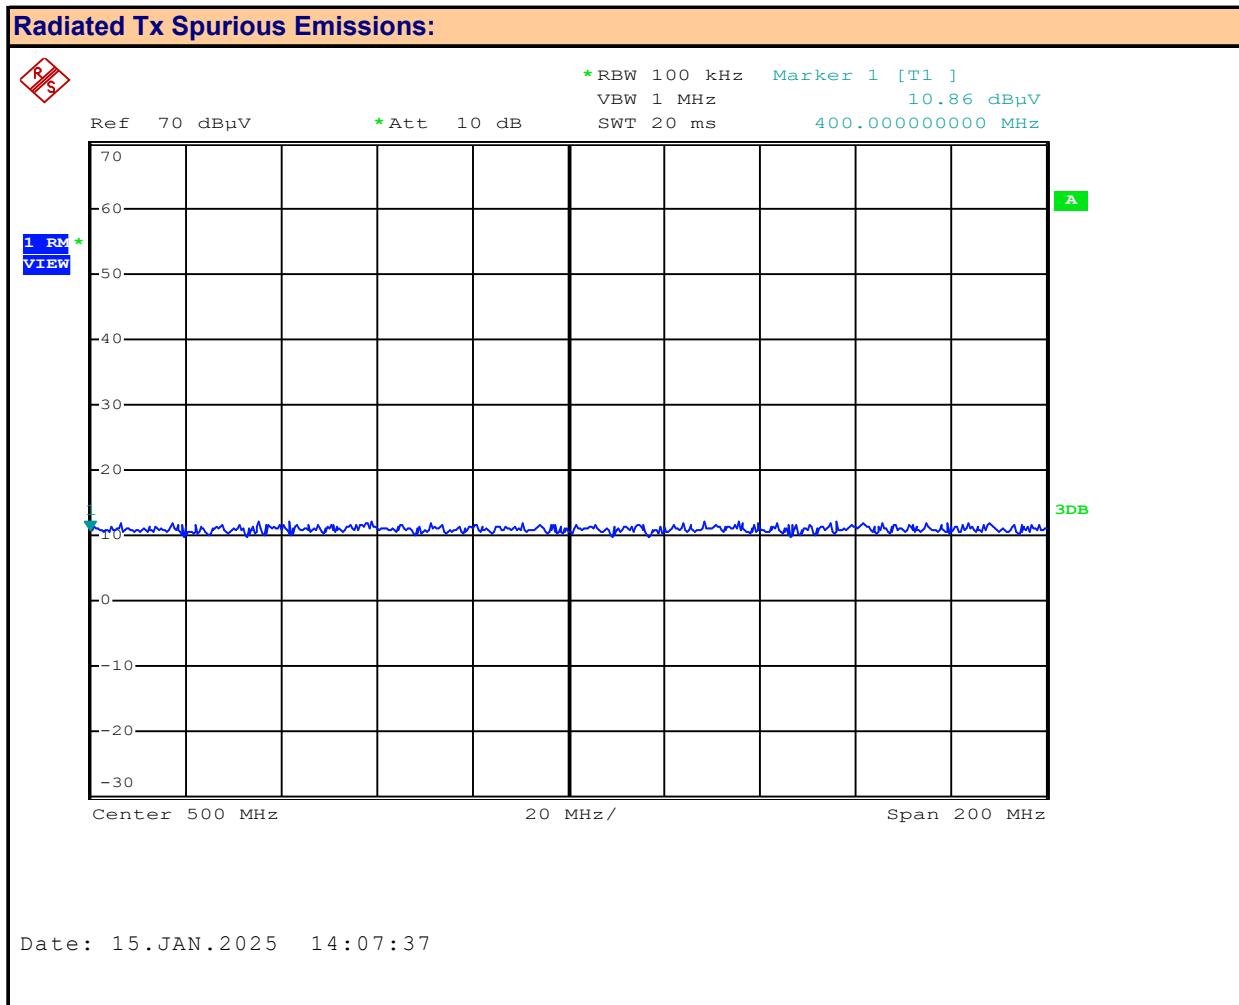
Test Procedure	
Normative References	FCC 47 CFR §101.111
	ANSI C63.26
Requirement / Limits	
47 CFR §101.111	<p><b>§101.111 Emission Mask</b></p> <p>(a) The mean power of emissions must be attenuated below the mean output power of the transmitter in accordance with the following schedule:</p> <p>5) When using transmissions employing digital modulation techniques on the 900 MHz multiple address frequencies with a 12.5 KHz bandwidth, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) in accordance with the following schedule:</p> <p>(i) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 2.5 KHz up to and including 6.25 KHz: At least <math>53 \log_{10} (fd/2.5)</math> decibels;</p> <p>(ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 6.25 KHz up to and including 9.5 KHz: At least <math>103 \log_{10} (fd/3.9)</math> decibels;</p> <p>(iii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 9.5 KHz up to and including 15 KHz: At least <math>157 \log_{10} (fd/5.3)</math> decibels; and</p> <p>(iv) On any frequency removed from the center of the authorized bandwidth by a displacement frequency greater than 15 KHz: At least 50 plus <math>10 \log_{10}(P)</math> or 70 decibels, whichever is the lesser attenuation.</p> <p>(6) When using transmissions employing digital modulation techniques on the 900 MHz multiple address frequencies with a bandwidth greater than 12.5 KHz, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) in accordance with the following schedule:</p> <p>(i) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 5 KHz up to and including 10 KHz: At least <math>83 \log_{10} (fd/5)</math> decibels;</p> <p>(ii) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 10 KHz up to and including 250 percent of the authorized bandwidth: At least <math>116 \log_{10} (fd/6.1)</math> decibels or 50 plus <math>10 \log_{10} (P)</math> or 70 decibels, whichever is the lesser attenuation; and</p>
Test Setup	Appendix A - Figure A.2 to A.4
Measurement Procedure	
<p>The DUT was connected to a Spectrum Analyzer via a 30dB attenuator. The DUT was configured to transmit modulated at its highest output power. The emissions mask was created in the SA and the SA Reference Level was set to the DUT's maximum rated power. The SA's Limit Check (Pass/Fail) was enabled and the results recorded for each applicable bandwidth and modulation.</p>	

**Plot 11.1 – Radiated Tx Emissions, 929.5MHz, Horizontal, 30-200MHz**


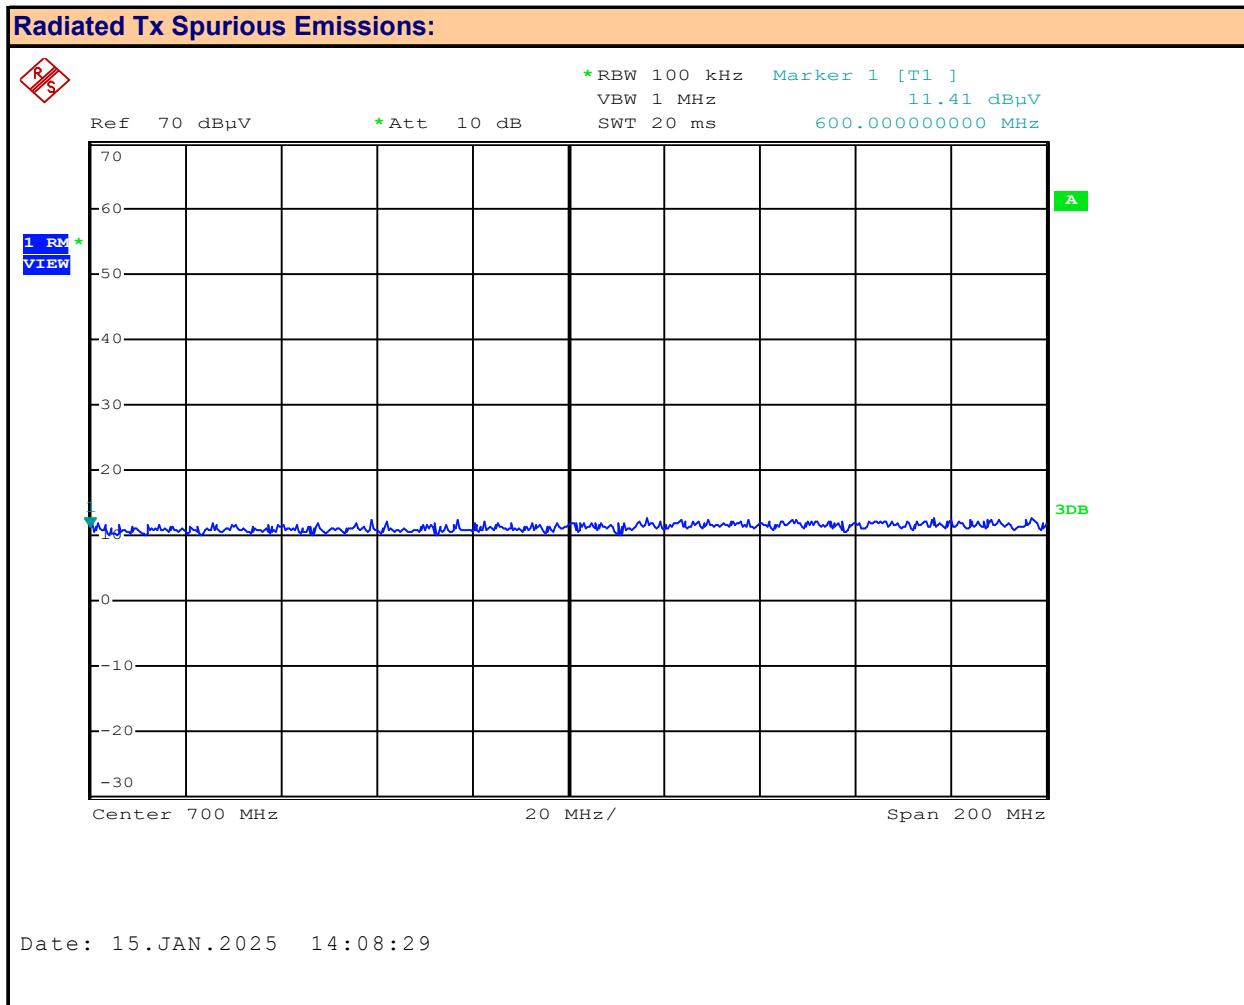
Antenna Polarization:	Horizontal	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
		Measured Emission:	ND	dB $\mu$ V

**Plot 11.2 – Radiated Tx Emissions, 929.5MHz, Horizontal, 200-400MHz**


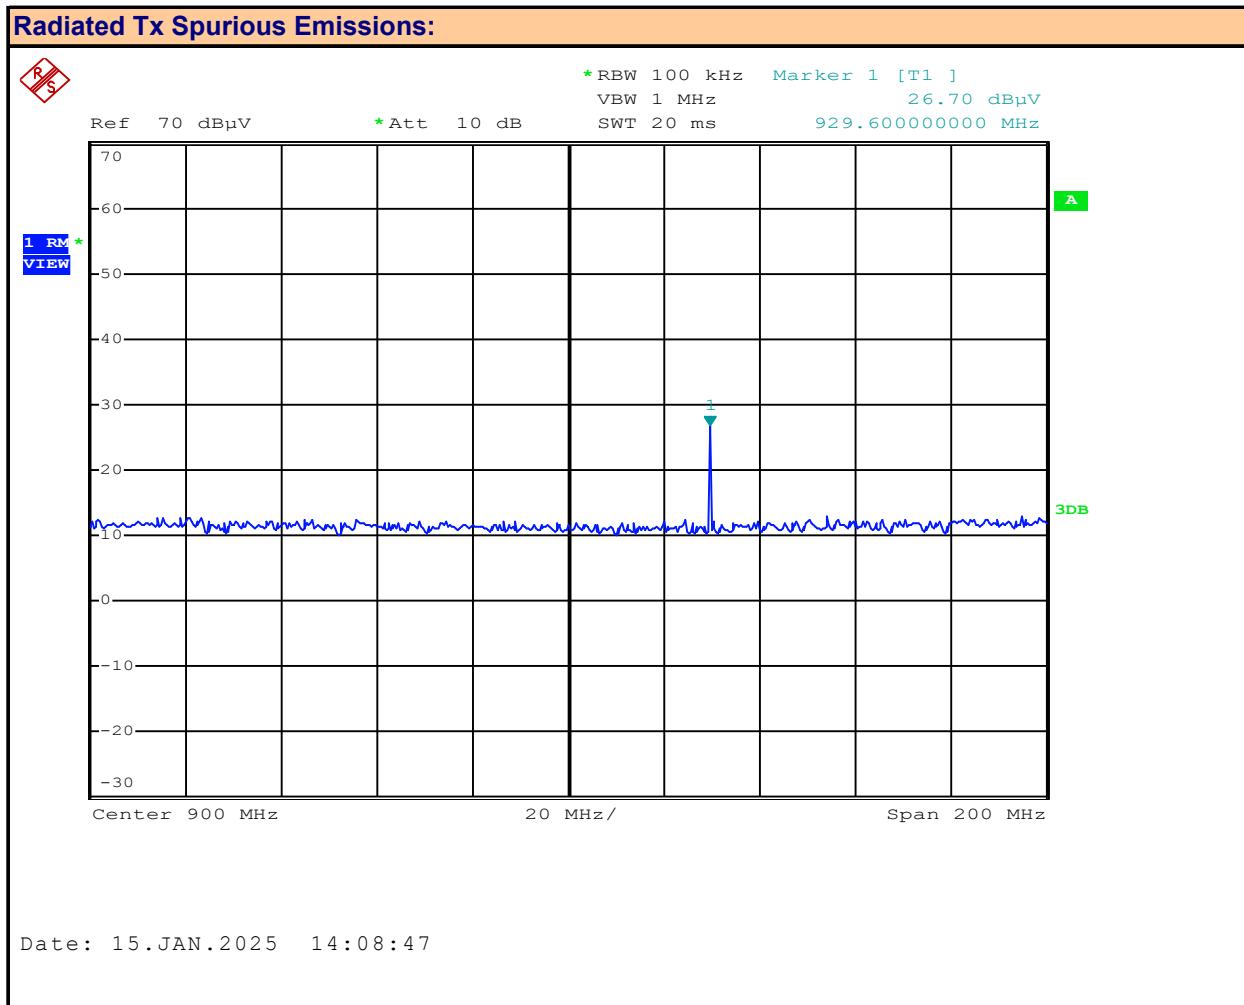
Antenna Polarization:	Horizontal	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
			Measured Emission:	ND
			dBuV	

**Plot 11.3 – Radiated Tx Emissions, 929.5MHz, Horizontal, 400-600MHz**


Antenna Polarization:	Horizontal	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
		Measured Emission:	ND	dB $\mu$ V

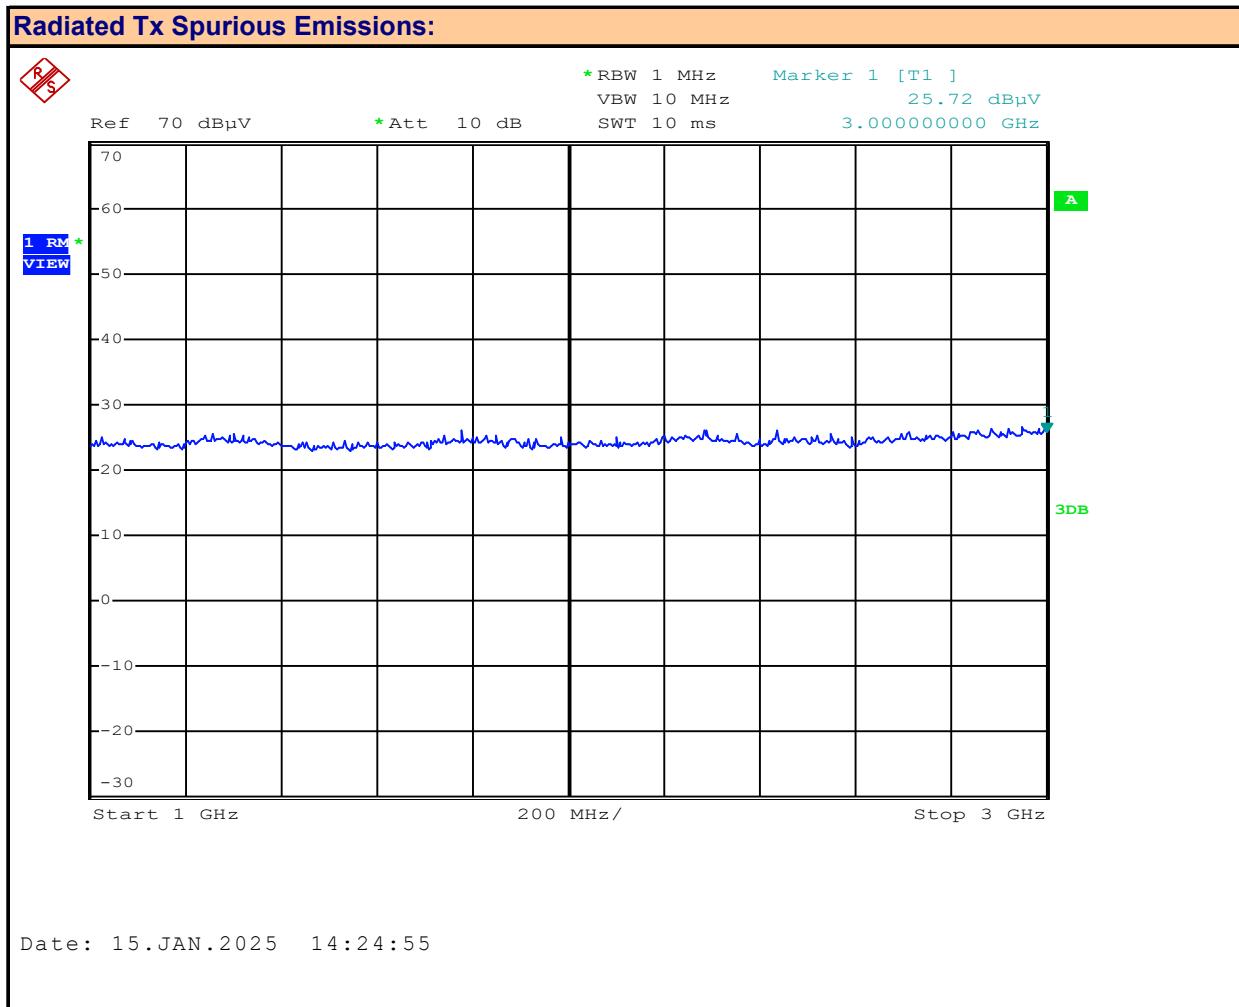
**Plot 11.4 – Radiated Tx Emissions, 929.5MHz, Horizontal, 600-800MHz**


Antenna Polarization:	Horizontal	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
		Measured Emission:	ND	dB $\mu$ V

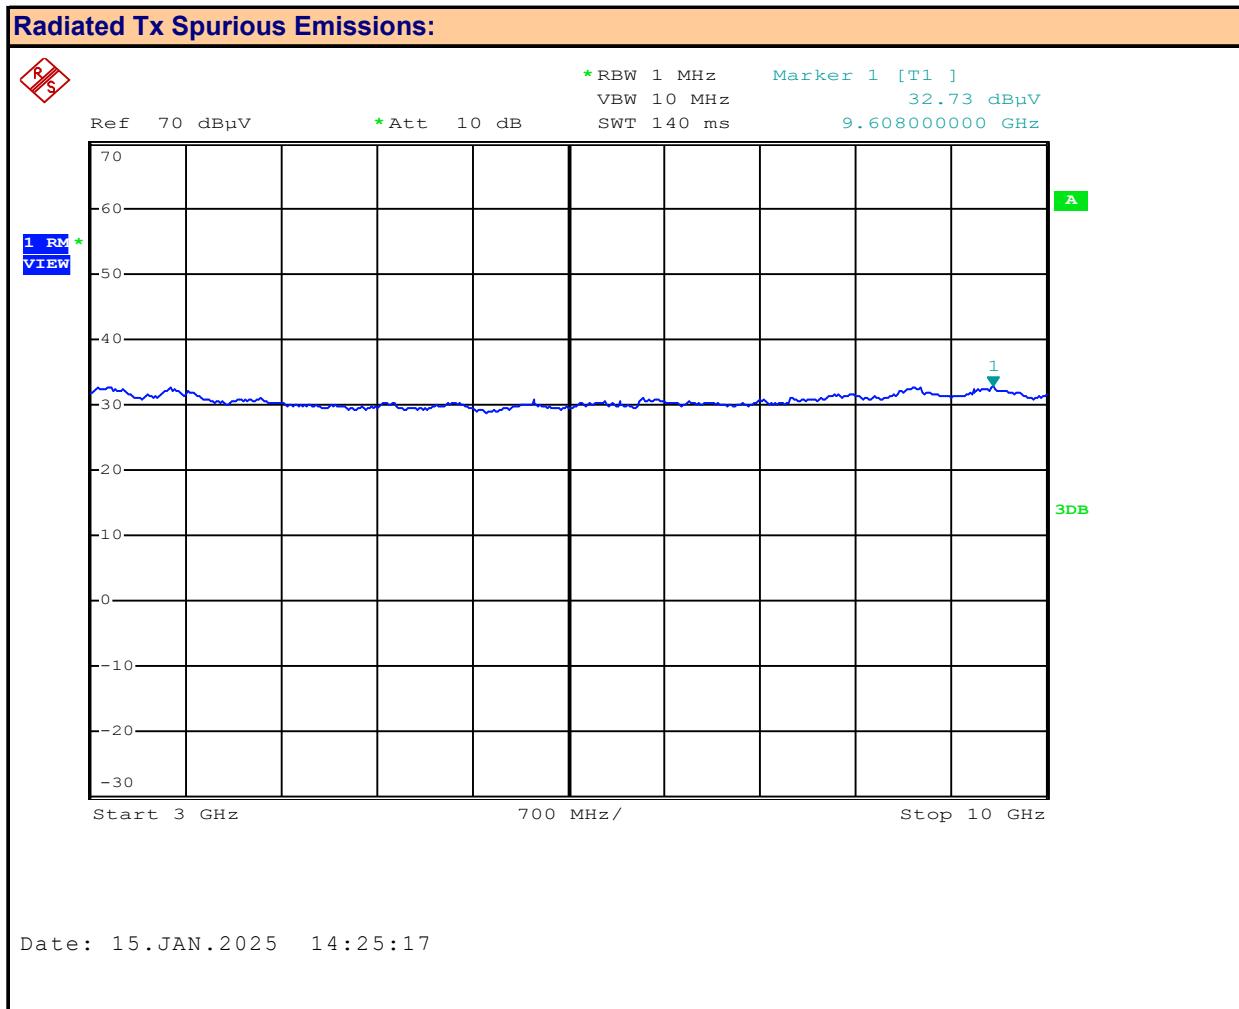
**Plot 11.5 – Radiated Tx Emissions, 929.5MHz, Horizontal, 800-1000MHz**


Antenna Polarization: **Horizontal**  
 Emission Frequency: **ND** MHz  
 Marker 1 = Fundamental

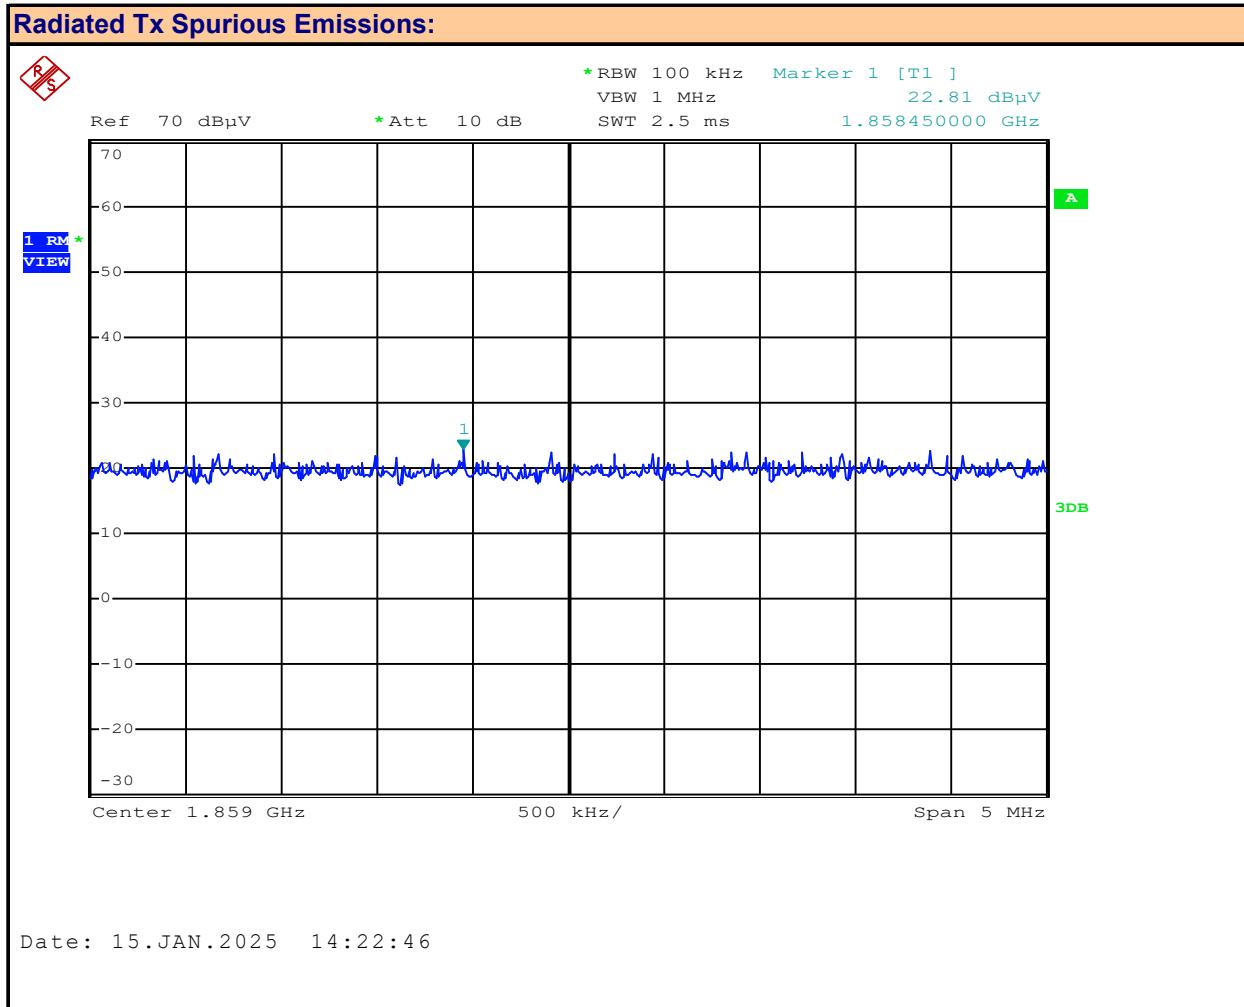
Channel Frequency: **929.5** MHz  
 Modulation: **CW**  
 Measured Emission: **ND** dB $\mu$ V

**Plot 11.6 – Radiated Tx Emissions, 929.5MHz, Horizontal, 1-3GHz**


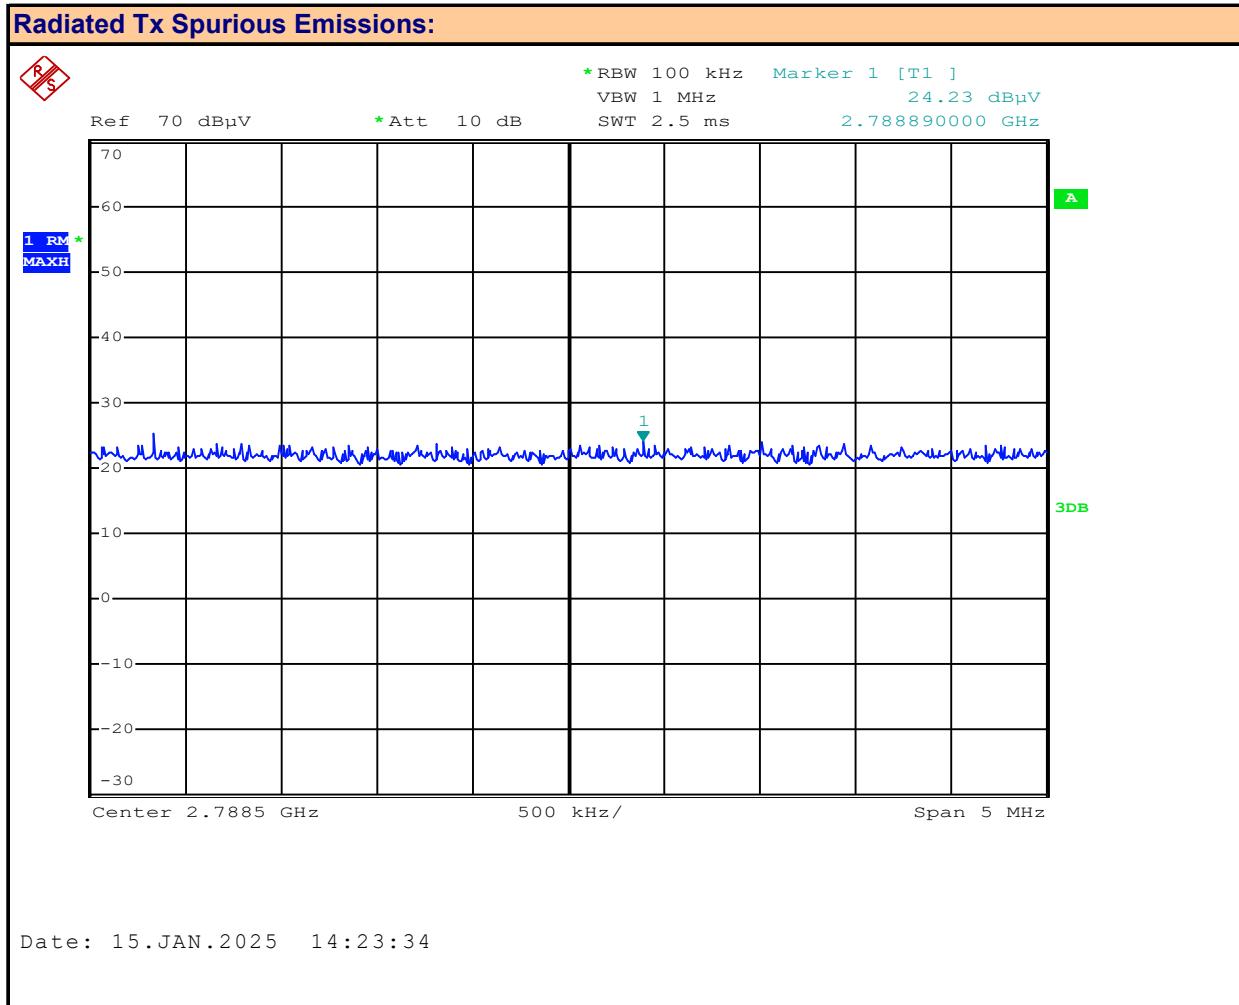
Antenna Polarization: **Horizontal**      Channel Frequency: **929.5** MHz  
 Emission Frequency: **ND** MHz      Modulation: **CW**  
 Measured Emission: **ND** dB $\mu$ V

**Plot 11.7 – Radiated Tx Emissions, 929.5MHz, Horizontal, 3-10GHz**


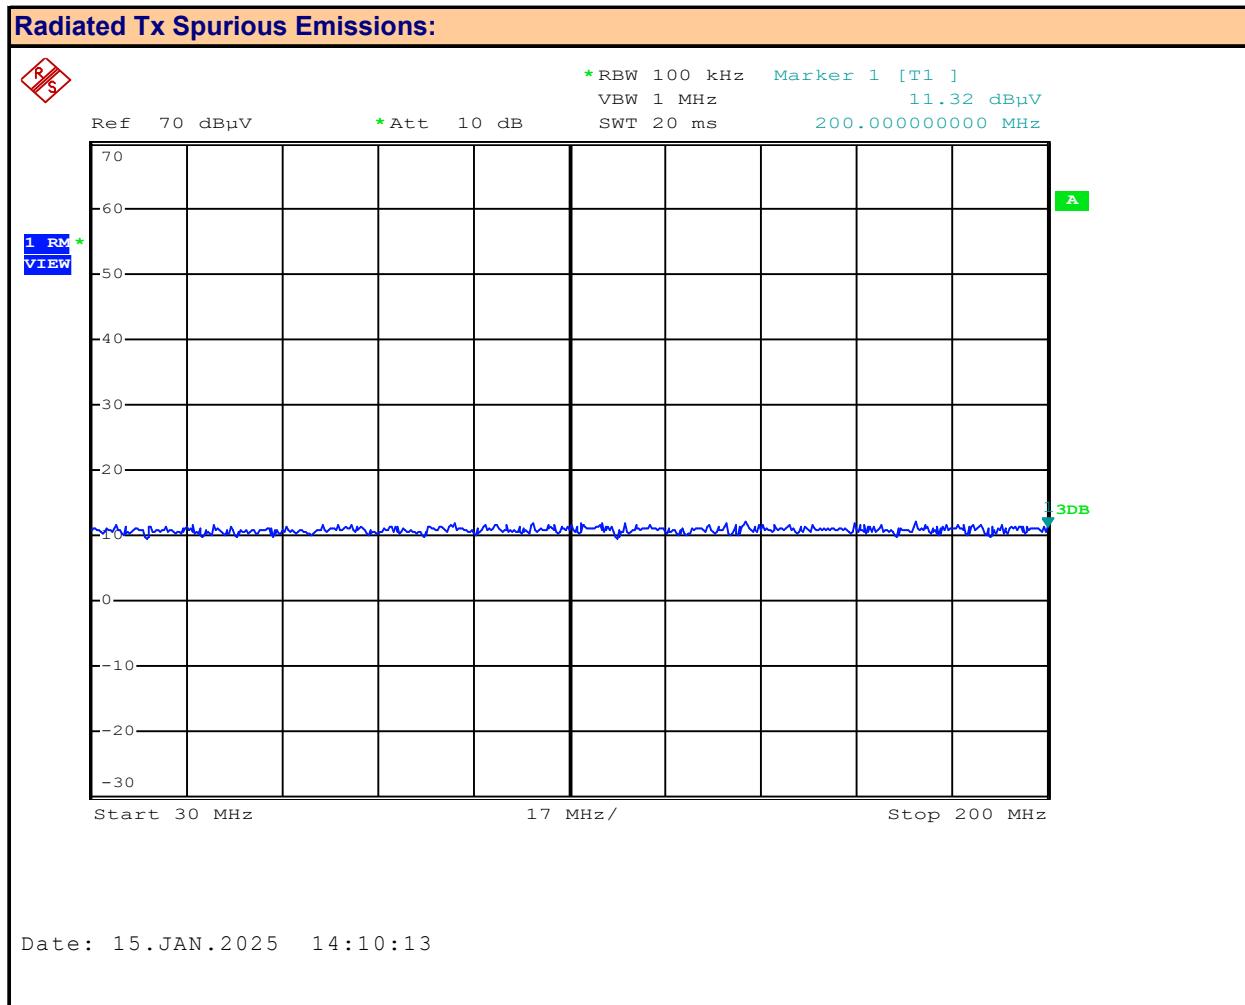
Antenna Polarization: **Horizontal**      Channel Frequency: **929.5** MHz  
 Emission Frequency: **ND** MHz      Modulation: **CW**  
 Measured Emission: **ND** dB $\mu$ V

**Plot 11.8 – Radiated Tx Emissions, 929.5MHz, Horizontal, 2<sup>nd</sup> Harmonic**


Antenna Polarization:	Horizontal	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	Modulation:	MHz	
2nd Harmonic		Measured Emission:	ND	dB $\mu$ V

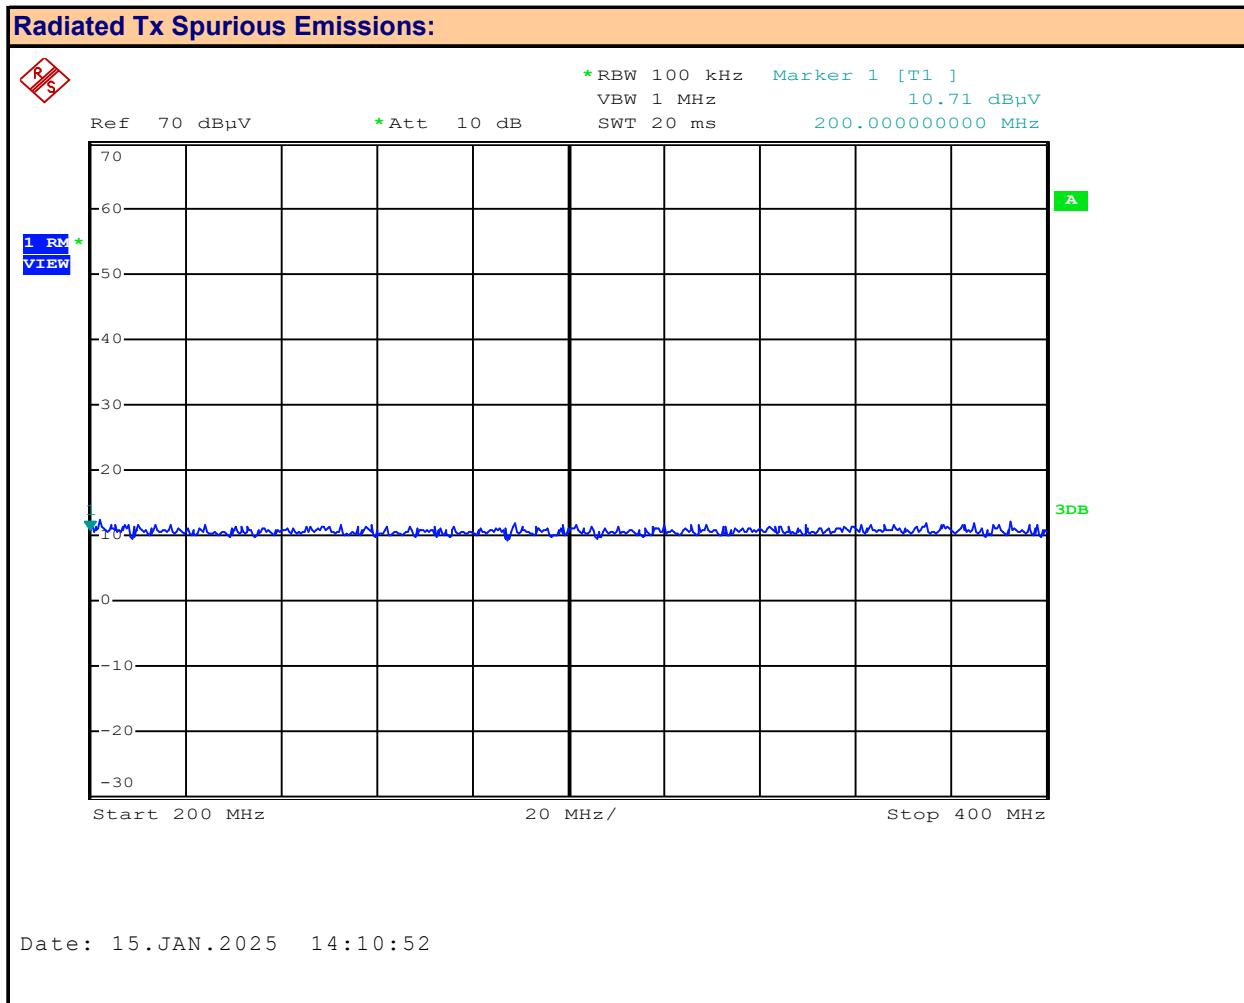
**Plot 11.9 – Radiated Tx Emissions, 929.5MHz, Horizontal, 3<sup>rd</sup> Harmonic**


Antenna Polarization:	Horizontal	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	Modulation:	MHz	
3rd Harmonic		Measured Emission:	ND	dB $\mu$ V

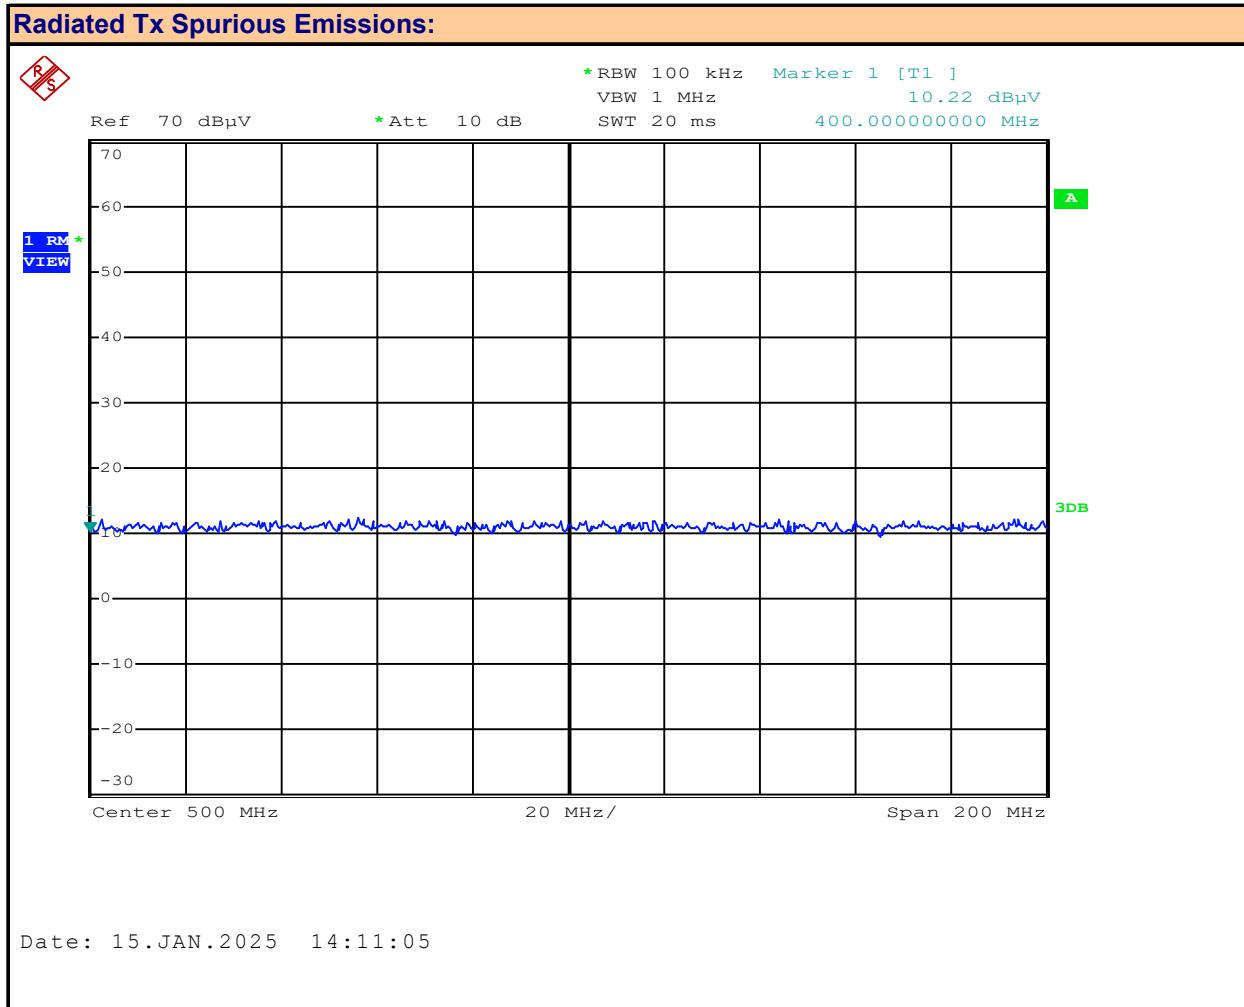
**Plot 11.10 – Radiated Tx Emissions, 929.5MHz, Vertical, 30-200MHz**


Antenna Polarization:	Vertical	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
			Measured Emission:	ND
			dBuV	

**Plot 11.11 – Radiated Tx Emissions, 929.5MHz, Vertical, 200-400MHz**

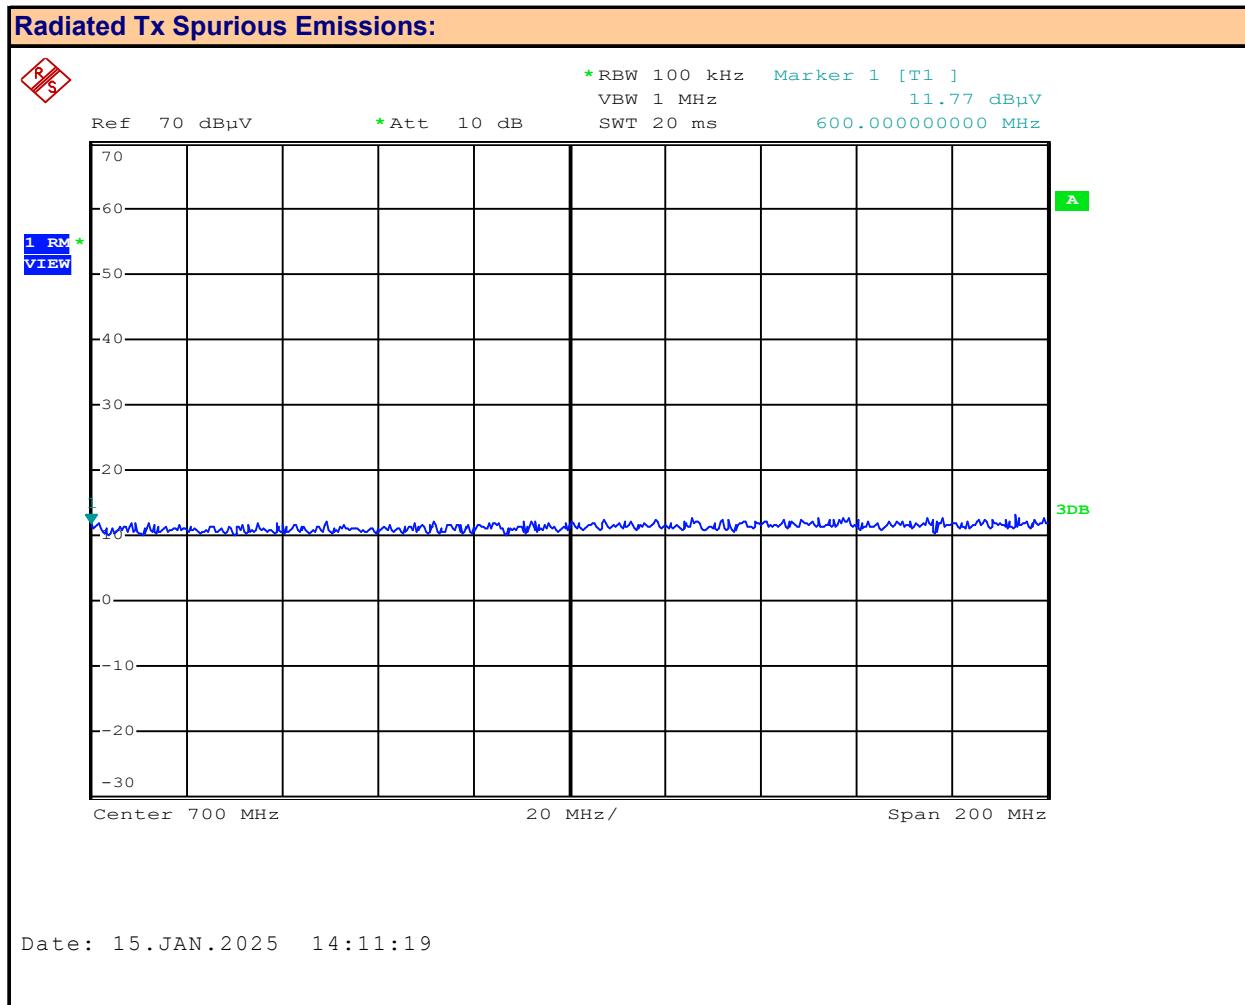


Antenna Polarization:	Vertical	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
			Measured Emission:	ND dB $\mu$ V

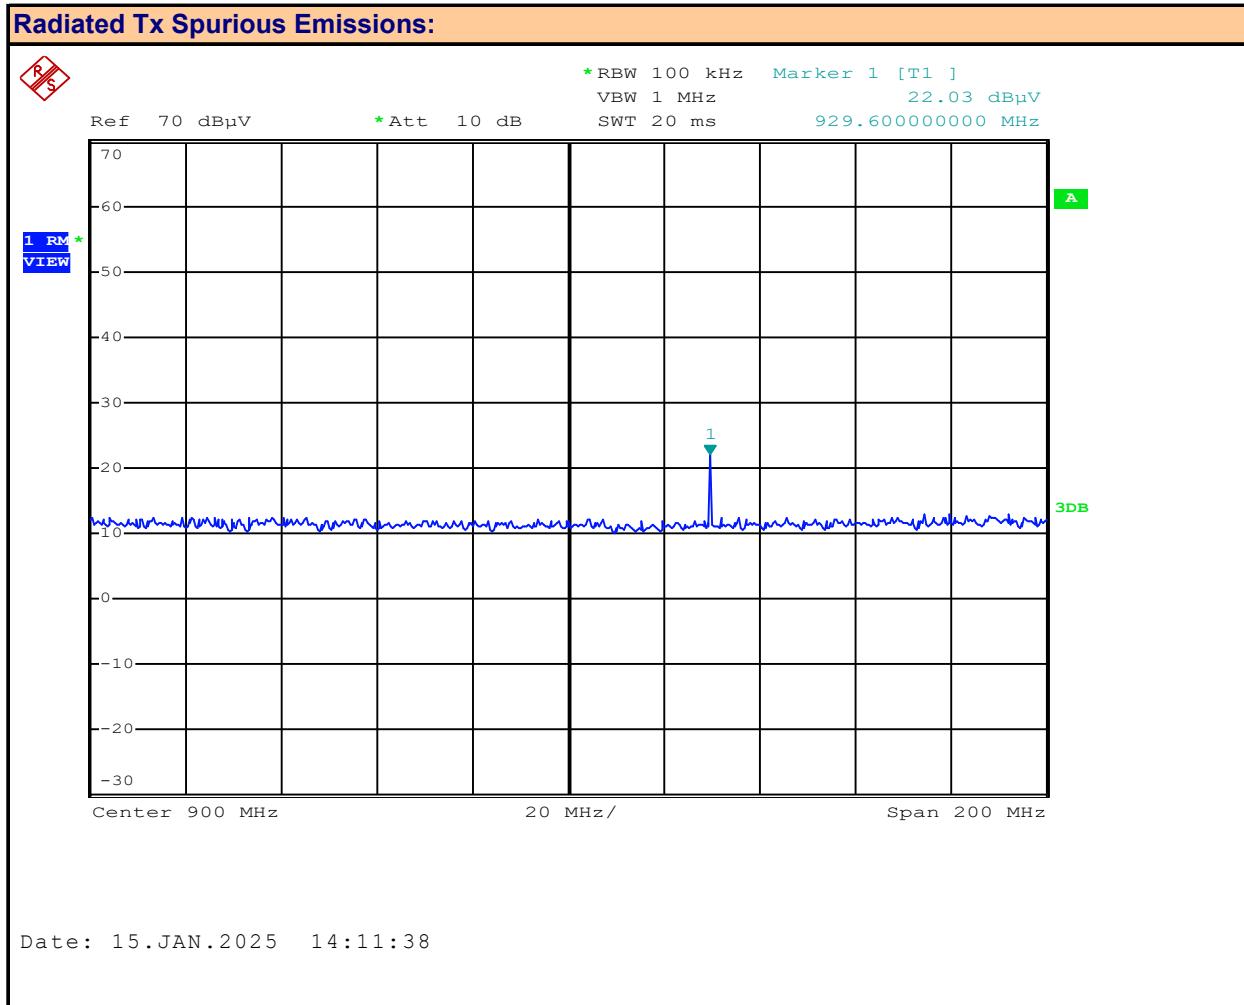
**Plot 11.12 – Radiated Tx Emissions, 929.5MHz, Vertical, 400-600MHz**


Antenna Polarization:	Vertical	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
			Measured Emission:	ND
			dBuV	

Plot 11.13 – Radiated Tx Emissions, 929.5MHz, Vertical, 600-800MHz



Antenna Polarization:	Vertical	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
			Measured Emission:	ND dB $\mu$ V

**Plot 11.14 – Radiated Tx Emissions, 929.5MHz, Vertical, 800-1000MHz**


Antenna Polarization:

Vertical

Channel Frequency:

929.5

MHz

Emission Frequency:

ND

MHz

Modulation:

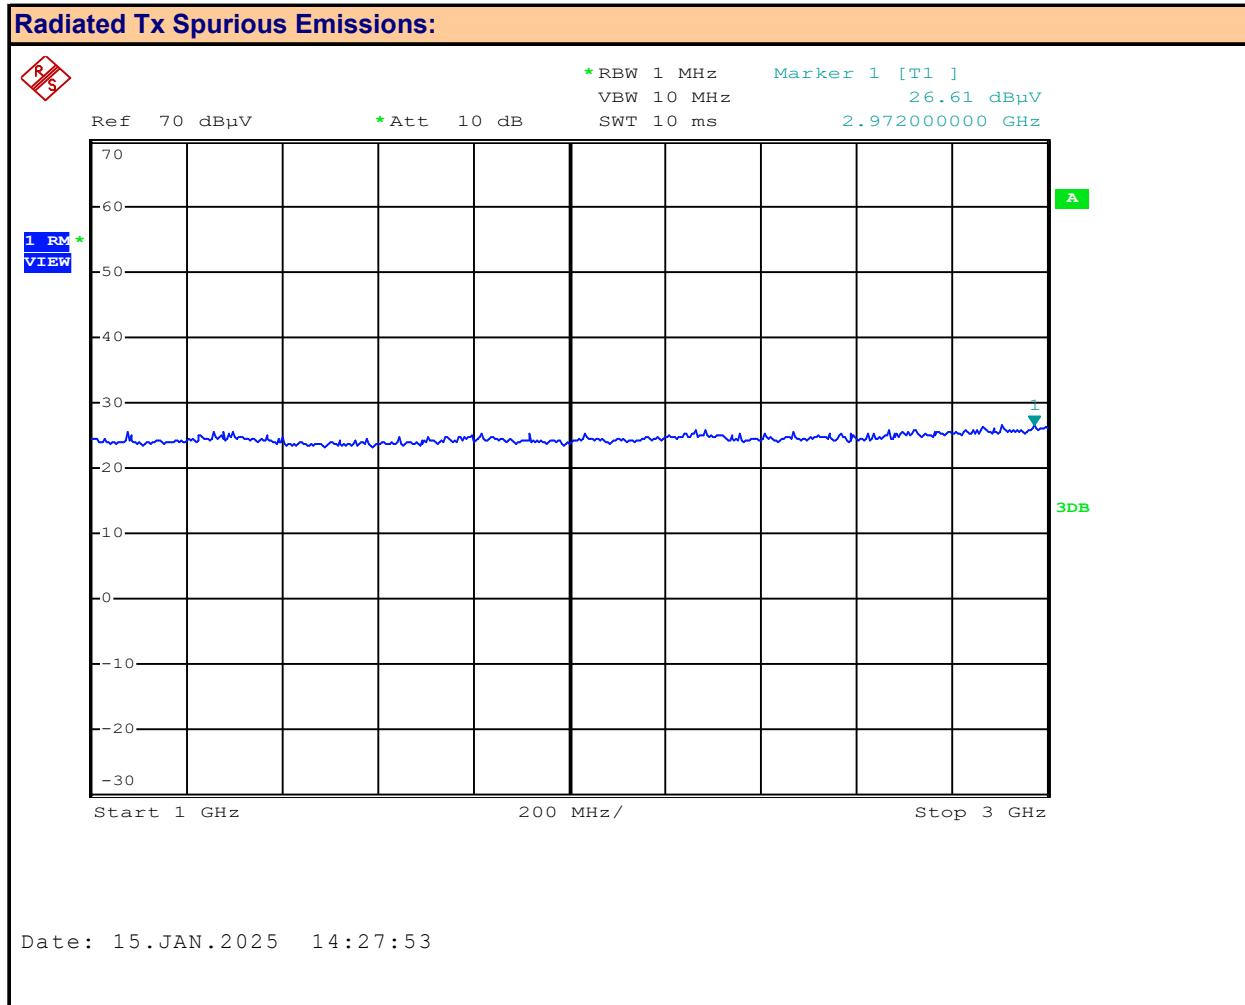
CW

Marker 1 = Fundamental

Measured Emission:

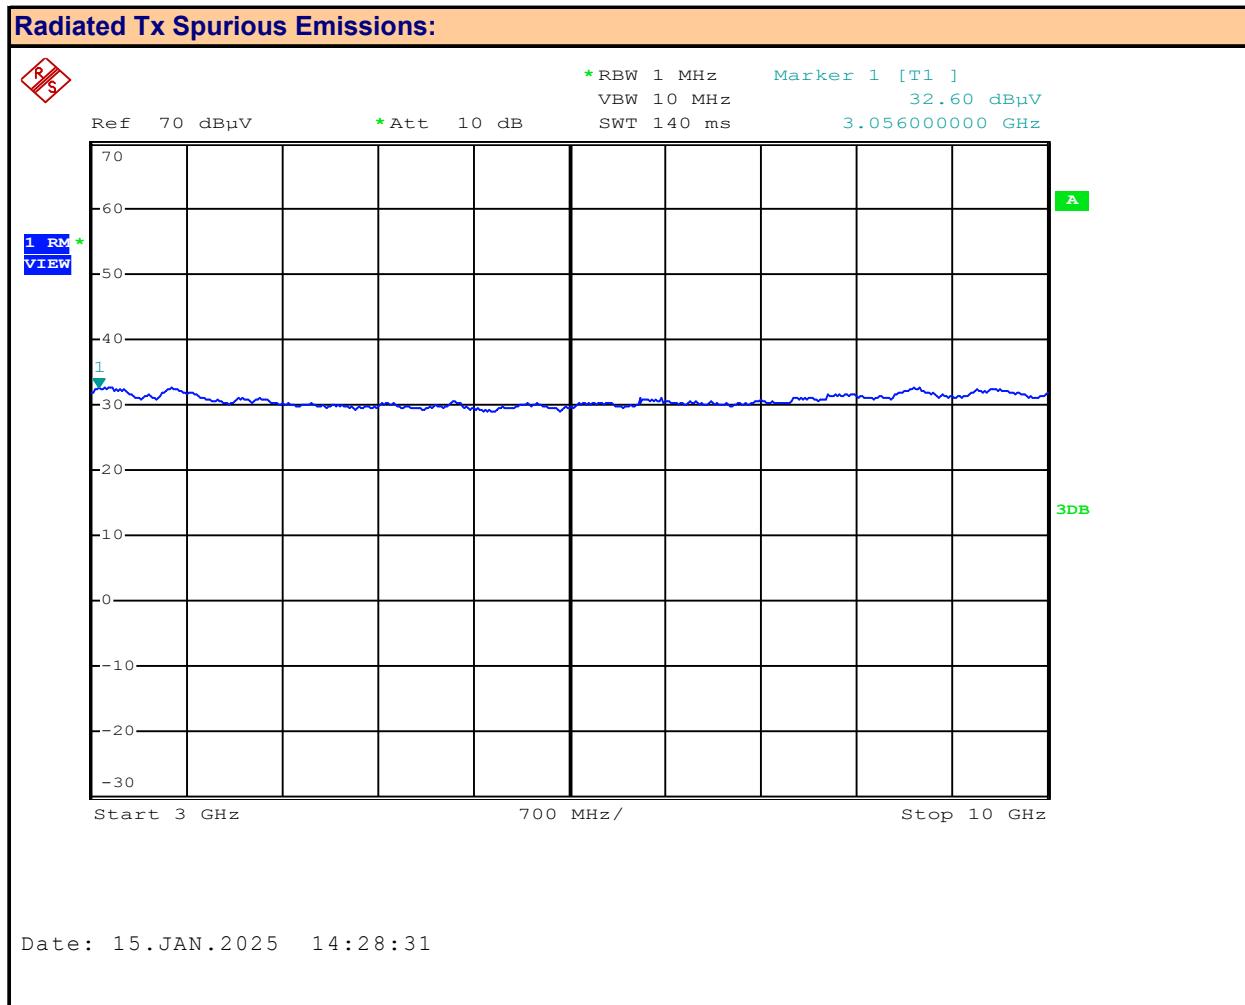
ND

 dB $\mu$ V

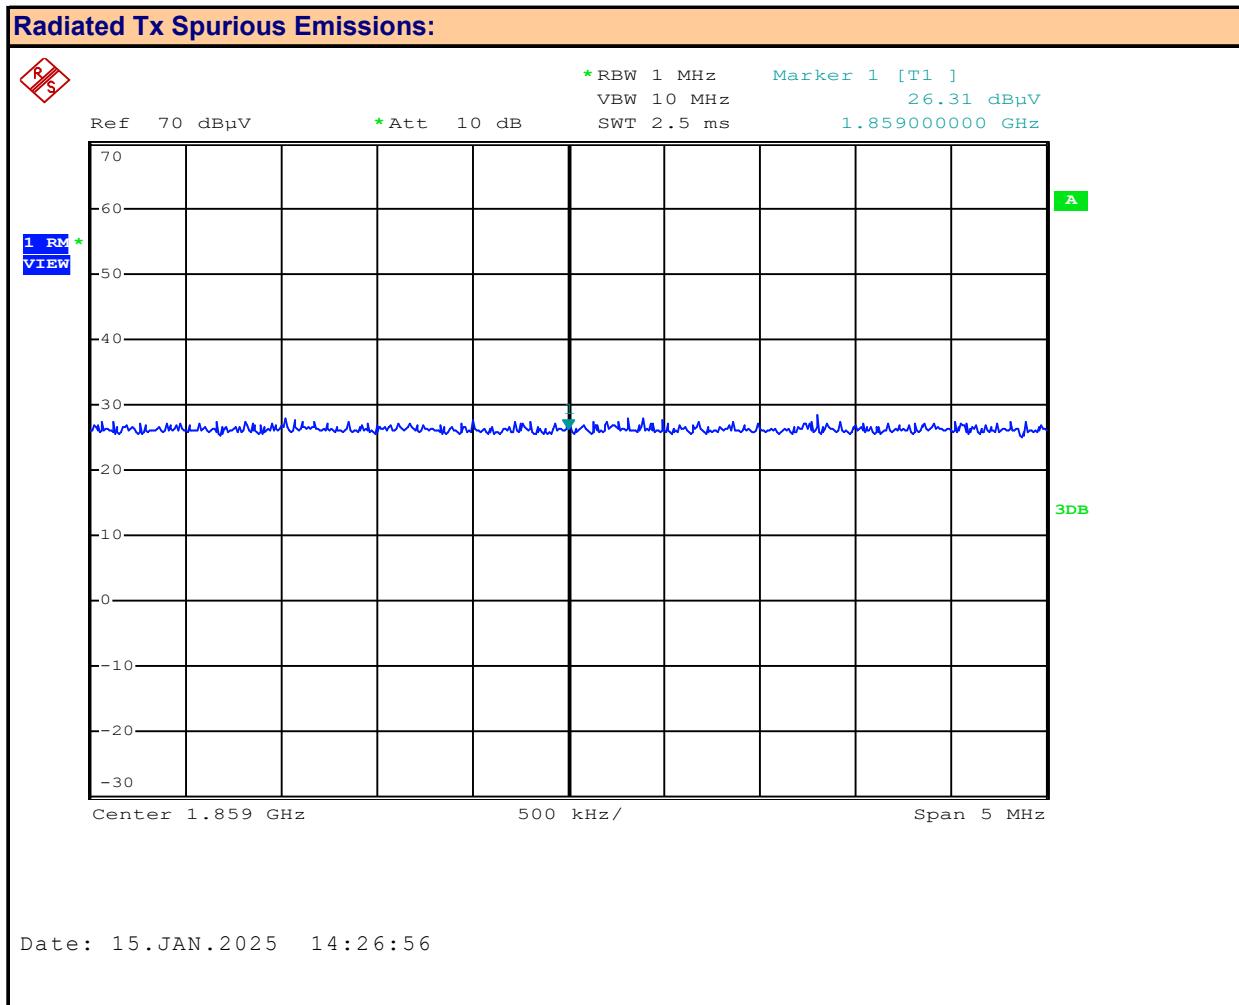
**Plot 11.15 – Radiated Tx Emissions, 929.5MHz, Vertical, 1-3GHz**


Antenna Polarization: **Vertical**      Channel Frequency: **929.5** MHz  
 Emission Frequency: **ND** MHz      Modulation: **CW**  
 Measured Emission: **ND** dB $\mu$ V

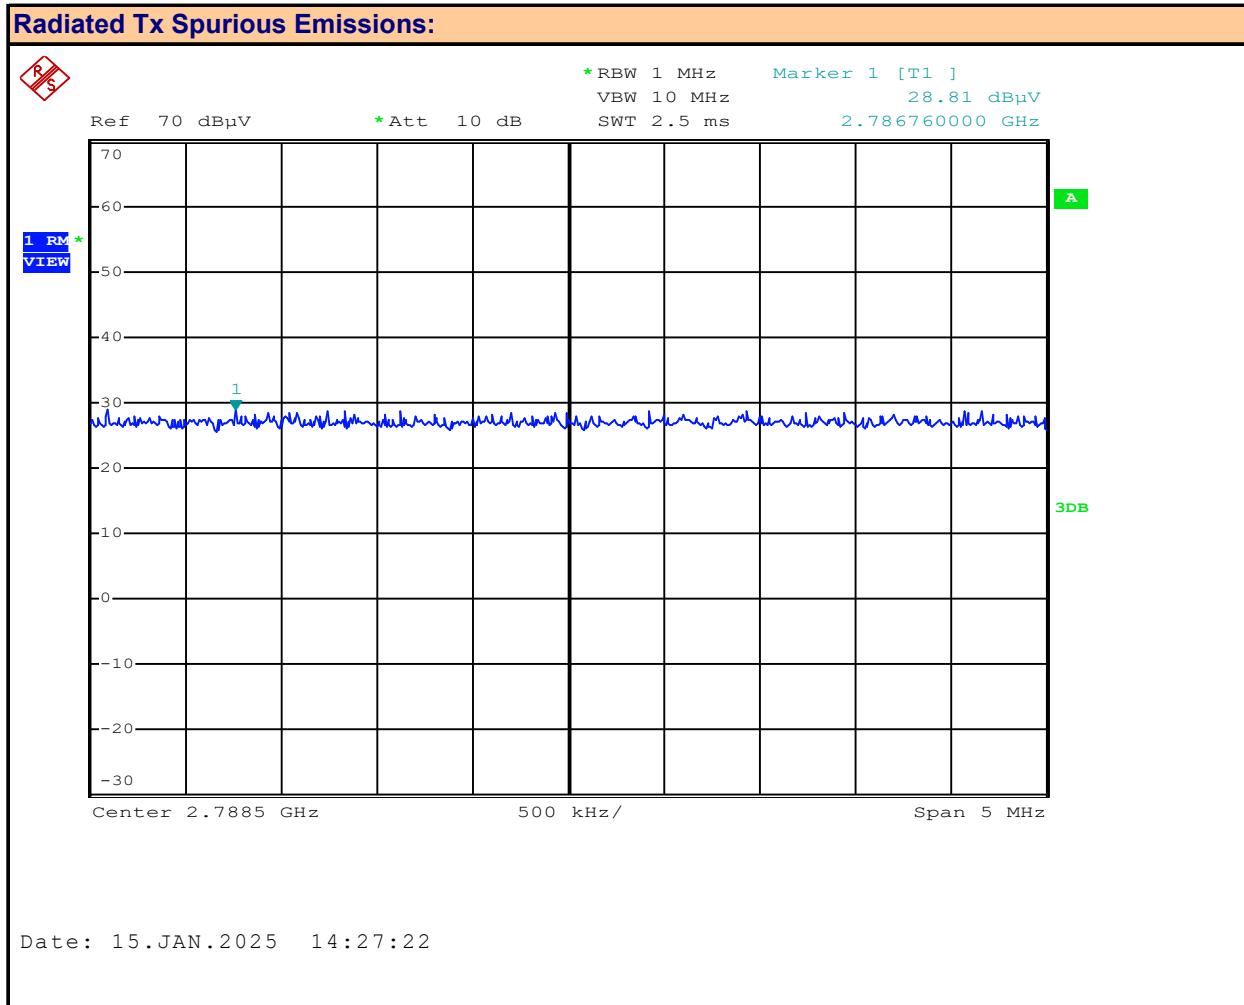
Plot 11.16 – Radiated Tx Emissions, 929.5MHz, Vertical, 3-10GHz



Antenna Polarization:	Vertical	Channel Frequency:	929.5	MHz	
Emission Frequency:	ND	MHz	Modulation:	CW	
			Measured Emission:	ND	dB $\mu$ V

**Plot 11.17 – Radiated Tx Emissions, 929.5MHz, Vertical, 2<sup>nd</sup> Harmonic**


Antenna Polarization:	Vertical	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	MHz	Modulation:	CW
2nd Harmonic		Measured Emission: ND dB $\mu$ V		

**Plot 11.18 – Radiated Tx Emissions, 929.5MHz, Vertical, 3<sup>rd</sup> Harmonic**


Antenna Polarization:	Vertical	Channel Frequency:	929.5	MHz
Emission Frequency:	ND	Modulation:	MHz	
3rd Harmonic		Measured Emission:	ND	dB $\mu$ V

**Table 11.1 – Summary of Radiated Tx Emissions Measurements**

<b>Radiated Tx Spurious Emissions Measurement Results:</b>							
<b>Frequency</b> <b>(MHz)</b>	<b>Modulation</b>	<b>Emission FS [E<sub>Em</sub>] (dBuV)</b>	<b>Emission Frequency (MHz)</b>	<b>Fundamental Measurment [E<sub>Fund</sub>]<sup>*</sup> (dBuV)</b>	<b>Attenuation [Atten] (dB)</b>	<b>Limit (dB)</b>	<b>Margin (dB)</b>
929.50	CW	ND	ND	26.70	n/a	43	n/a
<b>Results:</b>						<b>Complies</b>	

 Attenuation [Atten] = [P<sub>Fund</sub>] - [E<sub>Em</sub>]

Margin = Attenuation - Limit

ND = None Detected

n/a = Not Applicable

\* Uncorrected

**12.0 RADIATED RX SPURIOUS EMISSIONS**
**Test Procedure**

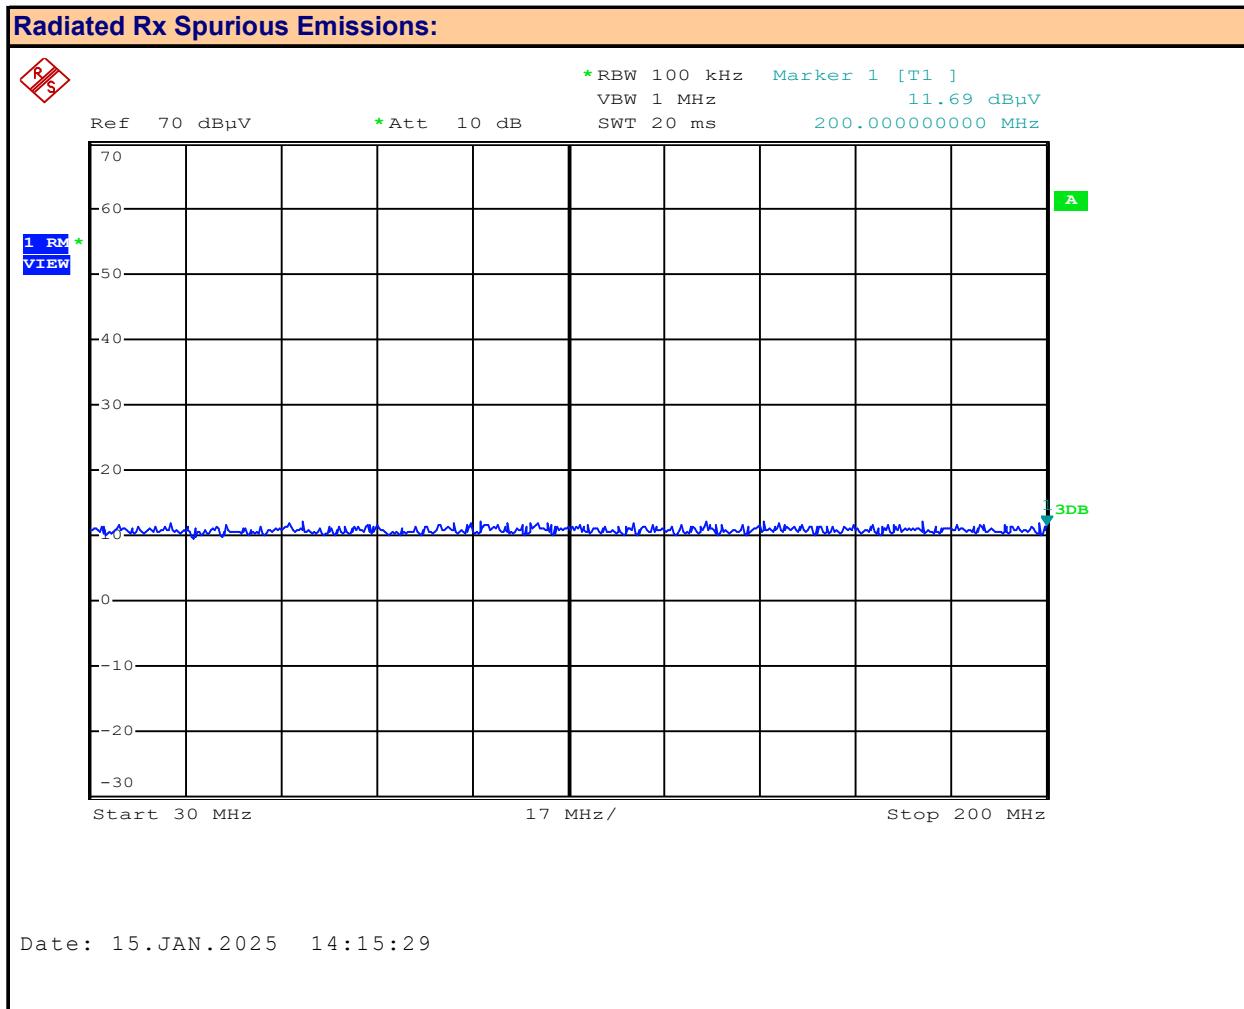
**Normative Reference** **FCC 47 CFR §15.109**  
**ANSI C63.4-2014**

**Limits**

47 CFR §15.109	(b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the following:		
30-88MHz: 39.1dBuV/m	30-88MHz: 49.6dBuV/m @ 3m	88-216MHz: 43.5dBuV/m	88-216MHz: 54.0dBuV/m @ 3m
216-960MHz: 46.4dBuV/m	216-960MHz: 56.9dBuV/m @ 3m	> 960MHz: 49.5dBuV/m	> 960MHz: 60.0dBuV/m @ 3m

**Test Setup**
**Appendix A**
**Figure A.2 to A.4**
**Measurement Procedure**

The DUT was set up as per ANSI C63.4:2014. Emissions were scanned between 30MHz and 1000MHz. The turntable was rotated 360 degrees and the antenna was elevated to 4m to optimize the measured emissions.

**Plot 12.1 – Radiated Rx Emissions, Horizontal, 30-200MHz**


Antenna Polarization:

Horizontal

Measured Emission:

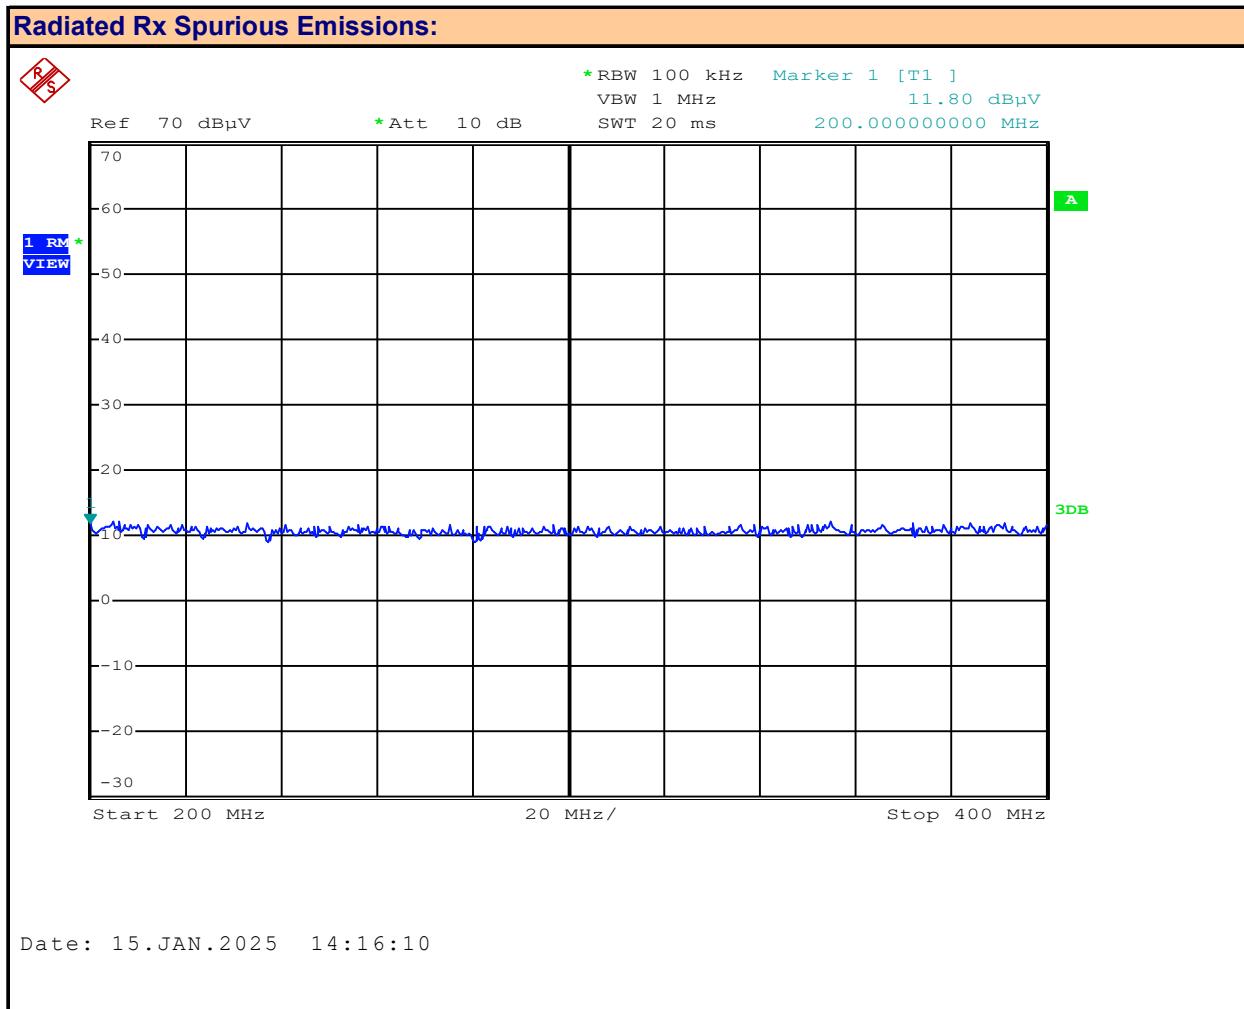
ND

 dB $\mu$ V

Emission Frequency:

ND

MHz

**Plot 12.2 – Radiated Rx Emissions, Horizontal, 200-400MHz**


Antenna Polarization:

Horizontal

Measured Emission:

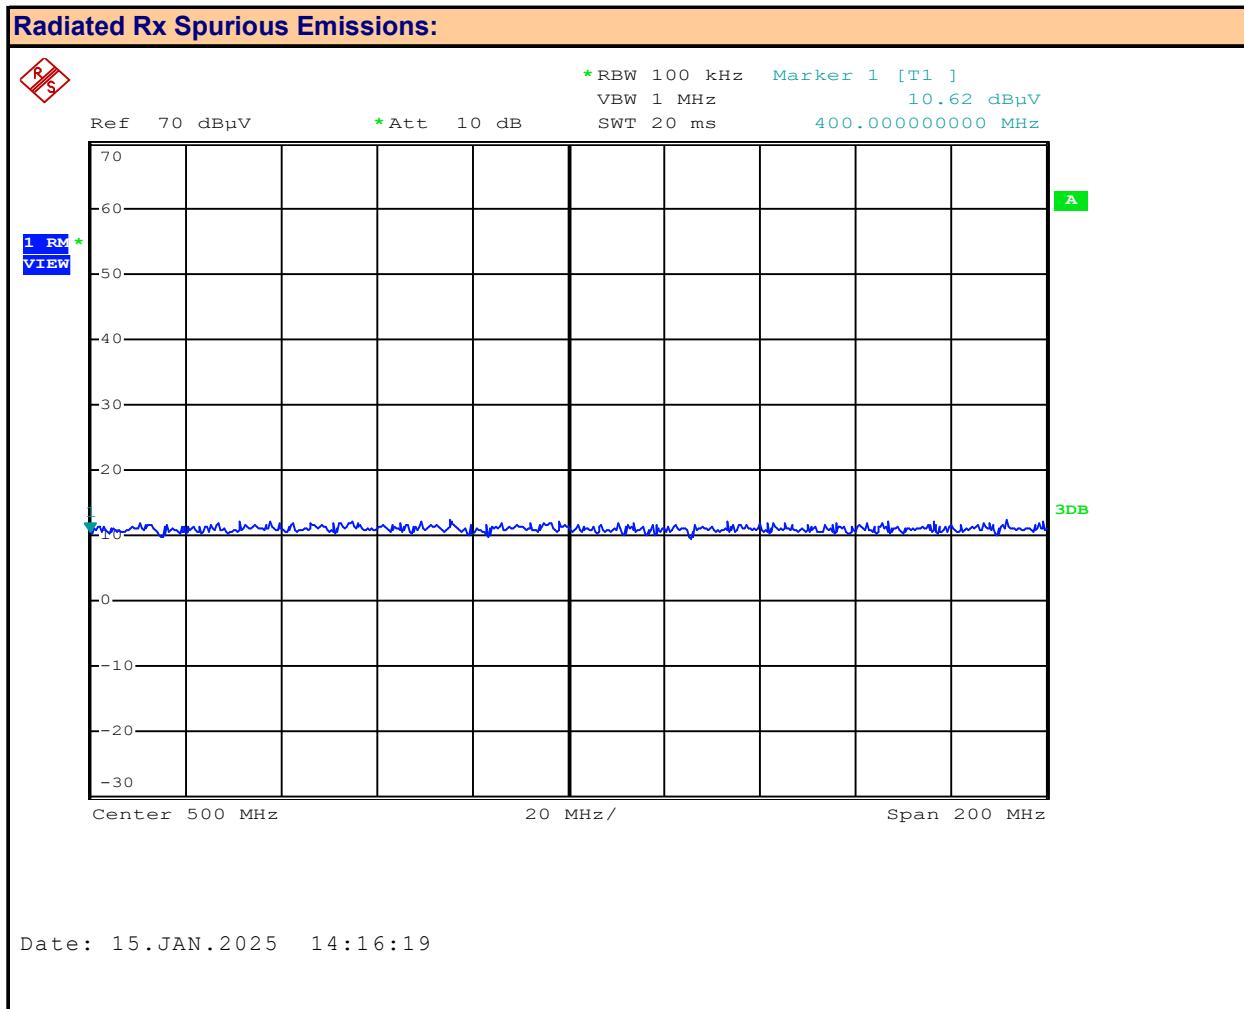
ND

 dB $\mu$ V

Emission Frequency:

ND

MHz

**Plot 12.3 – Radiated Rx Emissions, Horizontal, 400-600MHz**


Antenna Polarization:

Horizontal

Measured Emission:

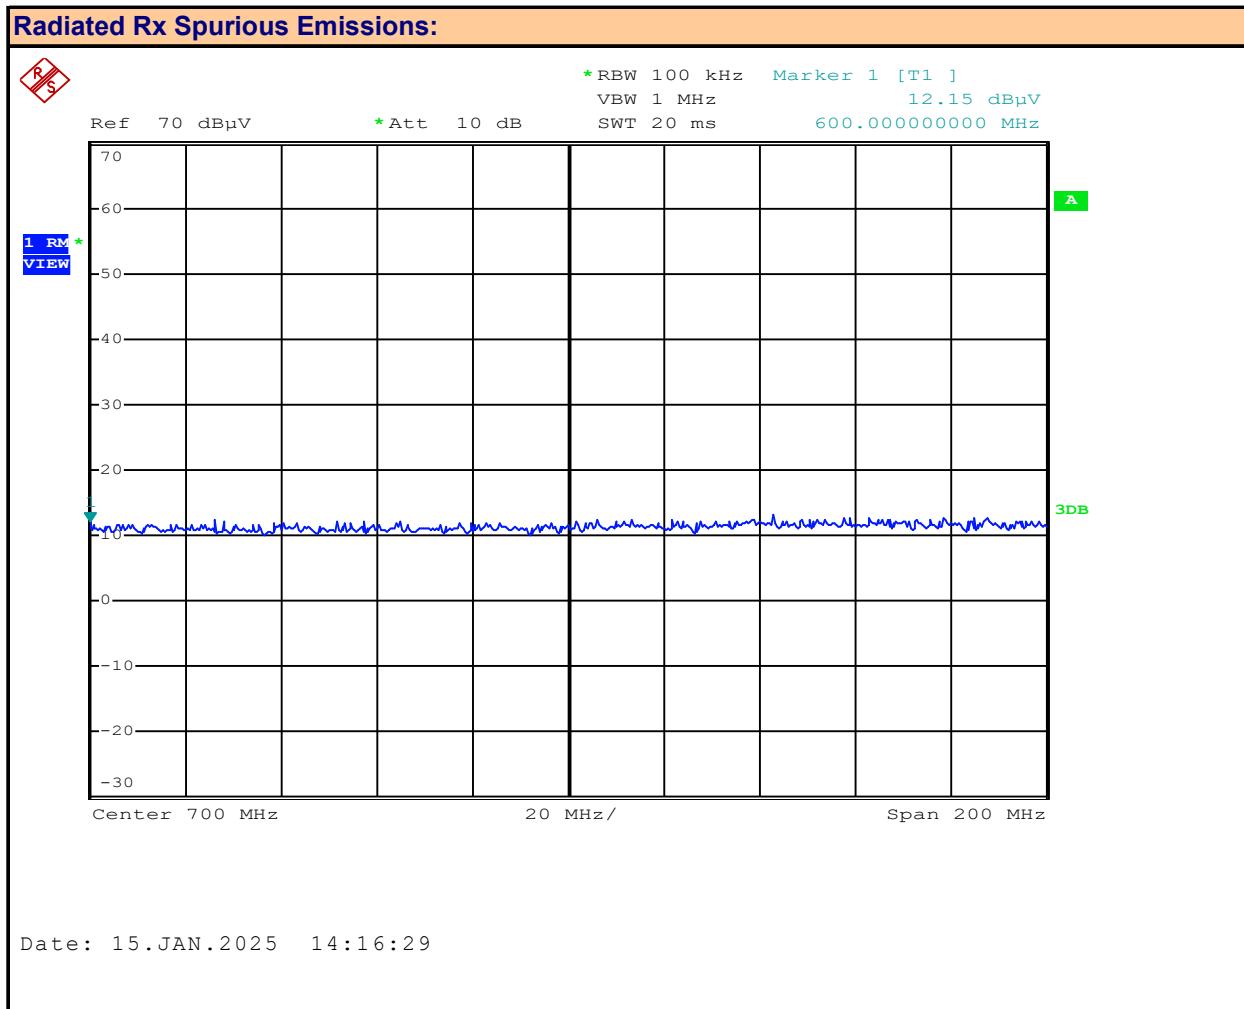
ND

 dB $\mu$ V

Emission Frequency:

ND

MHz

**Plot 12.4 – Radiated Rx Emissions, Horizontal, 600-800MHz**


Antenna Polarization:

Horizontal

Measured Emission:

ND

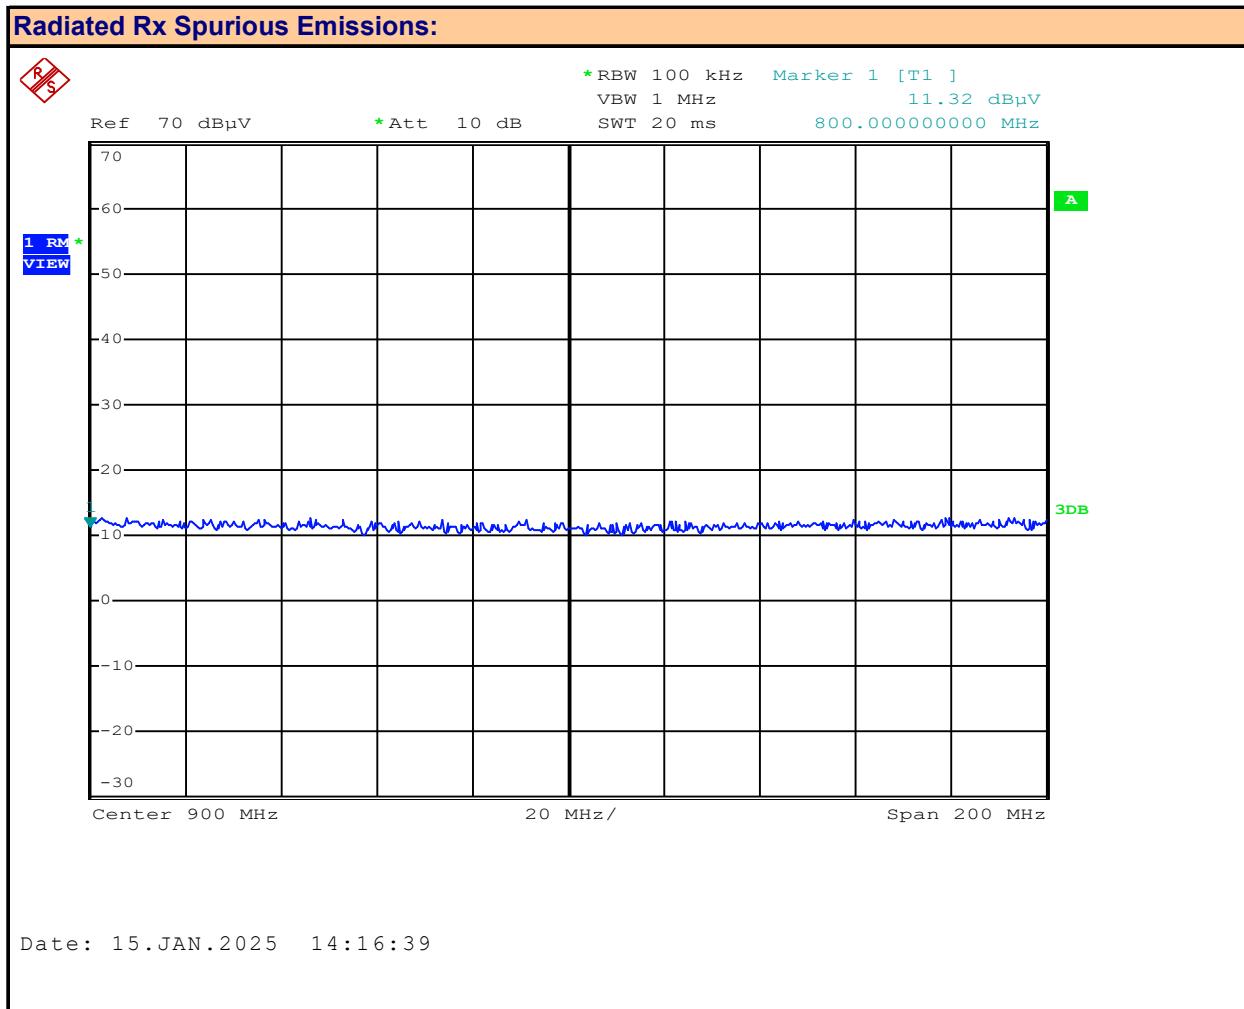
 dB $\mu$ V

Emission Frequency:

ND

MHz

**Plot 12.5 – Radiated Rx Emissions, Horizontal, 800-1000MHz**



Antenna Polarization:

Horizontal

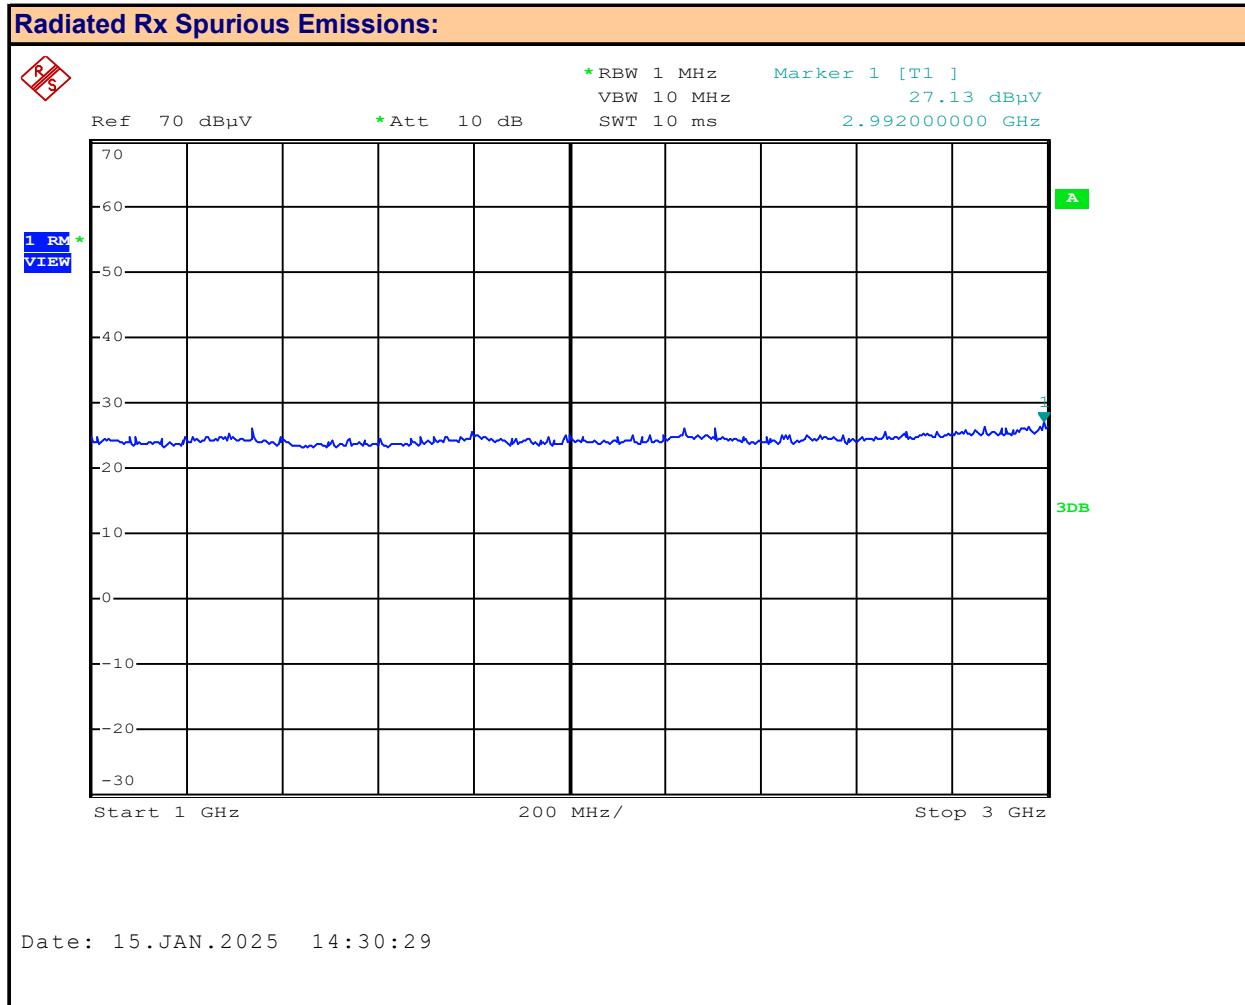
Measured Emission:

ND

dB $\mu$ V

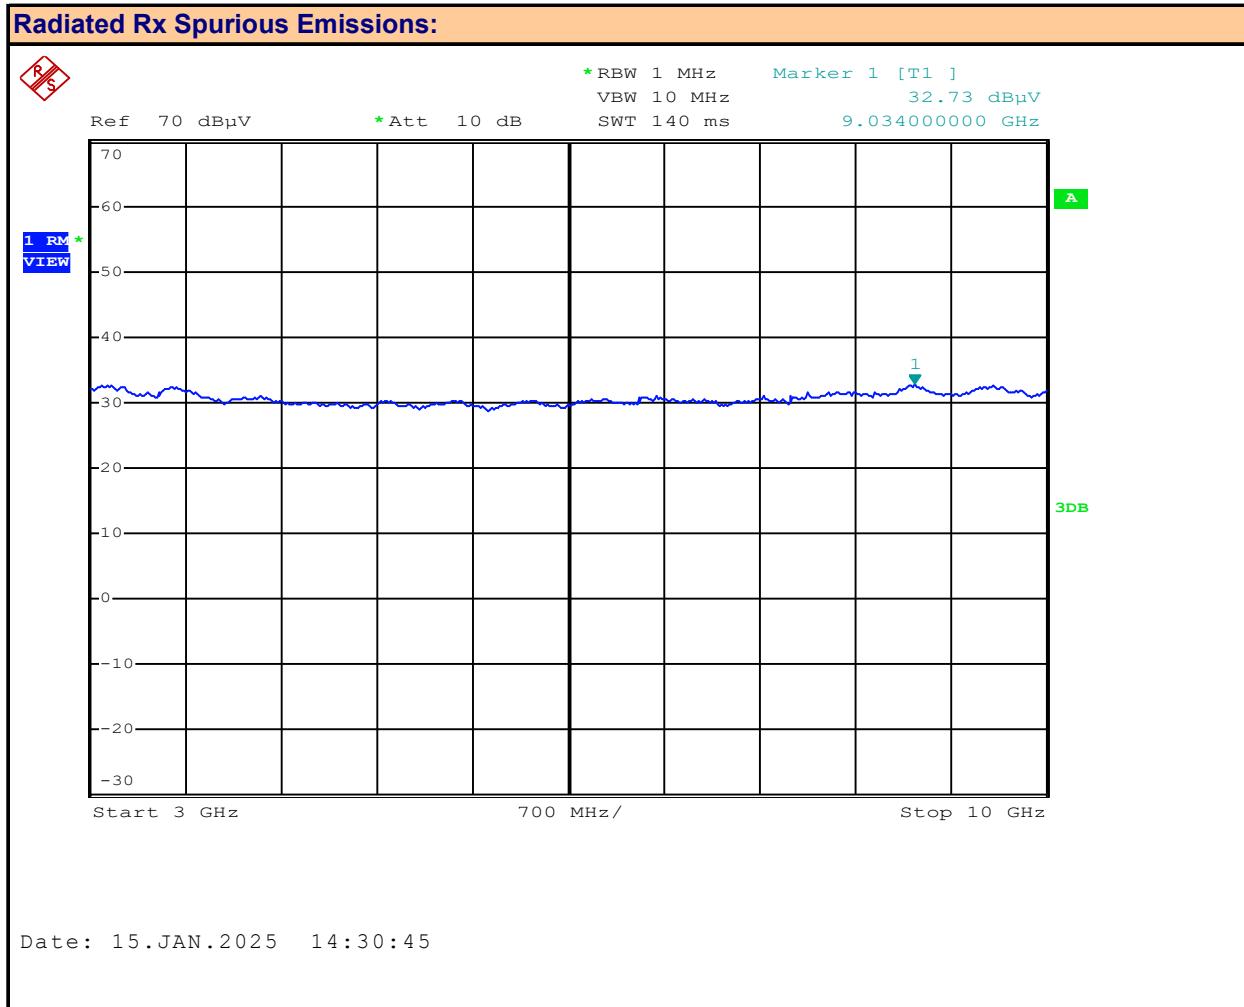
Emission Frequency:

ND MHz

**Plot 12.6 – Radiated Rx Emissions, Horizontal, 1-3GHz**


Antenna Polarization: **Horizontal**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Plot 12.7 – Radiated Rx Emissions, Horizontal, 3-10GHz**


Antenna Polarization:

Horizontal

Measured Emission:

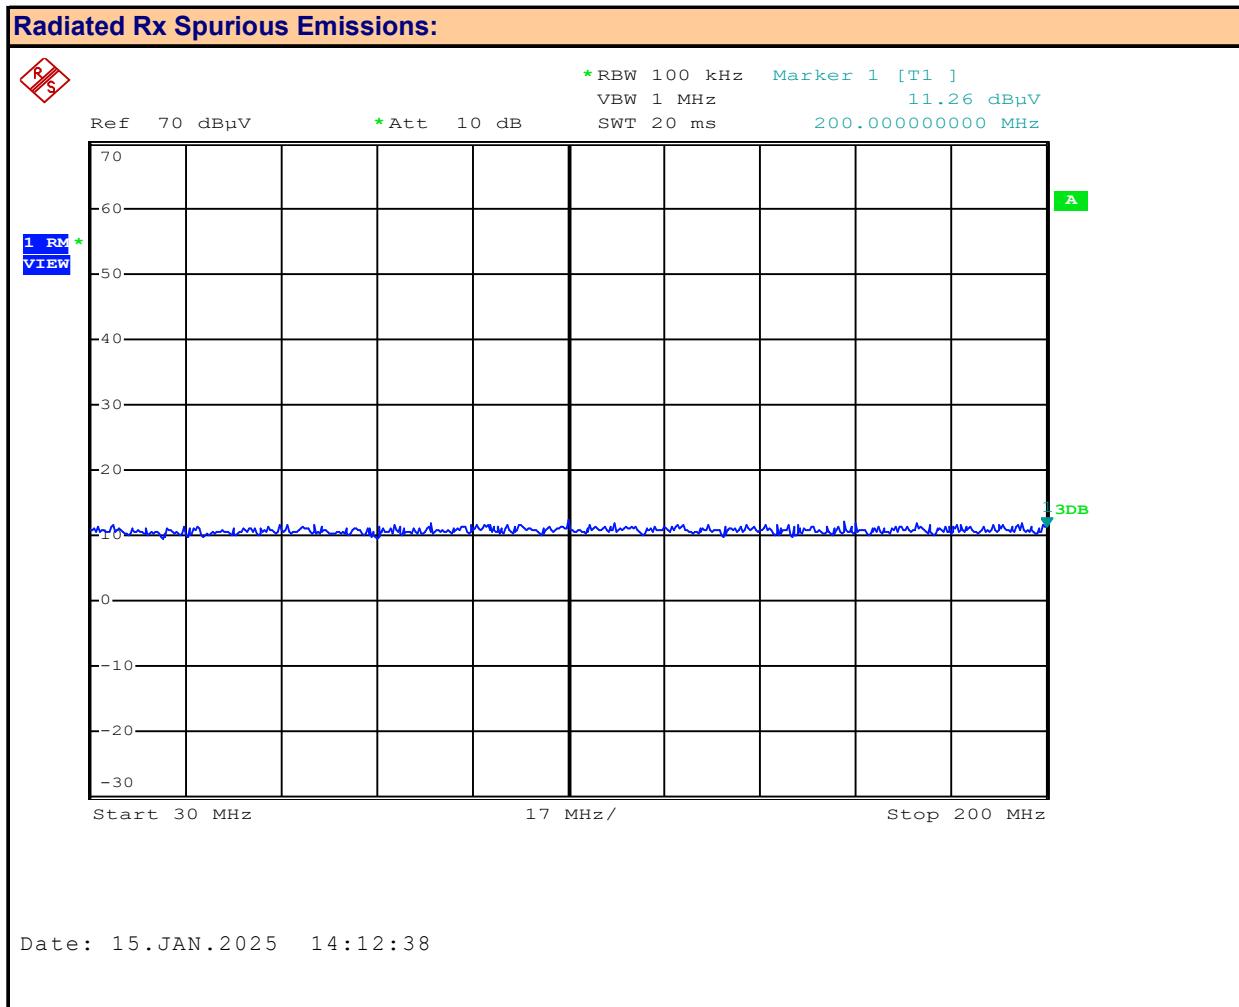
ND

 dB $\mu$ V

Emission Frequency:

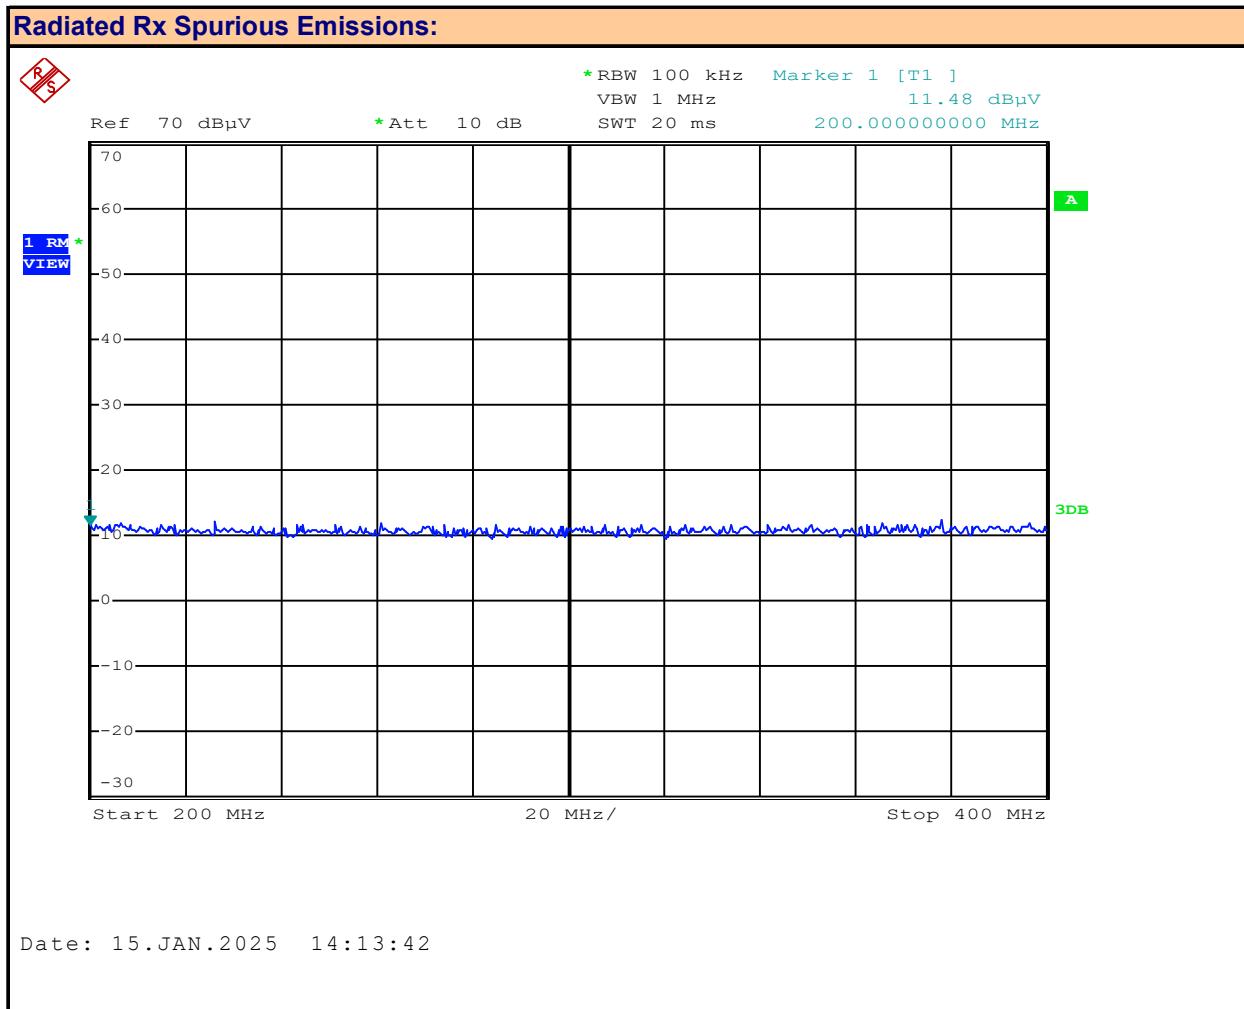
ND

MHz

**Plot 12.8 – Radiated Rx Emissions, Vertical, 30-200MHz**


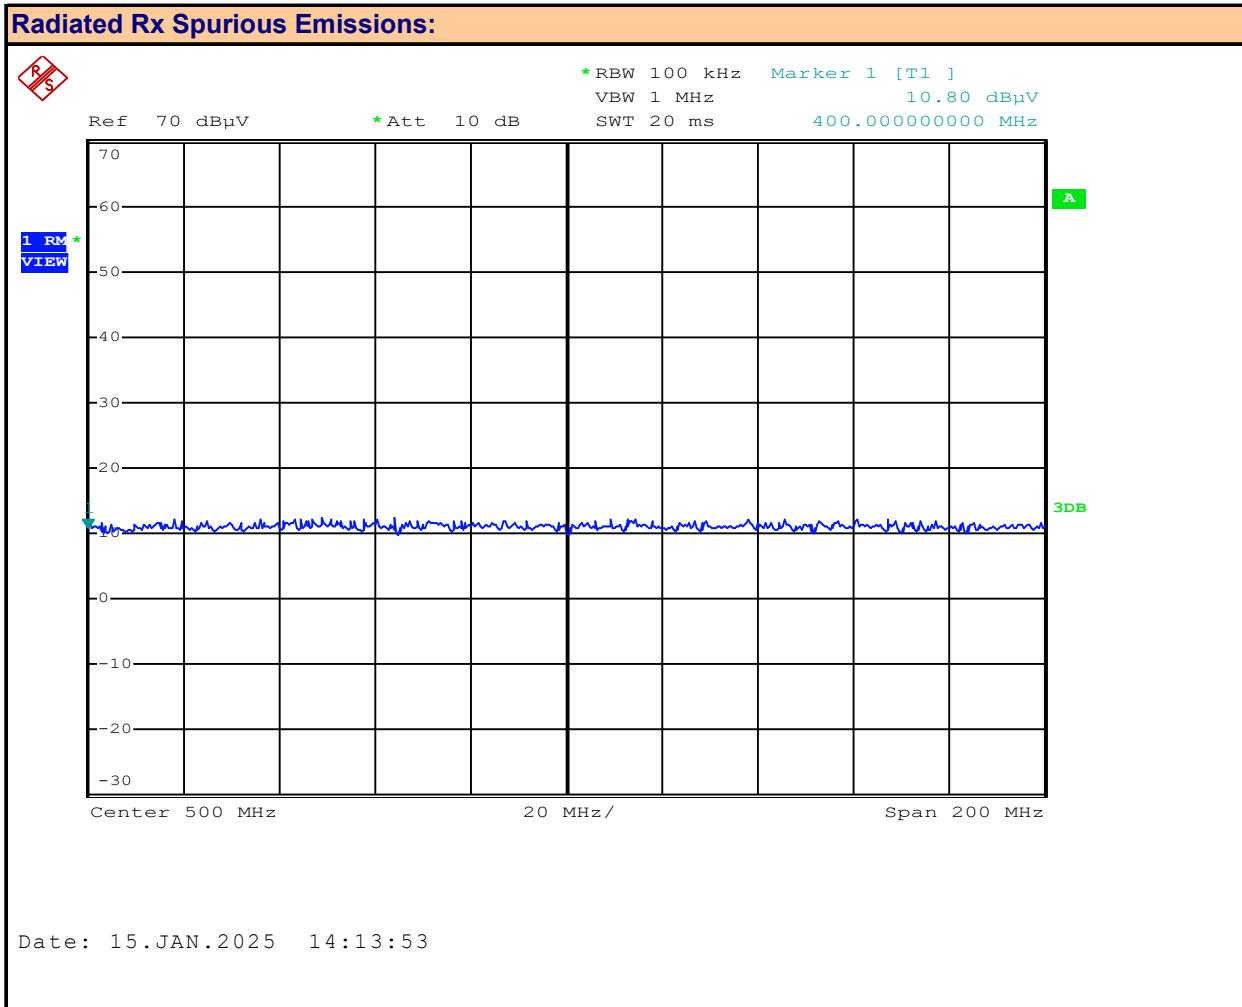
Antenna Polarization: **Vertical**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Plot 12.9 – Radiated Rx Emissions, Vertical, 200-400MHz**


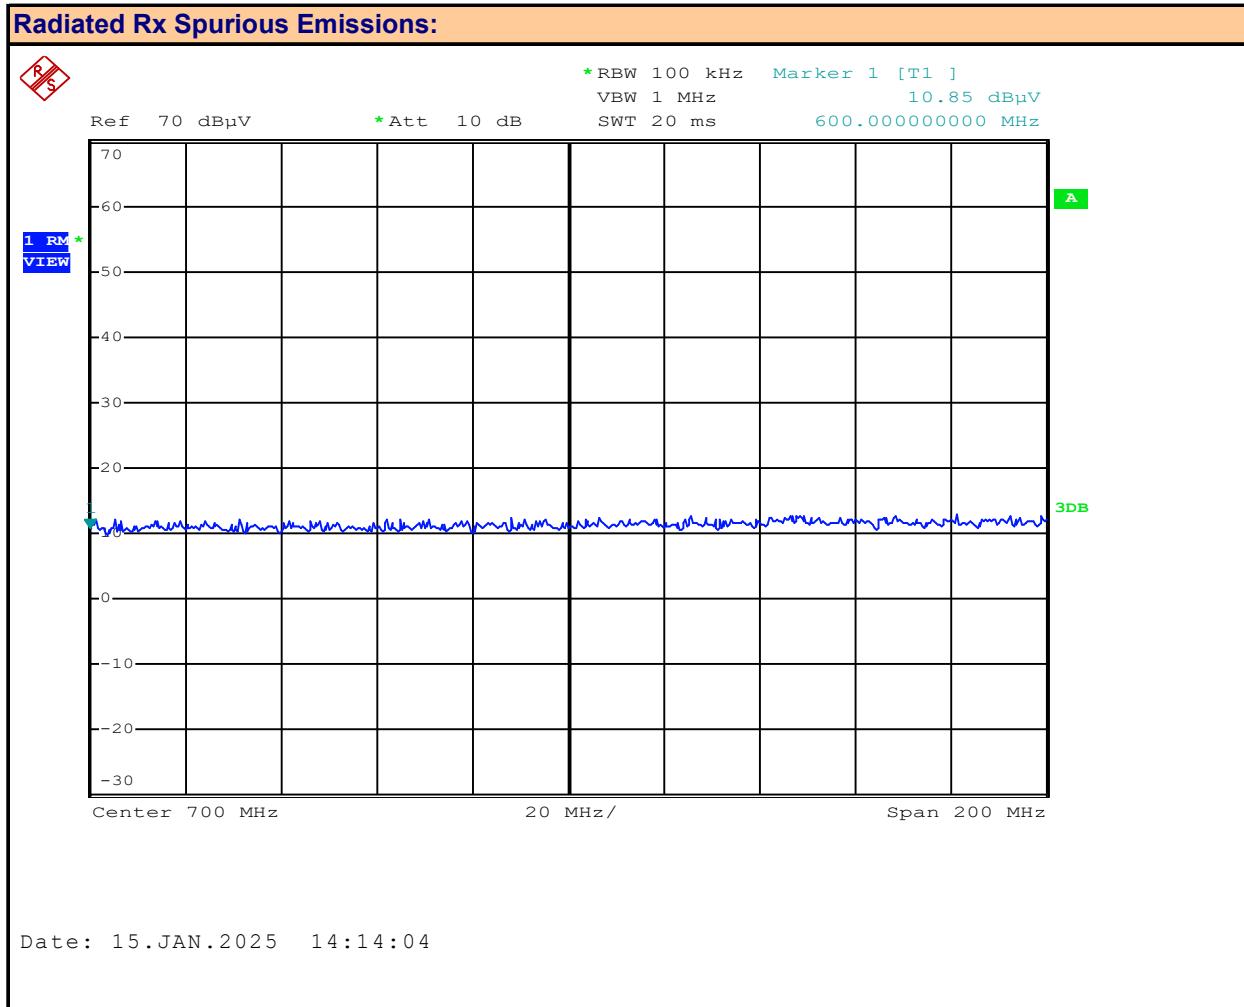
Antenna Polarization: **Vertical**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Plot 12.10 – Radiated Rx Emissions, Vertical, 400-600MHz**


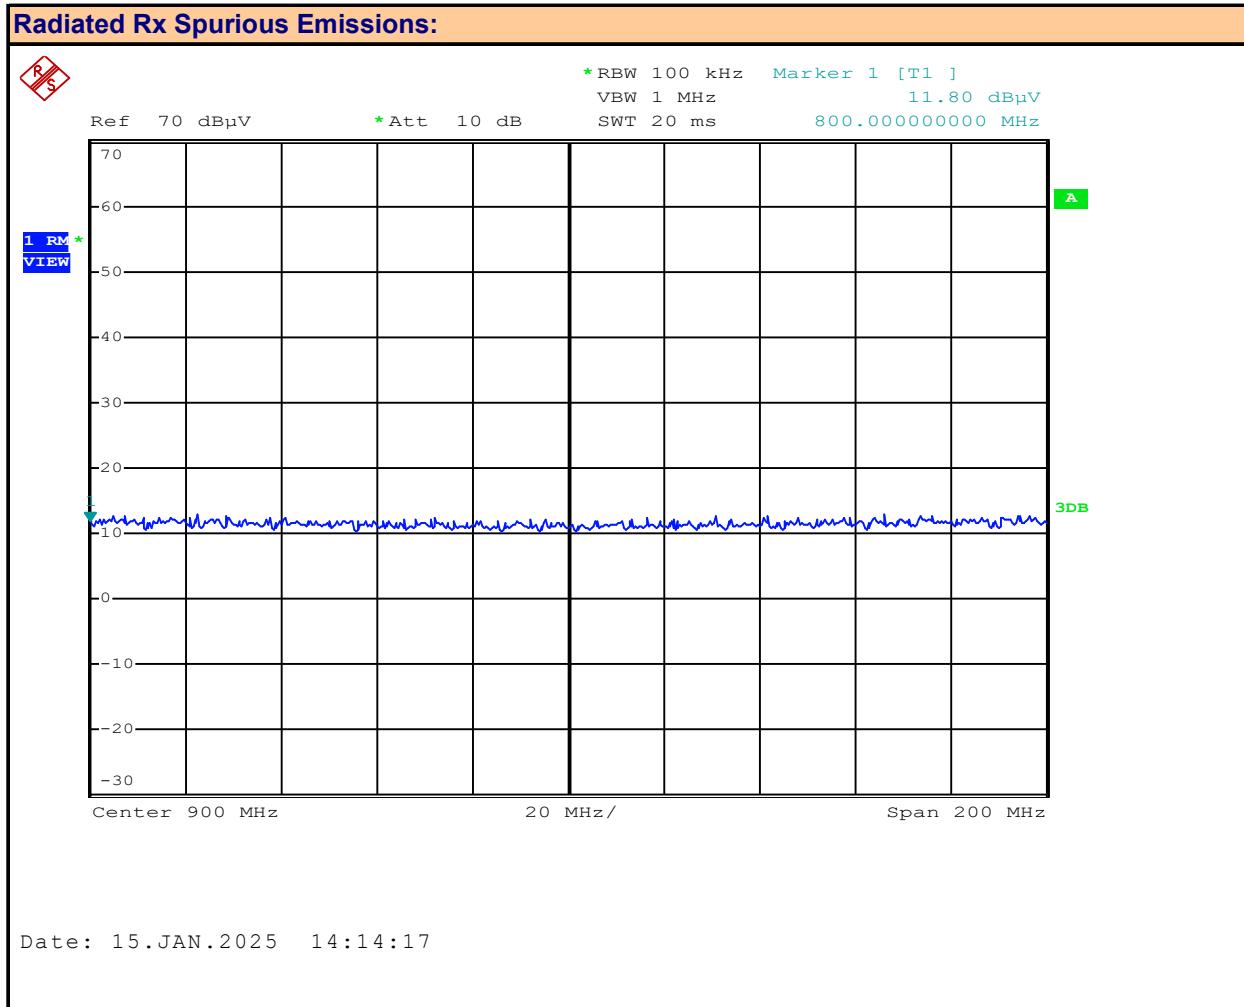
Antenna Polarization: **Vertical**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Plot 12.11 – Radiated Rx Emissions, Vertical, 600-800MHz**


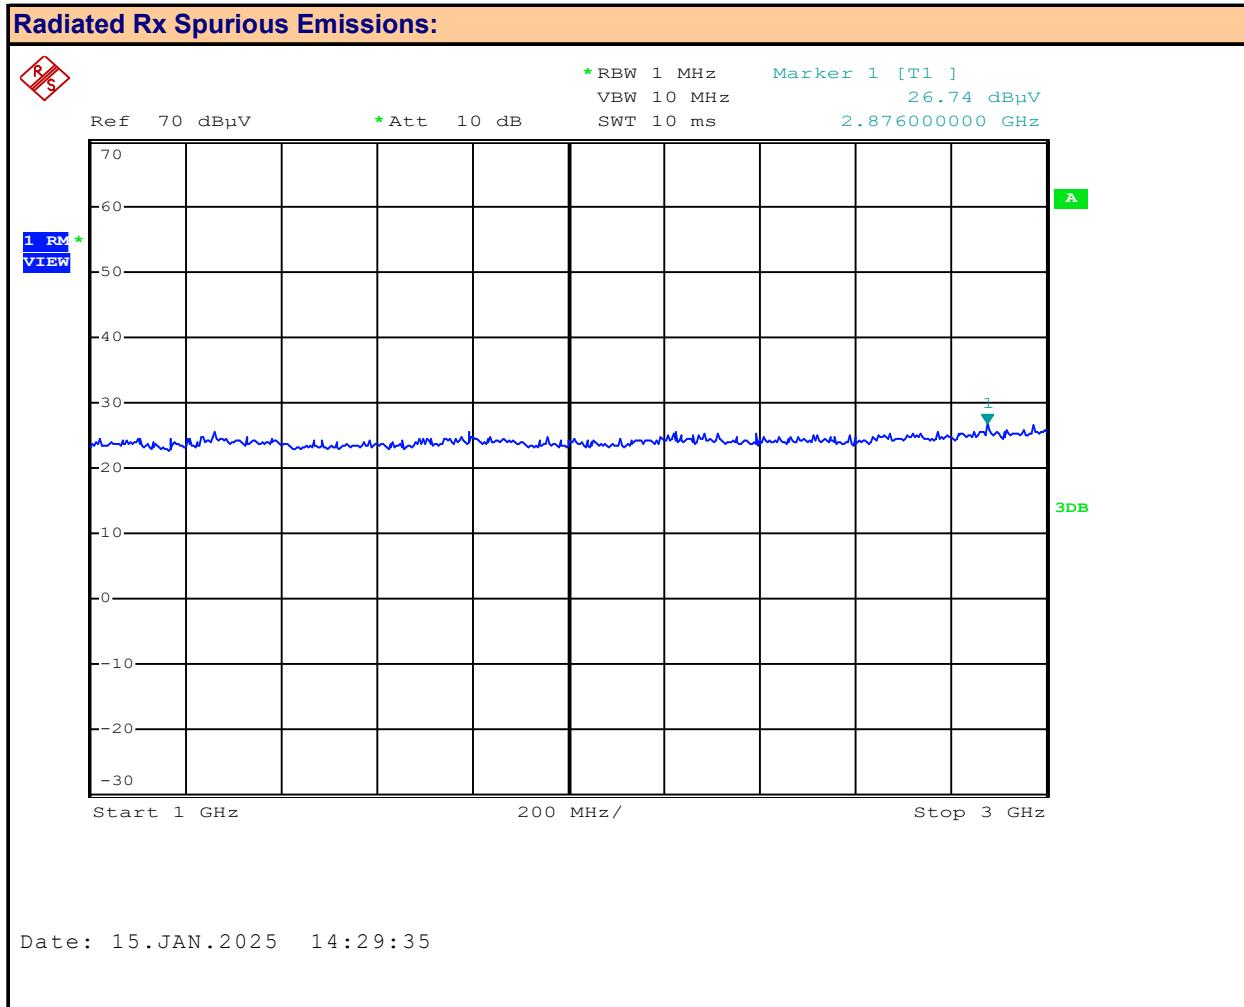
Antenna Polarization: **Vertical**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Plot 12.12 – Radiated Rx Emissions, Vertical, 800-1000MHz**


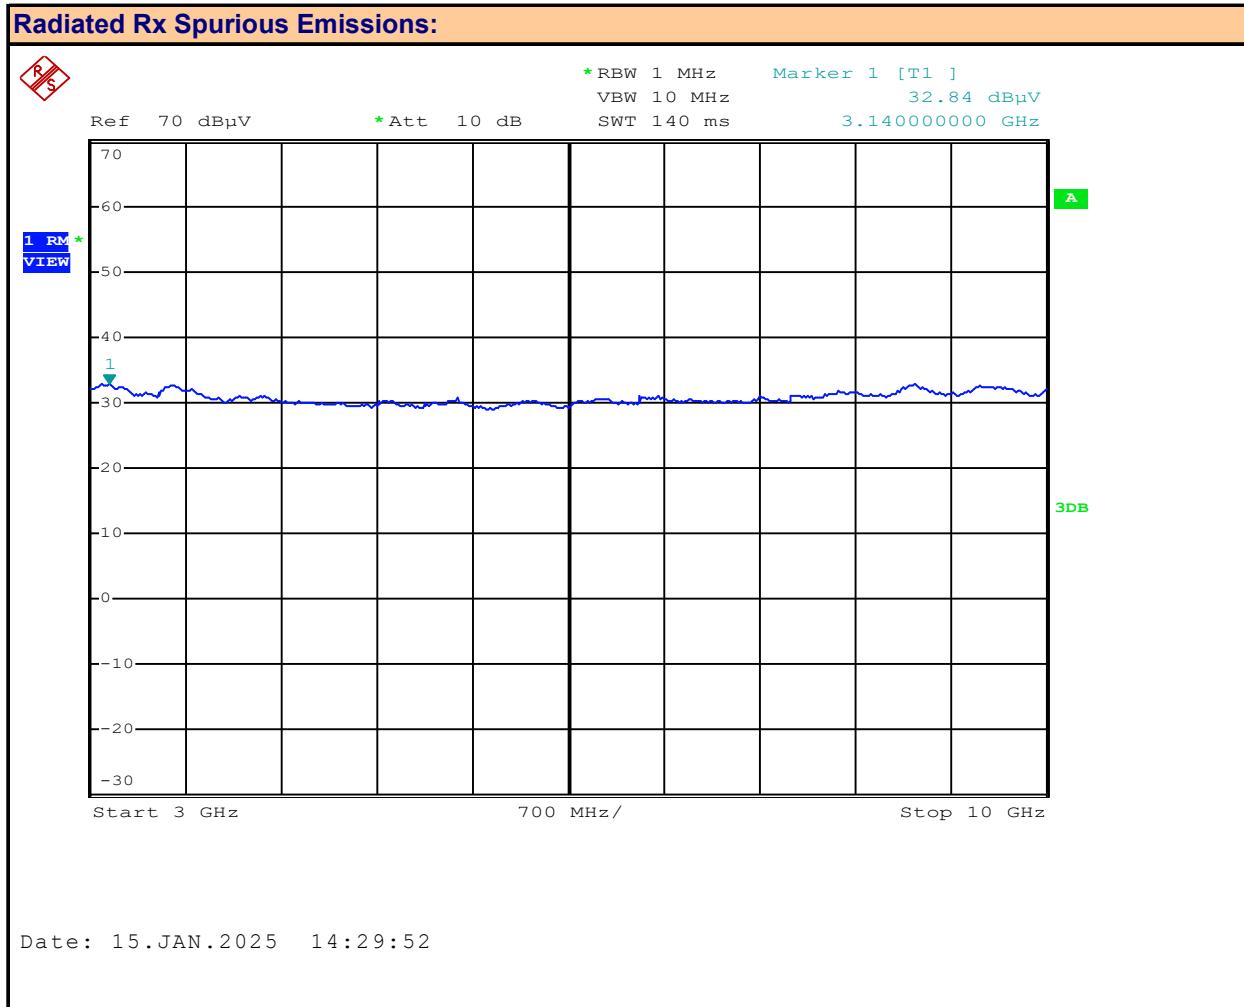
Antenna Polarization: **Vertical**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Plot 12.13 – Radiated Rx Emissions, Vertical, 1-3GHz**


Antenna Polarization: **Vertical**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Plot 12.14 – Radiated Rx Emissions, Vertical, 3-10GHz**


Antenna Polarization: **Vertical**  
 Emission Frequency: **ND** MHz

Measured Emission: **ND** dB $\mu$ V

**Table 12.1 – Summary of Radiated Rx Emissions Measurements**

<b>Radiated Rx Spurious Emissions Measurement Results:</b>					
<b>Frequency</b> <b>(MHz)</b>	<b>Modulation</b>	<b>Emission FS [E<sub>Em</sub>] (dBuV)</b>	<b>Emission Frequency (MHz)</b>	<b>Limit (dB)</b>	<b>Margin (dB)</b>
n/a	n/a	ND	ND	-	n/a
<b>Results:</b>					<b>Complies</b>

 Attenuation [Atten] = [P<sub>Fund</sub>] - [P<sub>Em</sub>]

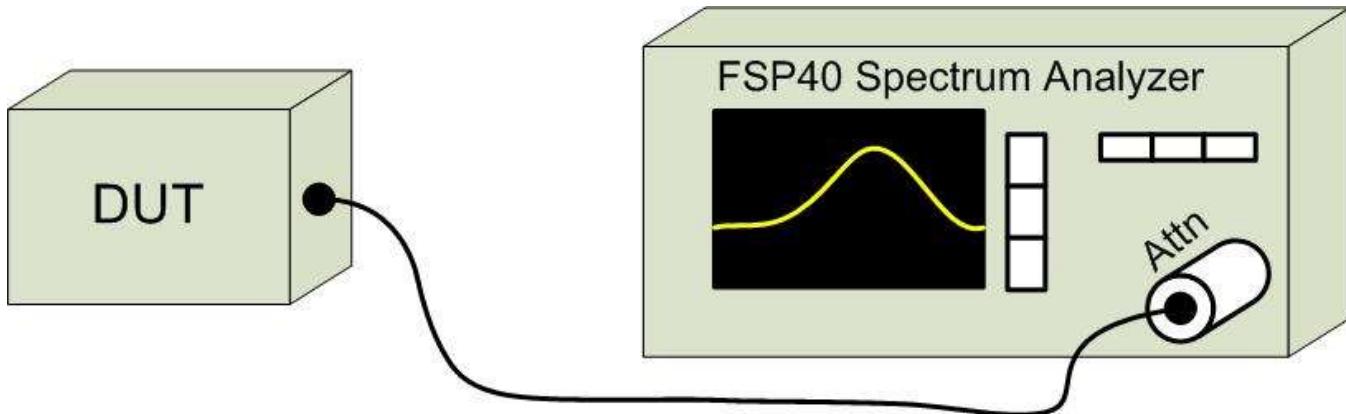
Margin = Attenuation - Limit

ND = None Detected

n/a = Not Applicable

**APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT**
**Table A.1 – Setup - Conducted Measurements Equipment**

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00241	R&S	FSU40	Spectrum Analyzer

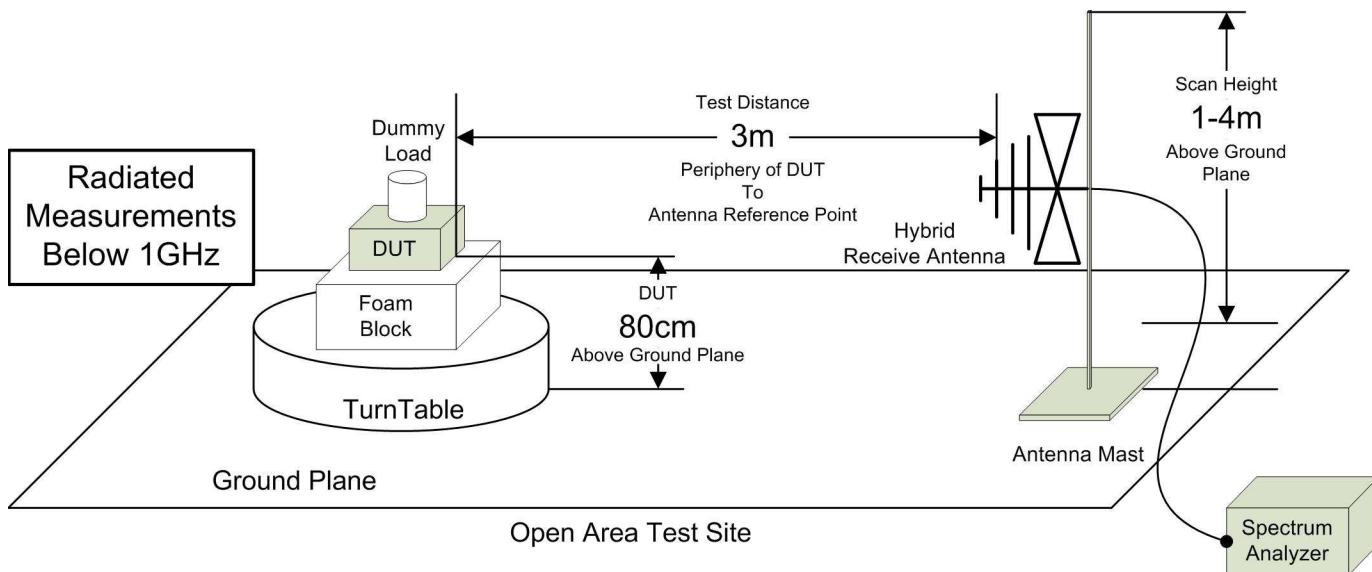
**Figure A.1 – Test Setup Conducted Measurements**


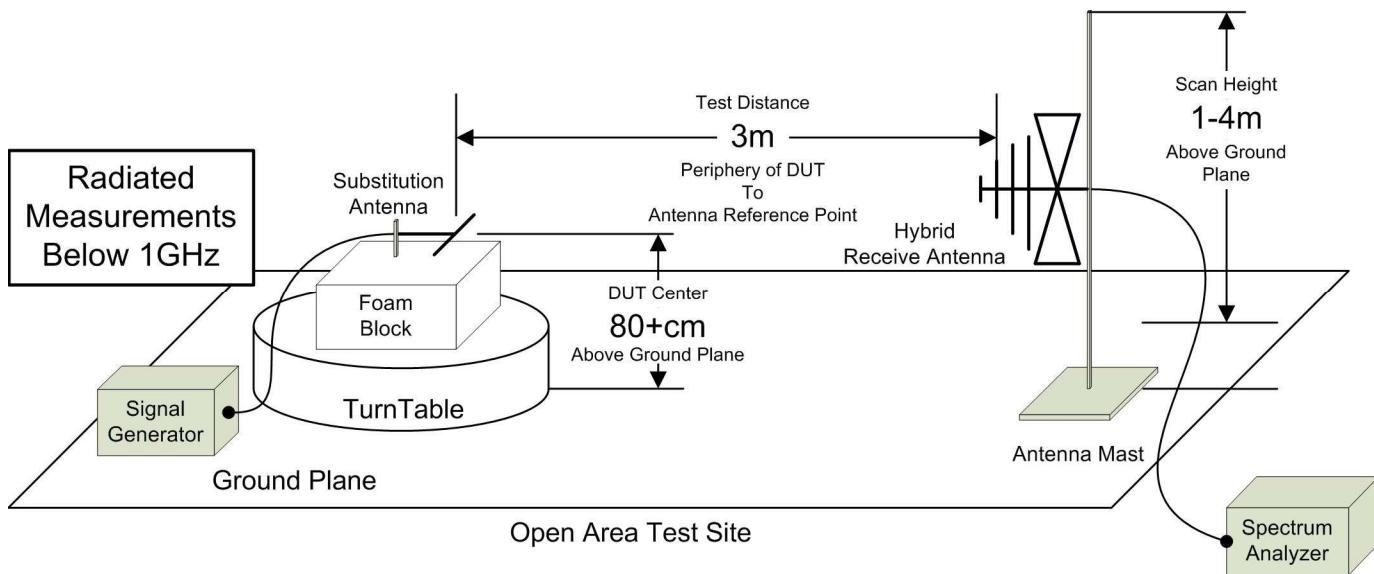
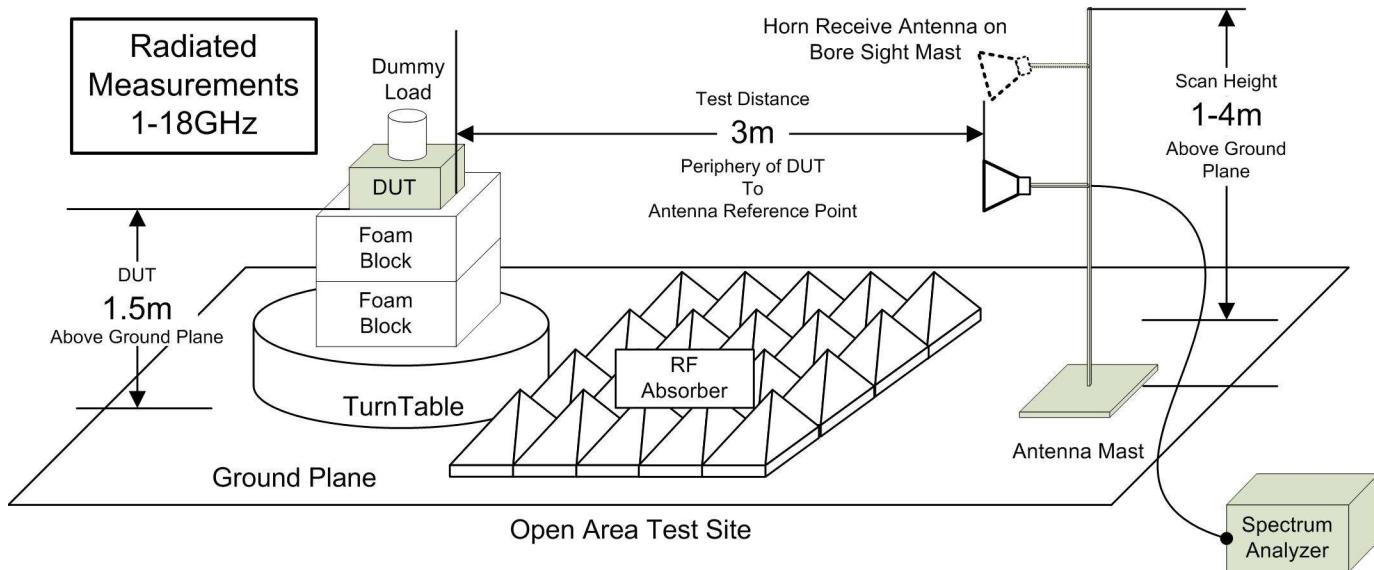
**Table A.2 – Setup - Radiated Emissions Equipment**

<b>Equipment List</b>			
<b>Asset Number</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Description</b>
00072	EMCO	2075	Mini-mast
00073	EMCO	2080	Turn Table
00071	EMCO	2090	Multi-Device Controller
00241	R&S	FSU40	Spectrum Analyzer
00050	Chase	CBL-6111A	Bilog Antenna
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00034	ETS	3115	Double Ridged Guide Horn

CNR: Calibration Not Required

COU: Calibrate On Use

**Figure A.2 – Test Setup Radiated Measurements 30MHz – 1GHz**


**Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution**

**Figure A.4 – Test Setup Radiated Measurements 1 – 18GHz,**


**APPENDIX B – EQUIPMENT LIST AND CALIBRATION**

Equipment List					Last Calibrated	Calibration Interval	Calibration Due
Asset Number	Manufacturer	Model Number	Serial Number	Description			
00050	Chase	CBL-6111A	1607	Bilog Antenna	16 Nov 2023	Triennial	16 Nov 2026
00035	ETS	3115	6276	Double Ridged Guide Horn	4 Mar 2022	Triennial	4 Mar 2025
00241	R&S	FSU40	100500	Spectrum Analyzer	6 Sep 2024	Triennial	6 Sep 2027
00250	Circuit Test	DMR-1800	TE182	Digital Multi-Meter - DVM	26 Jun 2023	Triennial	26 Jun 2026
00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable	COU	n/a	COU
00130	Pasternack	PE7019-30	n/a	30dB, 50W Attenuator	COU	n/a	COU
00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR

NCR: No Calibration Required

COU: Calibrate On Use

**APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY**
**CISPR 16-4 Measurement Uncertainty (  $U_{LAB}$  )**

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of  $k=2$

**30MHz - 200MHz**

$U_{LAB} = 5.14\text{dB}$     $U_{CISPR} = 6.3\text{dB}$

**200MHz - 1000MHz**

$U_{LAB} = 5.90\text{dB}$     $U_{CISPR} = 6.3\text{dB}$

**1GHz - 6GHz**

$U_{LAB} = 4.80\text{dB}$     $U_{CISPR} = 5.2\text{dB}$

**6GHz - 18GHz**

$U_{LAB} = 5.1\text{dB}$     $U_{CISPR} = 5.5\text{dB}$

If the calculated uncertainty  $U_{lab}$  is **less** than  $U_{CISPR}$  then:

1 Compliance is deemed to occur if **NO** measured disturbance exceeds the disturbance limit

2 Non-Compliance is deemed to occur if **ANY** measured disturbance **EXCEEDS** the disturbance limit

If the calculated uncertainty  $U_{lab}$  is **greater** than  $U_{CISPR}$  then:

3 Compliance is deemed to occur if **NO** measured disturbance, increased by  $( U_{lab} - U_{CISPR} )$ , exceeds the disturbance limit

4 Non-Compliance is deemed to occur if **ANY** measured disturbance, increased by  $( U_{lab} - U_{CISPR} )$ , **EXCEEDS** the disturbance limit

**END OF REPORT**