FCC CERTIFICATION
On Behalf of
Micro Electronics Ltd.

FM Transmitter for ipod Model No.: FM-03(US)

FCC ID: UJDFM88

Prepared for : Micro Electronics Ltd.

Address : 7/F., Enterprise Square Three, 39 Wang Chiu Road,

Kowloon Bay, Kowloon, Hong Kong

Prepared by : ACCURATE TECHNOLOGY CO. LTD

Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

Tel: (0755) 26503290 Fax: (0755) 26503396

Report Number : ATE20061902
Date of Test : September 22, 2006
Date of Report : September 27, 2006

TABLE OF CONTENTS

Dε	escription	Page
Te	st Report Certification	
1.	GENERAL INFORMATION	4
1	1.1. Description of Device (EUT)	
	1.2. Description of Test Facility	
	1.3. Measurement Uncertainty	
2.	MEASURING DEVICE AND TEST EQUIPMENT	
3.	RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)	
3	3.1. Block Diagram of Test Setup	6
3	3.2. The Emission Limit for section 15.239(c)	
3	3.3. Configuration of EUT on Measurement	
3	3.4. Operating Condition of EUT	
3	3.5. Test Procedure	
3	3.6. The Field Strength of Radiation Emission Measurement Results	
4.	· · · · · · · · · · · · · · · · · · ·	
2	4.1. Block Diagram of Test Setup	11
2	4.2. The Emission Limit For Section 15.239(b)	
2	4.3. EUT Configuration on Measurement	
2	4.4. Operating Condition of EUT	
4	4.5. Test Procedure	
۷	4.6. The Emission Measurement Result	
5.	OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION 15.239(A)	
	5.1. The Requirement For Section 15.239(a)	
	5.2. EUT Configuration on Measurement	
	5.3. Operating Condition of EUT	
	5.4. Test Procedure	
	5.5. Test Result	
6.	TUNING RANGE	
	5.1. The Requirement For Section 15.239	
	5.2. EUT Configuration on Measurement	
	5.3. Operating Condition of EUT	
	5.4. Test Procedure	
	5.5. Test Result	
7.	RADIATED EMISSION FOR FCC PART 15 SECTION 15.109(A)	
	7.1. Block Diagram of Test Setup	
	7.2. The Emission Limit for section 15.109(a)	
	7.3. Configuration of EUT on Measurement	
	7.4. Operating Condition of EUT	
	7.5. Test Procedure	
	7.6. The Field Strength of Radiation Emission Measurement Results	
8.	CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.107(A)	
	3.1. Block Diagram of Test Setup	
	3.2. The Emission Limit For Section 15.107(a)	
	3.3. EUT Configuration on Measurement	
	8.4. Operating Condition of EUT	
	8.5. Test Procedure	
	8.6. Power Line Conducted Emission Measurement Results	
(APPENDIX I (TEST CURVES) (13pages)	23

Test Report Certification

Applicant : Micro Electronics Ltd.
 Manufacturer : Micro Electronics Ltd.
 EUT Description : FM Transmitter For ipod

(A) MODEL NO.: FM-03(US)

(B) SERIAL NO.: N/A

(C) POWER SUPPLY: DC 3.3V(Power By ipod), DC 5.0V(Power By PC)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.239, Section 15.109, Section 15.107: 2006

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section15.239, Section 15.109,Section 15.107 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test :	September 22, 2006	
Prepared by:	sky Long	
	(Engineer)	_
Reviewer:	Searle)	
	(Quality Manager)	
Approved & Authorized Signer:	Martinh	
	(Manager)	_

1. GENERAL INFORMATION

1.1.Description of Device (EUT)

EUT : FM Transmitter For ipod

Model Number : FM-03(US)

Power Supply : DC 3.3V(Power By ipod), DC 5.0V(Power By PC)

Operate Frequency : 88.1-107.9MHz

USB Cable : Non-shielded, detachable, 1.1m<3m, with a ferrite core

iPod : Manufacturer: Apple

M/N: A1136

S/N: JQ543GF9SZA

Notebook PC : Manufacturer: SONY

M/N: PCG-663P

S/N: 28123170 7202526

Printer : Manufacturer: Canon

Model No.: BJC-1000SP

Applicant : Micro Electronics Ltd.

Address : 7/F., Enterprise Square Three, 39 Wang Chiu Road,

Kowloon Bay, Kowloon, Hong Kong

Manufacturer : Micro Electronics Ltd.

Address : 7/F., Enterprise Square Three, 39 Wang Chiu Road,

Kowloon Bay, Kowloon, Hong Kong

Date of sample received: September 8, 2006 Date of Test: September 22, 2006

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004

Accredited by FCC, May 10, 2004

The Certificate Registration Number is 253065

Accredited by Industry Canada, May 18, 2004 The Certificate Registration Number is IC 5077

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.

Science & Industry Park, Nanshan, Shenzhen, Guangdong

P.R. China

1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 4.12dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.31.2007
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.02.2007
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2007
Bilog Antenna	Chase	CBL6112B	2591	03.31.2007
Horn Antenna	Rohde&Schwarz	HF906	100013	01.02.2007
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.31.2007
Pre-Amplifier	Agilent	8447D	2944A10619	03.31.2007
Audio Generator	GW	GAG-810	0913317	01.02.2007
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100305	03.31.2007
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100310	03.31.2007

3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)


3.1.Block Diagram of Test Setup

3.1.1.Block diagram of connection between the EUT and simulators



(EUT: FM Transmitter For ipod)

3.1.2. Anechoic Chamber Test Setup Diagram

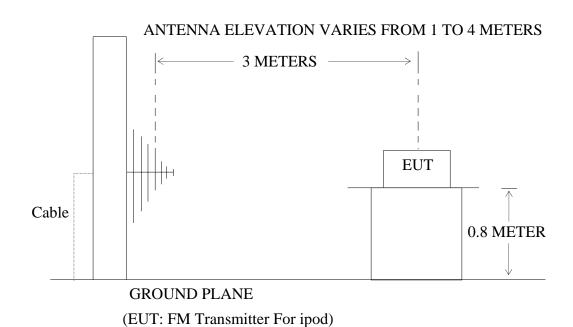

3.2. The Emission Limit for section 15.239(c)

3.2.1 The field strength of any emissions radiated on any frequency outside of the specified 200kHz band shall not exceed the general radiated emission limits in section 15.209

Radiation Emission Measurement Limits According to Section 15.209

1			
		Limit,	
Frequency (MHz)	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBµV/m)	The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is
30 - 88	100	40	performed with
88 - 216	150	43.5	Average detector. Except those frequency bands

216 - 960	200	46	mention above, the final measurement for
Above 960	500	54	frequencies below 1000MHz is performed with Quasi Peak detector.

3.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1.FM Transmitter For ipod (EUT)

Model Number : FM-03(US)

Serial Number : N/A

Manufacturer : Micro Electronics Ltd.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

Let the EUT work in TX modes [Plug iPod to EUT 30pin Connector and ipod playing typical audio signal(music song) with maximum audio level] measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

3.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESCS30) is set at 120KHz in 30-1000MHz; Set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 1100MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

3.6. The Field Strength of Radiation Emission Measurement Results **PASS.**

The frequency range 30MHz to 1100MHz is investigated.

Date of Test: November 1, 2006 Temperature: 27°C

EUT: FM Transmitter For ipod Humidity: 55%

Model No.: FM-03(US) Power Supply: DC 3.3V(Power By ipod)

TX 88.1MHz[30pin connector Input typical audio signal(music song) with the maximum audio

Test Mode: input] Test Engineer: Andy

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBμV/m) QP	Margin(dBμV/m) QP
Horizontal	176.216	21.8	8.0	29.8	43.5	13.7
Horizontal	502.940	12.1	17.0	29.1	46.0	16.9
Horizontal	582.120	14.3	18.3	32.6	46.0	13.4
Horizontal	640.970	14.7	19.1	33.8	46.0	12.2
Horizontal	658.090	15.0	19.3	34.3	46.0	11.7
Vertical	176.220	14.1	8.4	22.5	43.5	21.0
Vertical	496.520	11.2	17.5	28.7	46.0	17.3

The spectral diagrams in appendix I display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

Date of Test: November 1, 2006 Temperature: 27°C

EUT: FM Transmitter For ipod Humidity: 55%

Model No.: FM-03(US) Power Supply: DC 3.3V(Power By ipod)

TX 98.1MHz[30pin connector Input typical audio signal(music song) with the maximum audio

Test Mode: input] Test Engineer: Andy

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBµV/m) QP	Limits(dBµV/m) QP	Margin(dBμV/m) QP
Horizontal	196.206	20.9	9.6	30.5	43.5	13.0
Vertical	196.208	13.2	9.0	22.2	43.5	21.3
Vertical	497.590	10.6	17.5	28.1	46.0	17.9

The spectral diagrams in appendix I display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

Date of Test: November 1, 2006

EUT: FM Transmitter For ipod Humidity: 55%

Model No.: FM-03(US)

TX 107.9MHz[30pin connector Input typical audio signal(music song) with the maximum audio

Test Mode: input] Test Engineer: Andy

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBµV/m) QP	Margin(dBμV/m) QP
Horizontal	215.796	21.7	9.7	31.4	46.0	14.6
Horizontal	640.970	13.2	19.1	32.3	46.0	13.7
Vertical	215.795	12.0	8.8	20.8	46.0	25.2
Vertical	496.520	10.6	17.5	28.1	46.0	17.9

The spectral diagrams in appendix I display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

Reviewer: Seem

4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(B)

4.1.Block Diagram of Test Setup


4.1.1.Block diagram of connection between the EUT and simulators



(EUT: FM Transmitter For ipod)

4.1.2. Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

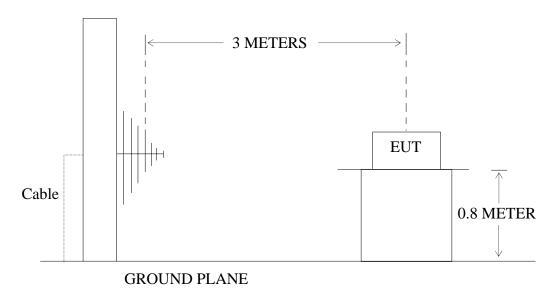

(EUT: FM Transmitter For ipod)

4.2. The Emission Limit For Section 15.239(b)

4.2.1 The field strength of any emission within the permitted 200kHz band shall not exceed 250microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1.FM Transmitter For ipod (EUT)

Model Number : FM-03(US)

Serial Number : N/A

Manufacturer : Micro Electronics Ltd.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

Let the EUT work in TX modes [Plug iPod to EUT 30pin Connector and ipod playing typical audio signal(music song) with maximum audio level] measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

4.6. The Emission Measurement Result

PASS.

Date of Test: November 1, 2006 Temperature: 27°C

EUT: FM Transmitter For ipod Humidity: 55%

Model No.: FM-03(US) Power Supply: DC 3.3V(Power By ipod)

TX [30pin connector Input

typical audio signal(music song)

Test Mode: with the maximum audio input] Test Engineer: Andy

Fundamental Radiated Emissions

Test conditions		Fundamental	Fundamental Frequency	
		88.1M	88.1MHz	
	Unit	$(dB\mu V/m)/(\mu V/m)$	$(dB\mu V/m)/(\mu V/m)$	
$T_{nom}(22^{\circ}C)$		AV	PEAK	
	Horizontal	40.2/102	42.5/133	
	Vertical	31.6/38 34.0/50		
liı	mit	48/250 68/2500		

Note: Measurement was performed with modulated signal with average detector and peak detector.

Test conditions		Fundamental	Fundamental Frequency	
		98.1M	ΙΗz	
	Unit	$(dB\mu V/m)/(\mu V/m)$	$(dB\mu V/m)/(\mu V/m)$	
$T_{\text{nom}}(22^{\circ}\text{C})$		AV	PEAK	
	Horizontal	36.2/65	38.4/83	
	Vertical	30.4/33 32.5/42		
limit		48/250	68/2500	

Note: Measurement was performed with modulated signal with average detector and peak detector.

Test conditions		Fundamental	Fundamental Frequency	
		107.9N	ИHz	
	Unit	$(dB\mu V/m)/(\mu V/m)$	$(dB\mu V/m)/(\mu V/m)$	
$T_{nom}(22^{\circ}C)$		AV	PEAK	
	Horizontal	35.5/60	37.8/78	
	Vertical	32.0/40 33.6/48		
limit 48/250 6		68/2500		

Note: Measurement was performed with modulated signal with average detector and peak detector.

Reviewer:



5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION

15.239(A)

5.1. The Requirement For Section 15.239(a)

5.1.1. Emission from the device shall be confined within a band 200kHz wide centered on the operating frequency. The 200kHz band shall lie wholly within the frequency range of 88-108MHz.

5.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.2.1.FM Transmitter For ipod (EUT)

Model Number : FM-03(US)

Serial Number : N/A

Manufacturer : Micro Electronics Ltd.

5.3. Operating Condition of EUT

- 5.3.1. Setup the EUT and simulator as shown as Section 4.1.
- 5.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes [Plug iPod to EUT 30pin Connector and ipod playing typical audio signal(music song) with maximum audio level] measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

5.4.Test Procedure

The zero level was set without modulation. A small sample of the transmitter output was fed into the spectrum analyzer and above photo was taken. The vertical scale is set to 10dB per division; the horizontal scale is set to 20kHz per division.

5.5.Test Result

The EUT does meet the FCC requirement.

Input signal: play typical audio signal(music song)

FM 88.1MHz

26dB bandwidth = 162.0kHz

FM 98.1MHz

26dB bandwidth = 143.2kHz

FM 107.9MHz

26dB bandwidth = 126.0kHz

Reviewer: Seem

6. TUNING RANGE

6.1. The Requirement For Section 15.239

88-108MHz

6.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.2.1.FM Transmitter For iPod (EUT)

Model Number : FM-03(US)

Serial Number : N/A

Manufacturer : Micro Electronics Ltd.

6.3. Operating Condition of EUT

- 6.3.1. Setup the EUT and simulator as shown as Section 4.1.
- 6.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes [Plug iPod to EUT 30pin Connector and ipod playing typical audio signal(music song) with maximum audio level] measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

6.4. Test Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set the EUT working on the lowest frequency.
- 3. Set EMI test receiver center frequency = working frequency, RBW, VBW= 10KHz, Span=300KHz.
- 4. Measuring the working frequency. And check the measuring result with the EUT display.
- 3. Set the EUT working on the mid frequency. Repeat step 3 and 4.
- 4. Set the EUT working on the high frequency. Repeat step 3 and 4.
- 5. Tune the knob to select the transmission frequency, from the low to high frequency. And check the working frequency display on the screen. The working frequency should be inside 88-108MHz.

6.5.Test Result

The EUT does meet the FCC requirement.

Low Frequency= 88.1032MHz
Mid Frequency= 98.1036MHz
High Frequency=107.9044MHz
EUT screen display 98.1MHz
EUT screen display 107.9MHz


The working frequency rang is from 88.1 to 107.9MHz.

Reviewer: Seem

7. RADIATED EMISSION FOR FCC PART 15 SECTION 15.109(A)


7.1.Block Diagram of Test Setup

7.1.1.Block diagram of connection between the EUT and simulators



(EUT: FM Transmitter For ipod)

7.1.2. Anechoic Chamber Test Setup Diagram

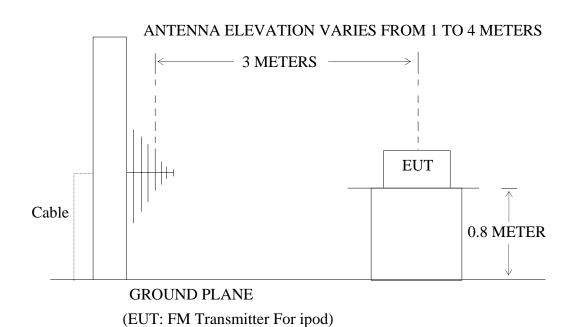

7.2. The Emission Limit for section 15.109(a)

Radiation Emission Measurement Limits According to Section 15.109

	Lim	it
Frequency (MHz)	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBµV/m)
30 - 88	100	40

88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

7.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1.FM Transmitter For ipod (EUT)

Model Number : FM-03(US)

Serial Number : N/A

Manufacturer : Micro Electronics Ltd.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 6.1.

7.4.2. Turn on the power of all equipment.

Let the EUT work in test modes (Connect to PC USB Port, PC run Transfer Data test program) measure it.

7.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESCS30) is set at 120KHz in 30-1000MHz; Set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 1000MHz is checked.

7.6. The Field Strength of Radiation Emission Measurement Results **PASS.**

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:September 22, 2006Temperature:25°CEUT:FM Transmitter For ipodHumidity:54%Model No.:FM-03(US)Power Supply:DC 5.0V(Power By PC)Test Mode:Connect to PC, Transfer DataTest Engineer:Andy

Polarization	Frequency (MHz)	Reading(dBµV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBµV/m) QP	Margin(dBμV/m) QP
Horizontal	43.580	22.3	12.5	34.8	40.0	5.2
Horizontal	203.630	24.7	9.6	34.3	43.5	9.2
Horizontal	222.060	26.3	9.7	36.0	46.0	10.0
Horizontal	485.900	24.4	16.7	41.1	46.0	4.9
Vertical	42.610	18.7	15.4	34.1	40.0	5.9
Vertical	371.440	21.8	14.4	36.2	46.0	9.8
Vertical	903.970	16.5	23.9	40.4	46.0	5.6

The spectral diagrams in appendix I display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor


Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Amplifier Gain

Reviewer:

8. CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.107(A)


8.1.Block Diagram of Test Setup

8.1.1.Block diagram of connection between the EUT and simulators



(EUT: FM Transmitter For ipod)

8.1.2. Shielding Room Test Setup Diagram

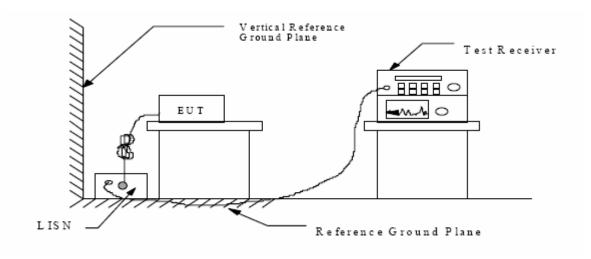

(EUT: FM Transmitter For ipod)

8.2. The Emission Limit For Section 15.107(a)

7.2.1 Radiation Emission Measurement Limits According to Section 15.107(a)

Frequency	Conducted Limit (dBµV)		
(MHz)	Quasi-peak	Average	
0.15 - 0.5	66 to 56*	56 to 46*	
0.5 - 5	56	46	
5 - 30	60	50	

^{*} Decreases with the logarithm of the frequency.

8.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. FM Transmitter For ipod (EUT)

Model Number : FM-03(US)

Serial Number : N/A

Manufacturer : Micro Electronics Ltd.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 7.1.

8.4.2. Turn on the power of all equipment.

Let the EUT work in test modes (Connect to PC USB Port, PC run Transfer Data test program) measure it.

8.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 500hm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

All the scanning waveforms are attached in Appendix I.

8.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.


Date of Test:September 22, 2006Temperature:22°CEUT:FM Transmitter For ipodHumidity:50%Model No.:FM-03(US)Power Supply:DC 5.0V(Power By PC)Test Mode:Connect to PC, Transfer DataTest Engineer:Andy

Test Line	Frequency MHz	Emission Level(dBµV) QP AV		Limits(dBµV) QP AV		Margin(dBμV) QP AV	
Va	-	-	-	-	-	-	-
Vb	-	-	-	-	-	-	-

The spectral diagrams in appendix I display the measurement of un-weighted peak values.

Reviewer:	Soun()	


APPENDIX I (Test Curves)

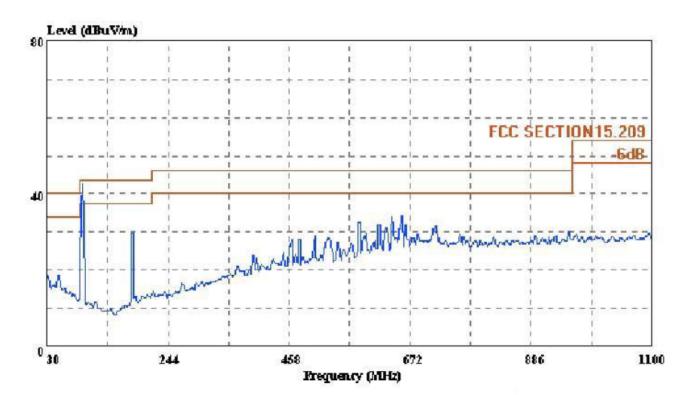

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA HORIZONTAL

eut : FM transmitter for iPod m/n:FM-03(US)

power : DC 3.3V memo : TX 88.1MHz

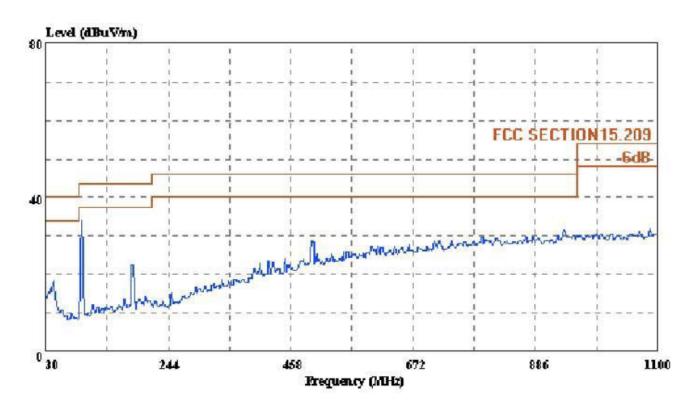


Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA VERTICAL

eut : FM transmitter for iPod m/n:FM-03(US)

power : DC 3.3V memo : TX 88.1MHz manuf : Micro


sample no.: 062732

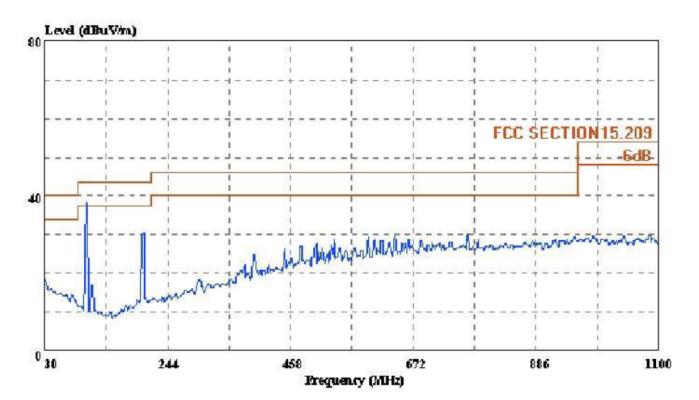

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA HORIZONTAL

eut : FM transmitter for iPod m/n:FM-03(US)


power : DC 3.3V memo : TX 98.1MHz

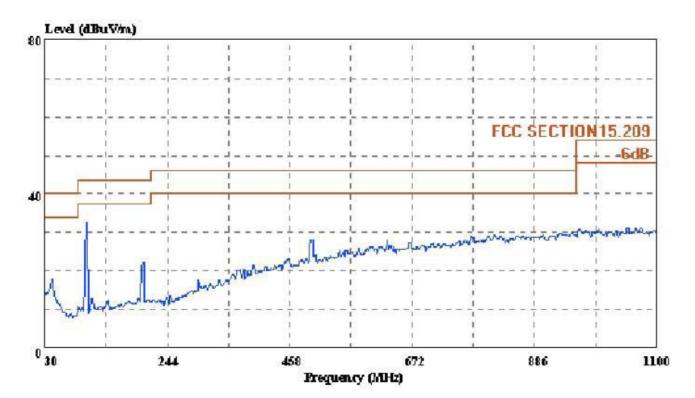

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA VERTICAL

eut : FM transmitter for iPod m/n:FM-03(US)


power : DC 3.3V memo : TX 98.1MHz

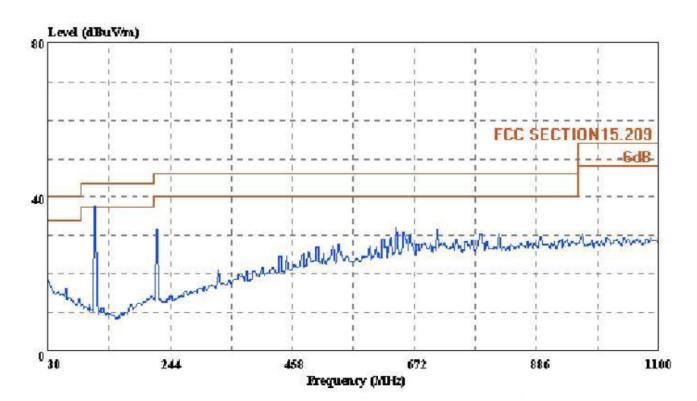

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA HORIZONTAL

eut : FM transmitter for iPod m/n:FM-03(US)


power : DC 3.3V memo : TX 107.9MHz

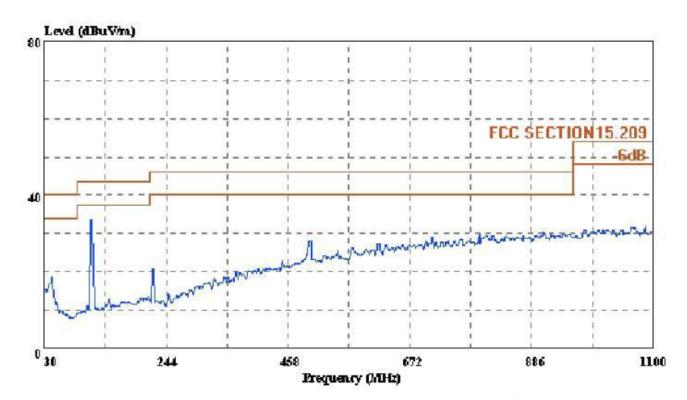

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA VERTICAL

eut : FM transmitter for iPod m/n:FM-03(US)

power : DC 3.3V memo : TX 107.9MHz

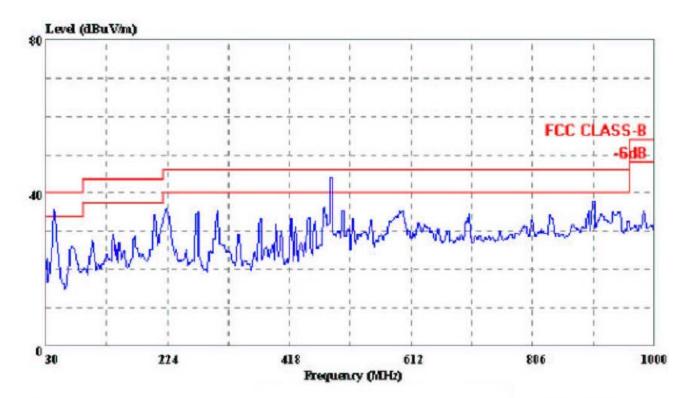


Condition: FCC CLASS-B 3m ATC VULB9163 (NEW) HORIZONTAL

eut : FM transmitter for iPod m/n:FM-03(US)

power : USB 5.0V memo : TRANSFER DATA

manuf : Micro Sample NO.: 062732

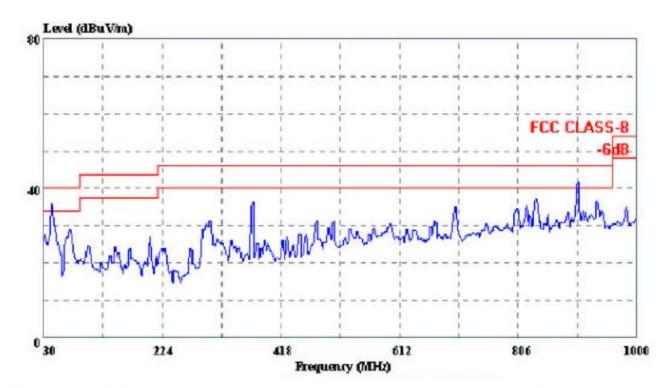



Condition: FCC CLASS-B 3m ATC VULB9163 (NEW) VERTICAL : FM transmitter for iPod m/n:FM-03(US) eut


: USB 5.0V power

memo : TRANSFER DATA

: Micro manuf Sample NO.: 062732

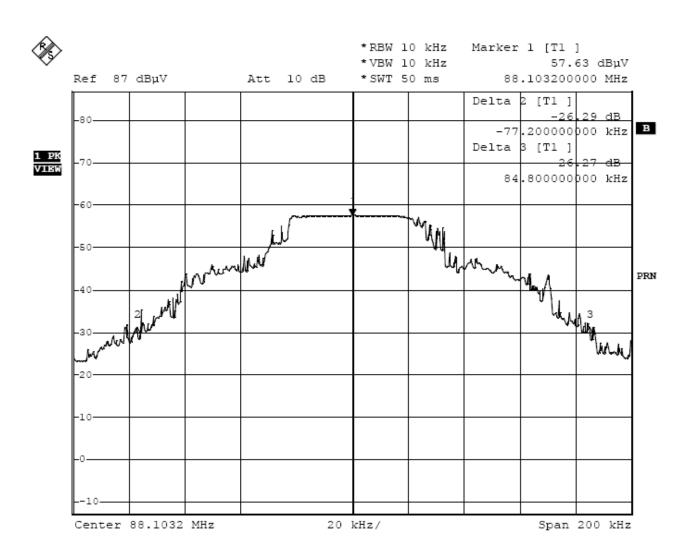

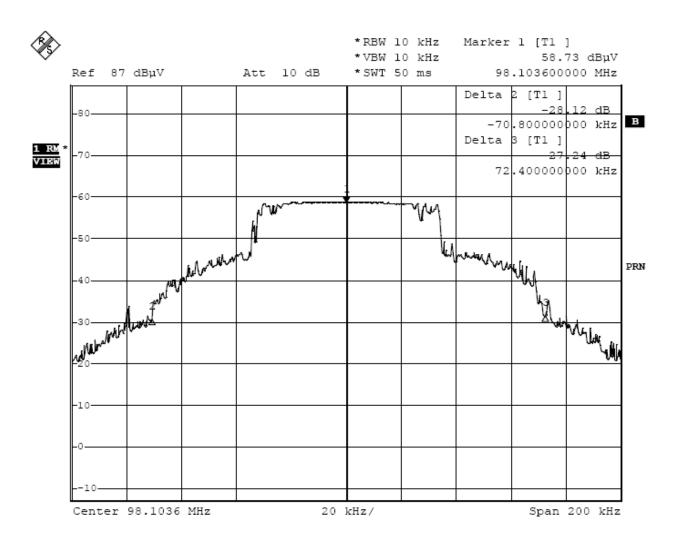

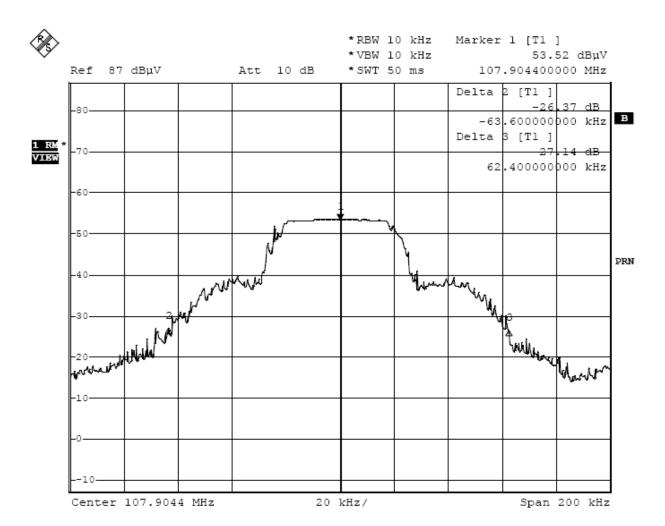

CONDUCTION EMISSION STANDARD FCC PART 15B 25, Sep 06 16:25


EUT: FM transmitter for iPod m/n:FM-03(US)

Manuf: Op Cond: Micro

TRANSFER DATA Andy.tan Va 120V/60Hz Tem25% Humi50% Operator: Test Spec: Comment: Sample no.:062732

Scan Settings (3 Ranges)

Transducer No. Start Stop Name 1 9k 30M confac Final Measurement: x QP / + AV Meas Time: 1 s

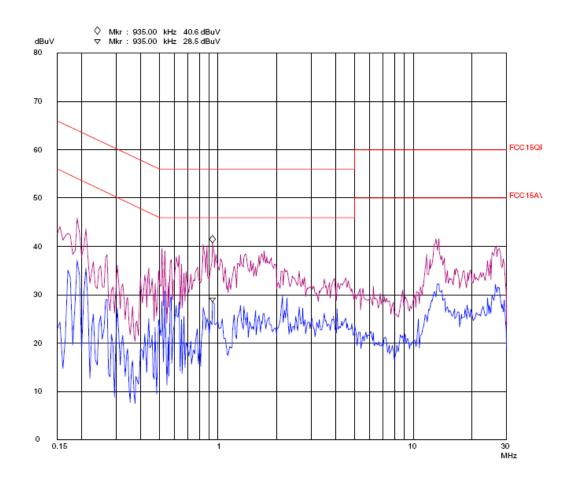

CONDUCTION EMISSION STANDARD FCC PART 15B 25, Sep 06 16:30

EUT: FM transmitter for iPod m/n:FM-03(US)

EUT: FM transmitter for IP Manuf: Micro Op Cond: TRANSFER DATA Operator: Andy.tan Test Spec: Vb 120V/60Hz Comment: Tem25% Humi50% Sample no.:062732

Scan Settings (3 Ranges)

Frequencies			11	Recei	ver Settings	
Start	Stop	Step	IË B\	N Detecto	r M-Time Atten	Preamp
150k	2M	5k	9k	PK+AV	10ms AUTO LN	OFF
2M	10M	10k	9k	PK+AV	1ms AUTO LN	OFF
10M	30M	251	Ol-	DK+4V	1ms AUTO LN	LOFE

 Final Measurement: x QP / + AV
 Transducer No. Start
 Stop
 Name

 Meas Time:
 1 s
 1 9k
 30M
 confac

