FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.239

Equipment : A1290 ALL-IN-ONE HEADREST LCD/DVD

Model No. : A1290

Filing Type : New Application

Applicant E-BRIDGE OPTOELECTONICS CO., LTD.

5F, No. 6, Housheng Rd, Luzhu Shiang, Taoyuan Country

338, Taiwan (R.O.C.)

FCC ID : UJGA1250BOXBZD01

Manufacturer . E-BRIDGE OPTOELECTONICS CO., LTD.

5F, No. 6, Housheng Rd, Luzhu Shiang, Taoyuan Country

338, Taiwan (R.O.C.)

Received Date : Jan. 08, 2007 Final Test Date : Jun. 30, 2007

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1.	SUMI	MARY OF THE TEST RESULT	2
2.	GENE	ERAL INFORMATION	3
	2.1.	Product Details	
	2.2.	Table for Carrier Frequencies	
	2.3.	Table for Test Modes	
	2.4.	Table for Testing Locations	4
	2.5.	Table for Supporting Units	4
	2.6.	Test Configurations	4
3.	TEST	「RESULT	5
	3.1.	AC Power Line Conducted Emissions Measurement	
	3.2.	Field Strength of Fundamental Emissions Measurement	8
	3.3.	20dB Spectrum Bandwidth Measurement	
	3.4.	Radiated Emissions Measurement	14
	3.5.	Band Edge Emissions Measurement	22
	3.6.	Antenna Requirements	24
4.	LIST	OF MEASURING EQUIPMENTS	25
5.	TEST	「LOCATION	26
6.	TAF (CERTIFICATE OF ACCREDITATION	27
ΑF	PPENI	DIX A. TEST PHOTOS	A1 ~ A3
ΔΕ	PPFNI	DIX B. PHOTOGRAPHS OF FUT	R1 ~ R21

FAX: 886-2-2696-2255

Page No. : i of ii Issued Date : Jul. 04, 2007

FCC ID : UJGA1250BOXBZD01

History of This Test Report

Original Issue Date: Jul. 04, 2007

Report No.: FR760807

■ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

 SPORTON International Inc.
 Page No.
 : ii of ii

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

SPORTON INTERNATIONAL INC.



FCC TEST REPORT

Report No.: FR760807

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.239

Equipment

: A1290 ALL-IN-ONE HEADREST LCD/DVD

Model No.

: A1290

Applicant

: E-BRIDGE OPTOELECTONICS CO., LTD.

5F, No. 6, Housheng Rd, Luzhu Shiang, Taoyuan Country

338, Taiwan (R.O.C.)

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 08, 2007 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Expre 2/21/2.207

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL: 886-2-2696-2468

FAX: 886-2-2696-2255

Page No.

: 1 of 27

Issued Date : Jul. 04, 2007

FCC ID

: UJGA1250BOXBZD01

1. SUMMARY OF THE TEST RESULT

	Applied Standard: 47 CFR FCC Part 15 Subpart C					
Part	Rule Section	Description of Test	Result	Under Limit		
3.1	15.207	AC Power Line Conducted Emissions	Not Applicable	-		
3.2	15.239(b)	Field Strength of Fundamental Emissions	Complies	6.65 dB		
3.3	15.239(a)	20dB Spectrum Bandwidth	Complies	-		
3.4	15.239(c)	Radiated Emissions	Complies	6.16 dB		
3.5	15.239(c)	Band Edge Emissions	Complies	-		
3.6	15.203	Antenna Requirements	Complies	-		

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±1.9dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated / Band Edge Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7℃	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

 SPORTON International Inc.
 Page No.
 : 2 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

2. GENERAL INFORMATION

2.1. Product Details

Items	Description
Modulation	FM
Frequency Range	88 ~ 108MHz
Channel Number	8
Channel Band Width (99%)	66.00 kHz
Max. Field Strength	41.35 dBuV/m at 3m (Average)
Antenna	External Fixed Antenna

2.2. Table for Carrier Frequencies

Freqeuncy Band	Channel No.	Frequency
	1	88.5 MHz
	2	88.7 MHz
	3	88.9 MHz
88 ~ 108MHz	4	89.1 MHz
00 ~ 100WITZ	5	89.3 MHz
	6	89.5 MHz
	7	89.7 MHz
	8	89.9 MHz

The EUT can be tuned manually at the 8 channels above only. Test engineers have checked the max turning range that is from 88.5MHz to 89.9MHz.

2.3. Table for Test Modes

Audio input adjusted to maximize emission for test. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	-	-
Field Strength of Fundamental Emissions	СТХ	1/8
20dB Spectrum Bandwidth		
Radiated Emissions 9kHz~30MHz	СТХ	8
Radiated Emissions 30MHz~10 th Harmonic	CTX	1/8
Band Edge Emissions	-	-

Note:

CTX=Continuously transmitting

 SPORTON International Inc.
 Page No. : 3 of 27

 TEL: 886-2-2696-2468
 Issued Date : Jul. 04, 2007

2.4. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	-	-	-	-	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-


Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

2.5. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
TV	SV	PMH-215C	DoC
DVD	SONY	DCP-545D	DoC
Headset	VIEWSONIC	-	DoC

2.6. Test Configurations

2.6.1. Radiation Emissions Test Configuration

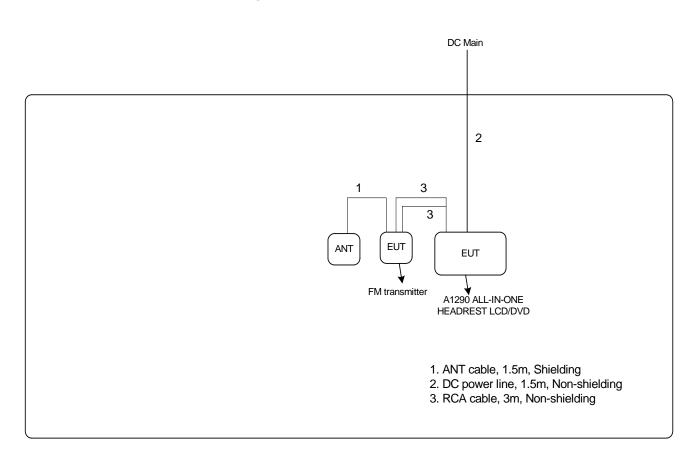

 SPORTON International Inc.
 Page No.
 : 4 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3. TEST RESULT

3.1. AC Power Line Conducted Emissions Measurement

3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3. Test Procedures


- 1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
- 4. The frequency range from 150 KHz to 30 MHz was searched.
- 5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

The measurement has to be done between each power line and ground at the power terminal.

 SPORTON International Inc.
 Page No.
 : 5 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.1.4. Test Setup Layout

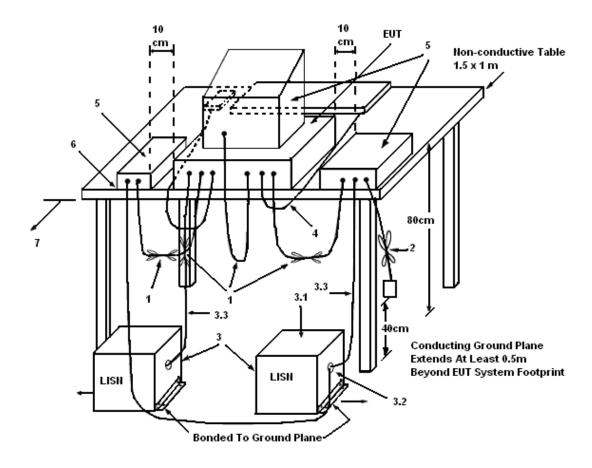

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

 SPORTON International Inc.
 Page No.
 : 6 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.1.5. Test Deviation

There is no deviation with the original standard.

3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7. Results of AC Power Line Conducted Emissions Measurement

The EUT is power by battery on vehicle so there is no need to do this test.

 SPORTON International Inc.
 Page No.
 : 7 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.2. Field Strength of Fundamental Emissions Measurement

3.2.1. Limit

The field strength of fundamental emissions shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
88~108	48 (Average)
88~108	68 (Peak)

3.2.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	120 KHz
Detector	Peak / Average


3.2.3. Test Procedures

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. For Fundamental emissions, use the receiver to measure peak and average reading.
- 6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

 SPORTON International Inc.
 Page No.
 : 8 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.2.4. Test Setup Layout

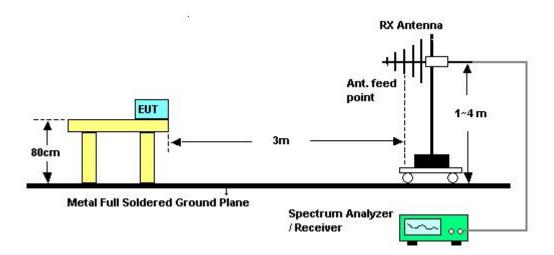

3.2.5. Test Deviation

There is no deviation with the original standard.

3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 SPORTON International Inc.
 Page No.
 : 9 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	26 ℃	Humidity	55%
Test Engineer	Kay	Configurations	Channel 1/8

Channel 1

	Freq	Level	Over Limit			Antenna Factor				Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ş 	cm	deg
1	88.530	42.73	-25.27	68.00	59.99	9.07	1.30	27.64	Peak	03555	<u> 2000</u>
2	88.530	40.95	-7.05	48.00	58.21	9.07	1.30	27.64	Average		200

Channel 8

			0ver	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		- CW	deg
1	89.920	42.96	-25.04	68.00	59.78	9.50	1.30	27.62	Peak	-	555
2	89.920	41.35	-6.65	48.00	58.17	9.50	1.30	27.62	Average		

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

 SPORTON International Inc.
 Page No.
 : 10 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.3. 20dB Spectrum Bandwidth Measurement

3.3.1. Limit

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency.

3.3.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	10 kHz
VB	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2. Check for a Bandwidth test with audio input CTX1(100Hz~5kHz) at maximum.
- 3. The resolution bandwidth of 10 kHz and the video bandwidth of 10 kHz were used.
- 4. Measured the spectrum width with power higher than 20dB below carrier.

3.3.4. Test Setup Layout



3.3.5. Test Deviation

There is no deviation with the original standard.

3.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode. Moosic audio input adjusted to maximize 20dB bandwidth for test.

 SPORTON International Inc.
 Page No.
 : 11 of 27


 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	26.8℃	Humidity	54%
Test Engineer	Murphy Lin	Configurations	Channel 1/8

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) f _L >88MHz	Frequency range (MHz) f _H <108MHz	Test Result
88.5 MHz	64.60	59.20	88.4718	-	Complies
89.9 MHz	80.20	66.00	-	89.9484	Complies

20 dB/99% Bandwidth Plot on 88.5 MHz

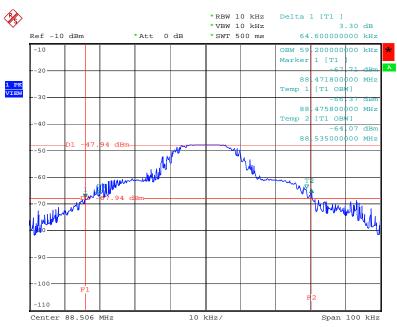


Date: 28.JUN.2007 17:35:27

 SPORTON International Inc.
 Page No.
 : 12 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

20 dB/99% Bandwidth Plot on 89.9 MHz

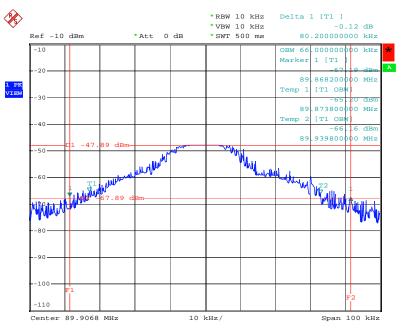

Date: 28.JUN.2007 17:39:58

 SPORTON International Inc.
 Page No.
 : 13 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.4. Radiated Emissions Measurement

3.4.1. Limit

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emissions limits in Section 15.209(a)

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

 SPORTON International Inc.
 Page No.
 : 14 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.4.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.


- 2. Power on the EUT and all the supporting units. Then audio input adjusted to maximize emission for test. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

 SPORTON International Inc.
 Page No.
 : 15 of 27


 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.4.4. Test Setup Layout

For radiated emissions below 30MHz

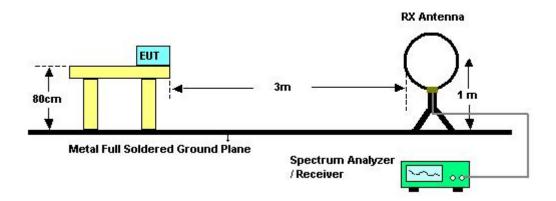

For radiated emissions above 30MHz

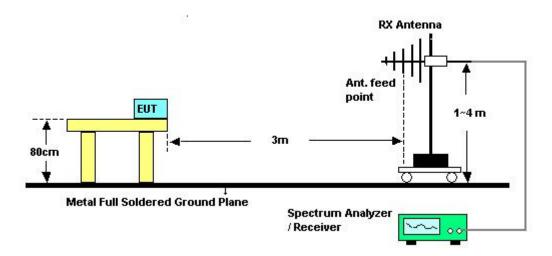

3.4.5. Test Deviation

There is no deviation with the original standard.

3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode. Moosic audio input adjusted to maximize emission for test.

 SPORTON International Inc.
 Page No.
 : 16 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.4.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25℃	Humidity	43%
Test Engineer	Vic Hsiao		

Freq.	Level	Over Limit	Limit Line	Remark
(MHz)	(dBuV)	(dB)	(dBuV)	
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


 SPORTON International Inc.
 Page No.
 : 17 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.4.8. Results for Radiated Emissions (30MHz~10th Harmonic)

Temperature	25℃	Humidity	43%
Test Engineer	Vic Hsiao	Configurations	Channel 1

Horizontal

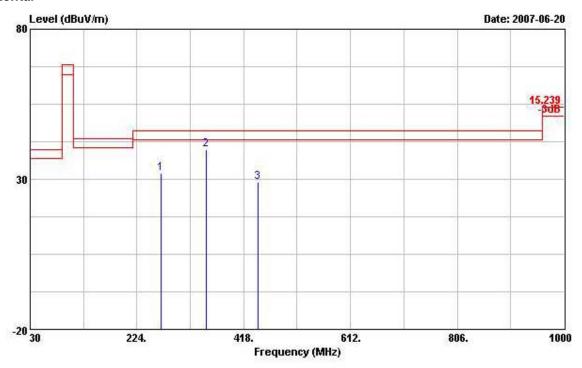


	Freq	Level				Antenna Factor				Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-	- cm	deg
1	268.620	32.04	-13.96	46.00	44.39	13.49	2.43	28.27	Peak		
2	350.100	39.84	-6.16	46.00	50.22	14.99	3.31	28.68	Peak		
3	444.190	28.95	-17.05	46.00	37.39	17.02	3.62	29.07	Peak	222	2000

 SPORTON International Inc.
 Page No.
 : 18 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

Vertical

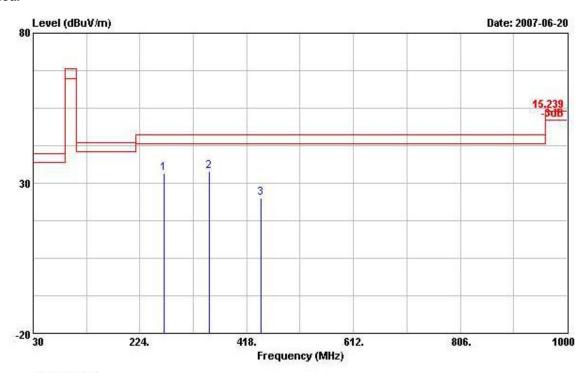

	Freq	Level		Limit Line						Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	268.620	33.14	-12.86	46.00	45.49	13.49	2.43	28.27	Peak		
2	350.100	33.92	-12.08	46.00	44.30	14.99	3.31	28.68	Peak		
3	444.190	24.95	-21.05	46.00	33.39	17.02	3.62	29.07	Peak		

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 SPORTON International Inc.
 Page No.
 : 19 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

Temperature	25℃	Humidity	43%
Test Engineer	Vic Hsiao	Configurations	Channel 8

Horizontal

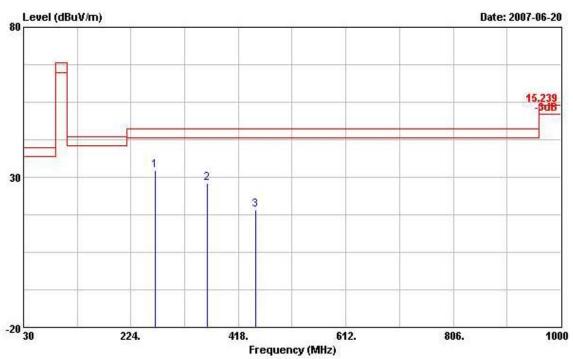


						Antenna				Ant	Table
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	MHz dBuV/m	V/m dB dB	dBuV/m dBuV	dB/m dB	dB		- cm	deg		
1	268.620	32.27	-13.73	46.00	44.62	13.49	2.43	28.27	Peak		
2	362.710	27.95	-18.05	46.00	38.07	15.30	3.31	28.74	Peak		
3	449.500	19.17	-26.83	46.00	27.64	17.10	3.65	29.22	Peak		

 SPORTON International Inc.
 Page No.
 : 20 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

Vertical

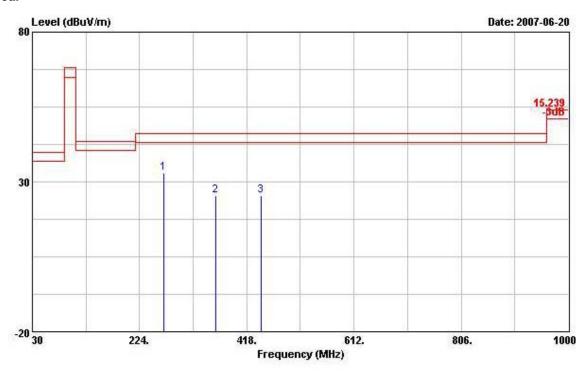

	Freq	Level	Over Limit			Antenna Factor			Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		- cm	deg
1	268.620	33.07	-12.93	46.00	45.42	13.49	2.43	28.27	Peak		
2	362.710	25.42	-20.58	46.00	35.54	15.30	3.31	28.74	Peak		
3	444.190	25.33	-20.67	46.00	33.77	17.02	3.62	29.07	Peak		

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 SPORTON International Inc.
 Page No.
 : 21 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.5. Band Edge Emissions Measurement

3.5.1. Limit

Band edge emissions outside of the frequency bands shown in below table. Check the tuning range of FM transmitter.

Outside Frequency Band Edge	Limit (dBuV/m) at 3m
Below 88MHz	40.0 (QP)
Above 108MHz	43.5 (QP)

3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Center Frequency	Fundamental Frequency
RB	120 KHz
Detector	QP or Peak

3.5.3. Test Procedures

The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around bandedges.

3.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 3.2.4

3.5.5. Test Deviation

There is no deviation with the original standard.

3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 SPORTON International Inc.
 Page No.
 : 22 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.5.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25℃	Humidity	43%
Test Engineer	Vic Hsiao		

Freq.	Level	Over Limit	Limit Line	Remark
(MHz)	(dBuV)	(dB)	(dBuV)	
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =20 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

 SPORTON International Inc.
 Page No.
 : 23 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

3.6. Antenna Requirements

3.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally

installed.

3.6.2. Antenna Connector Construction

Please refer to section 3.1 in this test report, antenna connector complied with the requirements.

 SPORTON International Inc.
 Page No.
 : 24 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVD	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2006	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	1886	9 kHz - 2 GHz	Jan. 22, 2007	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun.07, 2007	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 21, 2006	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

 SPORTON International Inc.
 Page No.
 : 25 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

5. TEST LOCATION

SHIJR	ADD	:	6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.
	TEL	:	886-2-2696-2468
	FAX	:	886-2-2696-2255
HWA YA	ADD	:	No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
	TEL	:	886-3-327-3456
	FAX	:	886-3-318-0055
LINKOU	ADD	:	No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C
	TEL	:	886-2-2601-1640
	FAX	:	886-2-2601-1695
DUNGHU	ADD	:	No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.
	TEL	:	886-2-2631-4739
	FAX	:	886-2-2631-9740
JUNGHE	ADD	:	7FI., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.
	TEL	:	886-2-8227-2020
	FAX	:	886-2-8227-2626
NEIHU	ADD	:	4FI., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C.
	TEL	:	886-2-2794-8886
	FAX	:	886-2-2794-9777
JHUBEI	ADD	:	No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.
	TEL	:	886-3-656-9065
	FAX	:	886-3-656-9085

 SPORTON International Inc.
 Page No.
 : 26 of 27

 TEL: 886-2-2696-2468
 Issued Date
 : Jul. 04, 2007

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會 Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria

: ISO/IEC 17025:2005

Accreditation Number

1190

Originally Accredited

December 15, 2003

Effective Period

: January 10, 2007 to January 09, 2010

Accredited Scope

: Testing Field, see described in the Appendix

Specific Accreditation

for Commodities Inspection

Program

Accreditation Program for Telecommunication Equipment

Accreditation Program for Designated Testing Laboratory

Testing Laboratory

Jay-San Chen

President, Taiwan Accreditation Foundation

Date: January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.

SPORTON International Inc. Page No. : 27 of 27 TEL: 886-2-2696-2468 Issued Date : Jul. 04, 2007