

FCC Test Report

Report No.: RFBHAA-WTW-P21080669

FCC ID: UJH-R1LOW-SB

Test Model: R1LOW-SB-M (refer to item 3.1 for more details)

Received Date: Aug. 17, 2021

Test Date: Sep. 03 ~ Sep. 13, 2021

Issued Date: Oct. 08, 2021

Applicant: Mitsubishi Electric Corporation Sanda Works

Address: 2-3-33 Miwa, Sanda-City, Hyogo 669-1513, Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards and References	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup	17
4.1.6 EUT Operating Conditions	18
4.1.7 Test Results	19
4.2 Transmit Power Measurement	25
4.2.1 Limits of Transmit Power Measurement	25
4.2.2 Test Setup	25
4.2.3 Test Instruments	25
4.2.4 Test Procedure	26
4.2.5 Deviation from Test Standard	26
4.2.6 EUT Operating Conditions	26
4.2.7 Test Result	27
4.3 Occupied Bandwidth Measurement	35
4.3.1 Test Setup	35
4.3.2 Test Instruments	35
4.3.3 Test Procedure	35
4.3.4 Test Result	36
4.4 Peak Power Spectral Density Measurement	39
4.4.1 Limits of Peak Power Spectral Density Measurement	39
4.4.2 Test Setup	39
4.4.3 Test Instruments	39
4.4.4 Test Procedures	39
4.4.5 Deviation from Test Standard	40
4.4.6 EUT Operating Conditions	40
4.4.7 Test Results	40
4.5 Frequency Stability	45
4.5.1 Limits of Frequency Stability Measurement	45
4.5.2 Test Setup	45
4.5.3 Test Instruments	45
4.5.4 Test Procedure	45
4.5.5 Deviation from Test Standard	46
4.5.6 EUT Operating Condition	46
4.5.7 Test Results	46
4.6 6dB Bandwidth Measurement	47
4.6.1 Limits of 6dB Bandwidth Measurement	47

4.6.2 Test Setup	47
4.6.3 Test Instruments	47
4.6.4 Test Procedure	47
4.6.5 Deviation from Test Standard	47
4.6.6 EUT Operating Condition	47
4.6.7 Test Results	48
5 Pictures of Test Arrangements	50
Annex A- Band Edge Measurement	51
Appendix – Information of the Testing Laboratories	53

Release Control Record

Issue No.	Description	Date Issued
RFBHAA-WTW-P21080669	Original release	Oct. 08, 2021

1 Certificate of Conformity

Product: Display Audio

Brand: Mitsubishi Electric

Test Model: R1LOW-SB-M (refer to item 3.1 for more details)

Sample Status: DV

Applicant: Mitsubishi Electric Corporation Sanda Works

Test Date: Sep. 03 ~ Sep. 13, 2021

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Pettie Chen, **Date:** Oct. 08, 2021
Pettie Chen / Senior Specialist

Approved by : Bruce Chen, **Date:** Oct. 08, 2021
Bruce Chen / Senior Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	NA	EUT is powered from DC
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -8.3dB at 11380.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is SMA not a standard connector.

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For U-NII-2c band compliance with rule 15.407(b) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Display Audio
Brand	Mitsubishi Electric
Test Model	R1LOW-SB-M (refer to note for more details)
Sample Status	DV
Power Supply Rating	12.6Vdc
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5720MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5260 ~ 5320MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5500 ~ 5720MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 12 802.11n (HT40), 802.11ac (VHT40): 6 802.11ac (VHT80): 3 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	5260 ~ 5320MHz: 1.653mW 5500 ~ 5720MHz: 0.590mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Antenna, 2.0m non-shielded DC power cable without core
Cable Supplied	0.5m shielded USB cable with 2 cores

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report to the original BV CPS report no.: RF200106C21-1 R4. The difference is adding straddle channels. Therefore, test item for straddle channels had been tested. Refer to original report for the other test data.
2. The following models are provided to this EUT.

Brand	Model	Description
Mitsubishi Electric	R1LOW-SB-M	No. 33: SB, SXM, 2USB
		No. 28: SB, SXM, Ethernet
		No. 29: SB, DAB, FM2
		No. 39: SB, DAB, FM2, CAN-termination
		No. 43: SB, Ethernet

3. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11a	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
802.11ac (VHT20)	2TX
802.11ac (VHT40)	2TX
802.11ac (VHT80)	2TX

* The modulation and bandwidth are similar for HT20/HT40 on 802.11n mode and VHT20/VHT40 on 802.11ac mode, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

4. There two modules are collocated in the EUT.

Module No.	Function
1	WLAN 2.4GHz, 5GHz, BT EDR, BT LE (1M)
2	BT LE (1M, 2M)

5. The EUT uses following antennas.

Type		PCB								
Connector		FAKRA								
Frequency (MHz)		2400	2450	2500	5150	5250	5350	5470	5725	5850
Ant. No.		0								
Gain (dBi)	Horizontal	1.19	1.85	0.49	-0.36	-0.51	0.02	-0.26	-1.40	-2.90
	Vertical	-8.98	-10.93	-13.69	-3.86	-3.10	-2.09	-2.07	0.15	-2.23
Max Gain (dBi)		1.85			0.15					
Ant. No.		1								
Gain (dBi)	Horizontal	1.50	1.64	0.12	0.87	1.61	0.51	0.89	0.84	0.14
	Vertical	-8.68	-13.32	-12.30	-0.86	-0.47	-0.70	-0.78	1.31	0.58
Max Gain (dBi)		1.64			1.61					

*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

For 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210 MHz

For 5260 ~ 5320MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
58	5290 MHz

For 5500 ~ 5720MHz:

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	122	5610 MHz
138	5690 MHz		

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	Note 2	√	EUT: No. 28

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. No need to concern of PLC due to the EUT is powered from DC.
3. For radiated emission (below 1GHz) test item, the worst maximum power was selected.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5500-5720	144	144	OFDM	6.0
	802.11n (HT20)		144	144	OFDM	6.5
	802.11n (HT40)		142	142	OFDM	13.5
	802.11ac (VHT80)		138	138	OFDM	29.3

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5500-5720	144	144	OFDM	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5500-5720	144	144	OFDM	6.0
	802.11n (HT20)		144	144	OFDM	6.5
	802.11n (HT40)		142	142	OFDM	13.5
	802.11ac (VHT80)		138	138	OFDM	29.3

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 69% RH	12.6Vdc	Edison Lee
RE<1G	23 deg. C, 69% RH	12.6Vdc	Raymond Lee
APCM	25 deg. C, 60% RH	12.6Vdc	Jisyong Wang

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

Duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11a: Duty cycle = $2.042/2.227 = 0.917$, Duty factor = $10 * \log(1/0.917) = 0.38$

802.11n (HT20): Duty cycle = $0.98/1.162 = 0.843$, Duty factor = $10 * \log(1/0.843) = 0.74$

802.11n (HT40): Duty cycle = $0.492/0.657 = 0.749$, Duty factor = $10 * \log(1/0.749) = 1.26$

802.11ac (VHT80): Duty cycle = $0.254/0.378 = 0.672$, Duty factor = $10 * \log(1/0.672) = 1.73$



3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Battery	YUASA	75D23R-CMF II	NA	NA	-
B.	Fixture Board	NA	NA	NA	NA	Provided by client
C.	Display	NA	NA	NA	NA	Provided by client
D.	Antenna	Molex	68306857AA	60021	NA	Accessory
E.	Adapter	NA	FJ-SW1203000D	NA	NA	Provided by client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC power cable	1	2	N	0	Accessory
2.	USB cable	1	0.5	Y	2	Accessory
3.	Harness cable	1	2	N	0	Provided by client

3.4.1 Configuration of System under Test

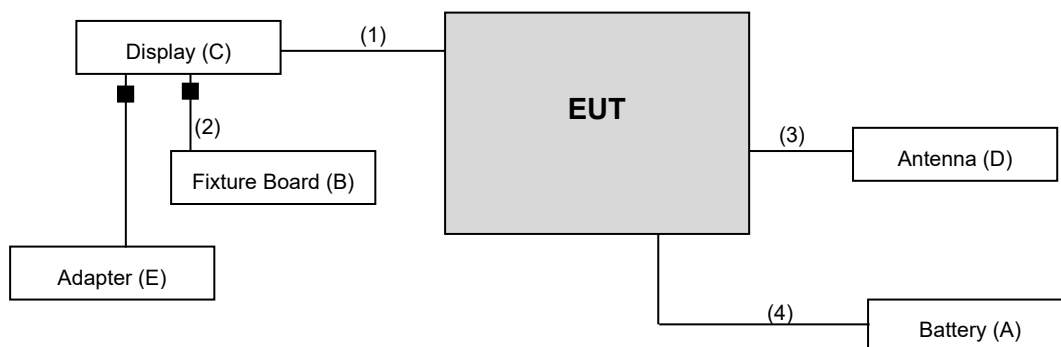

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart E (15.407)

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

KDB References Test Guidance:

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v02r01			Field Strength at 3m	
			PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK: -27 (dBm/MHz)	PK: 68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 09, 2021	Apr. 08, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 10, 2021	Jun. 09, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 06, 2020	Nov. 05, 2021
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 05, 2021	Jun. 04, 2022
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 17, 2021	Feb. 16, 2022
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795 /4)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 05, 2021	Jun. 04, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 04, 2020 Sep. 04, 2021	Sep. 03, 2021 Sep. 03, 2022
Peak Power AnalyzerKEYSIGHT	8990B	MY51000485	Jan. 19, 2021	Jan. 18, 2022
Wideband Power SensorKEYSIGHT	N1923A	MY58020002	Jan. 11, 2021	Jan. 10, 2022
Adjustable attenuator Keysight	8494B	MY42158704	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
(802.11a: RBW = 1 MHz, VBW = 1 kHz; 802.11n (HT20): RBW = 1 MHz, VBW = 3 kHz; 802.11n (HT40): RBW = 1 MHz, VBW = 3 kHz; 802.11ac (VHT80): RBW = 1 MHz, VBW = 10 kHz)
- All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

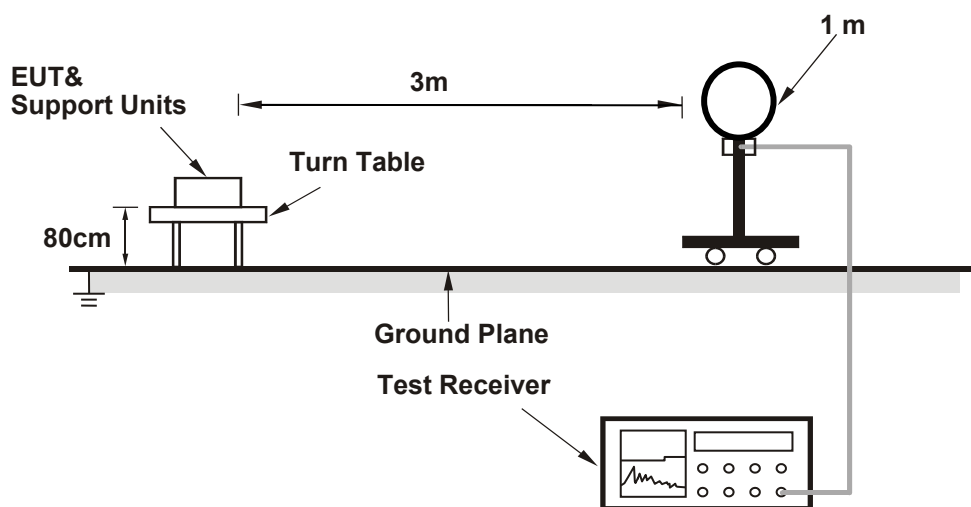

For Radiated emission 30MHz to 1GHz

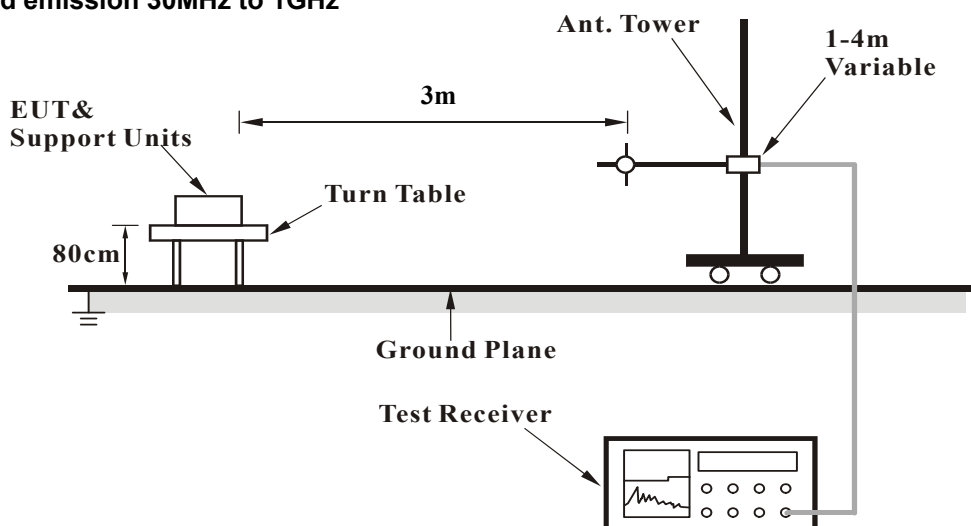

For Radiated emission above 1GHz

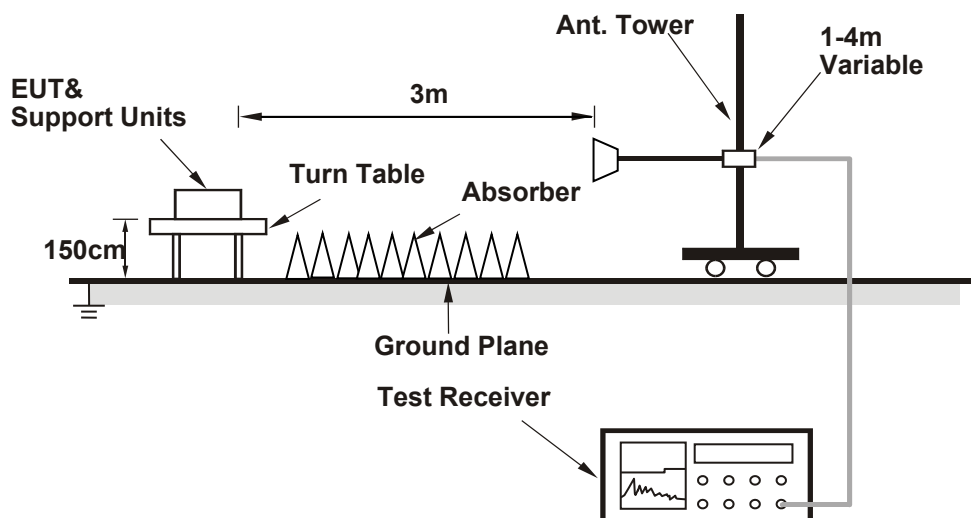

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz data:

RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.5 PK	68.2	-10.7	3.69 H	172	55.4	2.1
2	*5720.00	94.4 PK			3.69 H	172	53.2	41.2
3	*5720.00	85.3 AV			3.69 H	172	44.1	41.2
4	#5850.00	58.5 PK	68.2	-9.7	3.69 H	172	55.1	3.4
5	11440.00	56.7 PK	74.0	-17.3	1.63 H	341	48.3	8.4
6	11440.00	45.0 AV	54.0	-9.0	1.63 H	341	36.6	8.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.9 PK	68.2	-11.3	2.40 V	183	54.8	2.1
2	*5720.00	94.9 PK			2.40 V	183	53.7	41.2
3	*5720.00	86.9 AV			2.40 V	183	45.7	41.2
4	#5850.00	57.6 PK	68.2	-10.6	2.40 V	183	54.2	3.4
5	11440.00	56.5 PK	74.0	-17.5	2.10 V	163	48.1	8.4
6	11440.00	45.1 AV	54.0	-8.9	2.10 V	163	36.7	8.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.6 PK	68.2	-11.6	2.88 H	203	54.5	2.1
2	*5720.00	95.1 PK			2.88 H	203	53.9	41.2
3	*5720.00	85.2 AV			2.88 H	203	44.0	41.2
4	#5850.00	58.5 PK	68.2	-9.7	2.88 H	203	55.1	3.4
5	11440.00	56.6 PK	74.0	-17.4	1.69 H	333	48.2	8.4
6	11440.00	45.1 AV	54.0	-8.9	1.69 H	333	36.7	8.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.2 PK	68.2	-11.0	2.43 V	190	55.1	2.1
2	*5720.00	96.3 PK			2.43 V	190	55.1	41.2
3	*5720.00	86.3 AV			2.43 V	190	45.1	41.2
4	#5850.00	58.6 PK	68.2	-9.6	2.43 V	190	55.2	3.4
5	11440.00	56.5 PK	74.0	-17.5	2.14 V	158	48.1	8.4
6	11440.00	45.0 AV	54.0	-9.0	2.14 V	158	36.6	8.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.4 PK	68.2	-10.8	2.79 H	203	55.3	2.1
2	*5710.00	91.1 PK			2.79 H	203	50.0	41.1
3	*5710.00	81.7 AV			2.79 H	203	40.6	41.1
4	#5850.00	58.5 PK	68.2	-9.7	2.79 H	203	55.1	3.4
5	11420.00	56.6 PK	74.0	-17.4	1.66 H	345	48.2	8.4
6	11420.00	45.5 AV	54.0	-8.5	1.66 H	345	37.1	8.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.3 PK	68.2	-10.9	2.42 V	183	55.2	2.1
2	*5710.00	92.3 PK			2.42 V	183	51.2	41.1
3	*5710.00	82.2 AV			2.42 V	183	41.1	41.1
4	#5850.00	58.8 PK	68.2	-9.4	2.42 V	183	55.4	3.4
5	11420.00	56.8 PK	74.0	-17.2	2.08 V	170	48.4	8.4
6	11420.00	45.6 AV	54.0	-8.4	2.08 V	170	37.2	8.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ac (VHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.3 PK	68.2	-11.9	2.60 H	179	54.2	2.1
2	*5690.00	87.3 PK			2.60 H	179	46.2	41.1
3	*5690.00	78.2 AV			2.60 H	179	37.1	41.1
4	#5850.00	57.7 PK	68.2	-10.5	2.60 H	179	54.3	3.4
5	11380.00	57.0 PK	74.0	-17.0	1.73 H	325	48.5	8.5
6	11380.00	45.7 AV	54.0	-8.3	1.73 H	325	37.2	8.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.5 PK	68.2	-11.7	2.47 V	179	54.4	2.1
2	*5690.00	88.6 PK			2.47 V	179	47.5	41.1
3	*5690.00	78.5 AV			2.47 V	179	37.4	41.1
4	#5850.00	57.8 PK	68.2	-10.4	2.47 V	179	54.4	3.4
5	11380.00	57.1 PK	74.0	-16.9	2.15 V	153	48.6	8.5
6	11380.00	45.7 AV	54.0	-8.3	2.15 V	153	37.2	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Worst-Case Data:

RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	27.6 QP	40.0	-12.4	1.99 H	212	49.6	-22.0
2	134.76	28.0 QP	43.5	-15.5	1.00 H	168	47.1	-19.1
3	226.91	22.7 QP	46.0	-23.3	1.49 H	282	44.0	-21.3
4	314.21	30.3 QP	46.0	-15.7	1.00 H	187	47.7	-17.4
5	440.31	24.1 QP	46.0	-21.9	1.99 H	146	38.1	-14.0
6	624.61	26.0 QP	46.0	-20.0	1.49 H	18	36.3	-10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

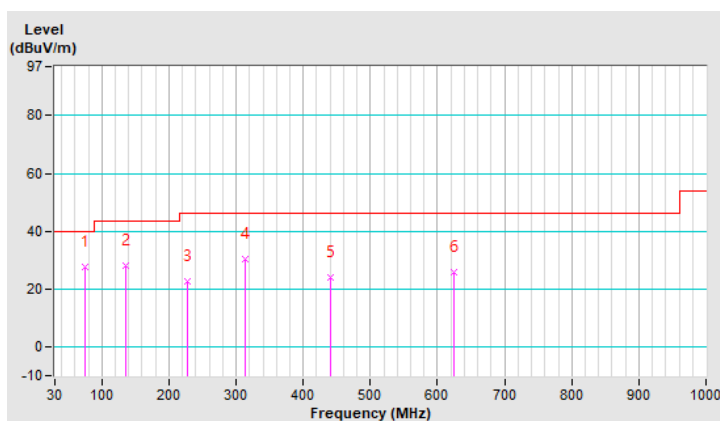


RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	30.9 QP	40.0	-9.1	1.00 V	214	52.9	-22.0
2	136.70	23.2 QP	43.5	-20.3	1.50 V	93	42.2	-19.0
3	288.99	22.6 QP	46.0	-23.4	2.00 V	190	40.7	-18.1
4	465.53	22.8 QP	46.0	-23.2	1.00 V	161	36.4	-13.6
5	547.01	23.9 QP	46.0	-22.1	2.00 V	130	36.2	-12.3
6	665.35	27.1 QP	46.0	-18.9	1.00 V	246	37.0	-9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

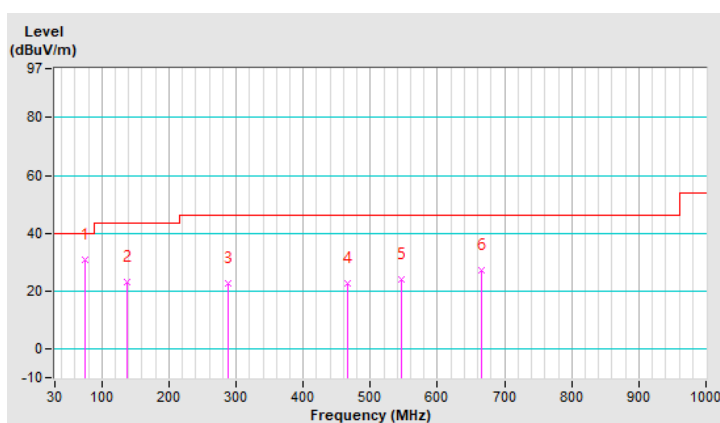

4.2 Transmit Power Measurement

4.2.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.2.2 Test Setup

For Power Output

For straddle channels



For 26dB Bandwidth



4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

For straddle channels

Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):

- a. Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set RBW = 1 MHz.
- c. Set VBW $\geq$ 3 MHz.
- d. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- e. Sweep time = auto.
- f. Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- g. If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- h. Trace average at least 100 traces in power averaging (rms) mode.
- i. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

For 26dB Bandwidth

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW $>$ RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- f. For channel aggregation (channel 138, 142, 144) measurement refer to KDB 789033 D02 Section III. CHANNEL AGGREGATION.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.2.7 Test Result

Power Output:

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
144	5720 (For U-NII-2C)	-2.21	-0.39	1.653	2.18	23.09	Pass
144	5720 (For U-NII-3)	-5.88	-5.49	0.590	-2.29	30.00	Pass

Note:

For U-NII-2C Band:

Chain 0

$$1. 11\text{dBm} + 10\log (5725.00 - 5708.80) = 23.09 < 24\text{dBm}$$

Chain 1

$$1. 11\text{dBm} + 10\log (5725.00 - 5708.68) = 23.12 < 24\text{dBm}$$

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
144	5720 (For U-NII-2C)	-2.88	-1.33	1.251	0.97	23.08	Pass
144	5720 (For U-NII-3)	-7.85	-6.38	0.394	-4.04	30.00	Pass

Note:

For U-NII-2C Band:

Chain 0

$$1. 11\text{dBm} + 10\log (5725.00 - 5708.70) = 23.12 < 24\text{dBm}$$

Chain 1

$$1. 11\text{dBm} + 10\log (5725.00 - 5708.82) = 23.08 < 24\text{dBm}$$

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
142	5710 (For U-NII-2C)	-3.25	-0.93	1.280	1.07	24.00	Pass
142	5710 (For U-NII-3)	-8.11	-6.45	0.381	-4.19	30.00	Pass

Note:

For U-NII-2C Band:

Chain 0

$$1. 11\text{dBm} + 10\log(5725.00 - 5686.98) = 26.80 > 24\text{dBm}$$

Chain 1

$$1. 11\text{dBm} + 10\log(5725.00 - 5685.41) = 26.97 > 24\text{dBm}$$

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
138	5690 (For U-NII-2C)	-3.63	-2.44	1.004	0.02	24.00	Pass
138	5690 (For U-NII-3)	-8.84	-7.55	0.306	-5.14	30.00	Pass

Note:

For U-NII-2C Band:

Chain 0

$$1. 11\text{dBm} + 10\log(5725.00 - 5647.84) = 29.87 > 24\text{dBm}$$


Chain 1

$$1. 11\text{dBm} + 10\log(5725.00 - 5647.38) = 29.89 > 24\text{dBm}$$


Straddle channel power plots:

802.11a

Chain 0

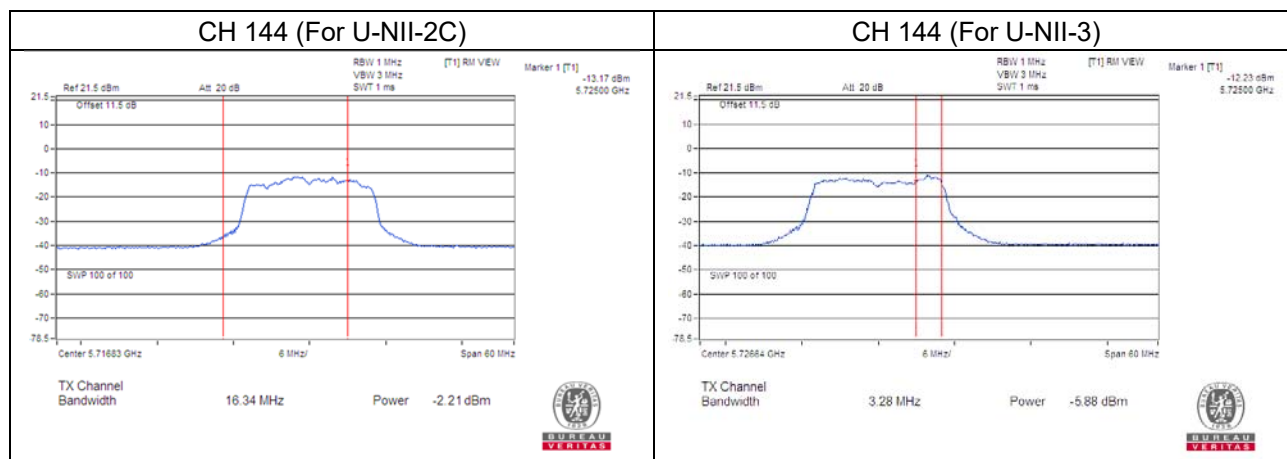


Chain 1

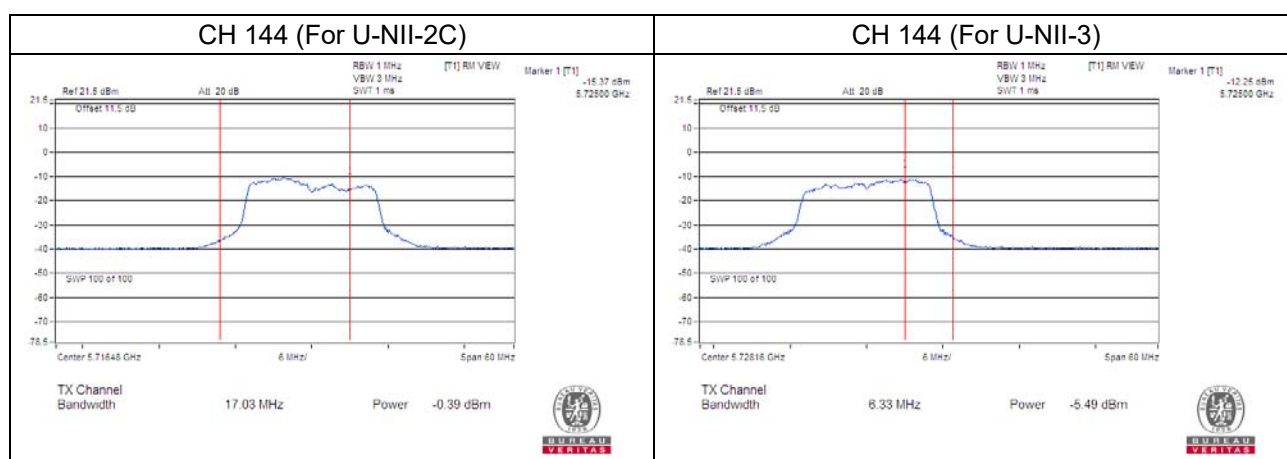


802.11n (HT20)

Chain 0

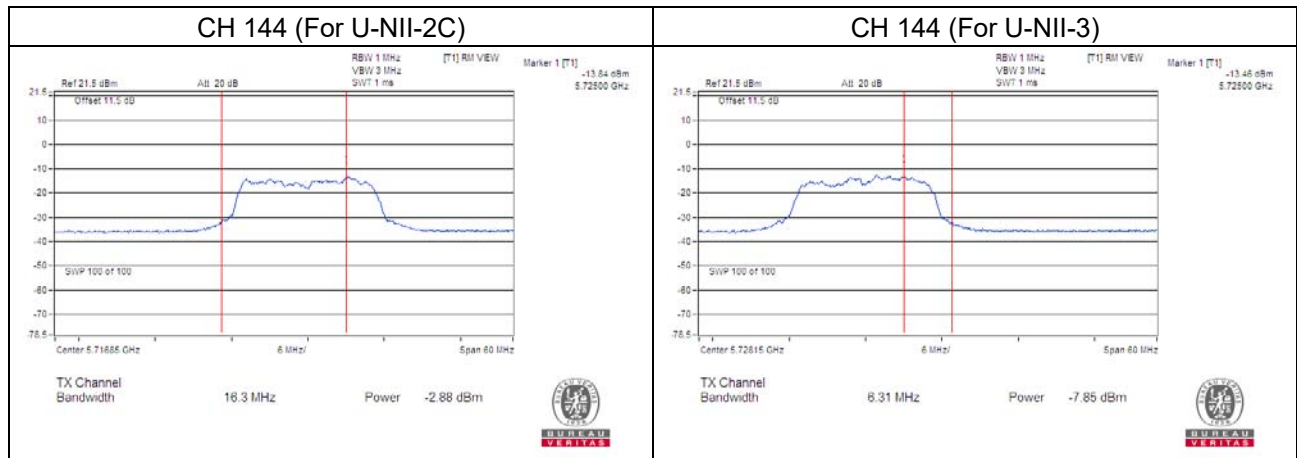


Chain 1

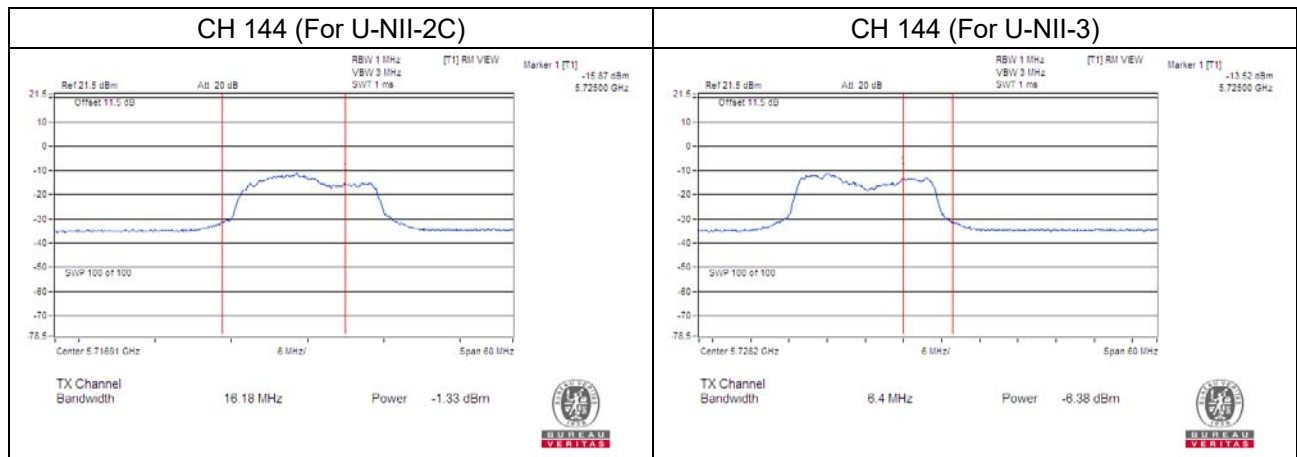


802.11n (HT40)

Chain 0

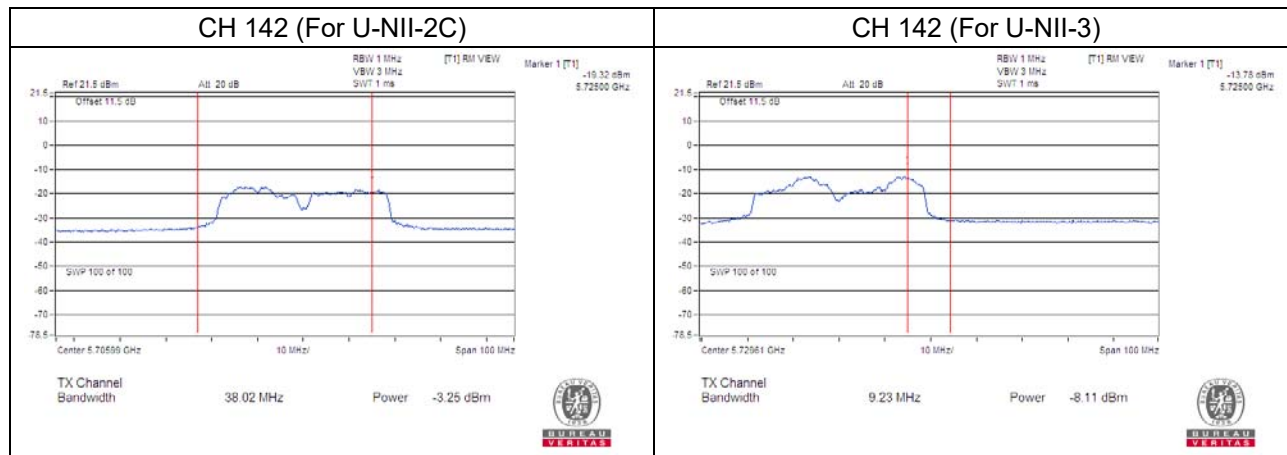


Chain 1

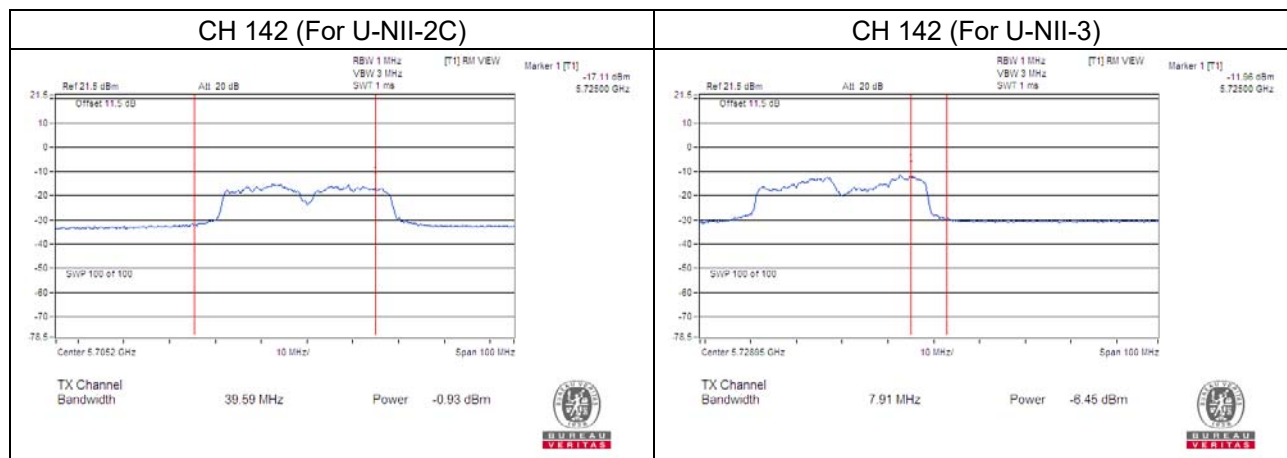


802.11ac (VHT80)

Chain 0

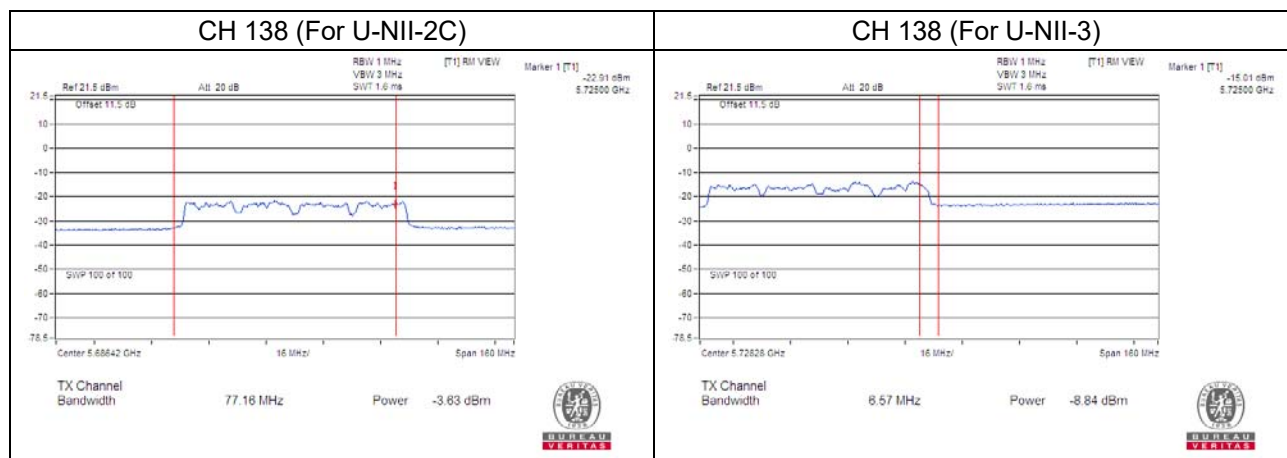

Chain 1

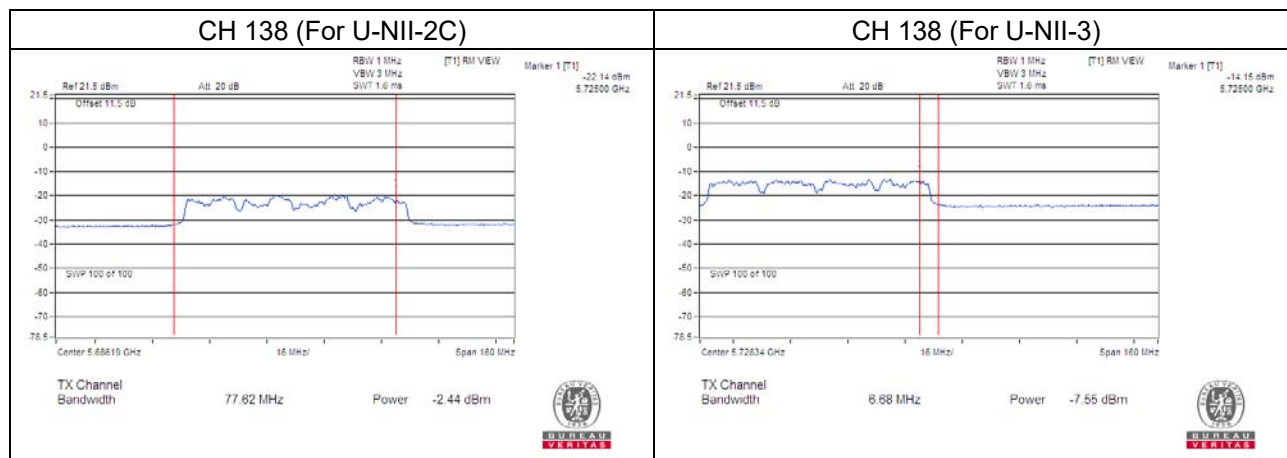

26dB Bandwidth:

802.11a

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
144	5720 (For U-NII-2C)	16.20	16.32
144	5720 (For U-NII-3)	5.79	5.68

802.11n (HT20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
144	5720 (For U-NII-2C)	16.30	16.18
144	5720 (For U-NII-3)	6.31	6.40

802.11n (HT40)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
142	5710 (For U-NII-2C)	38.02	39.59
142	5710 (For U-NII-3)	9.23	7.91

802.11ac (VHT80)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
138	5690 (For U-NII-2C)	77.16	77.62
138	5690 (For U-NII-3)	6.57	6.68

Spectrum Plot of Worst Value


802.11a

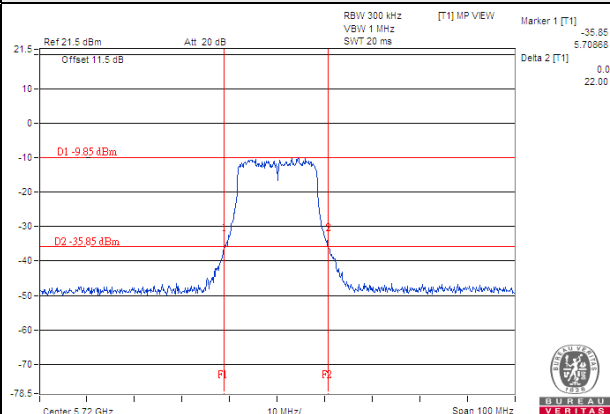


802.11n (HT20)

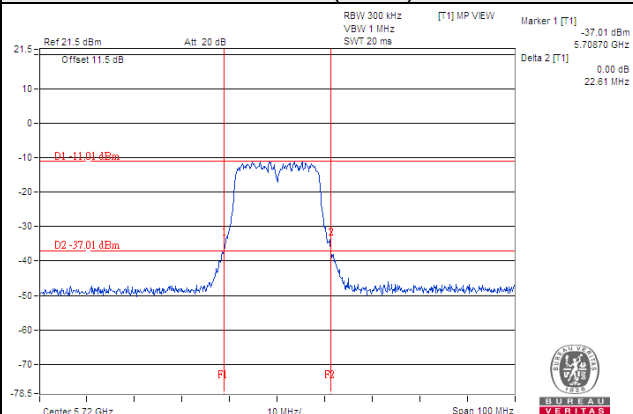

802.11n (HT40)

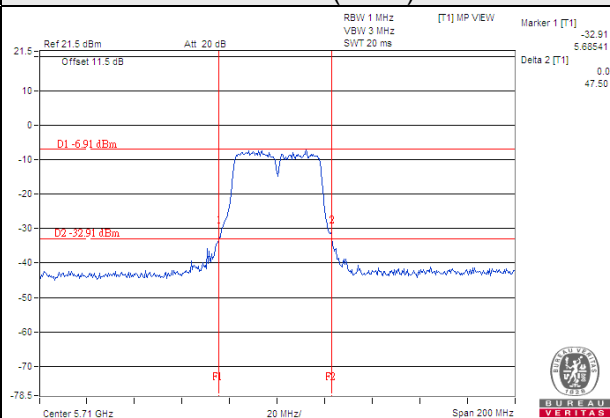


802.11ac (VHT80)

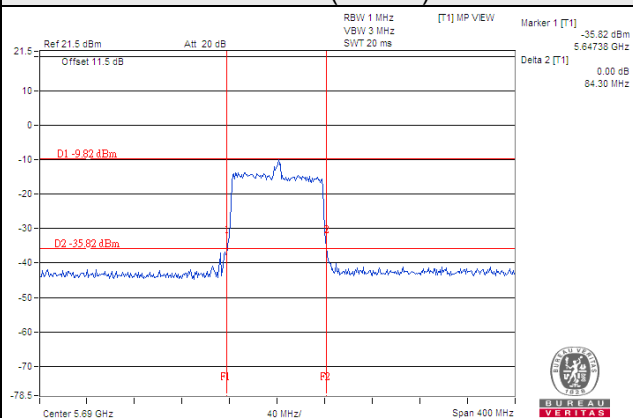

4.3 Occupied Bandwidth Measurement

4.3.1 Test Setup



4.3.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.3.4 Test Result

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
144	5720 (For U-NII-2C)	13.40	13.40
144	5720 (For U-NII-3)	3.28	3.28

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
144	5720 (For U-NII-2C)	14.00	14.00
144	5720 (For U-NII-3)	3.88	3.88

802.11n (HT40)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
142	5710 (For U-NII-2C)	33.48	33.84
142	5710 (For U-NII-3)	3.60	3.48

802.11ac (VHT80)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
138	5690 (For U-NII-2C)	73.40	73.16
138	5690 (For U-NII-3)	2.92	2.92

Spectrum Plot of Worst Value


802.11a

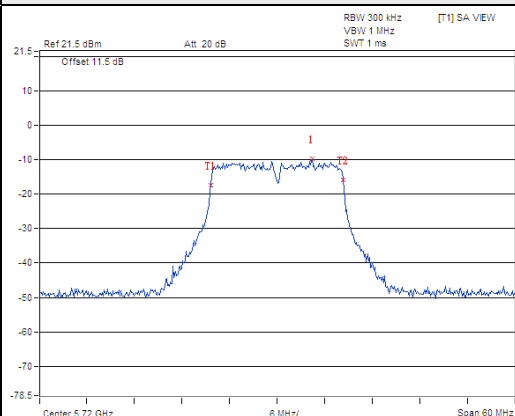


802.11n (HT20)

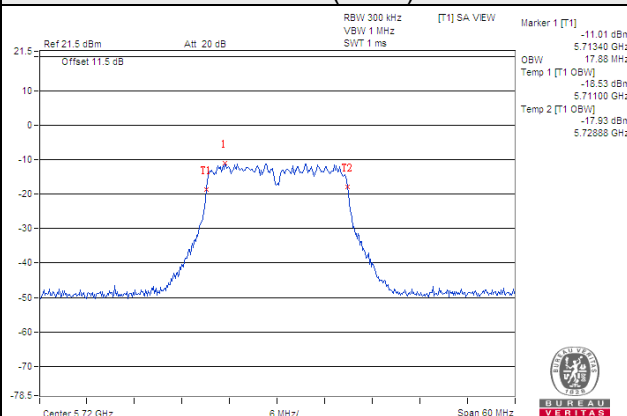

802.11n (HT40)

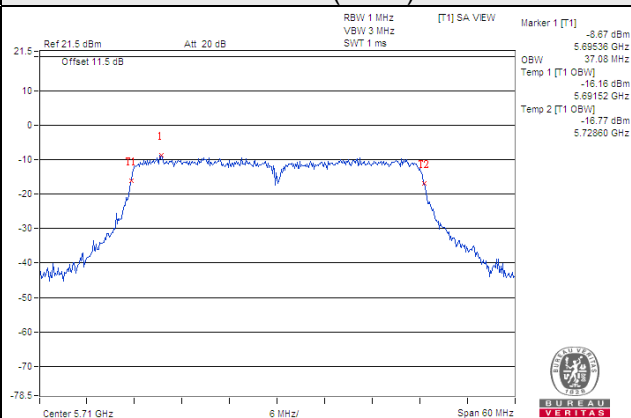


802.11ac (VHT80)

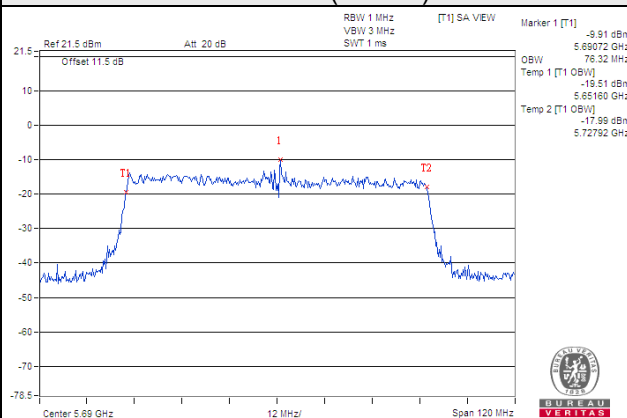


Spectrum Plot of straddle channels


802.11a / Chain 0 / CH 144

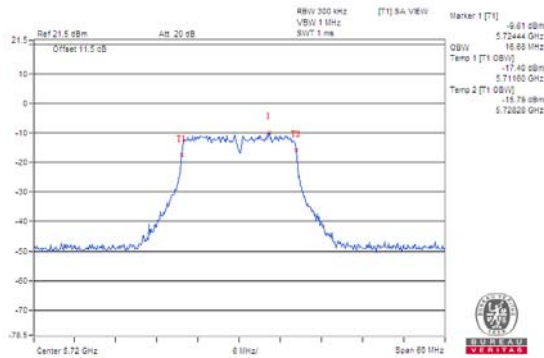


802.11a / Chain 1 / CH 144

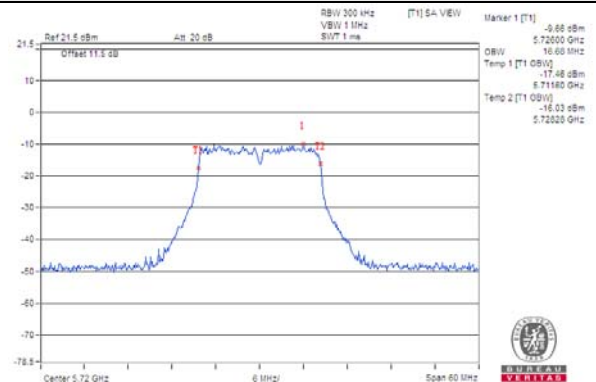


802.11n (HT20) / Chain 0 / CH 144

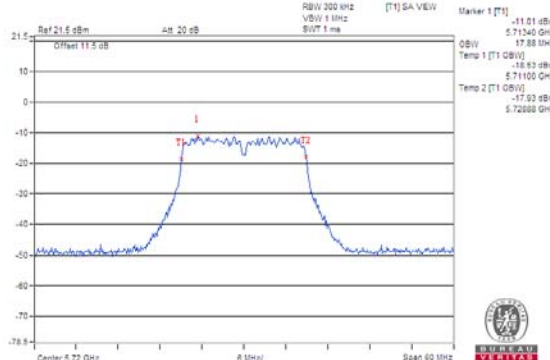


802.11n (HT20) / Chain 1 / CH 144

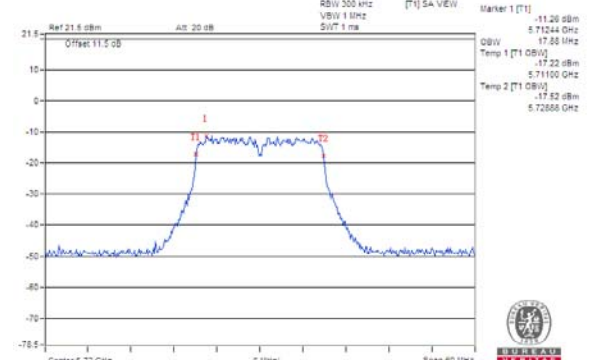


802.11n (HT40) / Chain 0 / CH 142

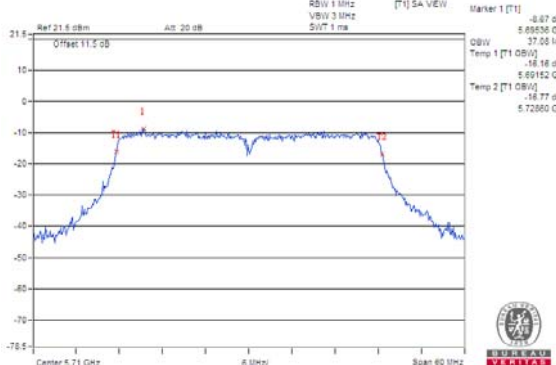


802.11n (HT40) / Chain 1 / CH 142

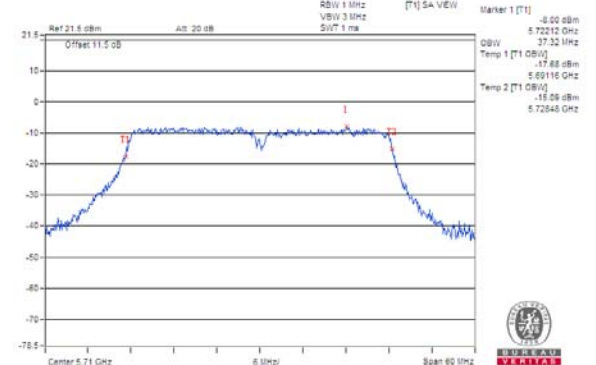

802.11ac (VHT80) / Chain 0 / CH 138

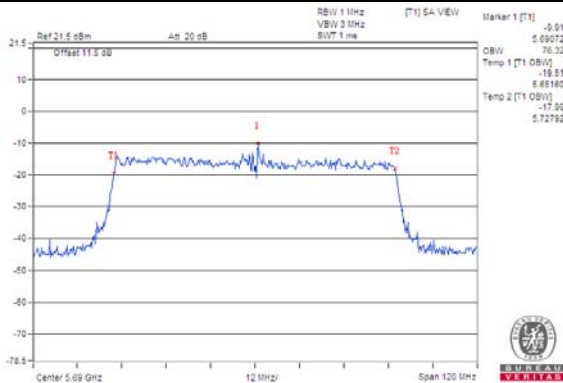

802.11ac (VHT80) / Chain 1 / CH 138

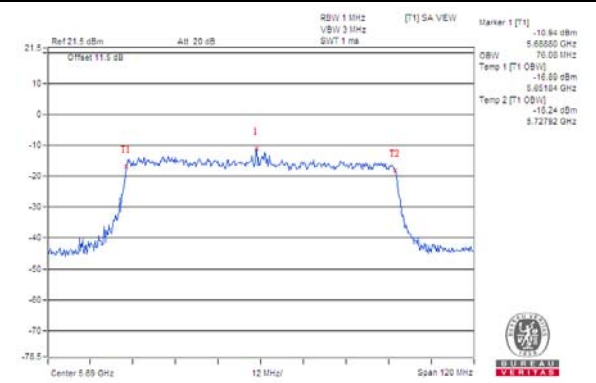


4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Duty cycle of test signal is > 98%

Using method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Duty cycle of test signal is < 98%

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Set Channel power measure = 1MHz
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as 4.3.6.

4.4.7 Test Results

For U-NII-2C band:

802.11a

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
144	5720 (For U-NII-2C)	-13.68	-12.29	0.38	-9.54	11.00	Pass

Note:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.76 \text{ dBi} < 6 \text{ dBi}$, so the power density limit no need to reduce.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
144	5720 (For U-NII-2C)	-14.40	-13.09	0.74	-9.95	11.00	Pass

Note:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.76 \text{ dBi} < 6 \text{ dBi}$, so the power density limit no need to reduce.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
142	5710 (For U-NII-2C)	-17.99	-15.56	1.26	-12.34	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.76 \text{ dBi} < 6 \text{ dBi}$, so the power density limit no need to reduce.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
138	5690 (For U-NII-2C)	-21.65	-18.35	1.73	-14.96	11.00	Pass

Note:


- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.76 \text{ dBi} < 6 \text{ dBi}$, so the power density limit no need to reduce.
- Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a / Chain 1 / CH 144

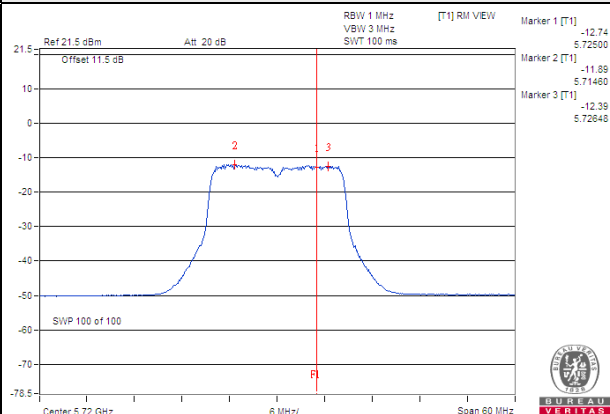


802.11n (HT20) / Chain 1 / CH 144

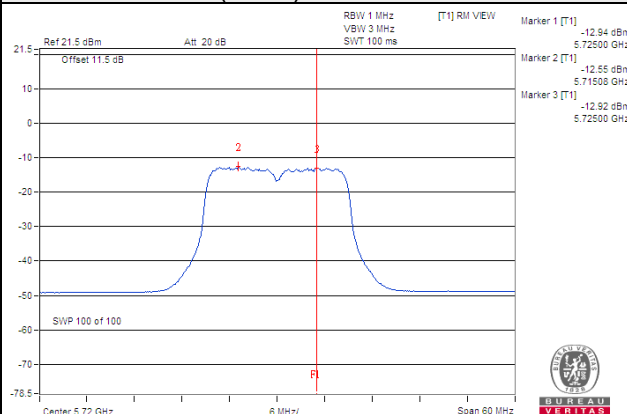

802.11n (HT40) / Chain 1 / CH 142

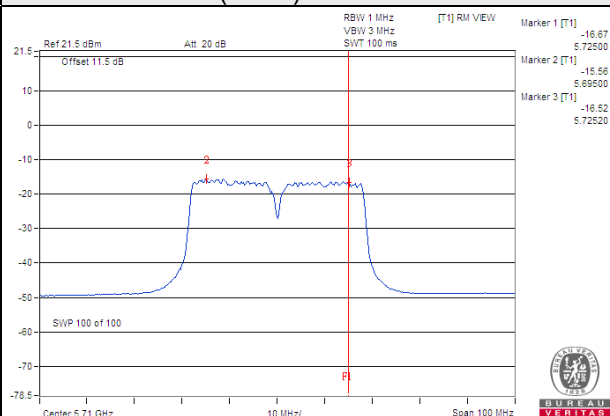

802.11ac (VHT80) / Chain 1 / CH 138

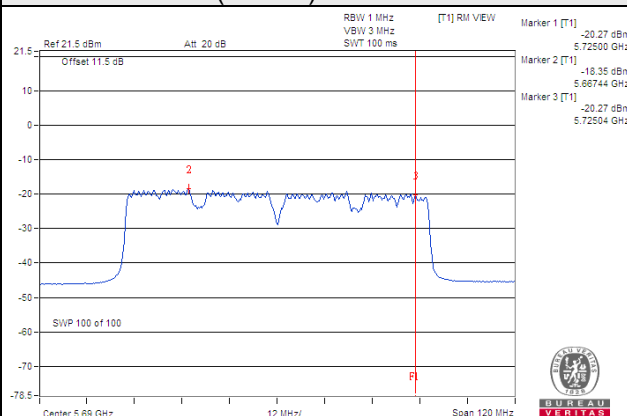

For U-NII-3 band:

802.11a

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	144	5720 (For U-NII-3)	-25.21	-22.99	3.01	0.38	-19.60	30	Pass
1	144	5720 (For U-NII-3)	-25.24	-23.02	3.01	0.38	-19.63	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N_{ANT}] = 3.76\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduce.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	144	5720 (For U-NII-3)	-25.89	-23.67	3.01	0.74	-19.92	30	Pass
1	144	5720 (For U-NII-3)	-25.89	-23.67	3.01	0.74	-19.92	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N_{ANT}] = 3.76\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduce.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	142	5710 (For U-NII-3)	-30.50	-28.28	3.01	1.26	-24.01	30	Pass
1	142	5710 (For U-NII-3)	-29.82	-27.60	3.01	1.26	-23.33	30	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N_{ANT}] = 3.76\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduce.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	138	5690 (For U-NII-3)	-36.95	-34.73	3.01	1.73	-29.99	30	Pass
1	138	5690 (For U-NII-3)	-36.68	-34.46	3.01	1.73	-29.72	30	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.76 \text{ dBi} < 6 \text{ dBi}$, so the power density limit no need to reduce.
- Refer to section 3.3 for duty cycle spectrum plot.

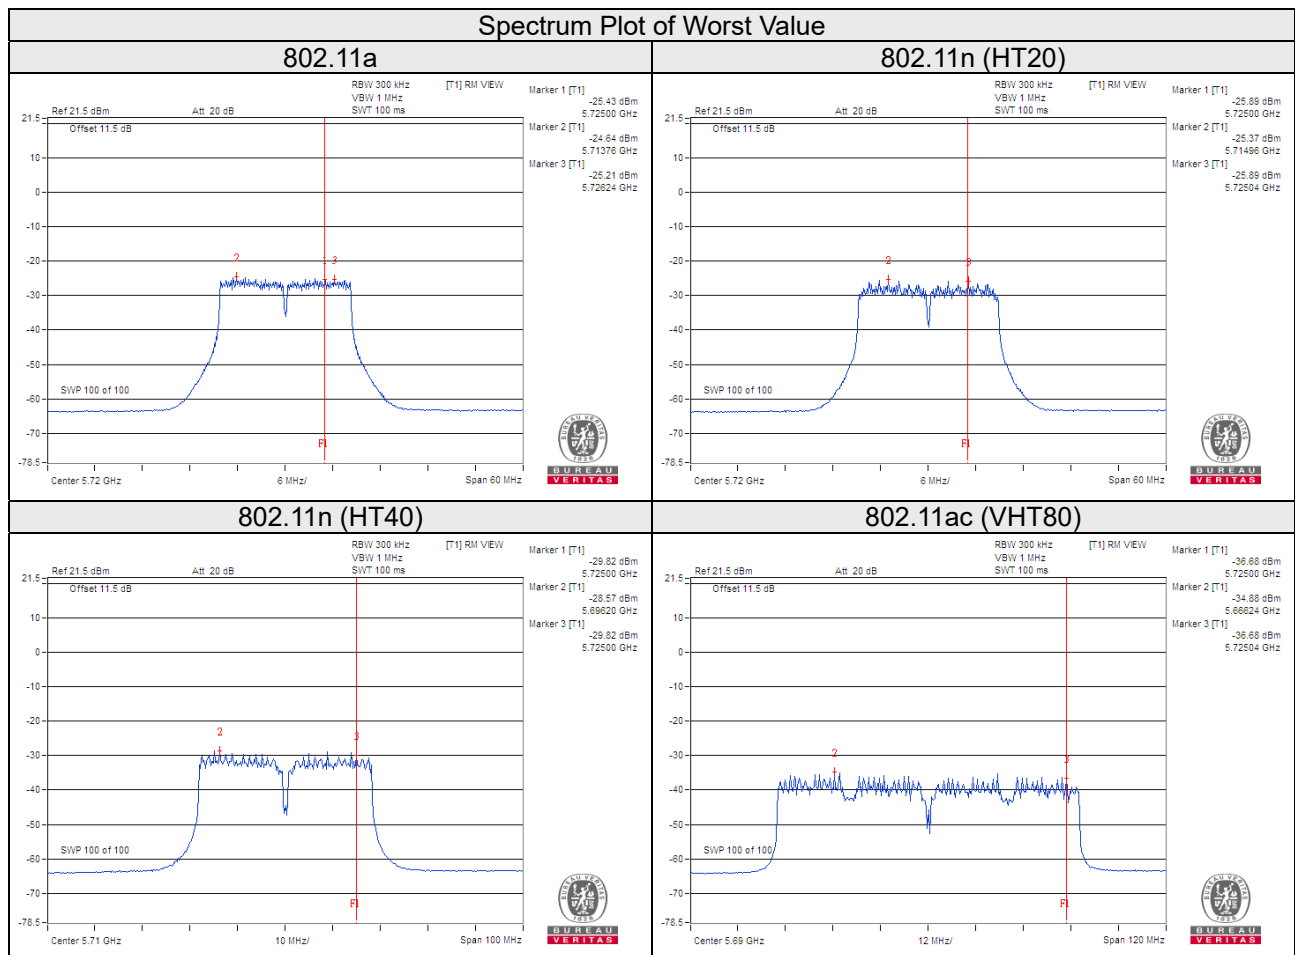


4.5 Frequency Stability

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

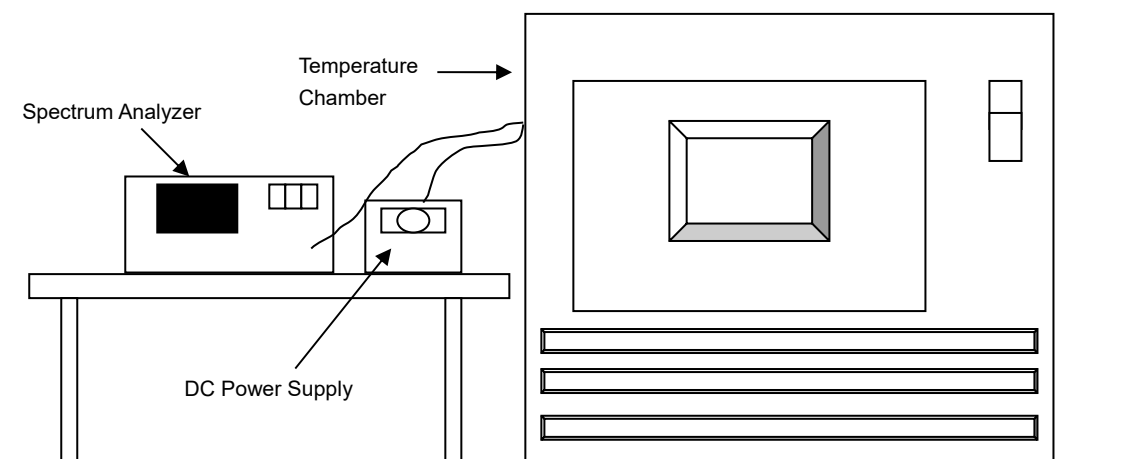

4.5.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 01, 2021	May 31, 2022
Three-phase coupling / decoupling network TESEQ	CDN 3063	4006	Mar. 10, 2021	Mar. 09, 2022
DC Power Supply Topward	6306A	727263	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5720MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
75	12.6	5720.0295	PASS	5720.0297	PASS	5720.0267	PASS	5720.0294	PASS
70	12.6	5720.0025	PASS	5720.0041	PASS	5719.9997	PASS	5720.0002	PASS
60	12.6	5720.0059	PASS	5720.009	PASS	5720.0056	PASS	5720.0049	PASS
50	12.6	5720.0002	PASS	5720.0025	PASS	5720.0025	PASS	5720.0016	PASS
40	12.6	5719.9943	PASS	5719.9994	PASS	5719.9965	PASS	5719.9953	PASS
30	12.6	5719.9726	PASS	5719.975	PASS	5719.9761	PASS	5719.9763	PASS
20	12.6	5719.9746	PASS	5719.9756	PASS	5719.9751	PASS	5719.9702	PASS
10	12.6	5719.9961	PASS	5719.9944	PASS	5719.9986	PASS	5719.9966	PASS
0	12.6	5720.0093	PASS	5720.0097	PASS	5720.0091	PASS	5720.0127	PASS
-10	12.6	5719.9717	PASS	5719.974	PASS	5719.9748	PASS	5719.9723	PASS
-20	12.6	5720.0145	PASS	5720.0165	PASS	5720.0114	PASS	5720.0135	PASS
-30	12.6	5720.0099	PASS	5720.0068	PASS	5720.0069	PASS	5720.0081	PASS
-40	12.6	5720.0199	PASS	5720.0237	PASS	5720.0251	PASS	5720.0204	PASS

Frequency Stability Versus Voltage									
Operating Frequency: 5720MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
20	14.49	5719.9753	PASS	5719.9746	PASS	5719.9759	PASS	5719.9692	PASS
	12.6	5719.9746	PASS	5719.9756	PASS	5719.9751	PASS	5719.9702	PASS
	10.71	5719.9739	PASS	5719.9767	PASS	5719.9751	PASS	5719.9707	PASS

4.6 6dB Bandwidth Measurement

4.6.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144	5720 (For U-NII-3)	3.25	3.26	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144	5720 (For U-NII-3)	3.76	3.76	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
142	5710 (For U-NII-3)	3.13	2.67	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
138	5690 (For U-NII-3)	2.71	2.73	0.5	Pass

Spectrum Plot of Worst Value


802.11a

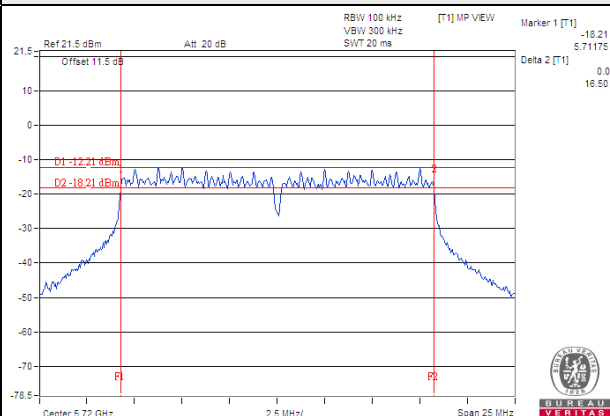


802.11n (HT20)

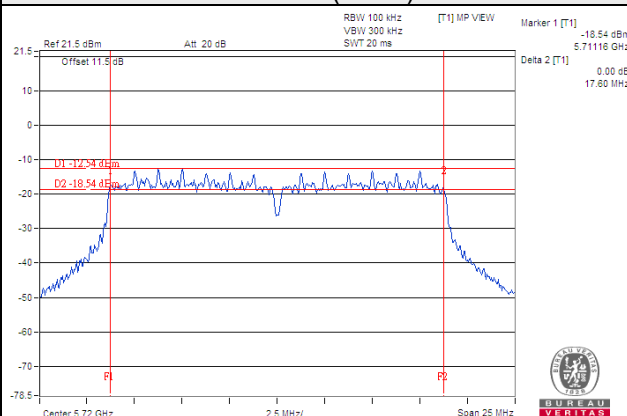

802.11n (HT40)

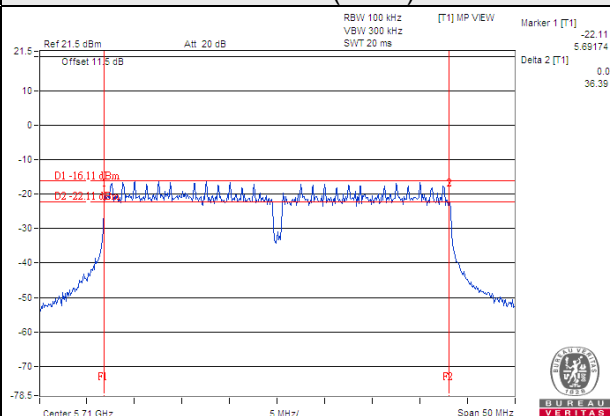

802.11ac (VHT80)

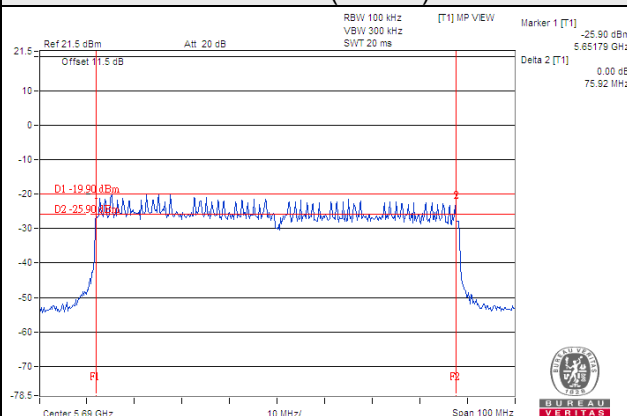

Note:

For CH144 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz




For CH142 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz


For CH138 (UNII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A- Band Edge Measurement

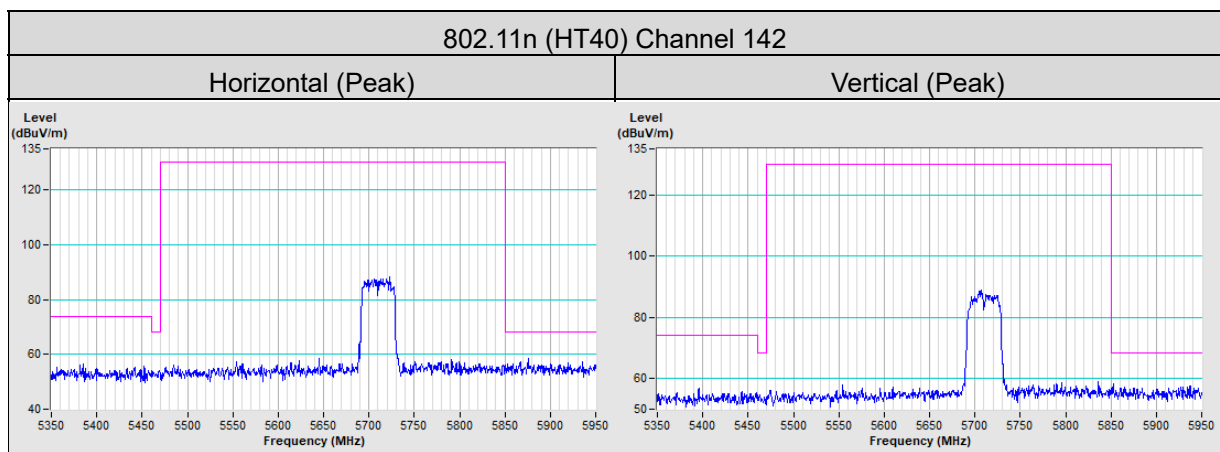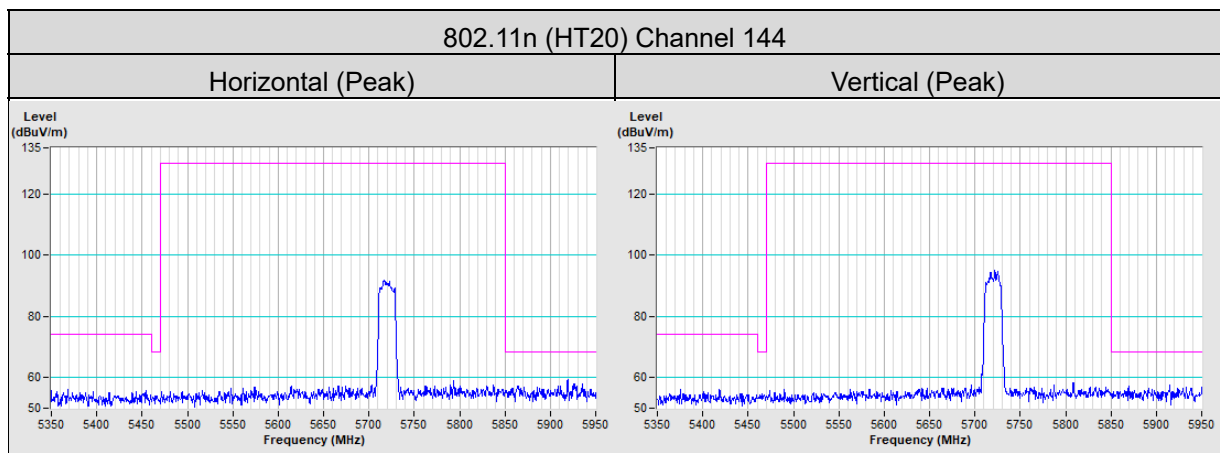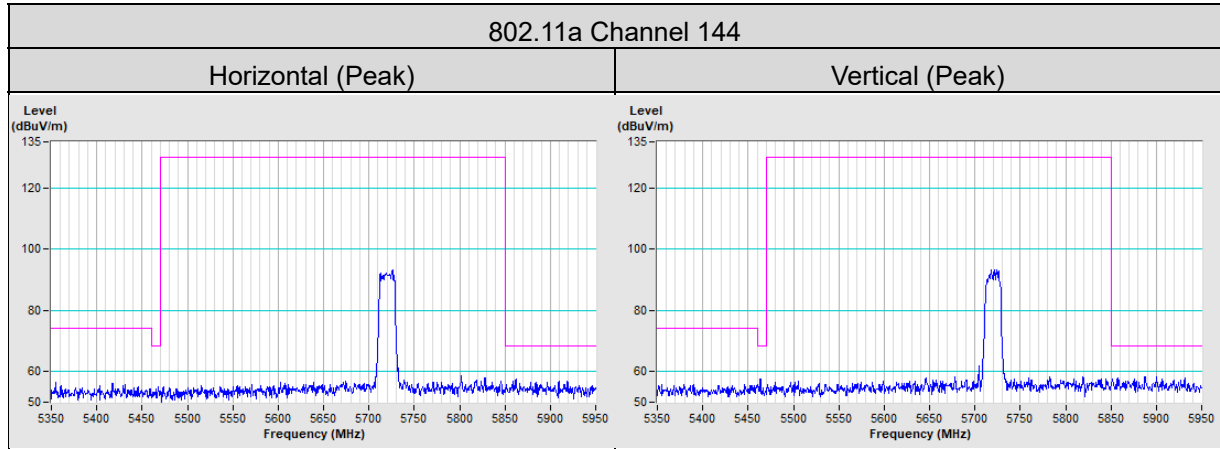

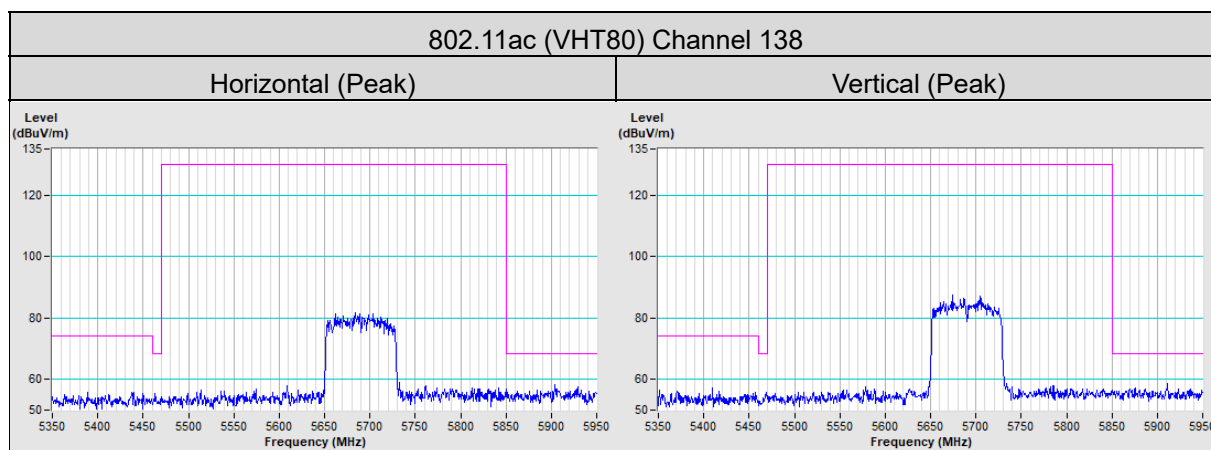

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---