



2006002402H



检测
CNAS L1659



ShenZhen Electronic Product Quality Testing Center

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SAR07-034

TechFaith Wireless Technology Group Limited

GSM/WCDMA mobile phone

Type Name: PERAI-H

FCC ID: UJQ-09438T

Hardware Version: EP2

Software Version: TF_WM6_PERAI_H_VER_02.02

Date of Issue: 2007-08-10





GENERAL SUMMARY

Product Name	GSM/WCDMA mobile phone	Development Stage	Identical prototype
Standard(s)	47CFR § 2.1093: Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01): Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.		
Conclusion	Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report. General Judgment: Pass Date of issue: Aug 10, 2007		
Comment	TX Freq. Band: 824.20 MHz—848.80 MHz 1850.20 MHz —1909.80 MHz RX Freq. Band: 869.20 MHz—893.80 MHz 1930.20 MHz —1989.80 MHz Antenna Character : build inside The test result only responds to the measured sample.		
Tested by: <u>Zhang Can</u> Zhang Can Checked by: <u>Smart Li</u> Smart Li Approved by: <u>Keqing Wang</u> Keqing Wang  Date: <u>Aug. 13. 2007</u> <u>Aug. 13. 2007</u> <u>Aug. 13, 2007</u>			

Contents

1. GENERAL CONDITIONS

2. ADMINISTRATIVE DATA

- 2.1. Identification of the Responsible Testing Laboratory
- 2.2. Identification of the Responsible Testing Location(s)
- 2.3. Organization Item
- 2.4. Identification of Applicant
- 2.5. Identification of Manufacture

3. EQUIPMENT UNDER TEST (EUT)

- 3.1. Identification of the Equipment under Test
- 3.2. Identification of all used Test Sample of the Equipment under Test

4. OPERATIONAL CONDITIONS DURING TEST

- 4.1. Schematic Test Configuration
- 4.2. SAR Measurement System

5. CHARACTERISTICS OF THE TEST

- 5.1. Applicable Limit Regulations
- 5.2. Applicable Measurement Standards

6. LABORATORY ENVIRONMENT

7. 3G MEASUREMENT PROCEDURES

8. TEST RESULTS

- 8.1. Dielectric Performance
- 8.2. Summary of Measurement Results
- 8.3. Conclusion

9. MEASUREMENT UNCERTAINTY

10. MAIN TEST INSTRUMENTS

This Test Report consists of the following Annexes:

Annex A: Accreditation Certificate

Annex B: Test Layout

Annex C: Sample Photographs

Annex D: Graph Test Results

Annex E: System Performance Check Data

1. GENERAL CONDITIONS

1.1 This report only refers to the item that has undergone the test.

1.2 This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

1.3 This document is only valid if complete; no partial reproduction can be made without written approval of Shenzhen Electronic Product Quality Testing Center.

1.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Shenzhen Electronic Product Quality Testing Center and the Accreditation Bodies, if it applies.

2. Administrative Date**2.1. Identification of the Responsible Testing Laboratory**

Company Name: ShenZhen Electronic Product Quality Testing Center
Department: Testing Department
Address: Electronic Testing Building, ShaHe Road, NanShan District,
ShenZhen, P. R. China
Telephone: +86-755-26628676
Fax: +86-755-26627238
**Responsible Test Lab
Managers:** Mr. Li'an Wu

2.2. Identification of the Responsible Testing Location(s)

Company Name: ShenZhen Electronic Product Quality Testing Center
Address: Electronic Testing Building, ShaHe Road, NanShan District,
ShenZhen, P. R. China

2.3. Organization Item

S.E.T Report No.: SAR07-034
S.E.T Project Leader: Mr. Li Sixiong
**S.E.T Responsible for
accreditation scope:** Mr. Li'an Wu
Start of Testing: 2007-06-15
End of Testing: 2007-08-10

2.4. Identification of Applicant

Company Name: TechFaith Wireless Technology Group Limited.
Address: No. 10A, Tower D2, IT Park, Electronic Town, Jiu Xian Qiao North Road, Chao
Yang District, Beijing, China (100015)
Contact person: Wang jinling
Telephone: 010-58229865
Fax: 010-58227200

2.5. Identification of Manufacture

Company Name: TechFaith Wireless Technology Group Limited.
Address: No. 10A, Tower D2, IT Park, Electronic Town, Jiu Xian Qiao North Road, Chao
Yang District, Beijing, China (100015)
Contact person: Wang jinling
Telephone: 010-58229865
Fax: 010-58227200

Notes: This data is based on the information by the applicant.

3. Equipment Under Test (EUT)

3.1. Identification of the Equipment under Test

Brand Name:	TechFaith Wireless		
Type Name:	PERAI-H		
Marking Name:	PERAI-H		
General description:	Test frequency	GSM 850MHz, PCS 1900MHz, WCDMA 850MHz and 1900MHz	
	Development Stage	Identical prototype	
	Accessories	Charger; Battery	
	Battery Model	PERAI-H	
	Battery specification	1500mAh 3.7V	
	Antenna type	Build inside	
	Operation mode	Call established	

3.2. Identification of all used Test Sample of the Equipment under Test

EUT Code	Serial Number	Hardware Version	Software Version	IMEI
1#	/	EP2	TF_WM6_PERAI_H_VER_02.02	35579201510044

NOTE:

1. The EUT consists of Hand Telephone Set and normal options: Charger, Lithium Battery as listed above.
2. Please refer to Appendix C for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.
3. The EUT can work in four different bands, but this SAR test was performed only in the GSM 850MHz, PCS 1900MHz, WCDMA 850MHz and WCDMA 1900MHz bands
4. The EUT can work in WIFI mode (operating frequency from 2400 to 2483.5MHz). This SAR test was performed in the 2450MHz, which is according to the 802.11g and 802.11b. But WiFi mode can not operate with Phone call established.

4 OPERATIONAL CONDITIONS DURING TEST

4.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The TCH is allocated to 128, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz, The TCH is allocated to 9262, 9400 and 9538 respectively in the case of WCDMA 1900 MHz, or to 782, 812 and 862 respectively in the case of WCDMA 850 MHz. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

4.2 SAR Measurement System

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a

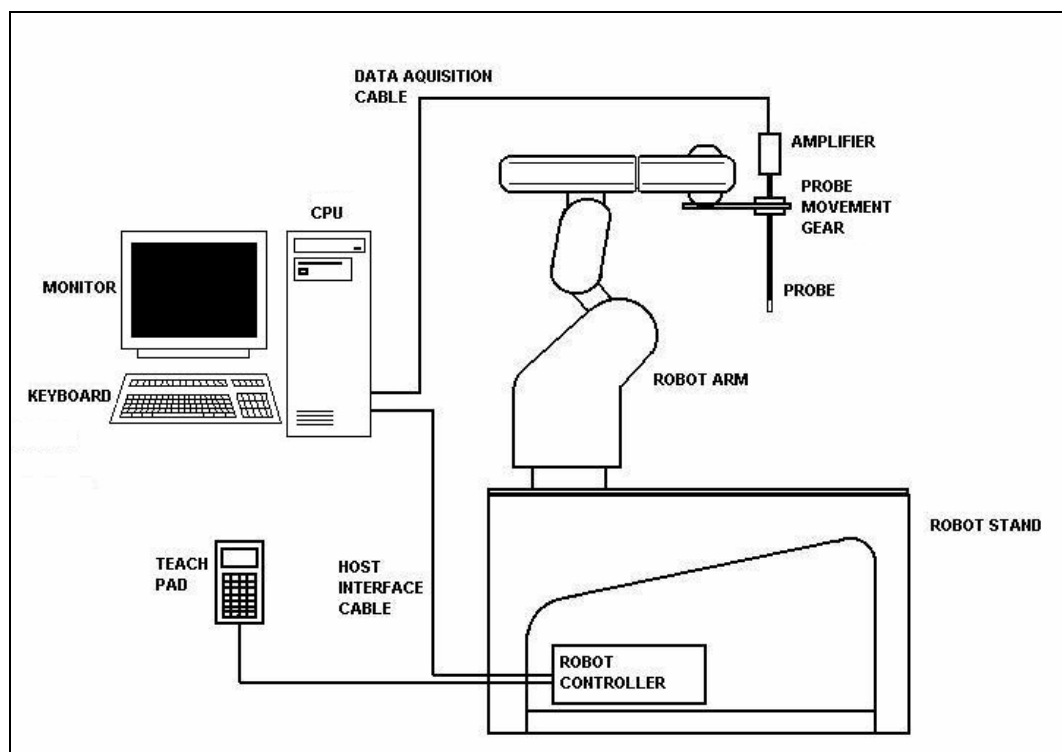


Figure1. SAR Lab Test Measurement Set-up

Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

4.2.1 Robot system specification

The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.



Robot and Stand

Type	Mitsubishi Movemaster RV-2A / 6 axis vertical articulated robot
Dimensions (robot)	Height: 790mm (in home position)
Dimensions (robot stand)	1010L x 450W x 820H mm
Weight	Approx. 36 kg
Position repeatability	+/- 0.04mm
Drive Method	AC servomotor
Expandability	Extra axis expansion capability for probe calibration applications E-Field probe



Robot Controller Unit

Type	CR1 - 571
Dimensions	212W x 290D x 151H mm
Weight	8 kg
Power source	single-phase 100 - 240 VAC

4.2.2 Probe and amplifier specification

IXP-050 Indexsar isotropic immersible SAR probe

The probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip (showed in figure 2). The system uses diode compression potential (DCP) to determine SAR values for different types of modulation. Crest factor is not used for determining SAR values. The DCP for different types of modulation is determined during the probe calibration procedure.


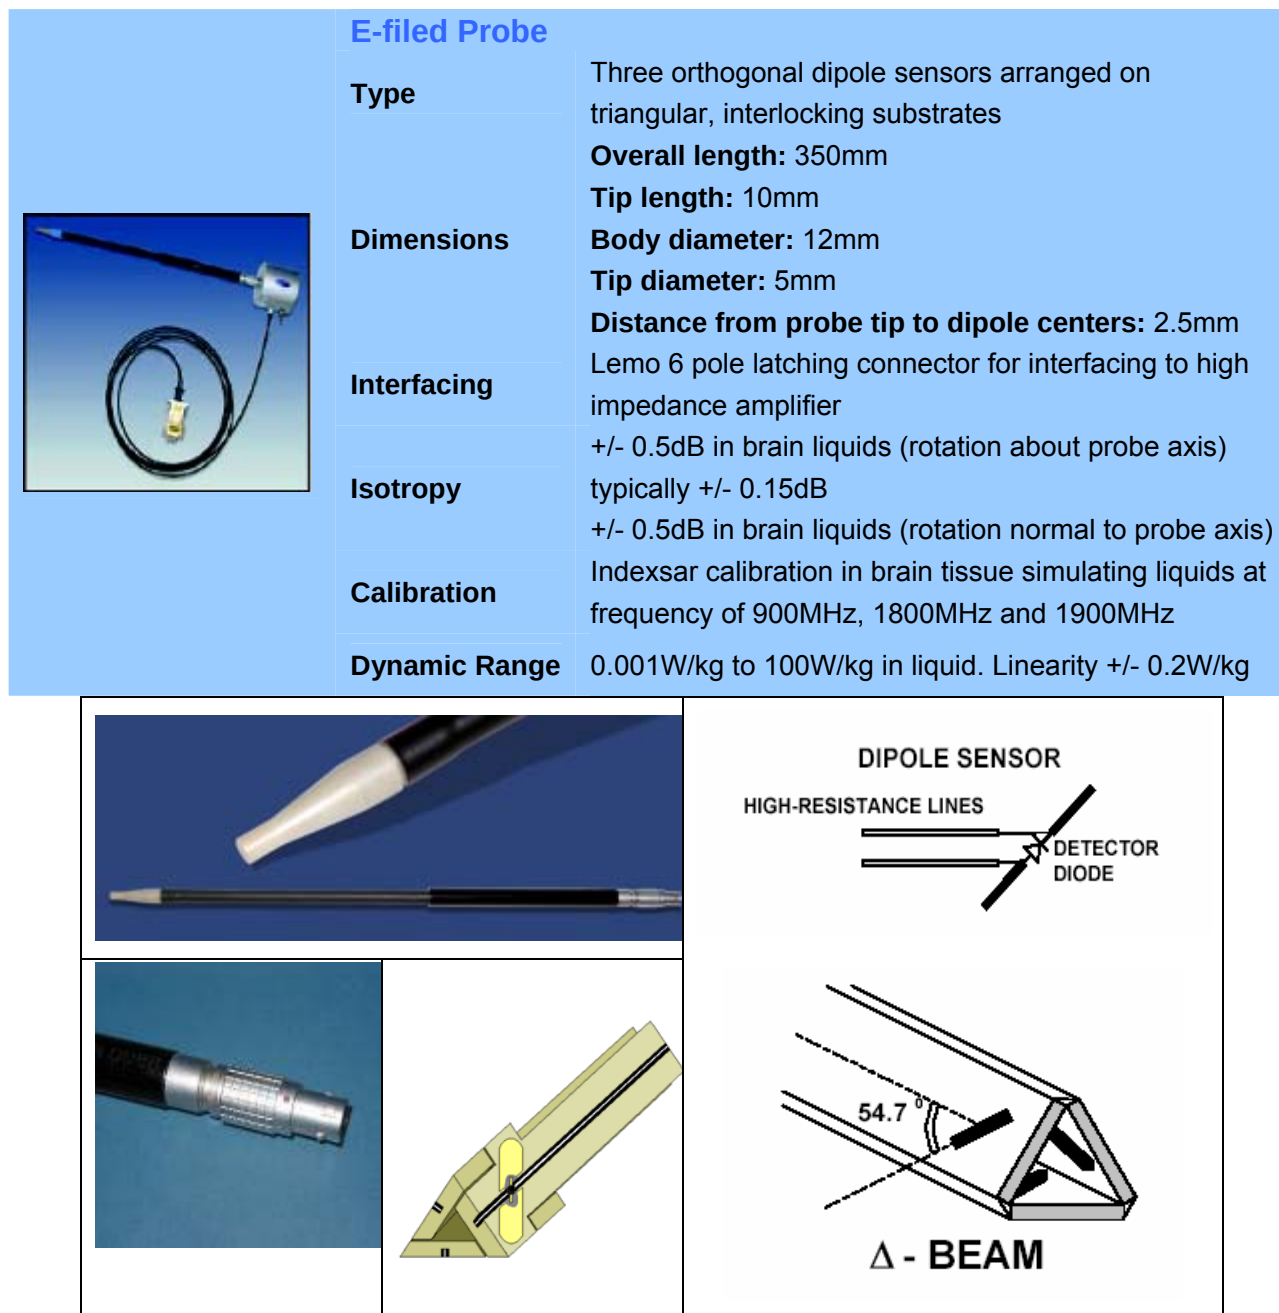


Figure2. Specification and characterisation parameters of indexsar probe


IFA-010 Amplifier

The amplifier unit has a multi-pole connector to connect to the probe and a multiplexer selects between the 3-channel single-ended inputs. A 16-bit AtoD converter with programmable gain is used along with an on-board micro-controller with non-volatile firmware. Battery life is around 150 hours and data are transferred to the PC via 3m of duplex optical fibre and a self-powered RS232 to optical converter.



Probe Amplifier and PC Interface

Type	High impedance inputs with 3 independent x,y,z sensor channels giving simultaneous measurement data every 2ms. Reads true average of modulated signals without the need for duty cycle corrections
Ranges	Software selectable of x1 to 63
Cable	Optical cable with self-powered 9 way RS232 converter. 3m cable length supplied as standard. Other lengths to order.
Power Requirements	2 x AAA batteries giving approximately 100 hours usage.



'Word' report format

The results of each frequency scan are presented in a Microsoft 'Word' document with all the necessary measurement parameters automatically tabulated. Users can customise the layout and in some cases language changes are possible.

4.2.3 Phantoms and simulant liquid

4.2.3.1 SAR head phantom (SAM)

The Indexsar SAM Upright Phantom is fabricated to the shape defined in these CAD files by Antennessa.



Head Phantom

Type 2	Upright SAM phantom
Dimensions	Height: 320mm Baseplate diameter: 275mm
Weight	empty: 1.2 kg filled: 7.2 kg
Wall thickness	2.0 mm $\pm$ 0.2
Construction	Low loss resin / Strengthened saggital seam

It is mounted on the base table, which holds the robotic positioner. Both mechanical and laser-based

registration systems are utilised to register the phantom position in relationship to the robot co-ordinate system. In the SARA2 implementation, the SAM phantom is mounted on a supporting table made of low dielectric loss material, which includes mounting brackets for DUT positioners, dipole holders and (optionally) a shelf for supporting larger devices like laptop computers.

4.2.3.2 Box phantom

The box phantom used for body testing and for validation is manufactured from Perspex.

IXB – 070 Specification and characterisation parameters

	Constructional details	
	Internal dimensions:	200mm x 200mm x 200mm
	Thickness of base:	2mm +/- 0.2mm
	Wall thickness:	4mm
	Material:	PMMA
	Frequency range	300MHz – 6GHz
	Dielectric properties	Relative permittivity 2.7 Loss tangent <0.02



Tissue-simulant volume required for 150mm depth (6 litres)

4.2.3.3 Simulant liquids

Simulant liquids that are used for testing at frequencies of GSM 850MHz and PCS 1900MHz, which are made mainly of sugar, salt and water solutions may be left in the phantoms. Approximately 7litres are needed for an upright head compared to about 27litres for a horizontal bath phantom.

Ingredients (% by weight)	Frequency(MHz)					
	850		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body
Water	40.92	56.0	54.9	40.4	N.A.	N.A.
Salt(NaCl)	1.48	0.76	0.18	0.5	N.A.	N.A.
Sugar	56.5	41.76	0.0	58.0	N.A.	N.A.
HEC	1	1.21	0.0	1.0	N.A.	N.A.
Bacterial de	0.0	0.0	0.0	0.1	N.A.	N.A.
DGBE	0.0	0.0	44.92	0.0	N.A.	N.A.
Acticide SPX	0.1	0.27	0.0	0.0	N.A.	N.A.
Dielectric Constant	41.44	52.99	39.9	54.0	39.2	52.7
Conductivity (S/m)	0.99	1.12	1.42	1.45	1.80	1.95

4.2.4 SAR measurement procedure

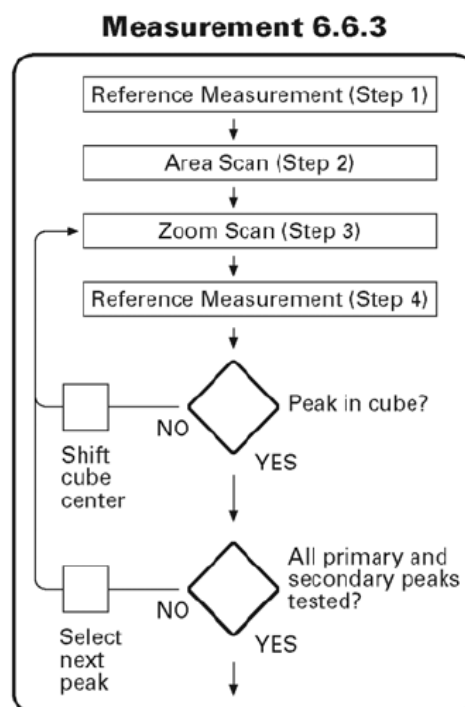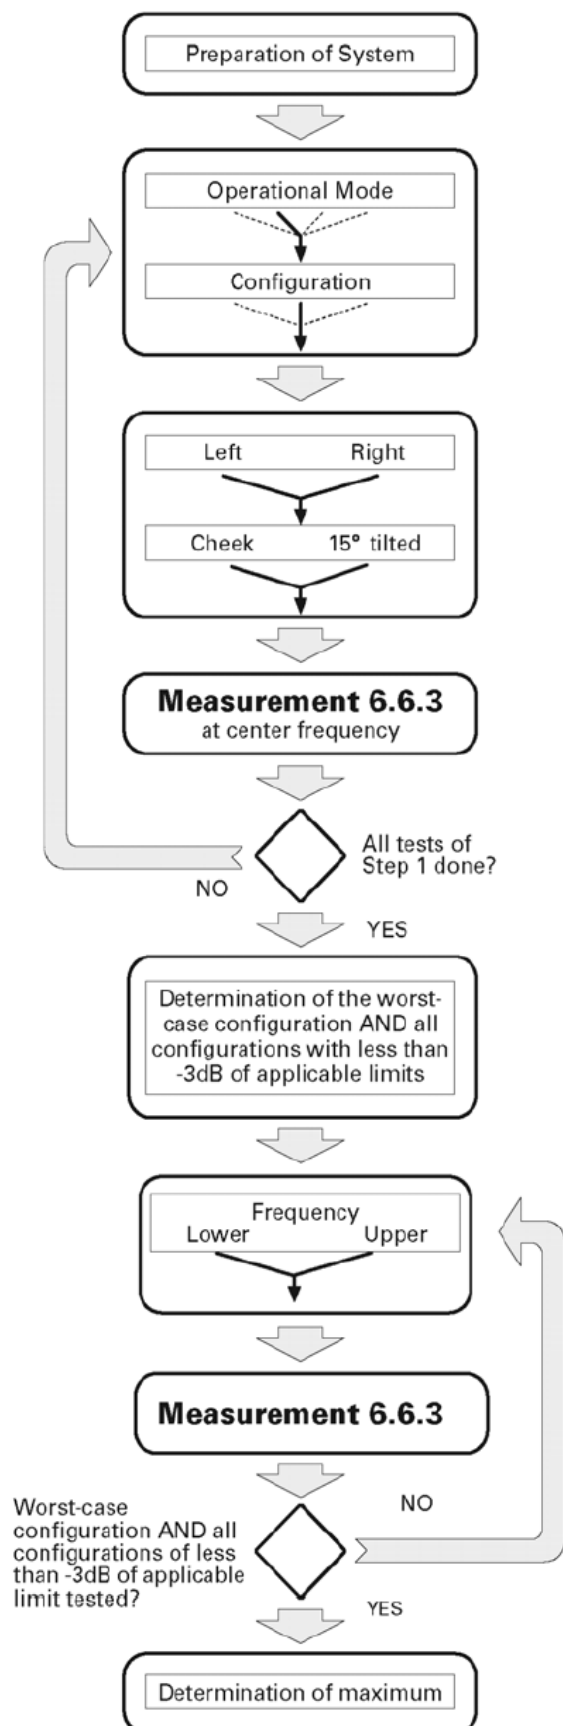


Channel	Left				Right			
	Cheek		Tilt		Cheek		Tilt	
	Retracted	Extended	Retracted	Extended	Retracted	Extended	Retracted	Extended
Mode 1:								
High			S2(-1.4dB)	S2(-0.4dB)			S2(-2.2dB)	S2(-1.4dB)
Middle	S1(-4dB)	S1(-4dB)	S1(-1.5dB)	S1(-0.5dB)	S1(-5dB)	S1(-5dB)	S1(-2.5dB)	S1(-1.5dB)
Low			S2(-1.3dB)	S2(-0.7dB)			S2(-2.7dB)	S2(-0.6dB)
Mode 2:								
High			S2(-2.7dB)	S2(-1.1dB)				
Middle	S1(-5dB)	S1(-5dB)	S1(-2.5dB)	S1(-1dB)	S1(-6dB)	S1(-6dB)	S1(-5dB)	S1(-5dB)
Low			S2(-2.2dB)	S2(-0.8dB)				

After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE EP2528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behaviour are tested.

4.2.5 Validation testing using box phantoms

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the draft IEEE standard EP2528. Setup according to the setup diagram below :

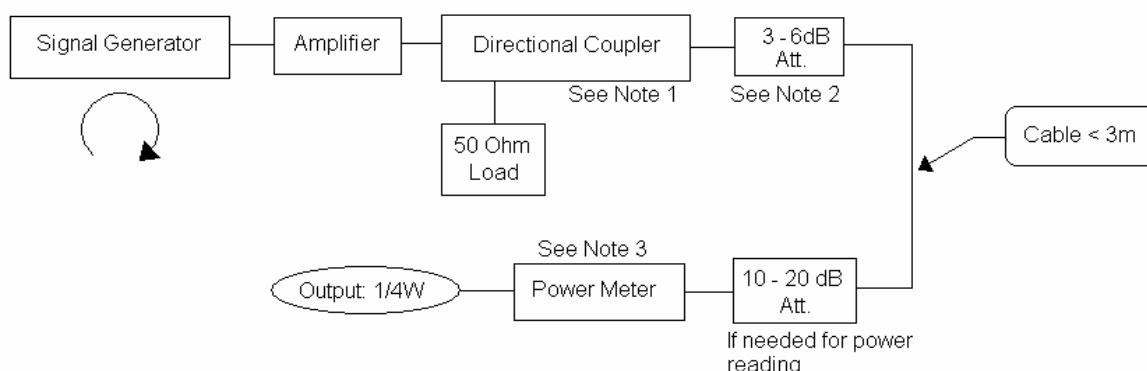

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant

frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.25W (24 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.


Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.

Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of EP2528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.

Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

4.2.5.1 Setting up the box phantom for validation testing

The main purpose of the box phantom is for validation of the system. By placing the box phantom in place of the upright head, using the box phantom dipole holder the system can now be used to check that the probe and software are giving accurate readings.

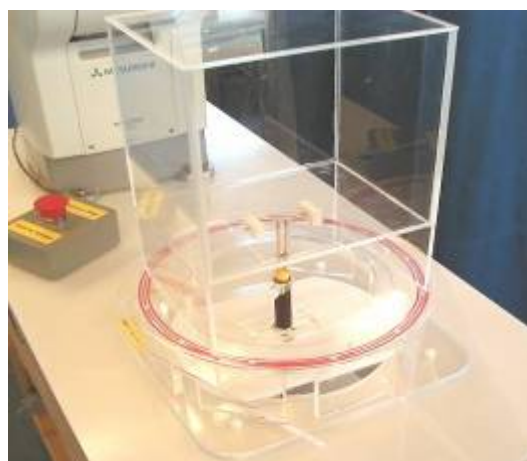

4.2.5.2 Equipments and results of validation testing

Equipments :

name	Type and specification
Signal generator	SML02
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	IXD-080 validation dipole
	IXD-090 validation dipole
	IXD-245 validation dipole

Results:

Frequency	Target value (1g)	Test value (1g)	
850MHz	10.8 W/kg	10.528 W/kg (Head)	10.272 W/kg (Body)
1900MHz	39.7 W/kg	41.140 W/kg (Head)	40.340 W/kg (Body)
2450MHz	52.4 W/kg	52.824 W/kg (Head)	52.344 W/kg (Body)

4.2.6 SARA2 Interpolation and Extrapolation schemes

SARA2 software contains support for both 2D cubic B-spline interpolation as well as 3D cubic B-spline interpolation. In addition, for extrapolation purposes, a general n-th order polynomial fitting routine is implemented following a singular value decomposition algorithm. A 4th order polynomial fit is used by default for data extrapolation, but a linear-logarithmic fitting function can be selected as an option. The polynomial fitting procedures have been tested by comparing the fitting coefficients generated by the SARA2 procedures with those obtained using the polynomial fit functions of Microsoft Excel when applied to the same test input data.

4.2.7 Interpolation of 2D area scan

The 2D cubic B-spline interpolation is used after the initial area scan at fixed distance from the phantom shell wall. The initial scan data are collected with approx. 10mm spatial resolution and spline interpolation is used to find the location of the local maximum to within a 1mm resolution for positioning the subsequent 3D scanning.

4.2.8 Extrapolation of 3D scan

For the 3D scan, data are collected on a spatially regular 3D grid having (by default) 6.4 mm steps in the lateral dimensions and 3.5 mm steps in the depth direction (away from the source). SARA2 enables full control over the selection of alternative step sizes in all directions.

The digitised shape of the head is available to the SARA2 software, which decides which points in the 3D array are sufficiently well within the shell wall to be 'visited' by the SAR probe. After the data collection, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

4.2.9 Interpolation of 3D scan and volume averaging

The procedure used for defining the shape of the volumes used for SAR averaging in the SARA2 software follow the method of adapting the surface of the 'cube' to conform with the curved inner surface of the phantom. This is called, here, the conformal scheme.

For each row of data in the depth direction, the data are extrapolated and interpolated to less than 1mm spacing and average values are calculated from the phantom surface for the row of data over distances corresponding to the requisite depth for 10g and 1g cubes. This results in two 2D arrays of data, which are then cubic B-spline interpolated to sub mm lateral resolution. A search routine then moves an

averaging square around through the 2D array and records the maximum value of the corresponding 1g and 10g volume averages. For the definition of the surface in this procedure, the digitized position of the head shell surface is used for measurement in head-shaped phantoms. For measurements in rectangular, box phantoms, the distance between the phantom wall and the closest set of gridded data points is entered into the software. For measurements in box-shaped phantoms, this distance is under the control of the user. The effective distance must be greater than 2.5mm as this is the tip-sensor distance and to avoid interface proximity effects, it should be at least 5mm. A value of 6 or 8mm is recommended. This distance is called **dbe**.

For automated measurements inside the head, the distance cannot be less than 2.5mm, which is the radius of the probe tip and to avoid interface proximity effects, a minimum clearance distance of x mm is retained. The actual value of **dbe** will vary from point to point depending upon how the spatially regular 3D grid points fit within the shell. The greatest separation is when a grid point is just not visited due to the probe tip dimensions. In this case the distance could be as large as the step-size plus the minimum clearance distance (i.e with $x=5$ and a step size of 3.5, **dbe** will be between 3.5 and 8.5mm).

The default step size (**dstep**) used is 3.5mm, but this is under user-control. The compromise is with time of scan, so it is not practical to make it much smaller or scan times become long and power-drop influences become larger.

The robot positioning system specification for the repeatability of the positioning (**dss**) is ± 0.04 mm.

The phantom shell is made by an industrial moulding process from the CAD files of the SAM shape, with both internal and external moulds. For the upright phantoms, the external shape is subsequently digitized on a Mitutoyo CMM machine (Euro an ultrasonic sensor indicate that the shell thickness (**dph**) away from the ear is 2.0 ± 0.1 mm. The ultrasonic measurements were calibrated using additional mechanical measurements on available cut surfaces of the phantom shells. See support document IXS-020x.

For the upright phantom, the alignment is based upon registration of the rotation axis of the phantom on its 253mm diameter baseplate bearing and the position of the probe axis when commanded to go to the axial position. A laser alignment tool is provided (procedure detailed elsewhere). This enables the registration of the phantom tip (**dmis**) to be assured to within approx. 0.2mm. This alignment is done with reference to the actual probe tip after installation and probe alignment. The rotational positioning of the phantom is variable – offering advantages for special studies, but locating pins ensure accurate repositioning at the principal positions (LH and RH ears).

4.2.10 Probe anisotropy and boundary proximity influence correction software (Virtual Probe Miniaturization VPM software)

Indexsar Report IXS0223 provides a background to the factors affecting measurements at high frequencies when using SAR probes of size 8 – 5mm tip diameter. Although the Indexsar probes are at the smaller end of this range, SAR probes are not isotropic in 5GHz phantom field gradients and ad

- 1) At >5GHz, the SAR field decays to 1/e of its value within 3-4mm of the surface of a phantom with a source adjacent. So, measurements are significantly affected by small errors in the separation distances employed between the probe and the phantom surface. The distance between the probe tip and the plane of the sensors should be allowed for using the same value as that declared in the probe calibration document. Distances between the probe tip and phantom surface should be measured accurately to 0.1mm. The best way to assure this is to use the robot to position the probe in light contact with the phantom wall and then to withdraw the probe by the selected amount under robot control.
- 2) The preferred test geometry at 5GHz is for testing at the bottom of an open phantom. If tests at the side of a phantom are performed, it will be necessary to apply VPM corrections as described below. In either case, careful monitoring of probe spacing from the phantom is required. Probe isotropy is improved for measuring fields polarized either normal to or parallel to the probe axis. If the source polarization is known, this arrangement should be established, if possible.
- 3) The probe calibration factors including boundary correction terms should be carefully entered from the calibration document. The probe calibration factors require that the probe be oriented in a known rotational position. The red spot on the Indexsar probe should be aligned facing away from the robot arm.
- 4) The latest SARA2 software (VPM editions) contain support for correcting for probe anisotropy in strong field gradients and include a procedure for correcting for boundary proximity influences. As noted above, the probe has to be oriented in a given rotational position and some familiarity with the new measurement procedures is necessary. The calculations can be performed either with or without the extended correction schemes applied.
- 5) If boundary corrections are used, it may be preferable to go rather closer to the phantom surface than is usually recommended and to perform scans using small steps between the measurement planes so that good data on the SAR profiles are collected within the first 10mm of the phantom depth.

5 CHARACTERISTICS OF THE TEST

5.1 Applicable Limit Regulations

47CFR § 2.1093: Radiofrequency Radiation Exposure Evaluation: Portable Devices

FCC OET Bulletin 65(Edition 97-01), Supplement C(Edition 01-01): Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

6 LABORATORY ENVIRONMENT

Table: The Ambient Conditions during SAR Test

Temperature	Min. = 15 ° C, Max. = 30 ° C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	



7. 3G MEASUREMENT PROCEDURES

7.1 Procedures Used To Establish Test Signal

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

7.2 SAR Measurement Conditions for WCDMA

These procedures were followed according to FCC "SAR Measurement Procedures for 3G Devices", June 2006.

7.2.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all "1s". Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes) should be tabulated in the test report. All configurations that are not supported by the EUT or cannot be measured due to technical or equipment limitations should be clearly identified.

7.2.2 Head SAR Measurement

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps SRB (Signaling radio bearer) using the exposure configuration That results in the highest SAR in 12.2 RMC for that RF channel.

7.2.3 Body SAR Measurement

SAR for body exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s".

7.2.4 Handset with HSDPA

Body SAR is not required for handsets with HSDPA capabilities when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC. Otherwise, SAR is measured for HSDPA, using FRC, with the body exposure configuration that results in the highest SAR in 12.2 RMC for that RF channel.

Band		HSDPA INACTIVE		HSDPA ACTIVE
	Channel	12.2kbps RMC (dBm)	12.2kbps RMC (dBm)	
Cellular 850MHz	4132	22.47	22.47	N.A*
	4175	22.35	22.34	
	4233	22.83	22.81	
PCS 1900MHz	9262	22.39	22.36	N.A*
	9400	22.15	22.15	
	9538	22.47	22.46	

* This Device is not support HSDPA.

8 TEST RESULTS

8.1 Dielectric Performance

The measured 1-gram averaged SAR values of the device against the head and the body are provided in Tables 1 and 2 respectively. The humidity and ambient temperature of test facility were 54% ~60% and 23.0 °C ~23.9°C respectively. The SAM head phantom (SN 0380 SH and SN 0381 SH) were full of the head tissue simulating liquid. The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested at the lowest, middle and highest frequencies in the transmit band.

Table 1: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.0~23.9° C, humidity: 54~60%.			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHZ	41.5	0.97
Validation value (July 28)	850 MHZ	41.45	0.93
Target value	1900 MHz	40.0	1.40
Validation value (July 29)	1900 MHz	40.05	1.396
Target value	2450MHz	39.2	1.80
Validation value (July 30)	2450MHz	39.26	1.805

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the belt holder.

Table 2: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.0~23.9° C, humidity: 54~60%.			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHz	55.0	1.05
Validation value (July 28)	850 MHz	55.12	0.99

Target value	1900 MHz	53.3	1.52
Validation value (July 29)	1900 MHz	53.25	1.512
Target value	2450 MHz	52.7	1.95
Validation value (July 30)	2450 MHz	52.59	1.943

8.2 Summary of Measurement Results (GSM 850MHz and PCS 1900 MHz Band)

Table 3: SAR Values (GSM 850 MHz Band), Measured against the head.

Temperature: 23.0 °C ~23.8°C, humidity: 54~59%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Bottom Channel	0.958	31.93
Left head, Touch cheek, Mid Channel	0.999	31.65
Left head, Touch cheek, Top Channel	0.924	31.12
Left head, Tilt 15 Degree, Bottom Channel	0.497	31.93
Left head, Tilt 15 Degree, Mid Channel	0.559	31.65
Left head, Tilt 15 Degree, Top Channel	0.530	31.12
Right head, Touch cheek, Bottom Channel	1.055	31.93
Right head, Touch cheek, Mid Channel	0.954	31.65
Right head, Touch cheek, Top Channel	1.004	31.12
Right head, Tilt 15 Degree, Bottom Channel	0.646	31.93
Right head, Tilt 15 Degree, Mid Channel	0.712	31.65
Right head, Tilt 15 Degree, Top Channel	0.778	31.12
Right head, Touch cheek, Bottom Channel with BT	1.060	31.93
Right head, Touch cheek, Bottom Channel with GPRS	1.058	31.93

Table 4: SAR Values (PCS 1900MHz Band), Measured against the head.

Temperature: 23.0 °C ~23.8°C, humidity: 54~59%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Bottom Channel	1.207	29.45

Left head, Touch cheek, Mid Channel	0.974	29.43
Left head, Touch cheek, Top Channel	0.727	29.10
Left head, Tilt 15 Degree, Bottom Channel	1.149	29.45
Left head, Tilt 15 Degree, Mid Channel	0.722	29.43
Left head, Tilt 15 Degree, Top Channel	0.567	29.10
Right head, Touch cheek, Bottom Channel	1.015	29.45
Right head, Touch cheek, Mid Channel	0.591	29.43
Right head, Touch cheek, Top Channel	0.436	29.10
Right head, Tilt 15 Degree, Bottom Channel	0.874	29.45
Right head, Tilt 15 Degree, Mid Channel	0.561	29.43
Right head, Tilt 15 Degree, Top Channel	0.418	29.10
Left head, Touch cheek, Bottom Channel with BT	1.212	29.45
Left head, Touch cheek, Bottom Channel with GPRS	1.201	29.45

Table 5: SAR Values (WCDMA 850MHz Band), Measured against the head.

Temperature: 23.0 °C ~23.8°C, humidity: 54~59%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Bottom frequency	0.453	24.92
Left head, Touch cheek, Mid frequency	0.525	24.90
Left head, Touch cheek, Top frequency	0.314	24.94
Left head, Tilt 15 Degree, Bottom frequency	0.254	24.92
Left head, Tilt 15 Degree, Mid frequency	0.252	24.90
Left head, Tilt 15 Degree, Top frequency	0.299	24.94
Right head, Touch cheek, Bottom frequency	0.452	24.92
Right head, Touch cheek, Mid frequency	0.482	24.90
Right head, Touch cheek, Top frequency	0.604	24.94
Right head, Tilt 15 Degree, Bottom frequency	0.314	24.92
Right head, Tilt 15 Degree, Mid frequency	0.389	24.90
Right head, Tilt 15 Degree, Top frequency	0.497	24.94
Right head, Touch cheek, Top frequency with BT	0.612	24.94

Table 6: SAR Values (WCDMA 1900MHz Band), Measured against the head.

Temperature: 23.0 °C ~23.8°C, humidity: 54~59%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	

	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Bottom frequency	0.746	24.81
Left head, Touch cheek, Mid frequency	0.649	24.57
Left head, Touch cheek, Top frequency	0.658	24.77
Left head, Tilt 15 Degree, Bottom frequency	0.085	24.81
Left head, Tilt 15 Degree, Mid frequency	0.086	24.57
Left head, Tilt 15 Degree, Top frequency	0.055	24.77
Right head, Touch cheek, Bottom frequency	0.693	24.81
Right head, Touch cheek, Mid frequency	0.566	24.57
Right head, Touch cheek, Top frequency	0.232	24.77
Right head, Tilt 15 Degree, Bottom frequency	0.125	24.81
Right head, Tilt 15 Degree, Mid frequency	0.106	24.57
Right head, Tilt 15 Degree, Top frequency	0.055	24.77
Left head, Touch cheek, Bottom frequency with BT	0.755	24.81

Table 7: SAR Values (WiFi 2450 MHz Band, 802.11b), Measured against the head.

Temperature: 23.0 °C ~23.8°C, humidity: 54~59%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Bottom frequency	0.347	18.07
Left head, Touch cheek, Mid frequency	0.386	18.06
Left head, Touch cheek, Top frequency	0.400	17.94
Left head, Tilt 15 Degree, Bottom frequency	0.094	18.07
Left head, Tilt 15 Degree, Mid frequency	0.114	18.06
Left head, Tilt 15 Degree, Top frequency	0.124	17.94
Right head, Touch cheek, Bottom frequency	0.255	18.07
Right head, Touch cheek, Mid frequency	0.258	18.06
Right head, Touch cheek, Top frequency	0.258	17.94
Right head, Tilt 15 Degree, Bottom frequency	0.094	18.07
Right head, Tilt 15 Degree, Mid frequency	0.110	18.06
Right head, Tilt 15 Degree, Top frequency	0.114	17.94
Left head, Touch cheek, Top frequency with B T	0.412	17.94

Table 8: SAR Values (WiFi 2450 MHz Band, 802.11g), Measured against the head.

Temperature: 23.0 °C ~23.8°C, humidity: 54~59%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	

Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Left head, Touch cheek, Bottom frequency	0.068	19.30
Left head, Touch cheek, Mid frequency	0.090	19.62
Left head, Touch cheek, Top frequency	0.101	19.60
Left head, Tilt 15 Degree, Bottom frequency	0.021	19.30
Left head, Tilt 15 Degree, Mid frequency	0.033	19.62
Left head, Tilt 15 Degree, Top frequency	0.033	19.60
Right head, Touch cheek, Bottom frequency	0.061	19.30
Right head, Touch cheek, Mid frequency	0.066	19.62
Right head, Touch cheek, Top frequency	0.069	19.60
Right head, Tilt 15 Degree, Bottom frequency	0.032	19.30
Right head, Tilt 15 Degree, Mid frequency	0.036	19.62
Right head, Tilt 15 Degree, Top frequency	0.040	19.60
Left head, Touch cheek, Top frequency	0.157	19.60

Table 9: SAR Values (GSM 850 MHz Band), Measured against the body

Temperature: 23.0 °C ~23.8°C, humidity: 48~58%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Bottom Channel	0.318	31.93
Side, Mid Channel	0.358	31.65
Side , Top Channel	0.424	31.12
Side , Top Channel (with B T)	0.337	31.12
Side , Top Channel (with GPRS)	0.340	31.12
Side, Top Channel (face to bottom)	0.272	31.12

Table 10: SAR Values (PCS1900 MHz Band), Measured against the body

Temperature: 21.0~21.9° C, humidity: 48~58%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Bottom Channel	0.243	29.45

Side, Mid Channel	0.163	29.43
Side , Top Channel	0.110	29.10
Side , Mid Channel(with B T)	0.248	29.45
Side , Mid Channel(with GPRS)	0.250	29.45
Side , Mid Channel(face to bottom)	0.114	29.45

Table 11: SAR Values (WCDMA 850 MHz Band), Measured against the body

Temperature: 21.0~21.9° C, humidity: 48~58%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Bottom frequency	0.177	24.92
Side, Mid frequency	0.188	24.90
Side , Top frequency	0.220	24.94
Side , Top frequency with BT	0.231	24.94
Side , Top frequency (face to bottom)	0.342	24.94

Table 12: SAR Values (WCDMA 1900 MHz Band), Measured against the body

Temperature: 21.0~21.9° C, humidity: 48~58%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Bottom frequency	0.217	24.81
Side, Mid frequency	0.210	24.57
Side , Top frequency	0.127	24.77
Side, Bottom frequency with BT	0.225	24.81
Side, Bottom frequency (face to bottom)	0.278	24.81

Table 13: SAR Values (WiFi 2450 MHz Band, 802.11b), Measured against the body

Temperature: 21.0~21.9° C, humidity: 48~58%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Bottom frequency	0.549	18.07
Side, Mid frequency	0.630	18.06

Side , Top frequency	0.690	17.94
Side , Top frequency (face to bottom)	0.404	17.94
Side , Top frequency (with BT)	0.690	17.94

Table 14: SAR Values (WiFi 2450 MHz Band, 802.11g), Measured against the body

Temperature: 21.0~21.9° C, humidity: 48~58%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Case	Measurement Result (W/kg)	
	1 g Average (W/kg)	Power level (dBm)
Side, Bottom frequency	0.131	19.30
Side, Mid frequency	0.176	19.62
Side , Top frequency	0.218	19.60
Side , Top frequency (face to bottom)	0.141	19.60
Side , Top frequency with BT	0.221	19.60

8.3 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is **below** exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

9 Measurement Uncertainty

No	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	c_i	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom V_{eff} or v_i
Measurement System								
1	—Probe Calibration	B	3.6	N	1	1	3.60	∞
2	—Axial isotropy	B	4.23	R	$\sqrt{3}$	$\sqrt{1-cp}$	0.00	∞
3	—Hemispherical Isotropy	B	10.7	R	$\sqrt{3}$	$\sqrt{cp}$	6.18	∞
4	—Boundary Effect	B	1.7	R	$\sqrt{3}$	1	0.98	∞
5	—Linearity	B	2.98	R	$\sqrt{3}$	1	1.69	∞
6	—System Detection Limits	B	1.00	R	$\sqrt{3}$	1	0.60	∞
7	—Readout Electronics	B	1.00	N	1	1	1.00	∞
8	—Response Time	B	0.80	R	$\sqrt{3}$	1	0.50	∞
9	—Integration Time	B	2.60	R	$\sqrt{3}$	1	1.50	∞
10	—RF Ambient Conditions	B	3.00	R	$\sqrt{3}$	1	1.70	∞
11	—Probe Position Mechanical tolerance	B	1.14	R	$\sqrt{3}$	1	0.33	∞
12	—Probe Position with respect to Phantom Shell	B	2.86	R	$\sqrt{3}$	1	0.83	∞
13	—Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	3.6	R	$\sqrt{3}$	1	2.08	∞
Uncertainties of the DUT								

No. SAR07-034

14	— Position of the DUT	A	2.90	N	1	1	2.90	0
15	— Holder of the DUT	A	3.60	N	1	1	3.60	0
16	— Output Power Variation – SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.89	∞
Phantom and Tissue Parameters								
17	— Phantom Uncertainty(shape and thickness tolerances)	B	1.43	R	$\sqrt{3}$	1	0.83	∞
18	— Liquid Conductivity Target – tolerance	B	5.0	R	$\sqrt{3}$	0.7	2.02	∞
19	— Liquid Conductivity – measurement Uncertainty)	B	2.0	R	$\sqrt{3}$	0.7	0.81	∞
20	— Liquid Permittivity Target tolerance	B	5.0	R	$\sqrt{3}$	0.6	1.73	∞
21	— Liquid Permittivity – measurement uncertainty	B	1.0	R	$\sqrt{3}$	0.6	0.35	∞
Combined Standard Uncertainty				RSS			±8.95%	
Expanded uncertainty (Confidence interval of 95 %)				K= 2.003935			±17.9%	

10 MAIN TEST INSTRUMENTS

No.	EQUIPMENT	TYPE	Due Date
1	E-Field SAR Probe	IXP-050 (SN 0177)	2008-04-26
2	Six-axis AC Servo industrial robot	RV-2A (SN AN406018)	2008-04-26
3	Mobile Phone Tester	4405 (SN 0811211)	2008-04-26
4	System Validation Dipole 2450MHZ	IXD-245 (SN 0104)	2008-04-26
5	System Validation Dipole 1900MHZ	IXD-080 (SN 0112)	2008-04-26
6	System Validation Dipole 850MHZ	IXD-090 (SN 0093)	2008-04-26
7	Probe Amplifier and PC Interface	IFA-010 (SN 0027)	2008-04-26
8	SAM Head Phantom	SN 0380 SH	2008-04-26
9	SAM Head Phantom	SN 0381 SH	2008-04-26
10	Box Phantom	IXB-070	2008-04-26



ANNEX A

of

ShenZhen Electronic Product Quality Testing Center

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SAR07-034

TechFaith Wireless Technology Group Limited

GSM/WCDMA mobile phone

Accreditation Certificate

This Annex consists of 2 pages
Date of Report: 2007-08-10





China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(No. CNAS L1659)

China National Accreditation Service for Conformity Assessment has accredited

**Shenzhen Electronic Product Quality Testing Center
(CQCS Testing Co. Ltd.)**

Electronic Testing Building Wenguang Road, Shahe West, Xili Town, Nanshan
District, Shenzhen, Guangdong, China

*to ISO/IEC 17025:1999 General Requirements for the Competence of
Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria
for the Competence of Testing and Calibration Laboratories) for the
competence in the field of testing and calibration.*

*The scope of accreditation is detailed in the attached schedule bearing the same
accreditation number as above. The schedule forms an integral part of this
certificate.*

Date of Issue: 2007-01-17

Date of Expiry: 2009-10-08

Date of Initial Accreditation: 1999-08-03



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment(CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation systems for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA), and the signatory to Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).



ANNEX B
of
ShenZhen Electronic Product Quality Testing Center

CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SAR07-034

TechFaith Wireless Technology Group Limited

GSM/WCDMA mobile phone

Type Name: PERAI-H

Hardware Version: EP2

Software Version: TF_WM6_PERAI_H_VER_02.02

TEST LAYOUT

This Annex consists of 7 pages

Date of Report: 2007-08-10





Fig.1 SARA2 System Test Layout



Fig.2 The depth of head tissue in SAM



Fig.3 EUT Left Head Touch Cheek Position



Fig.4 EUT Left Head Tilt15 Position



Fig.5 EUT Right Head Touch Cheek Position



Fig.6 EUT Right Head Tilt15 Position



Fig.7 spacer 1.5cm

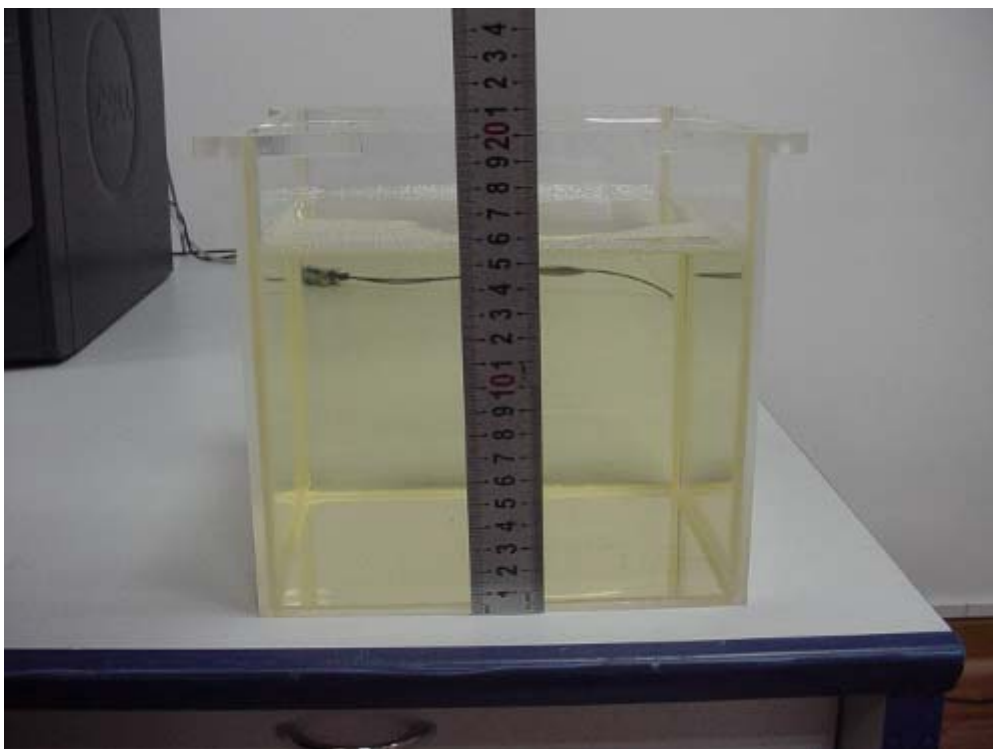


Fig.8 the depth of body tissue

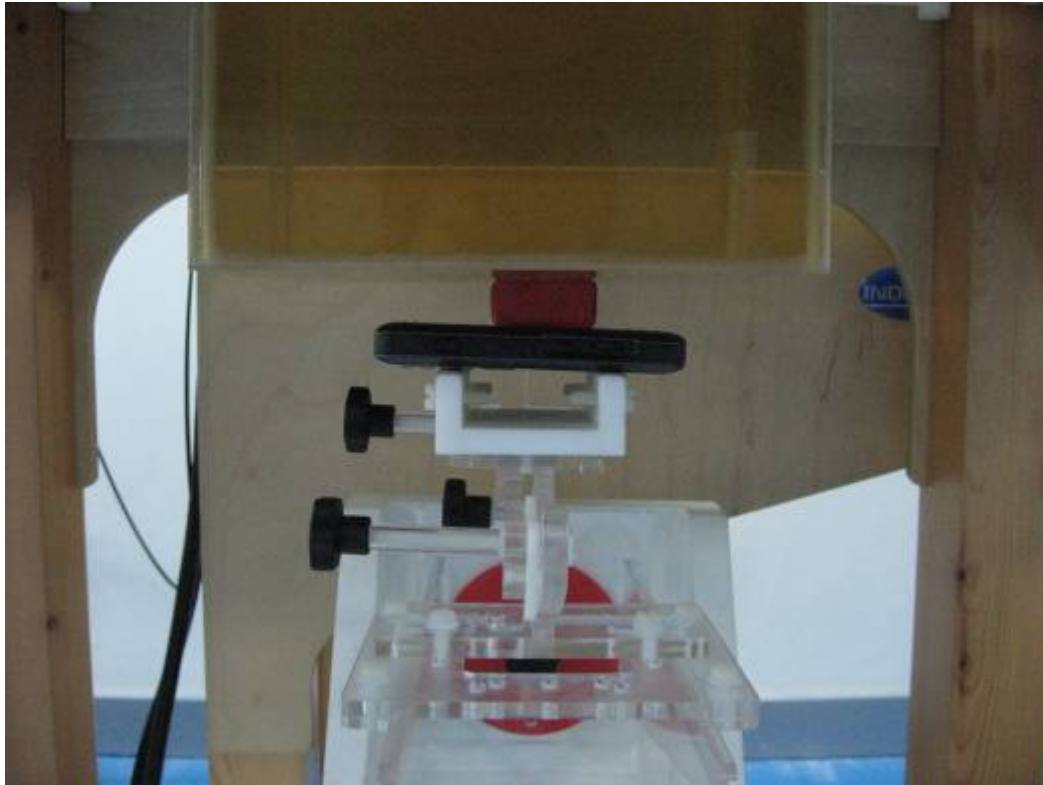


Fig.9 Side Position



ANNEX C
of
ShenZhen Electronic Product Quality Testing Center

CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SAR07-034

TechFaith Wireless Technology Group Limited

GSM/WCDMA mobile phone

Type Name: PERAI-H

Hardware Version: EP2

Software Version: TF_WM6_PERAI_H_VER_02.02

Sample Photographs

This Annex consists of 7 pages

Date of Report: 2007-08-10



1. Photograph of the Equipment under Test

1.1. Appearance












1.2 Inside



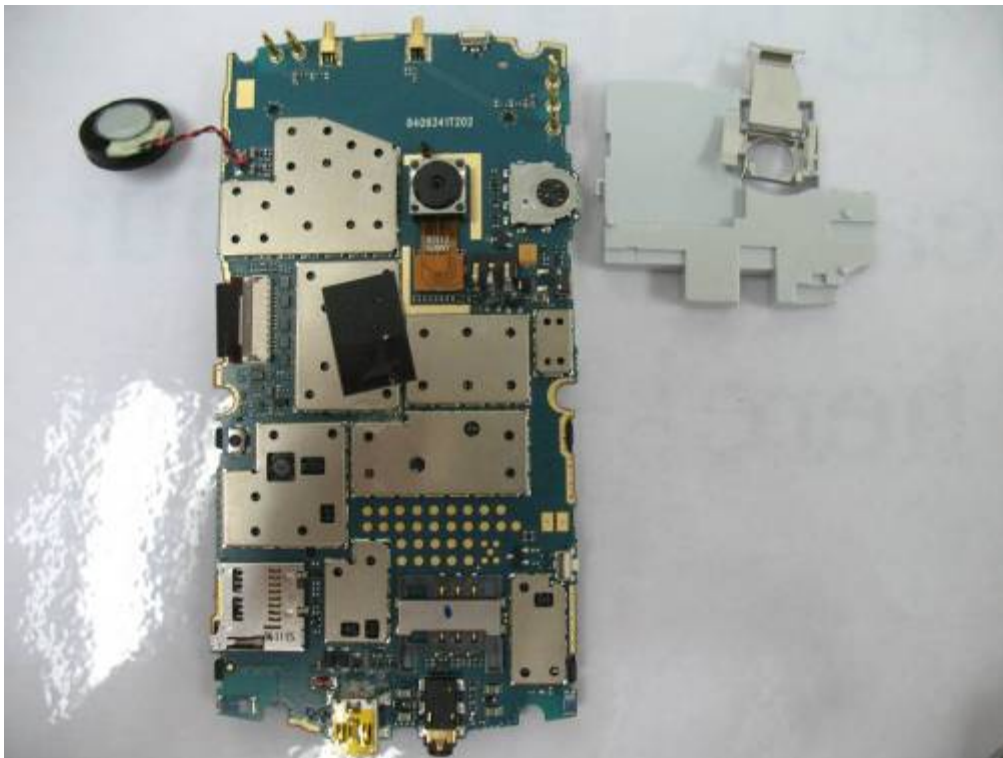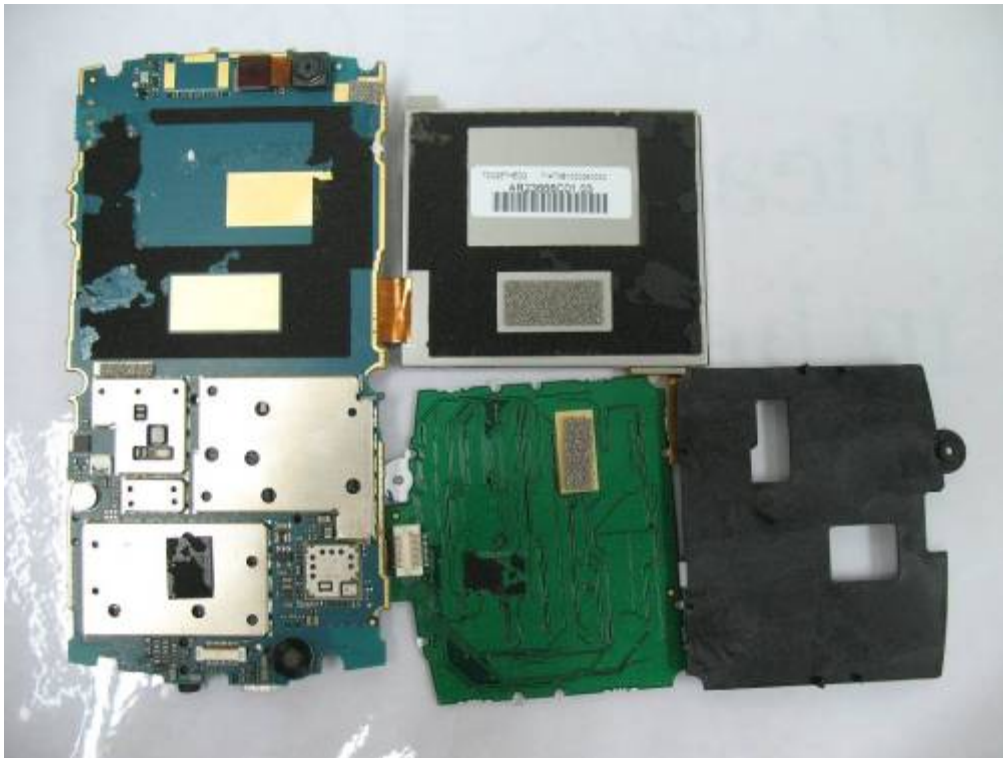

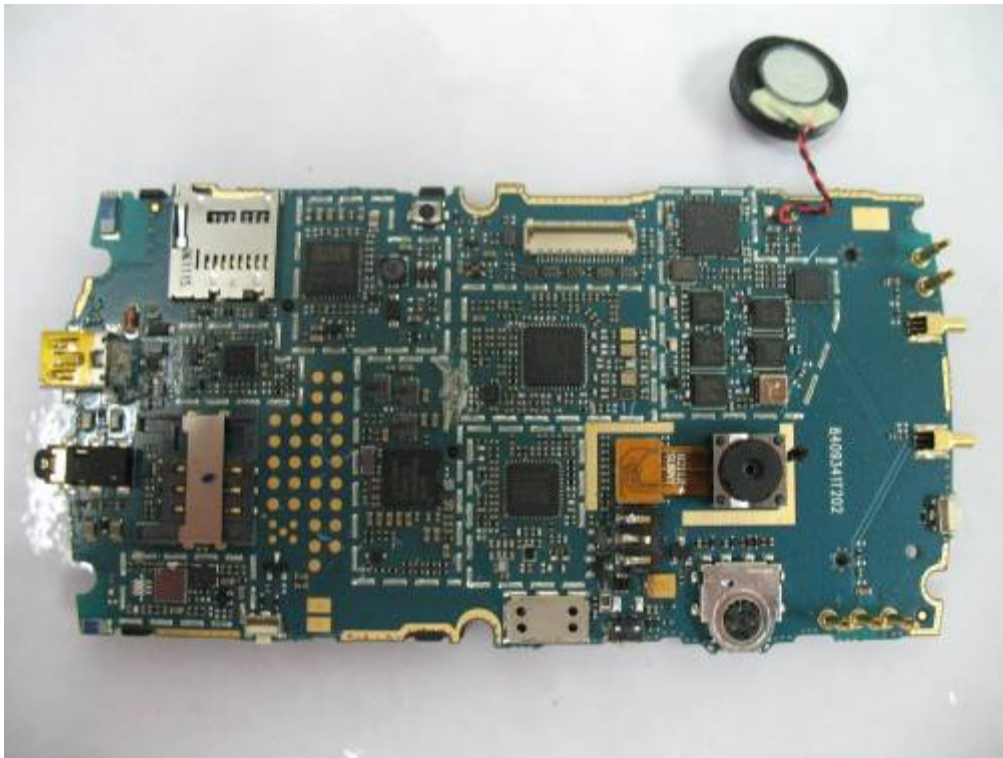



ANNEX D
of
ShenZhen Electronic Product Quality Testing Center

CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SAR07-034

TechFaith Wireless Technology Group Limited

GSM/WCDMA mobile phone

Type Name: PERAI-H

Hardware Version: EP2

Software Version: TF_WM6_PERAI_H_VER_02.02

Graph Test Results


This Annex consists of 51 pages

Date of Report: 2007-08-10




SAR Test GSM 850 LH_TouchCheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 16:32:33	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_LH_TOUC HCHEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-18.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-132.17 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	33.22 V/m
Test Frequency:	850MHz	SAR 1g:	0.958 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.663 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.533 W/kg
Type of Modulation:	GMSK	SAR End:	0.524 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-1.70 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

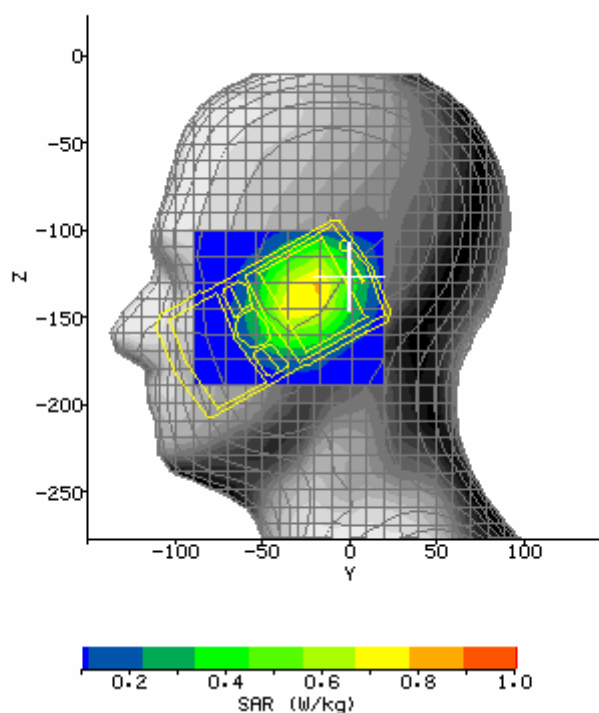


SAR Test GSM 850 LH_TouchCheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 16:43:34	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_LH_TOUC HCHEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-34.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-144.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	34.29 V/m
Test Frequency:	850MHz	SAR 1g:	0.999 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.710 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.562 W/kg
Type of Modulation:	GMSK	SAR End:	0.572 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

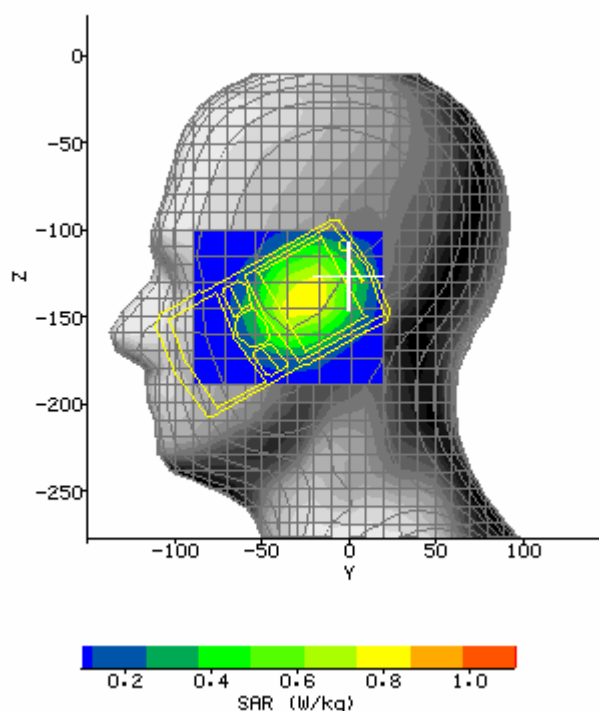


SAR Test GSM 850 LH_TouchCheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 16:54:39	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_LH_TOUC HCHEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-40.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-148.17 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	36.01 V/m
Test Frequency:	850MHz	SAR 1g:	0.924 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.646 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.510 W/kg
Type of Modulation:	GMSK	SAR End:	0.522 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	2.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

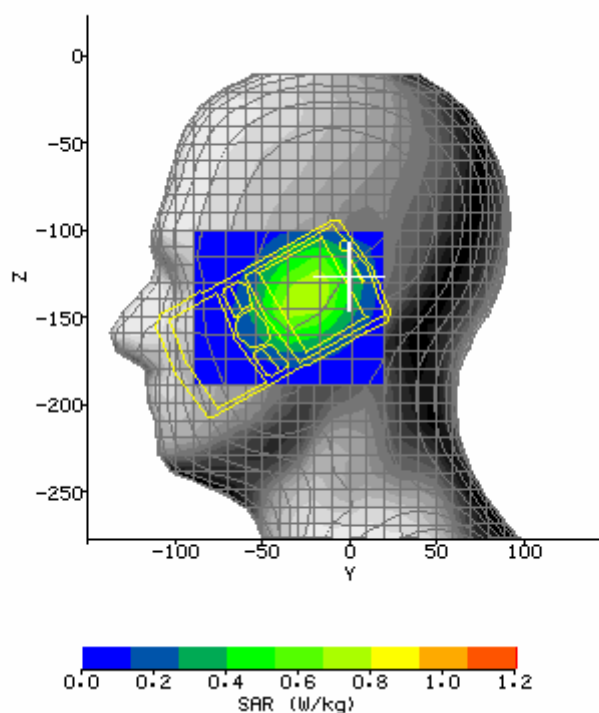


SAR Test GSM 850 LH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-28 17:28:08	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_LH_TILT1 5_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-18.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	25.03 V/m
Test Frequency:	850MHz	SAR 1g:	0.497 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.360 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.292 W/kg
Type of Modulation:	GMSK	SAR End:	0.277 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-4.18 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

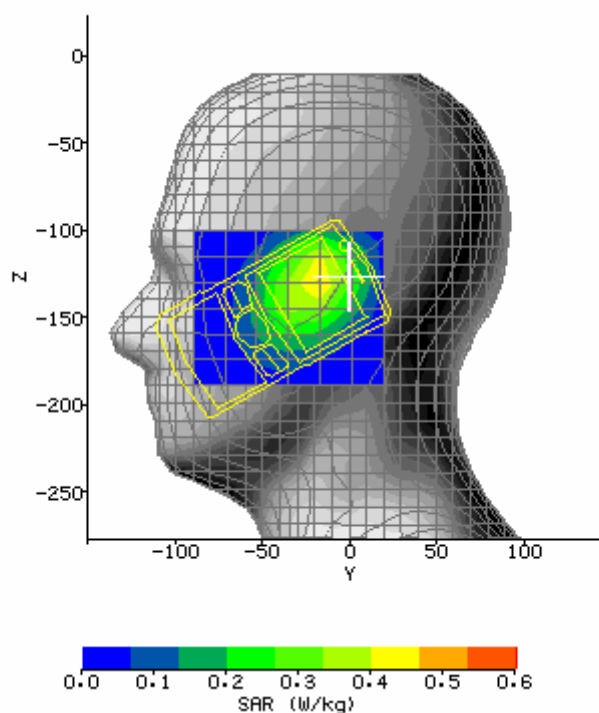


SAR Test GSM 850 LH_Tilt15 (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 17:17:08	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_LH_TILT1 5_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-126.17 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	26.01 V/m
Test Frequency:	850MHz	SAR 1g:	0.559 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.397 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.327 W/kg
Type of Modulation:	GMSK	SAR End:	0.336 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	2.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

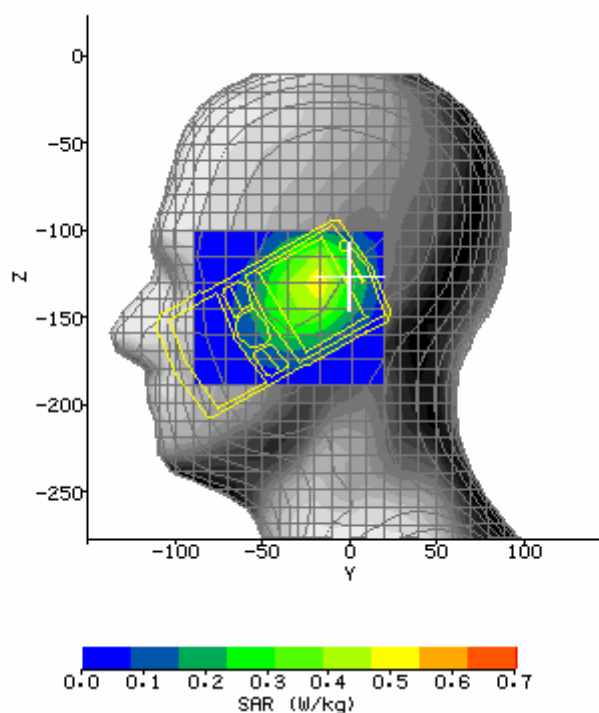


SAR Test GSM 850 LH_Tilt15 (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 17:06:02	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_LH_TILT1 5_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-23.83 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-133.83 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	25.40 V/m
Test Frequency:	850MHz	SAR 1g:	0.530 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.381 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.305 W/kg
Type of Modulation:	GMSK	SAR End:	0.310 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.80 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

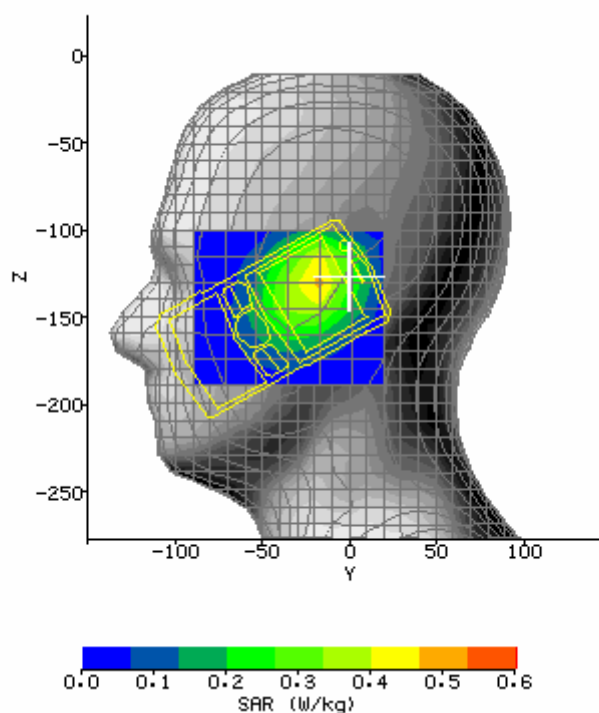


SAR Test GSM 850 RH_TouchCheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 15:20:49	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_RH_TOUC HCHEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	18.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-147.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	34.87 V/m
Test Frequency:	850MHz	SAR 1g:	1.055 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.735 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.586 W/kg
Type of Modulation:	GMSK	SAR End:	0.567 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-3.28 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

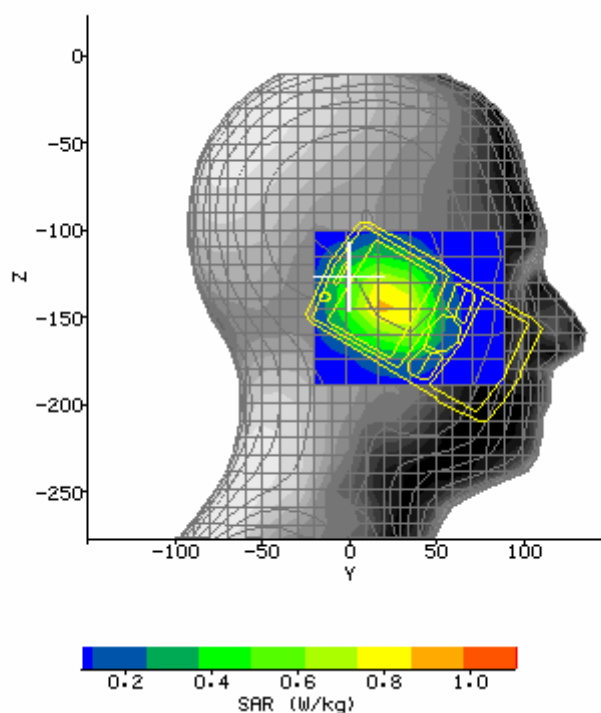


SAR Test GSM 850 RH_TouchCheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 15:32:42	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_RH_TOUC HCHEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	15.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-145.83 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	33.61 V/m
Test Frequency:	850MHz	SAR 1g:	0.954 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.649 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.502 W/kg
Type of Modulation:	GMSK	SAR End:	0.510 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

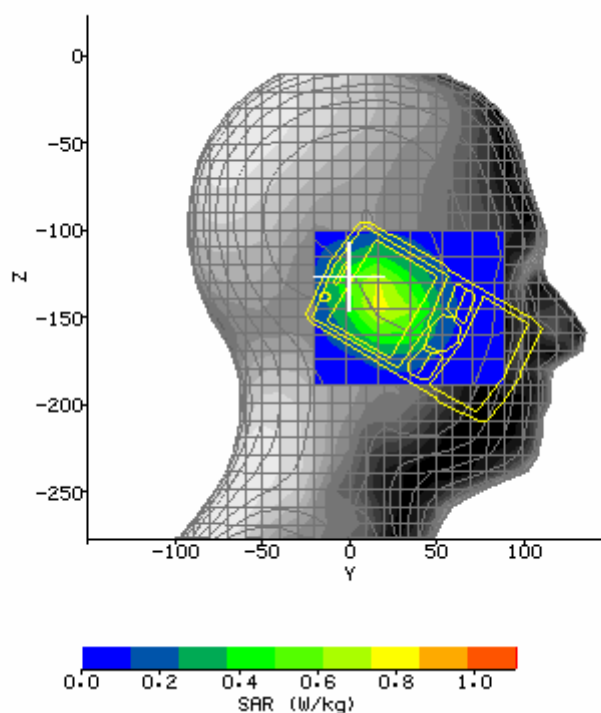


SAR Test GSM 850 RH_TouchCheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 15:45:02	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_RH_TOUC HCHEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	15.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-145.83 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	35.00 V/m
Test Frequency:	850MHz	SAR 1g:	1.004 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.700 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.552 W/kg
Type of Modulation:	GMSK	SAR End:	0.557 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	0.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

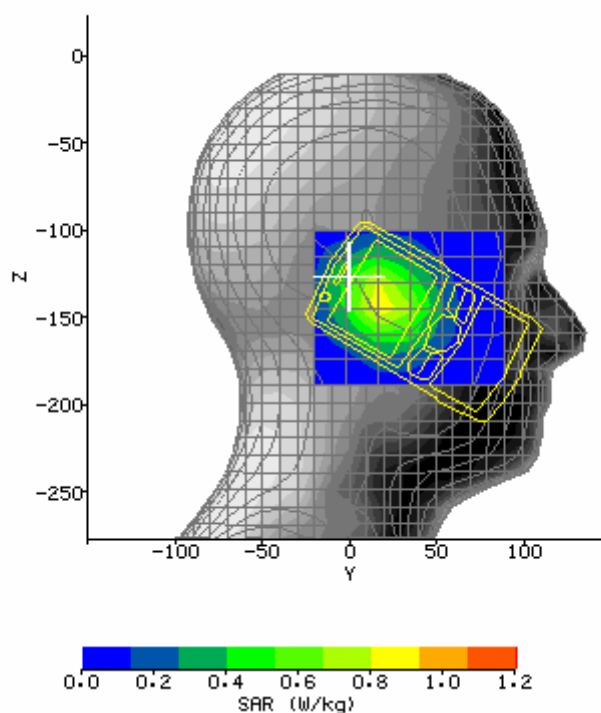


SAR Test GSM 850 RH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 16:18:03	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_RH_TILT1 5_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-139.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	29.10 V/m
Test Frequency:	850MHz	SAR 1g:	0.646 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.434 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.353 W/kg
Type of Modulation:	GMSK	SAR End:	0.354 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	0.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

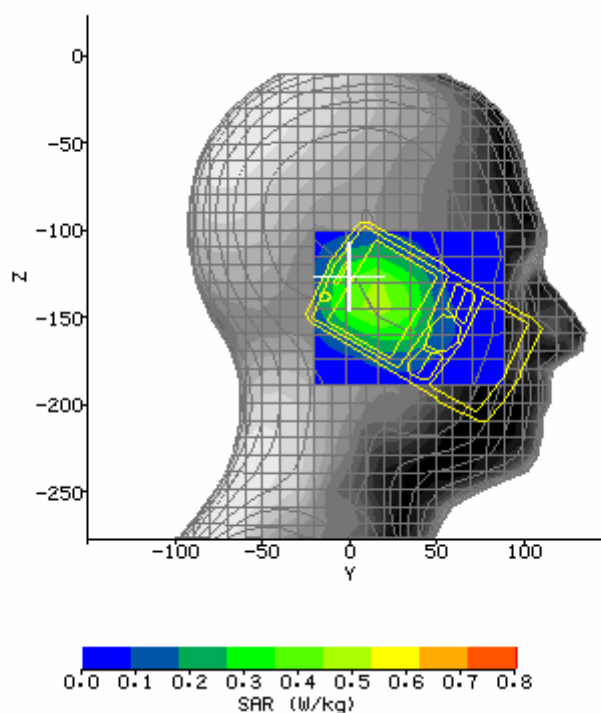


SAR Test GSM 850 RH_Tilt15 (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 16:07:23	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_RH_TILT1 5_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-139.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	30.78 V/m
Test Frequency:	850MHz	SAR 1g:	0.712 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.484 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.389 W/kg
Type of Modulation:	GMSK	SAR End:	0.394 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.23 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

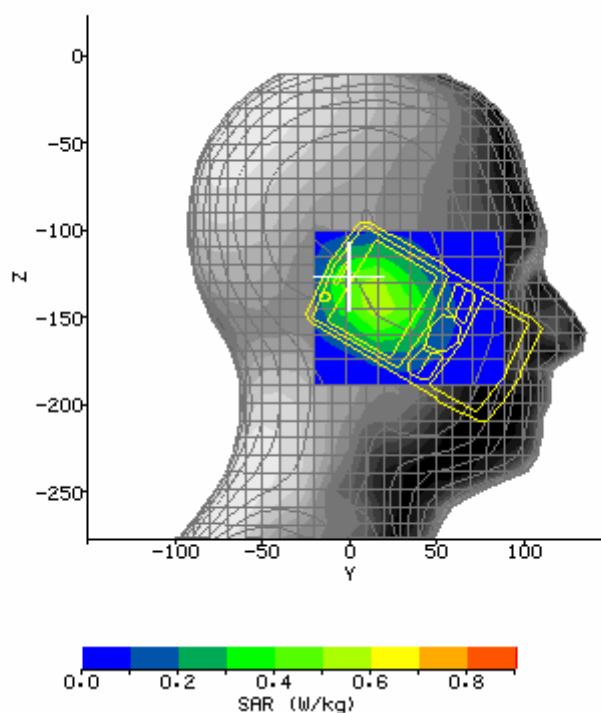


SAR Test GSM 850 RH_Tilt15 (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 15:56:20	DUT Battery Model/No:	
Filename:	HG-PERAI-H_GSM850_RH_TILT15_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-137.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	31.49 V/m
Test Frequency:	850MHz	SAR 1g:	0.778 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.528 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.445 W/kg
Type of Modulation:	GMSK	SAR End:	0.437 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-1.75 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

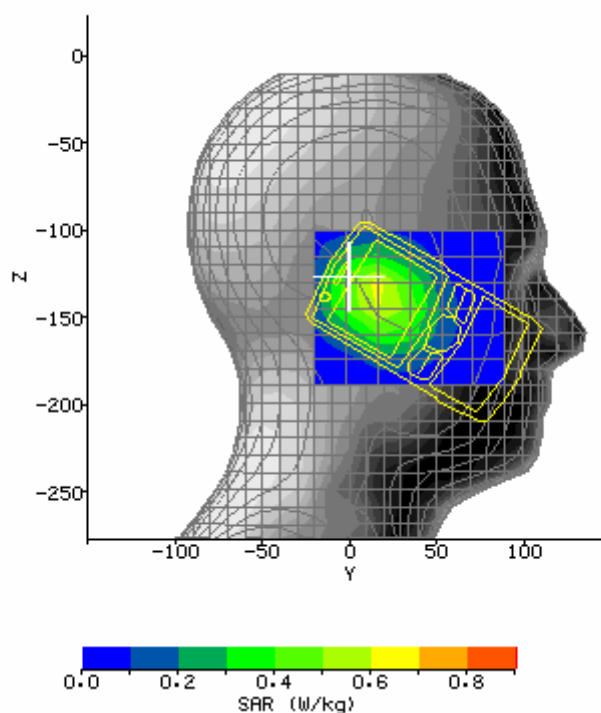


SAR Test GSM 850 RH_TouchCheek (Bottom Channel with Bluetooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 15:30:51	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_RH_TOUC HCHEEK_B_BT.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	18.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-147.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	34.87 V/m
Test Frequency:	850MHz	SAR 1g:	1.060 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.736 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.587 W/kg
Type of Modulation:	GMSK	SAR End:	0.568 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-2.45 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

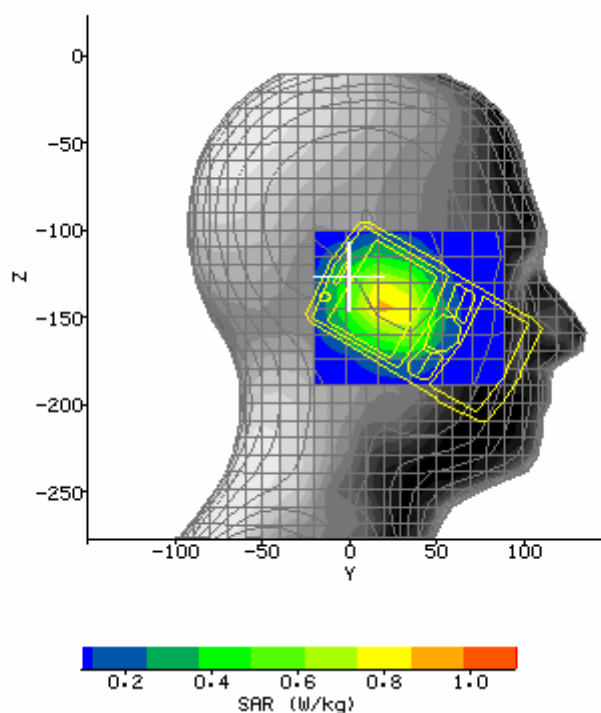


SAR Test GSM 850 RH_TouchCheek (Bottom Channel with Bluetooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 15:40:25	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_RH_TOUC HCHEEK_B_GPRS.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_381SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	18.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-147.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	34.87 V/m
Test Frequency:	850MHz	SAR 1g:	1.058 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.736 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.587 W/kg
Type of Modulation:	GMSK	SAR End:	0.568 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-2.45 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

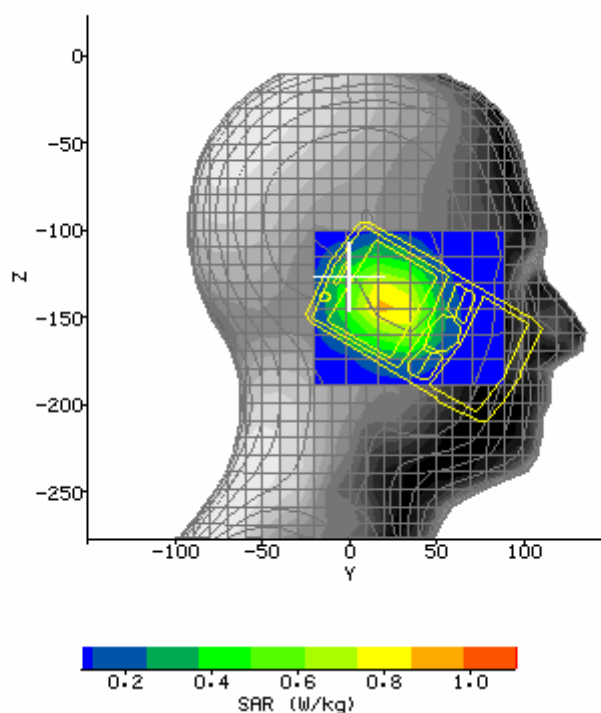


SAR Test GSM 850 Side (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-28 11:13:58	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_BODY_B.t xt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.95 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.69 V/m
Test Frequency:	850MHz	SAR 1g:	0.318 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.251 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.147 W/kg
Type of Modulation:	GMSK	SAR End:	0.143 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-2.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

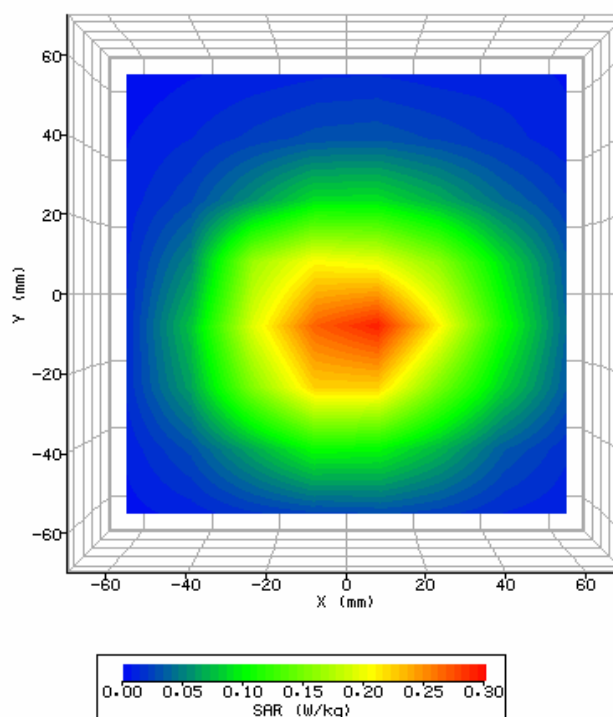


SAR Test GSM 850 Side (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 11:24:04	DUT Battery Model/No:	
Filename:	HG-PERAI-H_GSM850_BODY_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-10.29 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	18.65 V/m
Test Frequency:	850MHz	SAR 1g:	0.358 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.275 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.161 W/kg
Type of Modulation:	GMSK	SAR End:	0.159 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-0.96 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

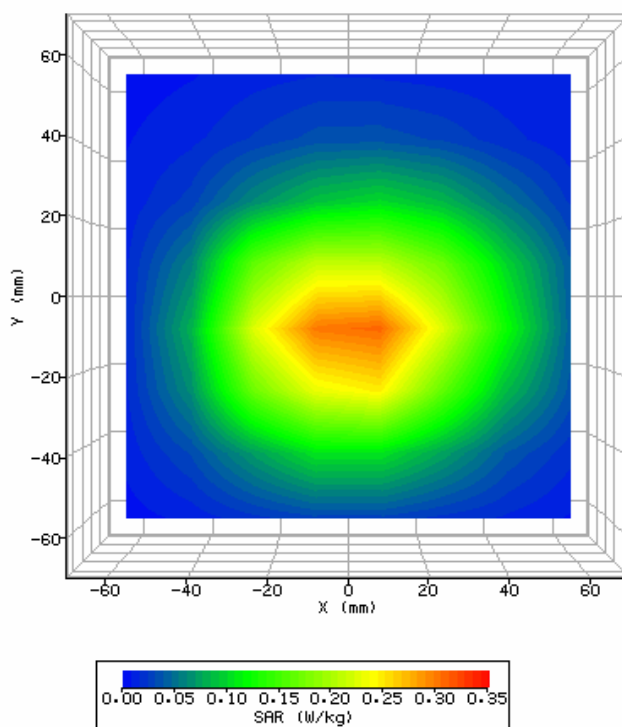


SAR Test GSM 850 Side (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-28 14:02:43	DUT Battery Model/No:	
Filename:	HG-PERAI- H_GSM850_BODY_T.t xt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.67 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	20.23 V/m
Test Frequency:	850MHz	SAR 1g:	0.424 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.331 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.187 W/kg
Type of Modulation:	GMSK	SAR End:	0.182 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-2.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

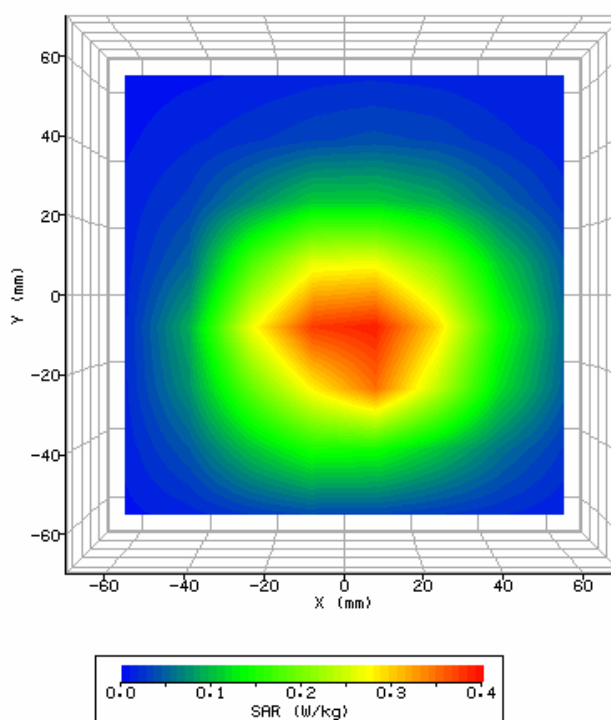


SAR Test GSM 850 Side (Top Channel, with Bluetooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-28 14:13:07	DUT Battery Model/No:	
Filename:	HG-PERAI-H_GSM850_BODY_T_BT.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-8.57 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.73 V/m
Test Frequency:	850MHz	SAR 1g:	0.337 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.253 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.136 W/kg
Type of Modulation:	GMSK	SAR End:	0.136 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-0.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

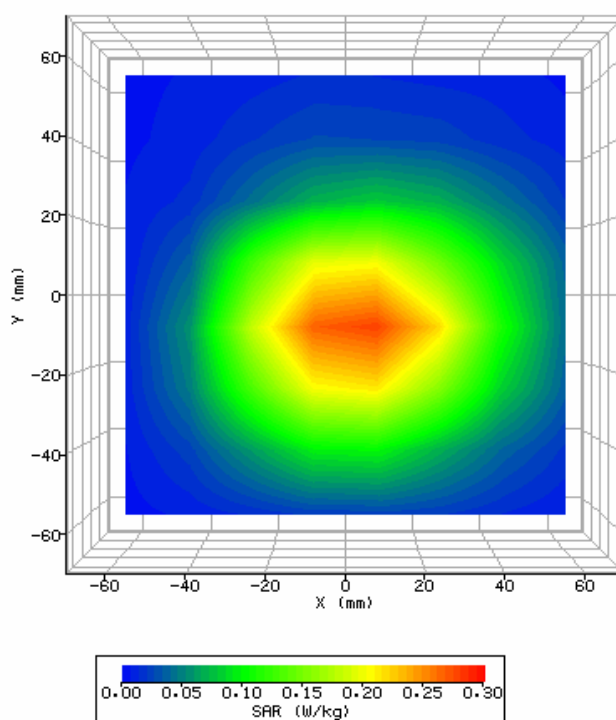


SAR Test GSM 850 Side (Top Channel, with GPRS)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-28 14:13:07	DUT Battery Model/No:	
Filename:	HG-PERAI-H_GSM850_BODY_T_GPRS.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-8.56 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.10 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.73 V/m
Test Frequency:	850MHz	SAR 1g:	0.340 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.254 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.136 W/kg
Type of Modulation:	GMSK	SAR End:	0.136 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-0.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

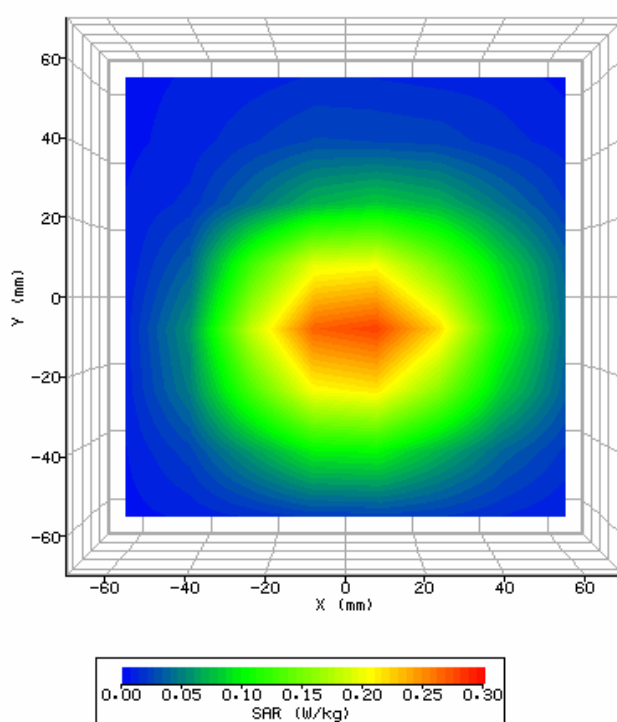


SAR Test GSM 850 Side (Top Channel, face to bottom)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 14:23:09	DUT Battery Model/No:	
Filename:	HG-PERAI-H_GSM850_BODY_T_FACETOBOTTOM.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-8.57 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	16.52 V/m
Test Frequency:	850MHz	SAR 1g:	0.272 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.211 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.125 W/kg
Type of Modulation:	GMSK	SAR End:	0.121 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-3.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

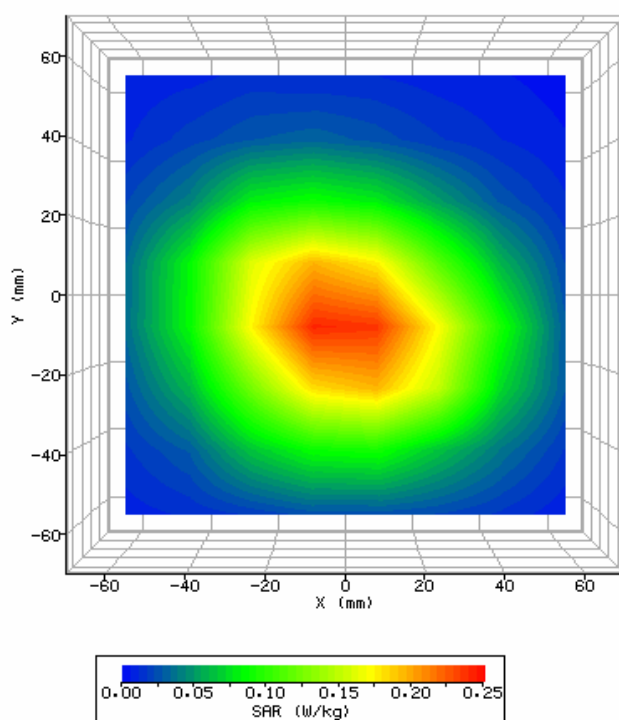


SAR Test PCS 1900 LH_Touchcheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:04:31	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TOU CHCHEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-18.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	33.77 V/m
Test Frequency:	1900MHz	SAR 1g:	1.207 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.833 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.736 W/kg
Type of Modulation:	GMSK	SAR End:	0.767 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.18 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

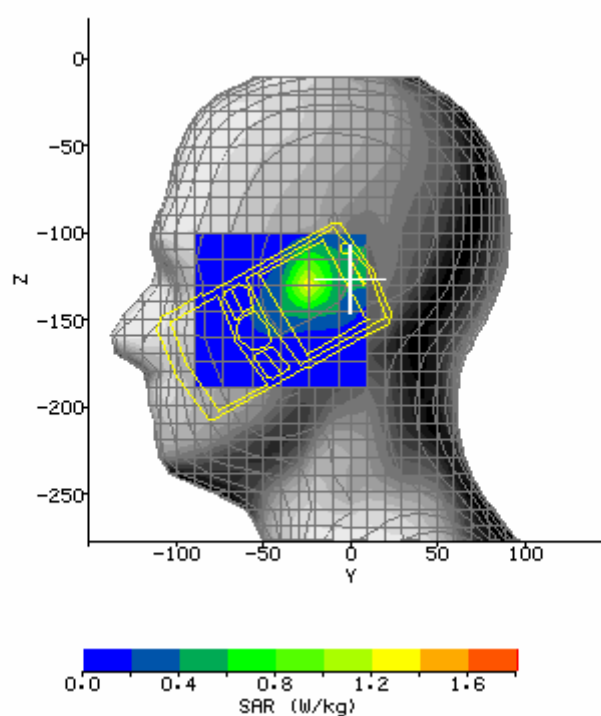


SAR Test PCS 1900 LH_Touchcheek (Bottom Channel with BuleTooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:14:25	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TOU CHCHEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-18.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	33.77 V/m
Test Frequency:	1900MHz	SAR 1g:	1.212 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.833 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.736 W/kg
Type of Modulation:	GMSK	SAR End:	0.767 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.18 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

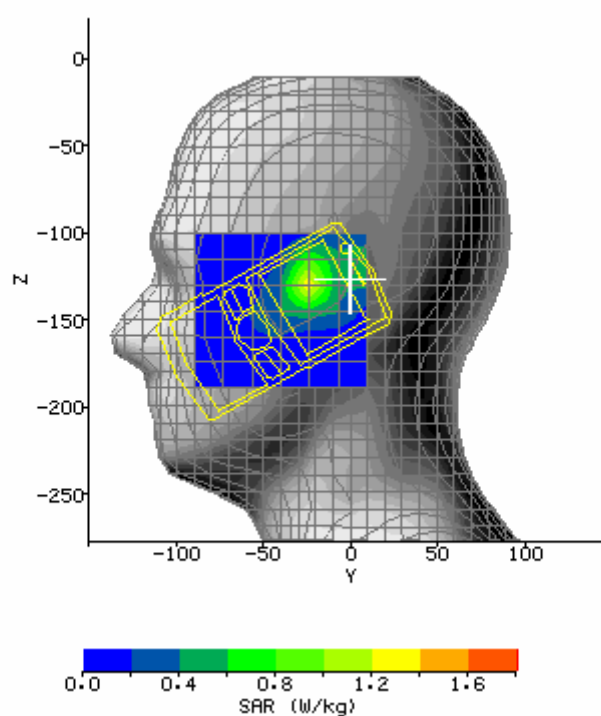


SAR Test PCS 1900 LH_Touchcheek (Bottom Channel with GPRS)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:04:31	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TOU CHCHEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-18.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	33.77 V/m
Test Frequency:	1900MHz	SAR 1g:	1.201 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.833 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.736 W/kg
Type of Modulation:	GMSK	SAR End:	0.767 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.18 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

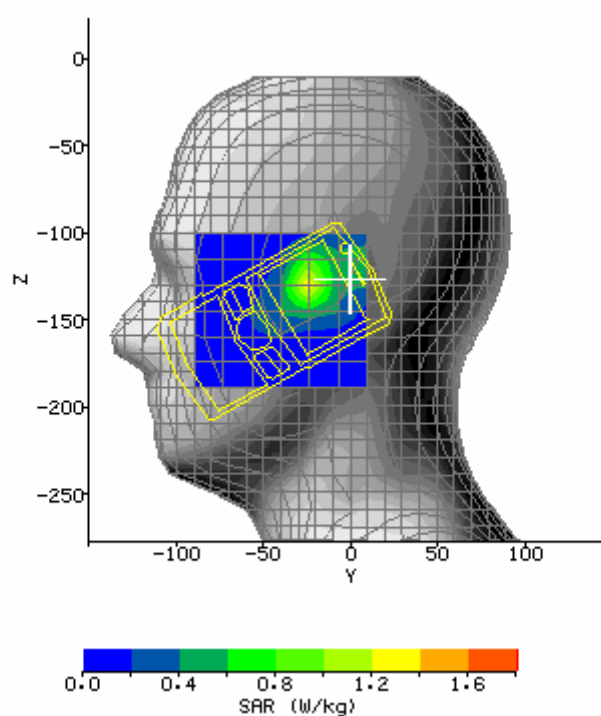


SAR Test PCS 1900 LH_Touchcheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 9:52:42	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TOU CHCHEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-23.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	28.50 V/m
Test Frequency:	1900MHz	SAR 1g:	0.974 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.550 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.466 W/kg
Type of Modulation:	GMSK	SAR End:	0.489 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.84 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

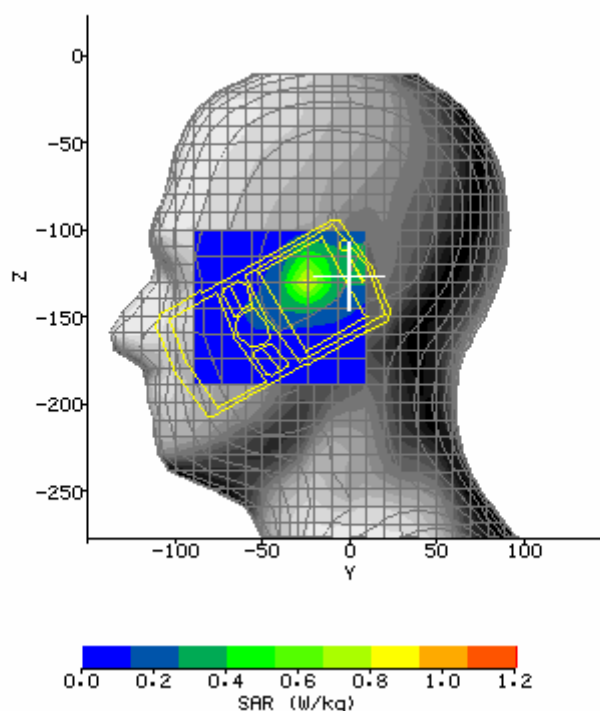


SAR Test PCS 1900 LH_Touchcheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:17:36	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TOU CHCHEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-18.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	23.80 V/m
Test Frequency:	1900MHz	SAR 1g:	0.727 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.416 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.355 W/kg
Type of Modulation:	GMSK	SAR End:	0.374 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.32 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

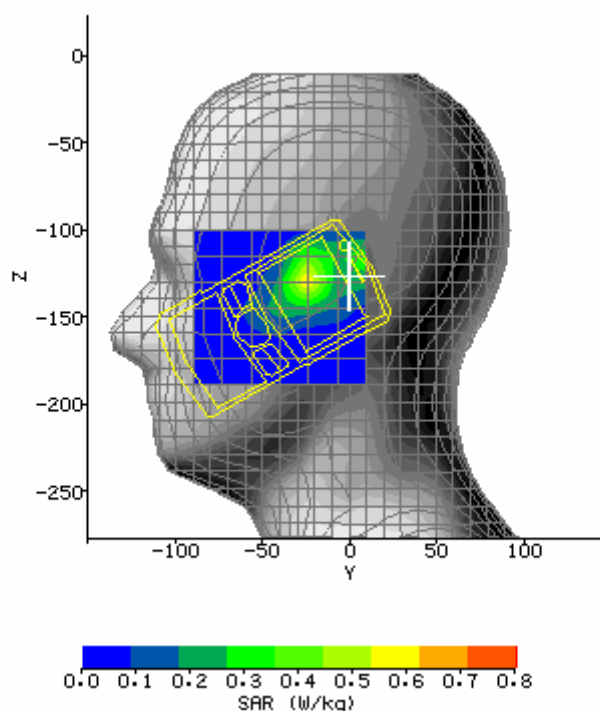


SAR Test PCS 1900 LH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:51:57	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TILT 15_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-127.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	31.29 V/m
Test Frequency:	1900MHz	SAR 1g:	1.149 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.631 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.438 W/kg
Type of Modulation:	GMSK	SAR End:	0.456 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.06 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

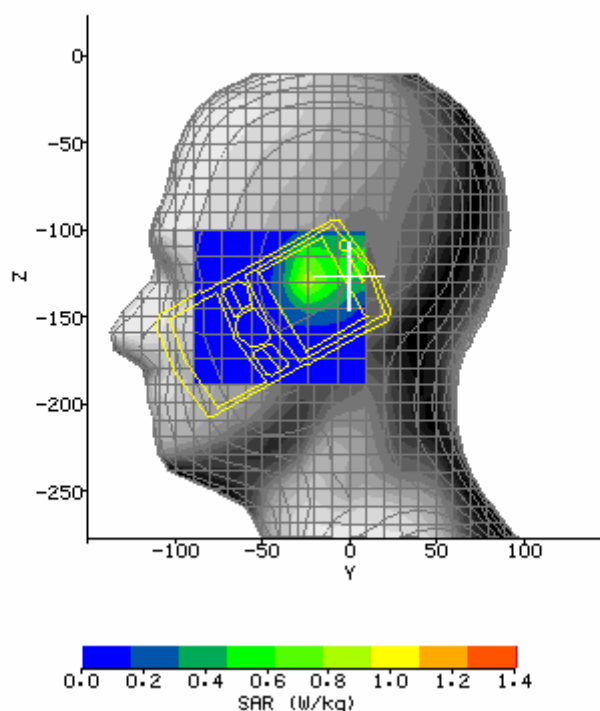


SAR Test PCS 1900 LH_Tilt15 (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:40:23	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TILT 15_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-121.67 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	24.13 V/m
Test Frequency:	1900MHz	SAR 1g:	0.722 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.411 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.288 W/kg
Type of Modulation:	GMSK	SAR End:	0.305 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

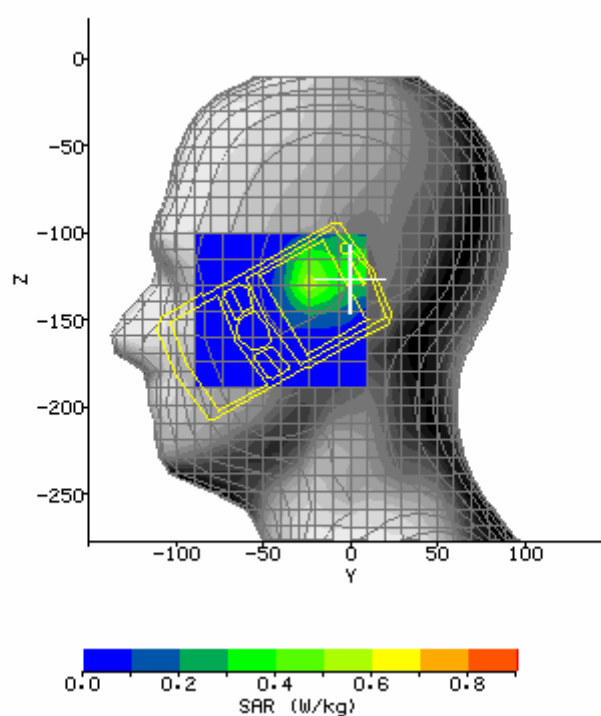


SAR Test PCS 1900 LH_Tilt15 (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 10:29:08	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TILT 15_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-20.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-125.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	21.57 V/m
Test Frequency:	1900MHz	SAR 1g:	0.567 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.318 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.225 W/kg
Type of Modulation:	GMSK	SAR End:	0.231 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	2.35 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

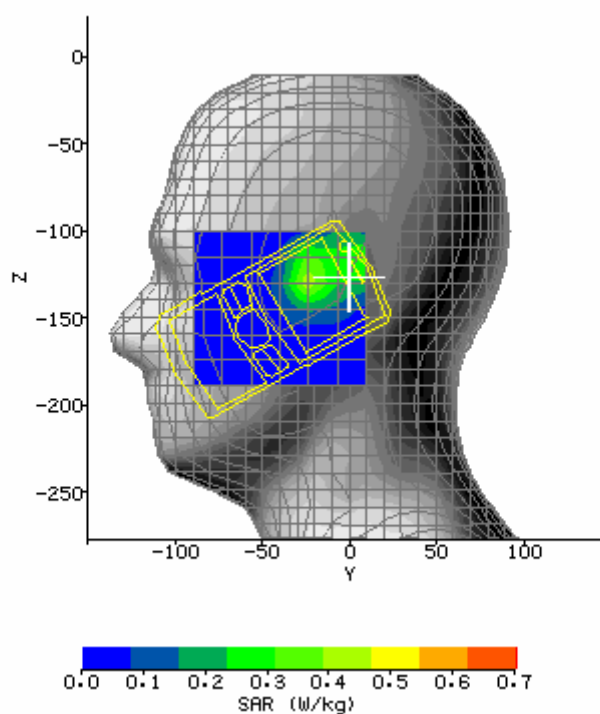


SAR Test PCS 1900 RH_Touchcheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-29 13:56:12	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_RH_TOU CHCHEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-137.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	28.83 V/m
Test Frequency:	1900MHz	SAR 1g:	1.015 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.588 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.454 W/kg
Type of Modulation:	GMSK	SAR End:	0.454 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	0.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

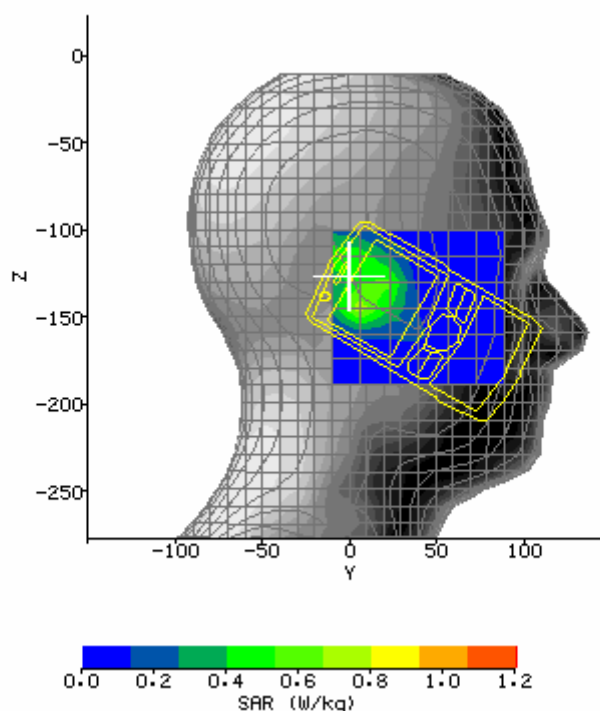


SAR Test PCS 1900 RH_Touchcheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 14:14:10	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_RH_TOU CHCHEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-137.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	22.18 V/m
Test Frequency:	1900MHz	SAR 1g:	0.591 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.353 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.272 W/kg
Type of Modulation:	GMSK	SAR End:	0.280 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

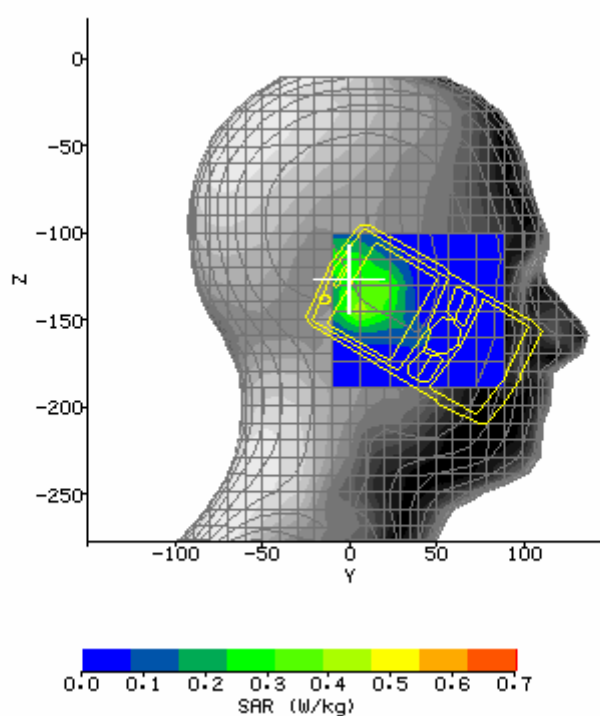


SAR Test PCS 1900 RH_Touchcheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 14:26:05	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_RH_TOU CHCHEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-137.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	18.71 V/m
Test Frequency:	1900MHz	SAR 1g:	0.436 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.263 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.199 W/kg
Type of Modulation:	GMSK	SAR End:	0.2101 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

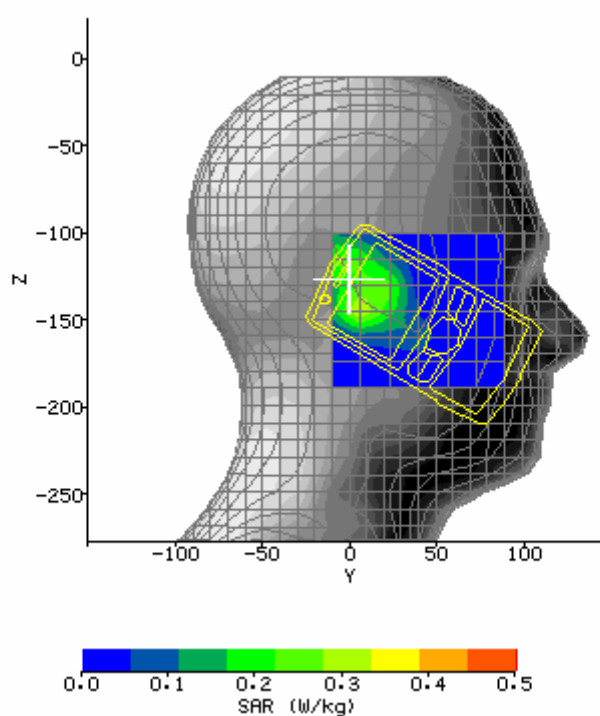


SAR Test PCS 1900 RH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 15:03:29	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_RH_TILT 15_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	13.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-136.83 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	27.32 V/m
Test Frequency:	1900MHz	SAR 1g:	0.874 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.498 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.315 W/kg
Type of Modulation:	GMSK	SAR End:	0.312 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-1.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

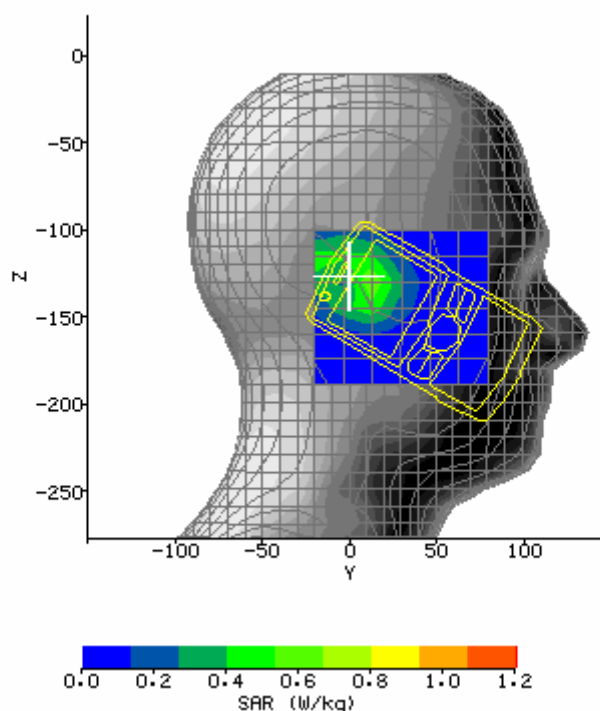


SAR Test PCS 1900 RH_Tilt15 (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-29 14:51:55	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_RH_TILT 15_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	13.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-136.83 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	22.25 V/m
Test Frequency:	1900MHz	SAR 1g:	0.561 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.318 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.201 W/kg
Type of Modulation:	GMSK	SAR End:	0.203 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	0.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

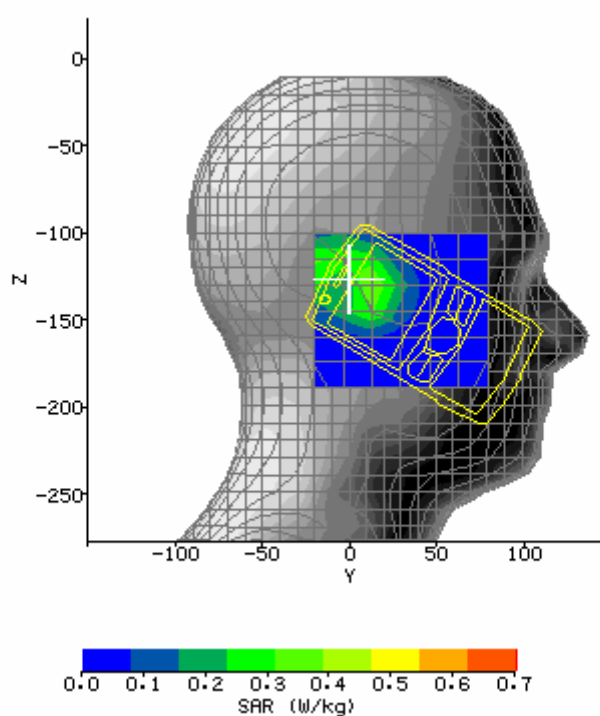


SAR Test PCS 1900 RH_Tilt15 (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 14:41:02	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_RH_TILT 15_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-138.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	18.32 V/m
Test Frequency:	1900MHz	SAR 1g:	0.418 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.236 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.144 W/kg
Type of Modulation:	GMSK	SAR End:	0.149 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	3.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

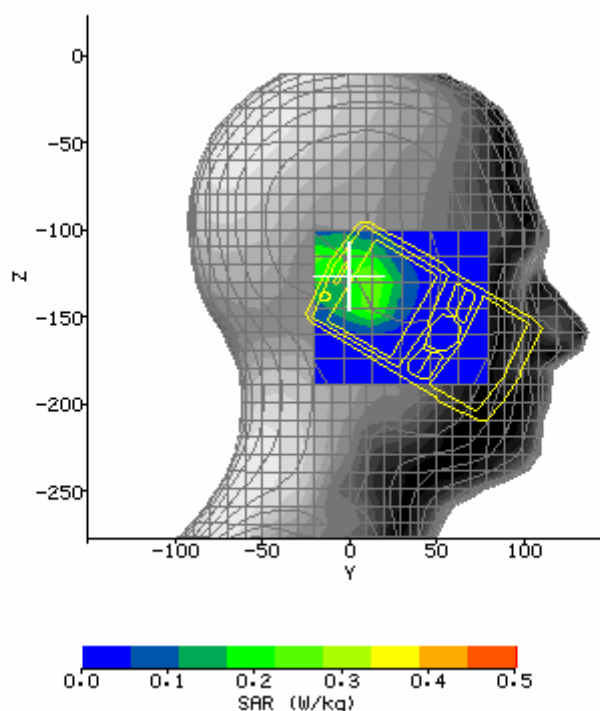


SAR Test PCS 1900 LH_Touchcheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:04:31	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_LH_TOU CHCHEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.411
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-18.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	33.77 V/m
Test Frequency:	1900MHz	SAR 1g:	1.212 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.840 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.740W/kg
Type of Modulation:	GMSK	SAR End:	0.768 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	4.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

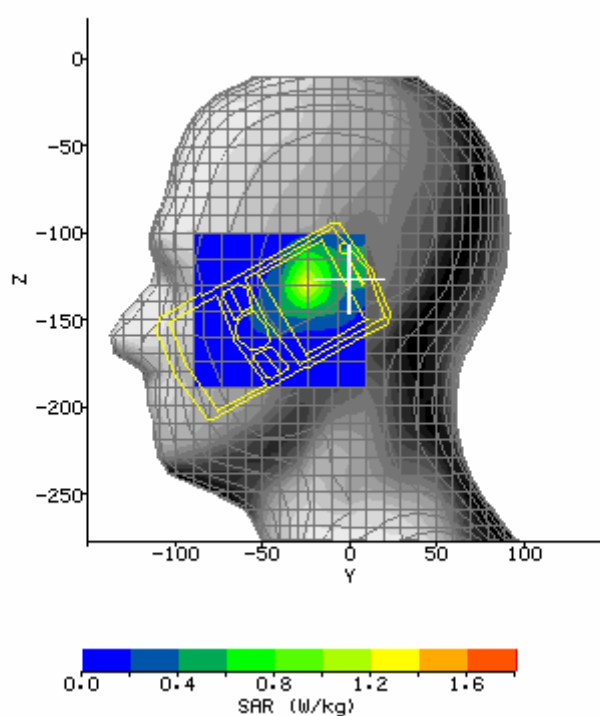


SAR Test PCS 1900 Side (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 9:59:40	DUT Battery Model/No:	
Filename:	PERAI-H_GSM1900_BODY_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	1.71 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	11.45 V/m
Test Frequency:	1900MHz	SAR 1g:	0.243 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.140 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.024 W/kg
Type of Modulation:	GMSK	SAR End:	0.024 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

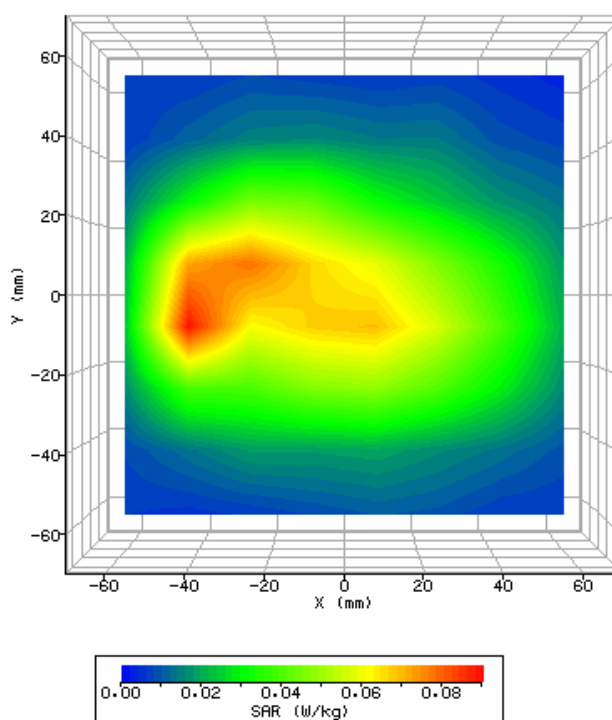


SAR Test PCS 1900 Side (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-29 10:16:03	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_BODY_M .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.43 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	9.76 V/m
Test Frequency:	1900MHz	SAR 1g:	0.163 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.092 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.029 W/kg
Type of Modulation:	GMSK	SAR End:	0.030 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	0.63 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

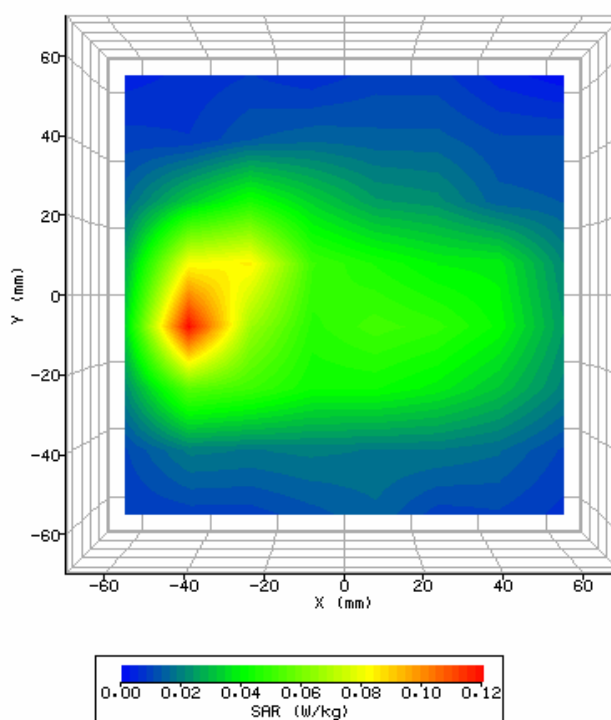


SAR Test PCS 1900 Side (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 10:25:43	DUT Battery Model/No:	
Filename:	PERAI- H_GSM1900_BODY_T. txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.43 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.71 V/m
Test Frequency:	1900MHz	SAR 1g:	0.110 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.062 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.018 W/kg
Type of Modulation:	GMSK	SAR End:	0.019 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	3.33 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

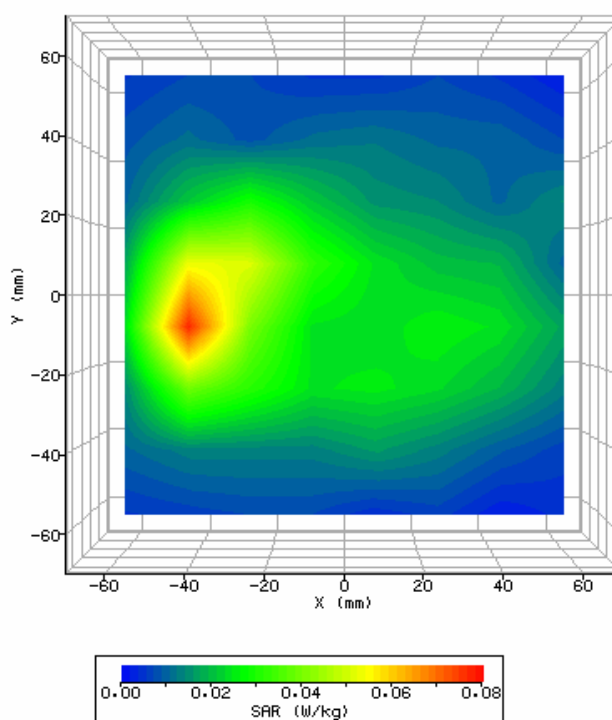


SAR Test PCS 1900 Side (Bottom Channel, With BlueTooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 9:59:40	DUT Battery Model/No:	
Filename:	PERAI-H_GSM1900_BODY_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	1.71 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	11.45 V/m
Test Frequency:	1900MHz	SAR 1g:	0.248 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.142 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.026 W/kg
Type of Modulation:	GMSK	SAR End:	0.025 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

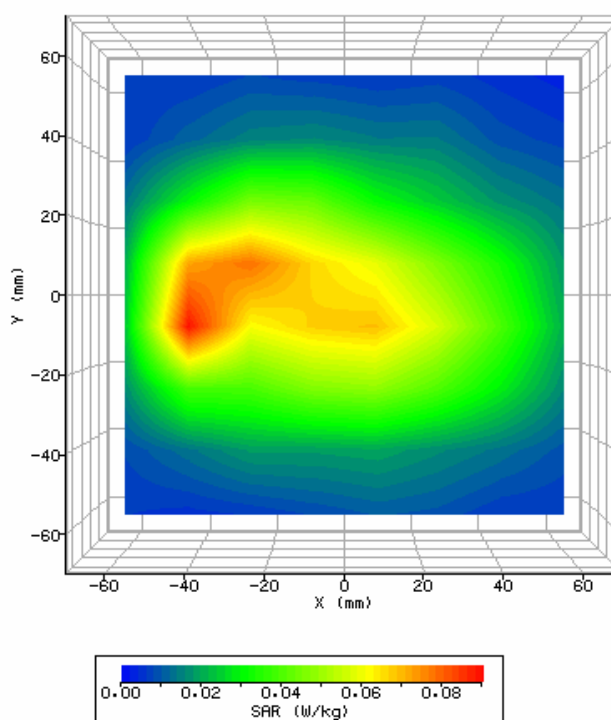


SAR Test PCS 1900 Side (Bottom Channel, With GPRS)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 10:10:14	DUT Battery Model/No:	
Filename:	PERAI-H_GSM1900_BODY_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	1.70 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	11.45 V/m
Test Frequency:	1900MHz	SAR 1g:	0.250 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.142 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.026 W/kg
Type of Modulation:	GMSK	SAR End:	0.025 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

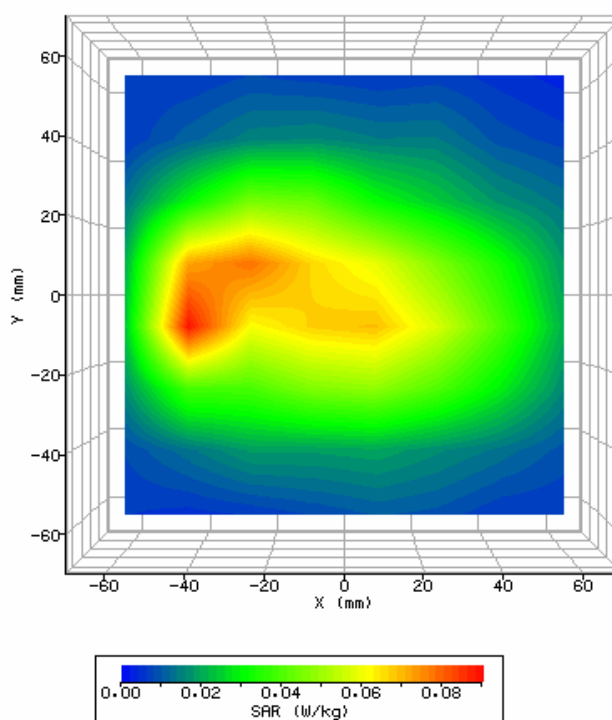


SAR Test PCS 1900 Side (Bottom Channel, face to Bottom)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-29 10:58:35	DUT Battery Model/No:	
Filename:	PERAI-H_GSM1900_BODY_B_FACETOBOTTOM.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.62 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.74 V/m
Test Frequency:	1900MHz	SAR 1g:	0.114 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.072 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.019 W/kg
Type of Modulation:	GMSK	SAR End:	0.019 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	0.73 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

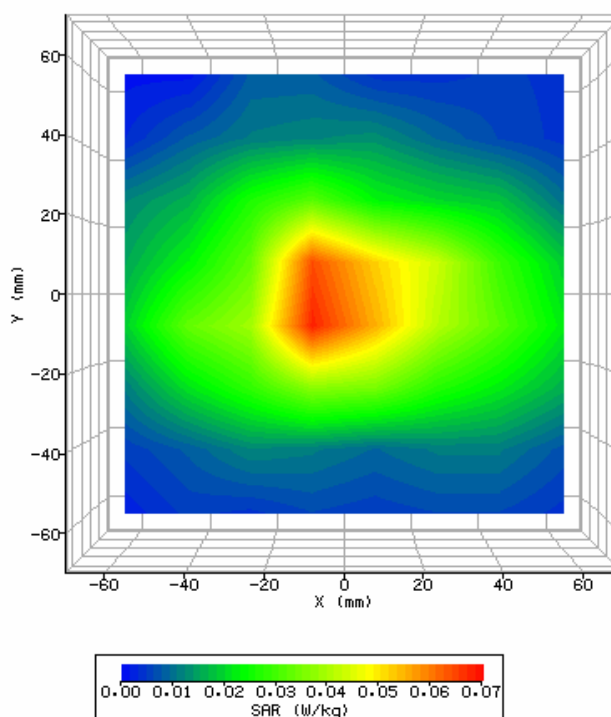


SAR Test WCDMA 850 LH_TouchCheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 10:26:29	DUT Battery Model/No:	
Filename:	PERAI-H_850_LH_TOUCHCH EEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-57.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-159.17 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	23.26 V/m
Test Frequency:	850MHz	SAR 1g:	0.453 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.363 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.360 W/kg
Type of Modulation:	WCDMA	SAR End:	0.366 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

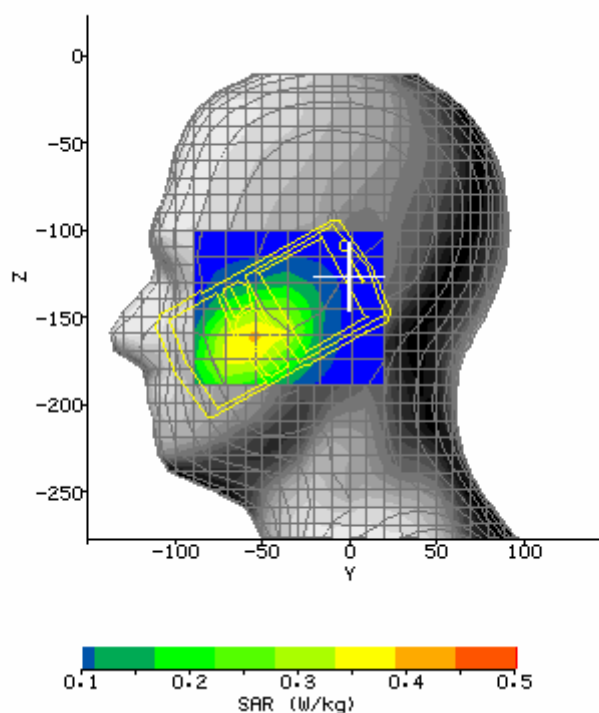


SAR Test WCDMA 850 LH_TouchCheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 10:37:05	DUT Battery Model/No:	
Filename:	PERAI-H_850_LH_TOUCHCH EEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-60.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-164.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	25.71 V/m
Test Frequency:	850MHz	SAR 1g:	0.525 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.415 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.414 W/kg
Type of Modulation:	WCDMA	SAR End:	0.419 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.28 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

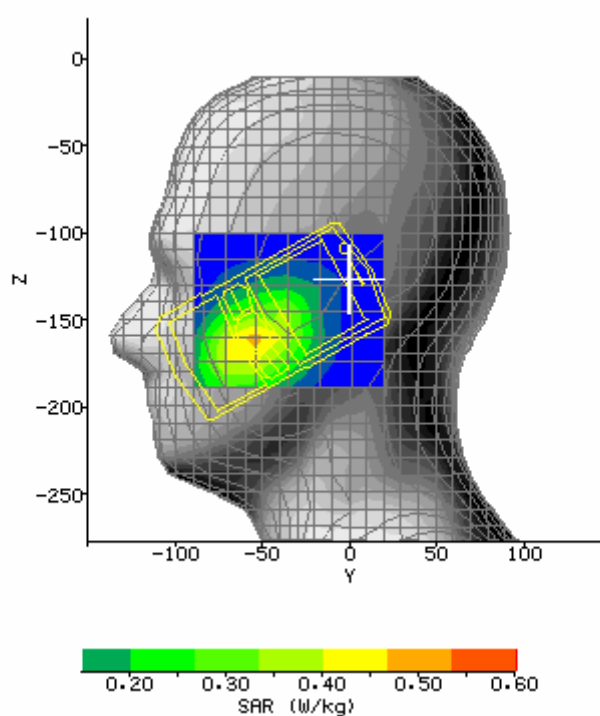


SAR Test WCDMA 850 LH_TouchCheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 10:47:43	DUT Battery Model/No:	
Filename:	PERAI-H_850_LH_TOUCHCH EEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-58.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-168.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	25.79 V/m
Test Frequency:	850MHz	SAR 1g:	0.556 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.445 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.439 W/kg
Type of Modulation:	WCDMA	SAR End:	0.452 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	2.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

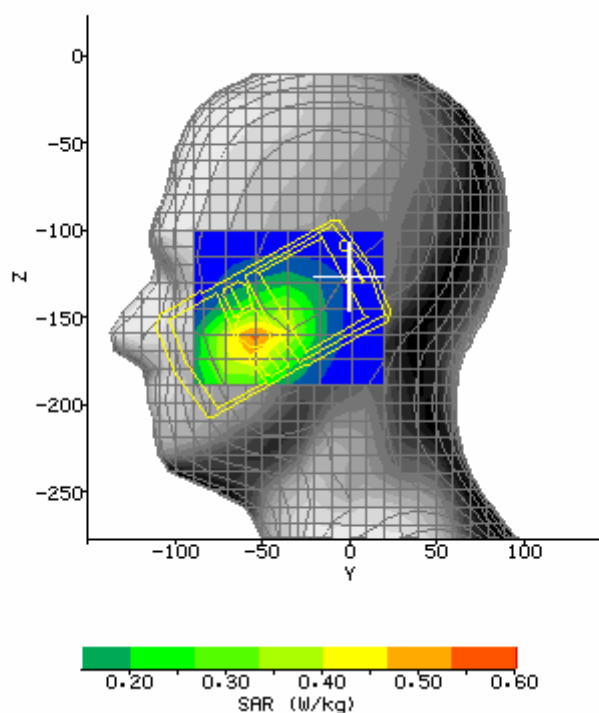


SAR Test WCDMA 850 LH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 11:27:02	DUT Battery Model/No:	
Filename:	PERAI-H_850_LH_TILT15_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-36.83 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-151.83 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.44 V/m
Test Frequency:	850MHz	SAR 1g:	0.254 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.222 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.244 W/kg
Type of Modulation:	WCDMA	SAR End:	0.240 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.66 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

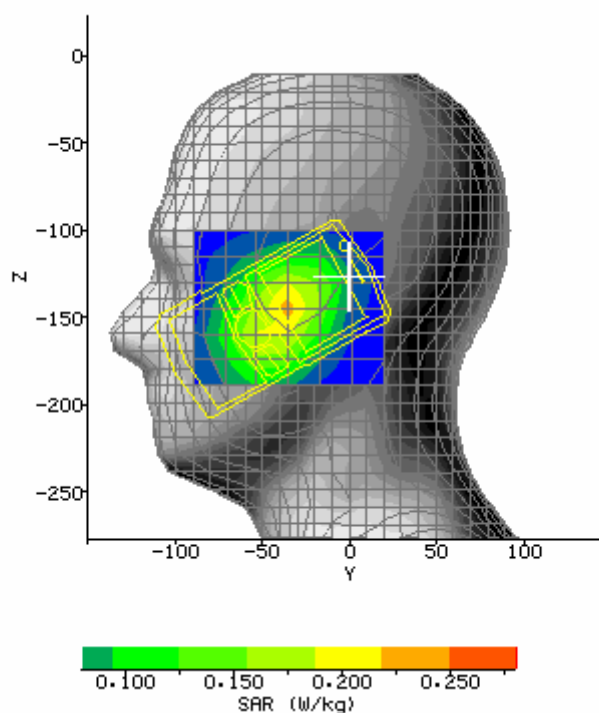


SAR Test WCDMA 850 LH_Tilt15 (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 11:15:46	DUT Battery Model/No:	
Filename:	PERAI-H_850_LH_TILT15_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-33.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-149.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.30 V/m
Test Frequency:	850MHz	SAR 1g:	0.252 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.220 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.225 W/kg
Type of Modulation:	WCDMA	SAR End:	0.223 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

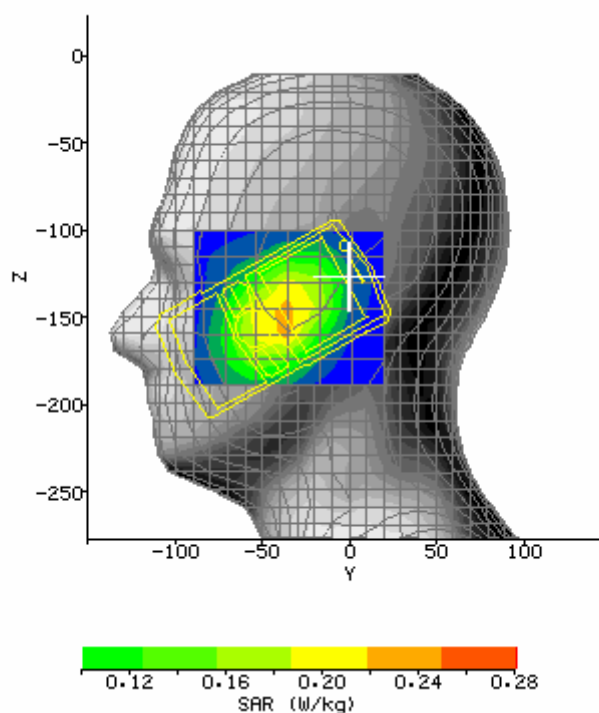


SAR Test WCDMA 850 LH_Tilt15 (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 10:59:25	DUT Battery Model/No:	
Filename:	PERAI-H_850_LH_TILT15_T.tx t	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-31.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-142.67 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	18.79 V/m
Test Frequency:	850MHz	SAR 1g:	0.299 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.243 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.234 W/kg
Type of Modulation:	GMSK	SAR End:	0.232 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-0.99 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

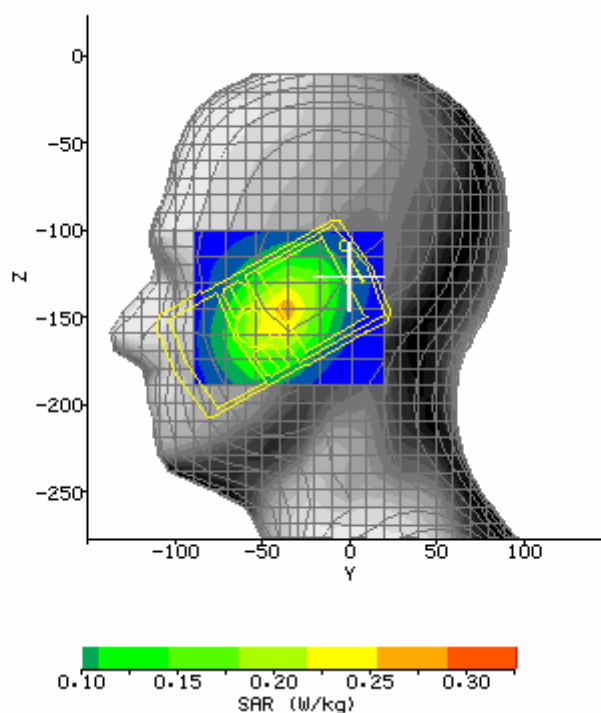


SAR Test WCDMA 850 RH_TouchCheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-28 9:07:11	DUT Battery Model/No:	
Filename:	PERAI-H_850_RH_TOUCHCH EEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	62.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-165.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	23.33 V/m
Test Frequency:	850MHz	SAR 1g:	0.452 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.367 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.389 W/kg
Type of Modulation:	WCDMA	SAR End:	0.376 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-3.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

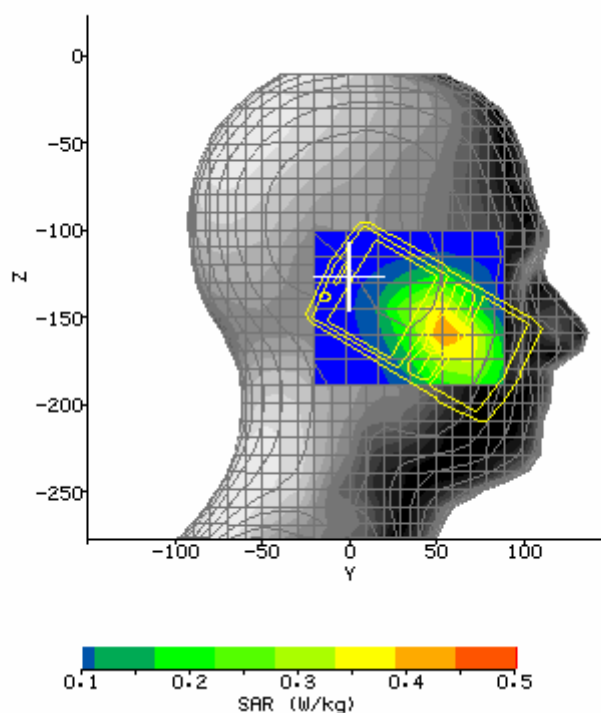


SAR Test WCDMA 850 RH_TouchCheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 9:18:37	DUT Battery Model/No:	
Filename:	PERAI-H_850_RH_TOUCHCH EEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	58.83 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-161.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	24.24 V/m
Test Frequency:	850MHz	SAR 1g:	0.482 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.393 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.426 W/kg
Type of Modulation:	WCDMA	SAR End:	0.430 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

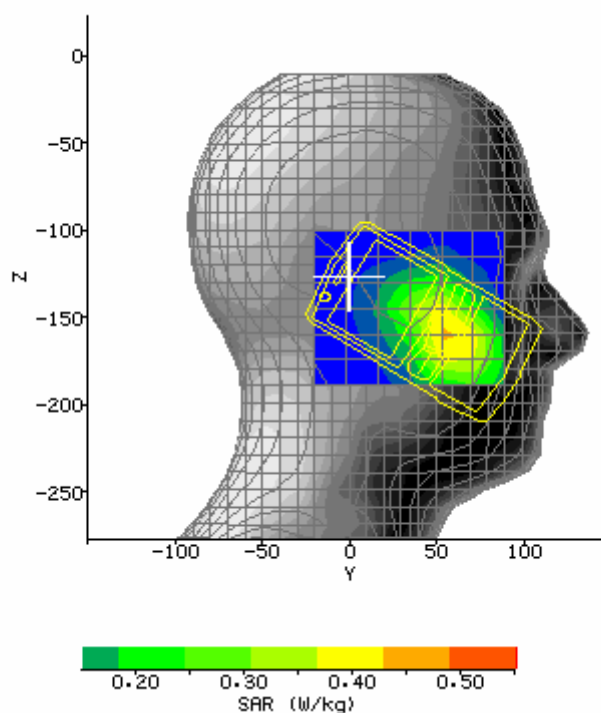


SAR Test WCDMA 850 RH_TouchCheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-28 9:29:04	DUT Battery Model/No:	
Filename:	PERAI-H_850_RH_TOUCHCHEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	57.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-165.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	27.42 V/m
Test Frequency:	850MHz	SAR 1g:	0.604 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.501 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.574 W/kg
Type of Modulation:	WCDMA	SAR End:	0.570 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-2.54 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

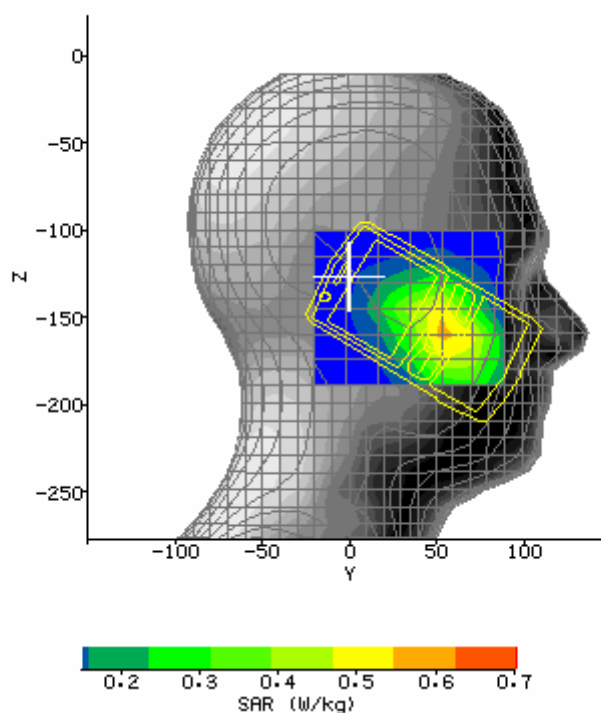


SAR Test WCDMA 850 RH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 10:08:19	DUT Battery Model/No:	
Filename:	PERAI-H_850_RH_TILT15_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	33.17 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-144.17 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	19.29 V/m
Test Frequency:	850MHz	SAR 1g:	0.314 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.277 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.307 W/kg
Type of Modulation:	WCDMA	SAR End:	0.304 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.88 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

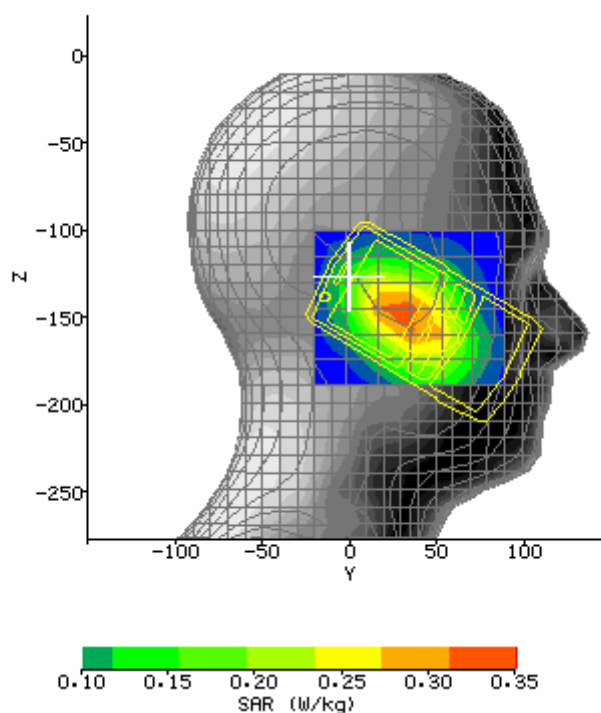


SAR Test WCDMA 850 RH_Tilt15 (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 9:57:08	DUT Battery Model/No:	
Filename:	PERAI-H_850_RH_TILT15_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	33.17 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-148.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	21.82 V/m
Test Frequency:	850MHz	SAR 1g:	0.389 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.341 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.370 W/kg
Type of Modulation:	WCDMA	SAR End:	0.372 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	0.40 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

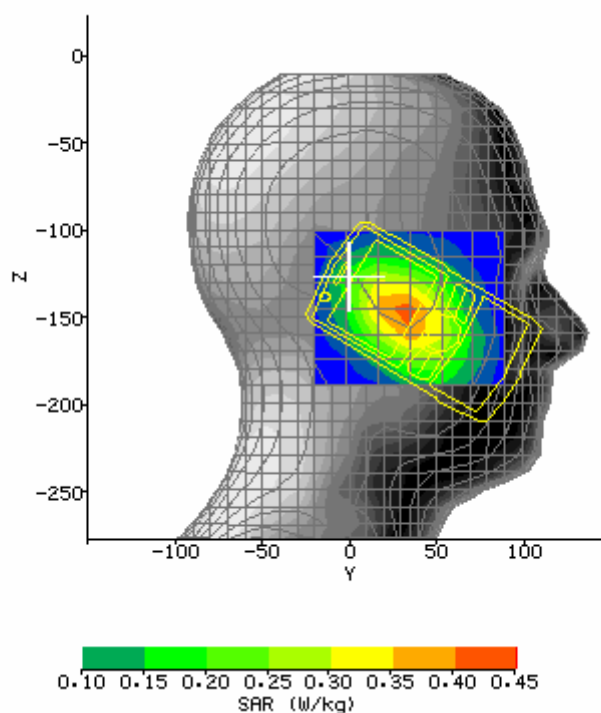


SAR Test WCDMA 850 RH_Tilt15 (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-28 9:45:48	DUT Battery Model/No:	
Filename:	PERAI-H_850_RH_TILT15_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	29.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-146.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	24.41 V/m
Test Frequency:	850MHz	SAR 1g:	0.497 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.420 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.439 W/kg
Type of Modulation:	WCDMA	SAR End:	0.438 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.09 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

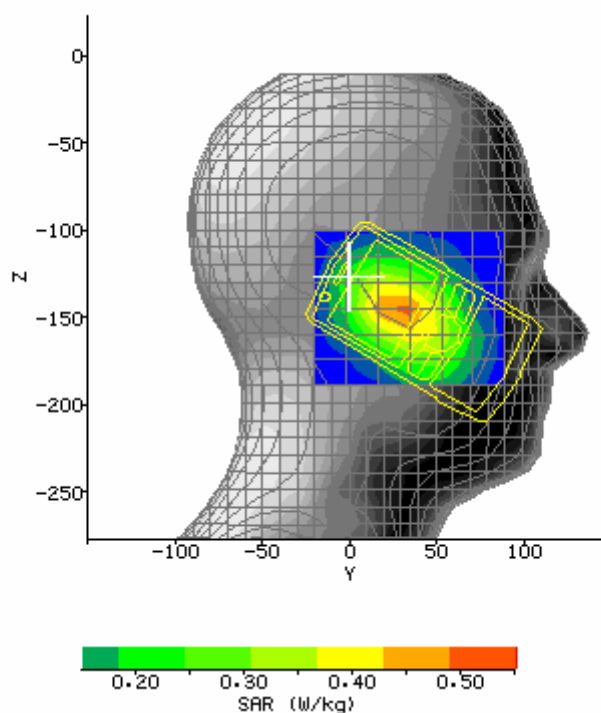


SAR Test WCDMA 850 RH_TouchCheek (Bottom Channel with Bluetooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-28 9:29:04	DUT Battery Model/No:	
Filename:	PERAI-H_850_RH_TOUCHCHEEK_T_BT.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	41.50
Relative Humidity:	53%	Conductivity:	.899
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	57.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-165.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	27.42 V/m
Test Frequency:	850MHz	SAR 1g:	0.612 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.510 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.578 W/kg
Type of Modulation:	WCDMA	SAR End:	0.576 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-2.46 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

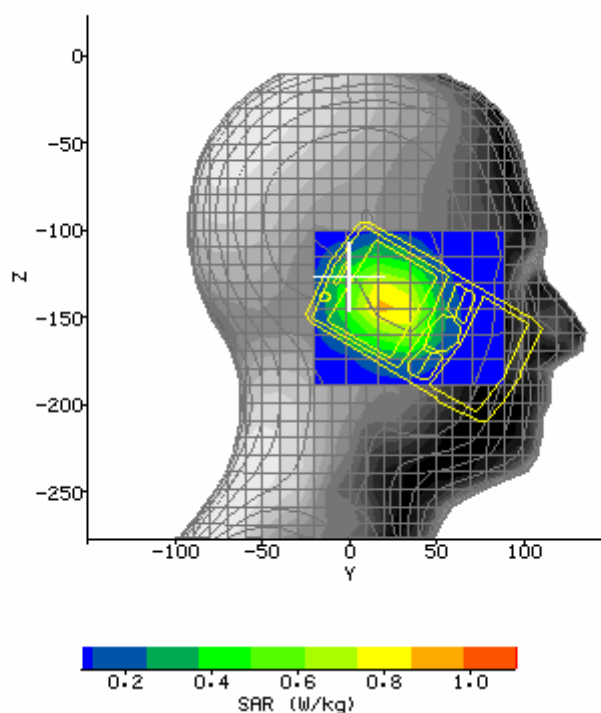


SAR Test WCDMA 850 Side (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 14:08:52	DUT Battery Model/No:	
Filename:	PERAI-H_850_BODY_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	15.62 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	13.35 V/m
Test Frequency:	850MHz	SAR 1g:	0.177 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.138 W/kg
Conversion Factors:	.271 / .271 / .271	SAR Start:	0.074 W/kg
Type of Modulation:	WCDMA	SAR End:	0.076 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	2.53 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

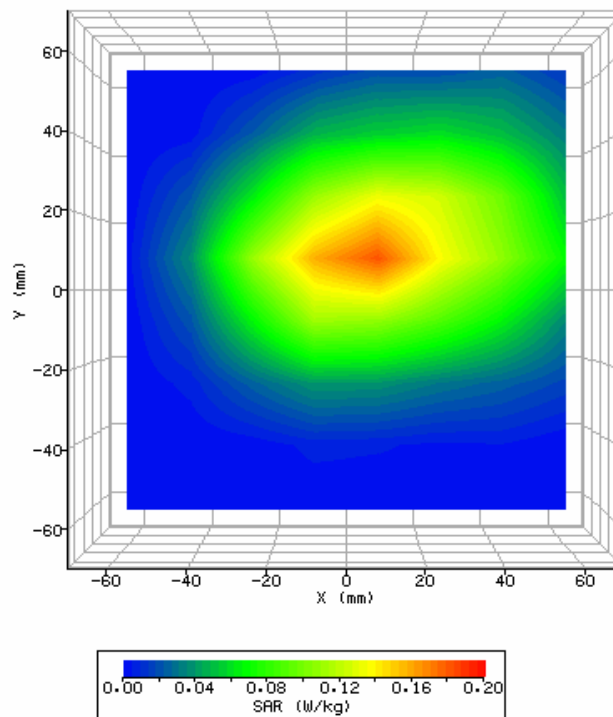


SAR Test WCDMA 850 Side (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 14:18:59	DUT Battery Model/No:	
Filename:	PERAI-H_850_BODY_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	13.90 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	13.46 V/m
Test Frequency:	850MHz	SAR 1g:	0.188 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.141 W/kg
Conversion Factors:	.271 / .271 / .271	SAR Start:	0.070 W/kg
Type of Modulation:	WCDMA	SAR End:	0.071 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

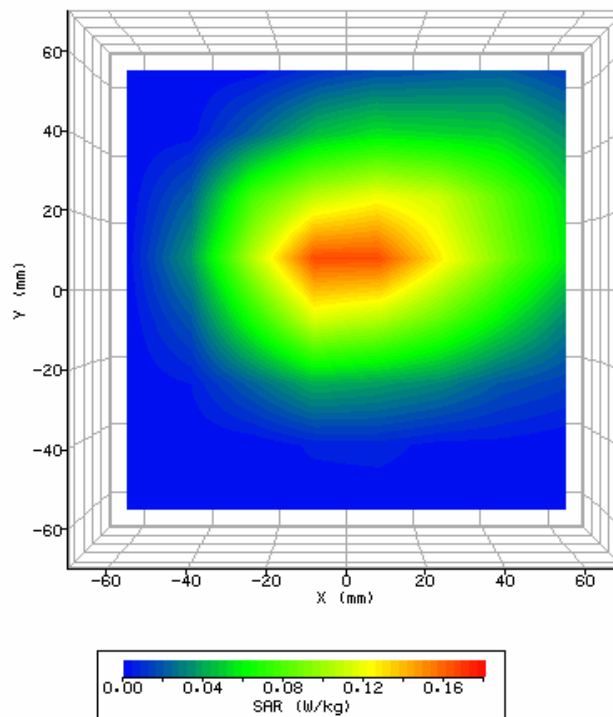


SAR Test WCDMA 850 Side (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 14:28:40	DUT Battery Model/No:	
Filename:	PERAI-H_850_BODY_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	10.29 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	14.57 V/m
Test Frequency:	850MHz	SAR 1g:	0.220 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.167 W/kg
Conversion Factors:	.271 / .271 / .271	SAR Start:	0.099 W/kg
Type of Modulation:	WCDMA	SAR End:	0.100 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

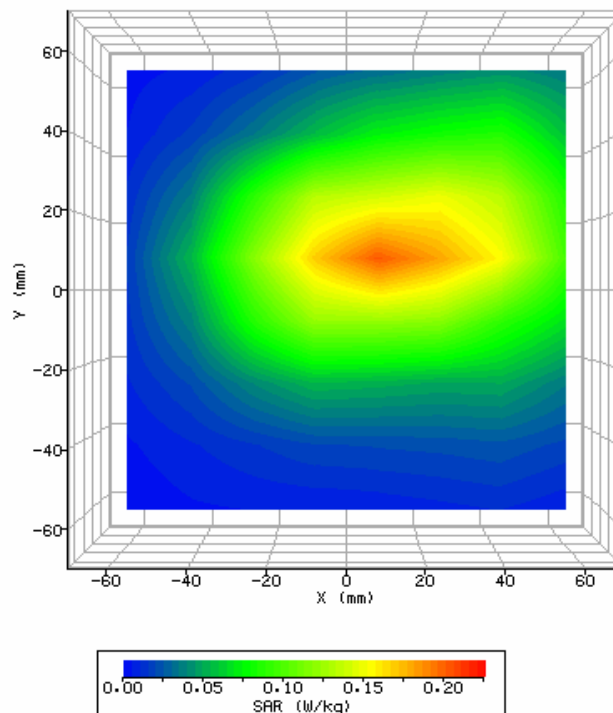


SAR Test WCDMA 850 Side (Top Channel, with Bluetooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 14:28:40	DUT Battery Model/No:	
Filename:	PERAI-H_850_BODY_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	10.29 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	14.57 V/m
Test Frequency:	850MHz	SAR 1g:	0.231W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.171 W/kg
Conversion Factors:	.271 / .271 / .271	SAR Start:	0.101 W/kg
Type of Modulation:	WCDMA	SAR End:	0.102 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.12 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

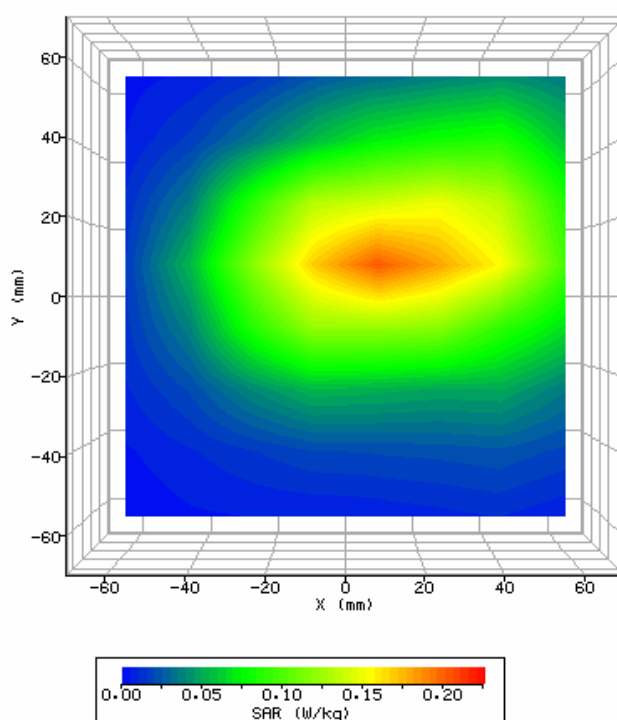


SAR Test WCDMA 850 Side (Top Channel, face to bottom)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 14:49:28	DUT Battery Model/No:	
Filename:	PERAI-H_850_BODY_T_FACE TOBOTTOM.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	55.18
Relative Humidity:	53%	Conductivity:	.971
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-0.19 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.60 V/m
Test Frequency:	850MHz	SAR 1g:	0.342 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.254 W/kg
Conversion Factors:	.271 / .271 / .271	SAR Start:	0.148 W/kg
Type of Modulation:	GMSK	SAR End:	0.145 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-4.15 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

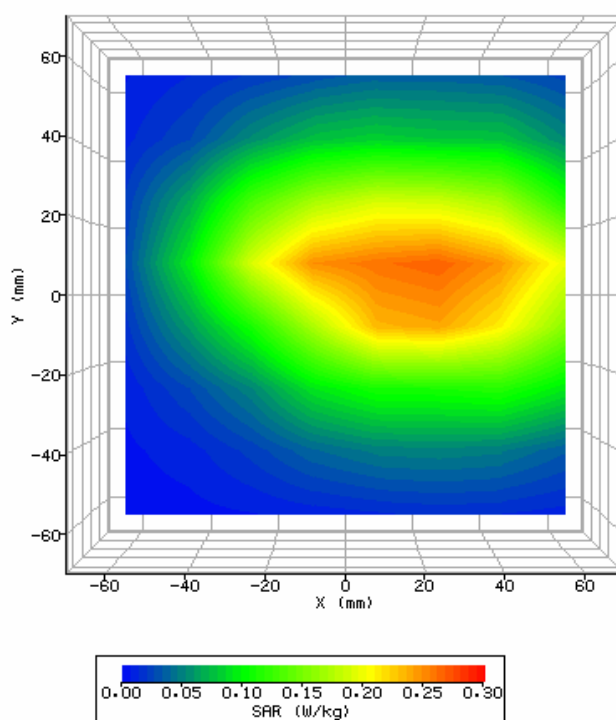


SAR Test WCDMA 1900 LH_Touchcheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 8:40:00	DUT Battery Model/No:	
Filename:	PERAI- H_1900_LH_TOUCHC HEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-66.17 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-183.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	23.21 V/m
Test Frequency:	1900MHz	SAR 1g:	0.746 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.434 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.267 W/kg
Type of Modulation:	WCDMA	SAR End:	0.279 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

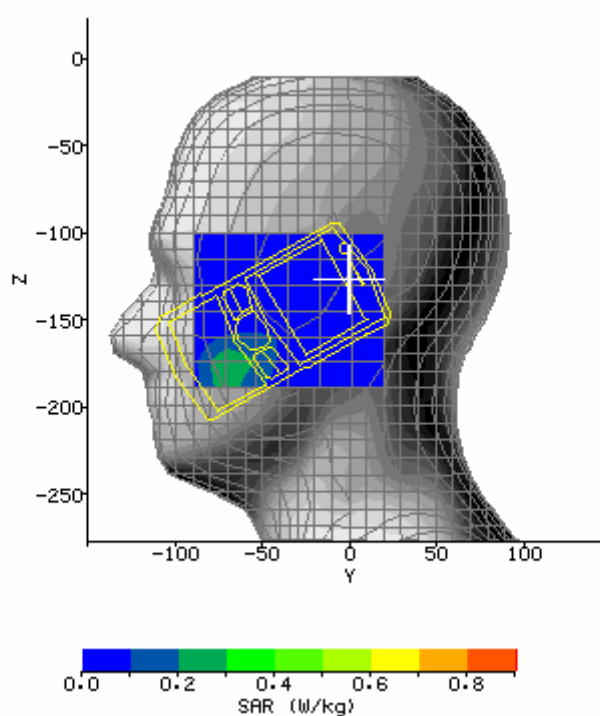


SAR Test WCDMA 1900 LH_Touchcheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 8:51:23	DUT Battery Model/No:	
Filename:	PERAI- H_1900_LH_TOUCHC HEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-71.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-179.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	22.30 V/m
Test Frequency:	1900MHz	SAR 1g:	0.649 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.390 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.258 W/kg
Type of Modulation:	WCDMA	SAR End:	0.260 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	0.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

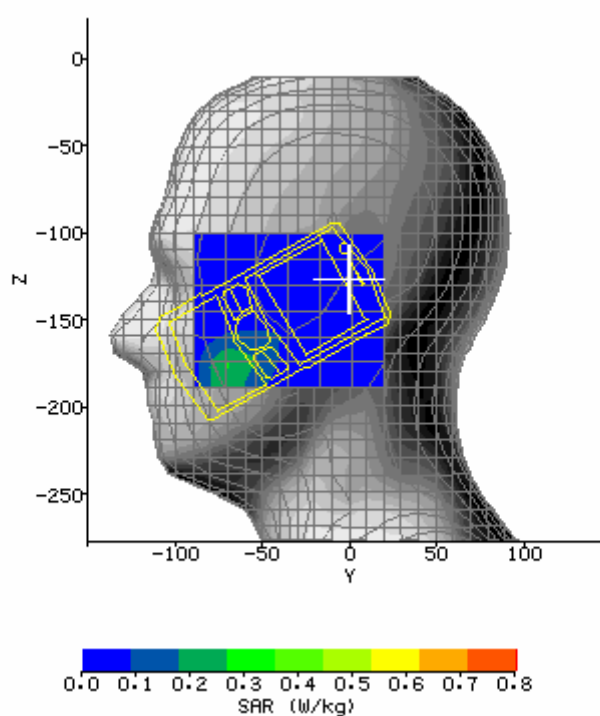


SAR Test WCDMA 1900 LH_Touchcheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-29 9:01:17	DUT Battery Model/No:	
Filename:	PERAI- H_1900_LH_TOUCHC HEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-69.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-178.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	21.94 V/m
Test Frequency:	1900MHz	SAR 1g:	0.658 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.391 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.254 W/kg
Type of Modulation:	GMSK	SAR End:	0.254 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	-0.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

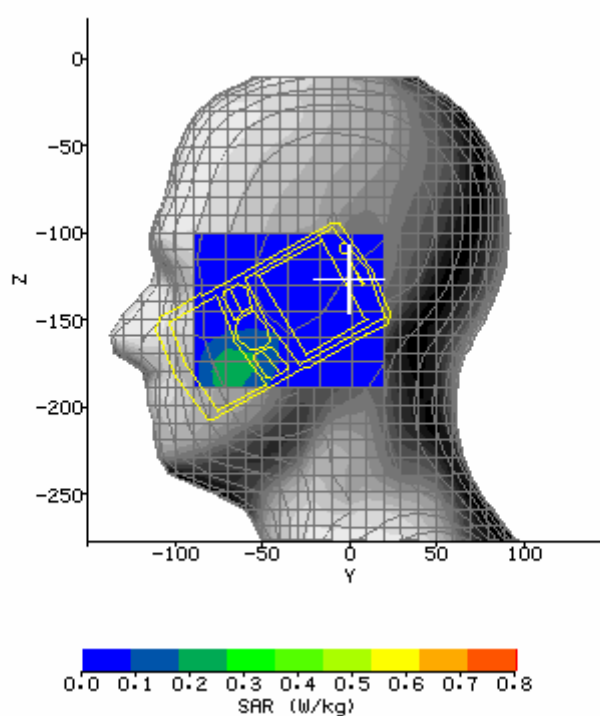


SAR Test WCDMA 1900 LH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 9:35:19	DUT Battery Model/No:	
Filename:	PERAI-H_1900_LH_TILT15_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-46.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-176.67 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.87 V/m
Test Frequency:	1900MHz	SAR 1g:	0.085 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.061 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.050 W/kg
Type of Modulation:	GMSK	SAR End:	0.051 W/kg
Modn. Duty Cycle:	8	SAR Drift during Scan:	1.22 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

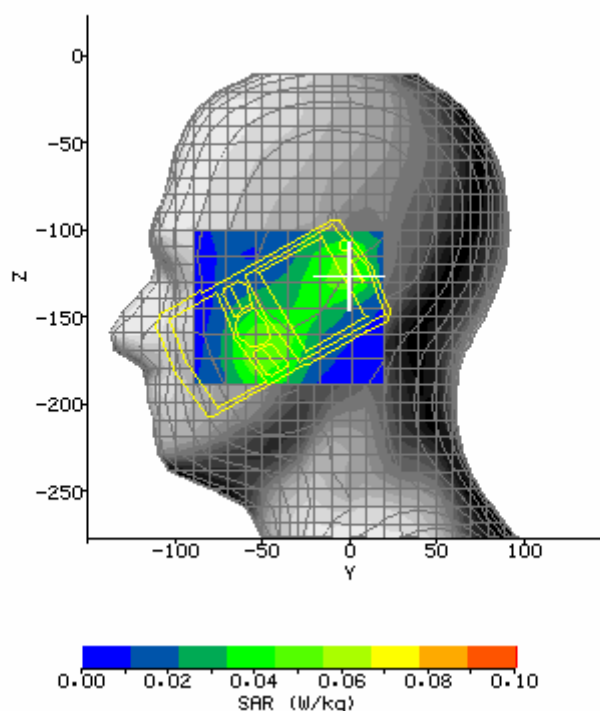


SAR Test WCDMA 1900 LH_Tilt15 (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 9:24:13	DUT Battery Model/No:	
Filename:	PERAI-H_1900_LH_TILT15_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-46.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-166.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.81 V/m
Test Frequency:	1900MHz	SAR 1g:	0.086 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.059 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.045 W/kg
Type of Modulation:	WCDMA	SAR End:	0.046 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	3.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

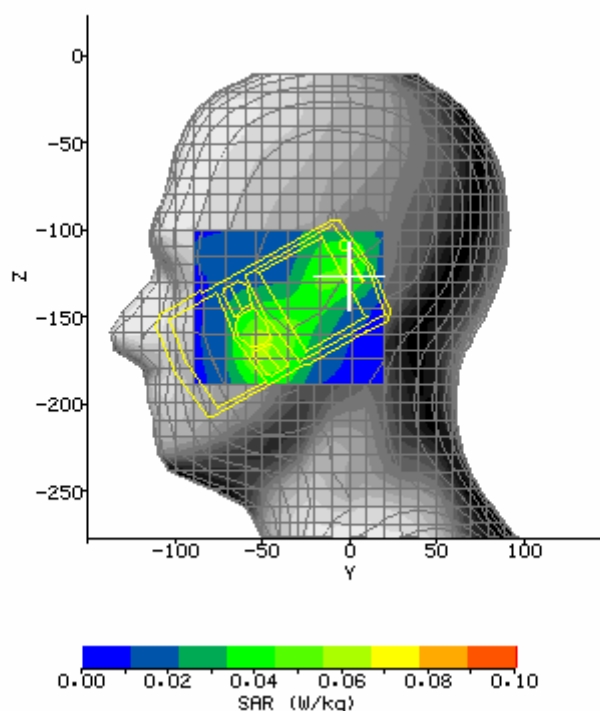


SAR Test WCDMA 1900 LH_Tilt15 (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 9:13:21	DUT Battery Model/No:	
Filename:	PERAI-H_1900_LH_TILT15_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-42.17 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-166.17 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	6.26 V/m
Test Frequency:	1900MHz	SAR 1g:	0.055 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.041 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.027 W/kg
Type of Modulation:	WCDMA	SAR End:	0.028 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.60 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

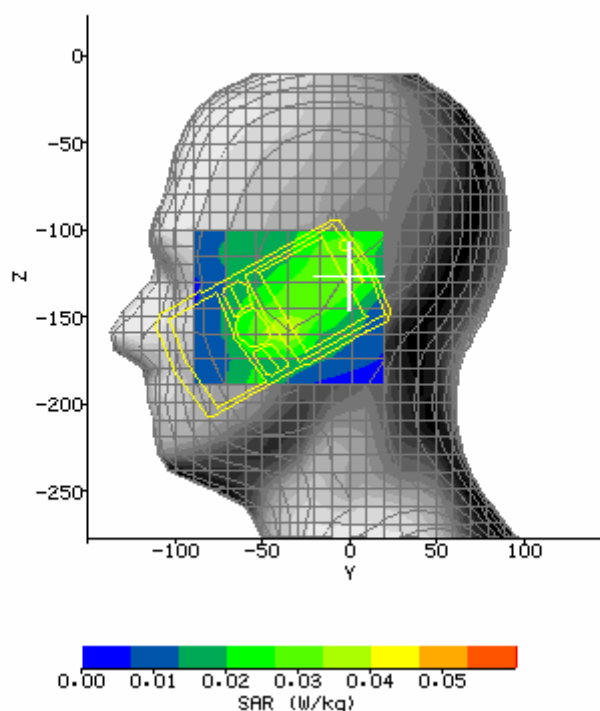


SAR Test WCDMA 1900 RH_Touchcheek (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 9:53:07	DUT Battery Model/No:	
Filename:	PERAI- H_1900_RH_TOUCHC HEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	71.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-169.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	21.67 V/m
Test Frequency:	1900MHz	SAR 1g:	0.693 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.405 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.379 W/kg
Type of Modulation:	WCDMA	SAR End:	0.391 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	3.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

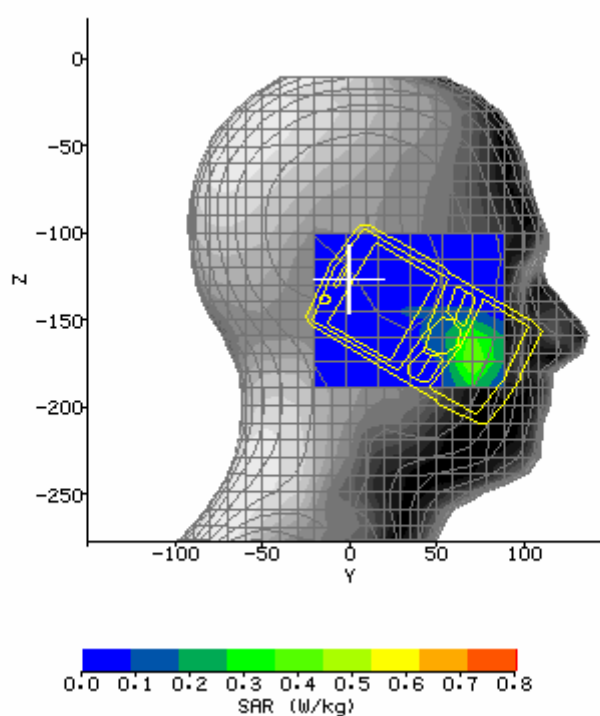


SAR Test WCDMA 1900 RH_Touchcheek (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 10:29:56	DUT Battery Model/No:	
Filename:	PERAI- H_1900_RH_TOUCHC HEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	71.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-175.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	20.75 V/m
Test Frequency:	1900MHz	SAR 1g:	0.566 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.368 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.125 W/kg
Type of Modulation:	WCDMA	SAR End:	0.128 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	2.43 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

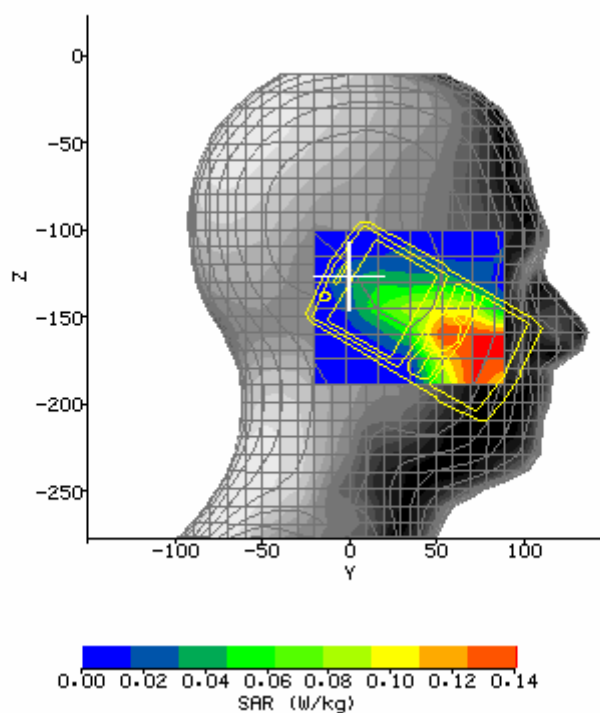


SAR Test WCDMA 1900 RH_Touchcheek (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 10:29:55	DUT Battery Model/No:	
Filename:	PERAI- H_1900_RH_TOUCHC HEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	73.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-166.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	13.54 V/m
Test Frequency:	1900MHz	SAR 1g:	0.232 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.147 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.125 W/kg
Type of Modulation:	WCDMA	SAR End:	0.128 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	2.43 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

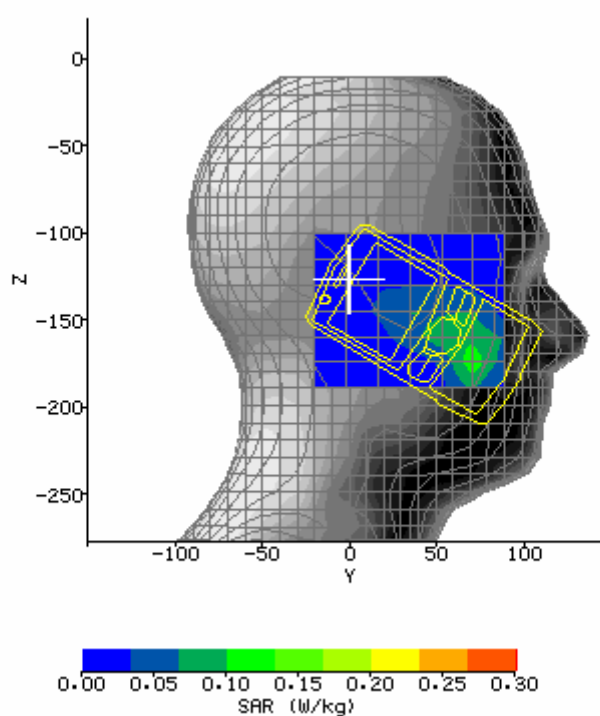


SAR Test WCDMA 1900 RH_Tilt15 (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 11:04:52	DUT Battery Model/No:	
Filename:	PERAI-H_1900_RH_TILT15_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	7.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	9.37 V/m
Test Frequency:	1900MHz	SAR 1g:	0.125 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.080 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.062 W/kg
Type of Modulation:	WCDMA	SAR End:	0.064 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.10 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

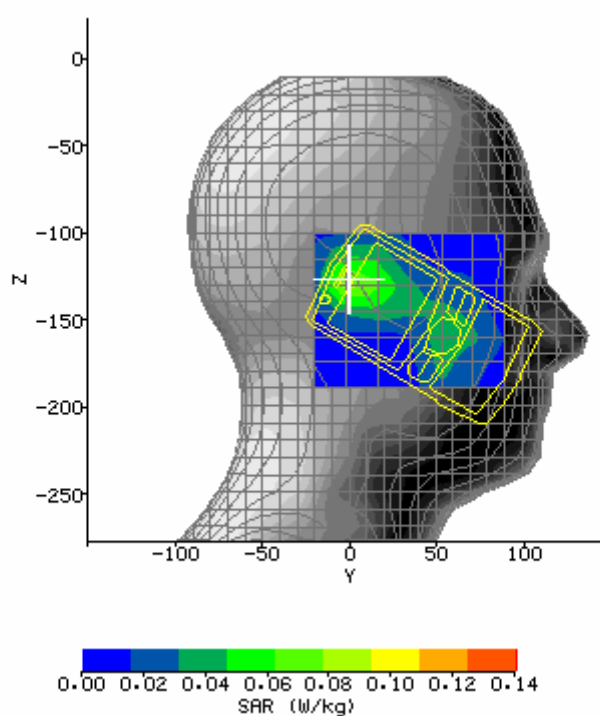


SAR Test WCDMA 1900 LH_Touchcheek (Bottom Channel With BlueTooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 8:40:00	DUT Battery Model/No:	
Filename:	PERAI- H_1900_LH_TOUCHC HEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.87
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-66.17 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-183.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	23.21 V/m
Test Frequency:	1900MHz	SAR 1g:	0.755 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.442W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	0.274 W/kg
Type of Modulation:	WCDMA	SAR End:	0.276 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.58 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

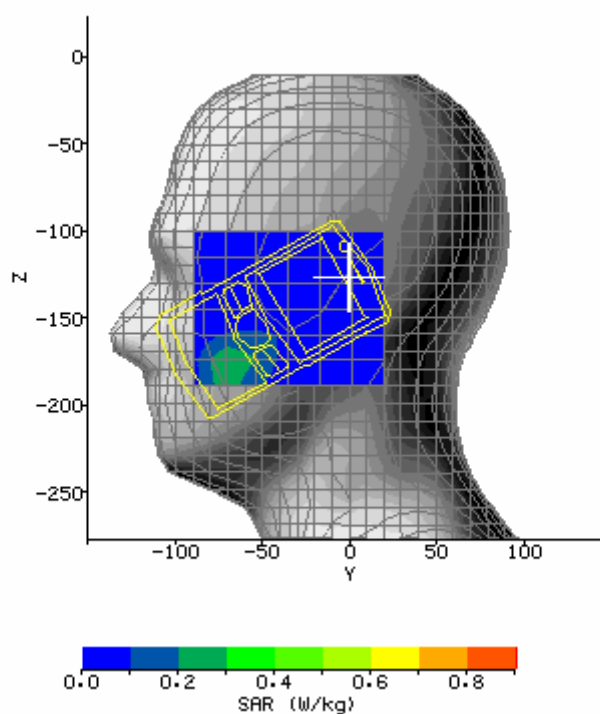


SAR Test WCDMA 1900 Side (Bottom Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 15:04:22	DUT Battery Model/No:	
Filename:	PERAI-H_1900_BODY_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	8.76 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	10.89 V/m
Test Frequency:	1900MHz	SAR 1g:	0.217 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.137 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.044 W/kg
Type of Modulation:	WCDMA	SAR End:	0.045 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	2.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

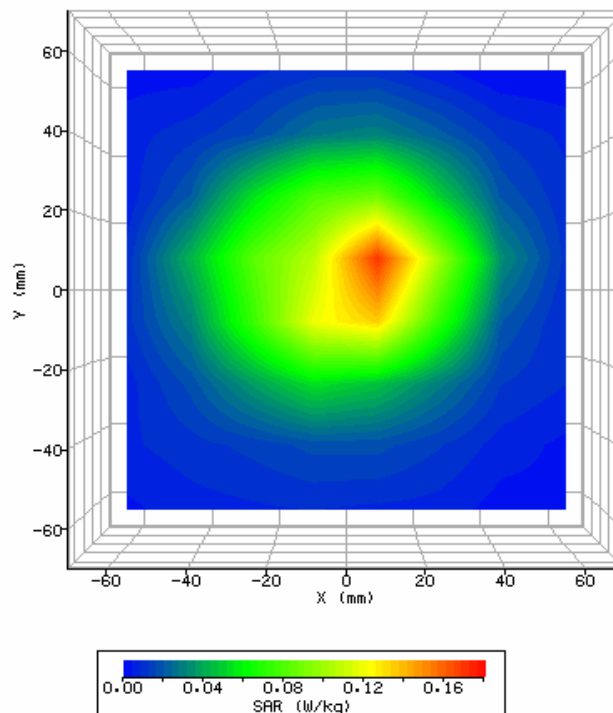


SAR Test WCDMA 1900 Side (Middle Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-29 15:16:32	DUT Battery Model/No:	
Filename:	PERAI-H_1900_BODY_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.43 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	10.84 V/m
Test Frequency:	1900MHz	SAR 1g:	0.210 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.124 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.039 W/kg
Type of Modulation:	WCDMA	SAR End:	0.041 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.96 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

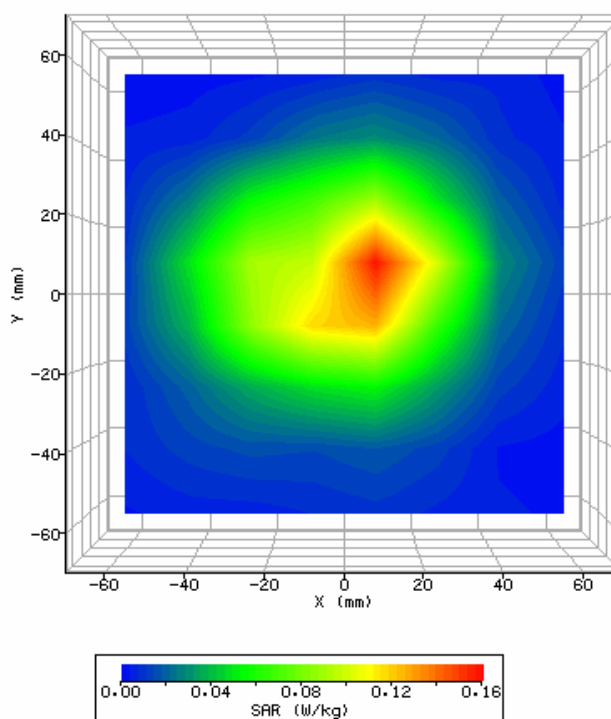


SAR Test WCDMA 1900 Side (Top Channel)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-29 15:26:13	DUT Battery Model/No:	
Filename:	PERAI-H_1900_BODY_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	7.05 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.52 V/m
Test Frequency:	1900MHz	SAR 1g:	0.127 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.077 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.023 W/kg
Type of Modulation:	WCDMA	SAR End:	0.023 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.26 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

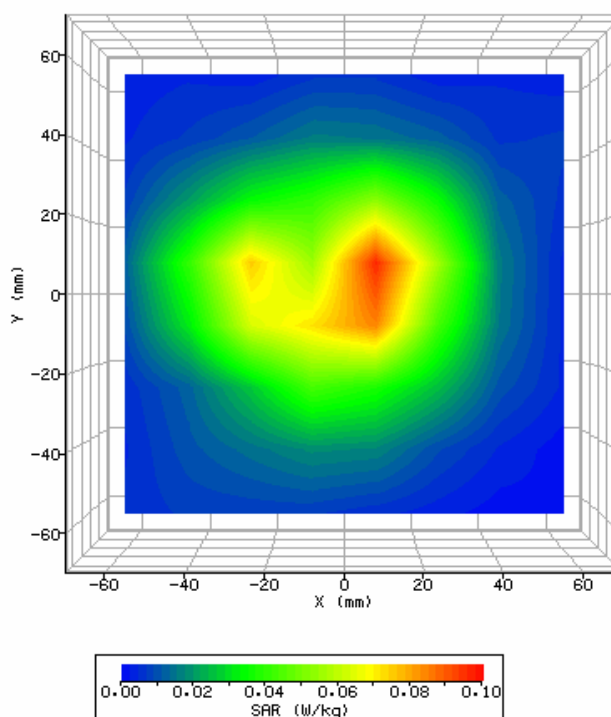


SAR Test WCDMA 1900 Side (Bottom Channel, With BlueTooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 15:04:22	DUT Battery Model/No:	
Filename:	PERAI-H_1900_BODY_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	8.76 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	10.89 V/m
Test Frequency:	1900MHz	SAR 1g:	0.225 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.142 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.050 W/kg
Type of Modulation:	WCDMA	SAR End:	0.050 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	2.04%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

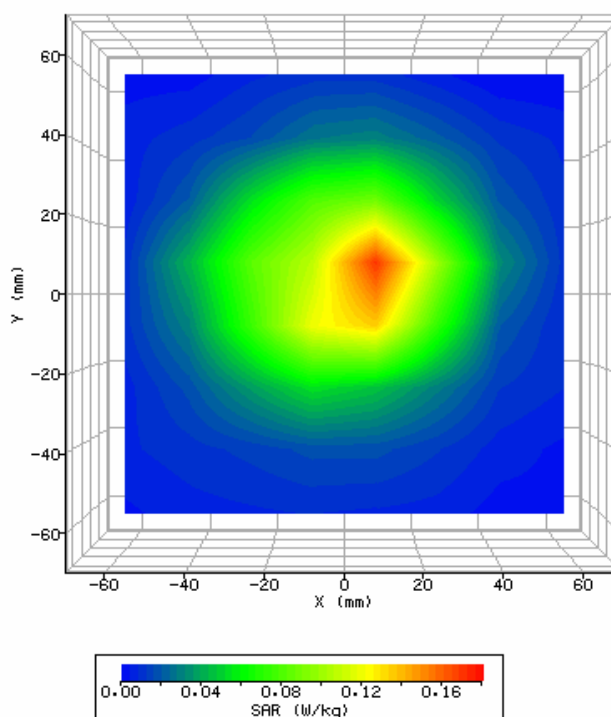


SAR Test WCDMA 1900 Side (Bottom Channel, face to Bottom)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-29 15:54:42	DUT Battery Model/No:	
Filename:	PERAI- H_1900_BODY_B_FAC ETOBOTTOM.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	53.36
Relative Humidity:	53%	Conductivity:	1.518
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	5.14 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	12.31 V/m
Test Frequency:	1900MHz	SAR 1g:	0.278 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	0.159 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	0.034 W/kg
Type of Modulation:	WCDMA	SAR End:	0.034 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.71 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

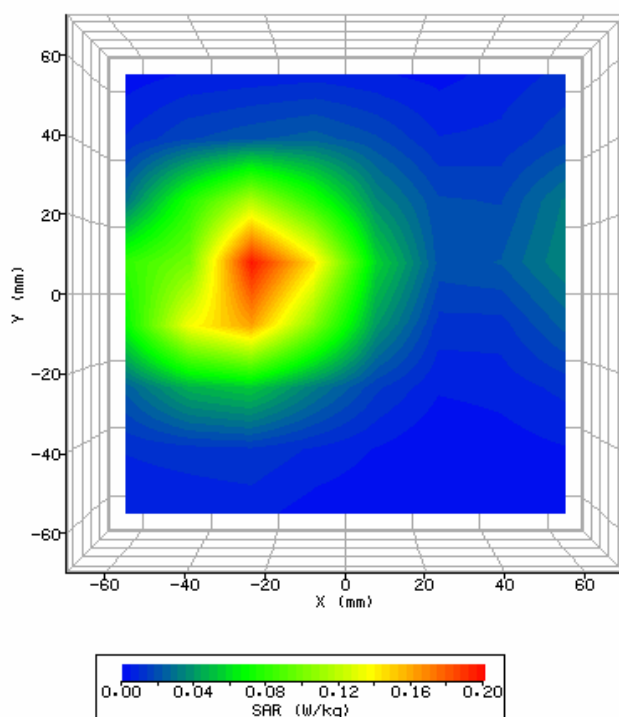


SAR Test WIFI 2450 LH_TouchCheek (Bottom Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:58:23	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_LH_TOUCHC HEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-51.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-160.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	6.93 V/m
Test Frequency:	2450MHz	SAR 1g:	0.068 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.034 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.015 W/kg
Type of Modulation:	OFDM	SAR End:	0.016 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.93 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

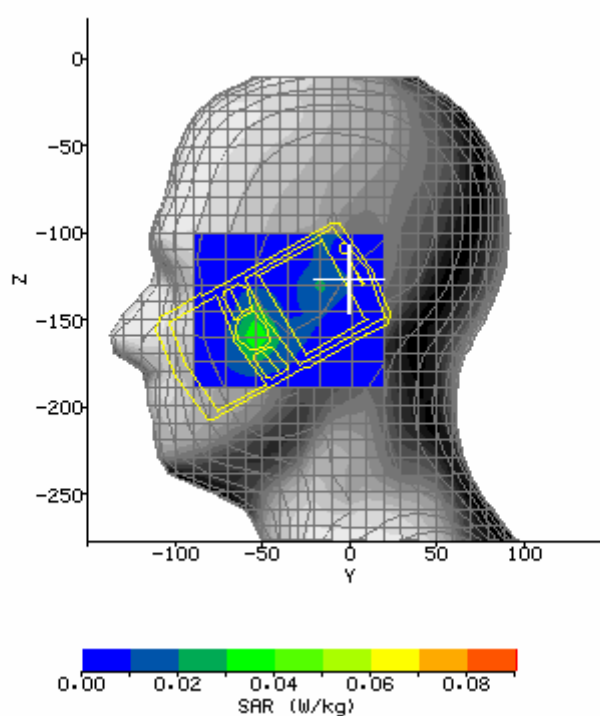


SAR Test WIFI 2450 LH_TouchCheek (Middle Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 16:09:19	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_LH_TOUCHC HEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-51.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-162.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.80 V/m
Test Frequency:	2450MHz	SAR 1g:	0.090 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.044 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.020 W/kg
Type of Modulation:	OFDM	SAR End:	0.020 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

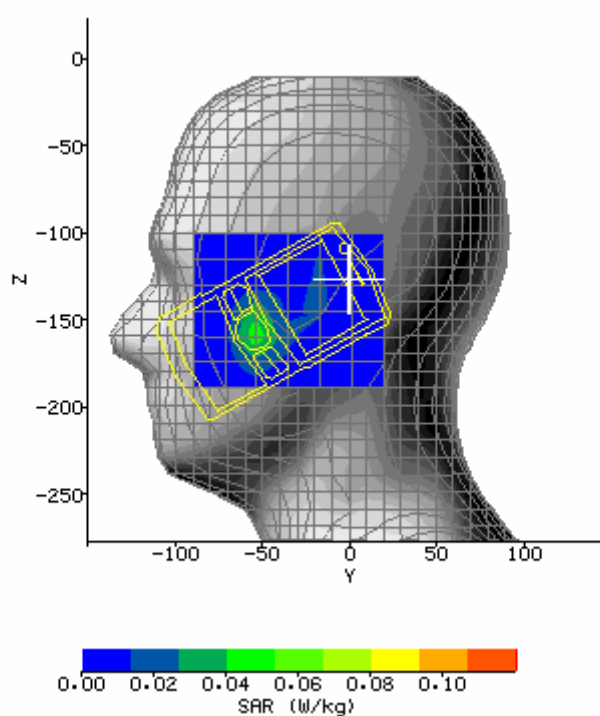


SAR Test WIFI 2450 LH_TouchCheek (Top Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 16:20:21	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_LH_TOUCHC HEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-51.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-162.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.27 V/m
Test Frequency:	2450MHz	SAR 1g:	0.101 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.049 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.021 W/kg
Type of Modulation:	OFDM	SAR End:	0.022 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.35 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

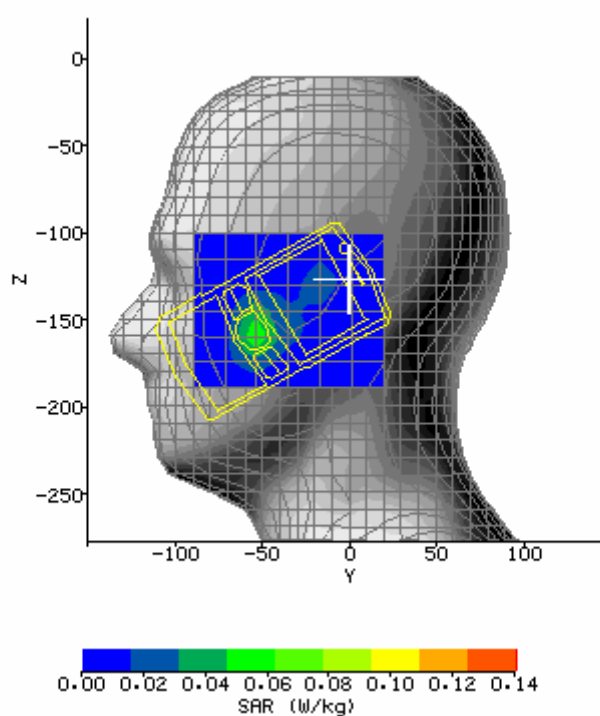


SAR Test WIFI 2450 LH_Tilt15 (Bottom Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 17:00:50	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_LH_TILT15_B. txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-84.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	3.80 V/m
Test Frequency:	2450MHz	SAR 1g:	0.021 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.015 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.013 W/kg
Type of Modulation:	OFDM	SAR End:	0.013 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.88 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

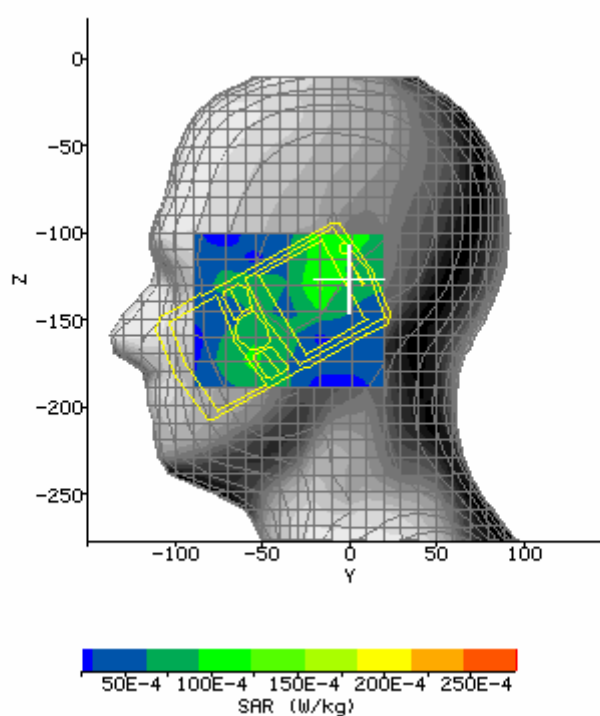


SAR Test WIFI 2450 LH_Tilt15 (Middle Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 16:49:28	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_LH_TILT15_M .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-122.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	4.70 V/m
Test Frequency:	2450MHz	SAR 1g:	0.033 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.020 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.005 W/kg
Type of Modulation:	OFDM	SAR End:	0.006 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	3.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

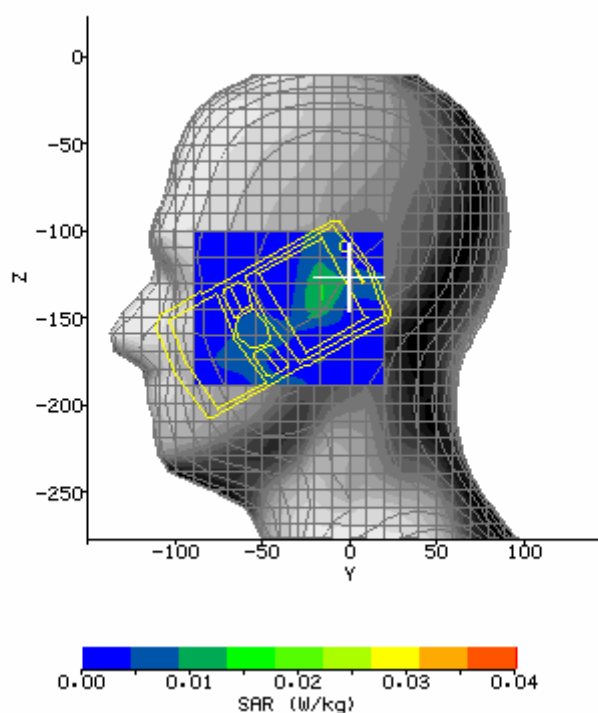


SAR Test WIFI 2450 LH_Tilt15 (Top Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 16:37:43	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_LH_TILT15_T.t xt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-14.83 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-121.67 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	4.60 V/m
Test Frequency:	2450MHz	SAR 1g:	0.033 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.020 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.009 W/kg
Type of Modulation:	OFDM	SAR End:	0.010 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

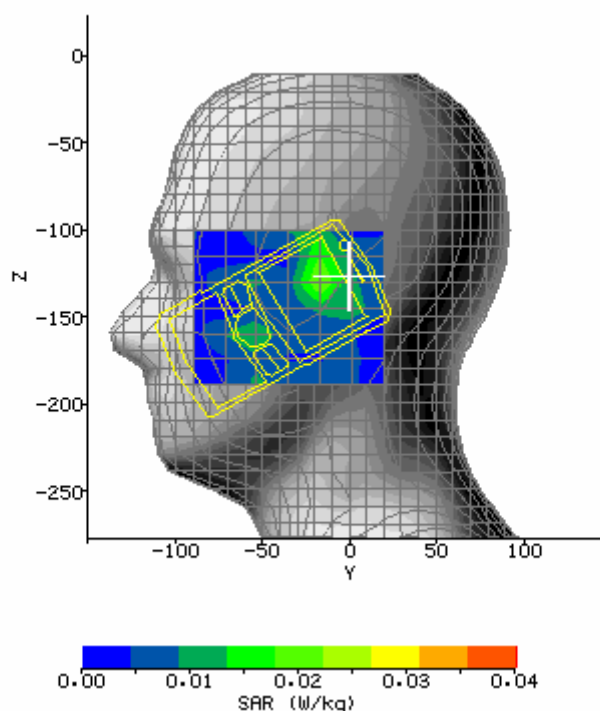


SAR Test WIFI 2450 RH_TouchCheek (Bottom Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 14:16:39	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_RH_TOUCHC HEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	49.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-152.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	6.23 V/m
Test Frequency:	2450MHz	SAR 1g:	0.061 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.031 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.017 W/kg
Type of Modulation:	OFDM	SAR End:	0.017 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-1.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

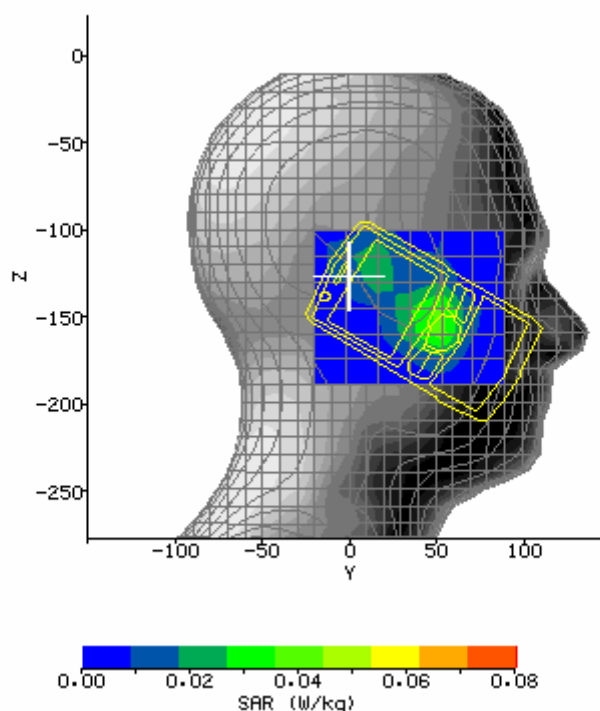


SAR Test WIFI 2450 RH_TouchCheek (Middle Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 14:29:57	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_RH_TOUCHC HEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	53.17 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-151.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	6.41 V/m
Test Frequency:	2450MHz	SAR 1g:	0.066 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.034 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.019 W/kg
Type of Modulation:	OFDM	SAR End:	0.020 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

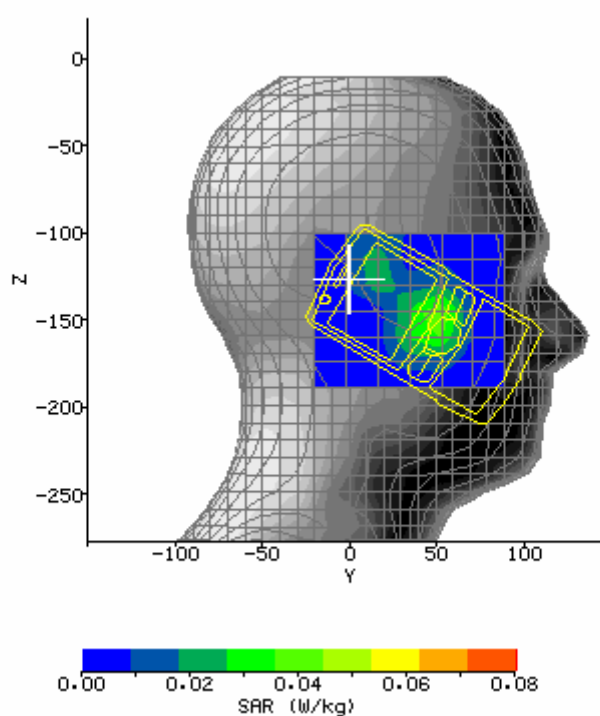


SAR Test WIFI 2450 RH_TouchCheek (Top Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 14:41:07	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_RH_TOUCHC HEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	49.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-151.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	6.52 V/m
Test Frequency:	2450MHz	SAR 1g:	0.069 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.035 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.019 W/kg
Type of Modulation:	OFDM	SAR End:	0.020 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.88 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

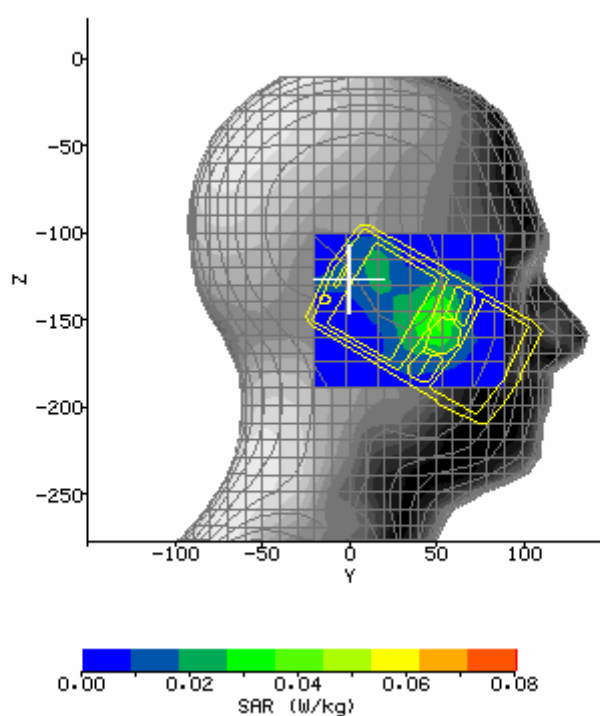


SAR Test WIFI 2450 RH_Tilt15 (Bottom Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:16:04	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_RH_TILT15_B .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	13.17 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-124.83 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	4.40 V/m
Test Frequency:	2450MHz	SAR 1g:	0.032 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.020 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.009 W/kg
Type of Modulation:	OFDM	SAR End:	0.009 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.38 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

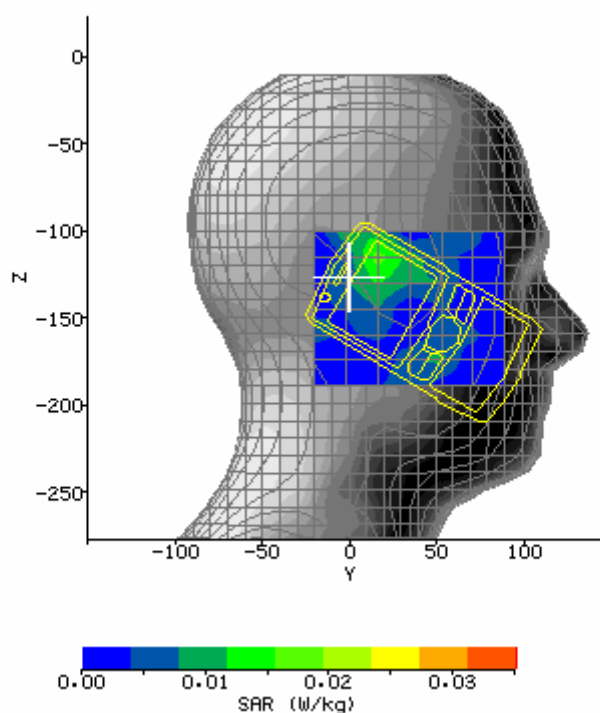


SAR Test WIFI 2450 RH_Tilt15 (Middle Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:04:21	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_RH_TILT15_M .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	6.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-126.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	5.04 V/m
Test Frequency:	2450MHz	SAR 1g:	0.036 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.021 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.012 W/kg
Type of Modulation:	OFDM	SAR End:	0.012 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	2.48 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

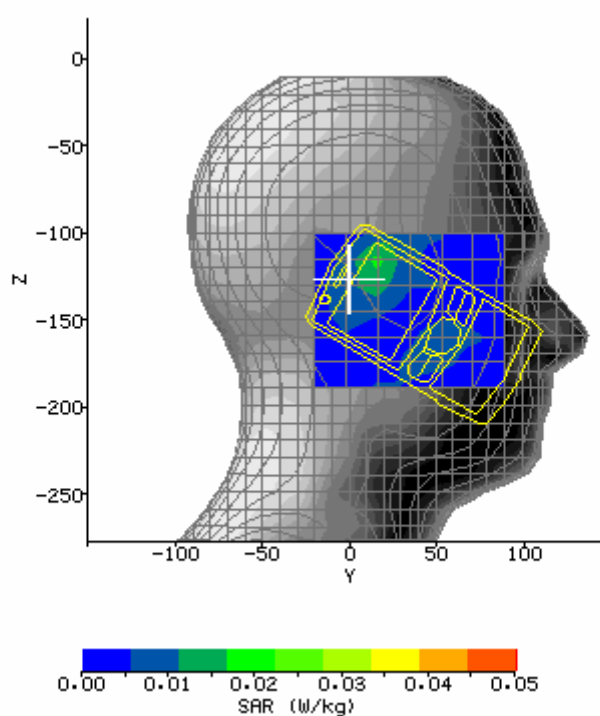


SAR Test WIFI 2450 RH_Tilt15 (Top Channel, 802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 14:52:47	DUT Battery Model/No:	
Filename:	PERAI-H_WIFI 802.11g_RH_TILT15_T. txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	11.33 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-122.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	5.18 V/m
Test Frequency:	2450MHz	SAR 1g:	0.040 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.022 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.010 W/kg
Type of Modulation:	OFDM	SAR End:	0.014 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	3.63 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

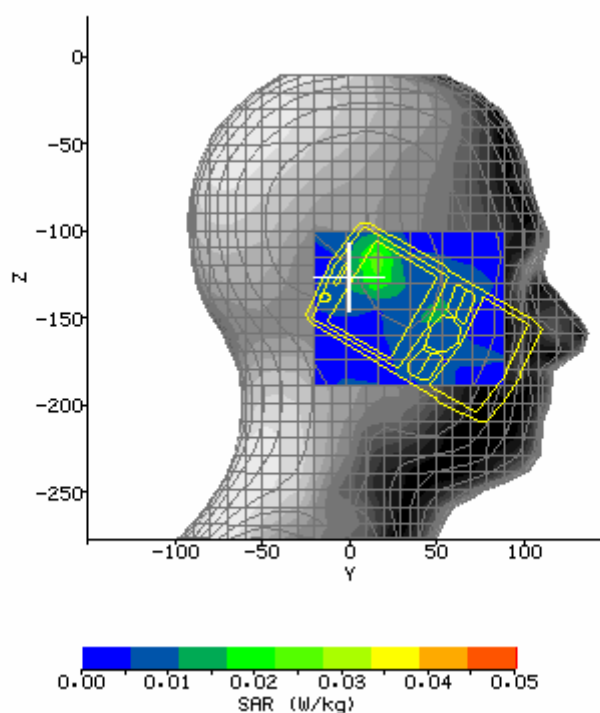


SAR Test WIFI 2450 Side (Bottom Channel ,802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:45:36	DUT Battery Model/No:	
Filename:	PERAI- H_802.11G_SIDE_BOD Y_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-5.14 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.50 V/m
Test Frequency:	2450MHz	SAR 1g:	0.131 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.089 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.024 W/kg
Type of Modulation:	OFDM	SAR End:	0.024 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

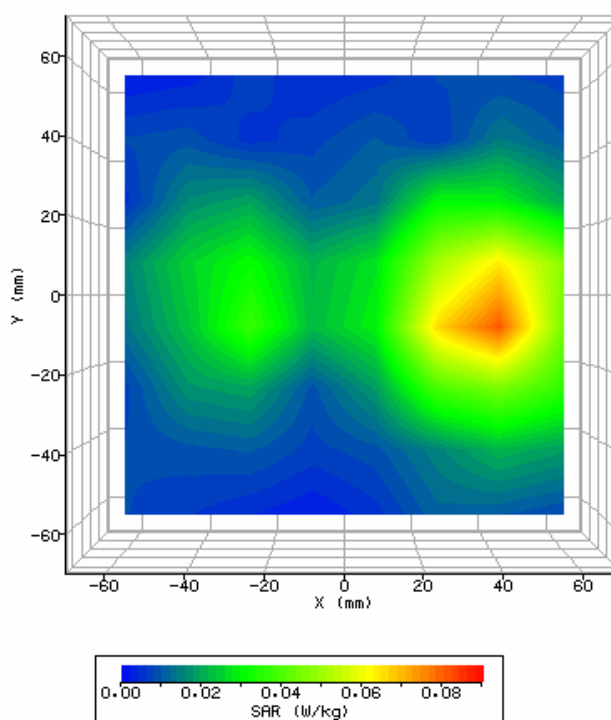


SAR Test WIFI 2450 Side (Middle Channel,802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:55:41	DUT Battery Model/No:	
Filename:	PERAI- H_802.11G_SIDE_BOD Y_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.43 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.55 V/m
Test Frequency:	2450MHz	SAR 1g:	0.176 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.115 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.026 W/kg
Type of Modulation:	OFDM	SAR End:	0.027 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.70 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

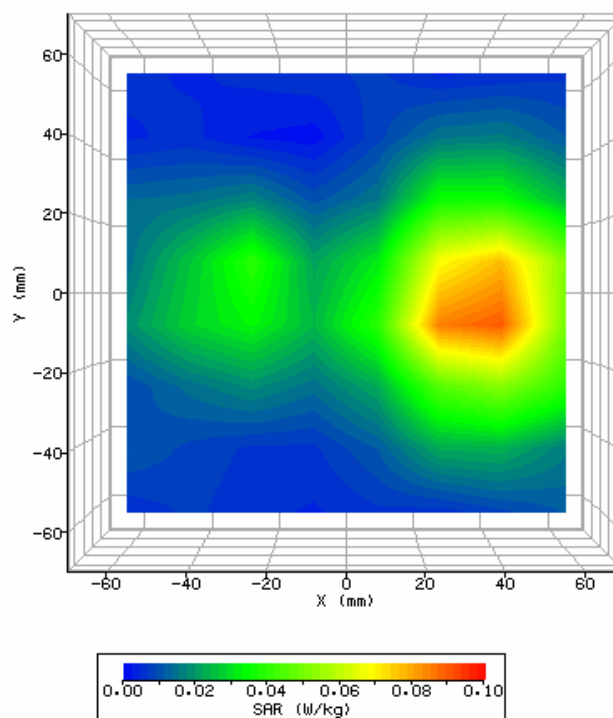


SAR Test WIFI 2450 Side (Top Channel,802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 16:05:28	DUT Battery Model/No:	
Filename:	PERAI- H_802.11G_SIDE_BOD Y_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.19 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	9.63 V/m
Test Frequency:	2450MHz	SAR 1g:	0.218 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.141 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.034 W/kg
Type of Modulation:	OFDM	SAR End:	0.035 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

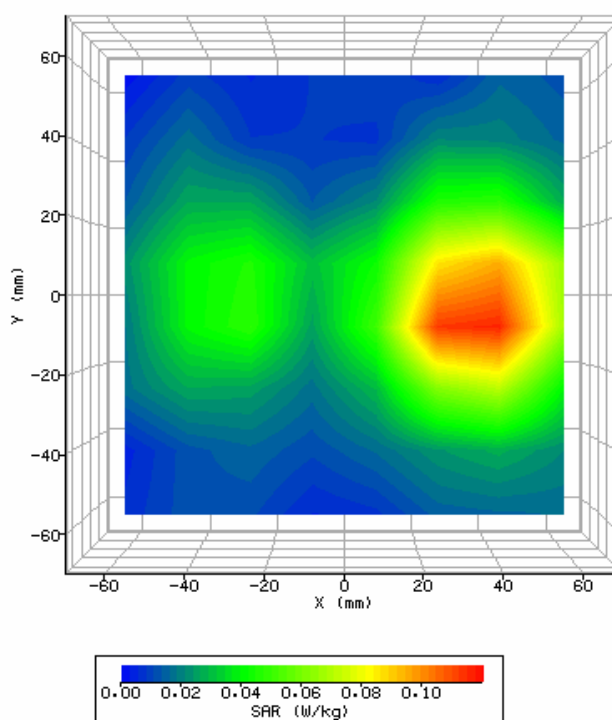


SAR Test WIFI 2450 Side (Top Channel,802.11g With BlueTooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 16:05:28	DUT Battery Model/No:	
Filename:	PERAI- H_802.11G_SIDE_BOD Y_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.19 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	9.63 V/m
Test Frequency:	2450MHz	SAR 1g:	0.221 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.145 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.041 W/kg
Type of Modulation:	OFDM	SAR End:	0.041 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.52 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

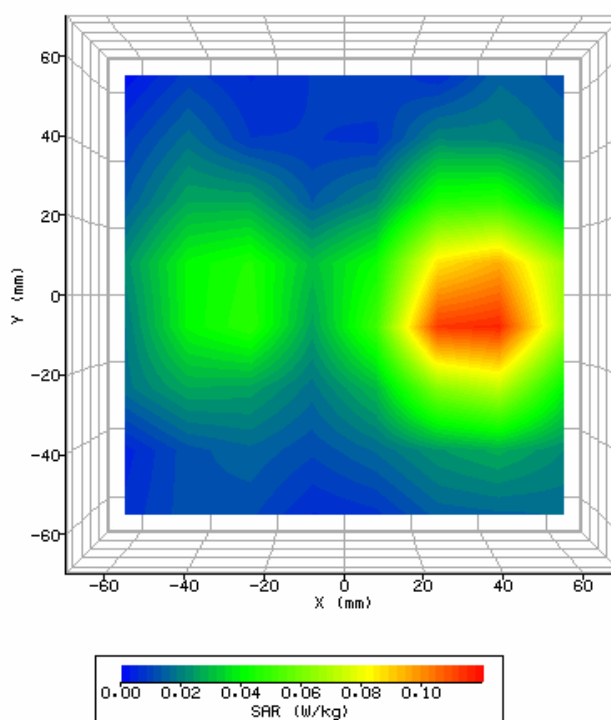


SAR Test WIFI 2450 Side (Bottom Channel, face to Bottom,802.11g)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 16:15:33	DUT Battery Model/No:	
Filename:	PERAI- H_802.11G_SIDE_BOD Y_T_FACETOBOTTOM .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-17.33 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.00 V/m
Test Frequency:	2450MHz	SAR 1g:	0.141 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.091 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.026 W/kg
Type of Modulation:	OFDM	SAR End:	0.027 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.64 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

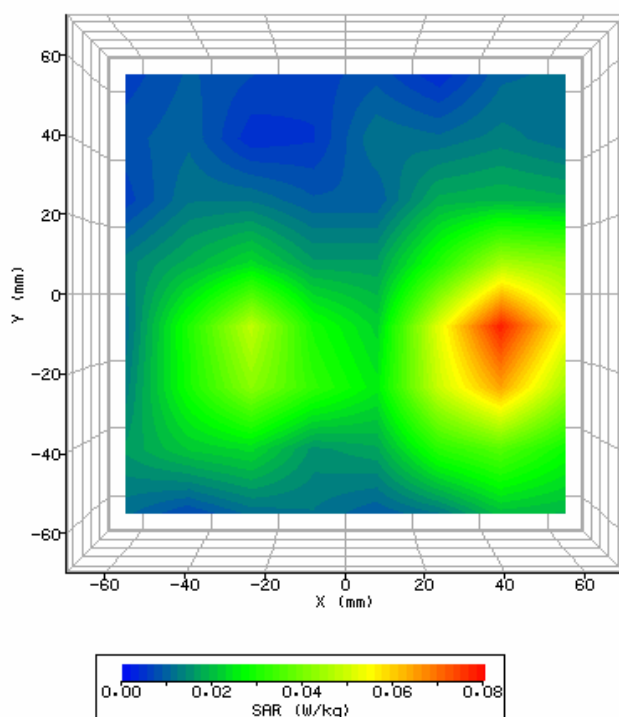


SAR Test WIFI 2450 LH_TouchCheek (Bottom Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 14:47:46	DUT Battery Model/No:	
Filename:	TECHFAITH_WIFI 802.11b_LH_TOUCHC HEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-51.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-158.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	15.65 V/m
Test Frequency:	2450MHz	SAR 1g:	0.347 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.162 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.057 W/kg
Type of Modulation:	OFDM	SAR End:	0.055 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-2.41 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

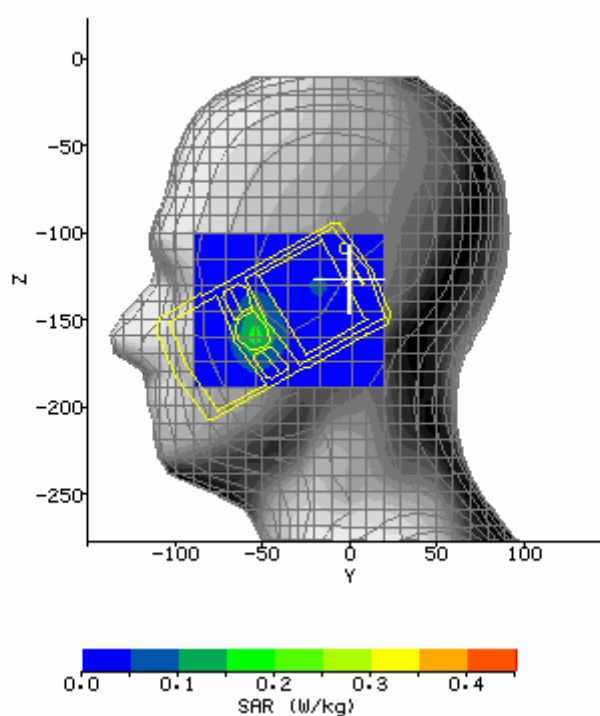


SAR Test WIFI 2450 LH_TouchCheek (Middle Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 14:59:17	DUT Battery Model/No:	
Filename:	TECHFAITH_WIFI 802.11b_LH_TOUCHC HEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-51.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-162.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	16.94 V/m
Test Frequency:	2450MHz	SAR 1g:	0.386 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.175 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.077 W/kg
Type of Modulation:	OFDM	SAR End:	0.077 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.79 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

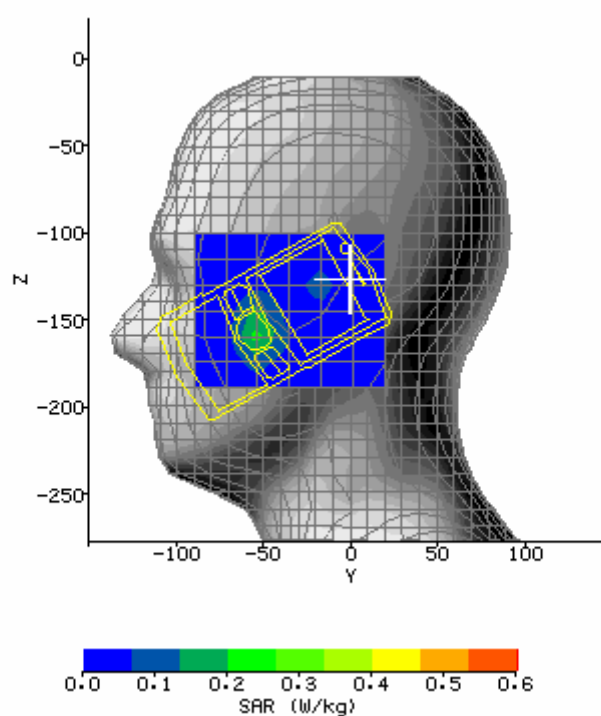


SAR Test WIFI 2450 LH_TouchCheek (Top Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:10:41	DUT Battery Model/No:	
Filename:	TECHFAITH_WIFI 802.11b_LH_TOUCHC HEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-51.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-157.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.09 V/m
Test Frequency:	2450MHz	SAR 1g:	0.400 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.179 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.081 W/kg
Type of Modulation:	OFDM	SAR End:	0.080 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-1.07 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

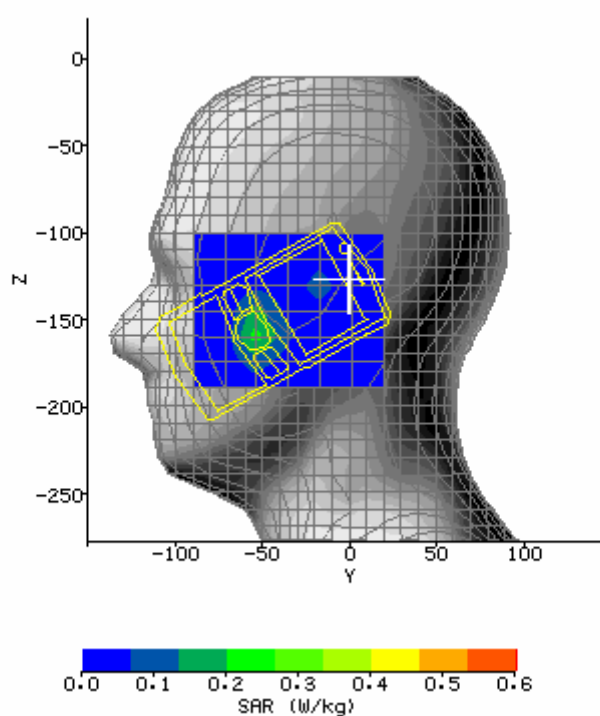


SAR Test WIFI 2450 LH_Tilt15 (Bottom Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:44:36	DUT Battery Model/No:	
Filename:	TECHFAITH_WIFI 802.11b_LH_TILT15_B. txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-135.33 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.46 V/m
Test Frequency:	2450MHz	SAR 1g:	0.094 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.049 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.020 W/kg
Type of Modulation:	OFDM	SAR End:	0.020 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.84 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

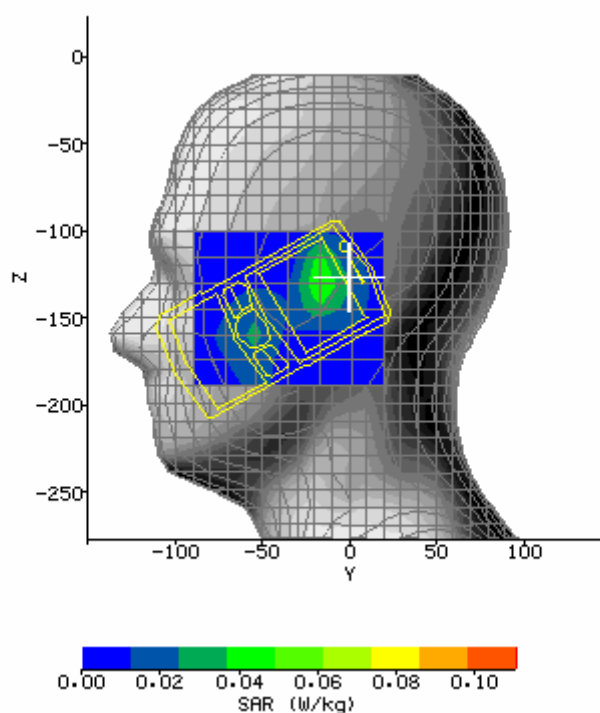


SAR Test WIFI 2450 LH_Tilt15 (Middle Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:33:12	DUT Battery Model/No:	
Filename:	TECHFAITH_WIFI 802.11b_LH_TILT15_M .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-9.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-130.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.18 V/m
Test Frequency:	2450MHz	SAR 1g:	0.114 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.058 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.025 W/kg
Type of Modulation:	OFDM	SAR End:	0.024 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-1.85 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

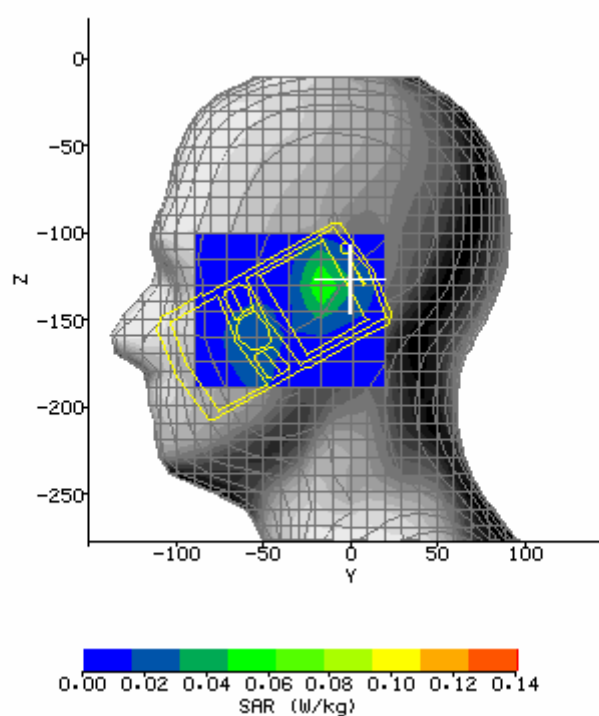


SAR Test WIFI 2450 LH_Tilt15 (Top Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:21:49	DUT Battery Model/No:	
Filename:	TECHFAITH_WIFI 802.11b_LH_TILT15_T.t xt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.67 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-130.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.50 V/m
Test Frequency:	2450MHz	SAR 1g:	0.124 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.062 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.031 W/kg
Type of Modulation:	OFDM	SAR End:	0.031 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

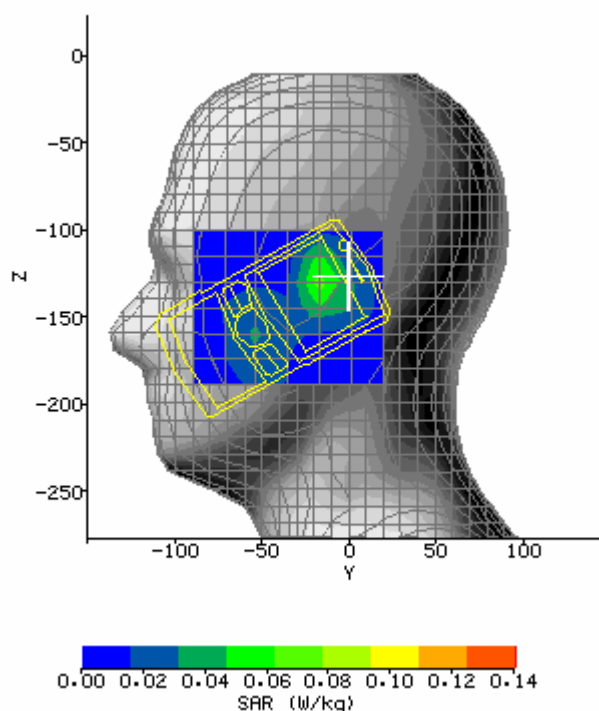


SAR Test WIFI 2450 RH_TouchCheek (Bottom Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 10:20:47	DUT Battery Model/No:	
Filename:	TECHFAITH_LH_WIFI 802.11b_RH_TOUCHC HEEK_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	56.83 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-149.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	12.95 V/m
Test Frequency:	2450MHz	SAR 1g:	0.255 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.126 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.077 W/kg
Type of Modulation:	OFDM	SAR End:	0.075 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-1.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

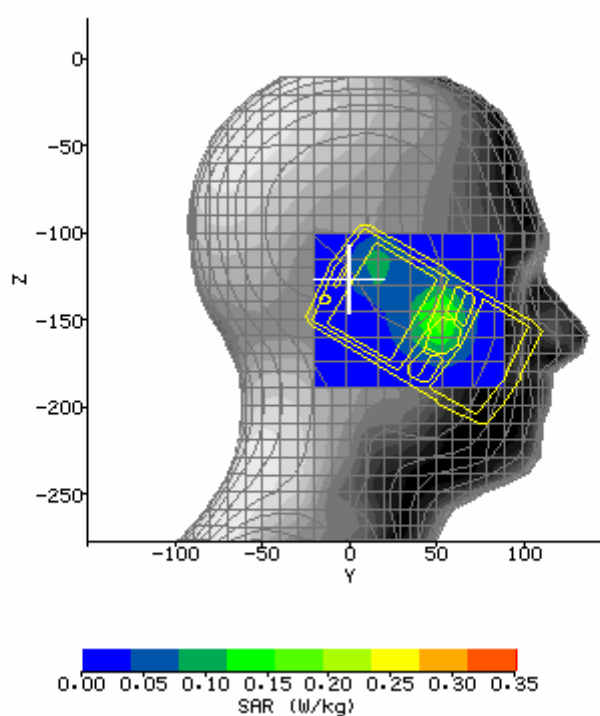


SAR Test WIFI 2450 RH_TouchCheek (Middle Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 10:33:21	DUT Battery Model/No:	
Filename:	TECHFAITH_LH_WIFI 802.11b_RH_TOUCHC HEEK_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	56.83 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-149.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	13.23 V/m
Test Frequency:	2450MHz	SAR 1g:	0.258 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.124 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.069 W/kg
Type of Modulation:	OFDM	SAR End:	0.067 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-4.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

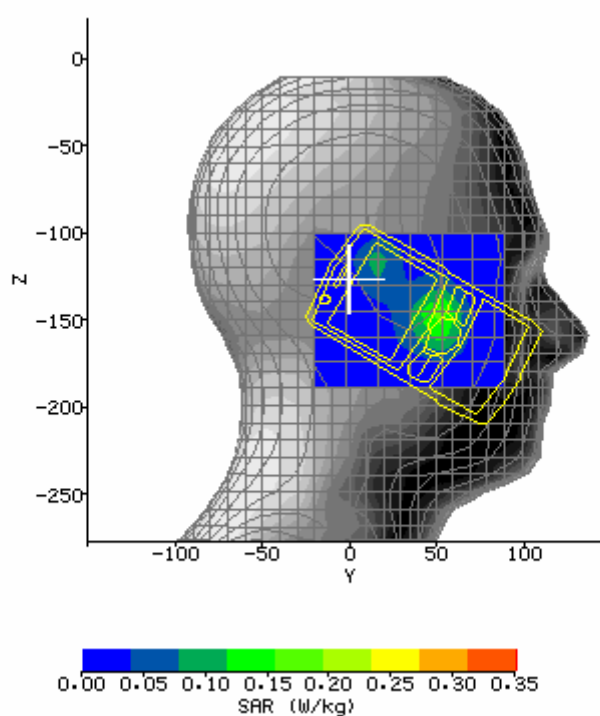


SAR Test WIFI 2450 RH_TouchCheek (Top Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 10:44:36	DUT Battery Model/No:	
Filename:	TECHFAITH_LH_WIFI 802.11b_RH_TOUCHC HEEK_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	55.00 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-148.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	13.35 V/m
Test Frequency:	2450MHz	SAR 1g:	0.258 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.124 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.061 W/kg
Type of Modulation:	OFDM	SAR End:	0.060 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-1.24 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

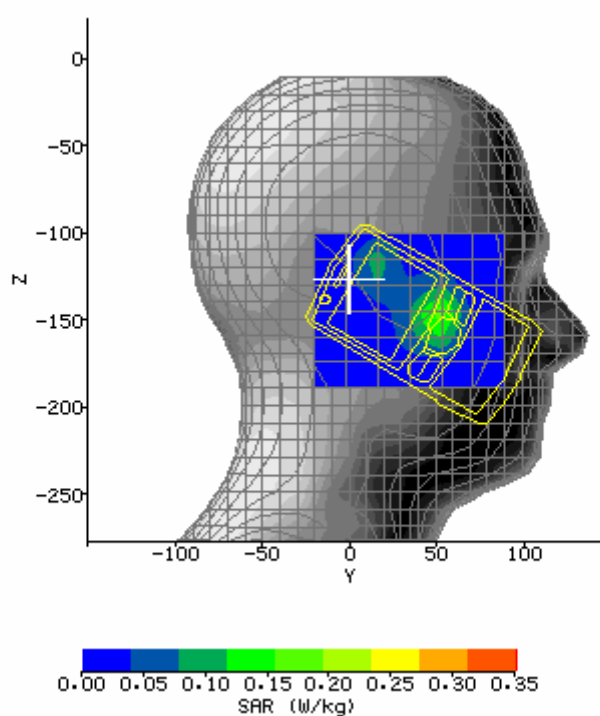


SAR Test WIFI 2450 RH_Tilt15 (Bottom Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 11:19:30	DUT Battery Model/No:	
Filename:	TECHFAITH_LH_WIFI 802.11b_RH_TILT15_B .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	18.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-124.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	7.53 V/m
Test Frequency:	2450MHz	SAR 1g:	0.094 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.052 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.024 W/kg
Type of Modulation:	OFDM	SAR End:	0.026 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	4.23 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

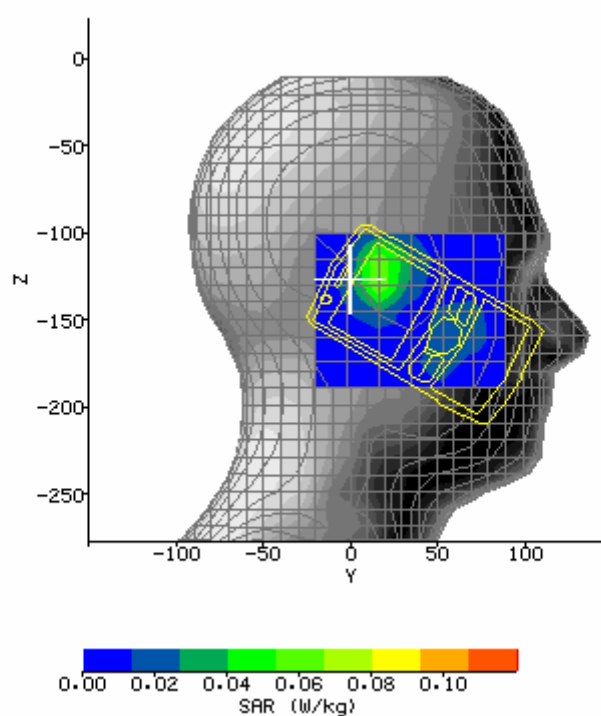


SAR Test WIFI 2450 RH_Tilt15 (Middle Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 11:08:03	DUT Battery Model/No:	
Filename:	TECHFAITH_LH_WIFI 802.11b_RH_TILT15_M .txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	18.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-122.50 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.37 V/m
Test Frequency:	2450MHz	SAR 1g:	0.110 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.059 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.031 W/kg
Type of Modulation:	OFDM	SAR End:	0.031 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.53 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

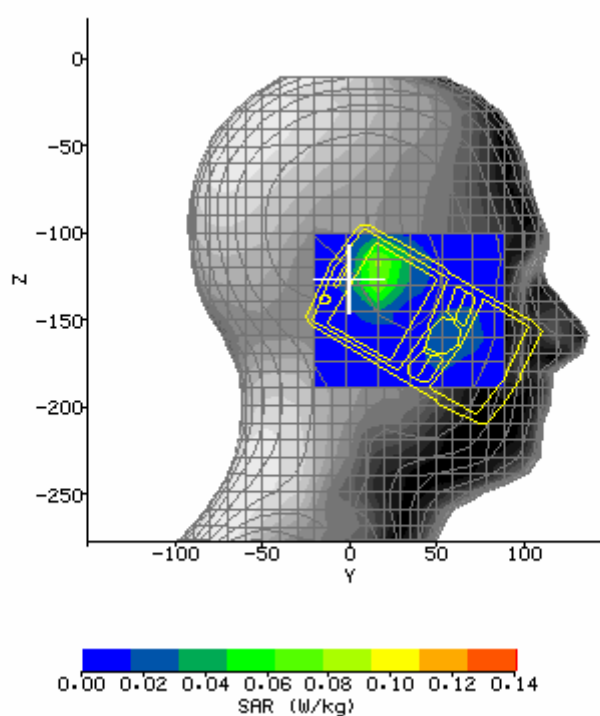


SAR Test WIFI 2450 RH_Tilt15 (Top Channel, 802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 10:56:39	DUT Battery Model/No:	
Filename:	TECHFAITH_LH_WIFI 802.11b_RH_TILT15_T. txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	HEAD tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	39.56
Relative Humidity:	53%	Conductivity:	1.804
Phantom S/No:	Head_380SH.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	18.50 mm
DUT Position:	HEAD	Max SAR Z-axis Location:	-124.00 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	8.34 V/m
Test Frequency:	2450MHz	SAR 1g:	0.114 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.060 W/kg
Conversion Factors:	.353 / .353 / .353	SAR Start:	0.030 W/kg
Type of Modulation:	OFDM	SAR End:	0.030 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-2.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

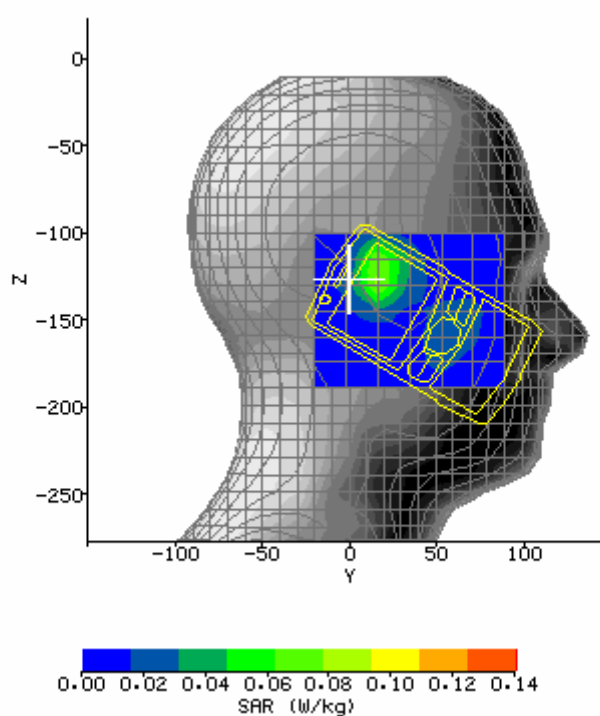


SAR Test WIFI 2450 Side (Bottom Channel ,802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.02dB
Date / Time:	2007-7-30 15:03:04	DUT Battery Model/No:	
Filename:	TECHFAITH_GSM850_SIDE_BODY_B.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-10.10 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	16.50 V/m
Test Frequency:	2450MHz	SAR 1g:	0.549 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.434 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.094 W/kg
Type of Modulation:	OFDM	SAR End:	0.088 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-4.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

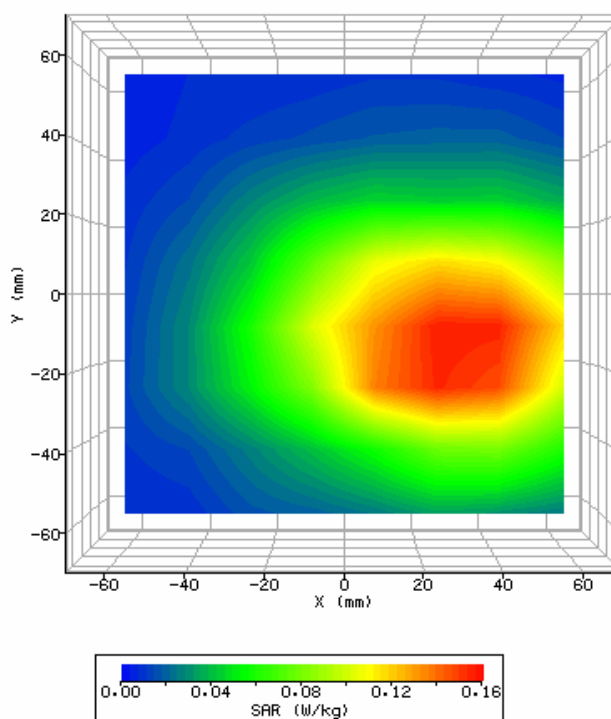


SAR Test WIFI 2450 Side (Middle Channel,802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-30 15:12:50	DUT Battery Model/No:	
Filename:	TECHFAITH_GSM850_SIDE_BODY_M.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-13.71 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	17.45 V/m
Test Frequency:	2450MHz	SAR 1g:	0.630 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.496 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.105 W/kg
Type of Modulation:	OFDM	SAR End:	0.105 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

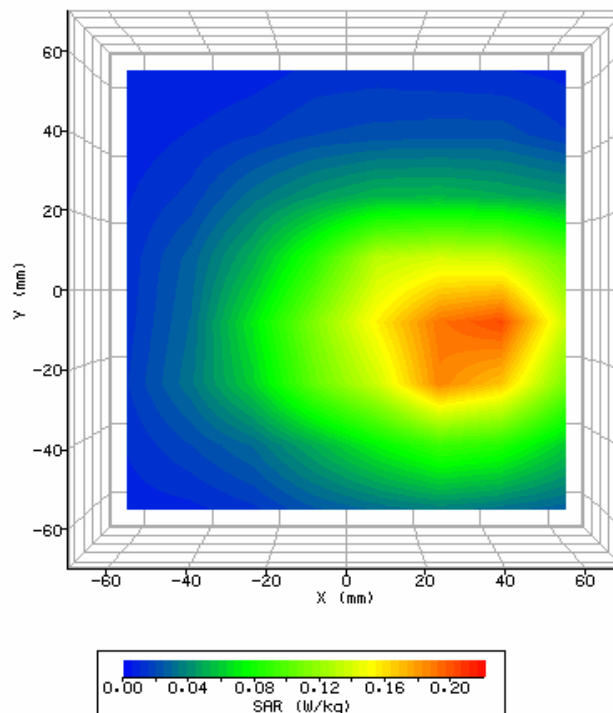


SAR Test WIFI 2450 Side (Top Channel,802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-30 15:22:31	DUT Battery Model/No:	
Filename:	TECHFAITH_GSM850_SIDE_BODY_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-15.62 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	18.17 V/m
Test Frequency:	2450MHz	SAR 1g:	0.690 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.544 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.112 W/kg
Type of Modulation:	OFDM	SAR End:	0.113 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	0.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

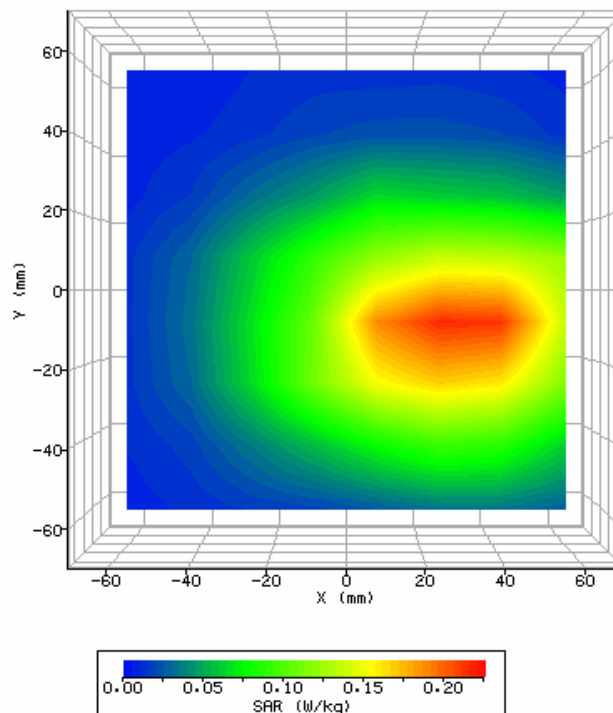


SAR Test WIFI 2450 Side (Top Channel,802.11b With BlueTooth)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.00dB
Date / Time:	2007-7-30 15:22:31	DUT Battery Model/No:	
Filename:	TECHFAITH_GSM850_SIDE_BODY_T.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-15.62 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	18.17 V/m
Test Frequency:	2450MHz	SAR 1g:	0.690 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.544 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.112 W/kg
Type of Modulation:	OFDM	SAR End:	0.113 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	0.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

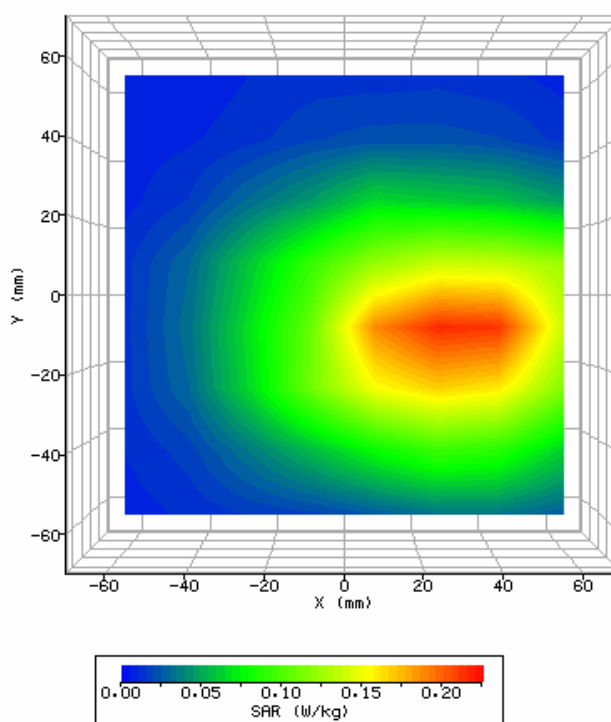

SAR Test WIFI 2450 Side (Bottom Channel, face to Bottom,802.11b)

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 15:32:36	DUT Battery Model/No:	
Filename:	TECHFAITH_GSM850_SIDE_BODY_T_FACET OBOTTOM.txt	Probe Serial Number:	0177
Ambient Temperature:	24.0°C	Liquid Simulant:	BODY tissue
Device Under Test:	TECHFAITH	Relative Permittivity:	52.89
Relative Humidity:	53%	Conductivity:	1.945
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.24 mm
DUT Position:	BODY	Max SAR Z-axis Location:	-478.20 mm
Antenna Configuration:	BUILD INSIDE	Max E Field:	14.33 V/m
Test Frequency:	2450MHz	SAR 1g:	0.404 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	0.326 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.068 W/kg
Type of Modulation:	OFDM	SAR End:	0.067 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-1.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	MAX POWER	Extrapolation:	poly4

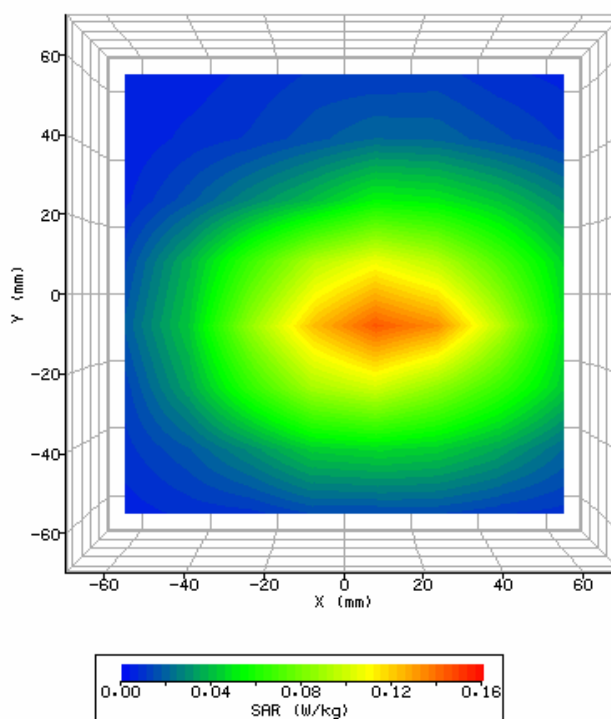



ANNEX E
of
ShenZhen Electronic Product Quality Testing Center

CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SAR07-034

TechFaith Wireless Technology Group Limited

GSM/WCDMA mobile phone

Type Name: PERAI-H

Hardware Version: EP2

Software Version: TF_WM6_PERAI_H_VER_02.02

System Performance Check Data


This Annex consists of 7 pages

Date of Report: 2007-08-10




System Cheek Head 850MHz

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	-0.02dB
Date / Time:	2007-7-28 08:05:20	DUT Battery Model/No:	
Filename:	System Cheek_Head _850MHz.txt	Probe Serial Number:	0177
Ambient Temperature:	23.3°C	Liquid Simulant:	Head tissue
Device Under Test:	IXD-090antenna (250mw)	Relative Permittivity:	41.42
Relative Humidity:	59%	Conductivity:	.93
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	5.35 mm
DUT Position:	850_Head	Max SAR Z-axis Location:	-213.02 mm
Antenna Configuration:	IXD-090antenna	Max E Field:	47.03 V/m
Test Frequency:	850MHz	SAR 1g:	2.632 W/kg
Air Factors:	417.2 / 368.0 / 414.8	SAR 10g:	1.747 W/kg
Conversion Factors:	.287 / .287 / .287	SAR Start:	0.618 W/kg
Type of Modulation:	/	SAR End:	0.612 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-2.21 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	24dBm	Extrapolation:	poly4

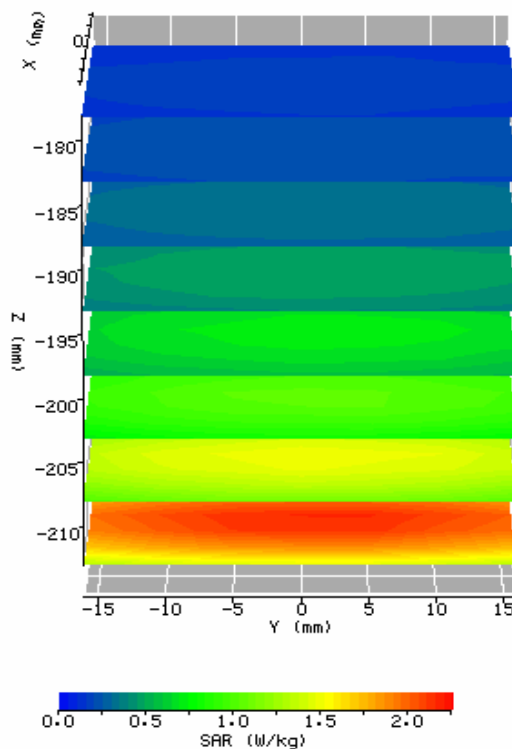


System Cheek Body 850MHz

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-28 08:17:34	DUT Battery Model/No:	
Filename:	System Cheek_Body _850MHz.txt	Probe Serial Number:	0177
Ambient Temperature:	23.5°C	Liquid Simulant:	Body tissue
Device Under Test:	IXD-090antenna (250mw)	Relative Permittivity:	55.06
Relative Humidity:	57%	Conductivity:	1.021
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	850_Body	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	IXD-090antenna	Max E Field:	44.80 V/m
Test Frequency:	850MHz	SAR 1g:	2.568 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	1.663W/kg
Conversion Factors:	.271 / .271 / .271	SAR Start:	0.563 W/kg
Type of Modulation:	/	SAR End:	0.560 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	-1.52 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	24dBm	Extrapolation:	poly4

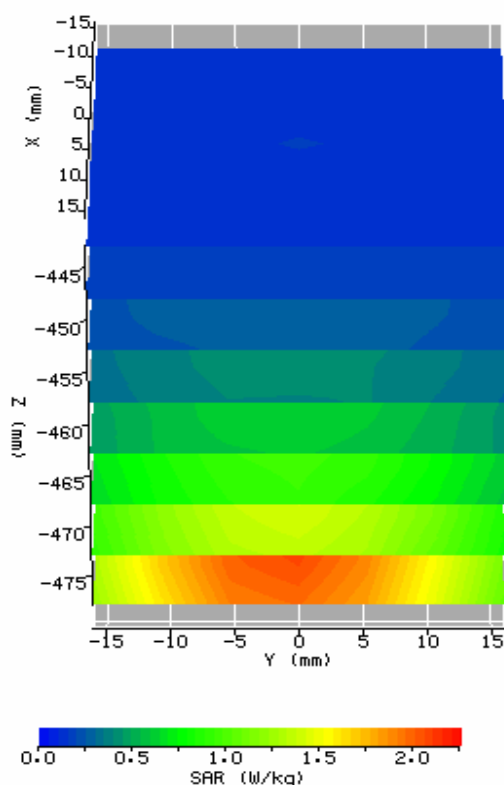


System Cheek Head 1900MHz

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	-0.01dB
Date / Time:	2007-7-29 08:29:12	DUT Battery Model/No:	
Filename:	System Cheek_Head _1900MHz.txt	Probe Serial Number:	0177
Ambient Temperature:	23.6°C	Liquid Simulant:	Head tissue
Device Under Test:	IXD-080antenna (250mw)	Relative Permittivity:	40.12
Relative Humidity:	56%	Conductivity:	1.393
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	23.1°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	1900_Head	Max SAR Z-axis Location:	-213.09 mm
Antenna Configuration:	IXD-080antenna	Max E Field:	76.86 V/m
Test Frequency:	1900MHz	SAR 1g:	10.285W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	5.716W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	1.612/kg
Type of Modulation:	/	SAR End:	1.610
Modn. Duty Cycle:	1	SAR Drift during Scan:	-0.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	24dBm	Extrapolation:	Poly4

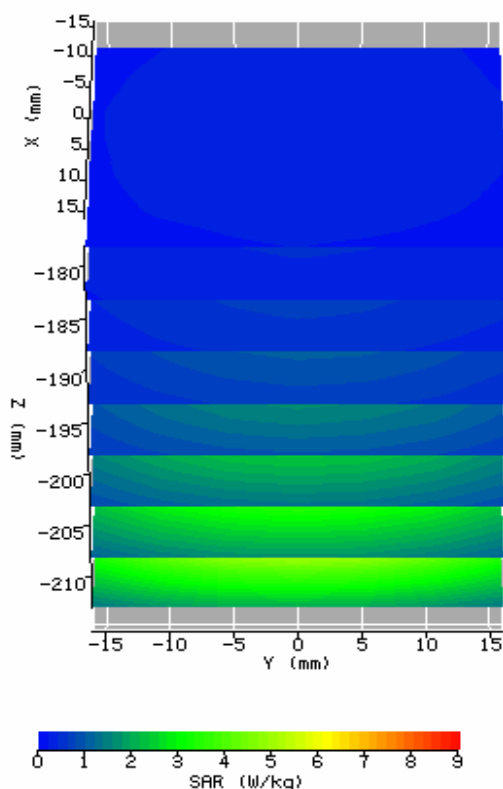


System Cheek Body 1900MHz

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-29 08:43:41	DUT Battery Model/No:	
Filename:	System Cheek_Body _1900MHz.txt	Probe Serial Number:	0177
Ambient Temperature:	23.6°C	Liquid Simulant:	Body tissue
Device Under Test:	IXD-080antenna (250mw)	Relative Permittivity:	53.21
Relative Humidity:	57%	Conductivity:	1.525
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	1900_Body	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	IXD-080antenna	Max E Field:	73.06 V/m
Test Frequency:	1900MHz	SAR 1g:	10.085 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	5.482 W/kg
Conversion Factors:	.356 / .356 / .356	SAR Start:	1.563 W/kg
Type of Modulation:	/	SAR End:	1.572 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	24dBm	Extrapolation:	poly4

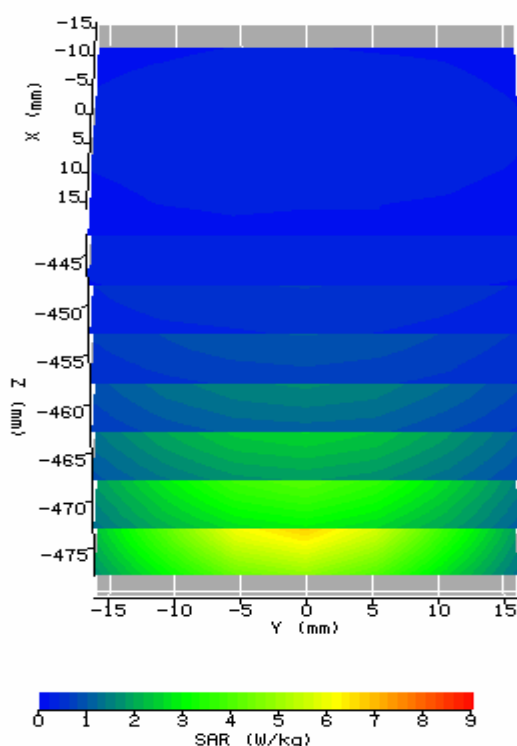

System Cheek Head 2450MHz

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	-0.01dB
Date / Time:	2007-7-30 8:41:32	DUT Battery Model/No:	
Filename:	System Cheek_Head _2450MHz.txt	Probe Serial Number:	0177
Ambient Temperature:	23.3°C	Liquid Simulant:	Head tissue
Device Under Test:	IXD-245antenna (250mw)	Relative Permittivity:	39.20
Relative Humidity:	55%	Conductivity:	1.789
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	23.3°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	2450_Head	Max SAR Z-axis Location:	-213.09 mm
Antenna Configuration:	IXD-245antenna	Max E Field:	85.69 V/m
Test Frequency:	2450MHz	SAR 1g:	13.206 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	7.122 W/kg
Conversion Factors:	.325 / .325 / .325	SAR Start:	1.804 W/kg
Type of Modulation:	/	SAR End:	1.802 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	1.17 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	24dBm	Extrapolation:	poly4

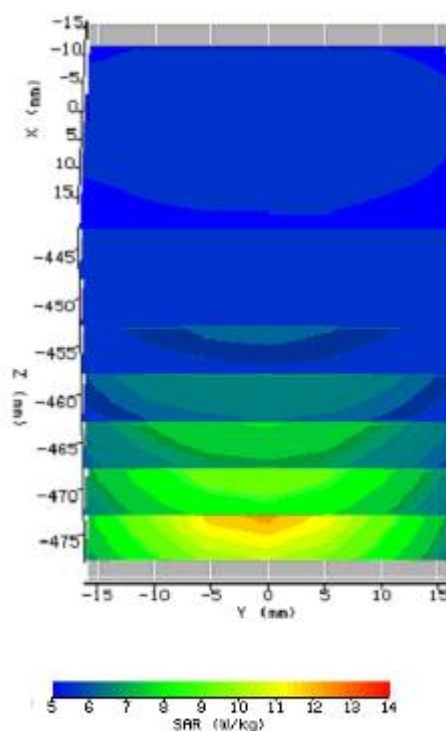

System Cheek Body 2450MHz

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	0.01dB
Date / Time:	2007-7-30 729:45	DUT Battery Model/No:	
Filename:	System Cheek_Body _2450MHz.txt	Probe Serial Number:	0177
Ambient Temperature:	23.4°C	Liquid Simulant:	Body tissue
Device Under Test:	IXD-245antenna (250mw)	Relative Permittivity:	52.65
Relative Humidity:	57%	Conductivity:	1.938
Phantom S/No:	HeadBox75mm.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	2450_Body	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	IXD-080antenna	Max E Field:	79.08 V/m
Test Frequency:	2450MHz	SAR 1g:	13.086 W/kg
Air Factors:	417 / 368 / 414	SAR 10g:	6.037 W/kg
Conversion Factors:	.395 / .395 / .395	SAR Start:	1.647 W/kg
Type of Modulation:	/	SAR End:	1.648 W/kg
Modn. Duty Cycle:	1	SAR Drift during Scan:	0.93 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	20/05/05
Input Power Level:	24dBm	Extrapolation:	poly4

